

Date: ESPOO 12.10.2004Page: 1 (37)Appendices -Number:
No. 1 / 1**1032445**


Date of handing in: 27.09.2004

Tested by:



Timo Hietala, Test Engineer

Reviewed by:



Timo Leismala, Test Manager

SORT OF EQUIPMENT:

Triple band (900/1800/1900) E-GPRS GSM Mobile phone

MARKETING NAME:

Nokia 9300

TYPE:

RAE-6**Bluetooth**

MANUFACTURER:

Nokia Corporation

CLIENT:

Nokia Corporation

ADDRESS:

Joensuunkatu 7 H, FIN-24100 SALO, Finland

TELEPHONE:

+ 358 400 815 340, Timo Seppälä

TEST LABORATORY:

Nemko Oy

FCC REG. NO.

91087 August 24, 2004

IC FILE NO.

IC 4627 July 2, 2003**SUMMARY:**

In regard to the performed tests the equipment under test fulfils the requirements defined in the test specifications, see page 2 for details

The test results are valid for the tested unit only. Without a written permission of Nemko Oy it is allowed to copy this report as a whole, but not partially.

Summary of performed tests and test results

<i>Section in CFR 47</i>	<i>Section in RSS-210</i>		<i>Result</i>
15.247, a1	6.2.2(o), a1	Carrier frequency separation	PASS
15.247, a1ii	6.2.2(o), a3	Number of hopping frequencies	PASS
15.247, a1ii, 15.247, f	6.2.2(o), a3	Time of occupancy	PASS
15.247, a	6.2.2(o), a1	20 dB bandwidth	PASS
15.247, b1	6.2.2(o), a3	Peak output power	PASS
15.247, c	6.2.2(o), e1	Band-edge compliance of RF emissions	PASS
15.247, c	6.2.2(o), e1	Spurious RF conducted emissions	PASS
15.247, c	6.2.2(o), e1	Spurious radiated emissions	PASS
15.207	6.6	AC power line conducted emissions	PASS

Explanations:

PASS The EUT passed that particular test.
FAIL The EUT failed that particular test.
X The measurement was done, but there is no applicable performance criteria.

Contents

Summary of performed tests and test results	2
1. EUT and Accessory Information	4
1.1 EUT description	4
1.2 EUT and accessories.....	4
2. Test setups.....	5
3. Standards and measurement methods.....	6
4. Test results.....	6
4.1 Carrier frequency separation	6
4.1.1 EUT operation mode.....	6
4.1.2 Limits and test results	6
4.2 Number of hopping frequencies	8
4.2.1 EUT operation mode.....	8
4.2.2 Limits and test results	8
4.3 Time of occupancy.....	10
4.3.1 EUT operation mode.....	10
4.3.2 Limits and test results	10
4.3.3 EUT operation mode.....	14
4.3.4 Limits and test results	14
4.3.5 EUT operation mode.....	17
4.3.6 Limits and test results	17
4.4 20 dB bandwidth	19
4.4.1 EUT operation mode.....	19
4.4.2 Limits and test results	19
4.5 Peak output power.....	23
4.5.1 EUT operation mode.....	23
4.5.2 Limits and test results	23
4.5.3 Test results	23
4.6 Band-edge compliance of RF conducted emissions	25
4.6.1 EUT operation mode.....	25
4.6.2 Limits and test results	25
4.6.3 EUT operation mode.....	28
4.6.4 Limits and test results	28
4.7 Spurious RF conducted emission.....	30
4.7.1 EUT operation mode.....	30
4.7.2 Limits and test results	30
4.8 Spurious radiated emission	30
4.8.1 EUT operation mode.....	30
4.8.2 Test method and limit	31
4.8.3 Test results	31
4.9 AC power line conducted emissions.....	33
4.9.1 Test method and limit	33
4.9.2 EUT operation mode.....	33
4.9.3 Test results	34
5. List of test equipment.....	36
6. Photographs.....	37

1. EUT and Accessory Information

1.1 EUT description

The EUT is a Triple band (900/1800/1900) E-GPRS GSM mobile phone with Bluetooth.


1.2 EUT and accessories

	<i>unit</i>	<i>type</i>	<i>S/N</i>
<i>EUT1</i>	Mobile phone	RAE-6	004400/57/160206/7 HW: 4001, SW: 4.37(0)
<i>EUT2</i>	Mobile phone	RAE-6	004400/57/160209/1 HW: 4001, SW: 4.37(0)
<i>Accessories</i>	Battery, EUT 1	BP-6M	PROTO80670467VVV VVVL222110000243
	Battery, EUT 2	BP-6M	PROTO80670467VVV VVVL222110000648
	Memory Card, EUT1	Toshiba 128MB	-
	Memory Card, EUT2	Toshiba 128MB	-
	AC Charger	ACP-12E	0675294399791L277A A0008498 HW: 5.0
	Antenna adapter	Special fixed, EUT2	-

2. Test setups


Setup 1 (Conducted measurements)

The test was performed inside a shielded room. The Bluetooth simulator was used to control the EUT channel, number of EUT TX slots, enable/disable frequency hopping and modulate the TX signal with different bit patterns.

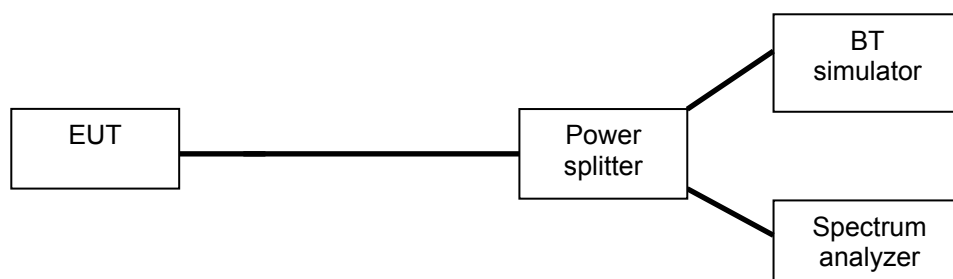

Setup 2 (Radiated measurements)

The test was performed inside a semi anechoic shielded room. For the duration of the test the EUT was placed on a non-conductive support 0.8 m high standing on the turntable. In the corner of the chamber there was a communication antenna, which was connected to the BT simulator located outside the room. The radiated power from the EUT was measured with an antenna fixed to a antenna tower. The tower and turn table were remotely controlled to turn the EUT and change the antenna polarization. The measured signal was routed from the measuring antenna to the spectrum analyzer. The BT simulator was used to set the TX channel and modulate the TX signal with different bit patterns.

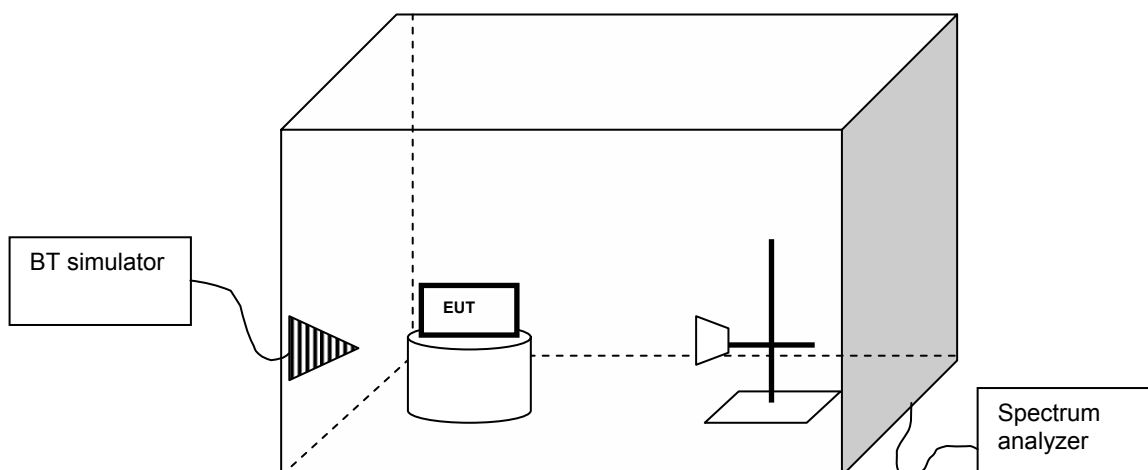

3. Standards and measurement methods

The test were performed in guidance of the CFR 47 part 15.247, part 2, FCC public notice DA 00-705 (March 30, 2000, ANSI C63.4 (1992) and RSS-210 (Issue 5, November 2001) and CISPR-22.

4. Test results

4.1 Carrier frequency separation

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2, setup 2
<i>Site name</i>	Nemko Oy / Perkkää
<i>FCC rule part</i>	§ 15.247, a1
<i>Section in RSS-210</i>	6.2.2(o), a1
<i>Date of testing</i>	05.10.2004
<i>Test equipment</i>	42, 546, X2
<i>Test conditions</i>	22 °C, 35 % RH
<i>Test result</i>	PASS

4.1.1 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	Hopping
<i>EUT TX power level</i>	Nominal

4.1.2 Limits and test results

<i>Limit (MHz)</i>	<i>Result (MHz)</i>
≥ 0.025 or 20 dB BW	1.00

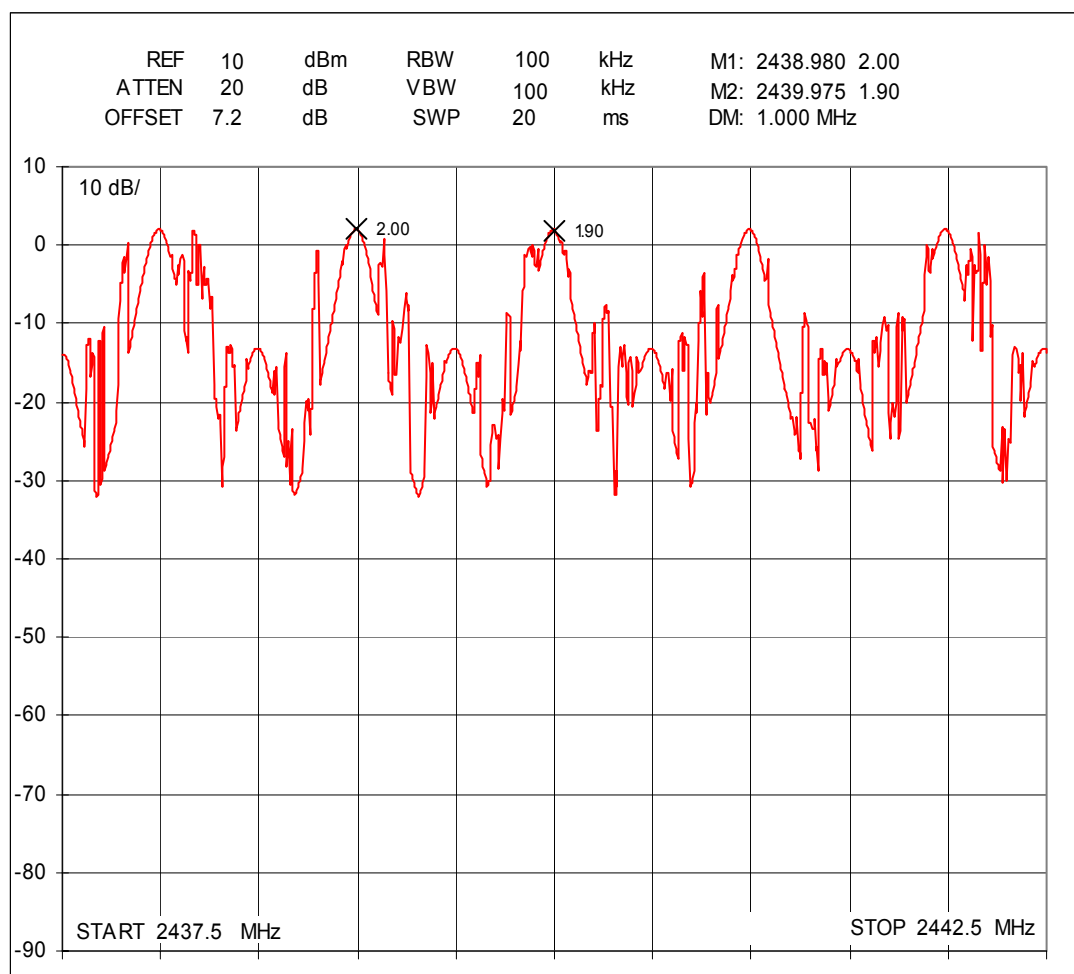


Figure 1. Carrier frequency separation

4.2 Number of hopping frequencies

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2, setup 2
<i>Site name</i>	Nemko Oy / Perkkää
<i>FCC rule part</i>	§ 15.247, a2
<i>Section in RSS-210</i>	6.2.2(o), a3
<i>Date of testing</i>	05.10.2004
<i>Test equipment</i>	42, 546, X2
<i>Test conditions</i>	22 °C, 35 % RH
<i>Test result</i>	PASS

4.2.1 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	Hopping
<i>EUT TX power level</i>	Nominal

4.2.2 Limits and test results

<i>Number</i>	<i>Measured value</i>
≥ 75	79

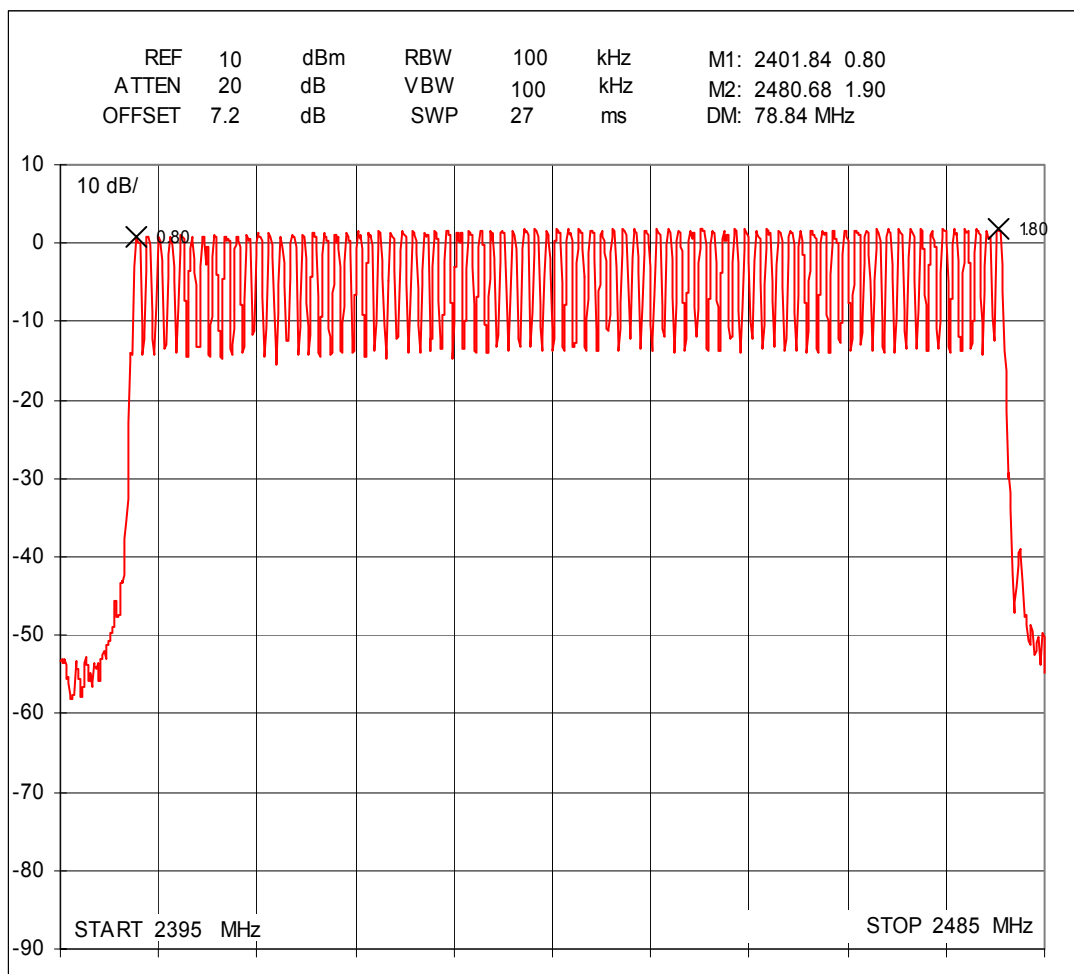


Figure 2. Number of hopping frequencies

4.3 Time of occupancy

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2, setup 2
<i>Site name</i>	Nemko Oy / Perkkää
<i>FCC rule part</i>	§ 15.247, a3
<i>Section in RSS-210</i>	6.2.2(o), a3
<i>Date of testing</i>	07.10.2004
<i>Test equipment</i>	42, 10, 546, X2
<i>Test conditions</i>	22 °C, 38 % RH
<i>Test result</i>	PASS

4.3.1 EUT operation mode

<i>EUT operation mode</i>	Page
<i>EUT channel</i>	Hopping
<i>EUT TX power level</i>	Nominal

4.3.2 Limits and test results

<i>Number</i>	<i>Measured value (s)</i>
≤ 0.4	0.035

The complete paging cycle took 2.58s, during which the transmitter operated every 10.00 ms.
The duration of one transmission was $136 \mu\text{s} (2.58 \text{ s}/0.01) * 0.136 \text{ ms} = 35.1 \text{ ms}$

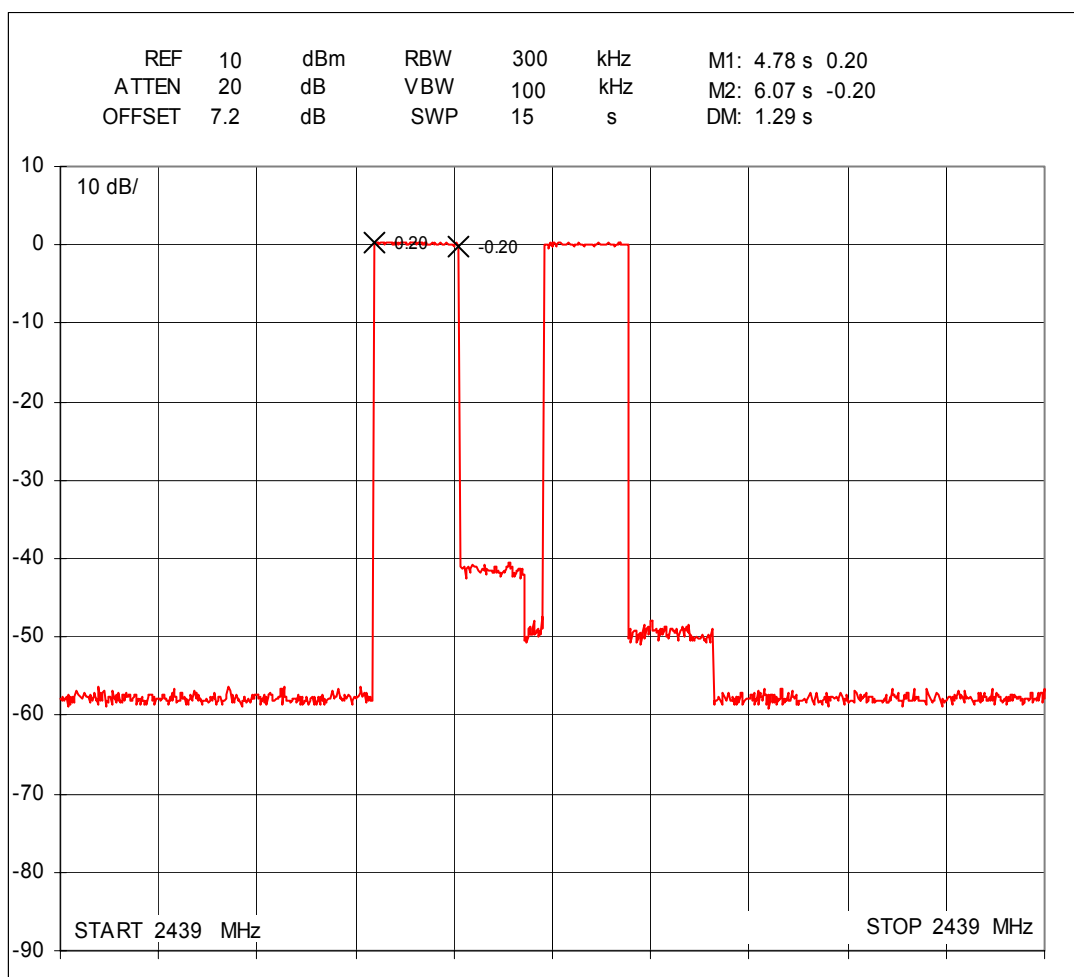


Figure 3. Complete paging cycle

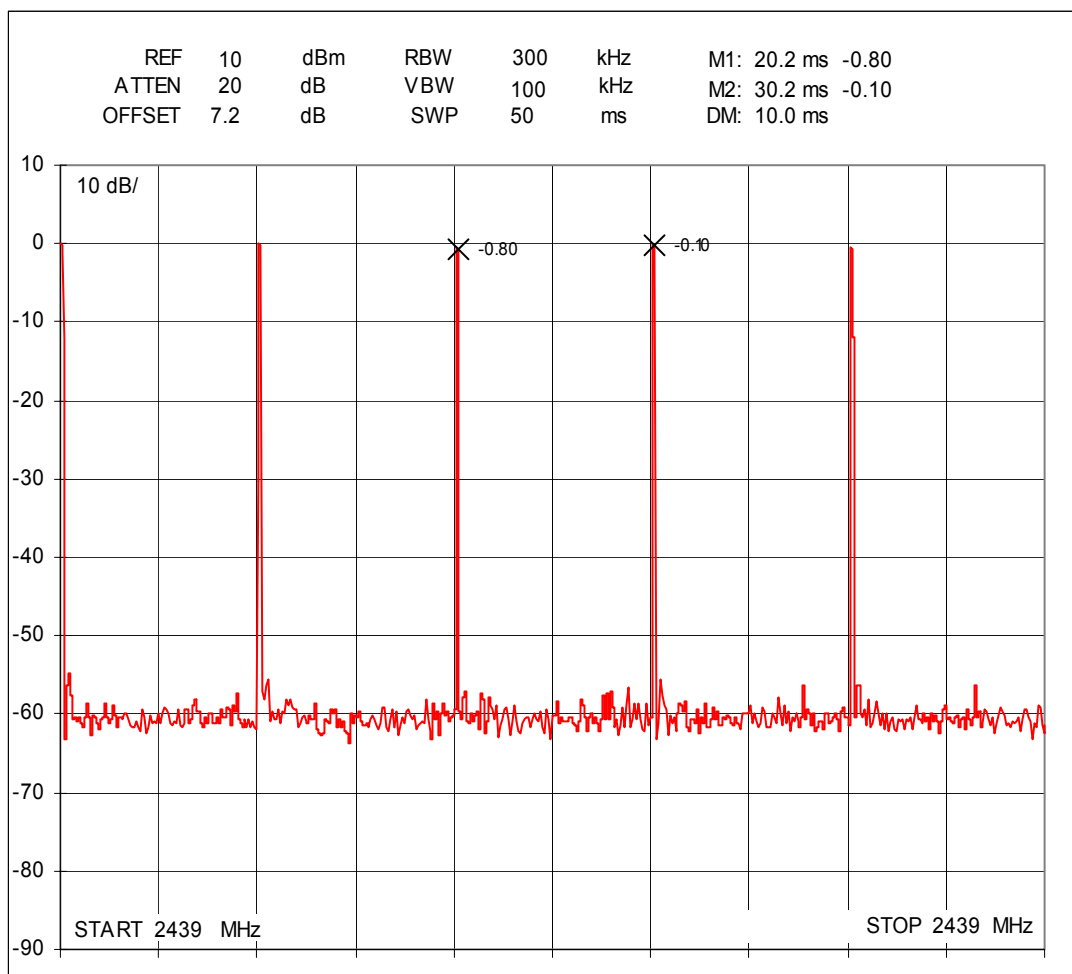


Figure 4. Paging repetition frequency.

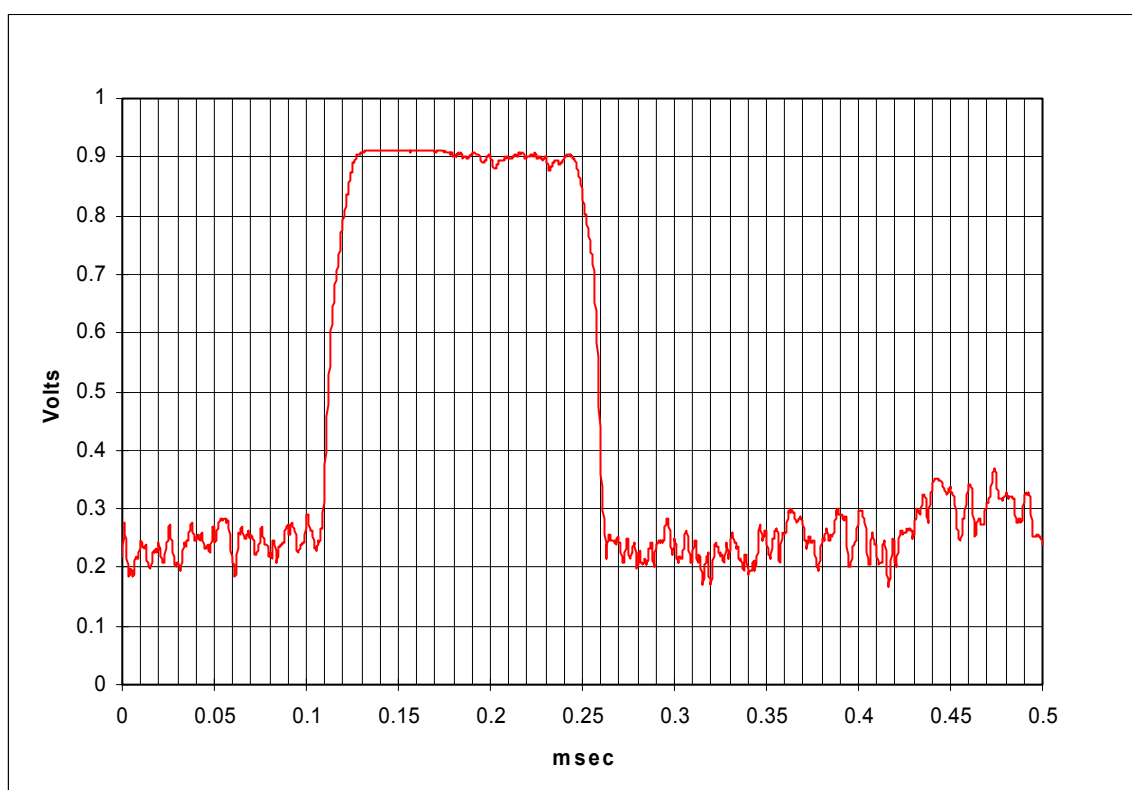


Figure 5. Duration of one transmission, paging.

4.3.3 EUT operation mode

<i>EUT operation mode</i>	Inquiry
<i>EUT channel</i>	Hopping
<i>EUT TX power level</i>	Nominal

4.3.4 Limits and test results

<i>Number</i>	<i>Measured value (s)</i>
≤ 0.4	0.105

The complete paging cycle took 7.7s, during which the transmitter operated every 10.00 ms.
The duration of one transmission was 136 μs ($7.7 \text{ s}/0.01$) * 0.136 ms = 104.7 ms

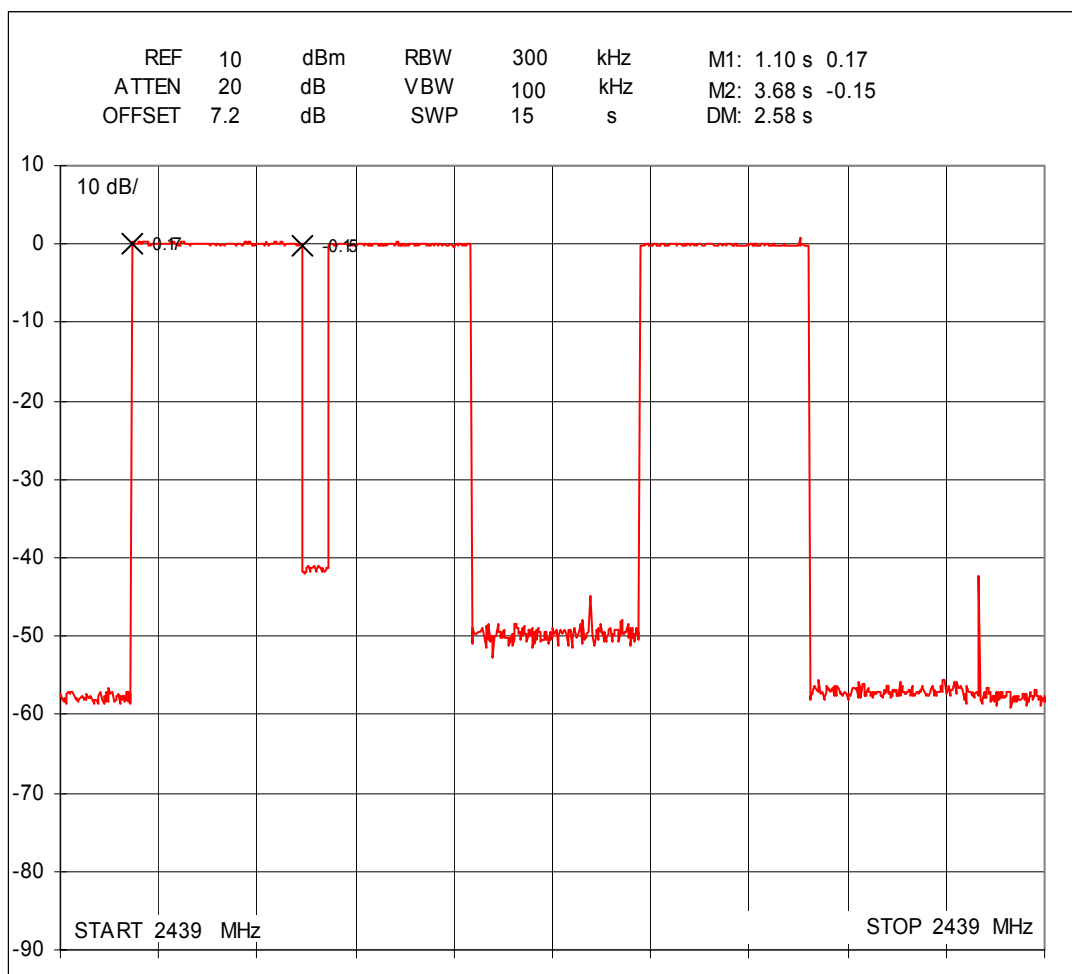


Figure 6. Complete inquiry cycle

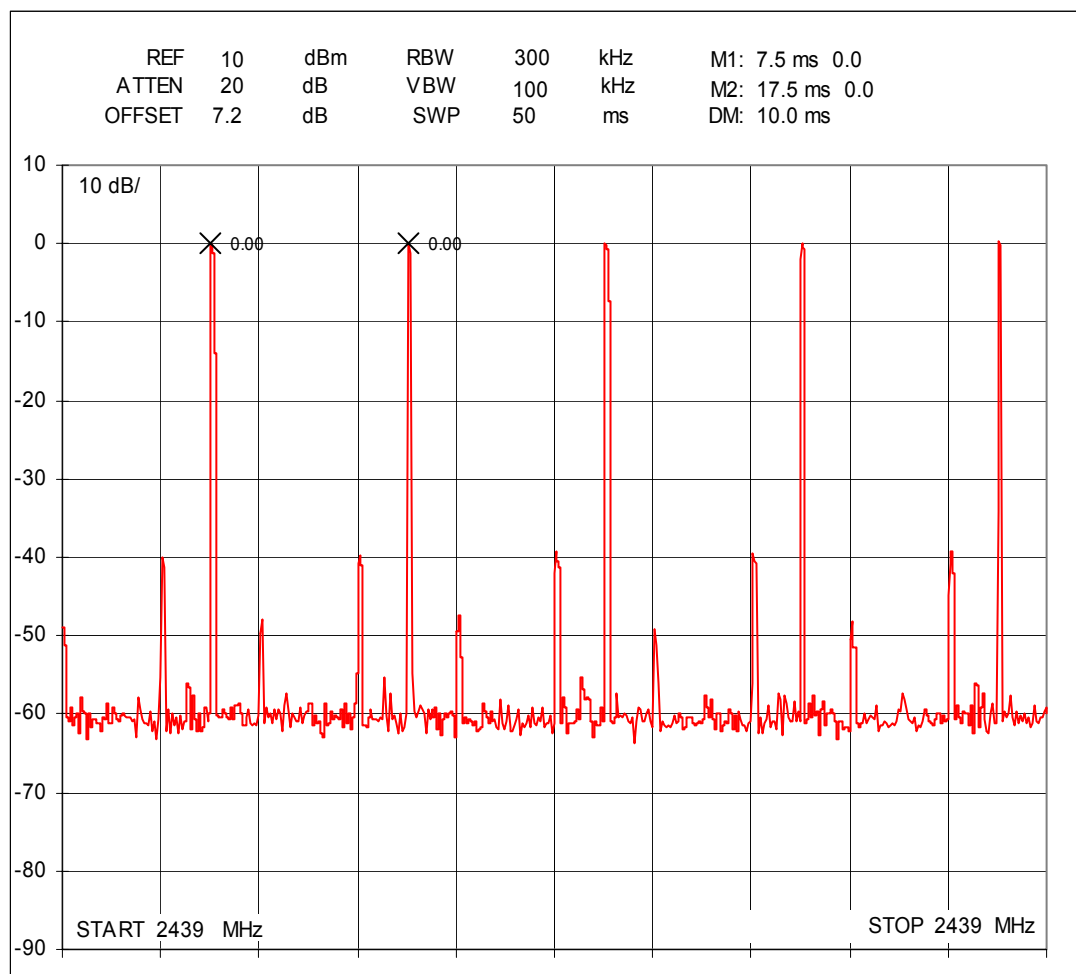


Figure 7. Inquiry repetition frequency

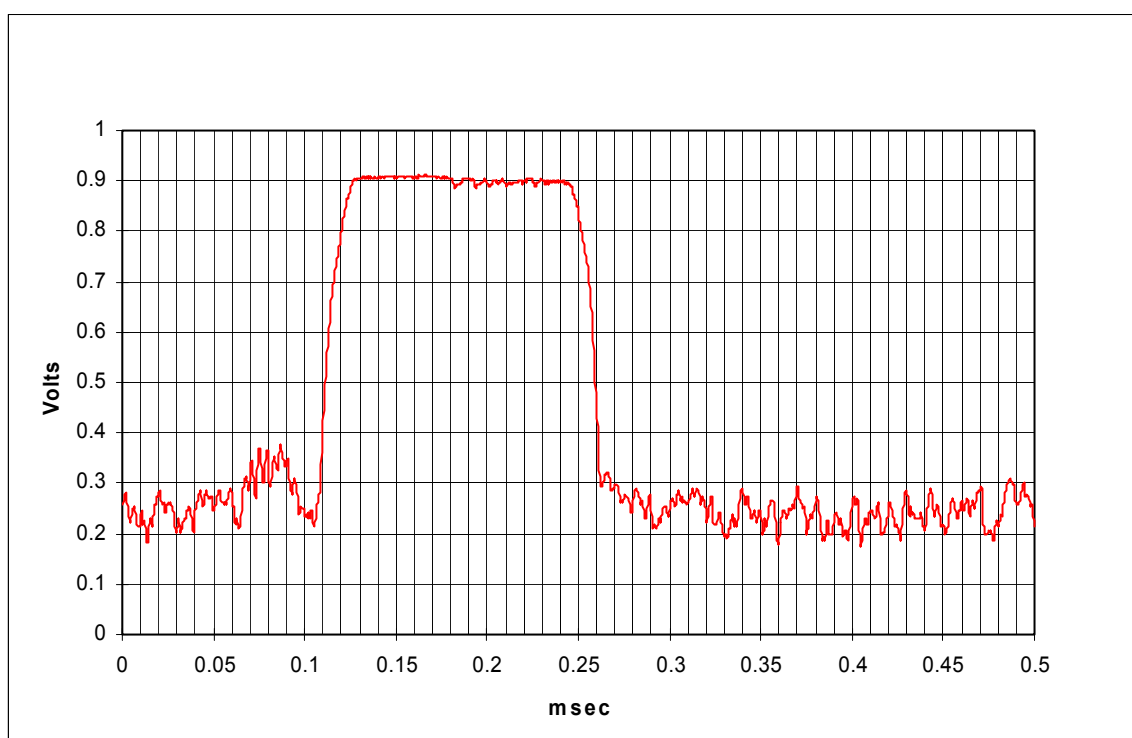


Figure 8. Duration of one transmission, inquiry.

4.3.5 EUT operation mode

<i>EUT operation mode</i>	Connection
<i>EUT channel</i>	Hopping
<i>EUT TX power level</i>	Nominal

4.3.6 Limits and test results

<i>Number</i>	<i>Measured value (s)</i>
≤ 0.4	0.176

In measurement time of 16 s total of 30 transmissions occurred.
The duration of one transmission was 2.93 ms. $30 \times 2 \times 2.93 = 176 \text{ ms}$

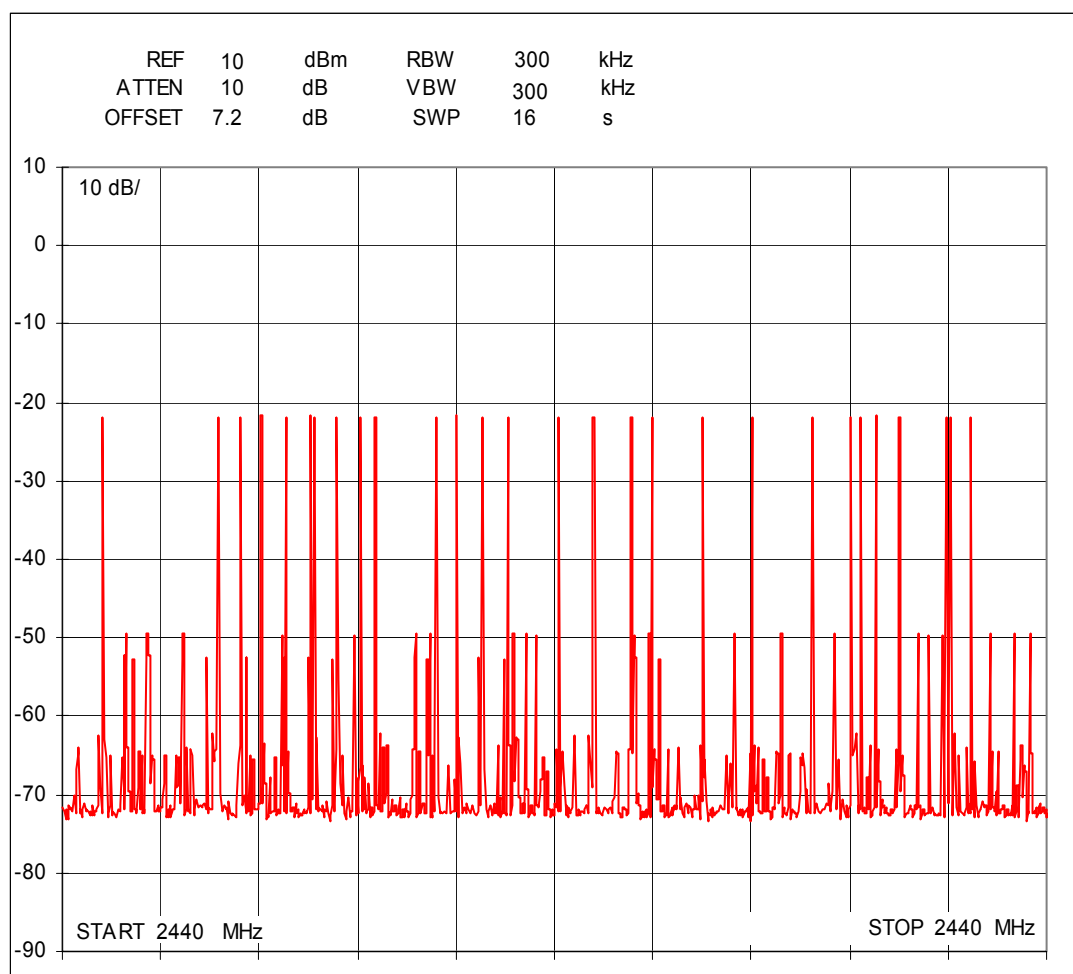


Figure 9. Number of transmissions

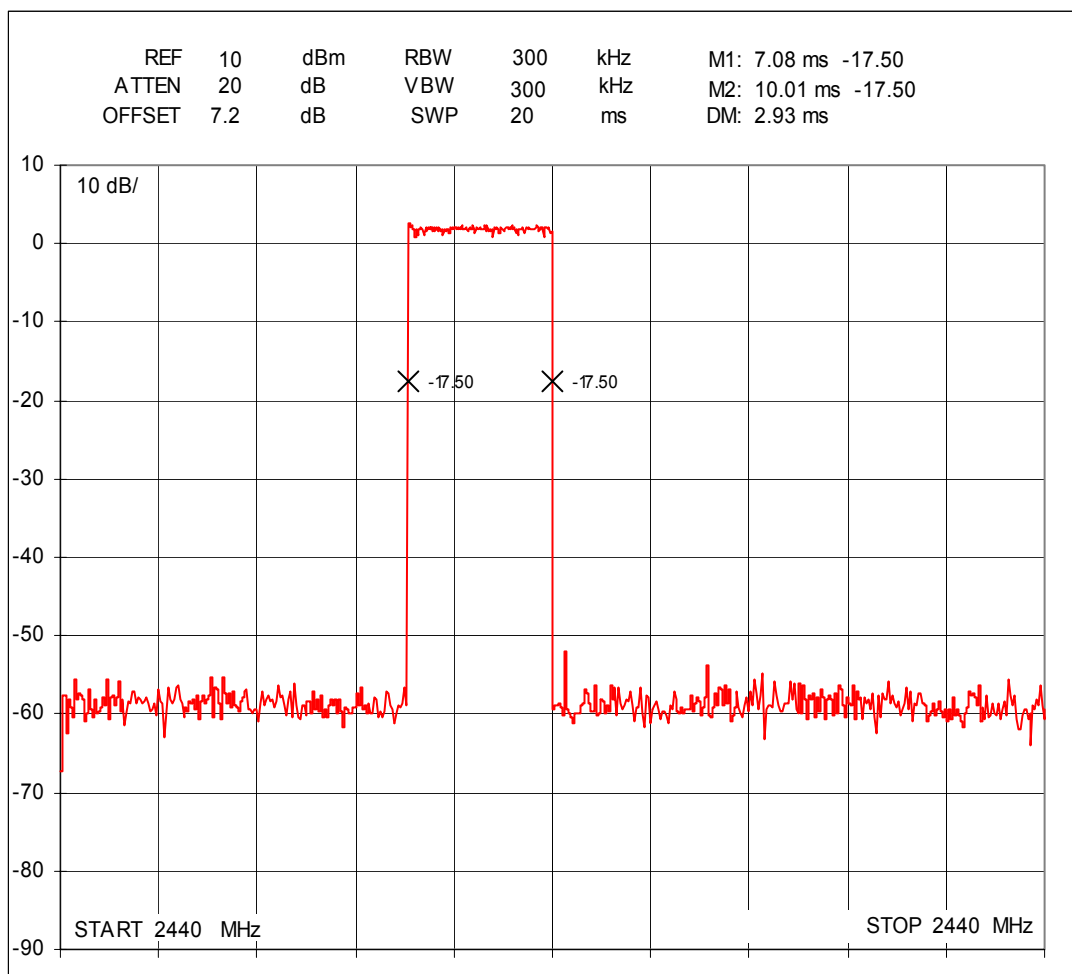


Figure 10. Duration of one transmission

4.4 20 dB bandwidth

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2, setup 2
<i>Site name</i>	Nemko Oy / Perkkaa
<i>FCC rule part</i>	§ 15.247, a1
<i>Section in RSS-210</i>	6.2.2(o), a1
<i>Date of testing</i>	07.10.2004
<i>Test equipment</i>	42, 546, X2
<i>Test conditions</i>	22 °C, 38 % RH
<i>Test result</i>	PASS

4.4.1 EUT operation mode

<i>EUT operation mode</i>	Connection, PRBS9, DH5 packet type
<i>EUT channel</i>	0, 38 and 78
<i>EUT TX power level</i>	Nominal

4.4.2 Limits and test results

<i>EUT Channel</i>	<i>Limit (MHz)</i>	<i>Measured value (MHz)</i>
0	≤ 1.0	0.794
38	≤ 1.0	0.794
78	≤ 1.0	0.796

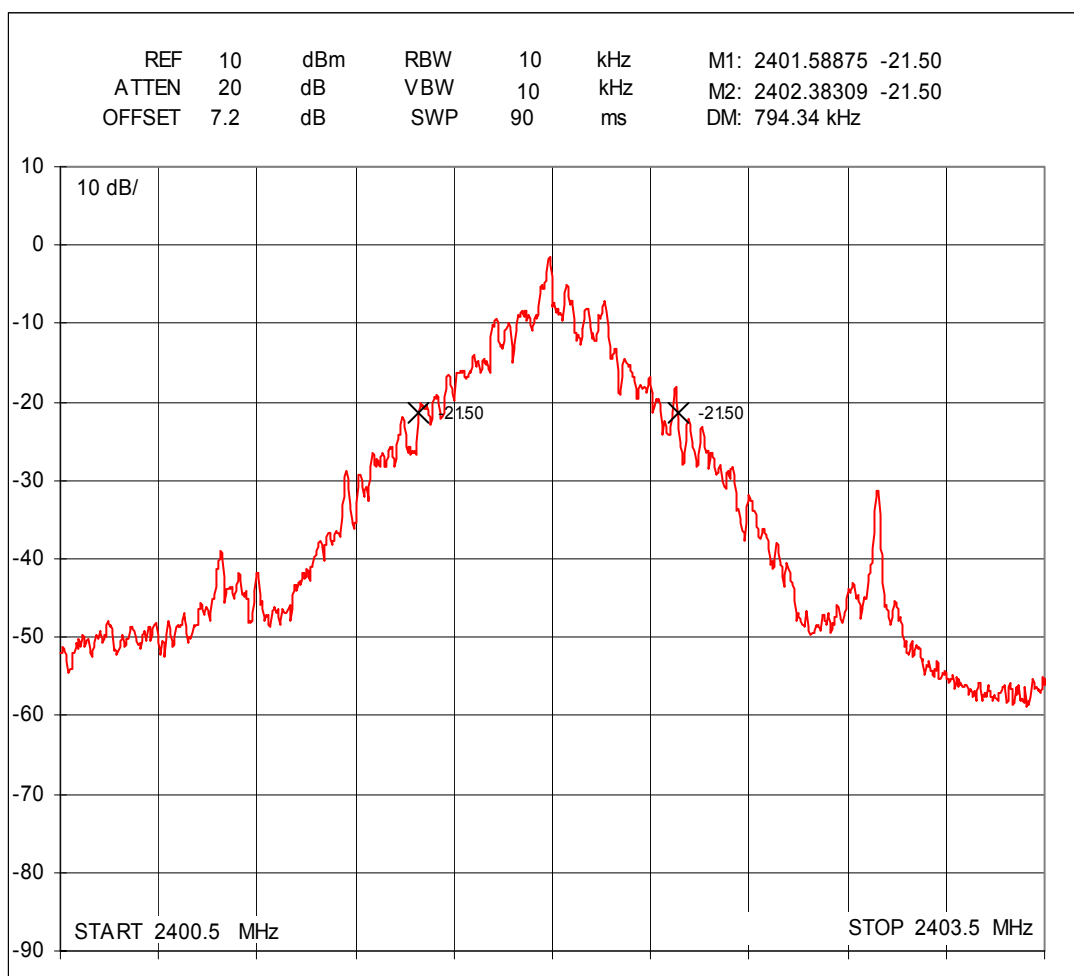


Figure 11. 20 dB bandwidth, channel 0

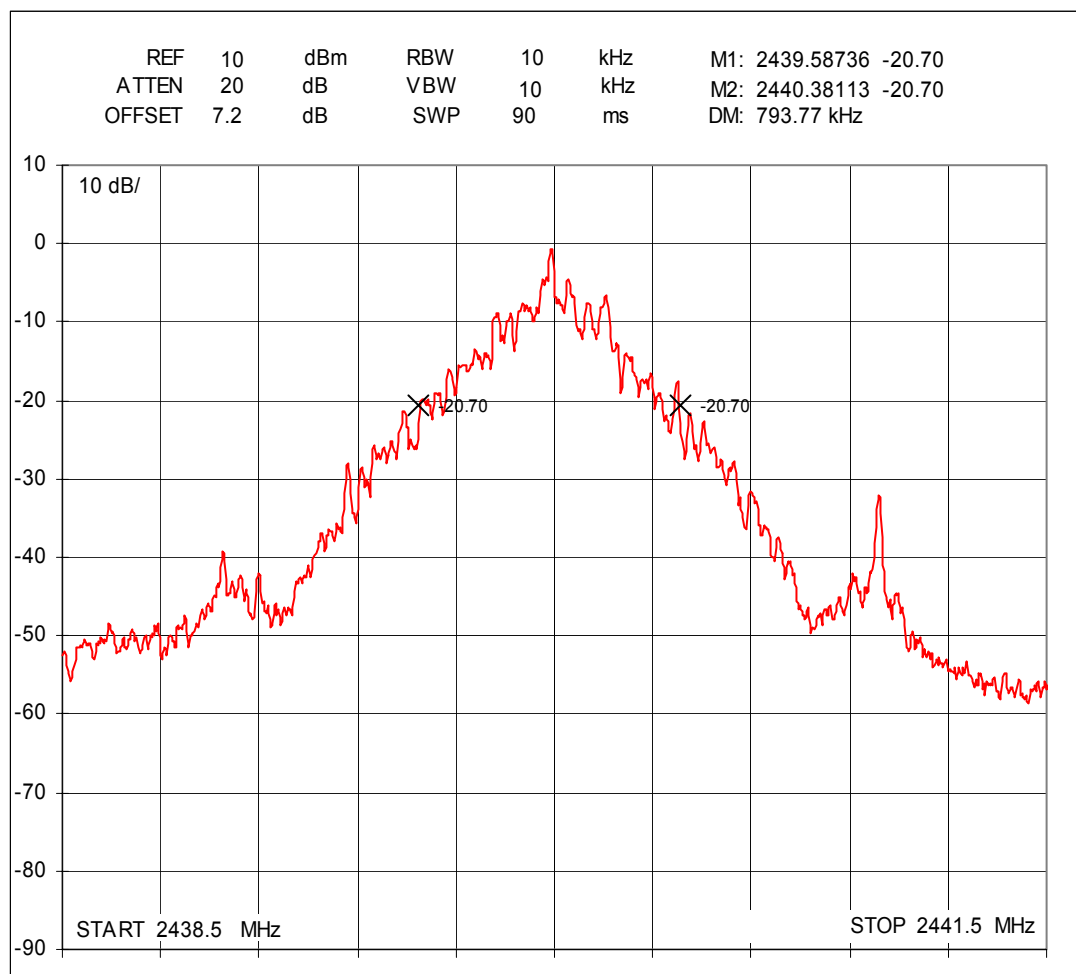


Figure 12. 20 dB bandwidth, channel 38

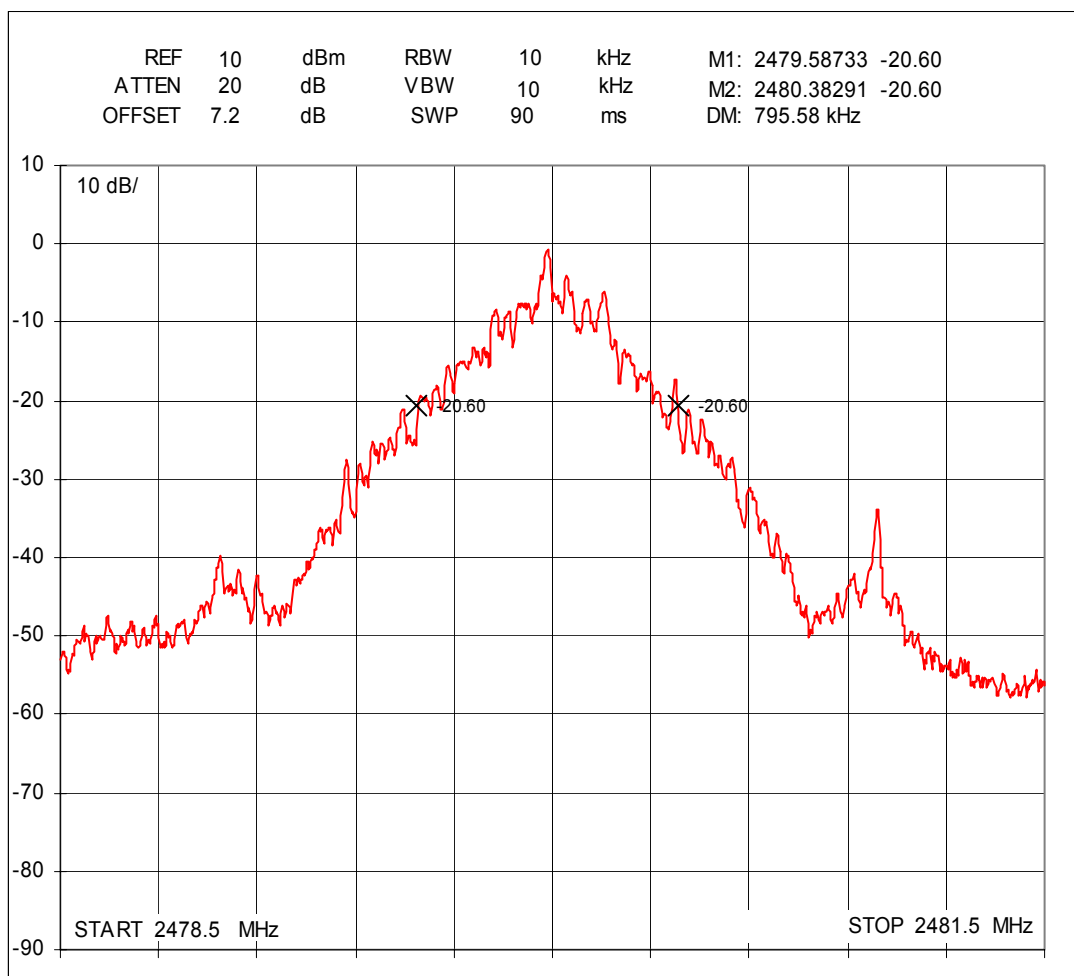


Figure 13. 20 dB bandwidth, channel 78

4.5 Peak output power

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2, setup 2
<i>Site name</i>	Nemko Oy / Perkkää
<i>FCC rule part</i>	§ 15.247, b1
<i>Section in RSS-210</i>	6.2.2(o), a3
<i>Date of testing</i>	05.10.2004
<i>Test equipment</i>	42, 546, X2
<i>Test conditions</i>	22 °C, 35 % RH
<i>Test result</i>	PASS

4.5.1 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	0, 38 and 78
<i>EUT TX power level</i>	Nominal

4.5.2 Limits and test results

<i>EUT Channel</i>	<i>Limit (W)</i>	<i>Measured value (W)</i>
0	≤ 1.0	0.00138
38	≤ 1.0	0.00170
78	≤ 1.0	0.00170

The formula below was used to calculate the power of the EUT.

$$P_{[dbm]} = P_{Measured[dbm]} + L_{Cable+Divider[db]}$$

Where

$P_{Measured[dbm]}$ measured power level from the EUT

$L_{Cable+divider[db]}$ loss of the cables between EUT and spectrum analyzer

4.5.3 Test results

<i>EUT Channel</i>	<i>P_{Measured} [dBm]</i>	<i>L_{Cable + Divider} [dB]</i>	<i>P [dBm]</i>	<i>P [mW]</i>
0	-5.8	7.2	1.4	1.38
38	-4.9	7.2	2.3	1.70
78	-4.9	7.2	2.3	1.70

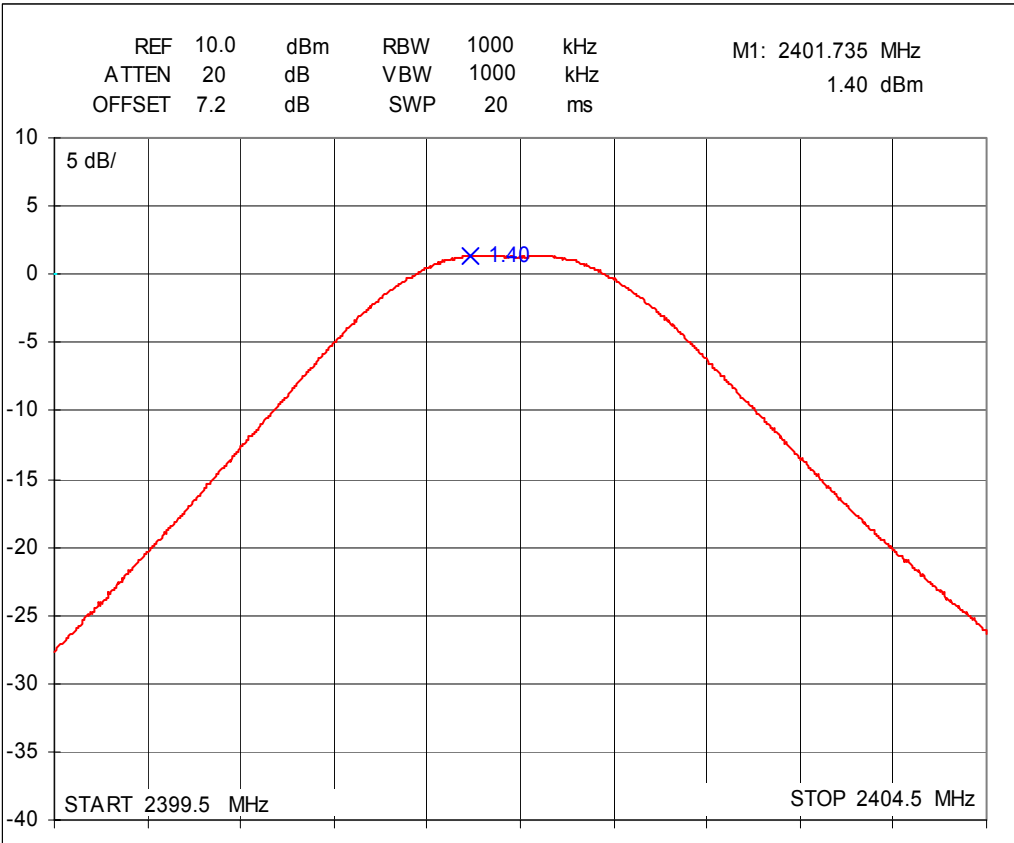


Figure 14. Peak output power on channel 0

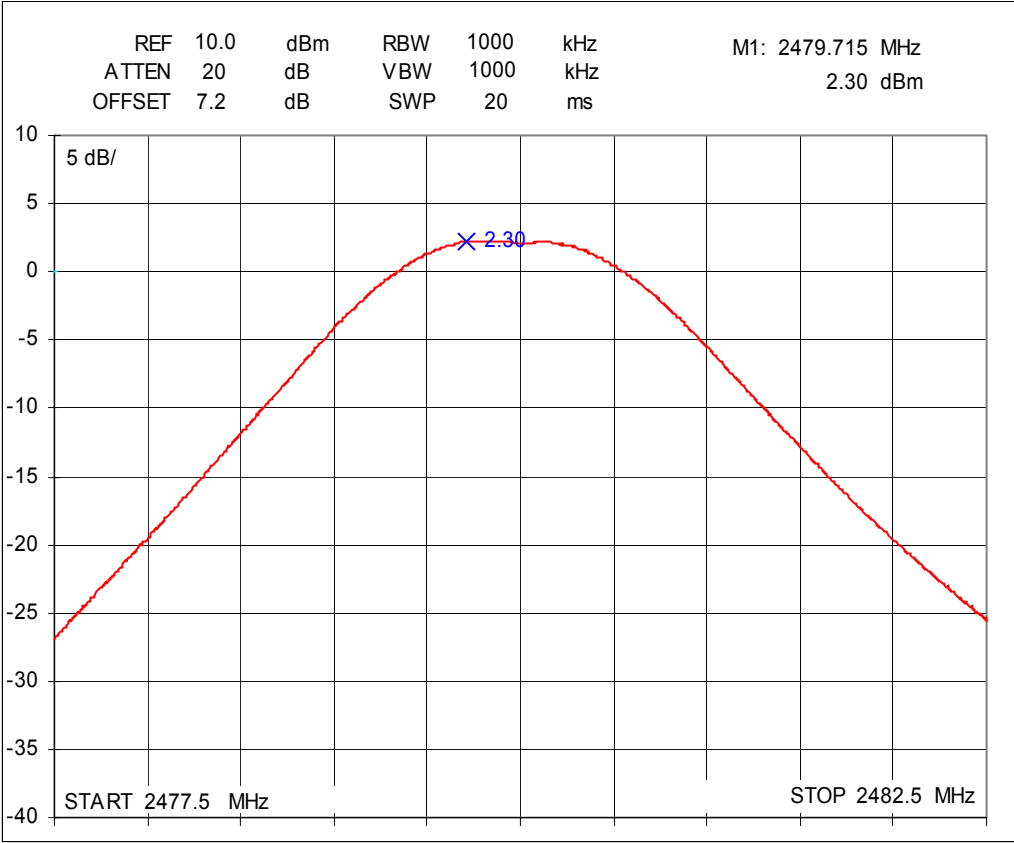


Figure 15. Peak output power on channel 78

4.6 Band-edge compliance of RF conducted emissions

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2, setup 2
<i>Site name</i>	Nemko Oy / Perkkää
<i>FCC rule part</i>	§ 15.247, c1
<i>Section in RSS-210</i>	6.2.2(o), e1
<i>Date of testing</i>	07.10.2004
<i>Test equipment</i>	42, 546, X2
<i>Test conditions</i>	22 °C, 38 % RH
<i>Test result</i>	PASS

4.6.1 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	Hopping
<i>EUT TX power level</i>	Nominal

4.6.2 Limits and test results

<i>EUT Channel</i>	<i>Limit (dBc)</i>	<i>Result (dBc)</i>
0	≤ -20	-47.8
78	≤ -20	-51.4

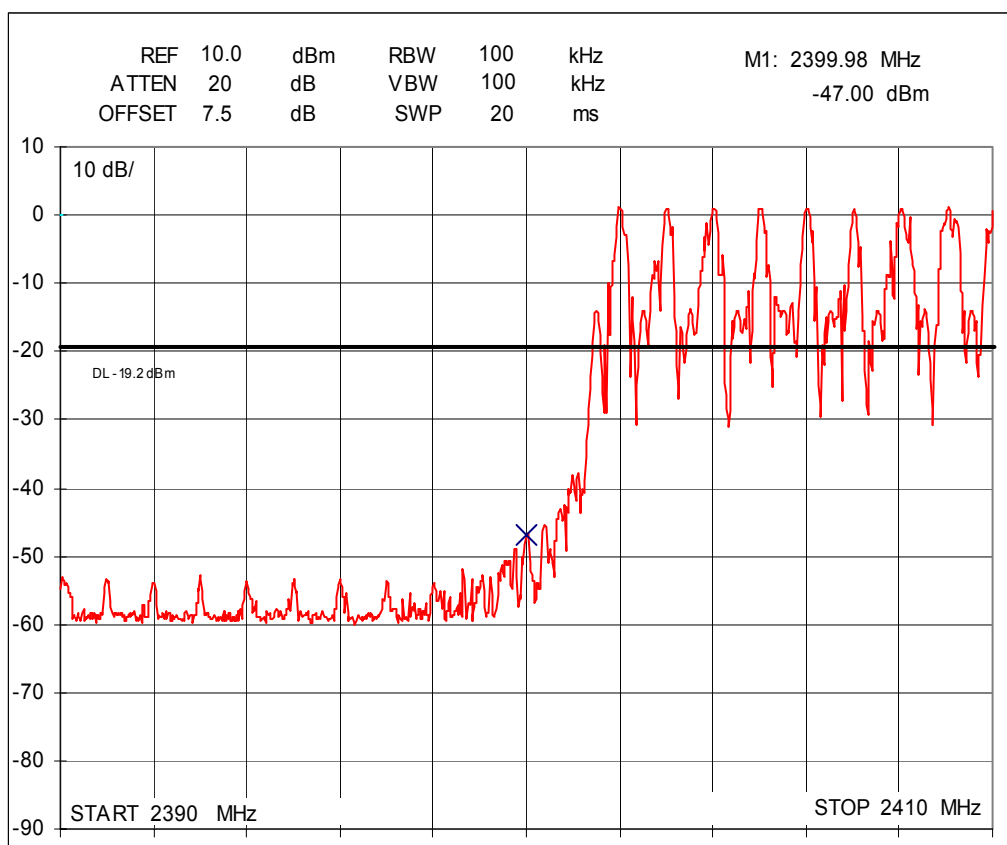


Figure 16. Band-edge compliance, low end

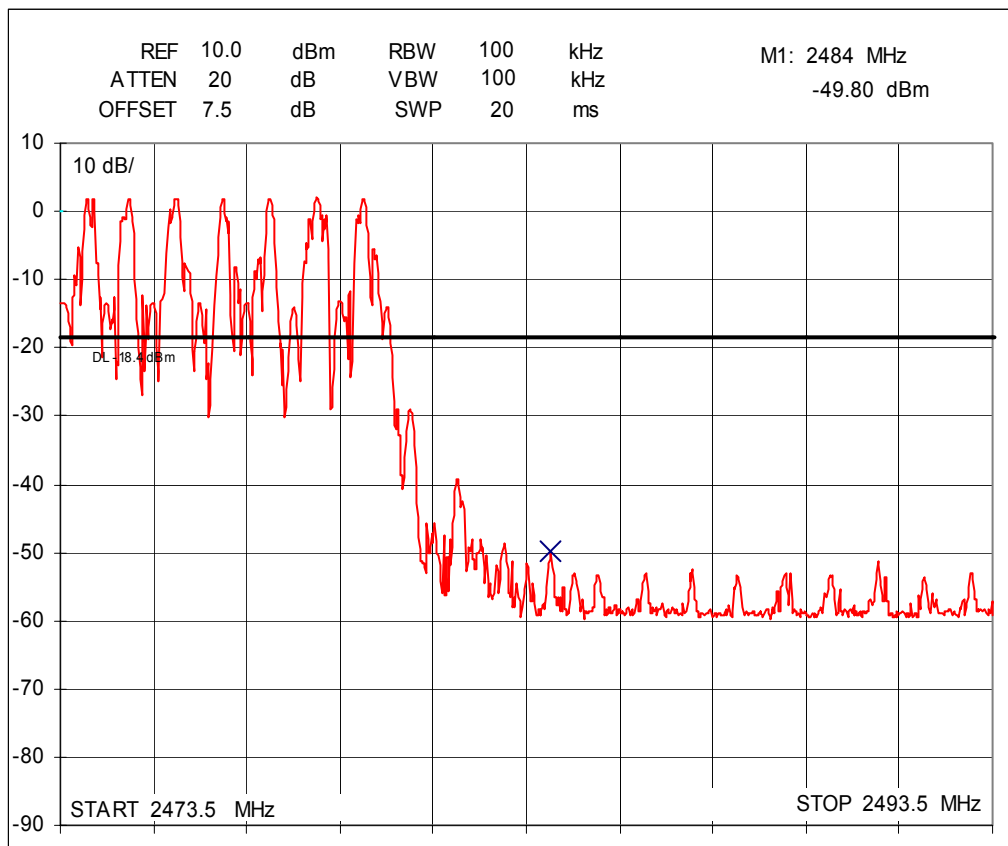


Figure 17. Band-edge compliance, high end

4.6.3 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	0 and 78
<i>EUT TX power level</i>	Nominal

4.6.4 Limits and test results

<i>EUT Channel</i>	<i>Limit (dBc)</i>	<i>Result (dBc)</i>
0	≤ -20	-47.2
78	≤ -20	-51.5

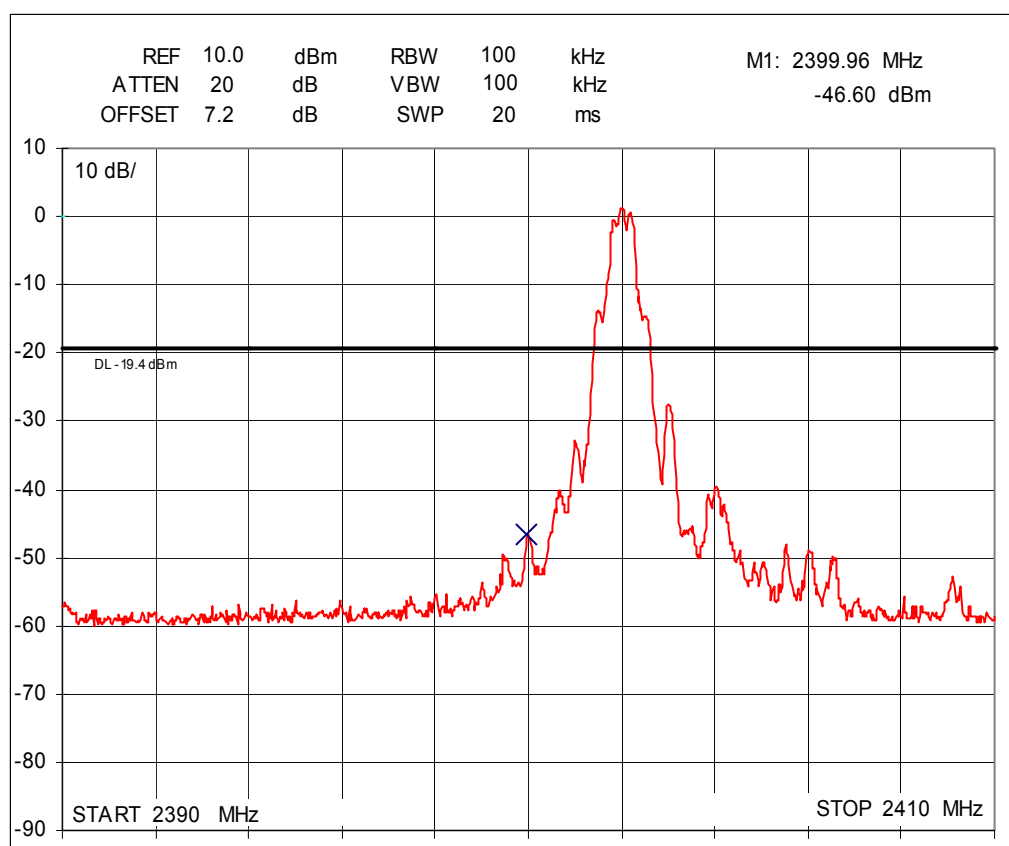


Figure 18. Band-edge compliance, low end

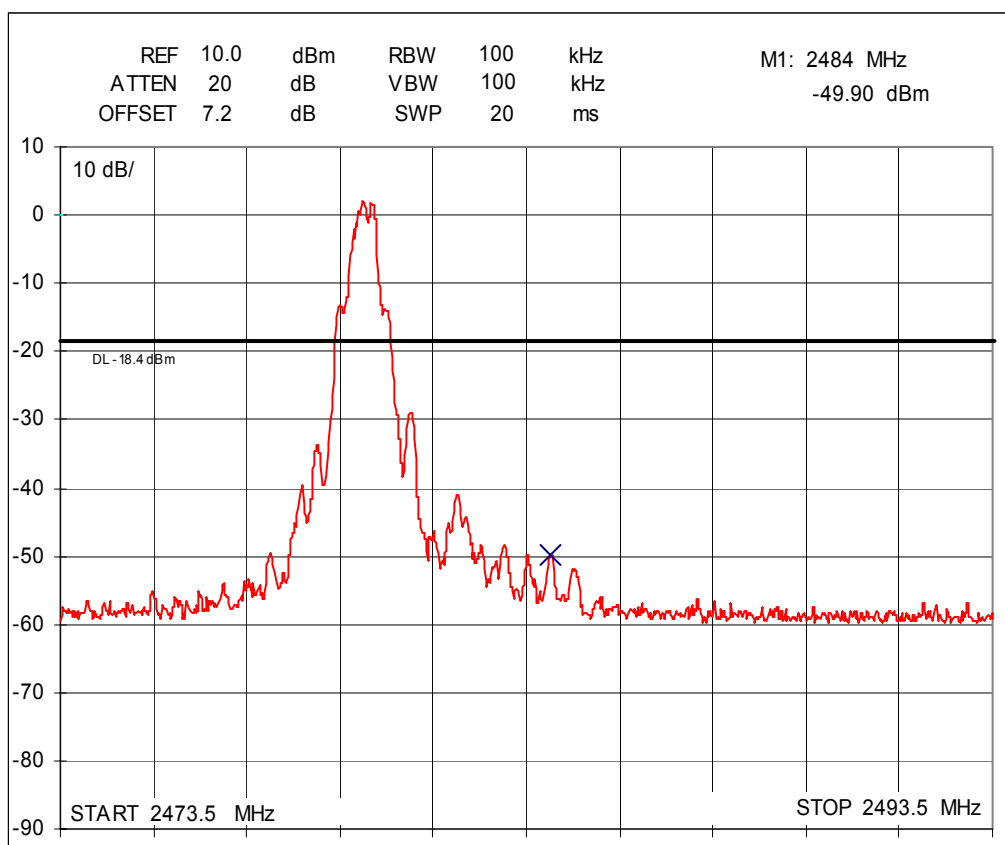


Figure 19. Band-edge compliance, high end

4.7 Spurious RF conducted emission

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT2, setup 2
<i>Site name</i>	Nemko Oy / Perkkaa
<i>FCC rule part</i>	§ 15.247, c2
<i>Section in RSS-210</i>	6.2.2(o), e1
<i>Date of testing</i>	07.10.2004
<i>Test equipment</i>	42, 546, 559, X2
<i>Test conditions</i>	22 °C, 38 % RH
<i>Test result</i>	PASS

4.7.1 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	0, 38 and 78
<i>EUT TX power level</i>	Nominal

4.7.2 Limits and test results

<i>EUT Channel</i>	<i>Limit (dBc)</i>	<i>Result (dBc)</i>
0	≤ -20	<-50
38	≤ -20	<-50
78	≤ -20	<-50

4.8 Spurious radiated emission

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT1, setup 1
<i>Site name</i>	Nemko Oy / Perkkaa
<i>FCC rule part</i>	§ 15.247, c1
<i>Section in RSS-210</i>	6.2.2(o), e1
<i>Date of testing</i>	28.09.2004
<i>Test equipment</i>	42, 338, 319, 543, 544, 559, 525, 546, 350, 88, 508
<i>Test conditions</i>	22 °C, 35 % RH
<i>Test result</i>	PASS

4.8.1 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	0, 38 and 78
<i>EUT TX power level</i>	Nominal
<i>EUT operation voltage</i>	115 V / 60 Hz

4.8.2 Test method and limit

The test was performed in a semi-anechoic shielded room. The EUT was placed on a non-conductive 0.8 m high table standing on the turntable (photograph 1). During the test in the frequency range 30-2000 MHz the distance from the EUT to the measuring antenna was 3 m. During the test in the frequency range 2000-18000 MHz the distance from the EUT to the measuring antenna was 1.5 m. During the test in the frequency range 18-25GHz the distance from the EUT to the measuring antenna was 1 m. The excess length of the cables of the EUT were made into bundles 30-40 cm in length. In order to find the maximum levels of the disturbance radiation the angle of the turntable, the height of the measuring antenna and the lay-out of the EUT cables were varied during the tests. The test was performed with the measuring antenna being both in horizontal and vertical polarizations.

Vertical and horizontal polarizations in the frequency range 30 – 1000 MHz was measured by using the peak detector. During the peak detector scan the turntable was rotated from 0° to 360° with 30° step with the antenna heights 1.0 m and 3.0 m. The highest levels of the radiated interference field strength measured by using the quasi-peak detector were recorded.

Vertical and horizontal polarizations in the frequency range 1000 – 25000 MHz was measured by using the peak detector. During the measurement the turntable was rotated from 0° to 360° and the antenna was raised from 1.0 m and 4.0 m.

The CFR 47 Part 15, Subpart B, Class B limit of 500 $\mu\text{V/m}$ has been calculated to correspond 54 $\text{dB}(\mu\text{V/m})$ as follows: $[\text{dB}(\mu\text{V/m})]=20\log[\mu\text{V/m}]$.

EN 55022 Class B limit (3m measuring distance)

<i>Frequency band MHz</i>	<i>Quasi-peak limit dB($\mu\text{V/m}$)</i>
30 - 230	40
230 - 1000	47

Class B limit (3m measuring distance)

<i>Frequency band MHz</i>	<i>Average limit dB($\mu\text{V/m}$)</i>	<i>Peak limit dB($\mu\text{V/m}$)</i>
1000 - 25000	54	74

4.8.3 Test results

The measurement results were obtained as described below.

$$E [\mu\text{V/m}] = U_{RX} + A_{CABLE} + AF - G_{PREAMP}$$

Where

U_{RX} receiver reading

A_{CABLE} attenuation of the cable

AF antenna factor

G_{PREAMP} gain of the preamplifier

TX on channel 0

<i>Frequency MHz</i>	<i>Result dB(μV/m)</i>	<i>Limit dB(μV/m)</i>	<i>Margin dB</i>
4804.0	<38	54	16.0
7206.0	<43	54	11.0
9608.0	<45	54	9.0

TX on channel 38

<i>Frequency MHz</i>	<i>Result dB(μV/m)</i>	<i>Limit dB(μV/m)</i>	<i>Margin dB</i>
4880.0	<38	54	16.0
7320.0	<43	54	11.0
9760.0	<45	54	9.0

TX on channel 78

<i>Frequency MHz</i>	<i>Result dB(μV/m)</i>	<i>Limit dB(μV/m)</i>	<i>Margin dB</i>
4960.0	<38	54	16.0
7440.0	<43	54	11.0
9920.0	<45	54	9.0

4.9 AC power line conducted emissions

The test was performed as a compliance test. The test parameters concerned were as follows:

<i>EUT</i>	EUT1, setup1, AC-charger
<i>Site name</i>	Nemko Oy/ Perkkaa
<i>FCC rule part</i>	§ 15.207
<i>Section in RSS-210</i>	6.6
<i>Date of testing</i>	30.09.2004
<i>Test equipment</i>	5, 168, 348, 184, 545, 546, 371
<i>Test conditions</i>	22 °C, 35 % RH
<i>Test result</i>	PASS

4.9.1 Test method and limit

The test was performed inside a shielded room where the floor and one of the walls of the test site comprised the reference ground plane (RGP). For the duration of the test the EUT was placed on a non-conductive table 0.8 m high standing on the reference ground plane (see photograph 2). The excess length of the cables of the EUT were made into bundles 30-40 cm in length. The power input cable of the EUT was connected to an artificial mains network. The test was performed separately on the phase and also on the neutral wire.

The disturbances were first examined by performing a spectrum scan by using a peak detector. The general procedure in the conducted disturbance emission test is that no further measurements are necessary if the disturbance levels measured by using the peak detector are below the limit value defined for the measurement performed by using an average detector.

If not, then at the test frequencies concerned the measurement is performed also by using a quasi-peak detector. If the disturbance levels measured by using the quasi-peak detector are below the limit value defined for the measurement performed by using an average detector, then measurements by using the average detector are not necessary.

<i>Frequency band MHz</i>	<i>Quasi-peak limit dB(μV)</i>	<i>Average limit dB(μV)</i>
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5	56	46
5 - 30	60	50

4.9.2 EUT operation mode

<i>EUT operation mode</i>	Connection, static PRBS, DH5 packet type
<i>EUT channel</i>	Hopping
<i>EUT TX power level</i>	Nominal
<i>EUT operation voltage</i>	115 V / 60 Hz

4.9.3 Test results

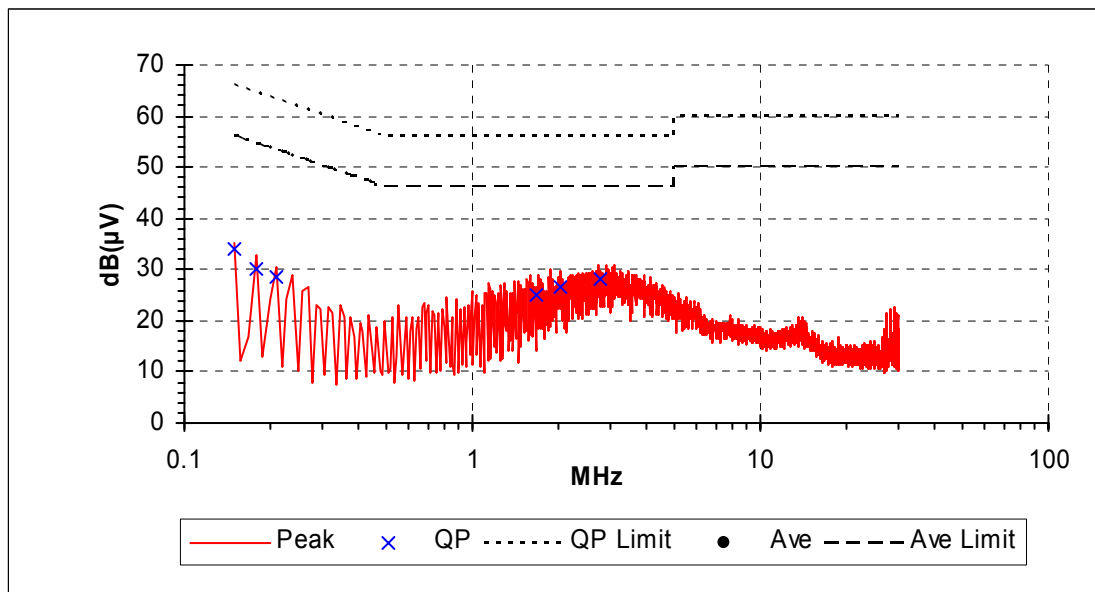


Figure 20. AC powerline emissions, Line N

Highest emissions:

Frequency MHz	Result Quasi-peak dB(μV)	Limit value Quasi-peak dB(μV)	Margin Quasi-peak dB	Result Average dB(μV)	Limit value Average dB(μV)	Margin Average dB
0.150	34.1	66.0	31.9	-	56.0	-
0.1772	30.3	64.6	34.3	-	54.6	-
0.2071	28.4	63.2	34.8	-	53.2	-
1.6775	25.2	56.0	30.8	-	46.0	-
2.0325	26.7	56.0	29.3	-	46.0	-
2.7675	28.2	56.0	27.8	-	46.0	-

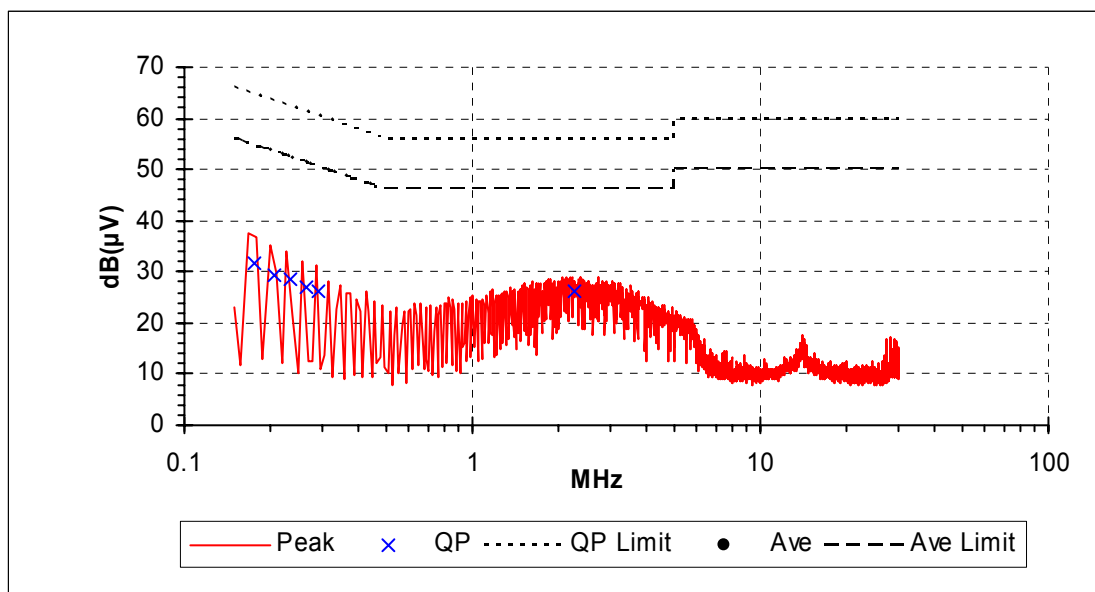


Figure 21. AC powerline emissions, Line L

Highest emissions:

Frequency MHz	Result Quasi-peak dB(μV)	Limit value Quasi-peak dB(μV)	Margin Quasi-peak dB	Result Average dB(μV)	Limit value Average dB(μV)	Margin Average dB
0.1749	31.8	64.7	32.9	-	54.7	-
0.2041	29.3	63.4	34.1	-	53.4	-
0.2337	28.6	62.4	33.8	-	52.4	-
0.2634	26.9	61.3	34.4	-	51.3	-
0.2934	26.2	60.4	34.2	-	50.4	-
2.2545	26.3	56.0	29.7	-	46.0	-

5. List of test equipment

Each active test equipment is calibrated once a year, antennas every 18 months and other passive equipment every 24 months.

Nr.	Equipment	Type	Manufacturer	Serial number
5	Test receiver	ESH-3	Rohde & Schwarz	894718/015
10	Oscilloscope	9400A	LeCroy	8878
42	Spectrum analyzer	8566B	Hewlett Packard	2637A04102
45	Spectrum analyzer	FSBS	Rohde & Schwarz	862563/010
168	Artificial Mains	NSLK 8127	Schwartzbeck	8127162
184	Temp. & humidity meter	H MI 32	Vaisala	63837
319	Antenna	CBL6112	Chase	2018
348	Shielded room	RFSD-100	Euroshield Oy	1320
350	Semianechoic shielded room	RFD-F-100	Euroshield Oy	1327
351	RF generator	SMT 06	Rohde & Schwarz	845715/001
371	AC Power source	500i-400	California Instr.	HK 52064
519	RF High-Power Attenuator	765-20	Narda	
525	Double-Ridged Horn	3115	Emco	6691
542	Double-Ridged Horn	3115	Emco	00023905
543	RF-amplifier	JCA018-501	JCA Technologies	103
544	RF-amplifier	ZFL-2000VH2	Mini-Circuits	D01080
545	GSM MS Test System	CMU	Rohde & Schwarz	836536/049
546	Bluetooth Test Set	MT8850A	Anritsu	6K00000092
559	Highpass Filter	WHKX3.0/18G-10SS	Wainwright Instruments	1
550	Notch Filter	WRCD1800/2000-0.2/40-5SSSD	Wainwright Instruments	1
88	Antenna	638	Narda	8003
508	Harmonic mixer	11970K	Hewlett Packard	2332A01907
X1	RF-Generator	8341B	Hewlett Packard	2802A01090
X2	Power splitter	1870A	Weinschel	1798
X3	Antenna	3125-1880	ETS	00028029

6. Photographs

See "1032445_test_setup_photographs"