

TEST REPORT

Reference No..... : WTX23X08187908W003
FCC ID : 2ARTX-S87
Applicant : LAVA International Limited
Address : A-56, Sector-64, Gautam Buddha Nagar, Noida, Uttar Pradesh, 201301
Manufacturer : Huizhou Jiashang Electronic Science & Technology Co., Ltd.
Address : 3# Plant, Shanzi Village (Qiaoxing Industrial Park), Xiaotie Area,
Xiaojinkou Town, Huizhou City, Guangdong Province
Product Name : Tablet
Model No..... : S87
Standards : FCC Part 15.407
Date of Receipt sample : 2023-08-28
Date of Test..... : 2023-08-28 to 2023-09-16
Date of Issue : 2023-09-16
Test Report Form No. : WTX_Part 15_407W
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

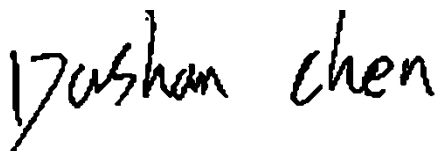
Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Dashan Chen

Approved by:



Silin Chen

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING.....	6
1.5 EUT OPERATING DURING TEST.....	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS.....	13
3. ANTENNA REQUIREMENT.....	14
3.1 STANDARD APPLICABLE	14
3.2 EVALUATION INFORMATION	14
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	15
4.1 STANDARD APPLICABLE	15
4.2 SUMMARY OF TEST RESULTS.....	15
5. POWER SPECTRAL DENSITY	16
5.1 STANDARD APPLICABLE	16
5.2 TEST PROCEDURE	16
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	17
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	18
6.1 STANDARD APPLICABLE	18
6.2 TEST PROCEDURE	18
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	20
7. MAXIMUM CONDUCTED OUTPUT POWER	21
7.1 STANDARD APPLICABLE	21
7.2 TEST PROCEDURE	21
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	22
8. RADIATED SPURIOUS EMISSIONS	23
8.1 STANDARD APPLICABLE	23
8.2 TEST PROCEDURE	23
8.3 TEST RECEIVER SETUP	25
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	25
8.5 SUMMARY OF TEST RESULTS/PLOTS.....	25
9. FREQUENCY STABILITY	55
9.1 STANDARD APPLICABLE	55
9.2 TEST PROCEDURE	55
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	55
10. CONDUCTED EMISSIONS	56
10.1 TEST PROCEDURE.....	56
10.2 BASIC TEST SETUP BLOCK DIAGRAM	56
10.3 TEST RECEIVER SETUP	56
10.4 SUMMARY OF TEST RESULTS/PLOTS	56
APPENDIX SUMMARY	59
APPENDIX A.....	60
APPENDIX B.....	71
APPENDIX C.....	91
APPENDIX D.....	102

APPENDIX PHOTOGRAPHS.....104

Report version

Version No.	Date of issue	Description
Rev.00	2023-09-16	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Tablet
Trade Name:	LAVA
Model No.:	S87
Adding Model(s):	S87A , S87B, S87X, S87P
Rated Voltage:	DC3.8V
Battery Capacity:	5000mAh
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model S87, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VHT20/40/80
Frequency Range:	5150-5250MHz, 5250-5350MHz, 5725-5850MHz
RF Output Power:	11.28dBm (Conducted)
Type of Modulation:	QPSK,16QAM,64QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	2.78dBi
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results.</i>	

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-Nii) Devices Part 15, Subparte.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter *##*#3646631#*##* into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Test Frequency (MHz)								
	NCB: 20MHz								
	5180	5200	5240	5260	5300	5320	5745	5785	5825
802.11a 6Mbps	25	25	25	25	25	25	25	25	25
802.11n-HT20 MCS0	25	25	25	25	25	25	25	25	25
Mode	NCB: 40MHz								
	5190		5230	5270	5310		5755		5795
802.11n-HT40 MCS0	25		25	25	25		25		25
Mode	NCB: 80MHz								
	5210			5290			5775		
802.11ac-VH80 MCS0/Nss2	25			25			20		

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5260MHz,5280MHz,5320MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz,5270MHz,5310MHz,5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz,5290MHz, 5775MHz
Note: 802.11ac-VHT20, 802.11ac-VHT40 covered by 802.11n-HT20 and 802.11n-HT40.		

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Earphone Cable	1.0	Unshielded	Without Ferrite
USB Cable	1.0	Shielded	With

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	TianYi 100-14IBD	PF0F4ABV
Adapter	Mediacom	BOS050200-02A	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

Fixed asset Number	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
WTXE1041A 1001	Communication Tester	Rohde & Schwarz	CMW500	148650	2023-02-25	2024-02-24
WTXE1022A 1002	GSM Tester	Rohde & Schwarz	CMU200	114403	2023-02-25	2024-02-24
WTXE1005A 1005	Spectrum Analyzer	Agilent	N9020A	US471401 02	2023-02-25	2024-02-24
WTXE1084A 1001	Spectrum Analyzer	Agilent	N9020A	MY543205 48	2023-02-25	2024-02-24
WTXE1044A 1001	Signal Generator	Agilent	83752A	3610A014 53	2023-02-25	2024-02-24
WTXE1045A 1001	Vector Signal Generator	Agilent	N5182A	MY470702 02	2023-02-25	2024-02-24
WTXE1018A 1001	Power Divider	Weinschel	1506A	PM204	2023-02-25	2024-02-24
WTXE1045A 1001	Power Divider	RF-Lambda	RFLT4W5M18G	14110400 027	2023-02-25	2024-02-24
☐ Chamber A: Below 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1007A 1001	Amplifier	HP	8447F	2805A034 75	2023-02-25	2024-02-24
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1010A 1006	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2023-03-20	2026-03-19
☐ Chamber A: Above 1GHz						
WTXE1005A 1003	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2023-02-25	2024-02-24
WTXE1007A 1001	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2023-02-25	2024-02-24
WTXE1065A 1001	Amplifier	C&D	PAP-1G18	14918	2023-02-25	2024-02-24
WTXE1010A 1005	Horn Antenna	ETS	3117	00086197	2021-03-19	2024-03-18
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18

WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☐ Chamber B:Below 1GHz						
WTXE1010A 1006	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2024-04-08
WTXE1038A 1001	Amplifier	Agilent	8447D	2944A101 79	2023-02-25	2024-02-24
WTXE1001A 1002	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2023-02-25	2024-02-24
☒ Chamber C:Below 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1010A 1013-1	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2024-05-27
WTXE1010A 1007	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2024-03-19
WTXE1007A 1002	Amplifier	HP	8447F	2944A038 69	2023-02-25	2024-02-24
☒ Chamber C: Above 1GHz						
WTXE1093A 1001	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2023-02-25	2024-02-24
WTXE1103A 1005	Horn Antenna	POAM	RTF-11A	LP228060 221	2023-03-10	2026-03-09
WTXE1103A 1006	Amplifier	Tonscend	TAP01018050	AP22E806 235	2023-02-25	2024-02-24
WTXE1010A 1010	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2021-03-19	2024-03-18
WTXE1003A 1001	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2023-02-25	2024-02-24
☒ Conducted Room 1#						
WTXE1001A 1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2023-02-25	2024-02-24
WTXE1002A 1001	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2023-02-25	2024-02-24
WTXE1003A 1001	AC LISN	Schwarz beck	NSLK8126	8126-224	2023-02-25	2024-02-24
☐ Conducted Room 2#						
WTXE1001A 1004	EMI Test Receiver	Rohde & Schwarz	ESPI	101259	2023-02-25	2024-02-24
WTXE1003A	LISN	Rohde &	ENV 216	100097	2023-02-25	2024-02-24

Reference No.: WTX23X08187908W003

1003		Schwarz				
------	--	---------	--	--	--	--

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable.

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11 \text{ dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25GHz, 5.25-5.35GHz, and 5.47-5.725GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85GHz, the rules specify a measurement bandwidth of 500kHz. Many spectrum analyzers do not have 500kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500kHz, "provided that the measured power is integrated over the full

reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1MHz, or 500kHz). If measurements are performed using a reduced resolution bandwidth ($< 1\text{MHz}$, or $< 500\text{kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500\text{kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1\text{MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100kHz for the sections 5.c) and 5.d) above, since $\text{RBW}=100\text{kHz}$ is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85GHz band, the minimum 6dB bandwidth of U-NII devices shall be at least 500kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85GHz Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

- 1. Set center frequency to the nominal EUT channel center frequency.
- 2. Set span = 1.5 times to 5.0 times the OBW.
- 3. Set RBW = 1 % to 5 % of the OBW
- 4. Set VBW $\geq 3 \times$ RBW
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- 6. Use the 99 % power bandwidth function of the instrument (if available).
- 7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

Reference No.: WTX23X08187908W003

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25GHz.

(iv) For mobile and portable client devices in the 5.15-5.25GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(2) For the 5.25-5.35GHz and 5.47-5.725GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250mW or $11\text{dBm} + 10 \log B$, where B is the 26dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

(3) For the band 5.725-5.85GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1MHz.
- (iii) Set VBW $\geq$ 3MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that

narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq$ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35GHz band: All emissions outside of the 5.15-5.35GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725GHz band shall not exceed an e.i.r.p. of -27dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85GHz band:
 - (i) All emissions shall be limited to a level of -27dBm/MHz at 75MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25MHz above or below the band edge, and from 25MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5MHz above or below the band edge, and from 5MHz above or below the band edge increasing linearly to a level of 27dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.

789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

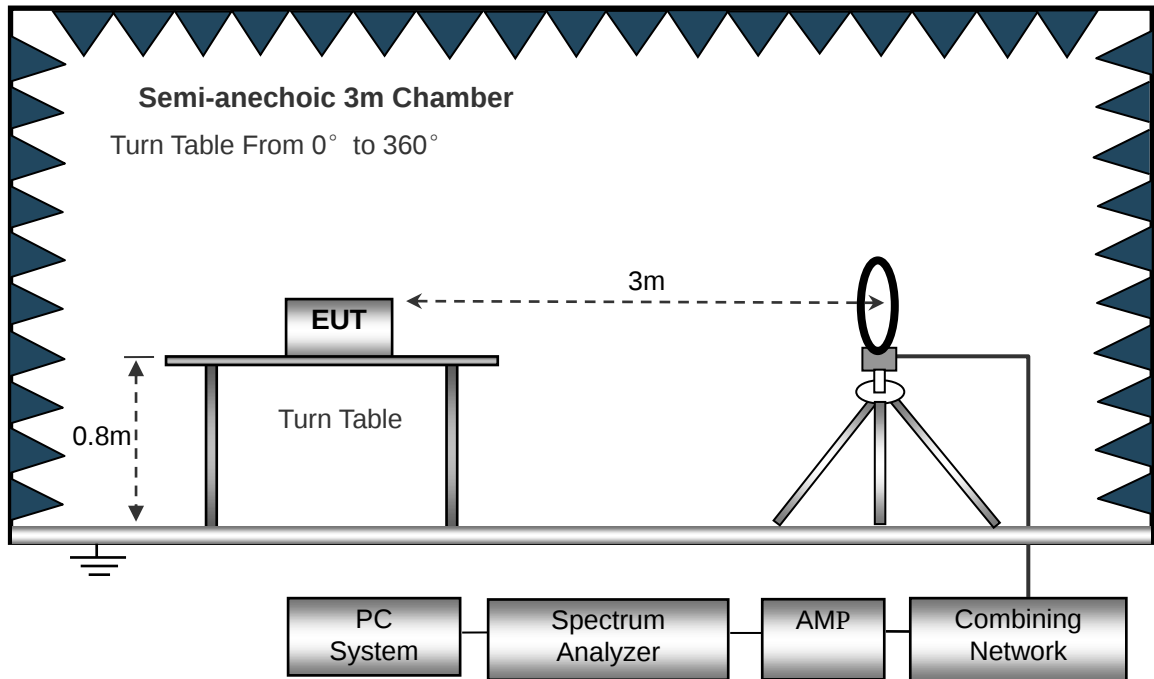
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

8.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40cm long in the middle. The spacing between the peripherals was 10cm.


The test setup for emission measurement below 30MHz.



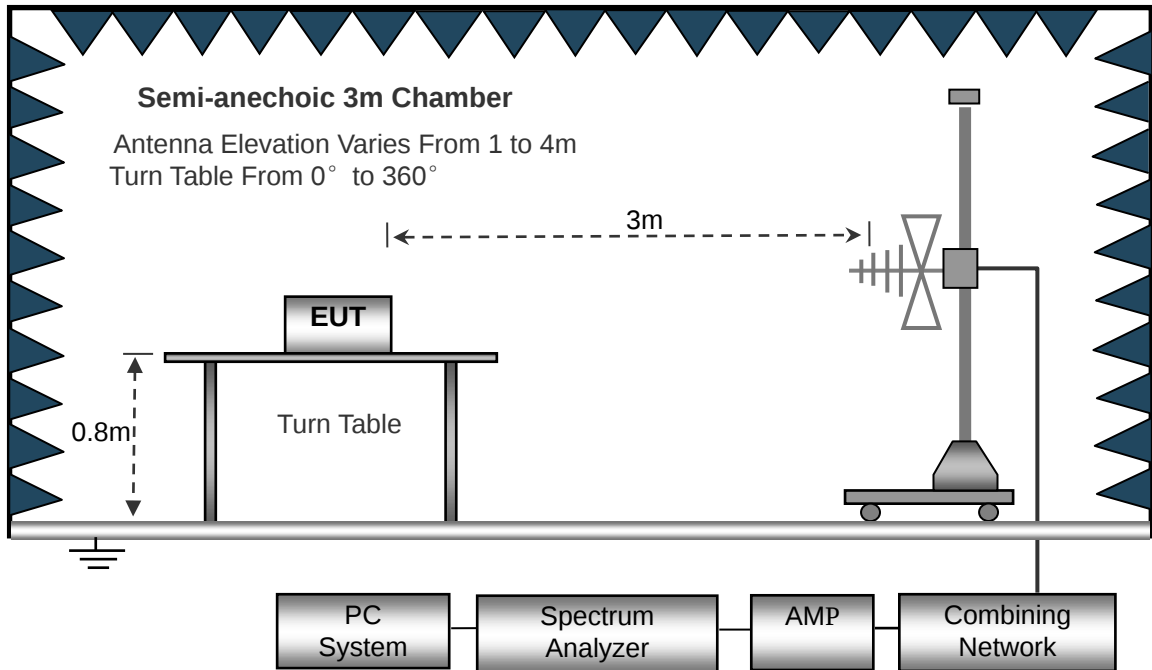The test setup for emission measurement from 30MHz to 1GHz.



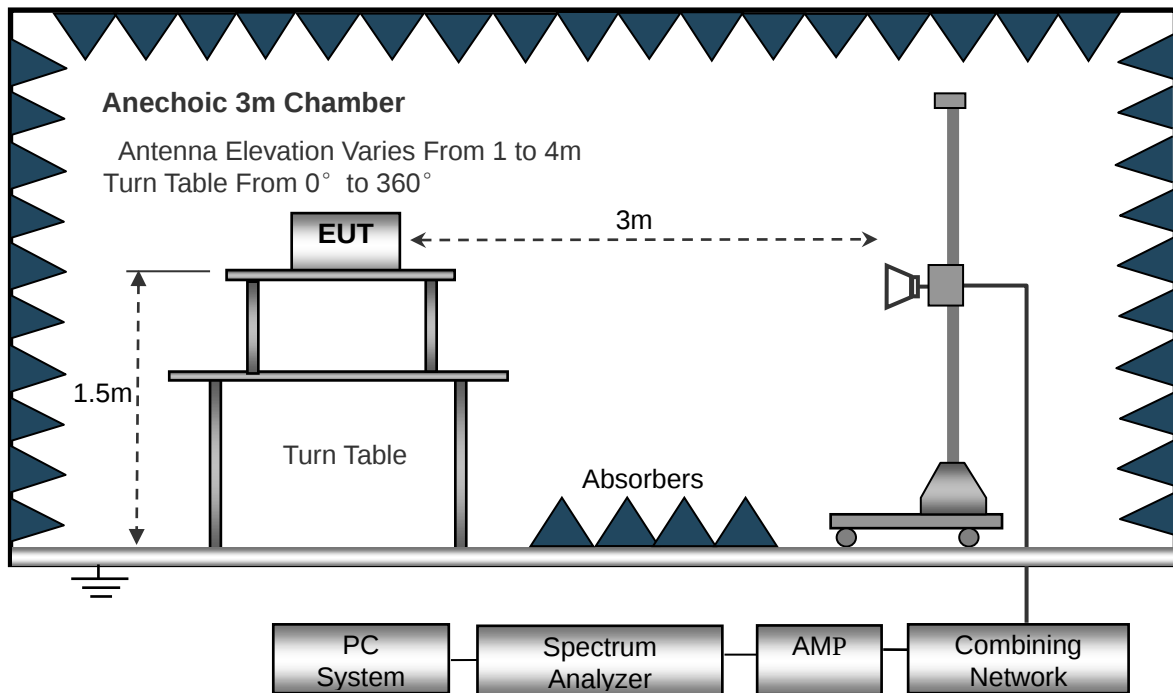The test setup for emission measurement above 1GHz.



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

- Spurious Emission From 30MHz to 1GHz
- 5150-5250MHz


802.11a(Worst case)

Test Channel	5180MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

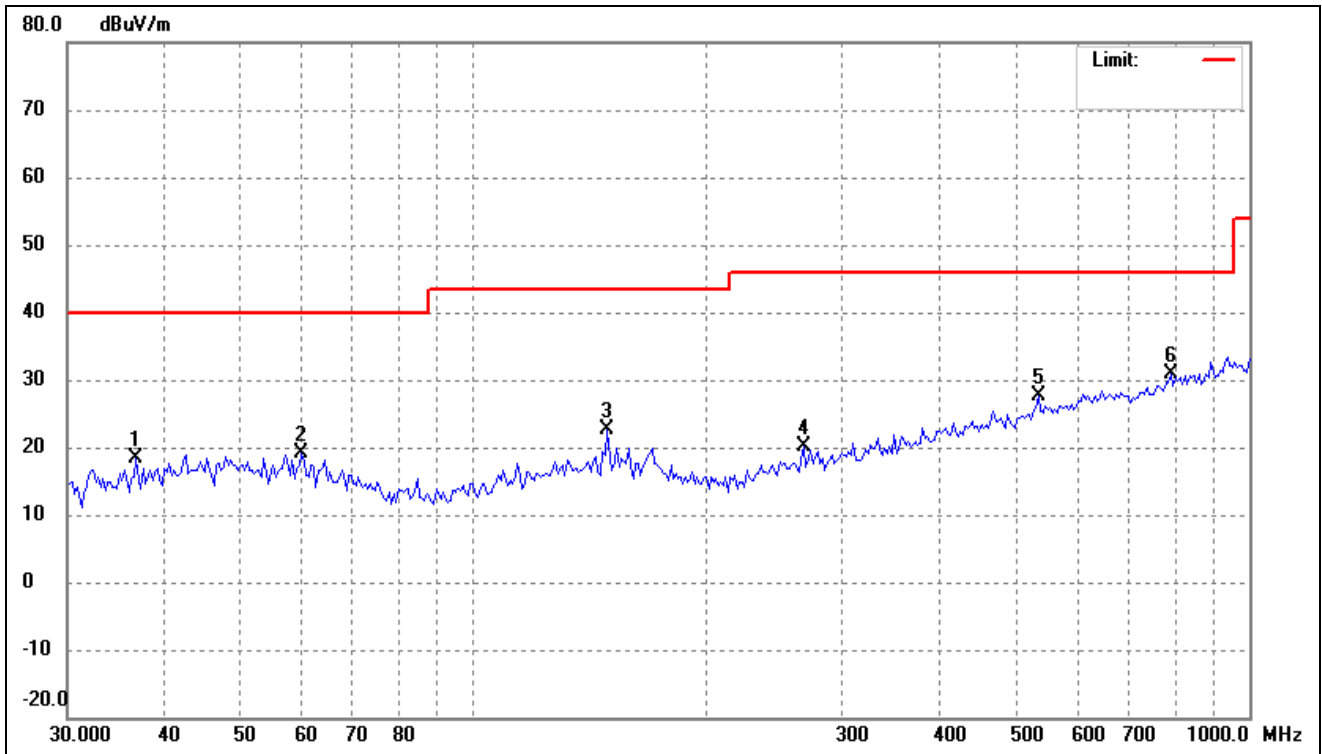


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	36.7811	27.51	-9.17	18.34	40.00	-21.66	-	-	peak
2	60.1528	28.16	-8.97	19.19	40.00	-20.81	-	-	peak
3	148.9175	31.40	-8.68	22.72	43.50	-20.78	-	-	peak
4	266.8395	29.49	-9.46	20.03	46.00	-25.97	-	-	peak
5	535.0377	30.97	-3.25	27.72	46.00	-18.28	-	-	peak
6	793.0281	30.74	0.23	30.97	46.00	-15.03	-	-	peak

802.11a(Worst case)			
Test Channel	5180MHz(	Polarity:	Vertical

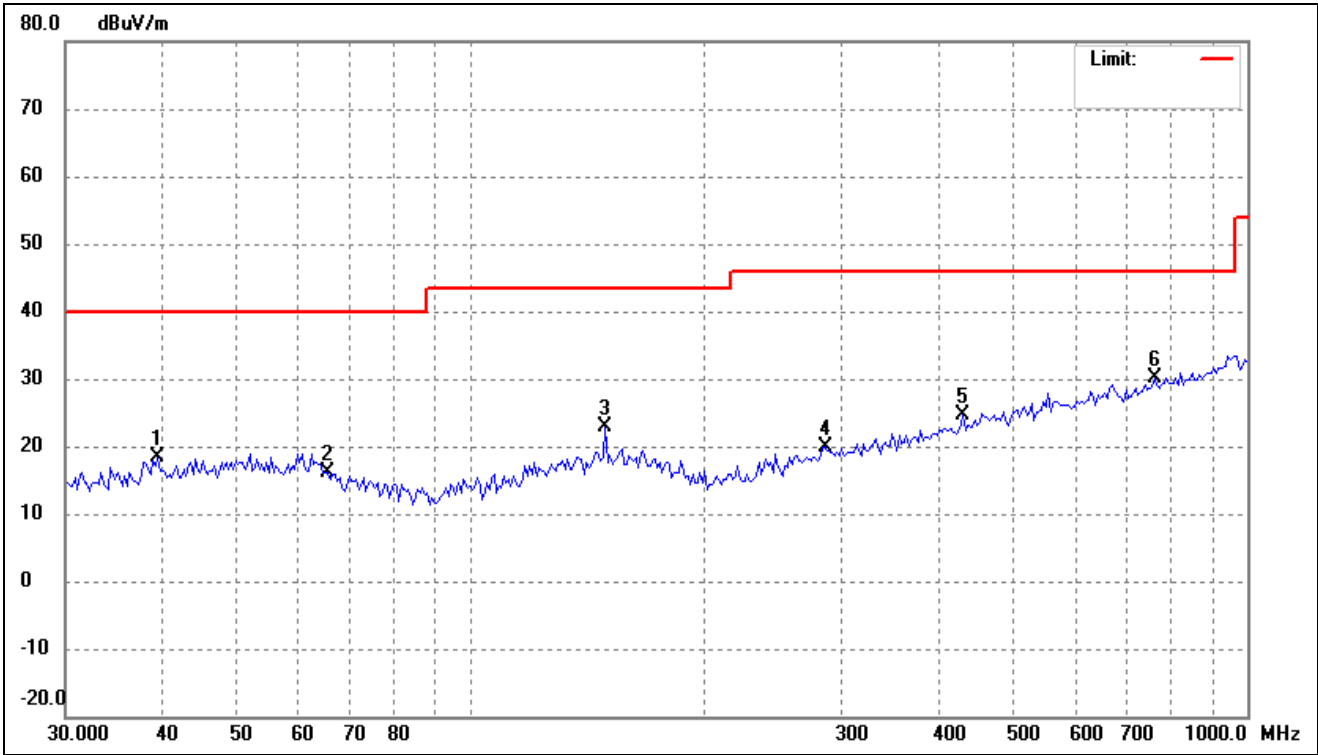


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.4588	27.04	-8.60	18.44	40.00	-21.56	-	-	peak
2	65.4452	26.10	-9.93	16.17	40.00	-23.83	-	-	peak
3	148.9175	31.49	-8.68	22.81	43.50	-20.69	-	-	peak
4	286.2653	28.60	-8.72	19.88	46.00	-26.12	-	-	peak
5	430.3053	29.76	-5.14	24.62	46.00	-21.38	-	-	peak
6	760.2867	30.10	-0.07	30.03	46.00	-15.97	-	-	peak

802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Horizontal

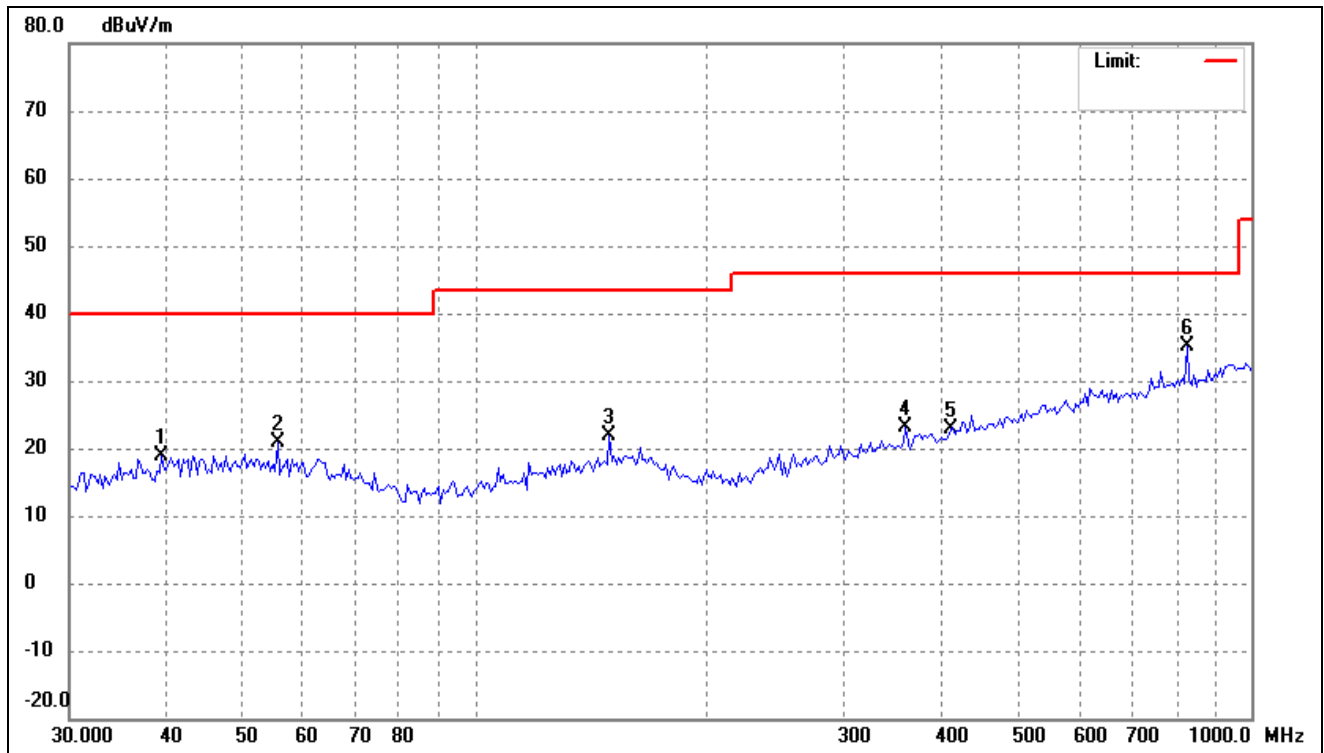

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	39.4588	27.49	-8.60	18.89	40.00	-21.11	-	-	peak
2	55.6782	29.46	-8.67	20.79	40.00	-19.21	-	-	peak
3	148.9175	30.68	-8.68	22.00	43.50	-21.50	-	-	peak
4	358.4497	29.90	-6.89	23.01	46.00	-22.99	-	-	peak
5	409.6506	28.54	-5.70	22.84	46.00	-23.16	-	-	peak
6	827.1795	34.62	0.54	35.16	46.00	-10.84	-	-	peak


802.11a(Worst case)			
Test Channel	5240MHz	Polarity:	Vertical

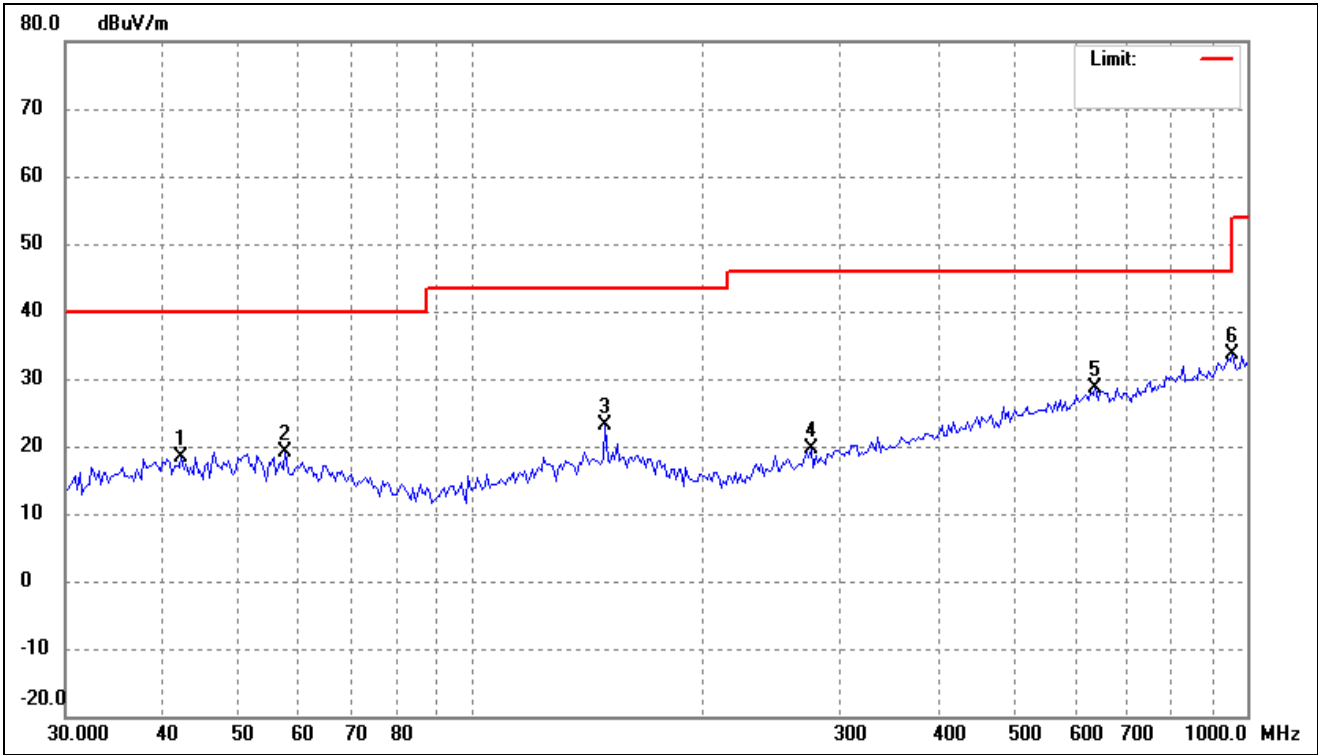

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.3314	26.97	-8.48	18.49	40.00	-21.51	-	-	peak
2	57.6693	27.94	-8.79	19.15	40.00	-20.85	-	-	peak
3	148.9175	31.83	-8.68	23.15	43.50	-20.35	-	-	peak
4	274.4464	28.78	-9.13	19.65	46.00	-26.35	-	-	peak
5	637.7947	29.88	-1.36	28.52	46.00	-17.48	-	-	peak
6	958.7135	31.41	2.26	33.67	46.00	-12.33	-	-	peak

➤ 5250-5350MHz


802.11a(Worst case)			
Test Channel	5260MHz	Polarity:	Horizontal

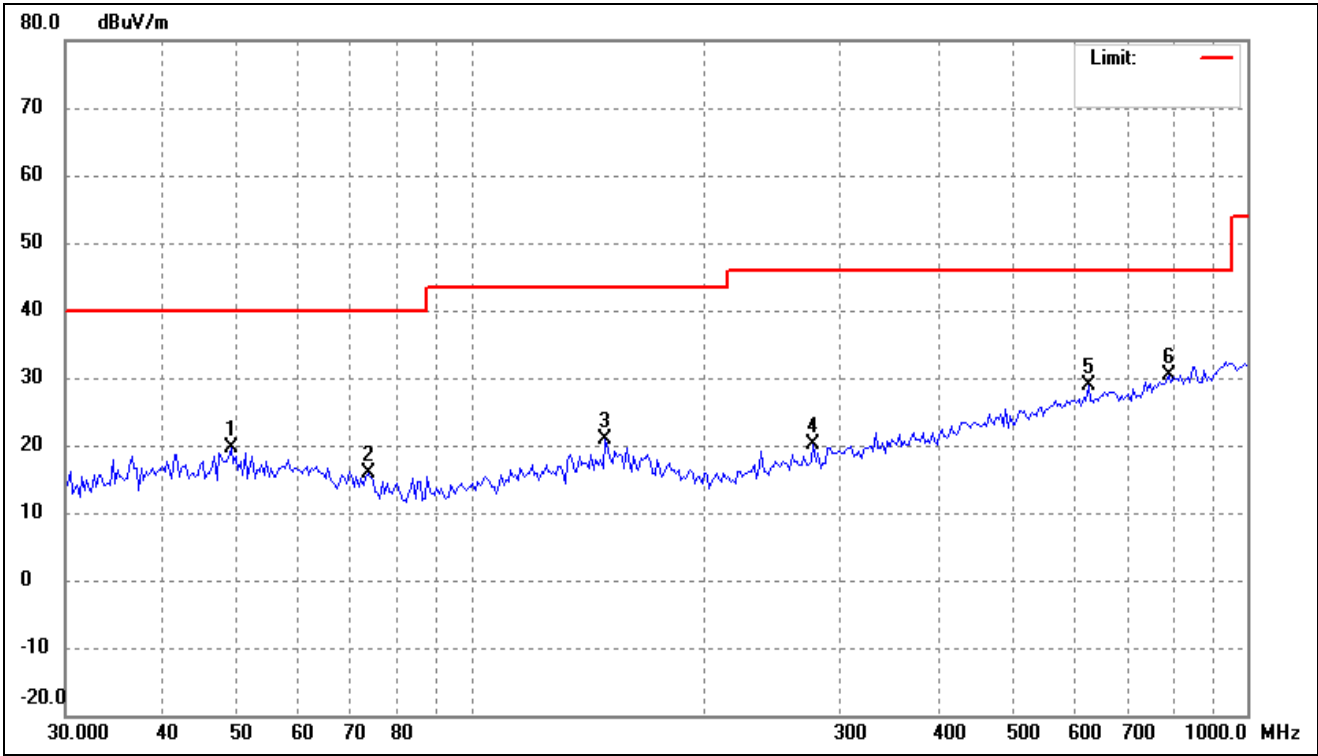

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
1	49.0627	27.82	-8.15	19.67	40.00	-20.33	()	(cm)	
2	73.7496	27.37	-11.59	15.78	40.00	-24.22	-	-	peak
3	148.9175	29.51	-8.68	20.83	43.50	-22.67	-	-	peak
4	276.3818	29.22	-9.06	20.16	46.00	-25.84	-	-	peak
5	624.4897	30.32	-1.41	28.91	46.00	-17.09	-	-	peak
6	793.0281	30.26	0.23	30.49	46.00	-15.51	-	-	peak


802.11a(Worst case)

Test Channel	5260MHz	Polarity:	Vertical
--------------	---------	-----------	----------

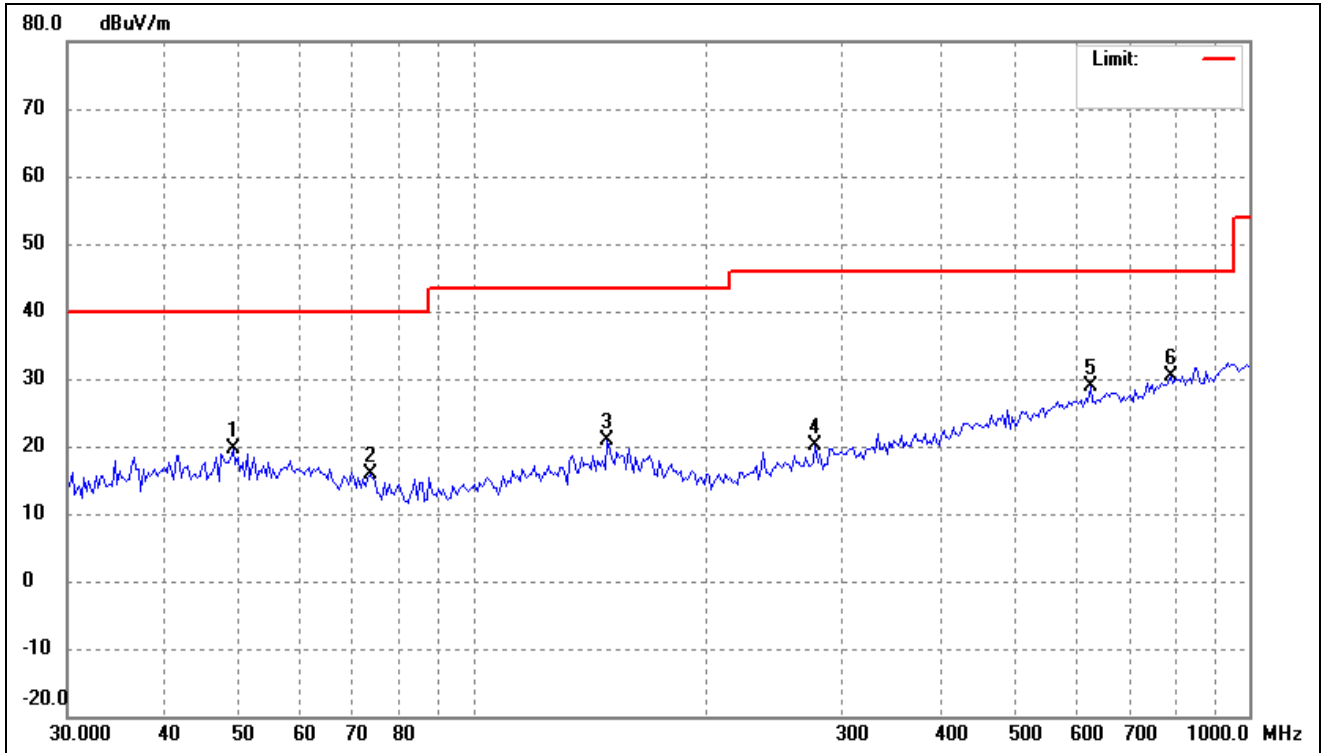


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.0627	27.82	-8.15	19.67	40.00	-20.33	-	-	peak
2	73.7496	27.37	-11.59	15.78	40.00	-24.22	-	-	peak
3	148.9175	29.51	-8.68	20.83	43.50	-22.67	-	-	peak
4	276.3818	29.22	-9.06	20.16	46.00	-25.84	-	-	peak
5	624.4897	30.32	-1.41	28.91	46.00	-17.09	-	-	peak
6	793.0281	30.26	0.23	30.49	46.00	-15.51	-	-	peak

802.11a(Worst case)			
Test Channel	5320MHz	Polarity:	Horizontal

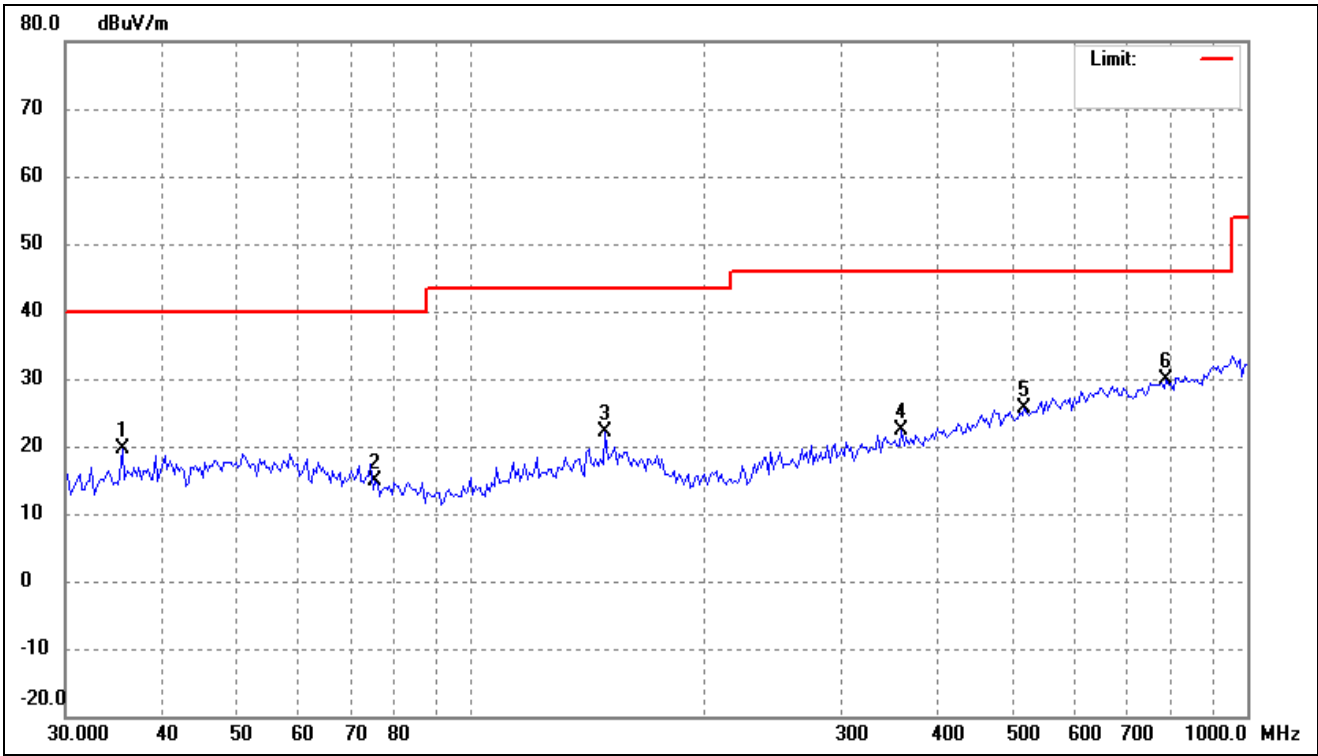

No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	35.5112	29.09	-9.44	19.65	40.00	-20.35	-	-	peak
2	75.3208	26.74	-11.94	14.80	40.00	-25.20	-	-	peak
3	148.9175	30.81	-8.68	22.13	43.50	-21.37	-	-	peak
4	358.4497	29.18	-6.89	22.29	46.00	-23.71	-	-	peak
5	516.5651	29.33	-3.65	25.68	46.00	-20.32	-	-	peak
6	787.4749	29.75	0.19	29.94	46.00	-16.06	-	-	peak

802.11a(Worst case)			
Test Channel	5320MHz	Polarity:	Vertical

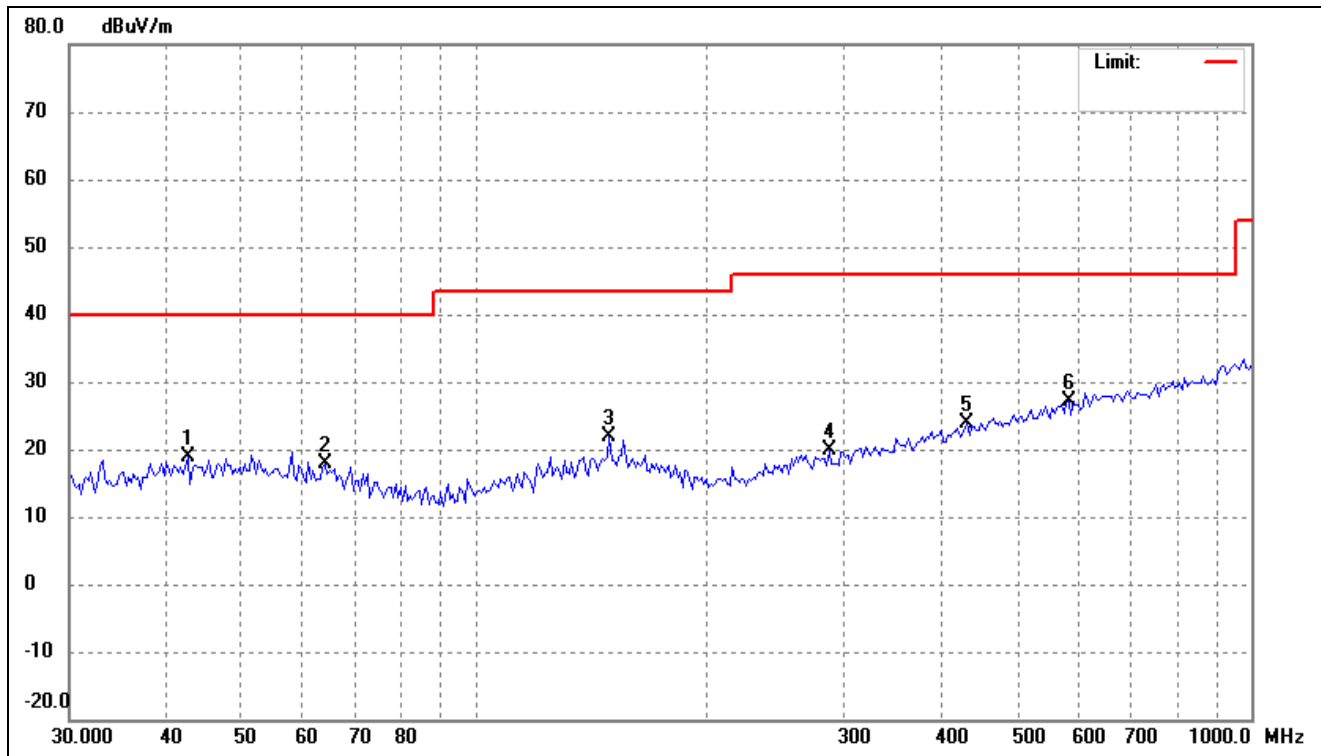


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	42.6299	27.41	-8.48	18.93	40.00	-21.07	-	-	peak
2	64.0800	27.48	-9.68	17.80	40.00	-22.20	-	-	peak
3	148.9175	30.47	-8.68	21.79	43.50	-21.71	-	-	peak
4	286.2653	28.52	-8.72	19.80	46.00	-26.20	-	-	peak
5	430.3053	29.13	-5.14	23.99	46.00	-22.01	-	-	peak
6	582.1122	29.31	-2.11	27.20	46.00	-18.80	-	-	peak

➤ 5725-5850MHz


802.11a(worst case)

Test Channel	5745MHz	Polarity:	Horizontal
--------------	---------	-----------	------------

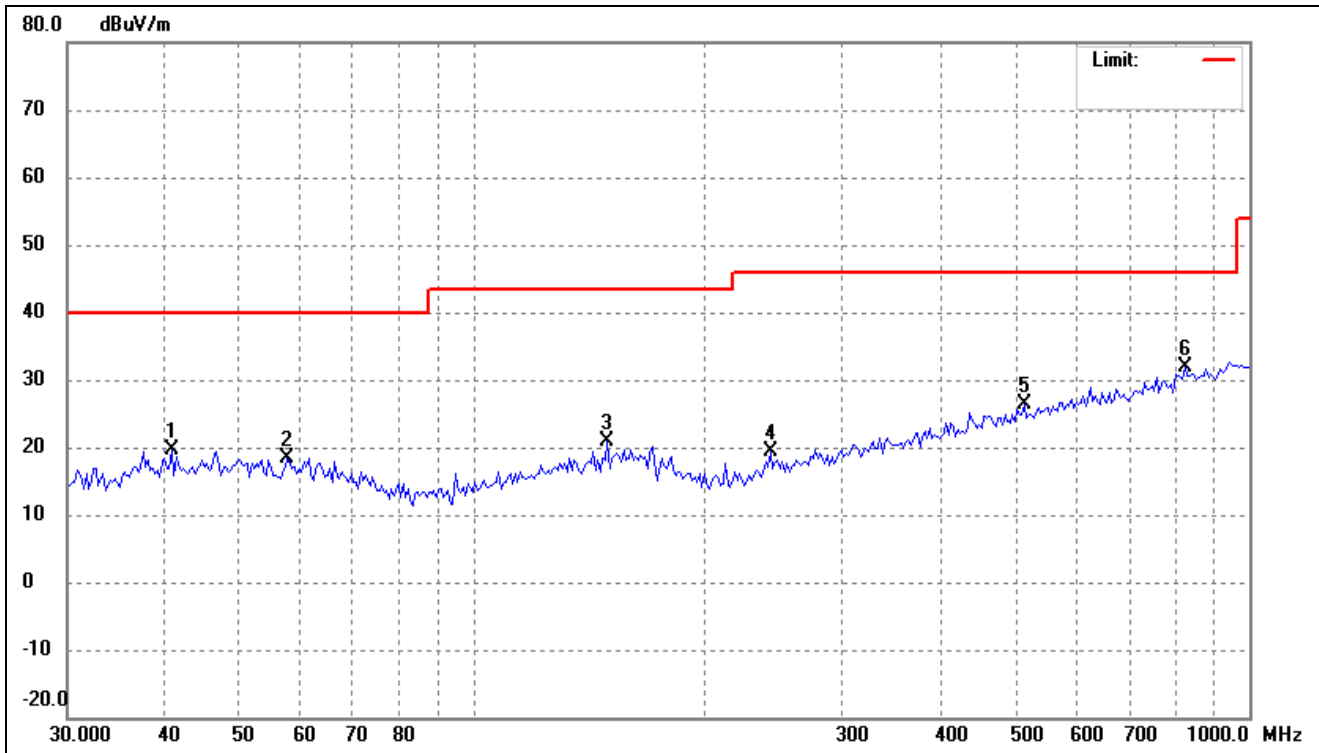


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	40.8699	28.00	-8.47	19.53	40.00	-20.47	-	-	peak
2	57.6693	27.27	-8.79	18.48	40.00	-21.52	-	-	peak
3	148.9175	29.56	-8.68	20.88	43.50	-22.62	-	-	peak
4	241.8377	29.91	-10.48	19.43	46.00	-26.57	-	-	peak
5	512.9478	29.97	-3.70	26.27	46.00	-19.73	-	-	peak
6	827.1795	31.24	0.54	31.78	46.00	-14.22	-	-	peak

802.11a(worst case)			
Test Channel	5745MHz	Polarity:	Vertical

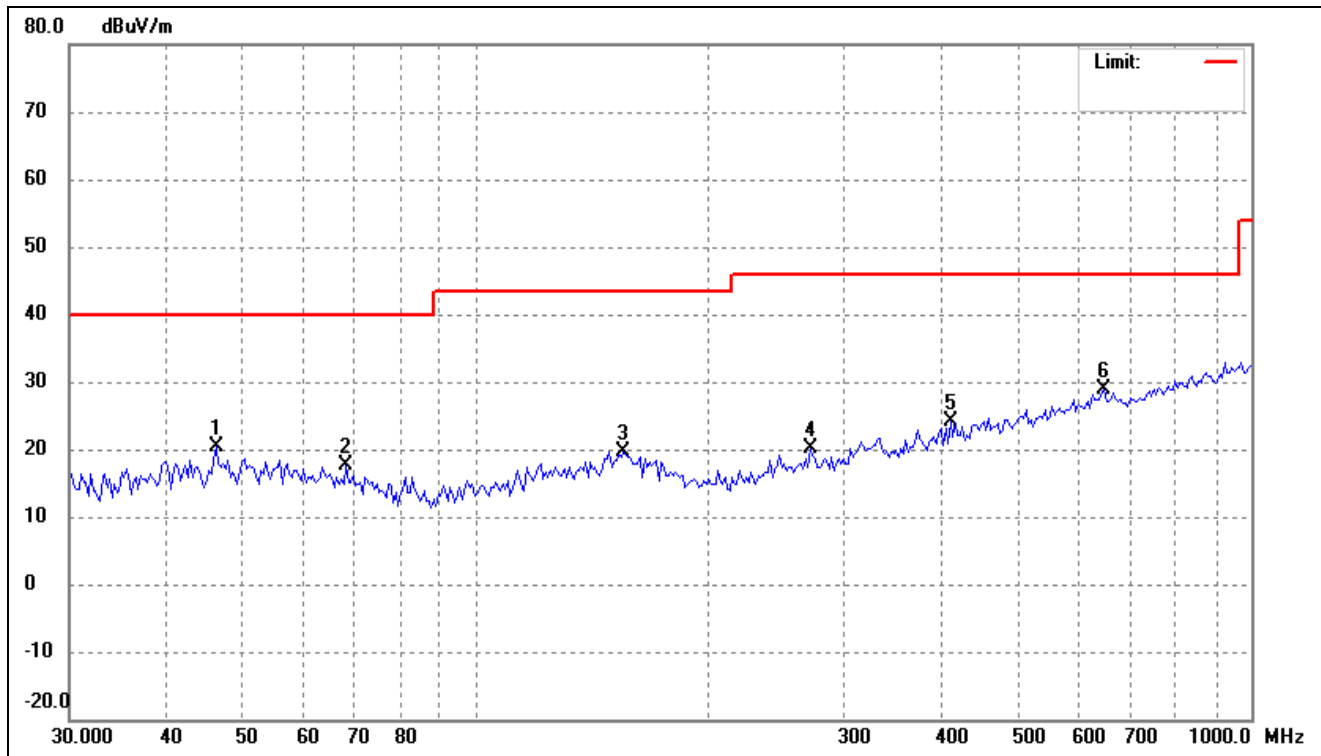


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	46.3806	28.78	-8.37	20.41	40.00	-19.59	-	-	peak
2	68.2635	28.08	-10.45	17.63	40.00	-22.37	-	-	peak
3	155.3305	28.33	-8.61	19.72	43.50	-23.78	-	-	peak
4	270.6162	29.38	-9.30	20.08	46.00	-25.92	-	-	peak
5	409.6506	29.87	-5.70	24.17	46.00	-21.83	-	-	peak
6	646.8217	30.30	-1.32	28.98	46.00	-17.02	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Horizontal

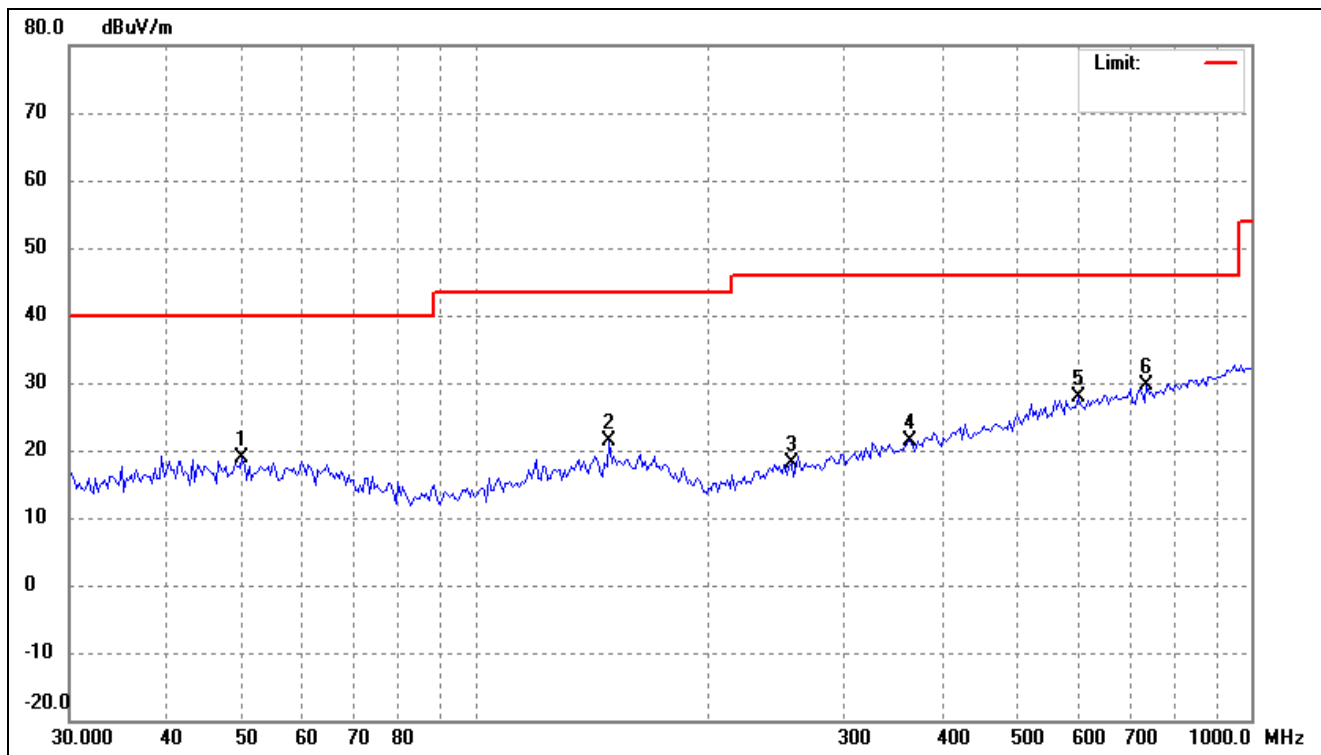

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	50.1080	26.86	-8.09	18.77	40.00	-21.23	-	-	peak
2	148.9175	29.98	-8.68	21.30	43.50	-22.20	-	-	peak
3	255.8226	28.21	-9.96	18.25	46.00	-27.75	-	-	peak
4	363.5231	28.25	-6.76	21.49	46.00	-24.51	-	-	peak
5	598.7067	29.56	-1.77	27.79	46.00	-18.21	-	-	peak
6	734.0373	30.05	-0.46	29.59	46.00	-16.41	-	-	peak

802.11a(worst case)			
Test Channel	5825MHz	Polarity:	Vertical

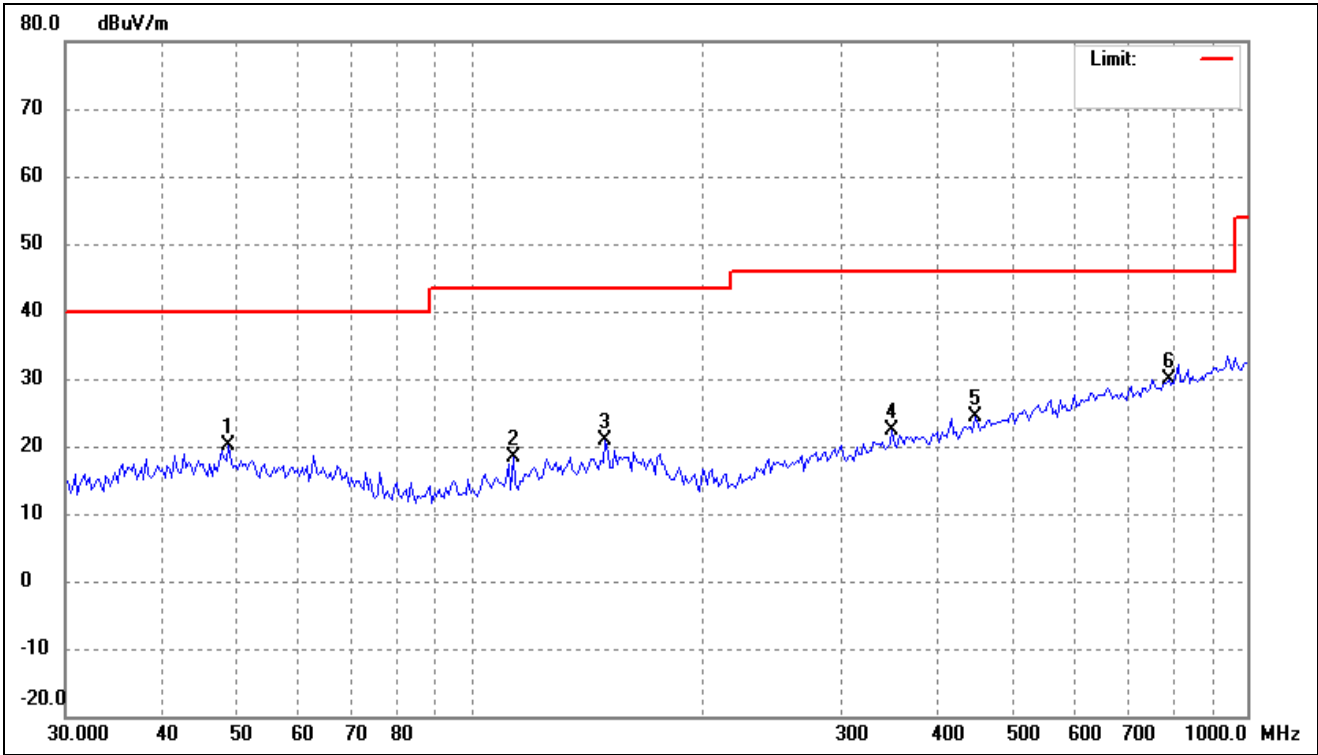


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	48.7191	28.36	-8.18	20.18	40.00	-19.82	-	-	peak
2	113.2200	29.52	-11.24	18.28	43.50	-25.22	-	-	peak
3	148.9175	29.60	-8.68	20.92	43.50	-22.58	-	-	peak
4	348.5145	29.61	-7.14	22.47	46.00	-23.53	-	-	peak
5	445.6932	29.11	-4.71	24.40	46.00	-21.60	-	-	peak
6	793.0281	29.63	0.23	29.86	46.00	-16.14	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.


➤ Spurious Emission above 1GHz

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

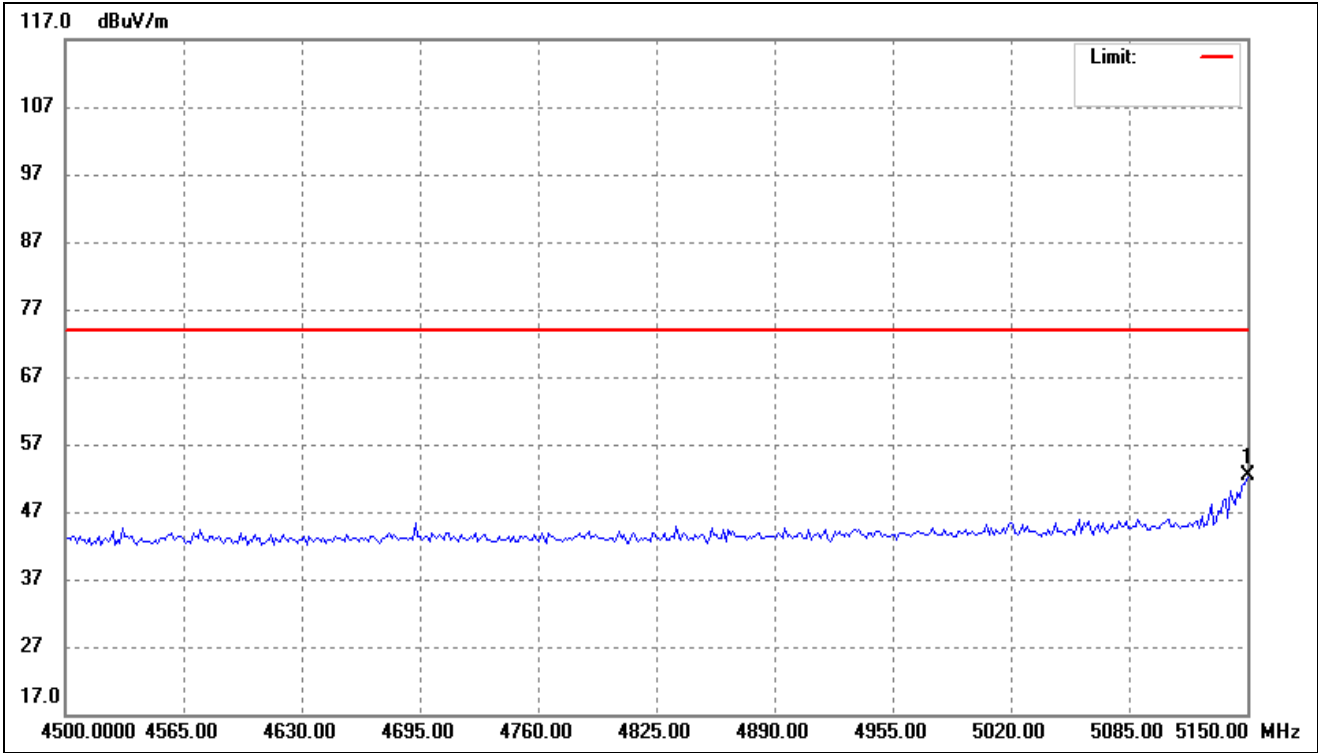


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5150.000	63.92	-11.66	52.26	74.00	-21.74	-	-	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

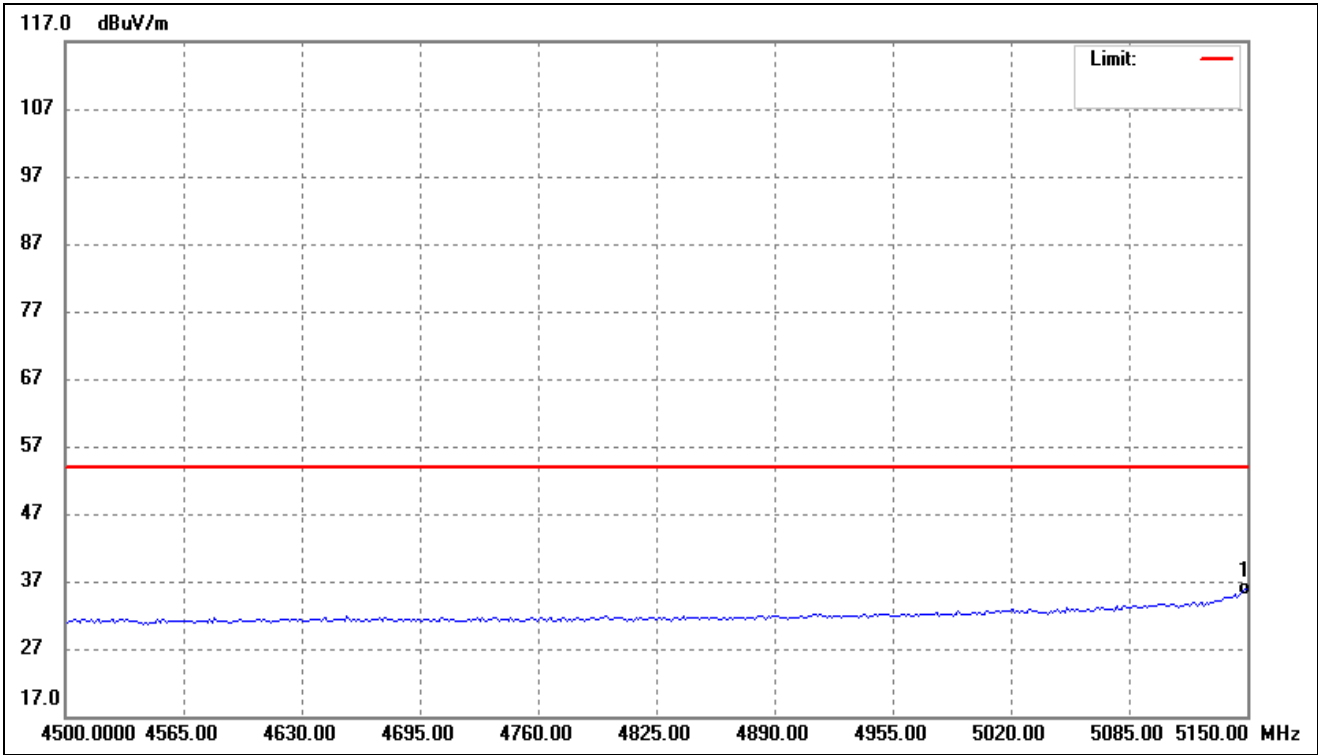


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
	5148.697	47.44	-11.66	35.78	54.00	-18.22	-	-	AVG

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

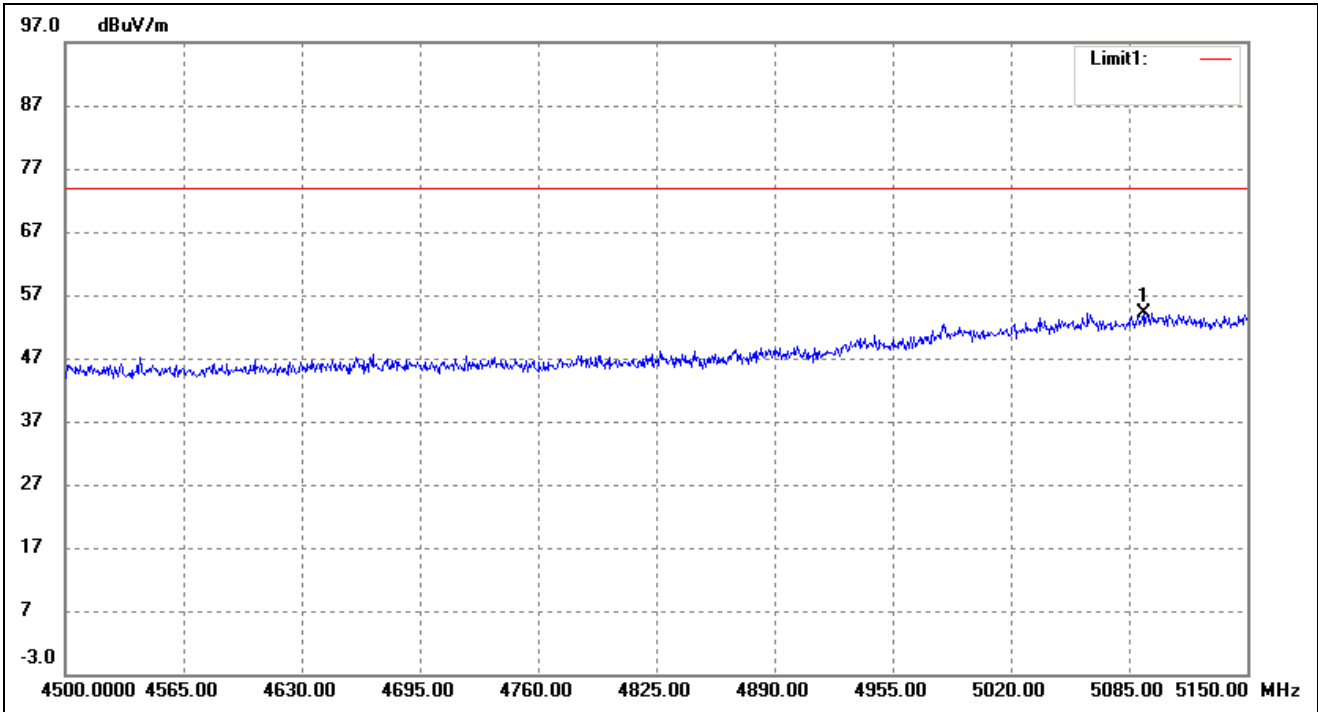


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5092.800	54.40	-0.26	54.14	74.00	-19.86	-	-	peak

802.11n-HT20- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

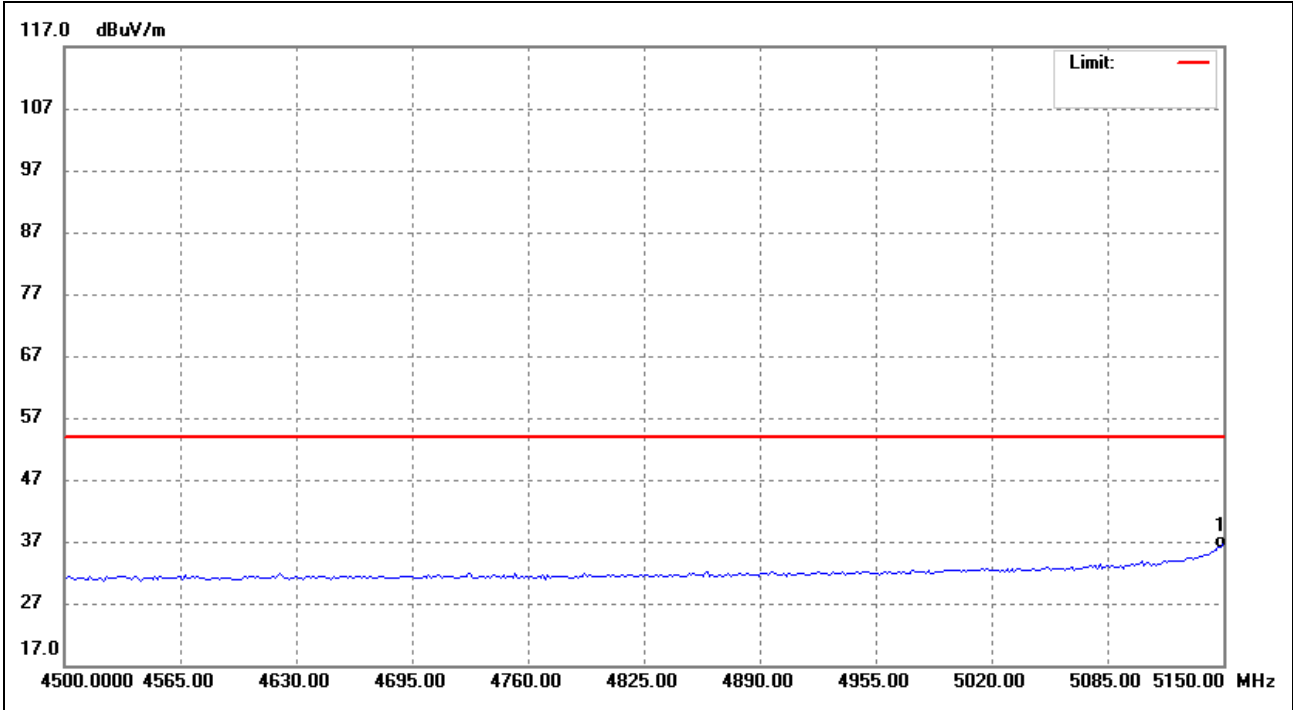


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	()	(cm)	
1	5150.000	48.47	-11.66	36.81	54.00	-17.19	-	-	AVG

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

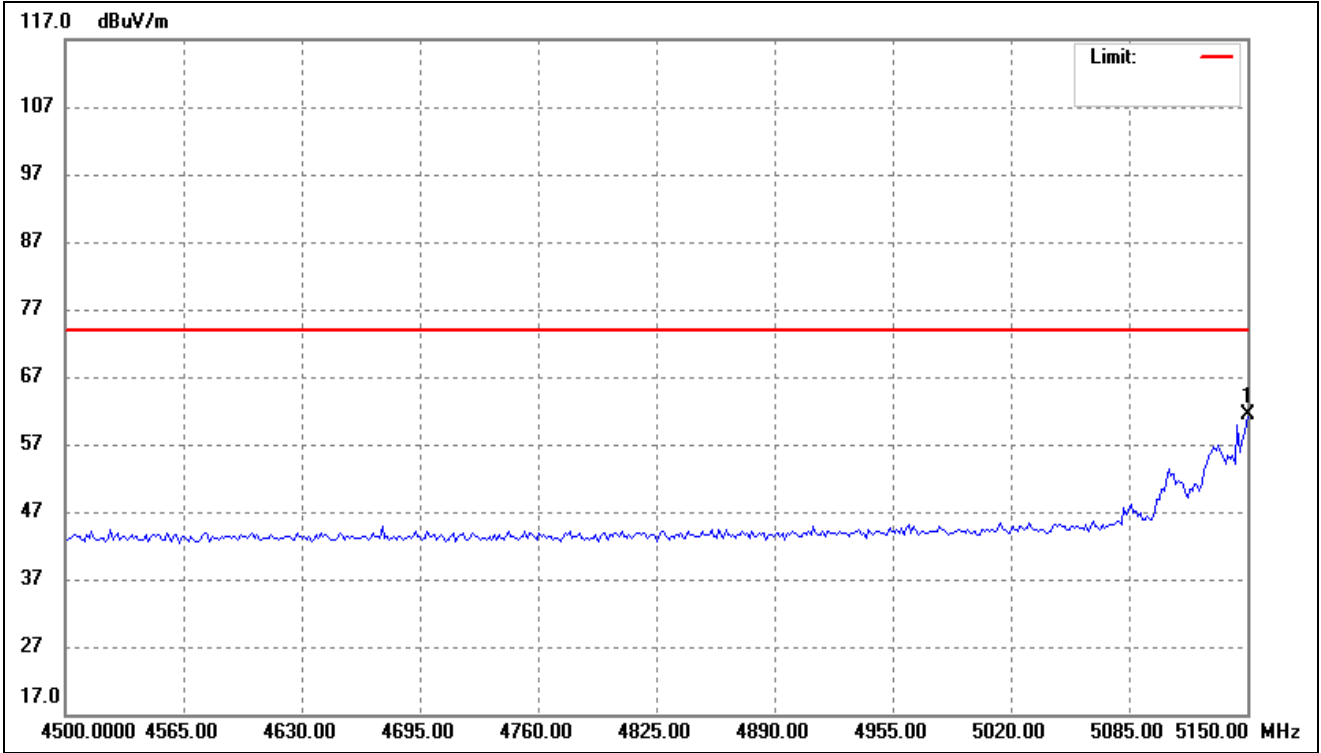


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	73.00	-11.66	61.34	74.00	-12.66	-	-	peak

802.11n-HT40- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

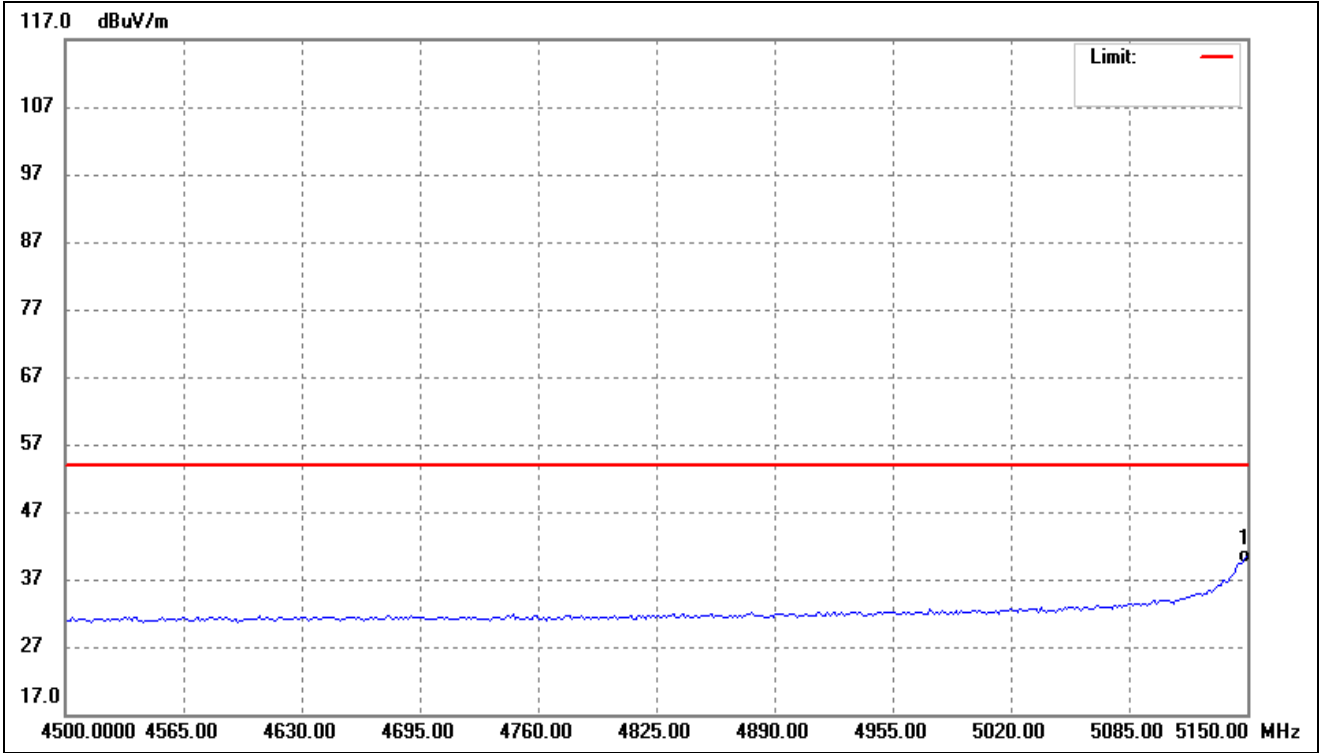


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	52.04	-11.66	40.38	54.00	-13.62	-	-	AVG

802.11ac-VHT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

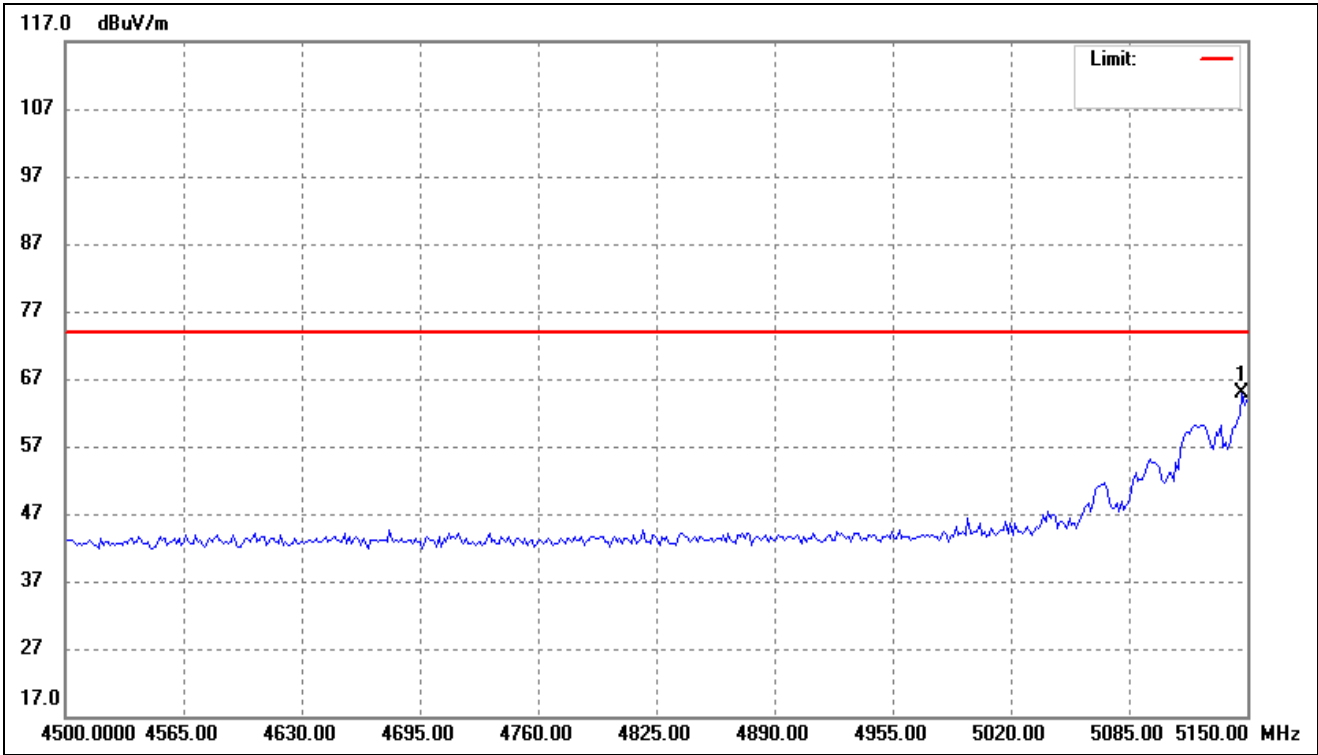

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5147.395	76.47	-11.67	64.80	74.00	-9.20	-	-	peak

802.11ac-VHT80- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Horizontal (worst case)

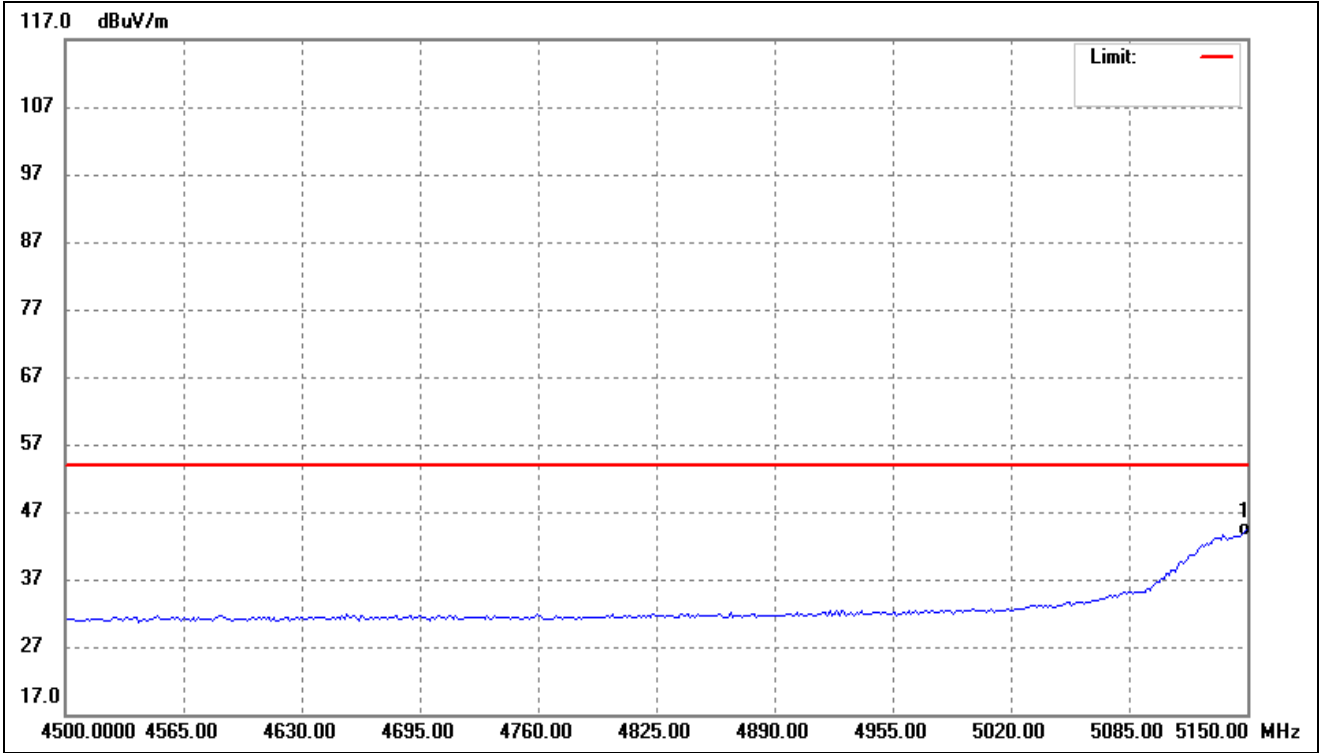

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	5150.000	56.10	-11.66	44.44	54.00	-9.56	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: ‘-’Means’ the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11a)
- Harmonics And Spurious Emissions

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5180MHz)							
10360	55.81	7.11	62.92	74	-11.08	H	PK
10360	41.02	7.11	48.13	54	-5.87	H	AV
10360	55.61	7.11	62.72	74	-11.28	V	PK
10360	40.01	7.11	47.12	54	-6.88	V	AV
Middle Channel (5200MHz)							
10400	58.28	7.22	65.50	74	-8.50	H	PK
10400	39.93	7.22	47.15	54	-6.85	H	AV
10400	55.11	7.22	62.33	74	-11.67	V	PK
10400	41.22	7.22	48.44	54	-5.56	V	AV
High Channel (5240MHz)							
10480	55.99	7.69	63.68	74	-10.32	H	PK
10480	38.18	7.69	45.87	54	-8.13	H	AV
10480	58.94	7.69	66.63	74	-7.37	V	PK
10480	40.28	7.69	47.97	54	-6.03	V	AV

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel (5260MHz)							
10520	57.21	7.96	65.17	74	-8.83	H	PK
10520	41.31	7.96	49.27	54	-4.73	H	AV
10520	56.64	7.96	64.60	74	-9.40	V	PK
10520	39.15	7.96	47.11	54	-6.89	V	AV
Middle Channel (5280MHz)							
10560	57.67	8.02	65.69	74	-8.31	H	PK
10560	40.92	8.02	48.94	54	-5.06	H	AV
10560	57.49	8.02	65.51	74	-8.49	V	PK
10560	38.61	8.02	46.63	54	-7.37	V	AV
High Channel (5320MHz)							
10640	55.91	8.35	64.26	74	-9.74	H	PK
10640	41.58	8.35	49.93	54	-4.07	H	AV
10640	57.98	8.35	66.33	74	-7.67	V	PK
10640	40.84	8.35	49.19	54	-4.81	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	57.61	9.45	67.06	74	-6.94	H	PK
11490	41.03	9.45	50.48	54	-3.52	H	AV
11490	58.85	9.45	68.30	74	-5.70	V	PK
11490	39.33	9.45	48.78	54	-5.22	V	AV
Middle Channel (5785MHz)							
11570	55.43	9.62	65.05	74	-8.95	H	PK
11570	40.47	9.62	50.09	54	-3.91	H	AV
11570	58.50	9.62	68.12	74	-5.88	V	PK
11570	41.81	9.62	51.43	54	-2.57	V	AV
High Channel (5825MHz)							
11650	57.46	9.84	67.30	74	-6.70	H	PK
11650	38.18	9.84	48.02	54	-5.98	H	AV
11650	55.13	9.84	64.97	74	-9.03	V	PK
11650	38.50	9.84	48.34	54	-5.66	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.59	-27
Highest	Above 5350	-41.25	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.67	-27
Highest	Above 5350	-40.26	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-41.59	-27
	5715 to 5725	-38.24	-17
Highest	5850 to 5860	-37.86	-17
	Above 5860	-42.29	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	55.75	7.11	62.86	74	-11.14	H	PK
10360	40.30	7.11	47.41	54	-6.59	H	AV
10360	57.92	7.11	65.03	74	-8.97	V	PK
10360	41.97	7.11	49.08	54	-4.92	V	AV
Middle Channel (5200MHz)							
10400	58.40	7.22	65.62	74	-8.38	H	PK
10400	40.86	7.22	48.08	54	-5.92	H	AV
10400	57.82	7.22	65.04	74	-8.96	V	PK
10400	40.23	7.22	47.45	54	-6.55	V	AV
High Channel (5240MHz)							
10480	55.40	7.69	63.09	74	-10.91	H	PK
10480	39.07	7.69	46.76	54	-7.24	H	AV
10480	56.62	7.69	64.31	74	-9.69	V	PK
10480	40.31	7.69	48.00	54	-6.00	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5260MHz)							
10520	55.51	7.96	63.47	74	-10.53	H	PK
10520	38.86	7.96	46.82	54	-7.18	H	AV
10520	58.96	7.96	66.92	74	-7.08	V	PK
10520	41.74	7.96	49.70	54	-4.30	V	AV
Middle Channel (5280MHz)							
10560	55.85	8.02	63.87	74	-10.13	H	PK
10560	41.86	8.02	49.88	54	-4.12	H	AV
10560	58.45	8.02	66.47	74	-7.53	V	PK
10560	39.16	8.02	47.18	54	-6.82	V	AV
High Channel (5320MHz)							
10640	57.25	8.35	65.60	74	-8.40	H	PK
10640	39.04	8.35	47.39	54	-6.61	H	AV
10640	56.97	8.35	65.32	74	-8.68	V	PK
10640	39.78	8.35	48.13	54	-5.87	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.23	9.45	64.68	74	-9.32	H	PK
11490	39.38	9.45	48.83	54	-5.17	H	AV
11490	56.97	9.45	66.42	74	-7.58	V	PK
11490	40.88	9.45	50.33	54	-3.67	V	AV
Middle Channel (5785MHz)							
11570	57.47	9.62	67.09	74	-6.91	H	PK
11570	41.19	9.62	50.81	54	-3.19	H	AV
11570	55.16	9.62	64.78	74	-9.22	V	PK
11570	38.82	9.62	48.44	54	-5.56	V	AV
High Channel (5825MHz)							
11650	58.27	9.84	68.11	74	-5.89	H	PK
11650	38.35	9.84	48.19	54	-5.81	H	AV
11650	58.90	9.84	68.74	74	-5.26	V	PK
11650	41.39	9.84	51.23	54	-2.77	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.59	-27
Highest	Above 5350	-41.46	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-44.87	-27
Highest	Above 5350	-43.25	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-42.46	-27
	5715 to 5725	-38.21	-17
Highest	5850 to 5860	-37.63	-17
	Above 5860	-38.58	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11n HT40)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	55.10	7.89	62.99	74	-11.01	H	PK
10380	40.19	7.89	48.08	54	-5.92	H	AV
10380	57.30	7.89	65.19	74	-8.81	V	PK
10380	39.56	7.89	47.45	54	-6.55	V	AV
High Channel (5230MHz)							
10460	56.96	7.97	64.93	74	-9.07	H	PK
10460	38.50	7.97	46.47	54	-7.53	H	AV
10460	56.98	7.97	64.95	74	-9.05	V	PK
10460	41.30	7.97	49.27	54	-4.73	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5270MHz)							
10540	55.09	8.16	63.25	74	-10.75	H	PK
10540	41.06	8.16	49.22	54	-4.78	H	AV
10540	57.85	8.16	66.01	74	-7.99	V	PK
10540	38.88	8.16	47.04	54	-6.96	V	AV
High Channel (5310MHz)							
10620	57.83	8.57	66.40	74	-7.60	H	PK
10620	41.68	8.57	50.25	54	-3.75	H	AV
10620	55.04	8.57	63.61	74	-10.39	V	PK
10620	41.49	8.57	50.06	54	-3.94	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	58.25	9.45	67.70	74	-6.30	H	PK
11510	38.67	9.45	48.12	54	-5.88	H	AV
11510	57.74	9.45	67.19	74	-6.81	V	PK
11510	38.92	9.45	48.37	54	-5.63	V	AV
High Channel (5795MHz)							
11590	57.50	9.27	66.77	74	-7.23	H	PK
11590	41.99	9.27	51.26	54	-2.74	H	AV
11590	55.80	9.27	65.07	74	-8.93	V	PK
11590	38.93	9.27	48.20	54	-5.80	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-39.58	-27
Highest	Above 5350	-41.46	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-41.68	-27
Highest	Above 5350	-38.54	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-39.21	-27
	5715 to 5725	-38.09	-17
Highest	5850 to 5860	-35.47	-17
	Above 5860	-42.68	-27
Note: the data just list the worst cases			

- For the frequency band 5.15-5.25GHz, 5.250-5.350GHz, 5.470-5.725GHz, 5.725-5.850GHz (802.11ac VHT80)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	57.93	7.53	65.46	74	-8.54	H	PK
10420	38.27	7.53	45.80	54	-8.20	H	AV
10420	57.06	7.53	64.59	74	-9.41	H	PK
10420	41.23	7.53	48.76	54	-5.24	H	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5290MHz							
10580	55.28	7.95	63.23	74	-10.77	H	PK
10580	41.18	7.95	49.13	54	-4.87	H	AV
10580	58.39	7.95	66.34	74	-7.66	V	PK
10580	40.21	7.95	48.16	54	-5.84	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	58.10	9.93	68.03	74	-5.97	H	PK
11550	38.31	9.93	48.24	54	-5.76	H	AV
11550	58.37	9.93	68.30	74	-5.70	V	PK
11550	39.66	9.93	49.59	54	-4.41	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-42.29	-27
Highest	Above 5350	-38.84	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5250-5350MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-40.66	-27
Highest	Above 5350	-39.31	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.47	-27
	5715 to 5725	-34.59	-17
Highest	5850 to 5860	-34.68	-17
	Above 5860	-40.49	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to 40Ghz, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.


The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots


Please refer to Appendix D

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

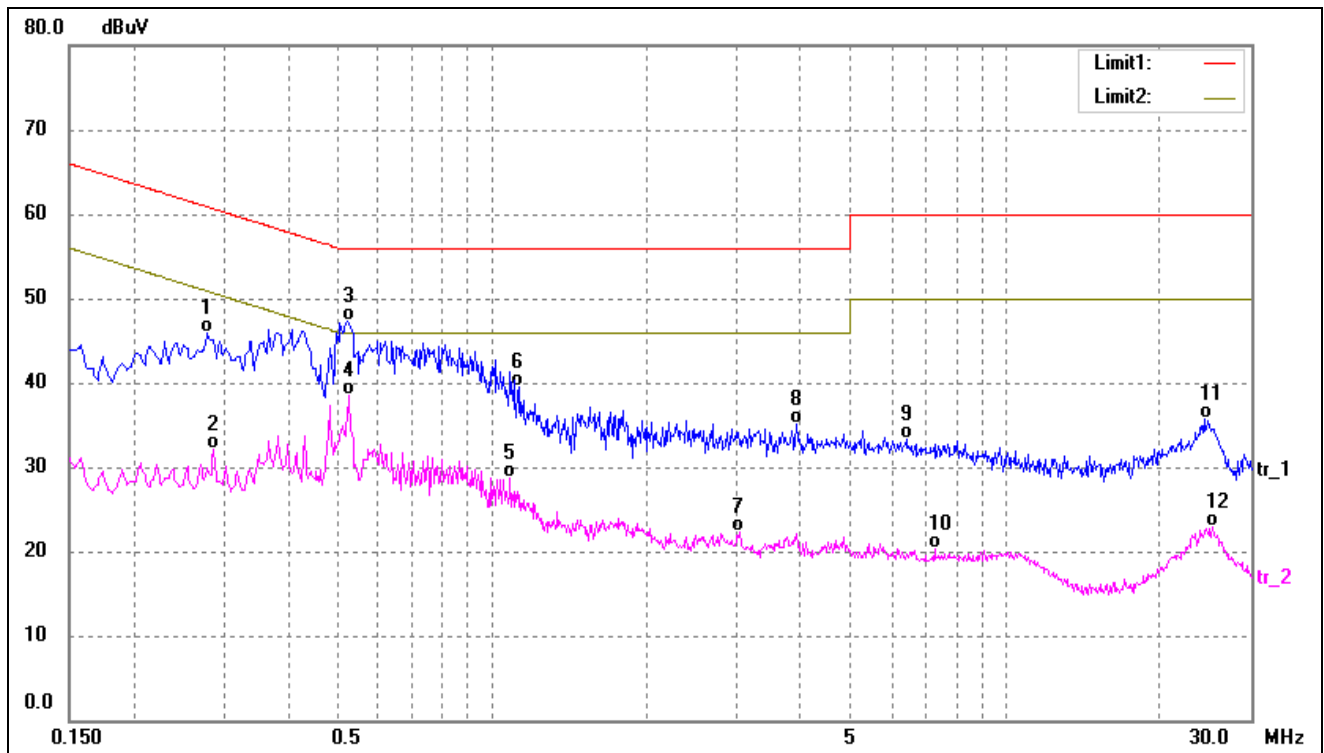

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2780	35.64	10.31	45.95	60.88	-14.93	QP
2	0.2860	21.71	10.31	32.02	50.64	-18.62	AVG
3	0.5220	37.14	10.23	47.37	56.00	-8.63	QP
4*	0.5260	28.26	10.23	38.49	46.00	-7.51	AVG
5	1.0860	18.52	10.16	28.68	46.00	-17.32	AVG
6	1.1340	29.25	10.16	39.41	56.00	-16.59	QP
7	3.0340	11.98	10.35	22.33	46.00	-23.67	AVG
8	3.9060	24.73	10.36	35.09	56.00	-20.91	QP
9	6.3980	22.88	10.38	33.26	60.00	-26.74	QP
10	7.2860	9.85	10.38	20.23	50.00	-29.77	AVG
11	24.3700	25.36	10.30	35.66	60.00	-24.34	QP
12	25.2220	12.60	10.29	22.89	50.00	-27.11	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

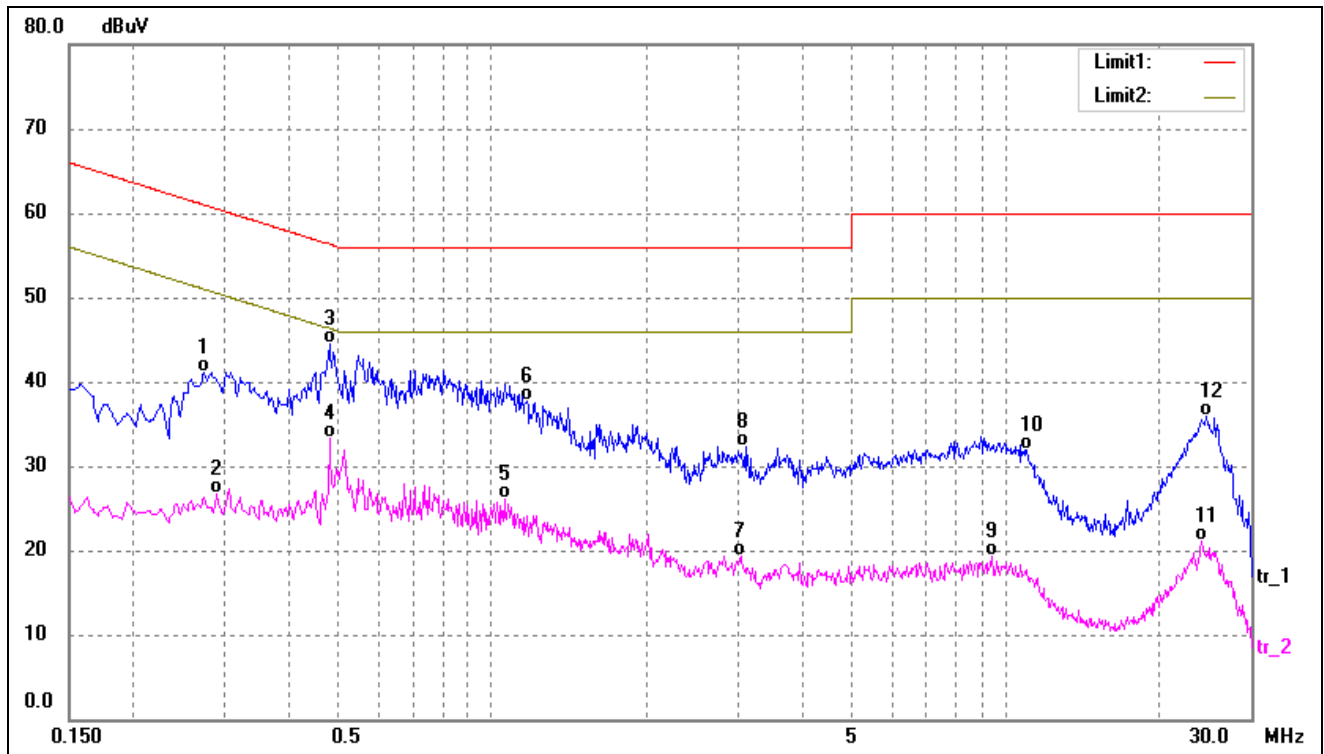

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2740	30.83	10.33	41.16	61.00	-19.84	QP
2	0.2900	16.40	10.31	26.71	50.52	-23.81	AVG
3*	0.4820	34.35	10.23	44.58	56.30	-11.72	QP
4	0.4820	23.01	10.23	33.24	46.30	-13.06	AVG
5	1.0580	15.91	10.16	26.07	46.00	-19.93	AVG
6	1.1700	27.49	10.18	37.67	56.00	-18.33	QP
7	3.0420	8.99	10.35	19.34	46.00	-26.66	AVG
8	3.1180	22.00	10.35	32.35	56.00	-23.65	QP
9	9.3940	9.00	10.38	19.38	50.00	-30.62	AVG
10	10.9740	21.58	10.35	31.93	60.00	-28.07	QP
11	24.1060	10.88	10.31	21.19	50.00	-28.81	AVG
12	24.5740	25.54	10.30	35.84	60.00	-24.16	QP

APPENDIX SUMMARY

Project No.	WTX23X08187908W	Test Engineer	Elin Su
Start date	2023/9/9	Finish date	2023/9/9
Temperature	23℃	Humidity	51%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant



APPENDIX A

Power Spectral Density			
U-NII-1:5150-5250MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	-0.79	11
	5200	-1.78	11
	5240	-2.71	11
802.11n-HT20	5180	-1.08	11
	5200	-1.67	11
	5240	-2.61	11
802.11n-HT40	5190	-3.99	11
	5230	-3.96	11
802.11ac-VHT80	5210	-6.94	11



U-NII-2A: 5250-5350MHz			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5260	-2.14	11
	5280	-2.57	11
	5320	-1.94	11
802.11n-HT20	5260	-2.71	11
	5280	-2.91	11
	5320	-3.53	11
802.11n-HT40	5270	-5.64	11
	5310	-6.11	11
802.11ac-VHT80	5290	-7.97	11

U-NII-3: 5725-5850MHz					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	0.41	2.22	2.63	30
	5785	-0.31	2.22	1.91	30
	5825	-1.13	2.22	1.09	30
802.11n-HT20	5745	0.08	2.22	2.3	30
	5785	-0.47	2.22	1.75	30
	5825	-1.47	2.22	0.75	30
802.11n HT40	5755	-2.48	2.22	-0.26	30
	5795	-3.65	2.22	-1.43	30
802.11ac VHT80	5775	-8.53	2.22	-6.31	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

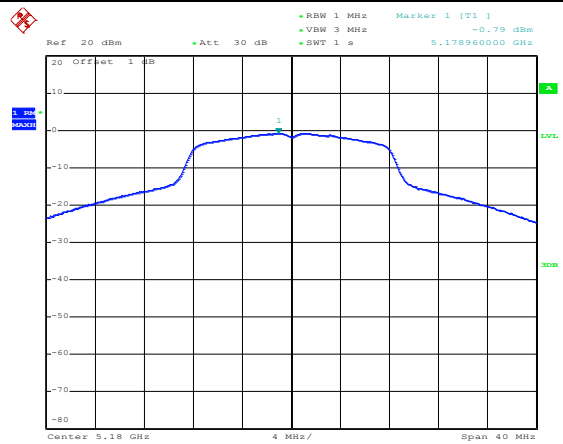

5150-5250MHz






Date: 9.SEP.2023 11:50:21


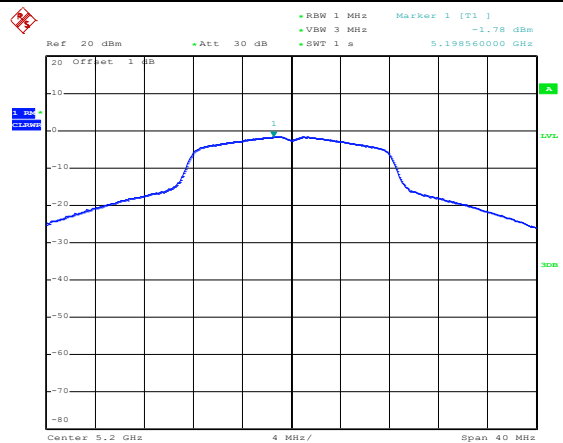



Date: 9.SEP.2023 11:51:49

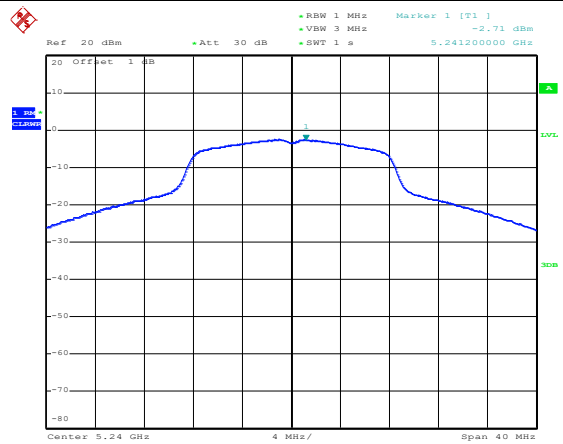



Date: 9.SEP.2023 11:52:07

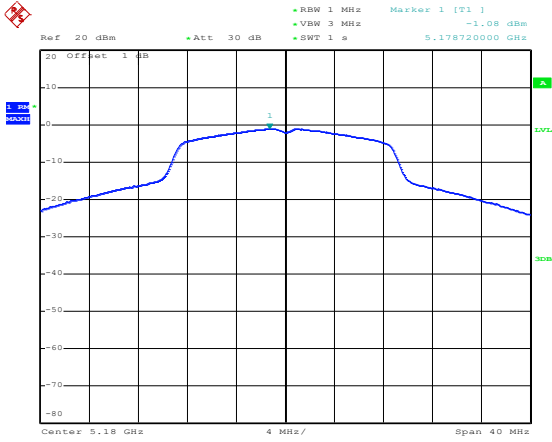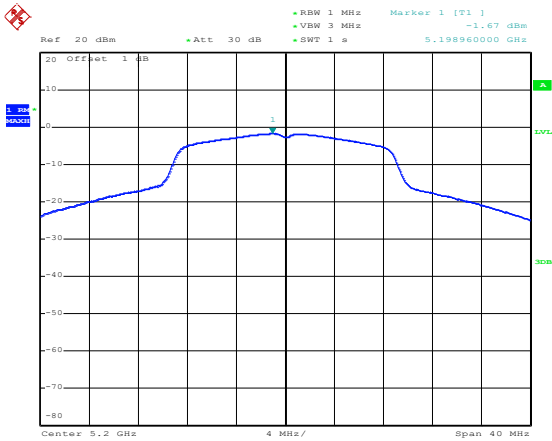
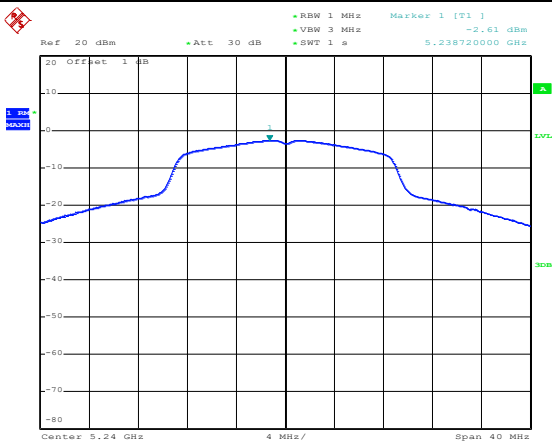
802.11n-HT20-Low	 Ref 20 dBm • Att 30 dB • RBW 1 MHz Marker 1 [T1] -1.08 dBm • VBW 3 MHz 5.178720000 GHz • SWT 1 s 20 Offset 1 dB Center 5.18 GHz 4 MHz/ Span 40 MHz Date: 9.SEP.2023 11:53:05
802.11n-HT20-Middle	 Ref 20 dBm • Att 30 dB • RBW 1 MHz Marker 1 [T1] -1.67 dBm • VBW 3 MHz 5.198960000 GHz • SWT 1 s 20 Offset 1 dB Center 5.2 GHz 4 MHz/ Span 40 MHz Date: 9.SEP.2023 11:53:24
802.11n-HT20-High	 Ref 20 dBm • Att 30 dB • RBW 1 MHz Marker 1 [T1] -2.61 dBm • VBW 3 MHz 5.238720000 GHz • SWT 1 s 20 Offset 1 dB Center 5.24 GHz 4 MHz/ Span 40 MHz Date: 9.SEP.2023 11:53:44

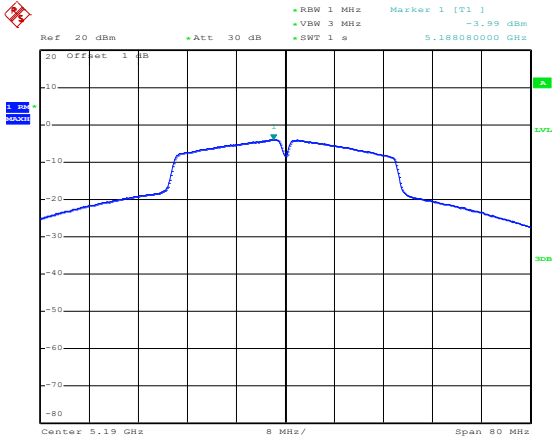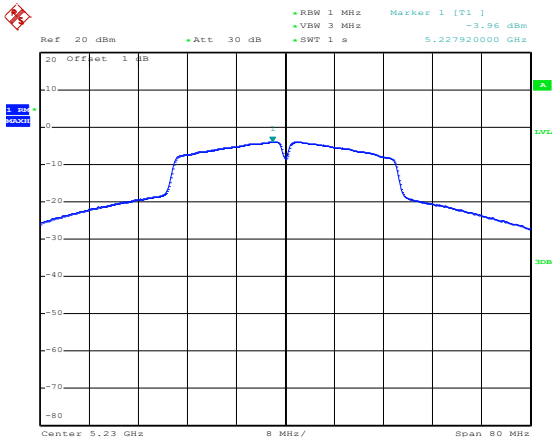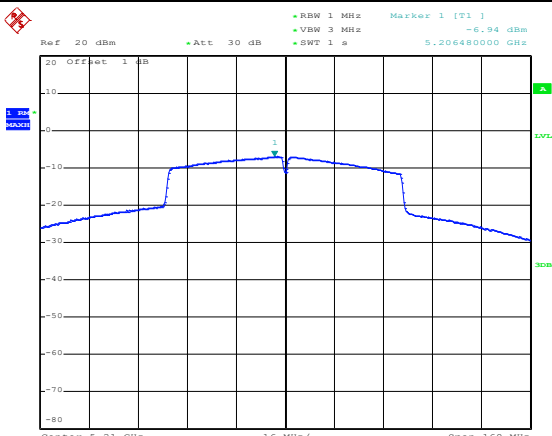802.11n-HT40-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -3.99 dBm, 5.18800000 GHz Center: 5.19 GHz, Span: 80 MHz Date: 9.SEP.2023 11:54:27
802.11n-HT40-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -3.96 dBm, 5.227920000 GHz Center: 5.23 GHz, Span: 80 MHz Date: 9.SEP.2023 11:55:02
802.11ac-VHT80-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -6.94 dBm, 5.206480000 GHz Center: 5.21 GHz, Span: 160 MHz Date: 9.SEP.2023 15:05:31

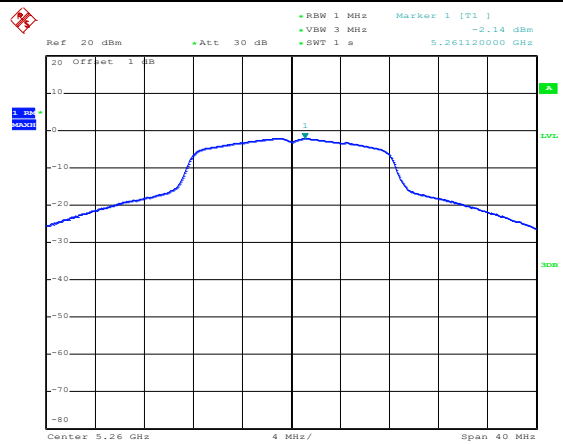

5250-5350MHz






Date: 9.SEP.2023 13:39:54


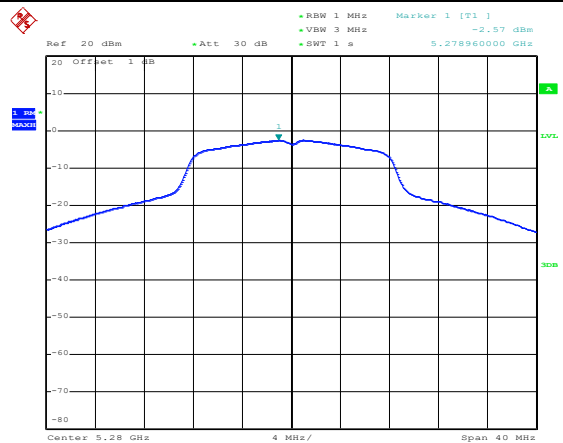



Date: 9.SEP.2023 13:42:09

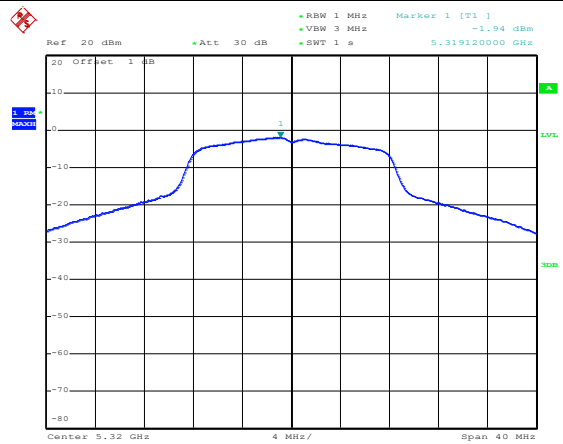



Date: 9.SEP.2023 13:43:03

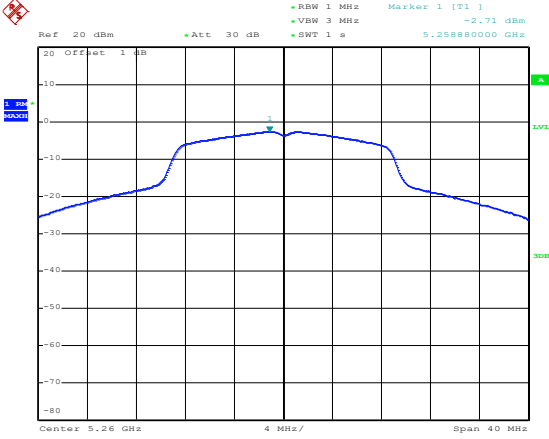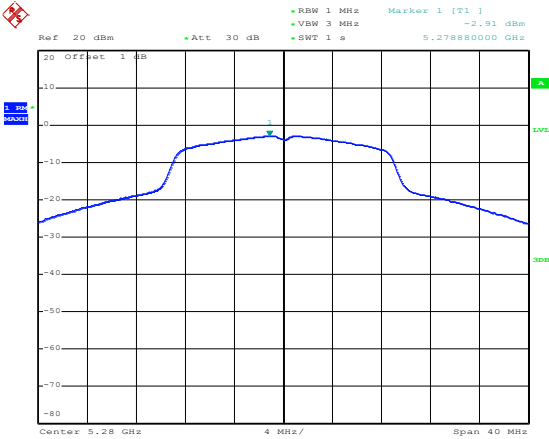
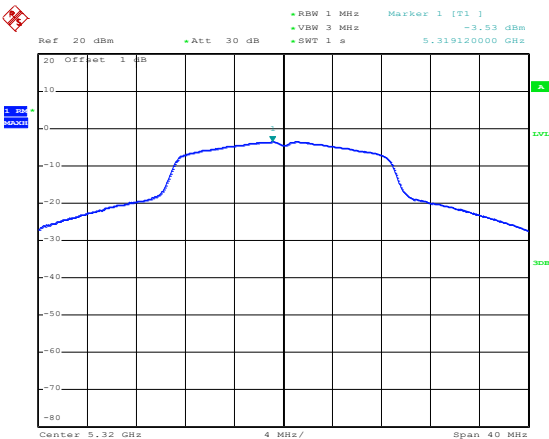
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -2.71 dBm VBW 3 MHz 5.258880000 GHz SWT 1 s Center 5.26 GHz 4 MHz/ Span 40 MHz Date: 9.SEP.2023 13:43:31
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -2.91 dBm VBW 3 MHz 5.278880000 GHz SWT 1 s Center 5.28 GHz 4 MHz/ Span 40 MHz Date: 9.SEP.2023 13:43:54
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 1 MHz Marker 1 [T1] -3.53 dBm VBW 3 MHz 5.319120000 GHz SWT 1 s Center 5.32 GHz 4 MHz/ Span 40 MHz Date: 9.SEP.2023 13:48:47

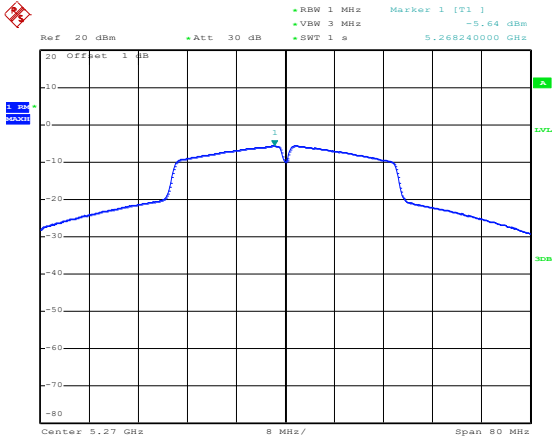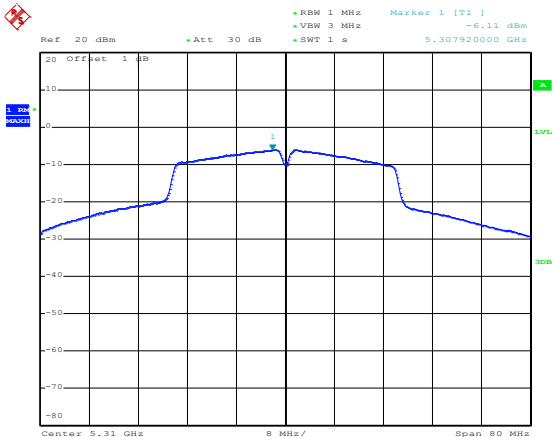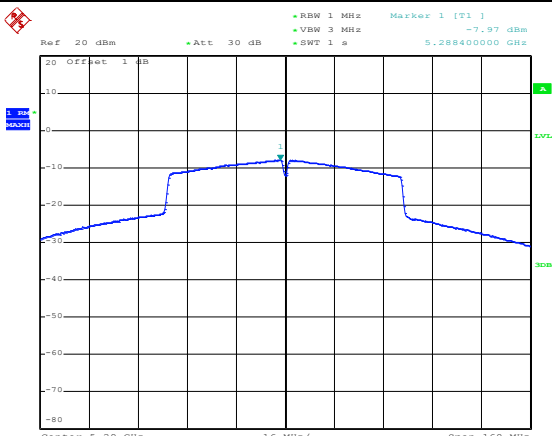802.11n-HT40-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -5.64 dBm, 5.268240000 GHz Center: 5.27 GHz, Span: 80 MHz Date: 9.SEP.2023 13:44:28
802.11n-HT40-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -6.11 dBm, 5.307920000 GHz Center: 5.31 GHz, Span: 80 MHz Date: 9.SEP.2023 13:45:24
802.11ac-VHT80-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -7.97 dBm, 5.288400000 GHz Center: 5.29 GHz, Span: 160 MHz Date: 9.SEP.2023 15:09:52

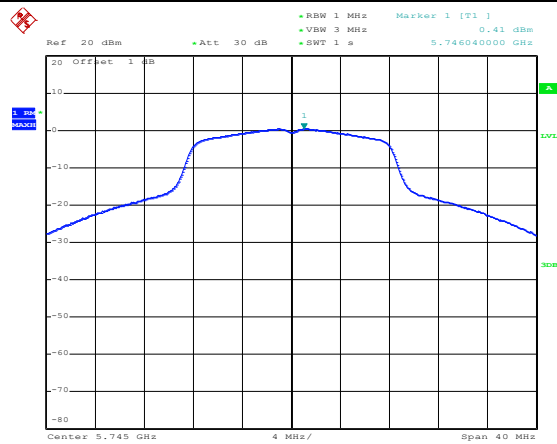

5725-5850MHz






Date: 9.SEP.2023 13:50:12


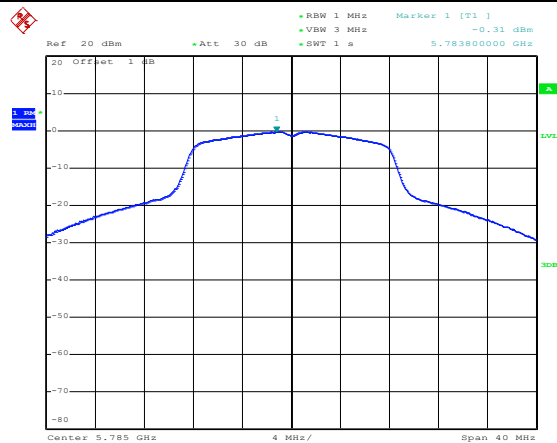



Date: 9.SEP.2023 13:50:39

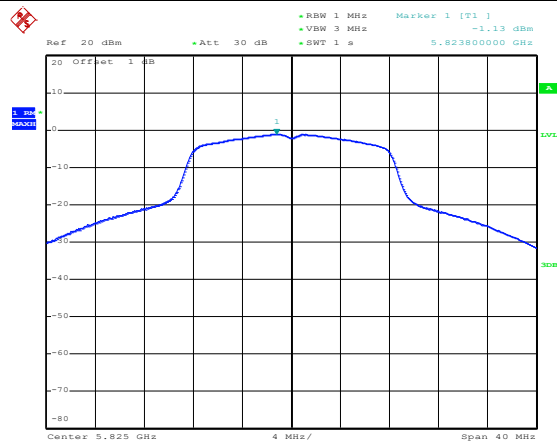

Date: 9.SEP.2023 13:51:17

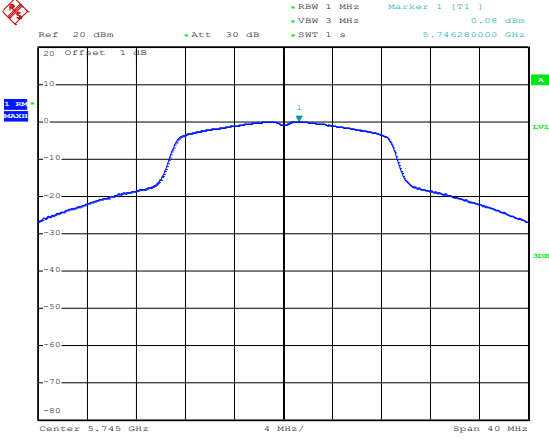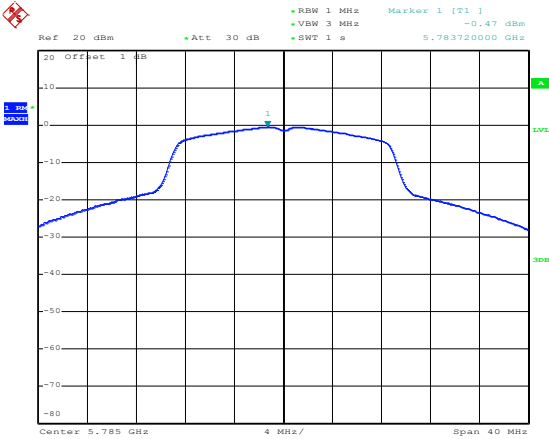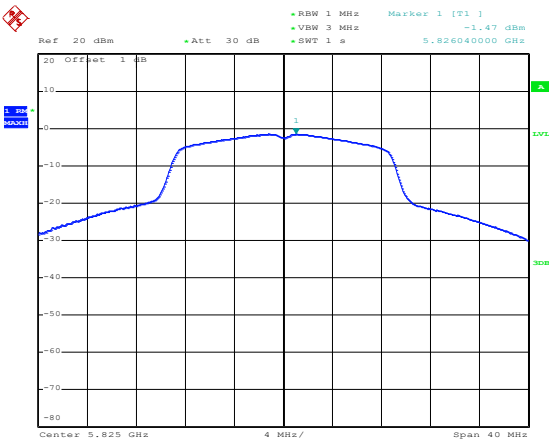802.11n-HT20-Low	 Date: 9.SEP.2023 13:52:19
802.11n-HT20-Middle	 Date: 9.SEP.2023 13:52:42
802.11n-HT20-High	 Date: 9.SEP.2023 13:53:14

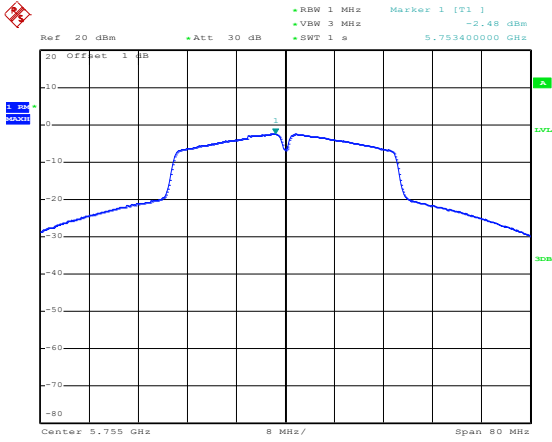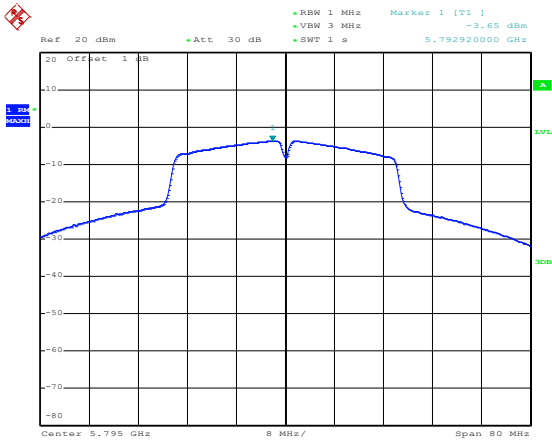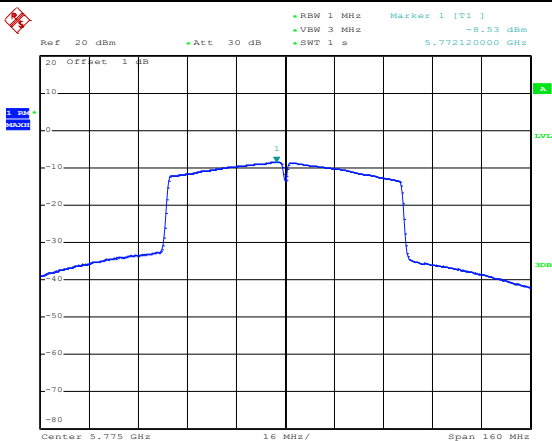802.11n-HT40-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -2.48 dBm, 5.753400000 GHz Center: 5.755 GHz, Span: 80 MHz Date: 9.SEP.2023 13:53:41
802.11n-HT40-High	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -3.65 dBm, 5.792920000 GHz Center: 5.795 GHz, Span: 80 MHz Date: 9.SEP.2023 13:54:05
802.11ac-VHT80-Low	 Ref: 20 dBm, Att: 30 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 1 s, Marker 1 [T1]: -8.53 dBm, 5.772120000 GHz Center: 5.775 GHz, Span: 160 MHz Date: 9.SEP.2023 15:00:42

APPENDIX B




Emission Bandwidth and Occupied Bandwidth




U-NII-1:5150-5250MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5180	20.40	17.00	Pass
	5200	20.40	17.00	Pass
	5240	20.50	17.00	Pass
802.11n-HT20	5180	20.80	18.00	Pass
	5200	20.60	18.00	Pass
	5240	20.60	17.90	Pass
802.11n-HT40	5190	41.80	37.00	Pass
	5230	42.00	37.00	Pass
802.11ac-VHT80	5210	81.60	75.60	Pass




U-NII-2A: 5250-5350MHz				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5260	20.60	17.10	Pass
	5280	20.30	17.10	Pass
	5320	20.50	17.10	Pass
802.11n-HT20	5260	20.90	17.90	Pass
	5280	20.70	18.00	Pass
	5320	20.70	18.00	Pass
802.11n-HT40	5270	42.20	37.00	Pass
	5310	41.80	37.00	Pass
802.11ac-VHT80	5290	81.60	75.60	Pass

U-NII-3: 5725-5850MHz				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit MHz
802.11a	5745	16.60	17.00	≥500
	5785	16.60	17.00	≥500
	5825	16.60	16.90	≥500
802.11n-HT20	5745	17.80	18.00	≥500
	5785	17.80	18.00	≥500
	5825	17.80	18.00	≥500
802.11n-HT40	5755	36.80	36.80	≥500
	5795	36.60	37.00	≥500
802.11ac VHT80	5775	77.60	75.60	≥500

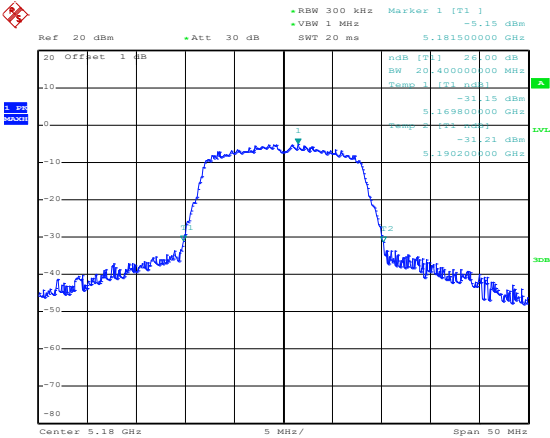
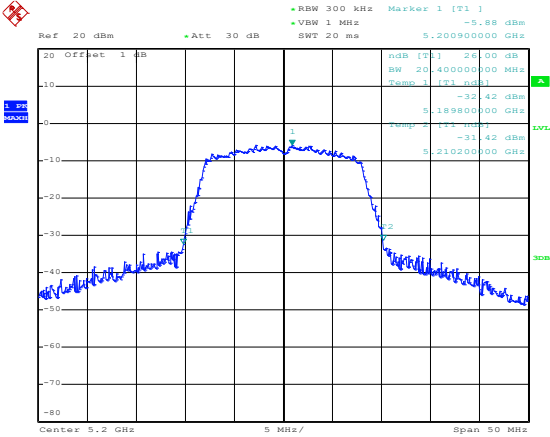
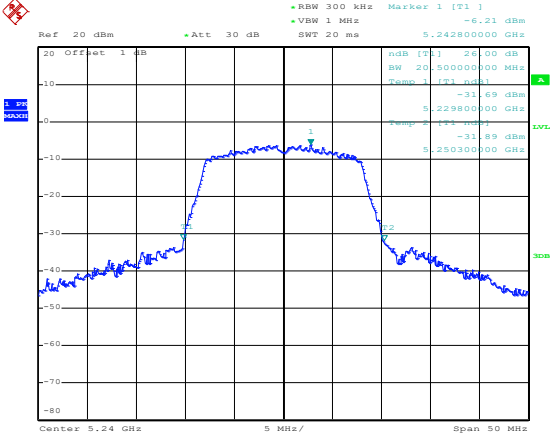
26dB Bandwidth MHz
5150-5250MHz




802.11a-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -5.15 dBm •VBW 1 MHz SWT 20 ms 5.181500000 GHz 20 Offset 1 dB ndB [T1] -26.00 dBm BW 20.400000000 MHz Temp 1 [T1] ndBm -31.15 dBm 5.169800000 GHz Temp 2 [T2] ndBm -31.21 dBm 5.190200000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:00:30
802.11a-Middle	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -5.88 dBm •VBW 1 MHz SWT 20 ms 5.200900000 GHz 20 Offset 1 dB ndB [T1] -26.00 dBm BW 20.400000000 MHz Temp 1 [T1] ndBm -32.42 dBm 5.189800000 GHz Temp 2 [T2] ndBm -31.42 dBm 5.210200000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:01:08
802.11a-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -6.21 dBm •VBW 1 MHz SWT 20 ms 5.242800000 GHz 20 Offset 1 dB ndB [T1] -26.00 dBm BW 20.500000000 MHz Temp 1 [T1] ndBm -31.69 dBm 5.229800000 GHz Temp 2 [T2] ndBm -31.89 dBm 5.250300000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:02:12

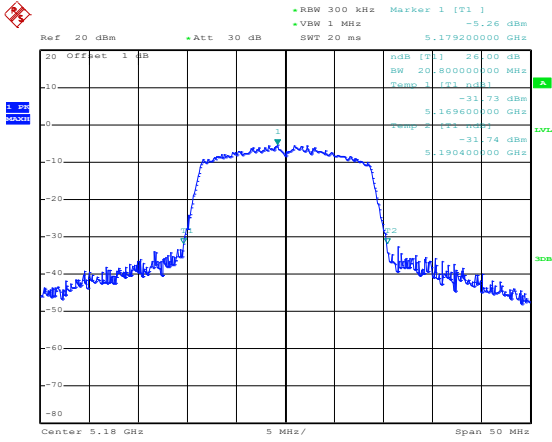
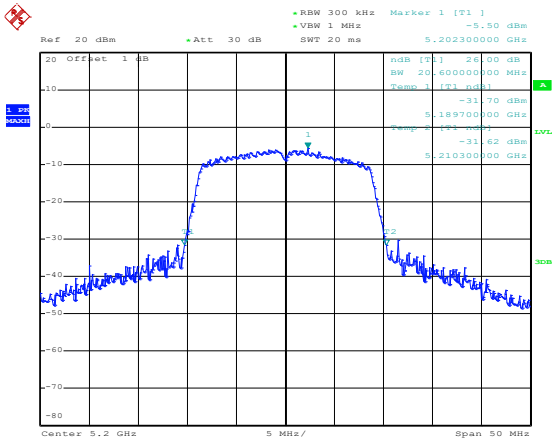
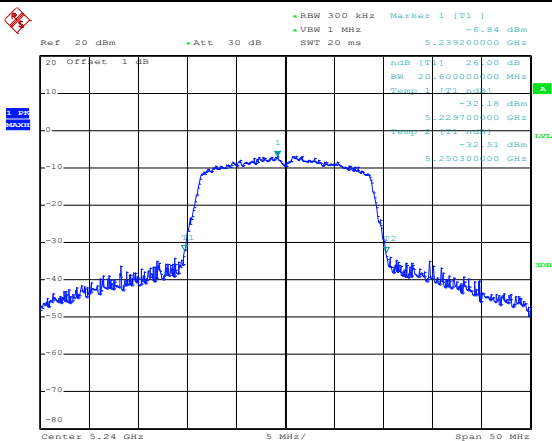
802.11n-HT20-Low	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -5.26 dBm •VSW 1 MHz SWT 20 ms 5.179200000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB A BW 20.600000000 MHz LVL Temp 1 [T1] n dB -31.73 dBm 5.169600000 GHz -31.74 dBm 5.190400000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:02:51
802.11n-HT20-Middle	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -5.50 dBm •VSW 1 MHz SWT 20 ms 5.202300000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB A BW 20.600000000 MHz LVL Temp 1 [T1] n dB -31.70 dBm 5.189700000 GHz -31.62 dBm 5.210300000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:05:44
802.11n-HT20-High	 Ref 20 dBm •Att 30 dB •RBW 300 kHz Marker 1 [T1] -6.84 dBm •VSW 1 MHz SWT 20 ms 5.239200000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB A BW 20.600000000 MHz LVL Temp 1 [T1] n dB -32.18 dBm 5.229700000 GHz -32.51 dBm 5.250300000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:06:02

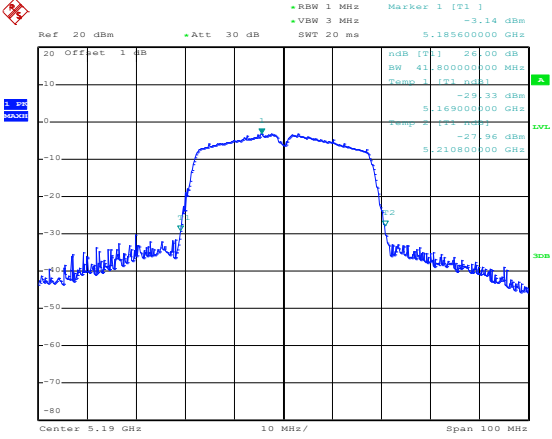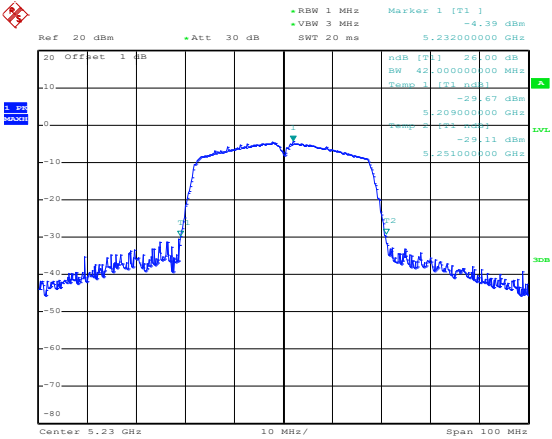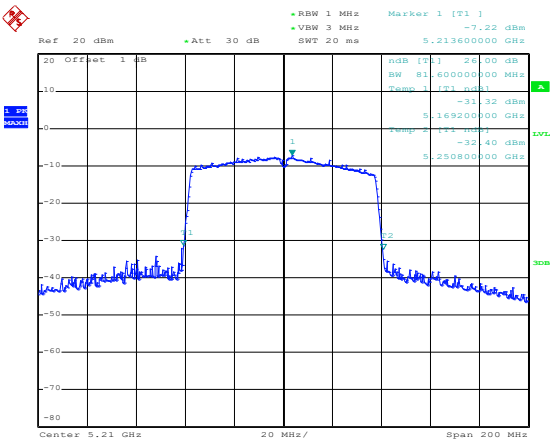802.11n-HT40-Low	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] -3.14 dBm 5.185600000 GHz 20 Offset 1 dB 20 dB [T1] 20.00 dB SW 41.800000000 MHz Temp 1 [T1] 0.00 dB 5.169000000 GHz -29.33 dBm 5.210800000 GHz -27.96 dBm 5.210800000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:06:41
802.11n-HT40-High	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] -4.39 dBm 5.232000000 GHz 20 Offset 1 dB 20 dB [T1] 20.00 dB SW 42.000000000 MHz Temp 1 [T1] 0.00 dB 5.209000000 GHz -29.67 dBm 5.251000000 GHz -29.11 dBm 5.251000000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:07:09
802.11ac-VHT80-Low	 Ref 20 dBm Att 30 dB SWT 20 ms Marker 1 [T1] -7.22 dBm 5.213600000 GHz 20 Offset 1 dB 20 dB [T1] 20.00 dB SW 81.600000000 MHz Temp 1 [T1] 0.00 dB 5.169200000 GHz -31.32 dBm 5.250800000 GHz -32.40 dBm 5.250800000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 9.SEP.2023 15:07:09

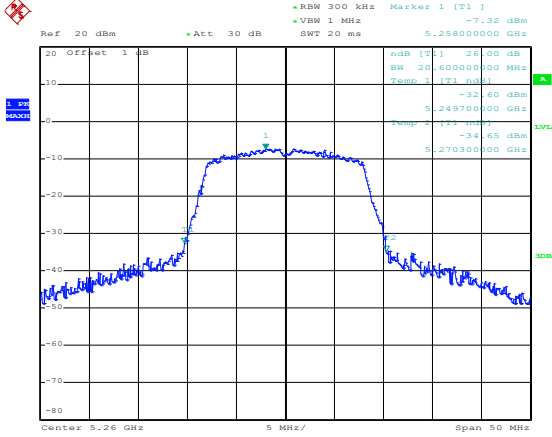
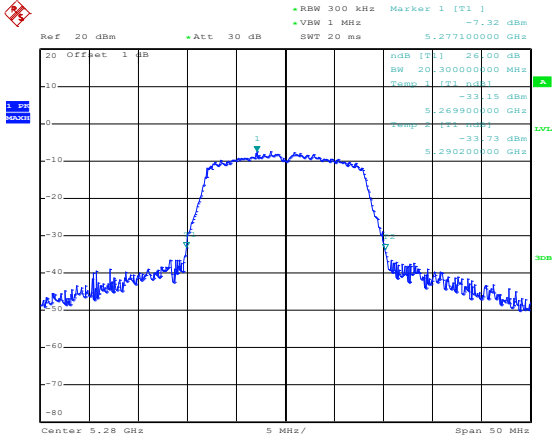
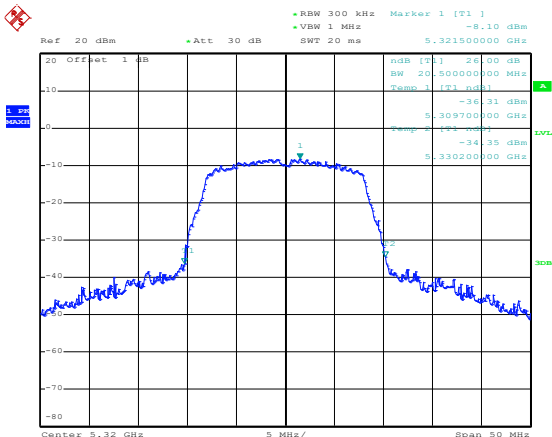
5250-5350MHz




802.11a-Low	 Date: 9.SEP.2023 14:28:23
802.11a-Middle	 Date: 9.SEP.2023 14:28:44
802.11a-High	 Date: 9.SEP.2023 14:29:24

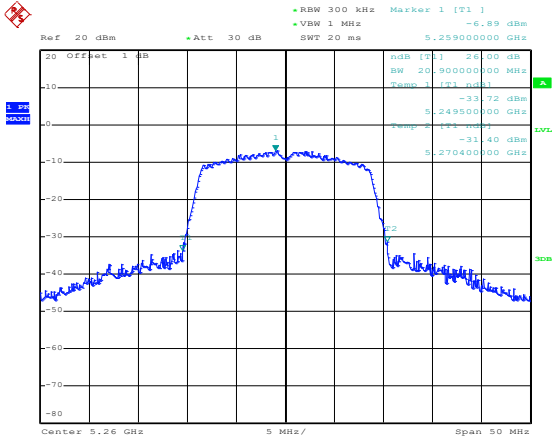
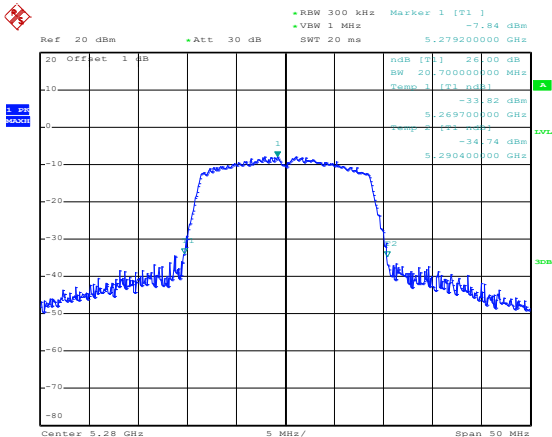
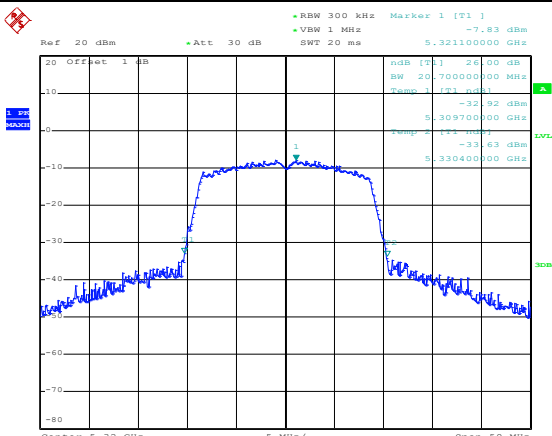
802.11n-HT20-Low	 Ref 20 dBm • Att 30 dB • RBW 300 kHz Marker 1 [T1] -6.89 dBm • VSW 1 MHz SWT 20 ms 5.259000000 GHz 20 Offset 1 dB n dB [T1] -33.72 dBm A BW 20.900000000 MHz LVL Temp 1 [T1] n dB -31.40 dBm 5.249500000 GHz 30B 5.270400000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:30:15
802.11n-HT20-Middle	 Ref 20 dBm • Att 30 dB • RBW 300 kHz Marker 1 [T1] -7.84 dBm • VSW 1 MHz SWT 20 ms 5.279200000 GHz 20 Offset 1 dB n dB [T1] -33.82 dBm A BW 20.700000000 MHz LVL Temp 1 [T1] n dB -34.74 dBm 5.269700000 GHz 30B 5.290400000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:30:35
802.11n-HT20-High	 Ref 20 dBm • Att 30 dB • RBW 300 kHz Marker 1 [T1] -7.83 dBm • VSW 1 MHz SWT 20 ms 5.321100000 GHz 20 Offset 1 dB n dB [T1] -33.92 dBm A BW 20.700000000 MHz LVL Temp 1 [T1] n dB -33.63 dBm 5.309700000 GHz 30B 5.330400000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:30:58

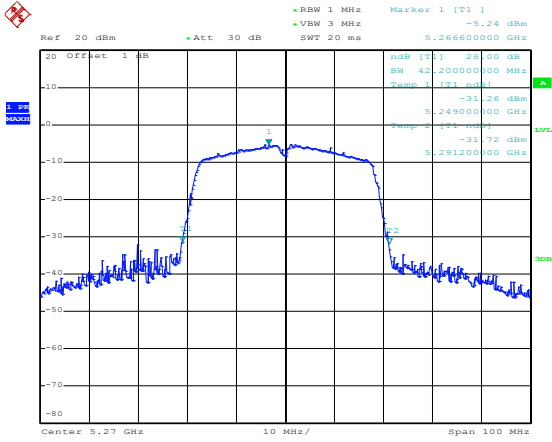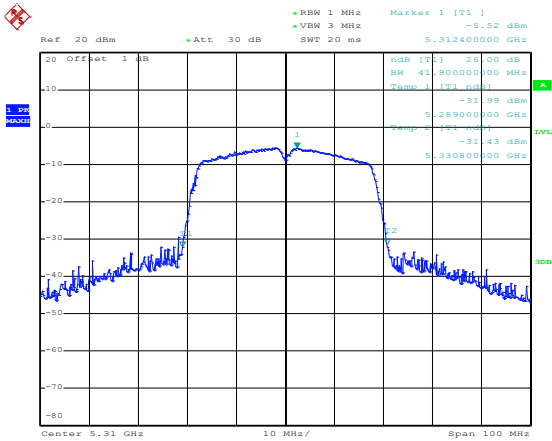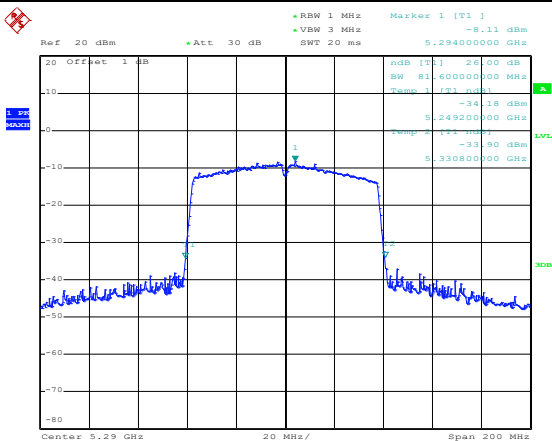802.11n-HT40-Low	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -5.24 dBm •VSW 3 MHz SWT 20 ms 5.26600000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB A BW 40.00000000 MHz Temp 1 [T1] n dB -31.26 dBm 5.24900000 GHz 5.24900000 GHz -31.72 dBm 5.29100000 GHz 30B Center 5.27 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:31:44
802.11n-HT40-High	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -5.52 dBm •VSW 3 MHz SWT 20 ms 5.31240000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB A BW 41.60000000 MHz Temp 1 [T1] n dB -31.99 dBm 5.28900000 GHz 5.28900000 GHz -31.43 dBm 5.33080000 GHz 30B Center 5.31 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:32:29
802.11ac-VHT80-Low	 Ref 20 dBm •Att 30 dB •RBW 1 MHz Marker 1 [T1] -8.11 dBm •VSW 3 MHz SWT 20 ms 5.29400000 GHz 20 Offset 1 dB n dB [T1] 26.00 dB A BW 81.60000000 MHz Temp 1 [T1] n dB -34.18 dBm 5.24920000 GHz 5.24920000 GHz -33.90 dBm 5.33080000 GHz 30B Center 5.29 GHz 20 MHz/ Span 200 MHz Date: 9.SEP.2023 15:08:18

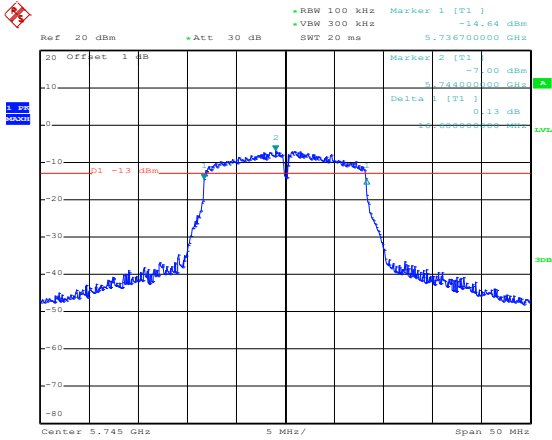
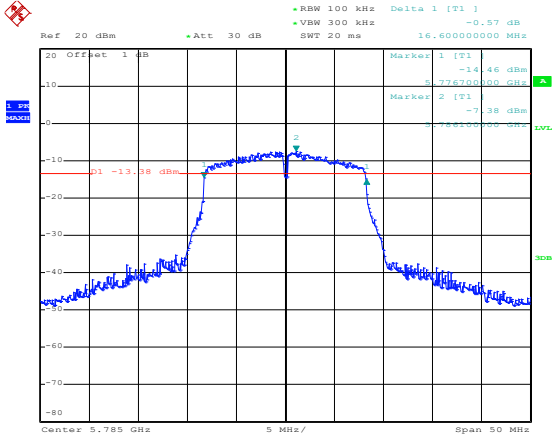
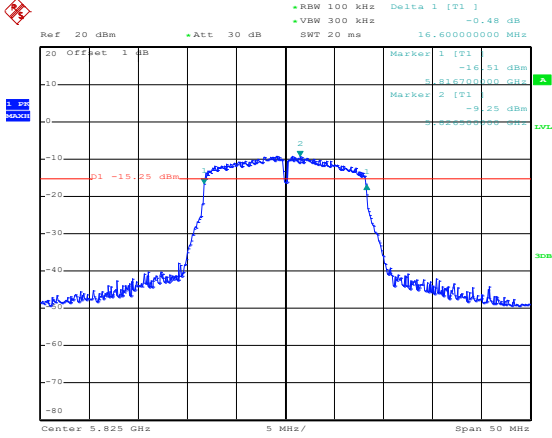
6dB Bandwidth MHz
5725-5850MHz




802.11a-Low	 Date: 9.SEP.2023 14:39:39
802.11a-Middle	 Date: 9.SEP.2023 14:41:02
802.11a-High	 Date: 9.SEP.2023 14:42:04

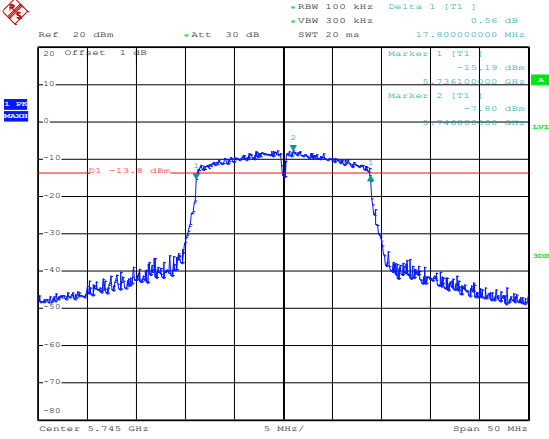
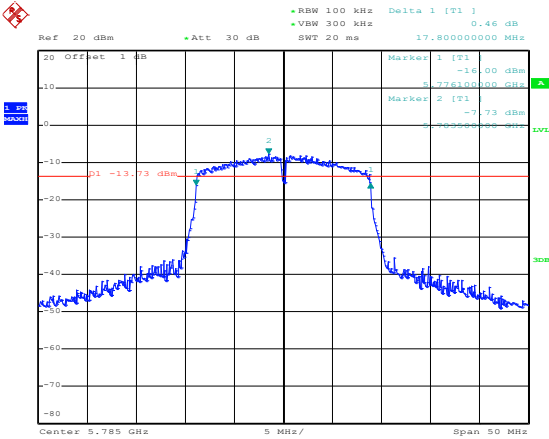
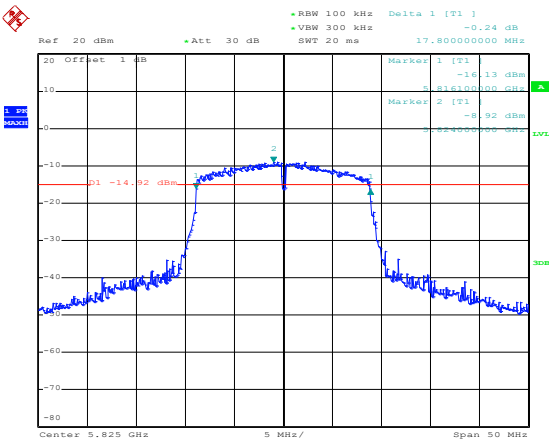
802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.56 dB SWT 20 ms 17.800000000 MHz Marker 1 [T1] -13.19 dBm 5.736100000 GHz Marker 2 [T1] -7.80 dBm 5.746000000 GHz Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:46:49
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] 0.46 dB SWT 20 ms 17.800000000 MHz Marker 1 [T1] -16.00 dBm 5.776100000 GHz Marker 2 [T1] -7.73 dBm 5.786000000 GHz Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:47:33
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 100 kHz VSW 300 kHz Delta 1 [T1] -0.24 dB SWT 20 ms 17.800000000 MHz Marker 1 [T1] -16.13 dBm 5.816100000 GHz Marker 2 [T1] -6.92 dBm 5.826000000 GHz Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:48:07

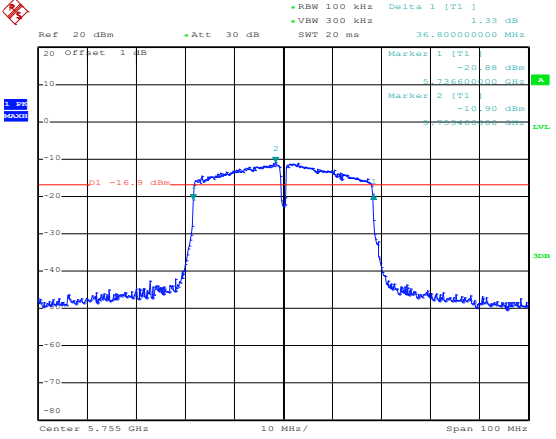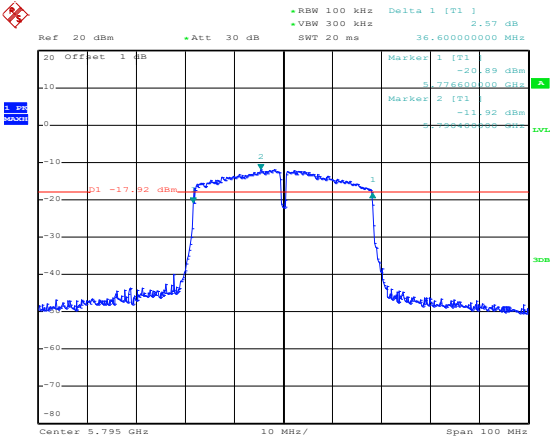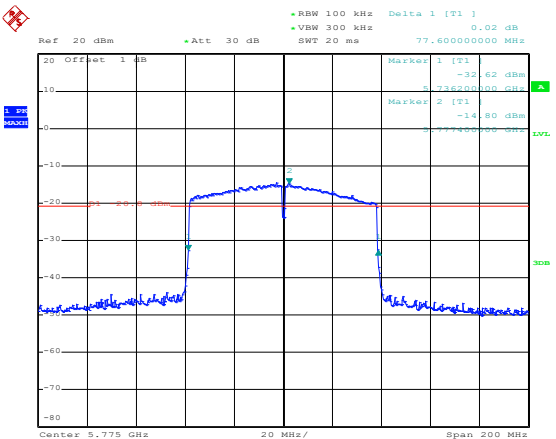802.11n-HT40-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz Delta 1 [T1] 1.33 dB VSW 300 kHz SWT 20 ms 36.800000000 MHz Marker 1 [T1] -20.88 dBm 5.755000000 GHz Marker 2 [T1] -10.90 dBm 5.755000000 GHz D1 -16.9 dBm Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:49:05
802.11n-HT40-High	 Ref 20 dBm Att 30 dB RBW 100 kHz Delta 1 [T1] 2.57 dB VSW 300 kHz SWT 20 ms 36.600000000 MHz Marker 1 [T1] -20.89 dBm 5.776000000 GHz Marker 2 [T1] -11.92 dBm 5.776000000 GHz D1 -17.92 dBm Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:49:44
802.11ac-VHT80-Low	 Ref 20 dBm Att 30 dB RBW 100 kHz Delta 1 [T1] 0.02 dB VSW 300 kHz SWT 20 ms 77.600000000 MHz Marker 1 [T1] -32.62 dBm 5.736200000 GHz Marker 2 [T1] -14.80 dBm 5.736200000 GHz D1 -14.80 dBm Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 9.SEP.2023 14:51:32

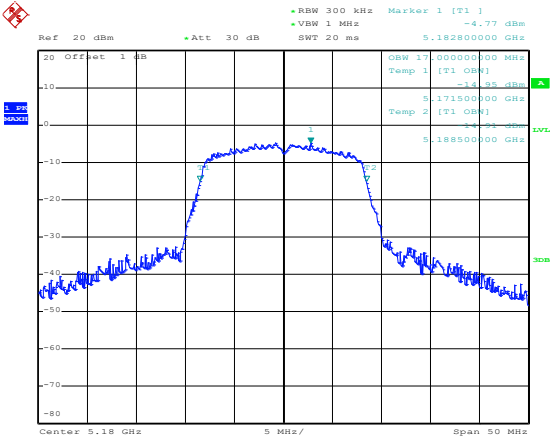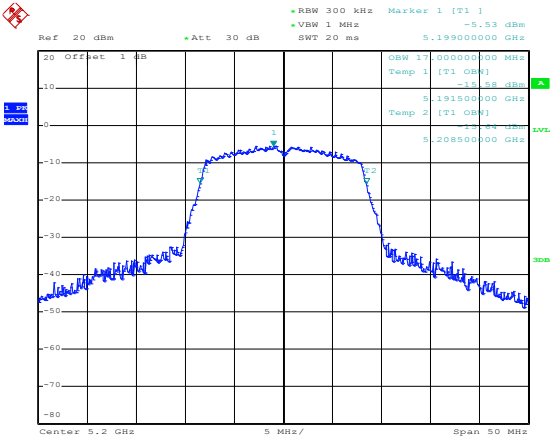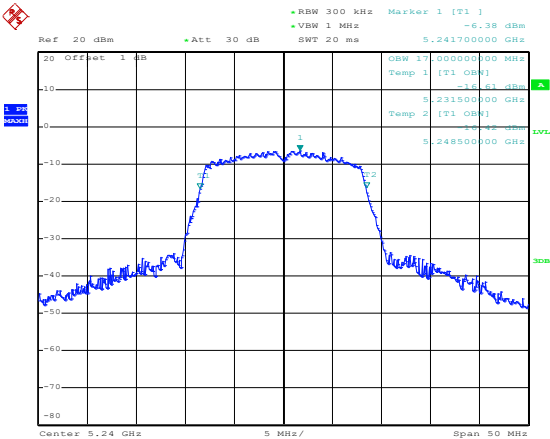99% Bandwidth MHz
5150-5250MHz




802.11a-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] -4.77 dBm VSW 1 MHz SWT 20 ms 5.182800000 GHz Offset 1 dB OSW 17.000000000 MHz Temp 1 [T1] OSW] -14.35 dBm 5.171500000 GHz Temp 2 [T1] OSW] -14.35 dBm 5.188500000 GHz Center 5.18 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:11:53
802.11a-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] -5.53 dBm VSW 1 MHz SWT 20 ms 5.199000000 GHz Offset 1 dB OSW 17.000000000 MHz Temp 1 [T1] OSW] -13.58 dBm 5.191500000 GHz Temp 2 [T1] OSW] -13.58 dBm 5.208500000 GHz Center 5.2 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:12:12
802.11a-High	 Ref 20 dBm Att 30 dB RBW 300 kHz Marker 1 [T1] -6.38 dBm VSW 1 MHz SWT 20 ms 5.241700000 GHz Offset 1 dB OSW 17.000000000 MHz Temp 1 [T1] OSW] -15.61 dBm 5.231500000 GHz Temp 2 [T1] OSW] -15.61 dBm 5.248500000 GHz Center 5.24 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:12:43

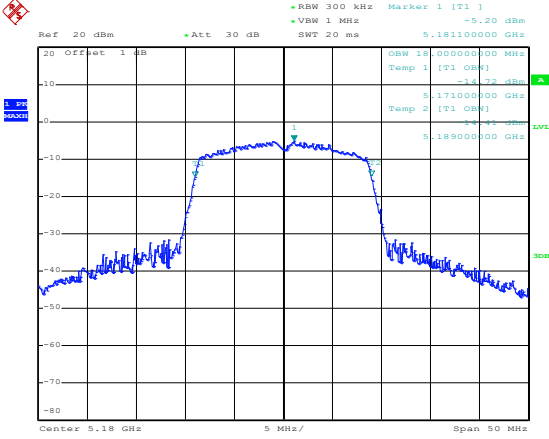
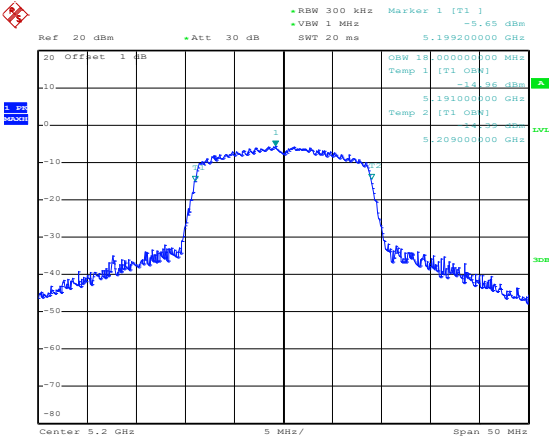
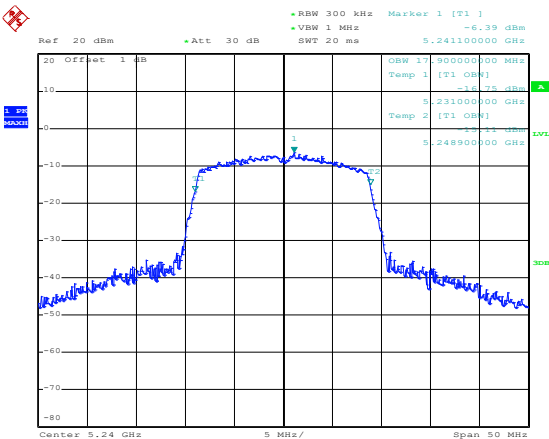
802.11n-HT20-Low	 Date: 9.SEP.2023 14:13:12
802.11n-HT20-Middle	 Date: 9.SEP.2023 14:13:35
802.11n-HT20-High	 Date: 9.SEP.2023 14:13:58

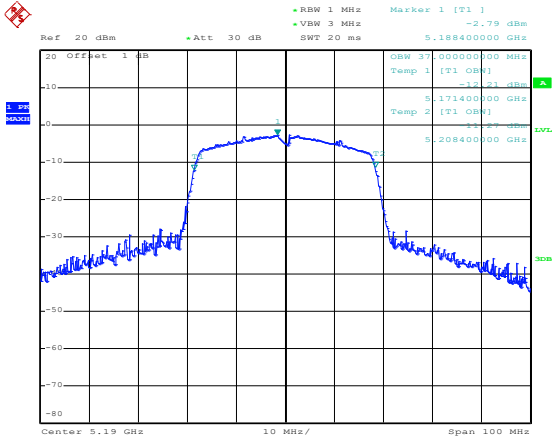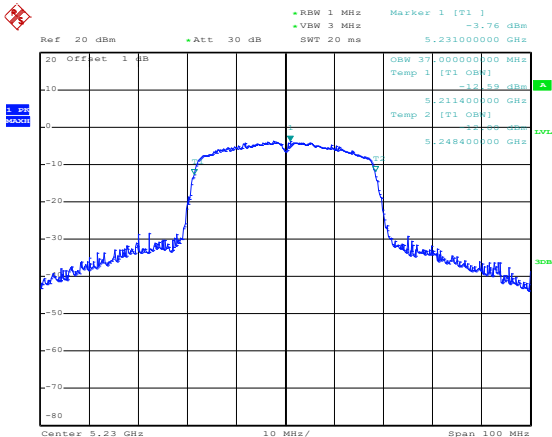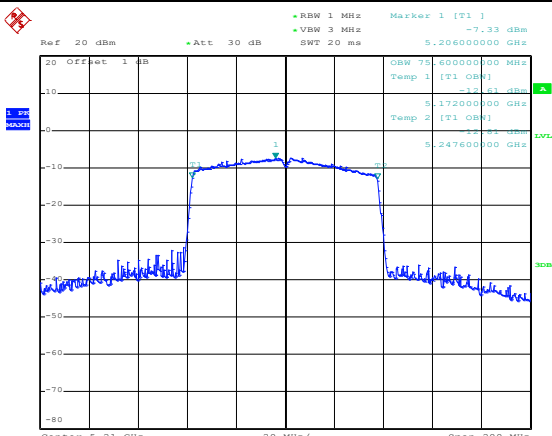802.11n-HT40-Low	 Ref 20 dBm • Att 30 dB • RBW 1 MHz • VSW 3 MHz • SWT 20 ms • Marker 1 [T1] -2.79 dBm 5.188400000 GHz 20 Offset 1 dB OSW 37.00000000 MHz Temp 1 [T1 OSW] -12.21 dBm 5.171400000 GHz Temp 2 [T1 OSW] -12.22 dBm 5.208400000 GHz Center 5.19 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:14:52
802.11n-HT40-High	 Ref 20 dBm • Att 30 dB • RBW 1 MHz • VSW 3 MHz • SWT 20 ms • Marker 1 [T1] -3.76 dBm 5.231000000 GHz 20 Offset 1 dB OSW 37.00000000 MHz Temp 1 [T1 OSW] -12.69 dBm 5.211400000 GHz Temp 2 [T1 OSW] -12.68 dBm 5.248400000 GHz Center 5.23 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:15:36
802.11ac-VHT80-Low	 Ref 20 dBm • Att 30 dB • RBW 1 MHz • VSW 3 MHz • SWT 20 ms • Marker 1 [T1] -7.33 dBm 5.206000000 GHz 20 Offset 1 dB OSW 75.60000000 MHz Temp 1 [T1 OSW] -12.61 dBm 5.172000000 GHz Temp 2 [T1 OSW] -12.62 dBm 5.247600000 GHz Center 5.21 GHz 20 MHz/ Span 200 MHz Date: 9.SEP.2023 15:06:41



5250-5350MHz

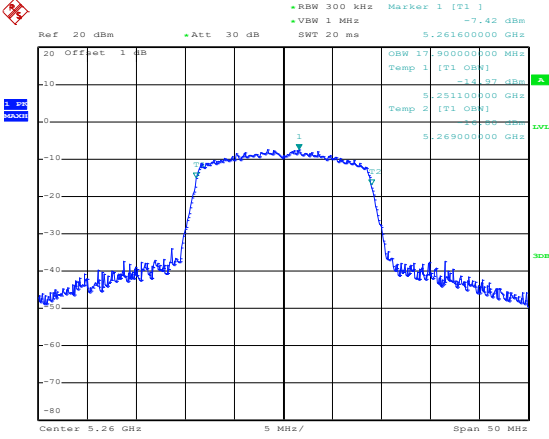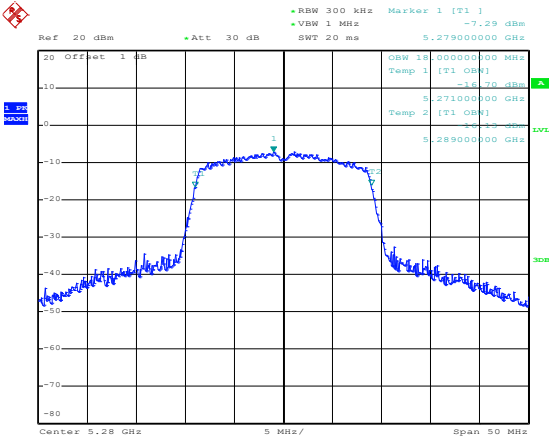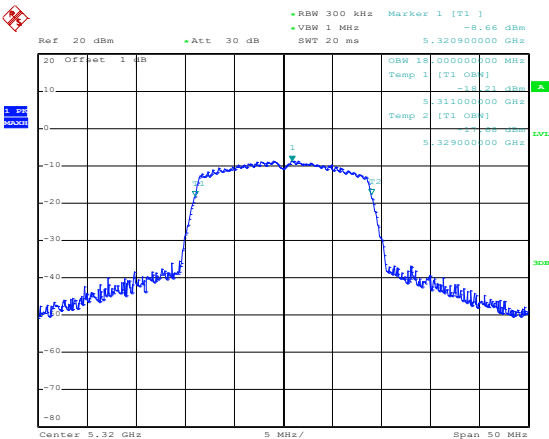[illegible]



802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] -7.42 dBm 5.261600000 GHz OSW 17.900000000 MHz Temp 1 [T1] -14.87 dBm 5.251100000 GHz Temp 2 [T1] -14.88 dBm 5.269000000 GHz Center 5.26 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:22:18
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] -7.29 dBm 5.279000000 GHz OSW 18.000000000 MHz Temp 1 [T1] -14.70 dBm 5.271000000 GHz Temp 2 [T1] -14.88 dBm 5.289000000 GHz Center 5.28 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:22:53
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] -8.66 dBm 5.320900000 GHz OSW 18.000000000 MHz Temp 1 [T1] -14.81 dBm 5.311000000 GHz Temp 2 [T1] -14.88 dBm 5.329000000 GHz Center 5.32 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:23:31

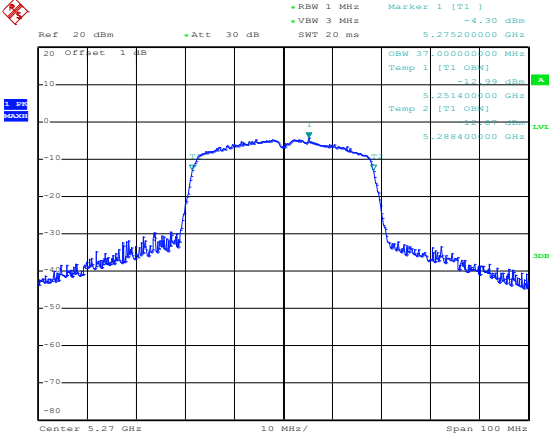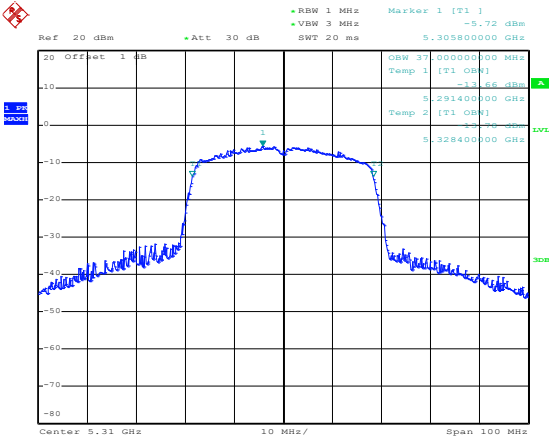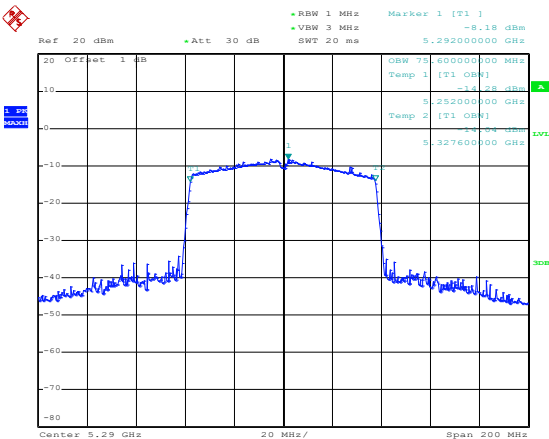802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] -4.30 dBm 5.275200000 GHz OSW 37.00000000 MHz Temp 1 [T1] -12.88 dBm 5.251400000 GHz Temp 2 [T1] -12.88 dBm 5.288400000 GHz Center 5.27 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:24:30
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] -5.72 dBm 5.305800000 GHz OSW 37.00000000 MHz Temp 1 [T1] -13.66 dBm 5.291400000 GHz Temp 2 [T1] -13.66 dBm 5.328400000 GHz Center 5.31 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:25:49
802.11ac-VHT80-Low	 Ref 20 dBm +Att 30 dB SWT 20 ms Marker 1 [T1] -8.18 dBm 5.292000000 GHz OSW 75.60000000 MHz Temp 1 [T1] -13.88 dBm 5.252000000 GHz Temp 2 [T1] -13.88 dBm 5.327600000 GHz Center 5.29 GHz 20 MHz/ Span 200 MHz Date: 9.SEP.2023 15:08:56

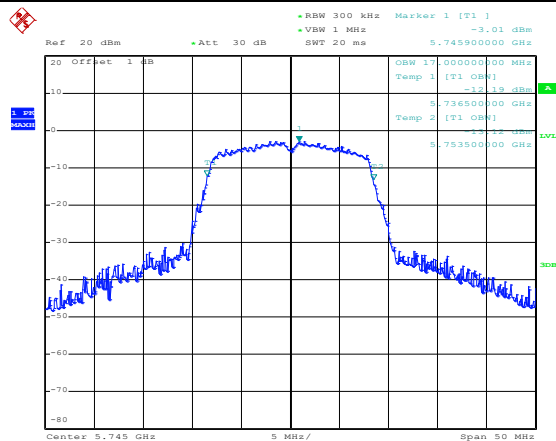

5725-5850MHz






Date: 9.SEP.2023 14:54:04


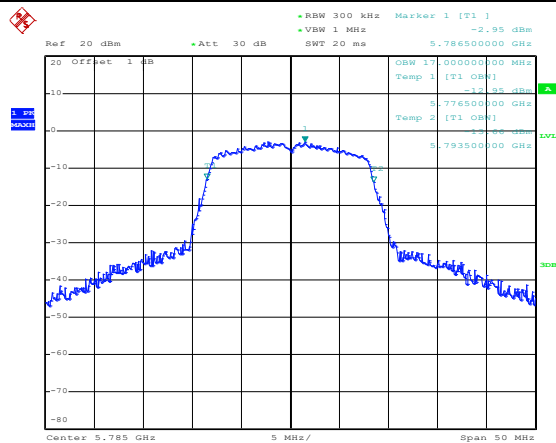



Date: 9.SEP.2023 14:54:32

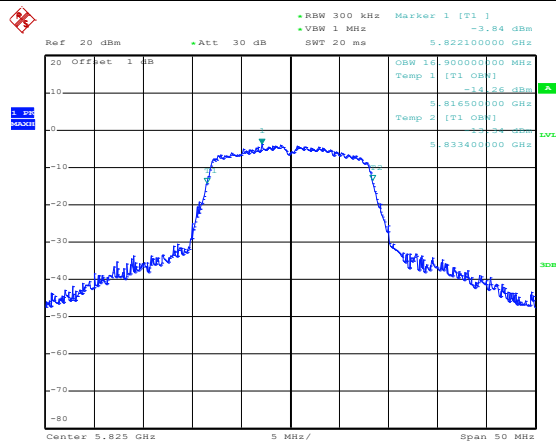

Date: 9.SEP.2023 14:54:56

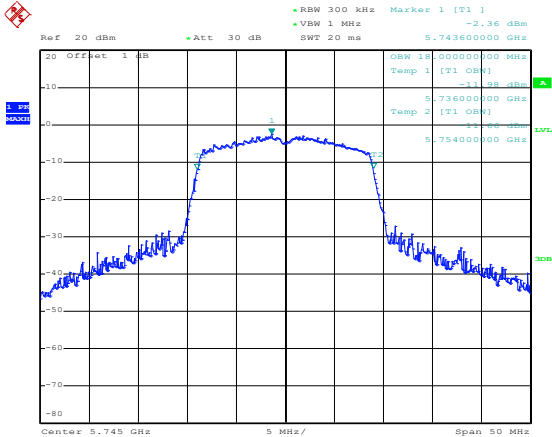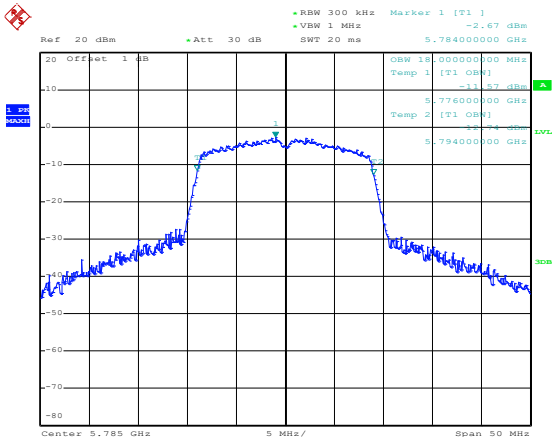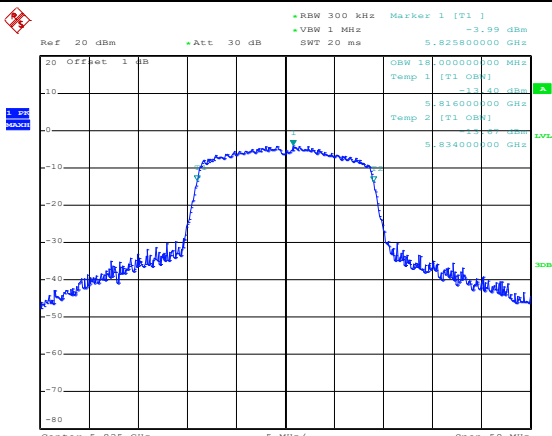802.11n-HT20-Low	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] -2.36 dBm 5.743600000 GHz 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.745 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:55:17
802.11n-HT20-Middle	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] -2.67 dBm 5.784000000 GHz 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.785 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:55:43
802.11n-HT20-High	 Ref 20 dBm Att 30 dB RBW 300 kHz VSW 1 MHz Marker 1 [T1] -3.99 dBm 5.825800000 GHz 20 Offset 1 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80 Center 5.825 GHz 5 MHz/ Span 50 MHz Date: 9.SEP.2023 14:56:09

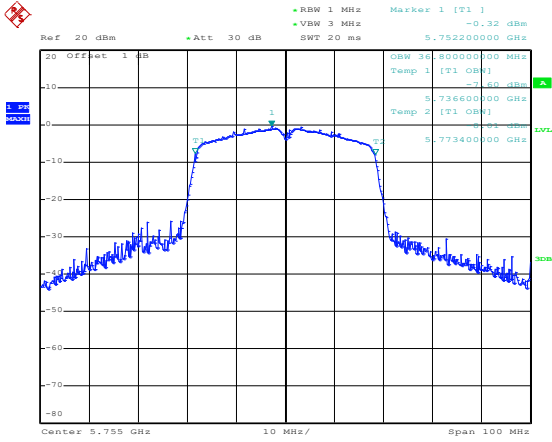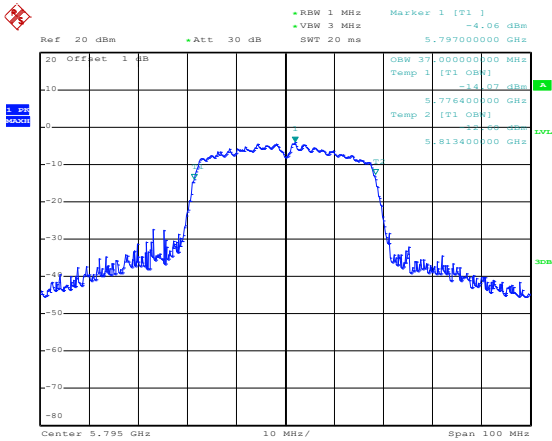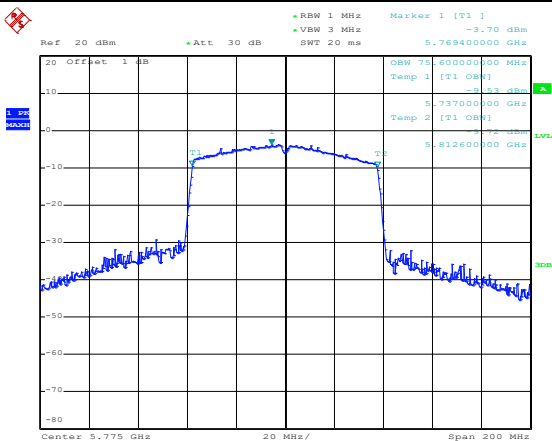802.11n-HT40-Low	 Ref 20 dBm +Att 30 dB Offset 1 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] -4.32 dBm Obs 30.00000000 MHz Temp 1 [T1 Obs] -13.60 dBm 5.736600000 GHz Temp 2 [T1 Obs] -13.62 dBm 5.773400000 GHz Center 5.755 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:56:39
802.11n-HT40-High	 Ref 20 dBm +Att 30 dB Offset 1 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] -4.06 dBm Obs 37.00000000 MHz Temp 1 [T1 Obs] -13.67 dBm 5.776400000 GHz Temp 2 [T1 Obs] -13.68 dBm 5.813400000 GHz Center 5.795 GHz 10 MHz/ Span 100 MHz Date: 9.SEP.2023 14:57:02
802.11ac-VHT80-Low	 Ref 20 dBm +Att 30 dB Offset 1 dB RBW 1 MHz VSW 3 MHz SWT 20 ms Marker 1 [T1] -3.70 dBm Obs 75.00000000 MHz Temp 1 [T1 Obs] -13.53 dBm 5.737000000 GHz Temp 2 [T1 Obs] -13.54 dBm 5.812600000 GHz Center 5.775 GHz 20 MHz/ Span 200 MHz Date: 9.SEP.2023 14:53:13

APPENDIX C




Maximum Conducted Output Power




U-NII-1:5150-5250MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5180	10.52	23.98
	5200	10.43	23.98
	5240	10.18	23.98
802.11n-HT20	5180	10.19	23.98
	5200	10.27	23.98
	5240	10.05	23.98
802.11n-HT40	5190	9.86	23.98
	5230	9.83	23.98
802.11ac VHT80	5210	9.68	23.98




U-NII-2A: 5250-5350MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5260	9.84	23.98
	5280	9.89	23.98
	5320	9.32	23.98
802.11n-HT20	5260	8.89	23.98
	5280	8.78	23.98
	5320	8.83	23.98
802.11n-HT40	5270	8.20	23.98
	5310	8.14	23.98
802.11ac VHT80	5290	7.94	23.98

U-NII-3: 5725-5850MHz			
Test mode	Frequency MHz	Output Power dBm	Limit dBm
802.11a	5745	11.28	30.00
	5785	10.34	30.00
	5825	9.55	30.00
802.11n-HT20	5745	11.08	30.00
	5785	10.17	30.00
	5825	9.06	30.00
802.11n-HT40	5755	10.82	30.00
	5795	9.95	30.00
802.11ac VHT80	5775	8.52	30.00

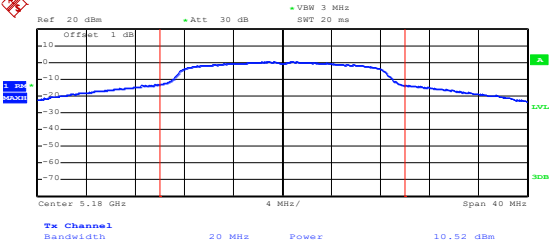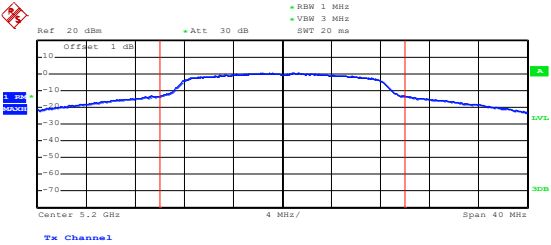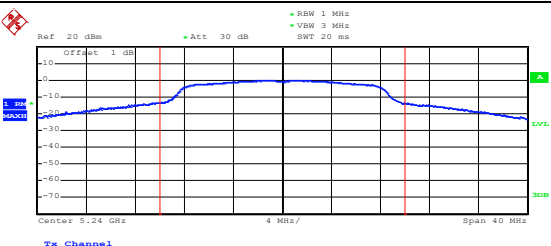5150-5250MHz




802.11a-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.18 GHz Span 40 MHz 4 MHz/ Tx Channel Bandwidth 20 MHz Power 10.52 dBm Date: 9.SEP.2023 11:15:26
802.11a-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.2 GHz Span 40 MHz 4 MHz/ Tx Channel Bandwidth 20 MHz Power 10.43 dBm Date: 9.SEP.2023 11:16:44
802.11a-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center 5.24 GHz Span 40 MHz 4 MHz/ Tx Channel Bandwidth 20 MHz Power 10.18 dBm Date: 9.SEP.2023 11:18:08

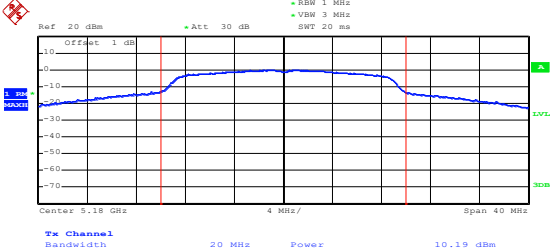
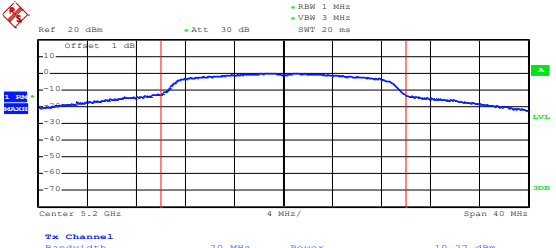
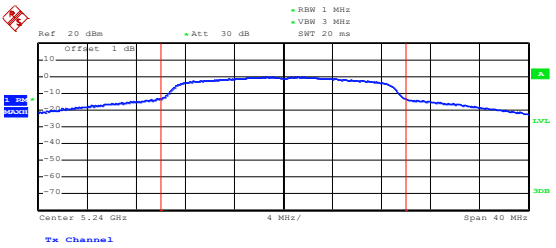
802.11n-HT20-Low	 Date: 9.SEP.2023 11:18:59
802.11n-HT20-Middle	 Date: 9.SEP.2023 11:19:49
802.11n-HT20-High	 Date: 9.SEP.2023 11:20:43

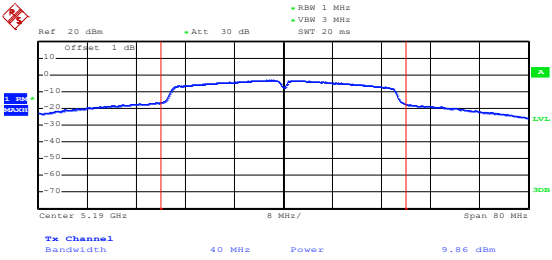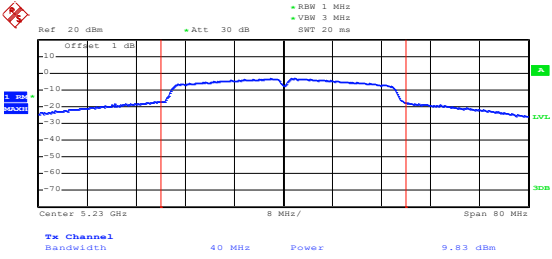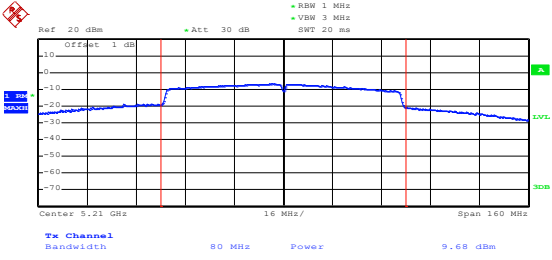802.11n-HT40-Low	 Date: 9.SEP.2023 11:21:56
802.11n-HT40-High	 Date: 9.SEP.2023 11:22:39
802.11ac-VHT80-Low	 Date: 9.SEP.2023 15:04:43



5250-5350MHz

802.11a-Low	Date: 9.SEP.2023 11:26:33
802.11a-Middle	Date: 9.SEP.2023 11:27:27
802.11a-High	Date: 9.SEP.2023 11:28:24

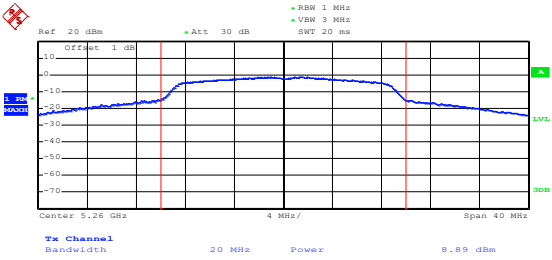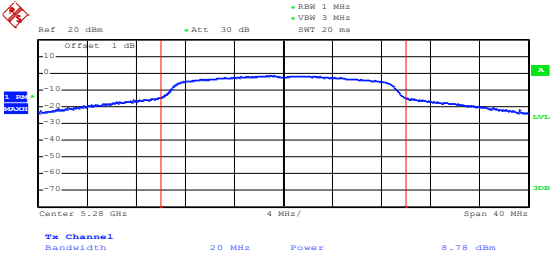
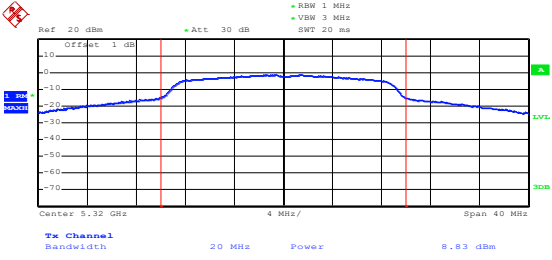
802.11n-HT20-Low	 Date: 9.SEP.2023 11:28:59
802.11n-HT20-Middle	 Date: 9.SEP.2023 11:29:41
802.11n-HT20-High	 Date: 9.SEP.2023 11:30:26

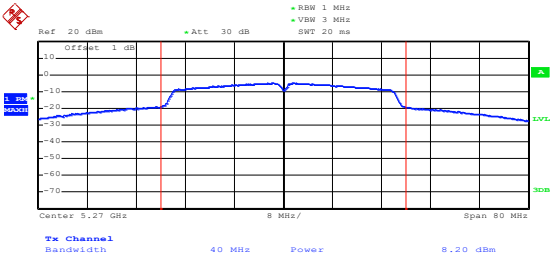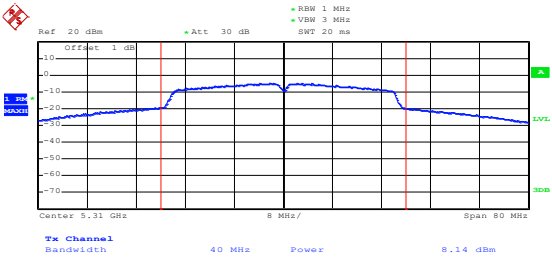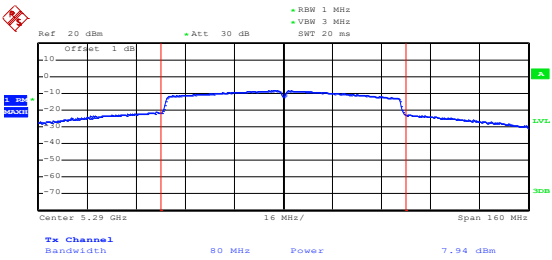802.11n-HT40-Low	 Date: 9.SEP.2023 11:31:27
802.11n-HT40-High	 Date: 9.SEP.2023 11:32:13
802.11ac-VHT80-Low	 Date: 9.SEP.2023 15:03:32

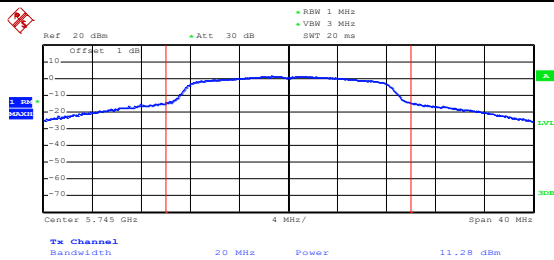

5725-5850MHz






Date: 9.SEP.2023 11:40:17


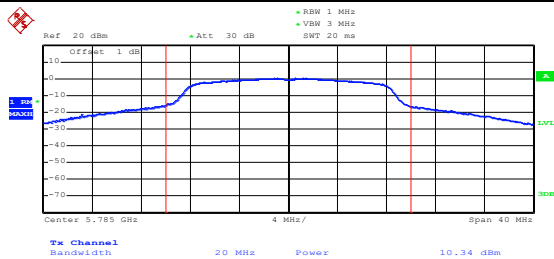



Date: 9.SEP.2023 11:41:12

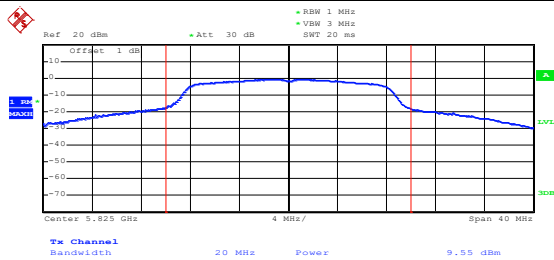

Date: 9.SEP.2023 11:42:40

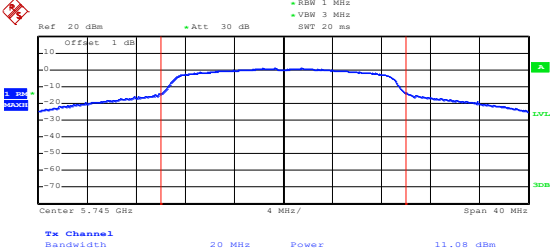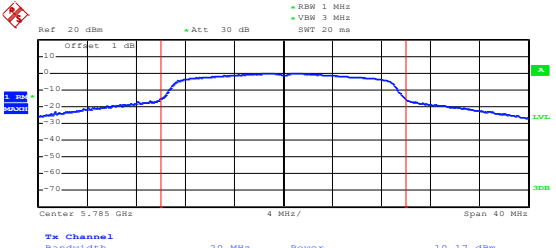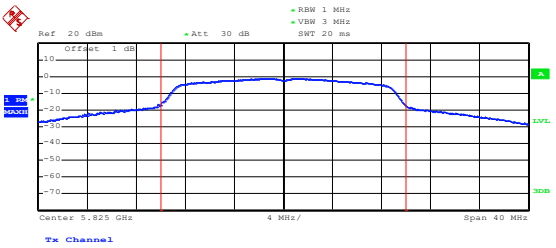802.11n-HT20-Low	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.745 GHz Span: 40 MHz Ts Channel Bandwidth: 20 MHz Power: 11.08 dBm Date: 9.SEP.2023 11:43:10
802.11n-HT20-Middle	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.785 GHz Span: 40 MHz Ts Channel Bandwidth: 20 MHz Power: 10.17 dBm Date: 9.SEP.2023 11:43:45
802.11n-HT20-High	 Ref: 20 dBm Offset: 1 dB Att: 30 dB RBW: 1 MHz VBW: 3 MHz SWT: 20 ms Center: 5.825 GHz Span: 40 MHz Ts Channel Bandwidth: 20 MHz Power: 9.06 dBm Date: 9.SEP.2023 11:44:20

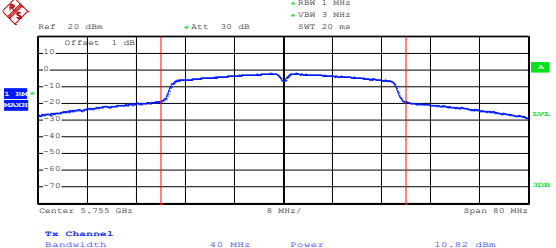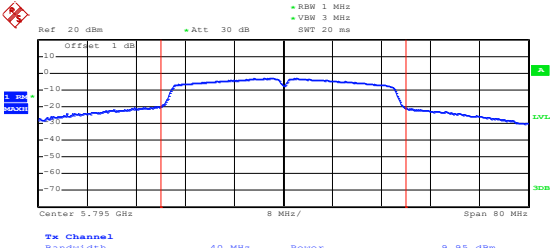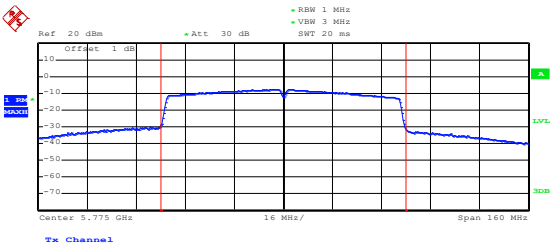802.11n-HT40-Low	 Date: 9.SEP.2023 11:45:00
802.11n-HT40-High	 Date: 9.SEP.2023 11:45:31
802.11ac-VHT80-Low	 Date: 9.SEP.2023 14:59:56

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	553	0.106
100%		-20	528	0.101
100%		-10	525	0.101
100%		0	516	0.099
100%		+10	580	0.112
100%		+20	582	0.112
100%		+30	585	0.113
100%		+40	523	0.100
100%		+50	526	0.101
Low Battery power	3.2	+20	533	0.102
High Battery power	4.4	+20	559	0.108

U-NII-1: 5250-5350MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	542	0.103
100%		-20	532	0.101
100%		-10	529	0.100
100%		0	519	0.098
100%		+10	527	0.100
100%		+20	583	0.110
100%		+30	589	0.112
100%		+40	519	0.098
100%		+50	529	0.100
Low Battery power	3.2	+20	528	0.100
High Battery power	4.4	+20	555	0.105

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	3.8	-30	545	0.094
100%		-20	583	0.101
100%		-10	527	0.091
100%		0	563	0.097
100%		+10	579	0.100
100%		+20	533	0.092
100%		+30	535	0.092
100%		+40	527	0.091
100%		+50	542	0.094
Low Battery power	3.2	+20	529	0.091
High Battery power	4.4	+20	547	0.095

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

***** END OF REPORT *****