

FCC Radio Test Report

FCC ID: 2ABVH-INARI10C1

This report concerns: Original Grant

Project No. : 2006C122A
Equipment : Tablet computer
Brand Name : Aava Mobile
Test Model : INARI10C-WLA-1
Series Model : N/A
Applicant : Aava Mobile Oy
Address : Nahkatehtaankatu 2 FI-90130 Oulu, Finland
Manufacturer : Aava Mobile Oy
Address : Nahkatehtaankatu 2 FI-90130 Oulu, Finland
Factory : Ennoconn (Suzhou) Technology Co.,Ltd
Address : 299 NANSONG RD, YU SHAN TOWN, KUNSHAN JIANGSU, CHINA
JIANGSU, 215300
Date of Receipt : Dec. 16, 2020
Date of Test : Jan. 13, 2021 ~ Mar. 12, 2021
Issued Date : Mar. 30, 2021
Report Version : R00
Test Sample : Engineering Sample No.: DG20210112118 for conducted,
DG20210112117 for radiated.
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Nick Chen

Prepared by : Nick Chen

Ethan Ma

Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4 DUTY CYCLE	13
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.6 SUPPORT UNITS	14
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	15
3.1 LIMIT	15
3.2 TEST PROCEDURE	15
3.3 DEVIATION FROM TEST STANDARD	15
3.4 TEST SETUP	16
3.5 EUT OPERATION CONDITIONS	16
3.6 TEST RESULTS	16
4 . RADIATED EMISSIONS TEST	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	18
4.4 TEST SETUP	19
4.5 EUT OPERATION CONDITIONS	20
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	20
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	20
4.8 TEST RESULTS - ABOVE 1000 MHZ	20
5 . BANDWIDTH TEST	21
5.1 LIMIT	21
5.2 TEST PROCEDURE	21
5.3 DEVIATION FROM STANDARD	21
5.4 TEST SETUP	21

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	21
5.6 TEST RESULTS	21
6 . MAXIMUM OUTPUT POWER TEST	22
6.1 LIMIT	22
6.2 TEST PROCEDURE	22
6.3 DEVIATION FROM STANDARD	22
6.4 TEST SETUP	22
6.5 EUT OPERATION CONDITIONS	22
6.6 TEST RESULTS	22
7 . CONDUCTED SPURIOUS EMISSIONS	23
7.1 LIMIT	23
7.2 TEST PROCEDURE	23
7.3 DEVIATION FROM STANDARD	23
7.4 TEST SETUP	23
7.5 EUT OPERATION CONDITIONS	23
7.6 TEST RESULTS	23
8 . POWER SPECTRAL DENSITY TEST	24
8.1 LIMIT	24
8.2 TEST PROCEDURE	24
8.3 DEVIATION FROM STANDARD	24
8.4 TEST SETUP	24
8.5 EUT OPERATION CONDITIONS	24
8.6 TEST RESULTS	24
9 . MEASUREMENT INSTRUMENTS LIST	25
10 . EUT TEST PHOTO	27
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	31
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	34
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	39
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	42
APPENDIX E - BANDWIDTH	93
APPENDIX F - MAXIMUM OUTPUT POWER	98
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	103

Table of Contents**Page****APPENDIX H - POWER SPECTRAL DENSITY****112**

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Mar. 30, 2021

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.68

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	-	3.02
		30MHz ~ 200MHz	V	4.26
		30MHz ~ 200MHz	H	3.38
		200MHz ~ 1,000MHz	V	3.98
		200MHz ~ 1,000MHz	H	3.94
		1GHz ~ 6GHz	-	3.96
		6GHz ~ 18GHz	-	5.24
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

C. Other Measurement:

Test Item	Uncertainty
Conducted Spurious Emission	±2.71 dB
Hopping Channel Separation	±53.46 Hz
Maximum Output Power	±0.95 dB
Number of Hopping Frequency	±53.46 Hz
Bandwidth	±3.8 %
Temperature	±0.08 °C
Humidity	±1.5%

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	53%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-30 MHz to 1GHz	26°C	52%	AC 120V/60Hz	Kwok Guo
Radiated Emissions-Above 1000 MHz	26°C	52%	AC 120V/60Hz	Kwok Guo
Bandwidth	25°C	60%	DC 3.85V	Jesse Wang
Maximum output power	25°C	60%	DC 3.85V	Hand Huang
Conducted Spurious Emissions	25°C	60%	DC 3.85V	Jesse Wang
Power Spectral Density	25°C	60%	DC 3.85V	Jesse Wang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet computer
Brand Name	Aava Mobile
Test Model	INARI10C-WLA-1
Series Model	N/A
Model Difference(s)	N/A
Power Source	1# DC voltage supplied from AC adapter. Model: AQ18A-59CFA 2# Supplied from battery. Model: AMME4314 3# Supplied from USB port.
Power Rating	1# I/P: 100-240V~ 50/60Hz 0.5A O/P: 5V === 3A or 9V === 2A or 12V === 1.5A or 15V === 1.2A 2# DC 3.85V, Rated Capacity:9660mAh, Typical Capacity:9900mAh 3# DC 5V
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps
Maximum Output Power	IEEE 802.11b: 11.66 dBm (0.0147 W) IEEE 802.11g: 11.40 dBm (0.0138 W) IEEE 802.11n (HT20): 10.74 dBm (0.0119 W) IEEE 802.11n (HT40): 11.33 dBm (0.0136 W)

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20)							
CH03 - CH09 for IEEE 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	PulseLarsen	W3006	Chip	N/A	2.0
2	PulseLarsen	W3006	Chip	N/A	1.9

Note:

- 1) This EUT supports CDD, and antenna gains are not equal, so Directional gain= $10\log\left[\frac{(10^{G_{1/20}} + 10^{G_{2/20}})^2}{N}\right]$ dBi, that is Directional gain= $10\log\left[\frac{(10^{2.0/20} + 10^{1.9/20})^2}{2}\right]$ dBi = 4.96.
- 2) The antenna gain are provided by the manufacturer.

4. Table for Antenna Configuration:

Operating Mode TX Mode	2TX
IEEE 802.11b	V (Ant. 1 + Ant. 2)
IEEE 802.11g	V (Ant. 1 + Ant. 2)
IEEE 802.11n (HT20)	V (Ant. 1 + Ant. 2)
IEEE 802.11n (HT40)	V (Ant. 1 + Ant. 2)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX B Mode Channel 11

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 5	TX B Mode Channel 11

Radiated emissions test - Below 1GHz	
Final Test Mode	Description
Mode 5	TX B Mode Channel 11

Radiated emissions test- Above 1GHz	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Conducted test	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

NOTE:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) For radiated emission below 1 GHz test, the IEEE 802.11b Channel 11 is found to be the worst case and recorded.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (4) For radiated emissions, the TX WLAN BLE 2Mbps Mode 2402MHz + WLAN 2.4G B Mode 2462 MHz was found the worst case of simultaneous transmission and recorded.


2.3 PARAMETERS OF TEST SOFTWARE

Test Software	QDART_WIN_4_8_Installer_00067_1		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	8	8	8
IEEE 802.11g	7.5	8	7.5
IEEE 802.11n (HT20)	7.5	7.5	7.5
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	7	7.5	7

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11b

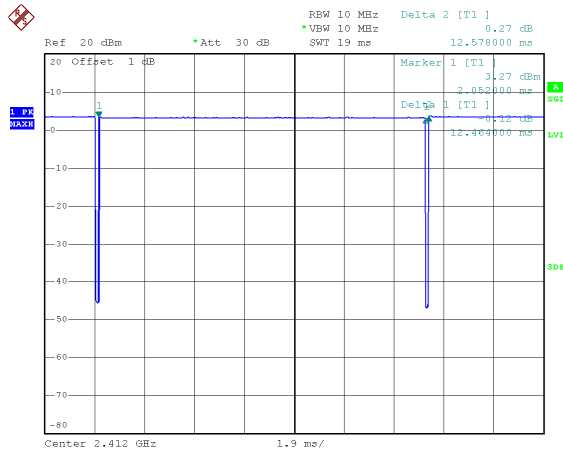

Date: 18.JAN.2021 16:15:11

Duty cycle = $12.464 \text{ ms} / 12.578 \text{ ms} = 99.09\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11g

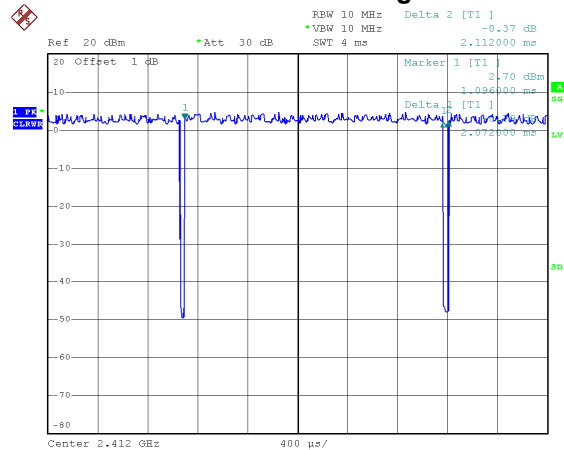

Date: 18.JAN.2021 16:15:40

Duty cycle = $2.072 \text{ ms} / 2.112 \text{ ms} = 98.11\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11n (HT20)

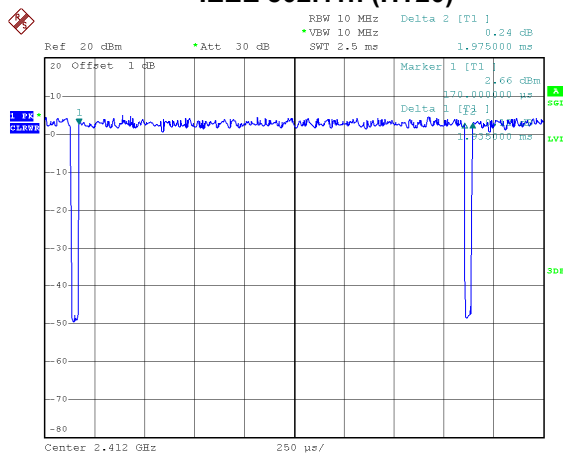

Date: 18.JAN.2021 16:16:18

Duty cycle = $1.935 \text{ ms} / 1.975 \text{ ms} = 97.98\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.09$

IEEE 802.11n (HT40)

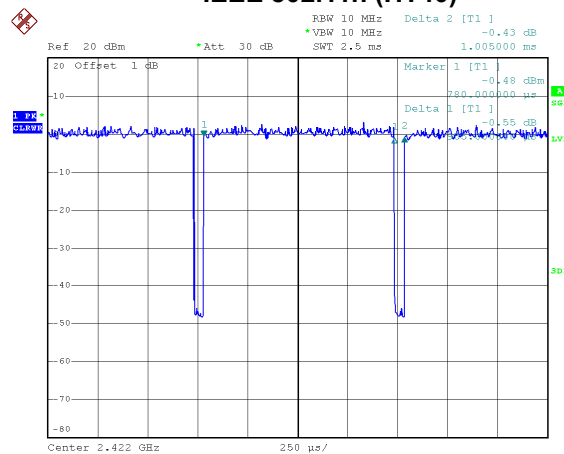

Date: 18.JAN.2021 16:16:41

Duty cycle = $0.955 \text{ ms} / 1.005 \text{ ms} = 95.03\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.22$

NOTE:


For IEEE 802.11g and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle $< 98\%$).

For IEEE 802.11n (HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle $< 98\%$).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

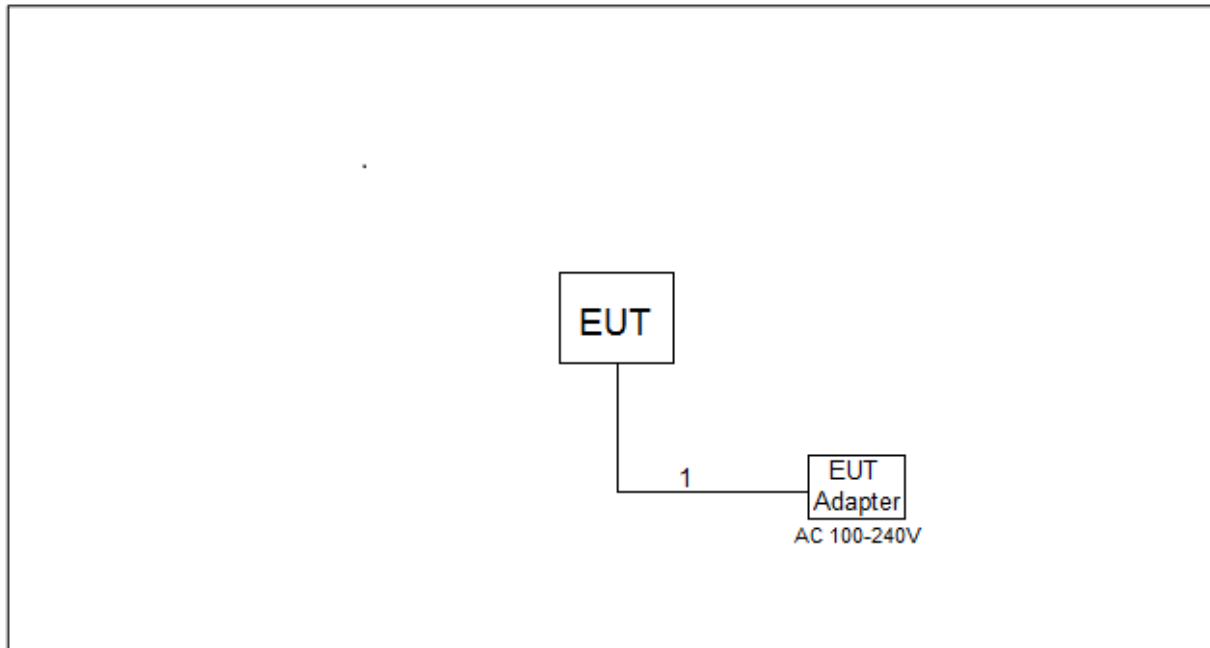

2.6 SUPPORT UNITS

Item	Equipment	Mfr/Brand	Model	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

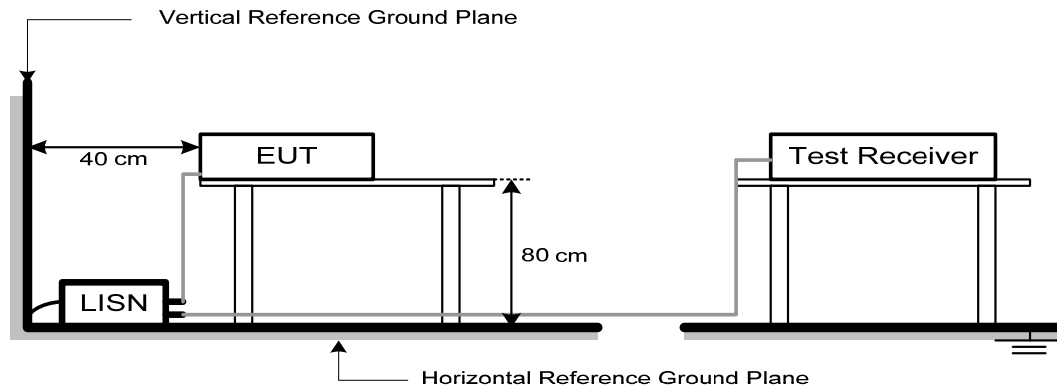

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation


4.4 TEST SETUP

9 kHz-30 MHz

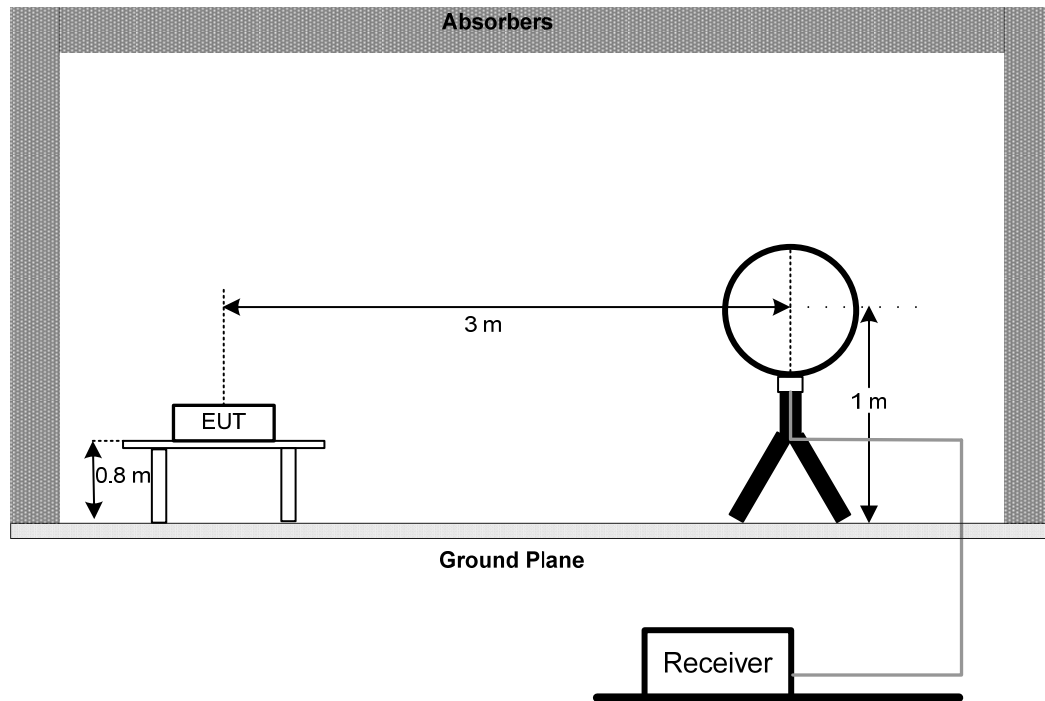

30 MHz to 1 GHz

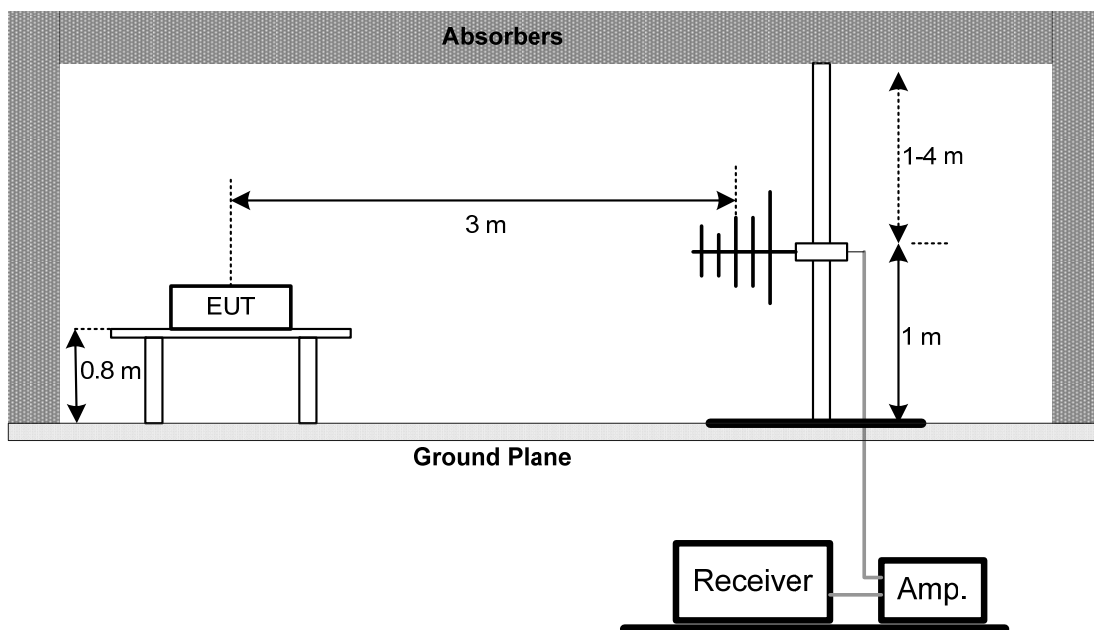

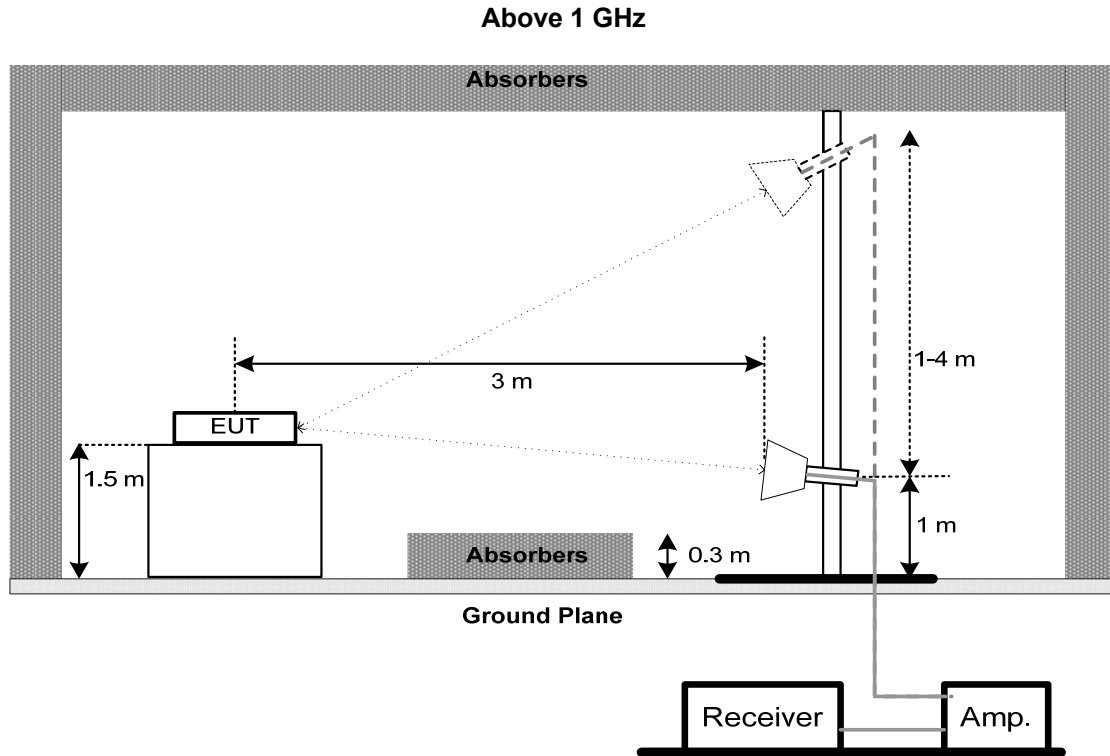

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-


5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
 - For 6 dB Bandwidth : RBW= 100 kHz, VBW=300 kHz, Sweep time = auto.
 - For 99% Emission Bandwidth B/G/N-20 Mode: RBW= 300 KHz, VBW=1 MHz, Sweep time = 2.5 ms.
 - For 99% Emission Bandwidth N-40 Mode: RBW= 1 MHz, VBW=3 MHz, Sweep time = 2.5 ms.
- The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

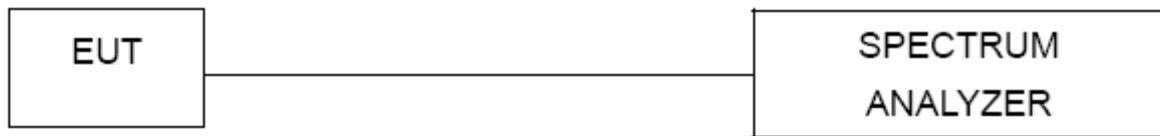

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm

6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.


7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

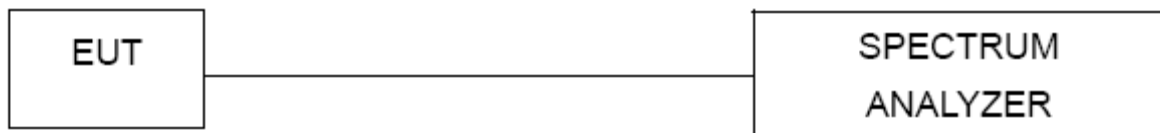

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)


8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

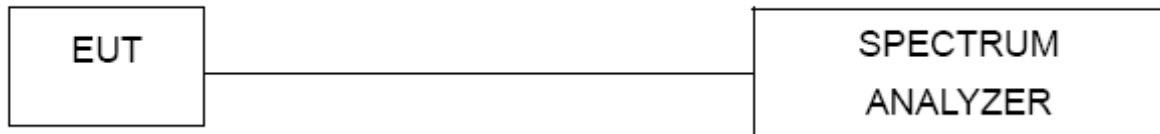

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2022
2	LISN	EMCO	3816/2	52765	Feb. 27, 2022
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	Feb. 27, 2022
4	50Ω Terminator	SHX	TF5-3	15041305	Feb. 27, 2022
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 09, 2022
7	643 Shield Room	ETS	6*4*3m	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	EM	EM-6876-1	230	Apr. 16, 2021
2	Cable	N/A	RG 213/U	N/A	May 29, 2021
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 27, 2022
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
5	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2021
3	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
4	Cable	emci	LMR-400 (30MHz-1GHz) (8m+5m)	N/A	May 22, 2021
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	May 12, 2021
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jul. 07, 2021
3	Amplifier	Agilent	8449B	3008A02333	Feb. 28, 2022
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Feb. 28, 2022
5	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2021
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	N/A	EMC104-SM-SM-6000	N/A	May 09, 2021
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	Filter	STI	STI15-9912	N/A	Jul. 25, 2021
11	966 Chambe Room	RM	9*6*6m	N/A	Jul. 25, 2021

Bandwidth & Antenna Conducted Spurious Emissions & Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Jul. 25, 2021
2	RF Cable	Tongkaichuan	N/A	N/A	N/A
3	DC Block	Mini	N/A	N/A	N/A
4	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022


Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 07, 2021
2	Wideband power sensor	Keysight	N1923A	MY58310004	Jul. 25, 2021
3	Attenuator	WOKEN	6SM3502	VAS1214NL	Feb. 07, 2022
4	RF Cable	Tongkaichuan	N/A	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

10. EUT TEST PHOTO



AC Power Line Conducted Emissions Test Photos

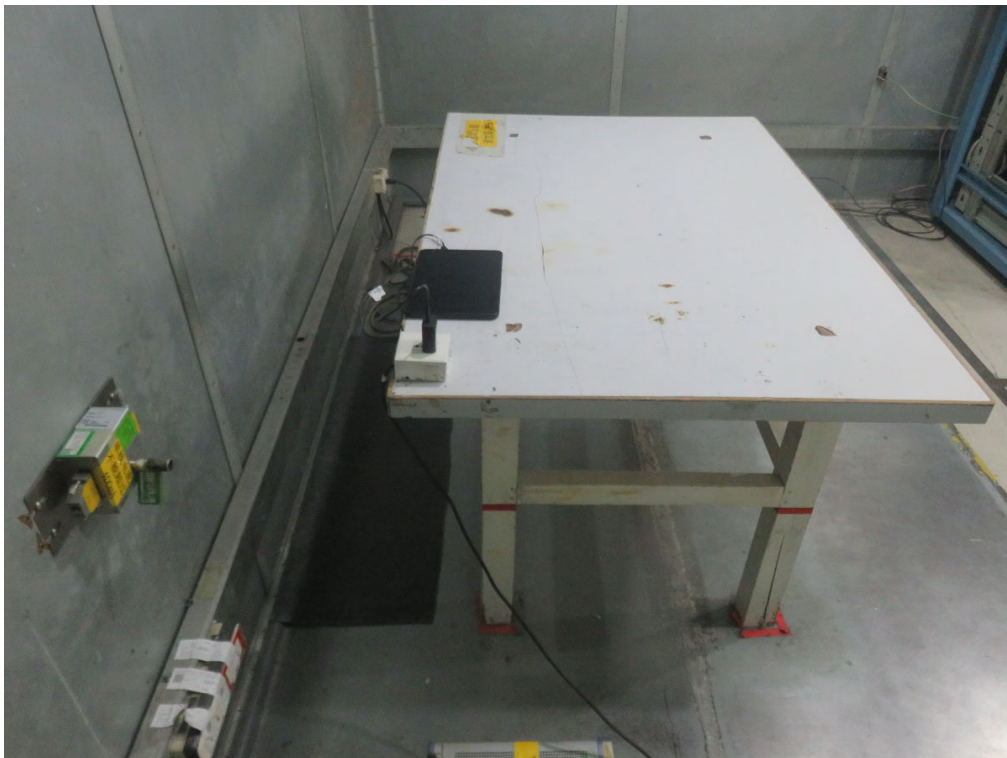

Radiated Emissions Test Photos**9 kHz to 30 MHz**


Radiated Emissions Test Photos

30 MHz to 1 GHz

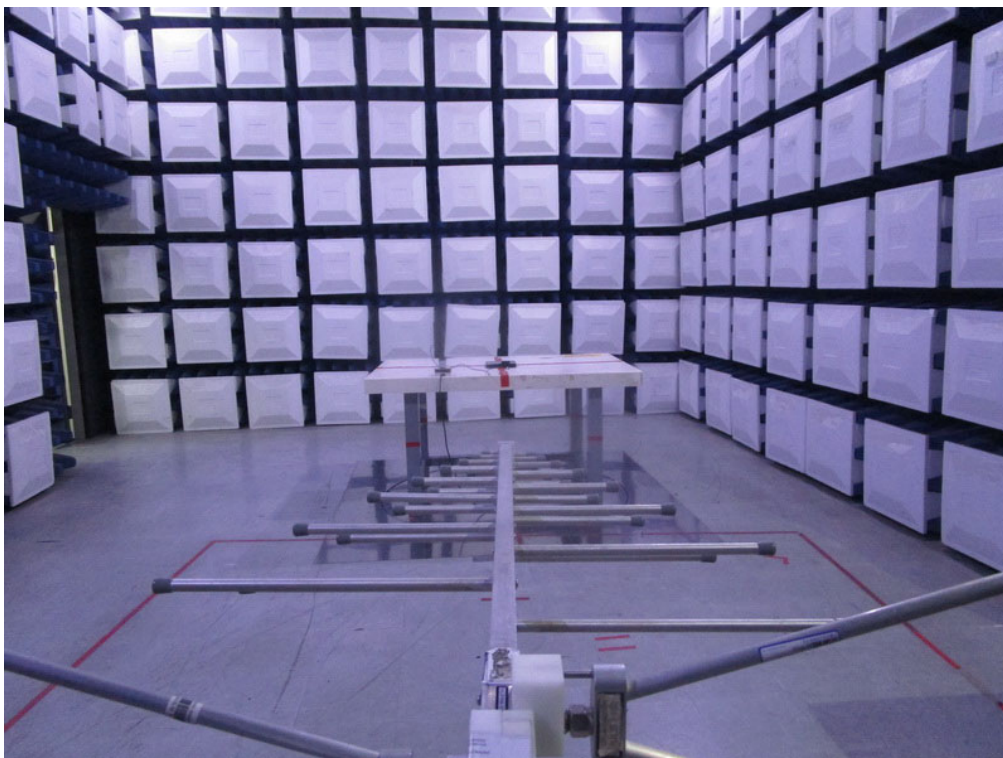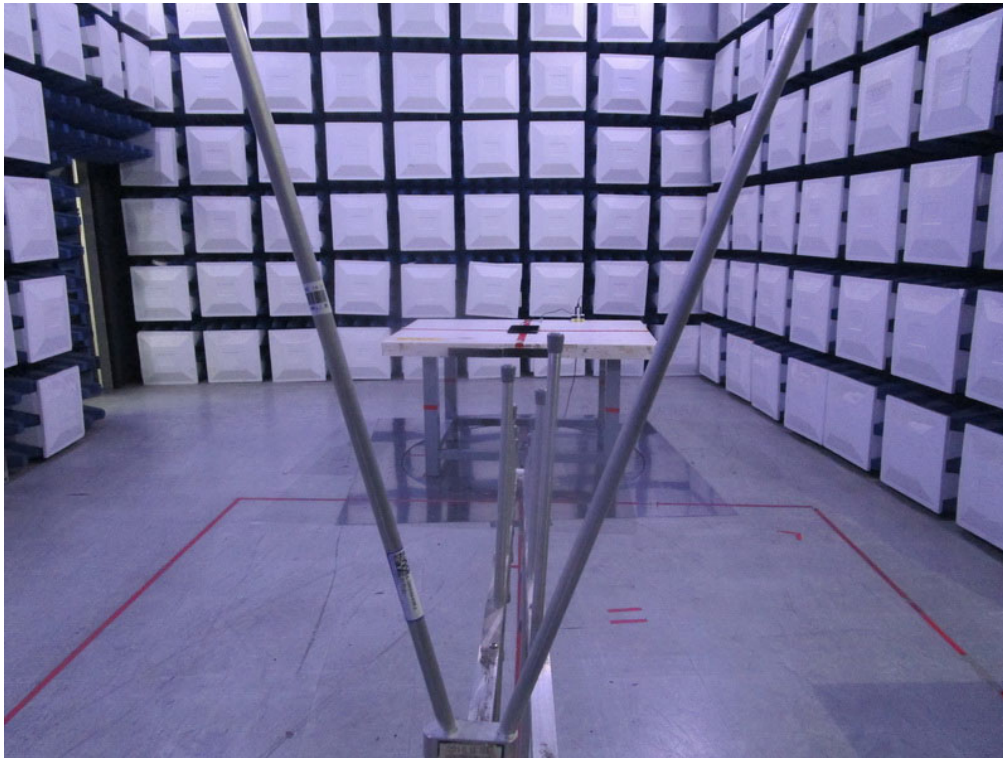

Radiated Emissions Test Photos


Above 1 GHz

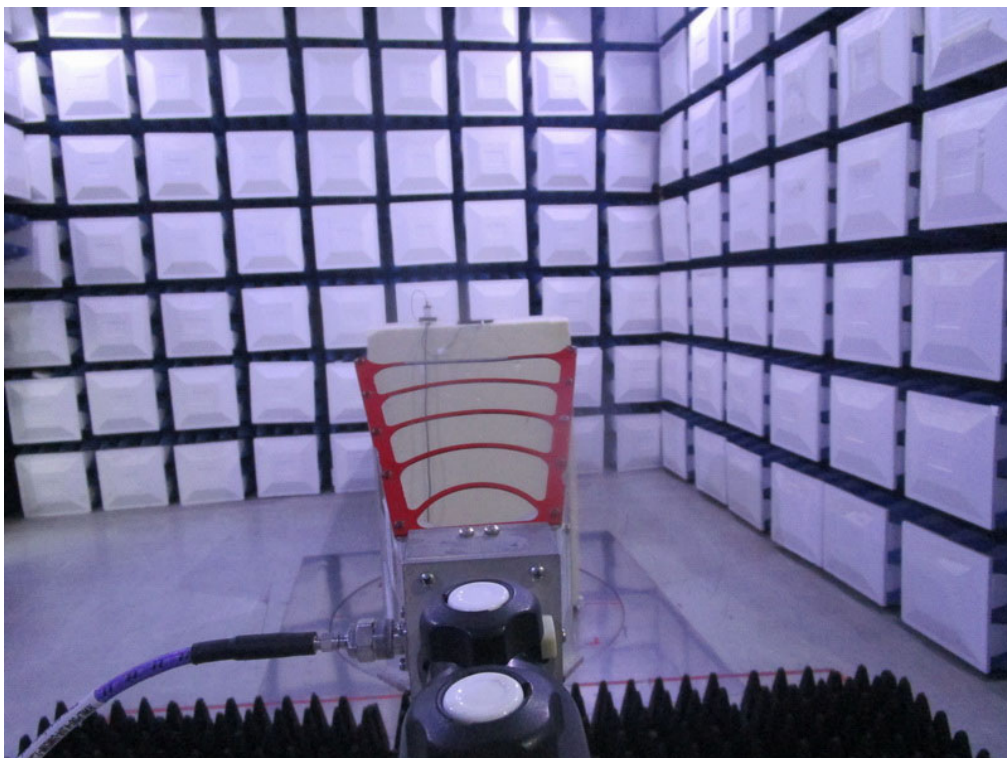

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX B Mode Channel 11

Line

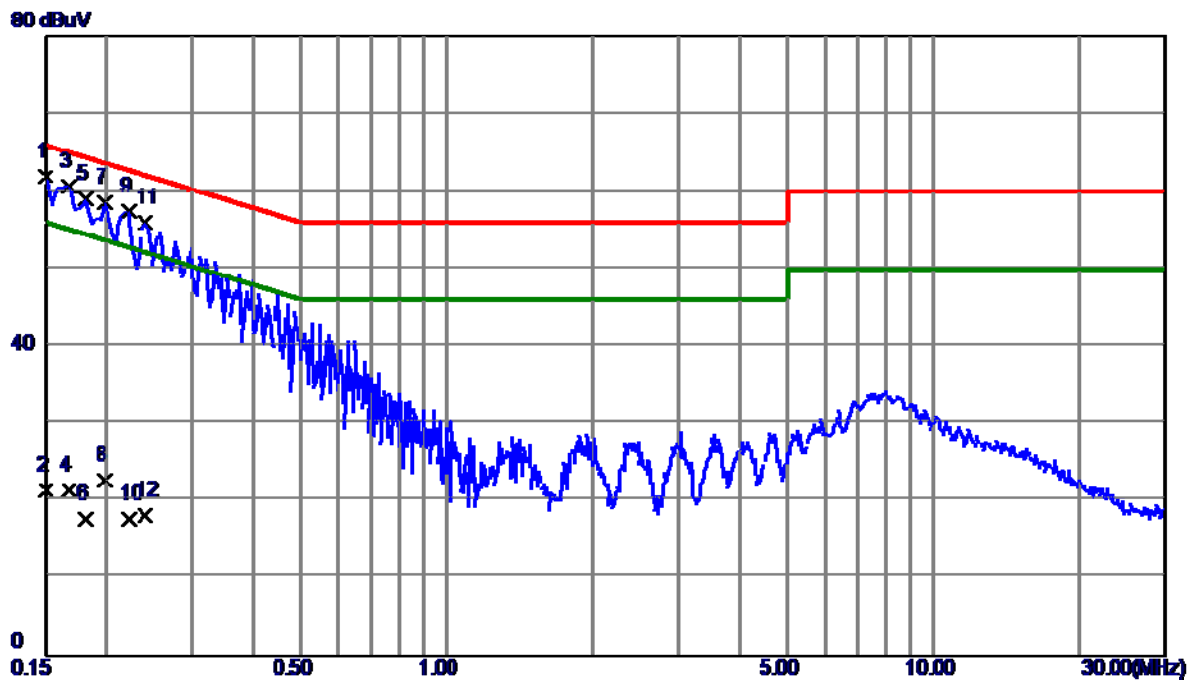


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.1500	52.32	9.67	61.99	66.00	-4.01	Peak	
2	0.1500	11.80	9.67	21.47	56.00	-34.53	AVG	
3	0.1680	50.87	9.80	60.67	65.06	-4.39	Peak	
4	0.1680	11.61	9.80	21.41	55.06	-33.65	AVG	
5	0.1815	49.14	9.85	58.99	64.42	-5.43	Peak	
6	0.1815	7.90	9.85	17.75	54.42	-36.67	AVG	
7	0.1995	48.59	9.91	58.50	63.63	-5.13	Peak	
8	0.1995	12.80	9.91	22.71	53.63	-30.92	AVG	
9	0.2220	47.52	9.89	57.41	62.74	-5.33	Peak	
10	0.2220	7.90	9.89	17.79	52.74	-34.95	AVG	
11	0.2400	46.19	9.88	56.07	62.10	-6.03	Peak	
12	0.2400	8.40	9.88	18.28	52.10	-33.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode Channel 11

Neutral

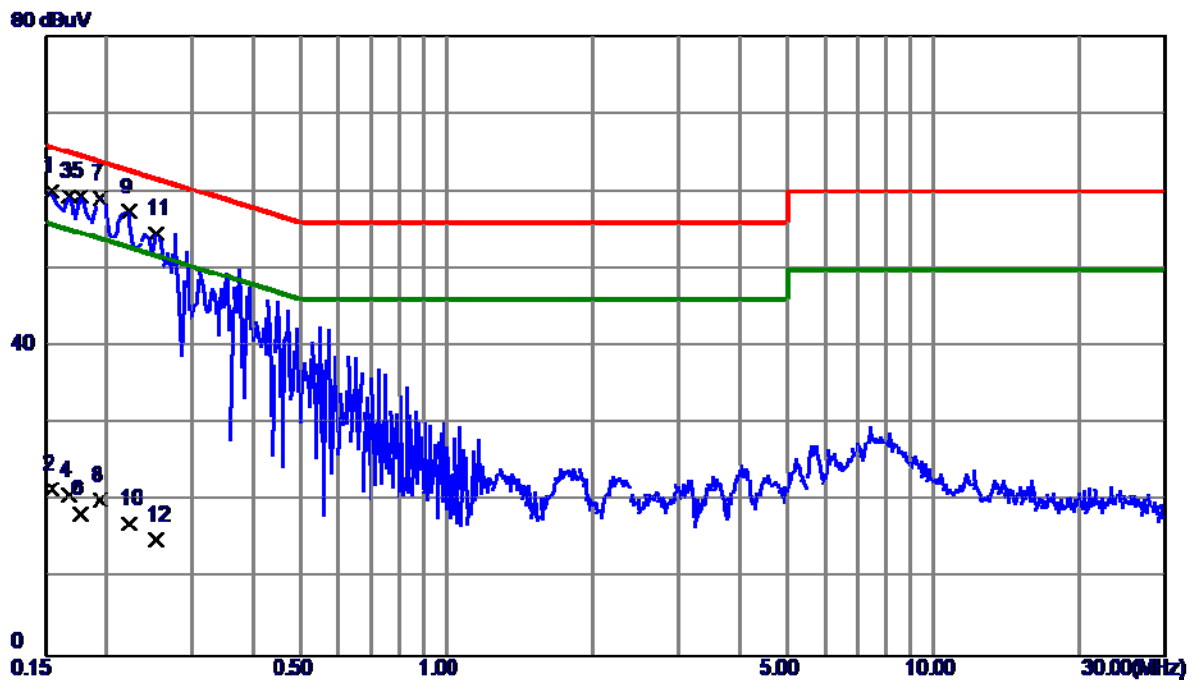


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1545	50.27	9.78	60.05	65.75	-5.70	Peak	
2	0.1545	11.79	9.78	21.57	55.75	-34.18	AVG	
3	0.1680	49.51	9.88	59.39	65.06	-5.67	Peak	
4	0.1680	10.90	9.88	20.78	55.06	-34.28	AVG	
5	0.1770	49.39	9.92	59.31	64.63	-5.32	Peak	
6	0.1770	8.50	9.92	18.42	54.63	-36.21	AVG	
7 *	0.1949	49.06	9.99	59.05	63.83	-4.78	Peak	
8	0.1949	10.10	9.99	20.09	53.83	-33.74	AVG	
9	0.2220	47.37	9.99	57.36	62.74	-5.38	Peak	
10	0.2220	7.20	9.99	17.19	52.74	-35.55	AVG	
11	0.2535	44.64	9.97	54.61	61.64	-7.03	Peak	
12	0.2535	5.10	9.97	15.07	51.64	-36.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode: TX B Mode Channel 11

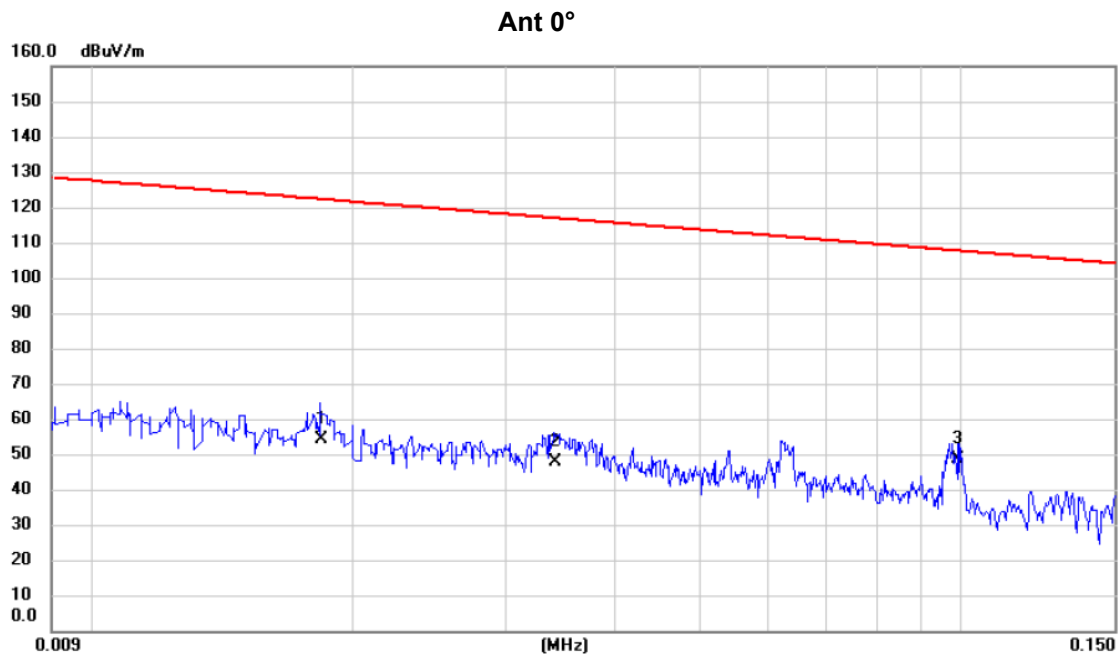


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0184	40.55	13.72	54.27	122.31	-68.04	AVG		
2		0.0341	34.91	12.84	47.75	116.95	-69.20	AVG		
3	*	0.0991	35.82	12.71	48.53	107.68	-59.15	QP		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode Channel 11

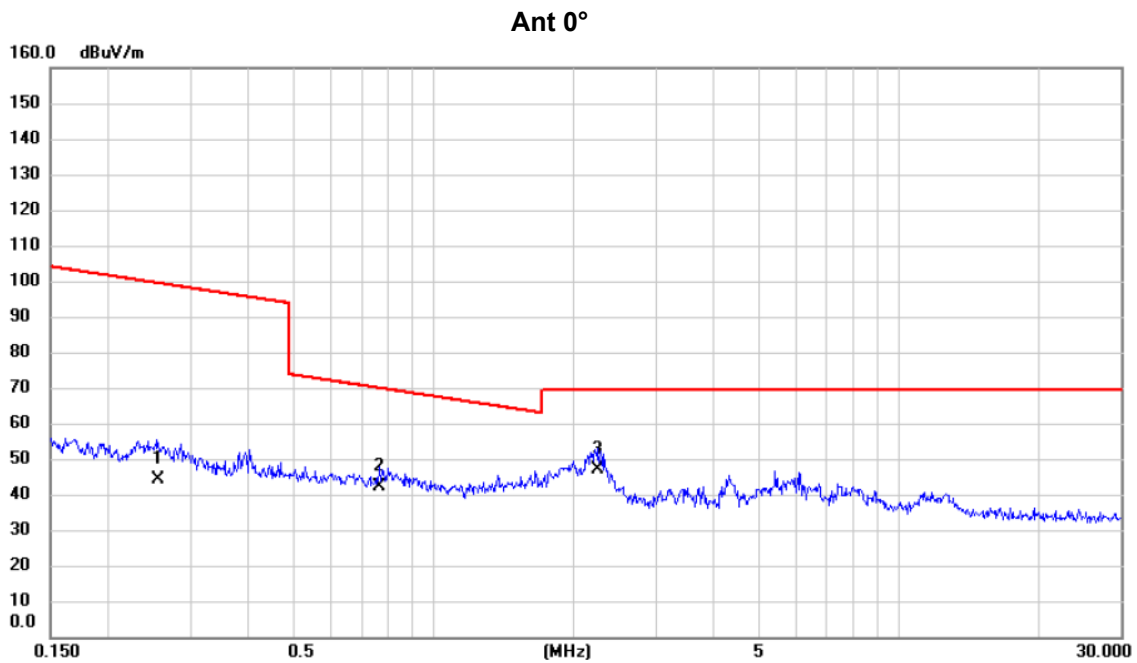


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.2548	31.58	12.63	44.21	99.48	-55.27	AVG		
2		0.7670	30.49	11.89	42.38	69.91	-27.53	QP		
3	*	2.2486	35.82	11.18	47.00	69.54	-22.54	QP		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode Channel 11

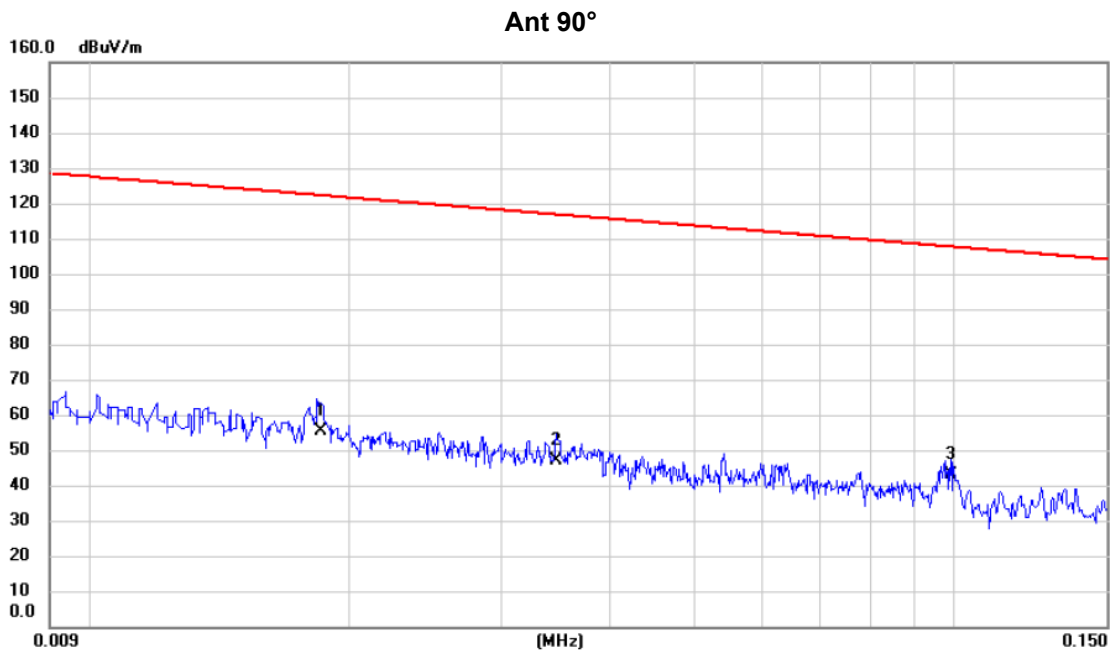

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0185	41.59	13.68	55.27	122.26	-66.99	AVG		
2		0.0347	33.99	12.83	46.82	116.80	-69.98	AVG		
3	*	0.0990	30.47	12.71	43.18	107.69	-64.51	QP		


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode Channel 11

Ant 90°

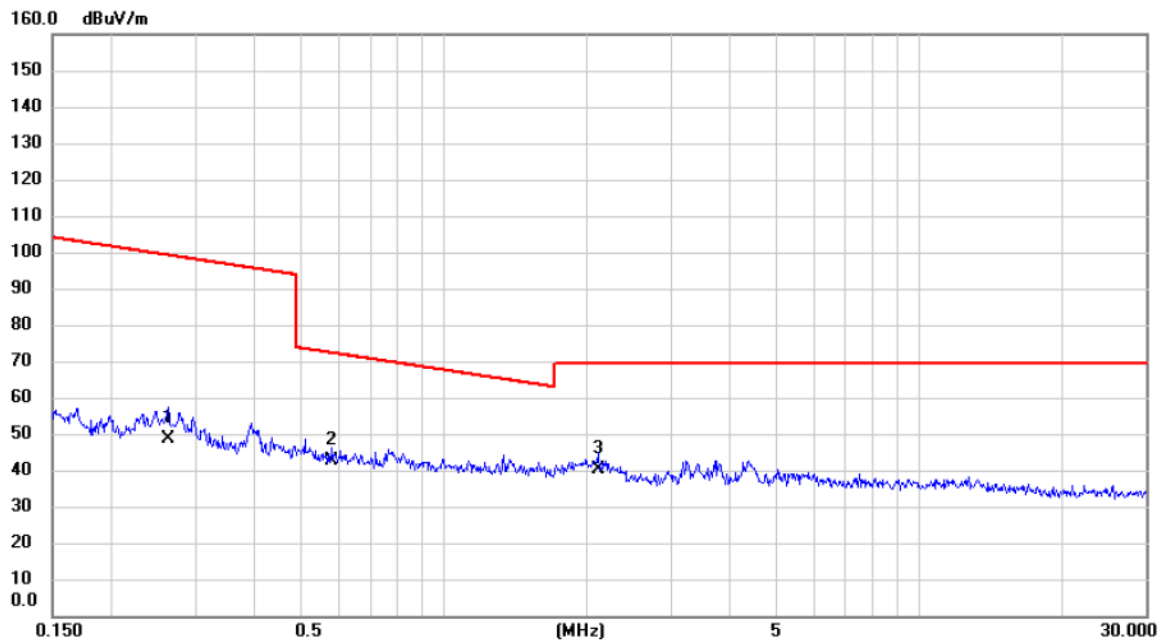


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.2630	35.82	12.60	48.42	99.21	-50.79	AVG		
2		0.5823	30.66	11.98	42.64	72.30	-29.66	QP		
3	*	2.1101	28.91	11.24	40.15	69.54	-29.39	QP		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX B Mode Channel 11

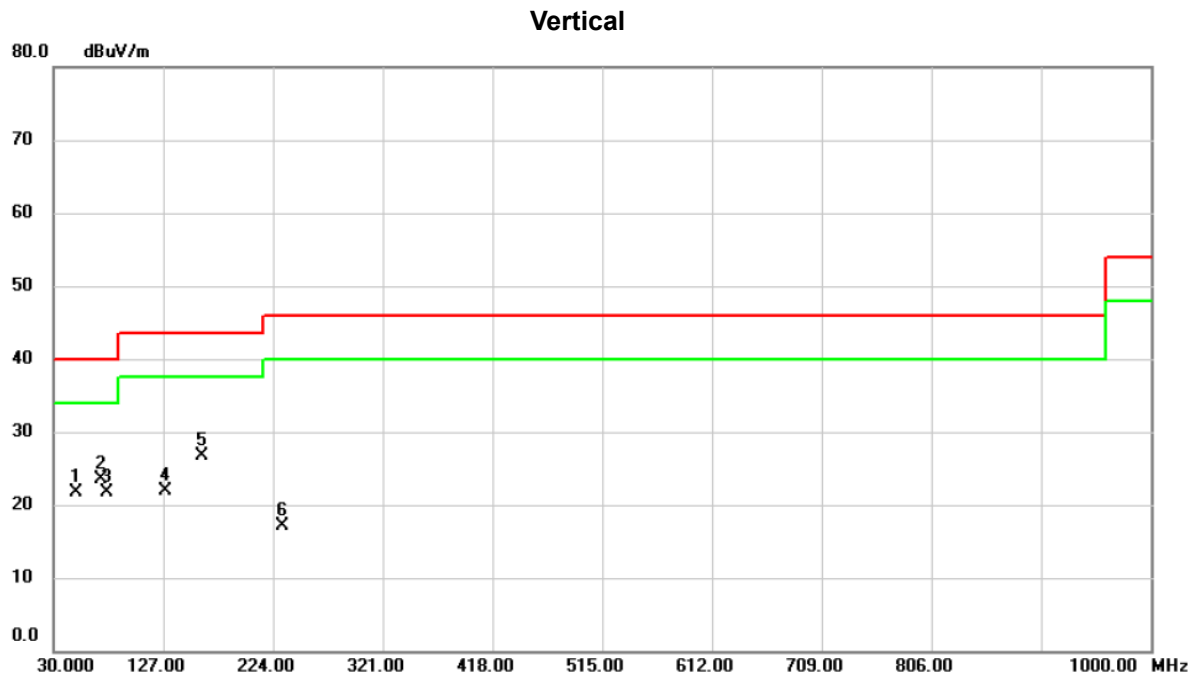


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		50.370	35.20	-13.56	21.64	40.00	-18.36	peak	
2	*	71.710	39.74	-16.23	23.51	40.00	-16.49	peak	
3		77.530	39.05	-17.29	21.76	40.00	-18.24	peak	
4		128.940	34.58	-12.74	21.84	43.50	-21.66	peak	
5		160.950	37.47	-10.80	26.67	43.50	-16.83	peak	
6		232.730	31.00	-13.80	17.20	46.00	-28.80	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode Channel 11

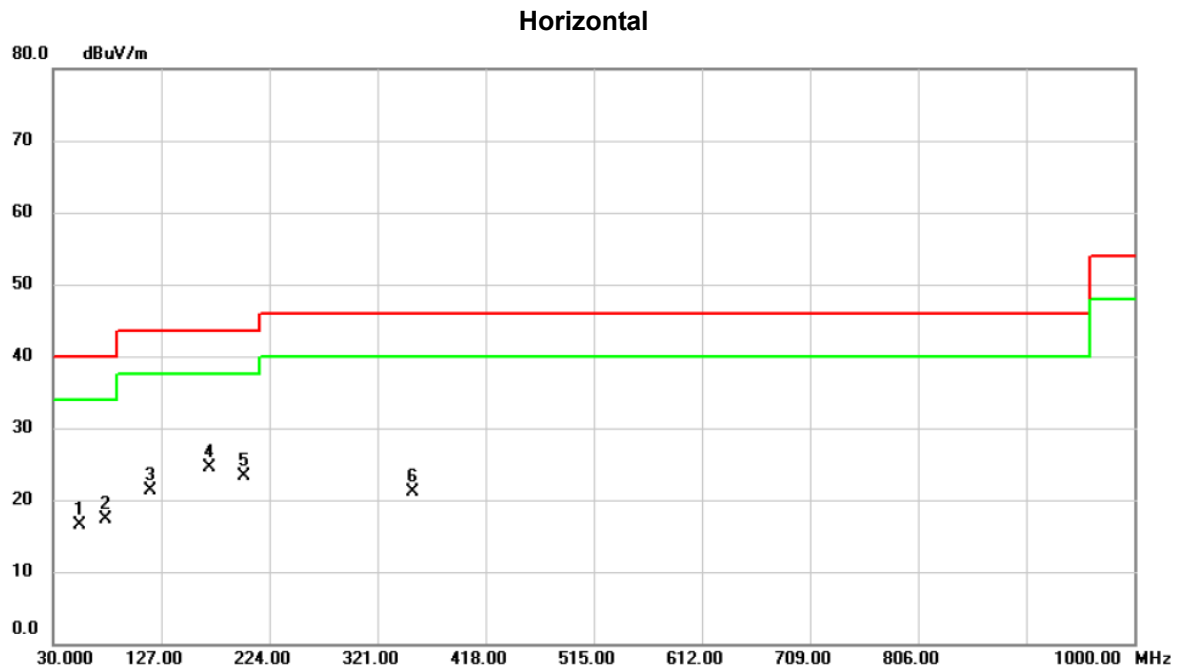

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		53.280	30.13	-13.63	16.50	40.00	-23.50	peak	
2		77.530	34.61	-17.29	17.32	40.00	-22.68	peak	
3		117.300	34.36	-13.14	21.22	43.50	-22.28	peak	
4	*	169.680	36.55	-12.03	24.52	43.50	-18.98	peak	
5		201.690	38.20	-14.87	23.33	43.50	-20.17	peak	
6		353.010	31.24	-10.13	21.11	46.00	-24.89	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode: TX B Mode 2412 MHz

Vertical

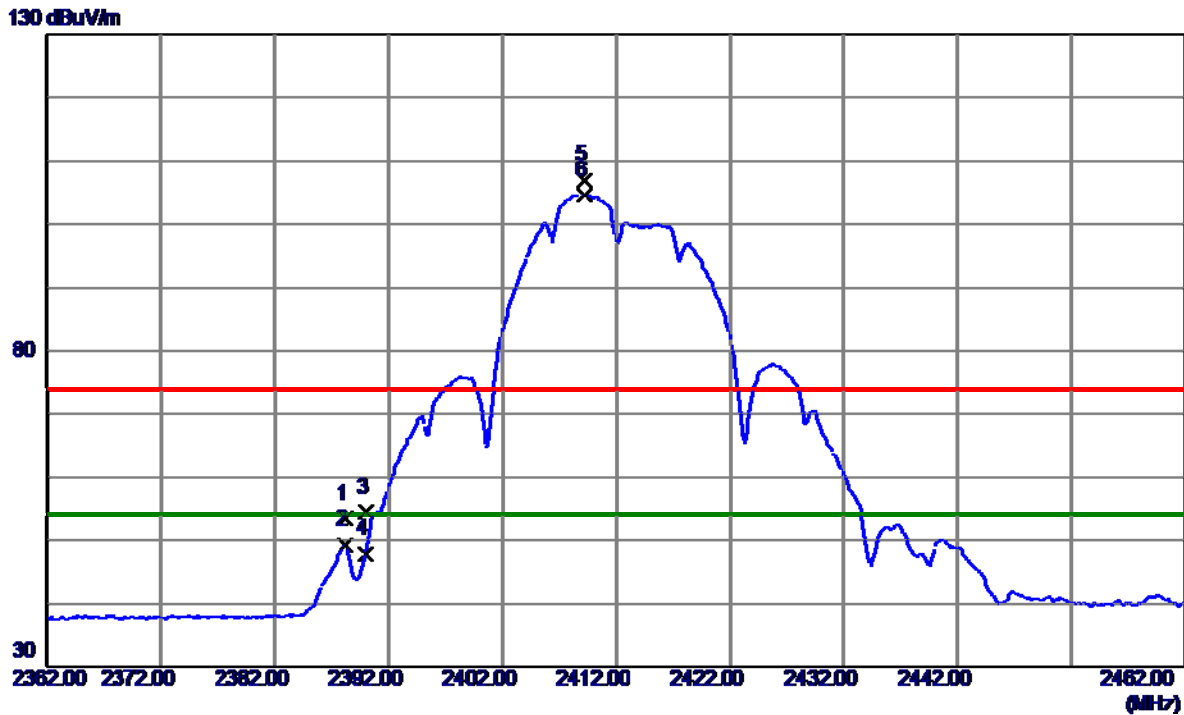


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.2000	46.05	7.26	53.31	74.00	20.69	Peak	
2	2388.2000	41.87	7.26	49.13	54.00	-4.87	AVG	
3	2390.0000	47.05	7.26	54.31	74.00	-19.69	Peak	
4	2390.0000	40.60	7.26	47.86	54.00	-6.14	AVG	
5	2409.2000	99.80	7.26	107.06	74.00	33.06	Peak	No Limit
6 *	2409.2000	97.35	7.26	104.61	54.00	50.61	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2412 MHz
------------	--------------------

Vertical

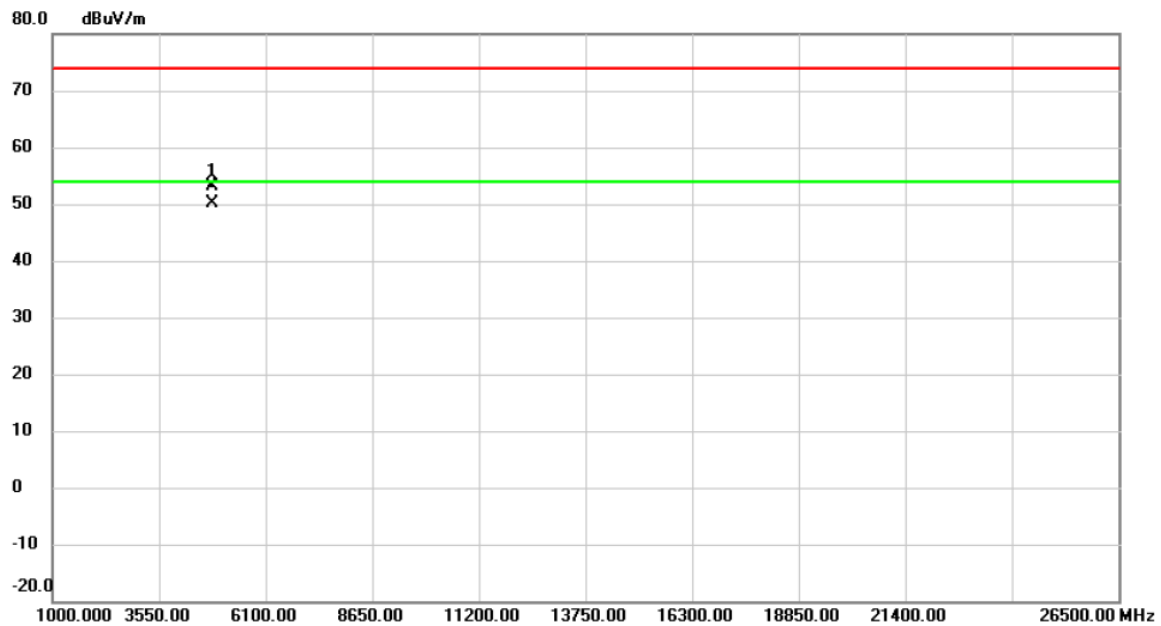


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4823.972	48.72	4.45	53.17	74.00	-20.83	peak	
2	*	4823.985	45.60	4.45	50.05	54.00	-3.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

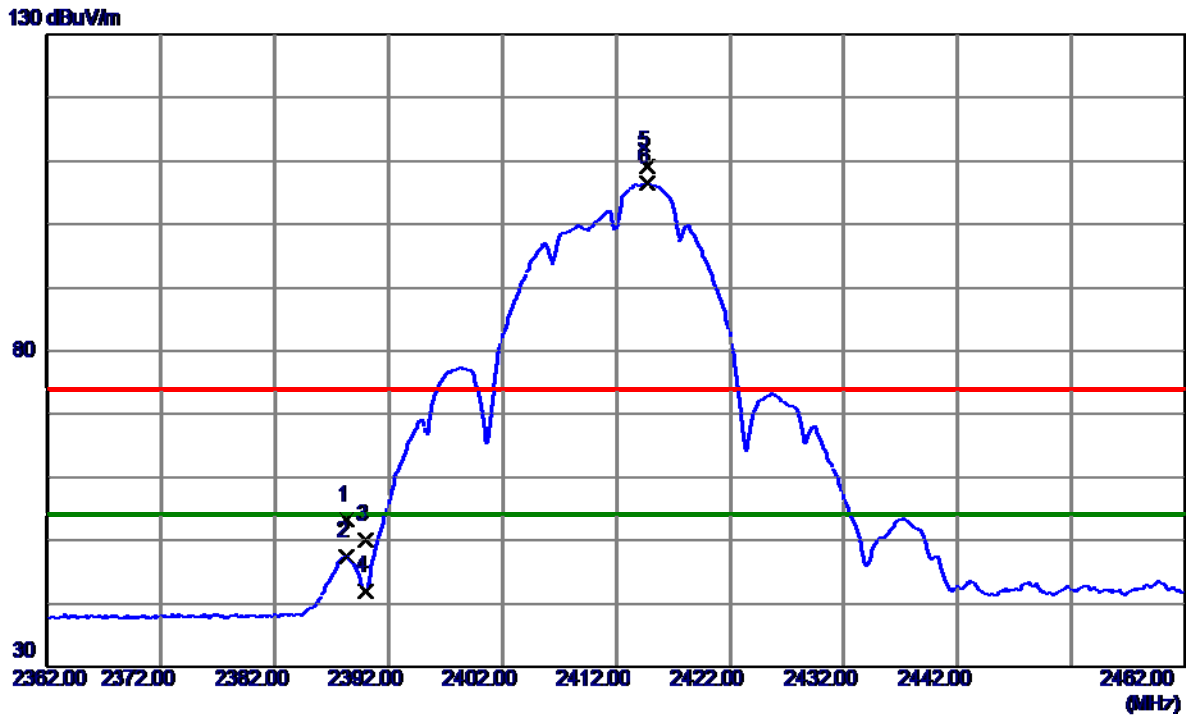


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.3000	45.98	7.26	53.24	74.00	20.76	Peak	
2	2388.3000	40.20	7.26	47.46	54.00	-6.54	AVG	
3	2390.0000	42.72	7.26	49.98	74.00	-24.02	Peak	
4	2390.0000	34.80	7.26	42.06	54.00	-11.94	AVG	
5	2414.8000	101.89	7.26	109.15	74.00	35.15	Peak	No Limit
6 *	2414.8000	99.25	7.26	106.51	54.00	52.51	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

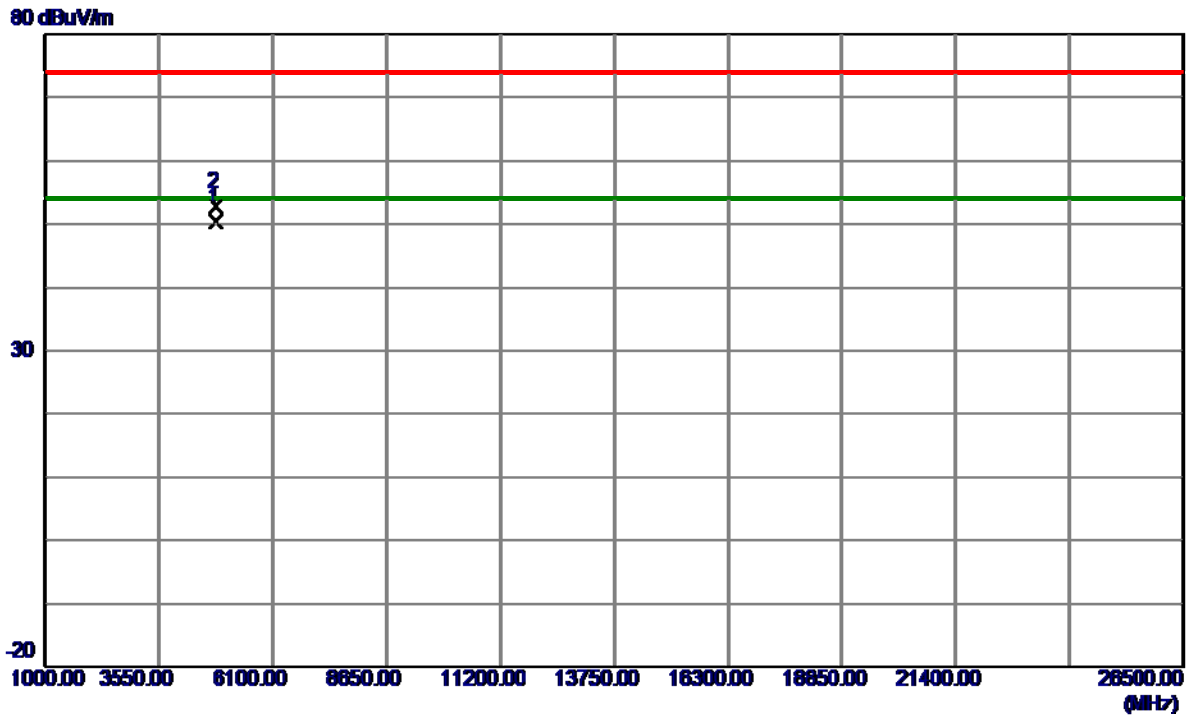

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9670	45.96	4.45	50.41	54.00	3.59	AVG	
2	4823.9700	48.28	4.45	52.73	74.00	-21.27	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical

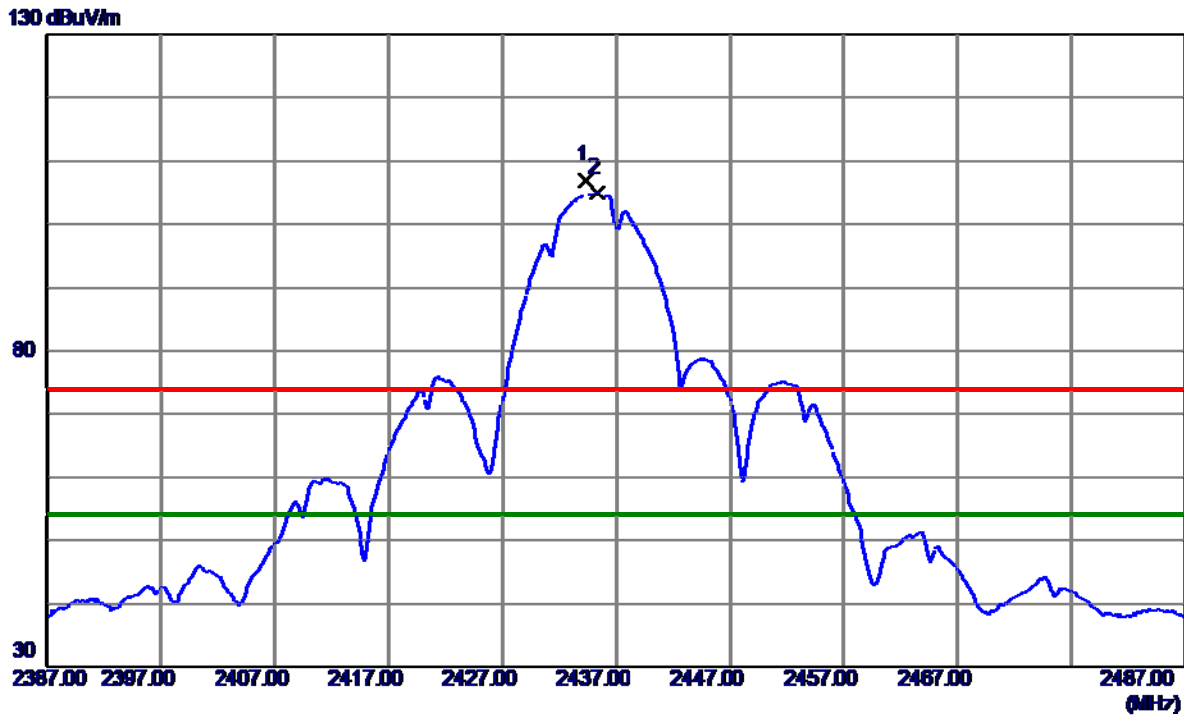


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2434.3000	99.77	7.25	107.02	74.00	33.02	Peak	No Limit
2 *	2435.3000	97.77	7.25	105.02	54.00	51.02	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2437 MHz
------------	--------------------

Vertical

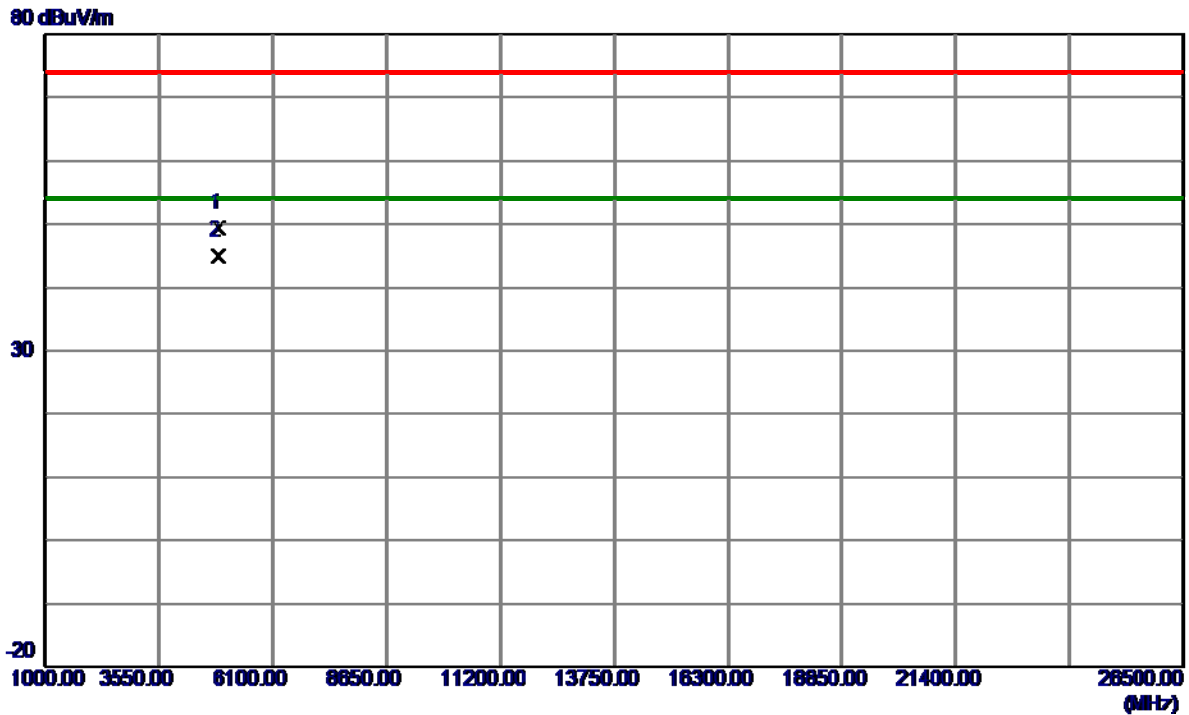


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9049	44.73	4.58	49.31	74.00	24.69	Peak	
2 *	4873.9129	40.37	4.58	44.95	54.00	-9.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

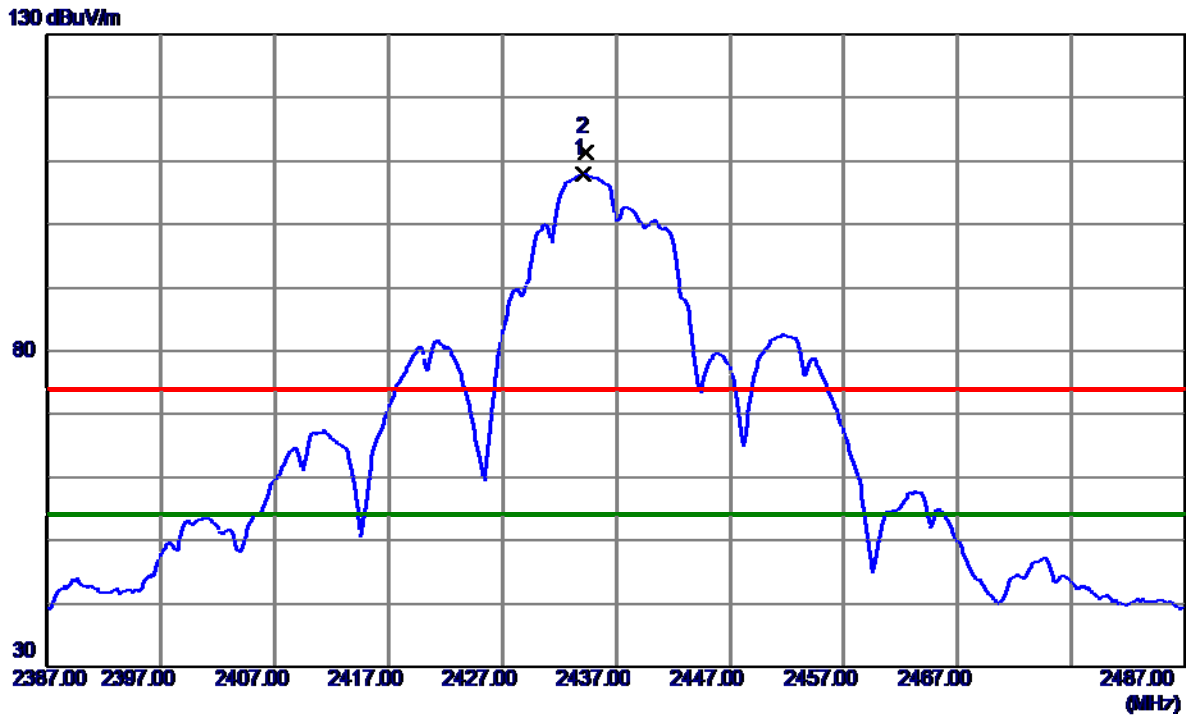


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2434.1000	100.72	7.25	107.97	54.00	53.97	AVG	No Limit
2	2434.3000	104.14	7.25	111.39	74.00	37.39	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

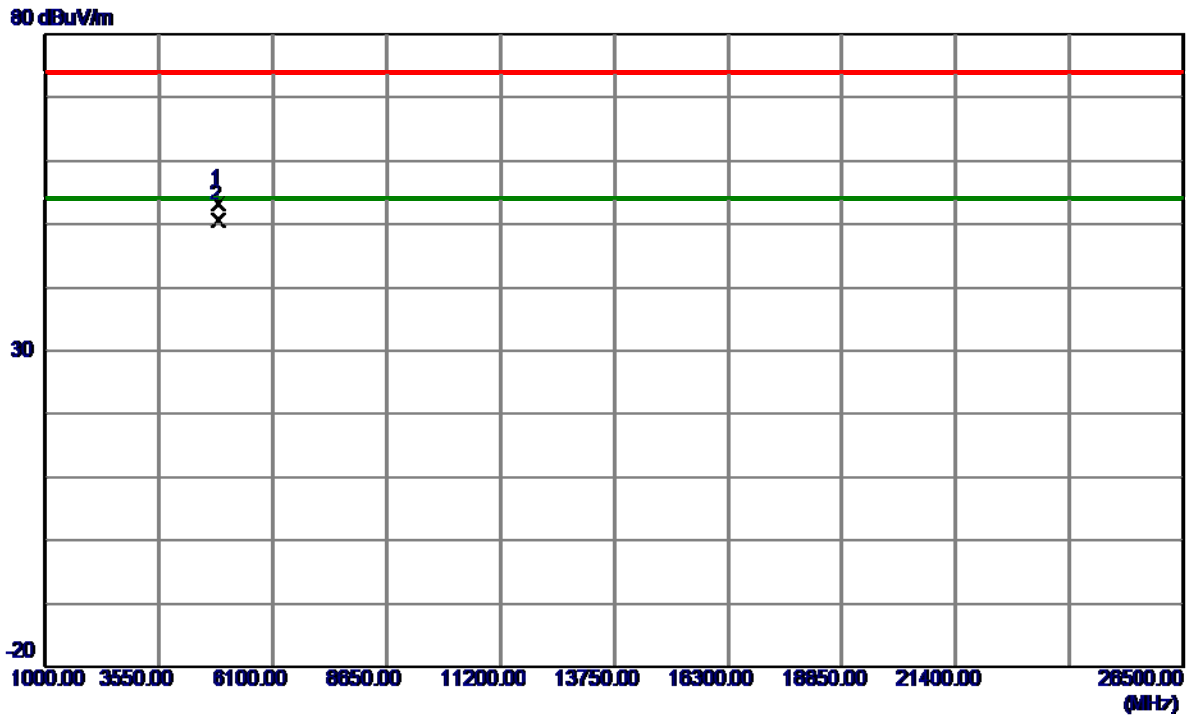

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9350	48.65	4.58	53.23	74.00	20.77	Peak	
2 *	4873.9720	46.12	4.58	50.70	54.00	-3.30	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Vertical

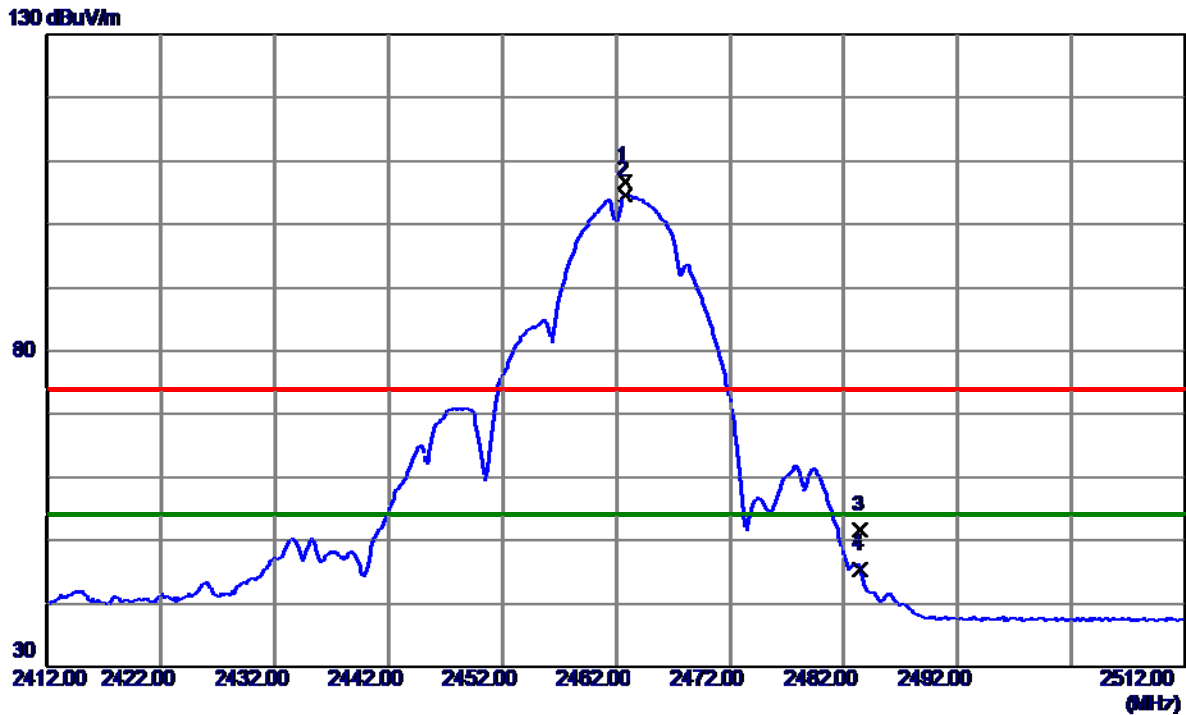


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2462.8000	99.59	7.25	106.84	74.00	32.84	Peak	No Limit
2 *	2462.8000	97.41	7.25	104.66	54.00	50.66	AVG	No Limit
3	2483.5000	44.37	7.25	51.62	74.00	-22.38	Peak	
4	2483.5000	38.20	7.25	45.45	54.00	-8.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2462 MHz
------------	--------------------

Vertical

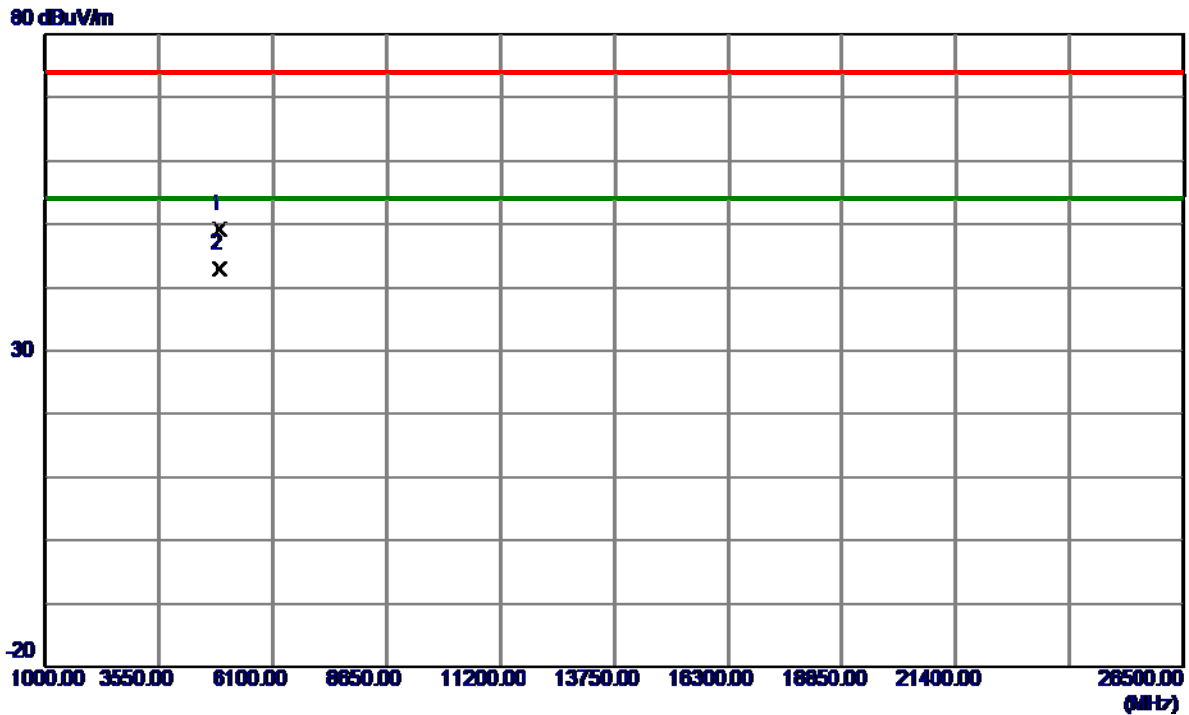


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.9450	44.54	4.72	49.26	74.00	24.74	Peak	
2 *	4923.9670	38.27	4.72	42.99	54.00	-11.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Horizontal

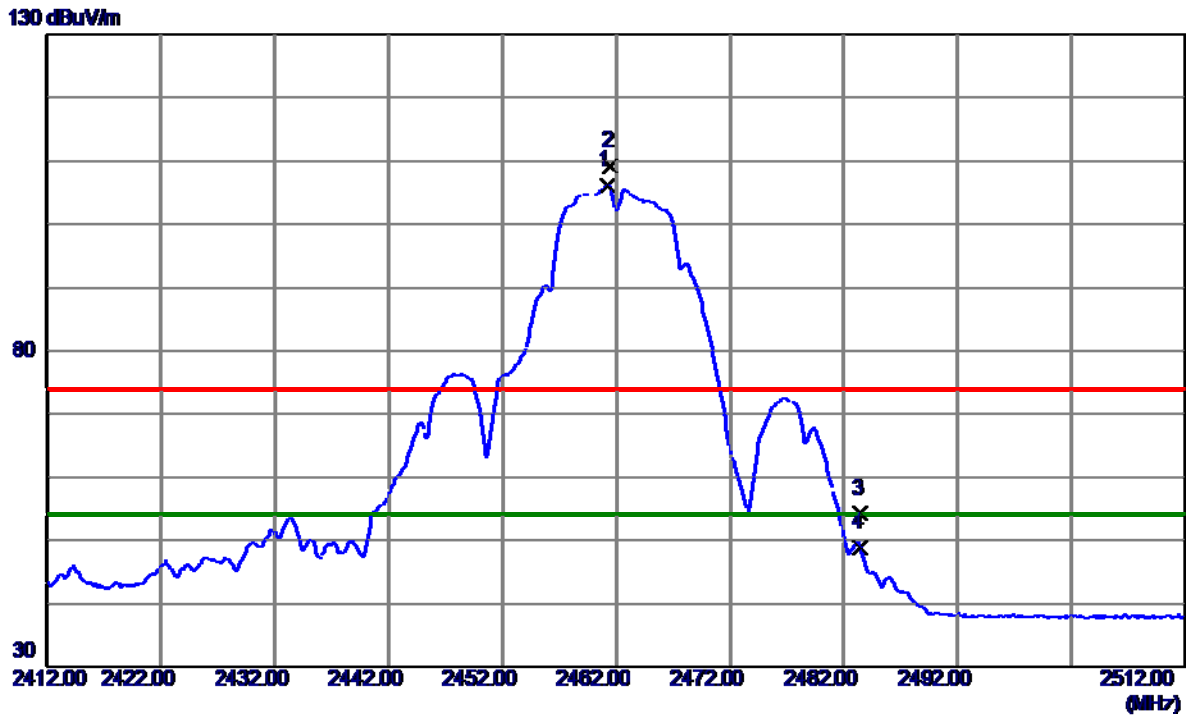


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.2000	98.96	7.25	106.21	54.00	52.21	AVG	No Limit
2	2461.5000	101.91	7.25	109.16	74.00	35.16	Peak	No Limit
3	2483.5000	46.88	7.25	54.13	74.00	-19.87	Peak	
4	2483.5000	41.53	7.25	48.78	54.00	-5.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX B Mode 2462 MHz
------------	--------------------

Horizontal

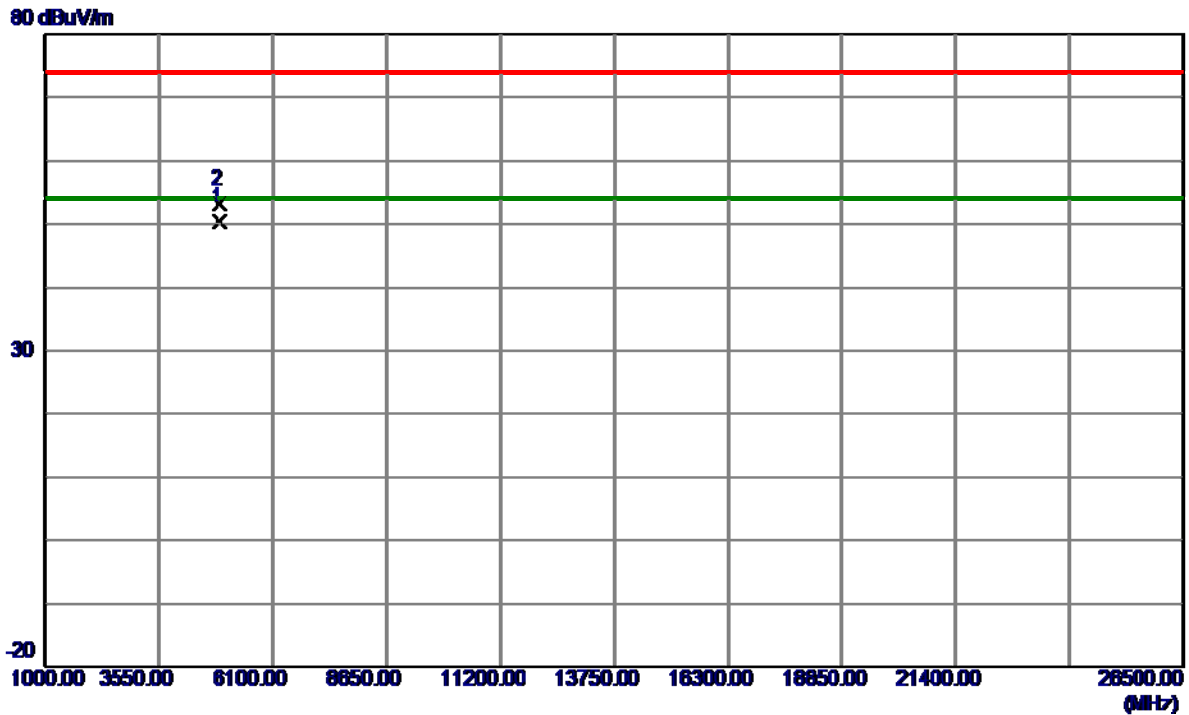

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9700	45.60	4.72	50.32	54.00	3.68	AVG	
2	4924.0120	48.52	4.72	53.24	74.00	-20.76	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical

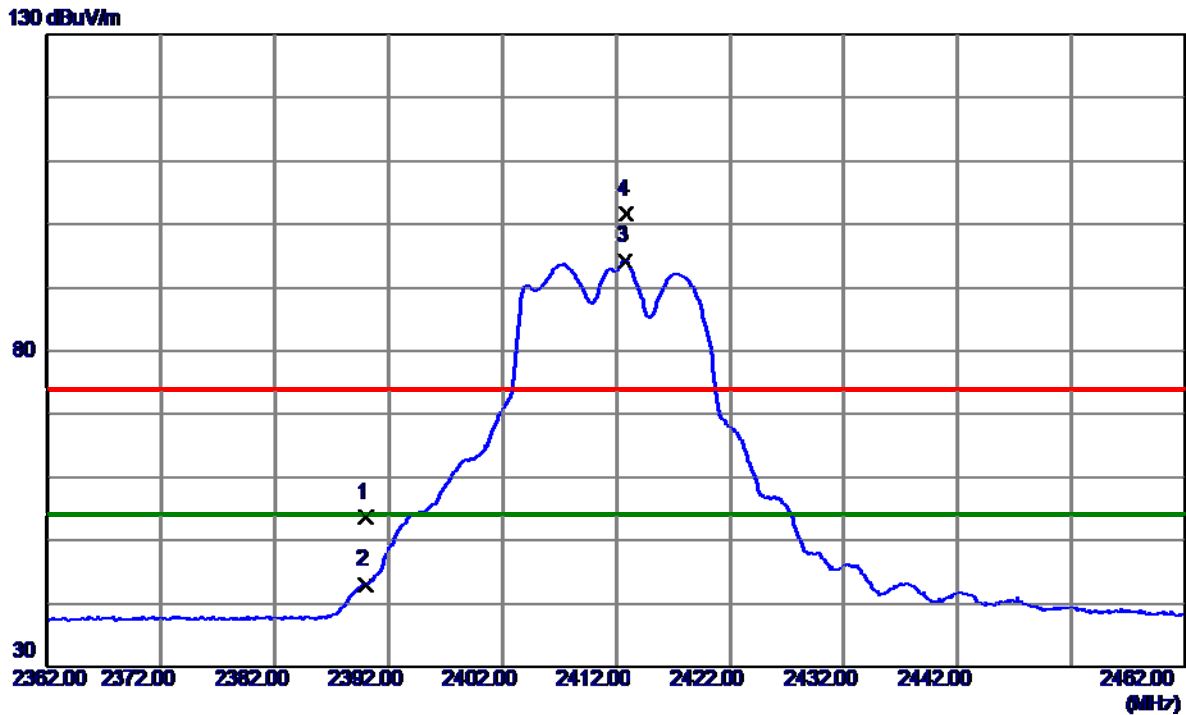


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	46.33	7.26	53.59	74.00	20.41	Peak	
2	2390.0000	35.79	7.26	43.05	54.00	-10.95	AVG	
3 *	2412.8000	87.00	7.26	94.26	54.00	40.26	AVG	No Limit
4	2412.9000	94.34	7.26	101.60	74.00	27.60	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2412 MHz
------------	--------------------

Vertical

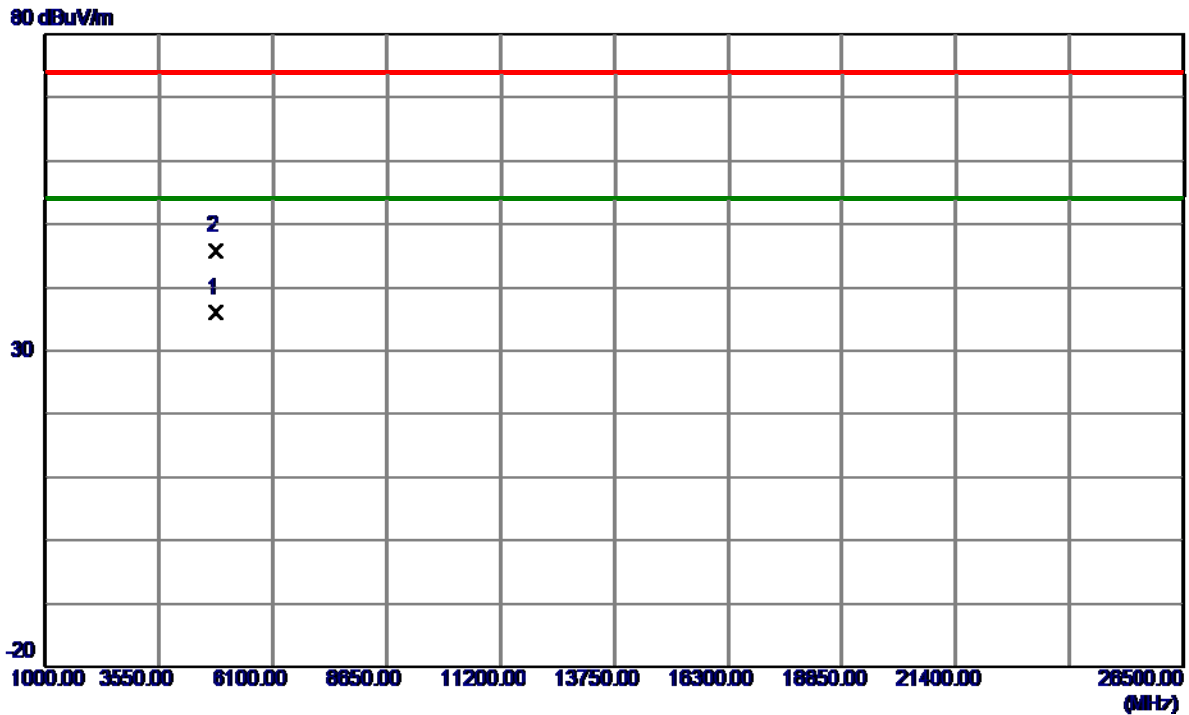


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4822.3050	31.56	4.45	36.01	54.00	17.99	AVG	
2	4822.6349	41.44	4.45	45.89	74.00	-28.11	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

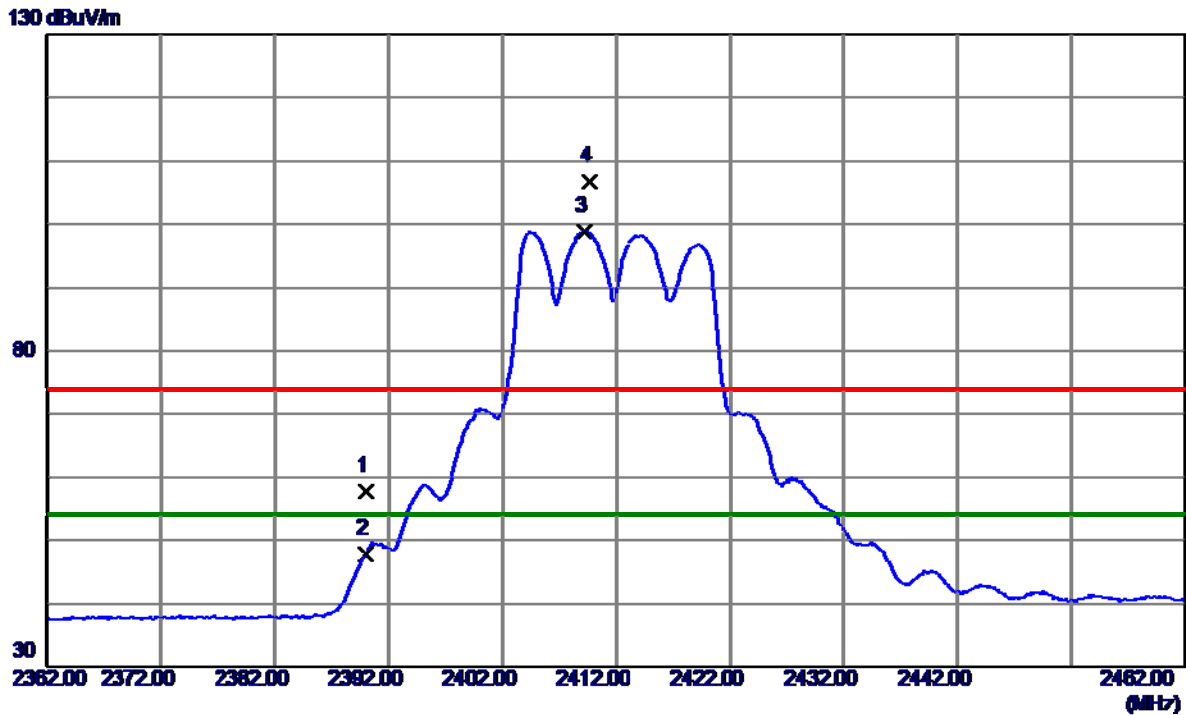


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	50.59	7.26	57.85	74.00	16.15	Peak	
2	2390.0000	40.63	7.26	47.89	54.00	-6.11	AVG	
3 *	2409.2000	91.57	7.26	98.83	54.00	44.83	AVG	No Limit
4	2409.7000	99.56	7.26	106.82	74.00	32.82	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2412 MHz
------------	--------------------

Horizontal

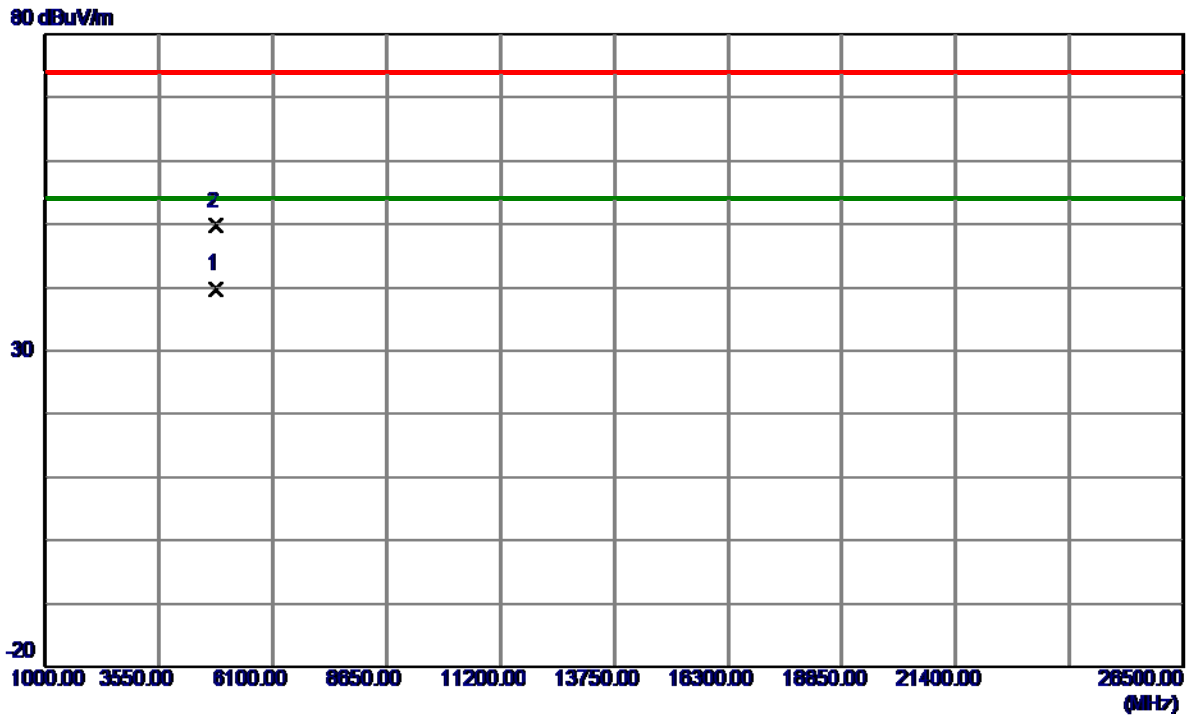

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.7450	35.35	4.45	39.80	54.00	14.20	AVG	
2	4828.3950	45.24	4.46	49.70	74.00	-24.30	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical

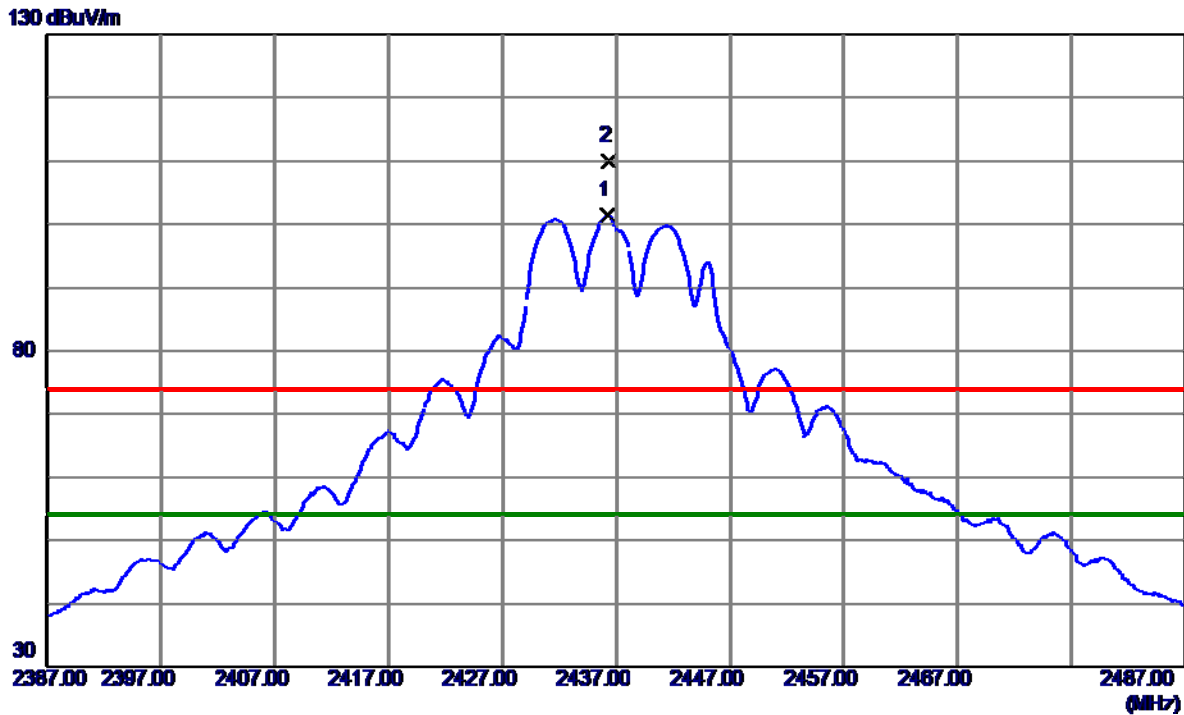


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.2000	94.18	7.25	101.43	74.00	27.43	Peak	No Limit
2 *	2436.3000	102.78	7.25	110.03	74.00	36.03	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2437 MHz
------------	--------------------

Vertical

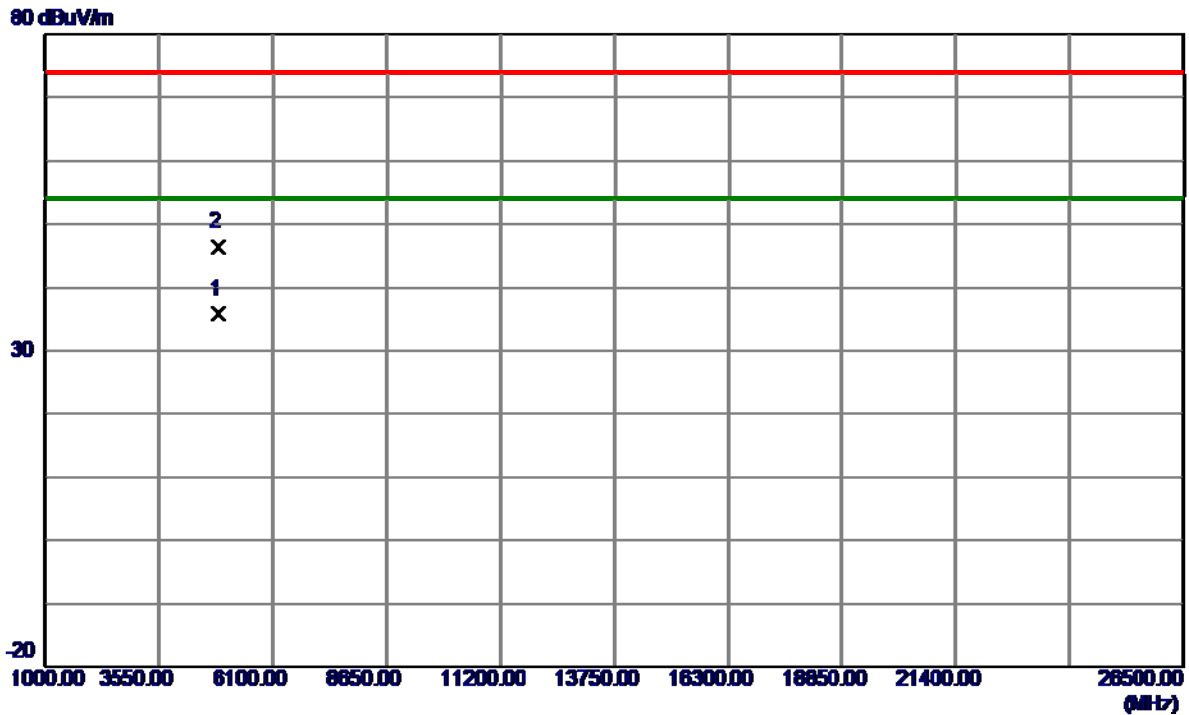


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.7900	31.23	4.58	35.81	54.00	18.19	AVG	
2	4873.8050	41.86	4.58	46.44	74.00	-27.56	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

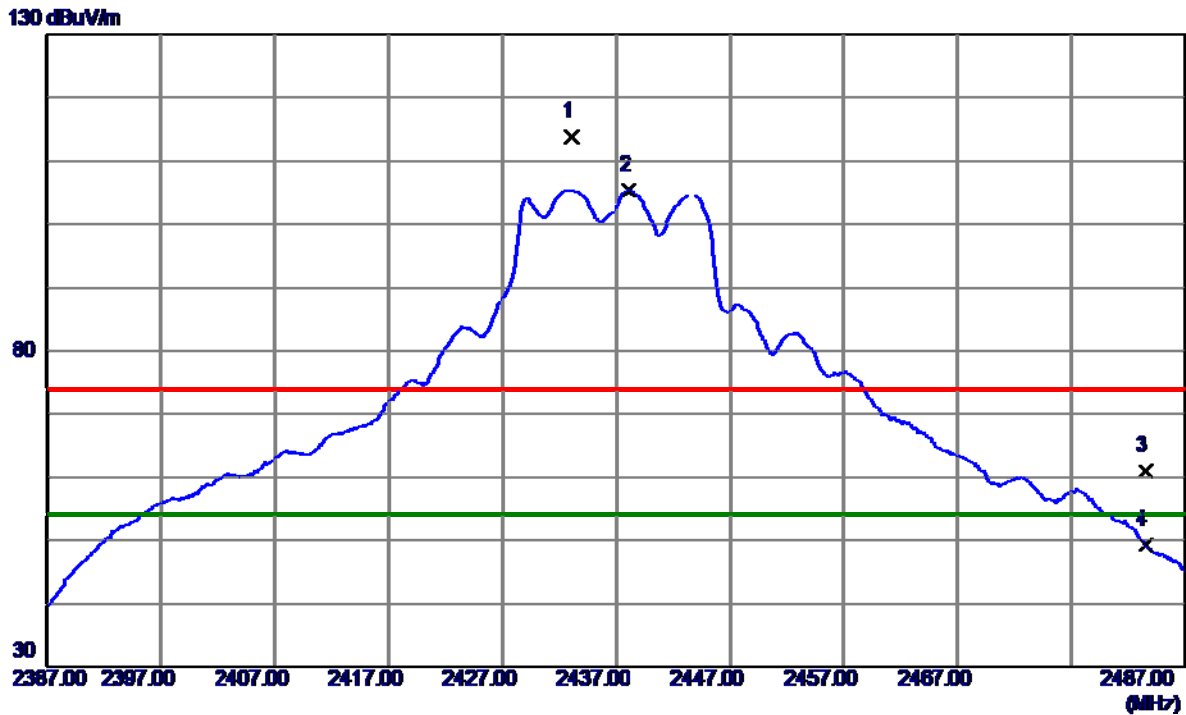


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2433.1000	106.54	7.25	113.79	74.00	39.79	Peak	No Limit
2 *	2438.1000	98.21	7.25	105.46	54.00	51.46	AVG	No Limit
3	2483.5000	53.68	7.25	60.93	74.00	-13.07	Peak	
4	2483.5000	41.99	7.25	49.24	54.00	-4.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2437 MHz
------------	--------------------

Horizontal

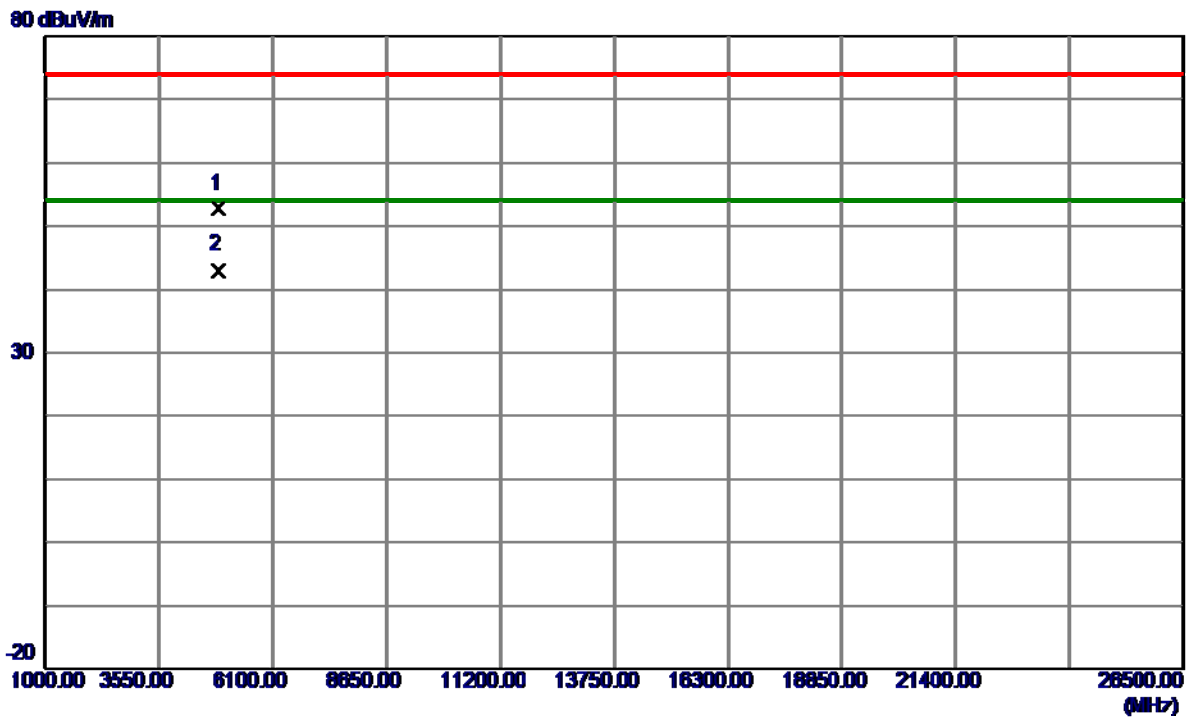

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4869.1400	48.26	4.57	52.83	74.00	21.17	Peak	
2 *	4873.7300	38.52	4.58	43.10	54.00	-10.90	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical

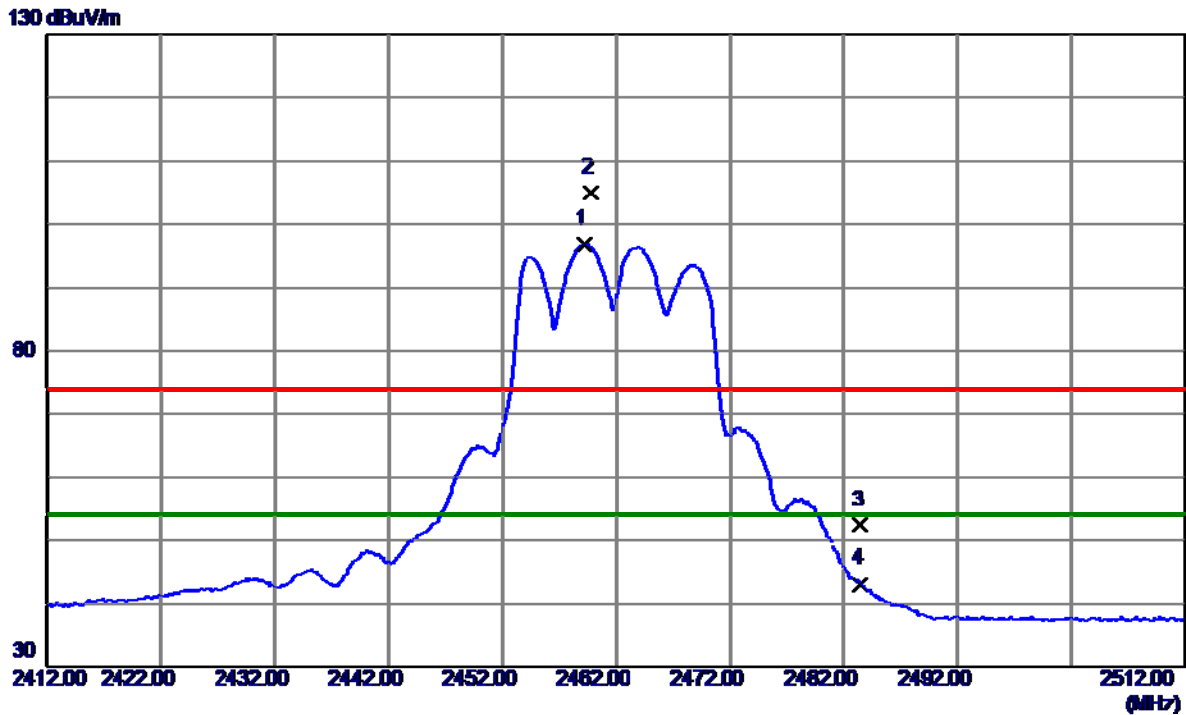


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2459.2000	89.54	7.25	96.79	54.00	42.79	AVG	No Limit
2	2459.8000	97.67	7.25	104.92	74.00	30.92	Peak	No Limit
3	2483.5000	45.19	7.25	52.44	74.00	-21.56	Peak	
4	2483.5000	35.85	7.25	43.10	54.00	-10.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2462 MHz
------------	--------------------

Vertical

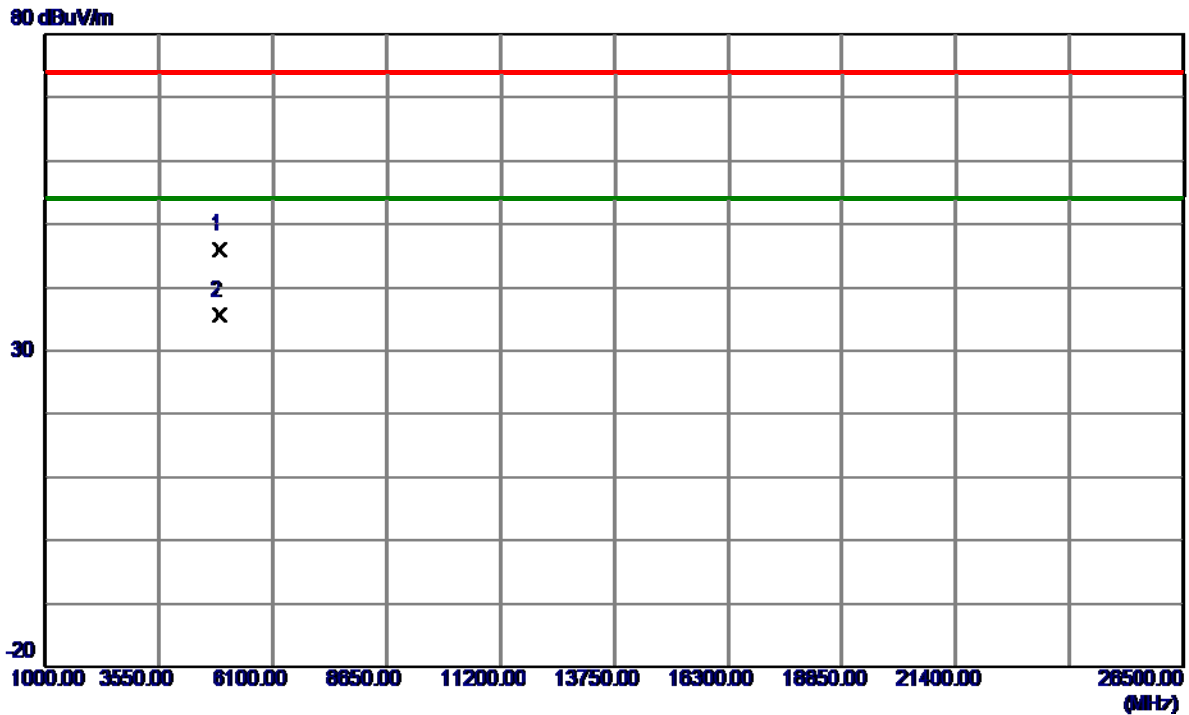


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4918.8250	41.29	4.70	45.99	74.00	28.01	Peak	
2 *	4923.8350	30.80	4.72	35.52	54.00	-18.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

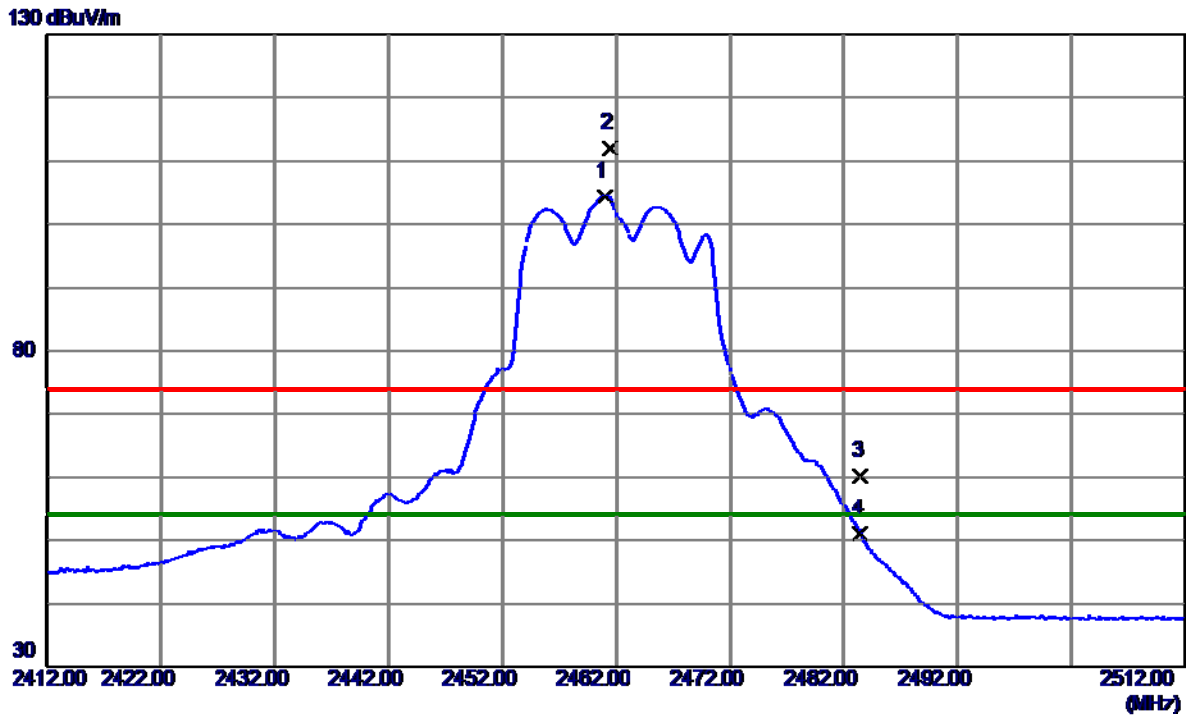


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2461.0000	97.24	7.25	104.49	54.00	50.49	AVG	No Limit
2	2461.4000	104.79	7.25	112.04	74.00	38.04	Peak	No Limit
3	2483.5000	52.95	7.25	60.20	74.00	-13.80	Peak	
4	2483.5000	43.72	7.25	50.97	54.00	-3.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX G Mode 2462 MHz
------------	--------------------

Horizontal

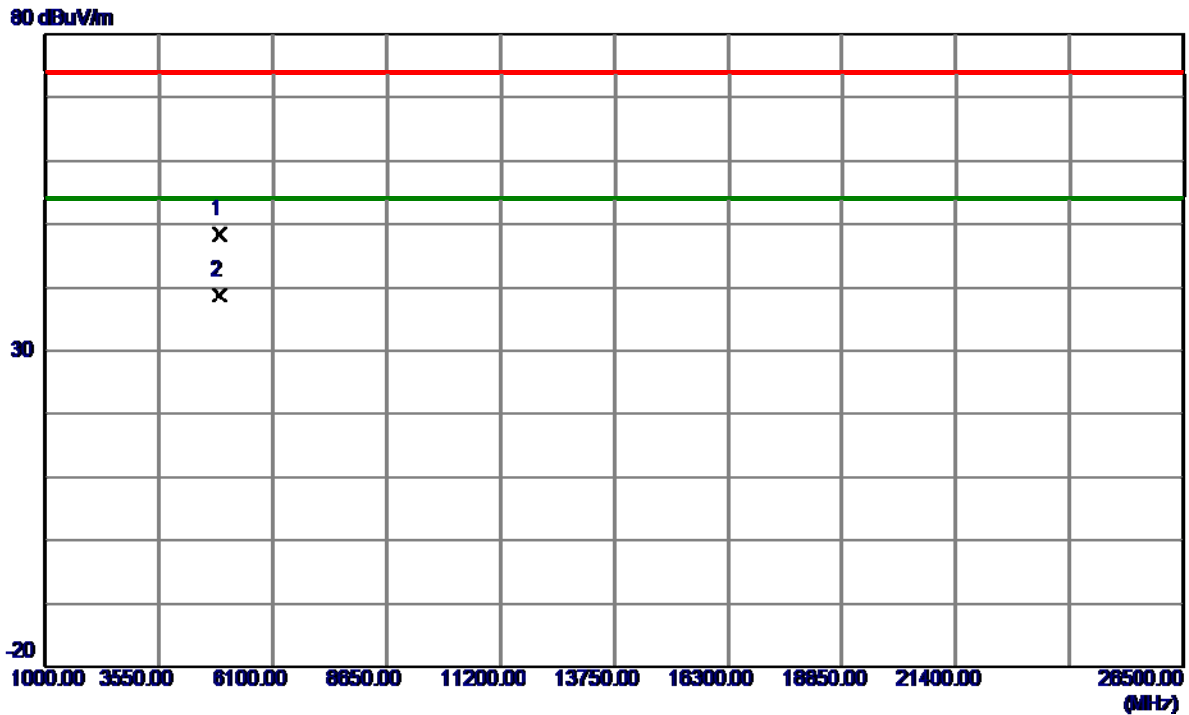


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.5950	43.74	4.72	48.46	74.00	25.54	Peak	
2 *	4923.8500	34.13	4.72	38.85	54.00	-15.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical

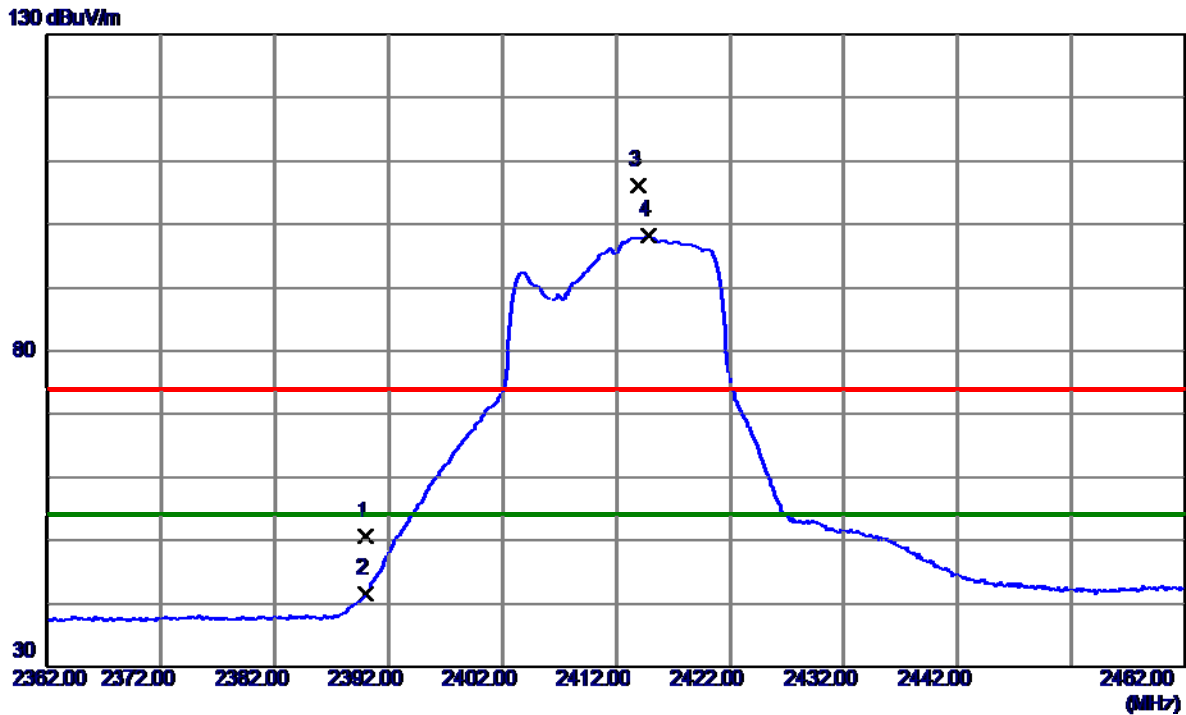


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	43.35	7.26	50.61	74.00	23.39	Peak	
2	2390.0000	34.26	7.26	41.52	54.00	-12.48	AVG	
3	2414.0000	98.97	7.26	106.23	74.00	32.23	Peak	No Limit
4 *	2414.9000	90.85	7.26	98.11	54.00	44.11	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20M Mode 2412 MHz
------------	------------------------

Vertical

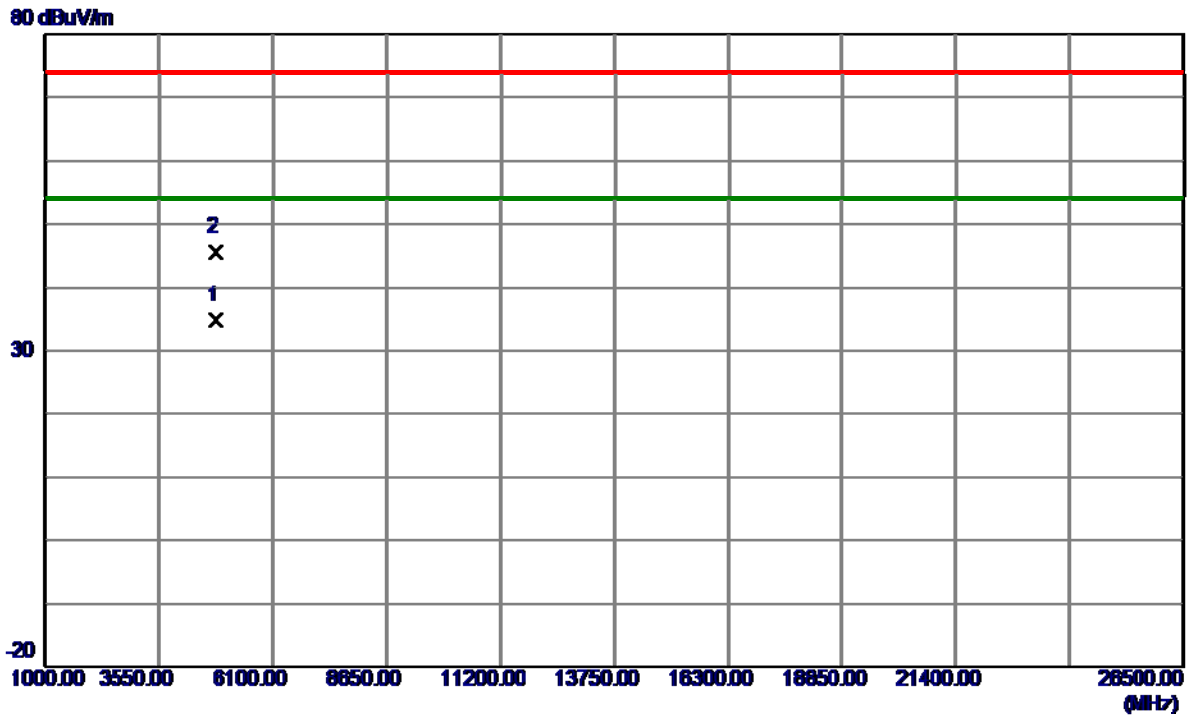


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4821.8300	30.31	4.44	34.75	54.00	19.25	AVG	
2	4824.2300	41.13	4.45	45.58	74.00	-28.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

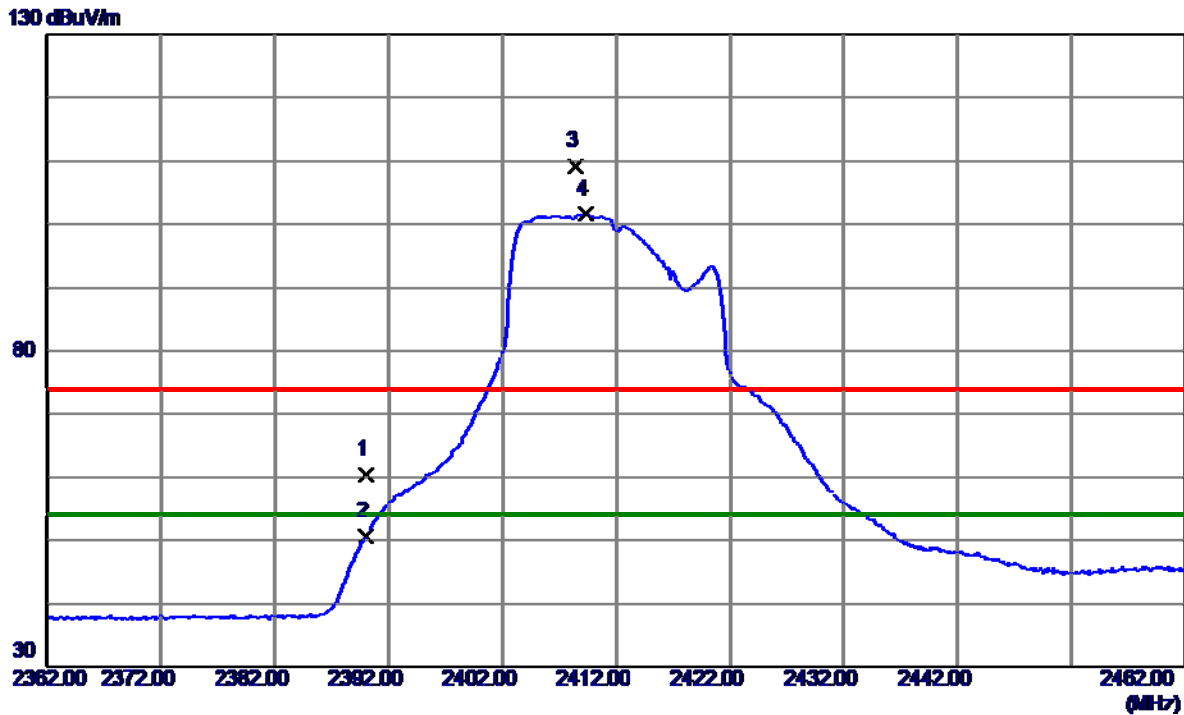


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	53.09	7.26	60.35	74.00	13.65	Peak	
2	2390.0000	43.29	7.26	50.55	54.00	-3.45	AVG	
3	2408.4000	102.02	7.26	109.28	74.00	35.28	Peak	No Limit
4 *	2409.3000	94.32	7.26	101.58	54.00	47.58	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20M Mode 2412 MHz
------------	------------------------

Horizontal

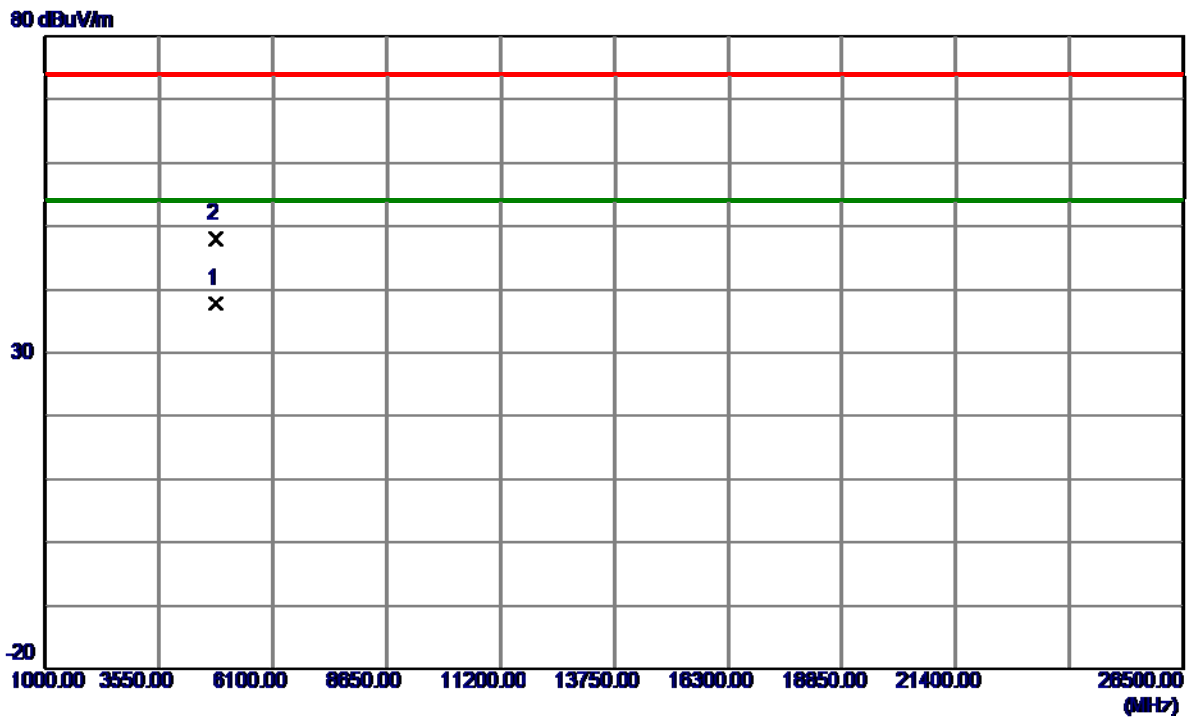


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4822.6800	33.41	4.45	37.86	54.00	16.14	AVG	
2	4823.7200	43.55	4.45	48.00	74.00	-26.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Vertical

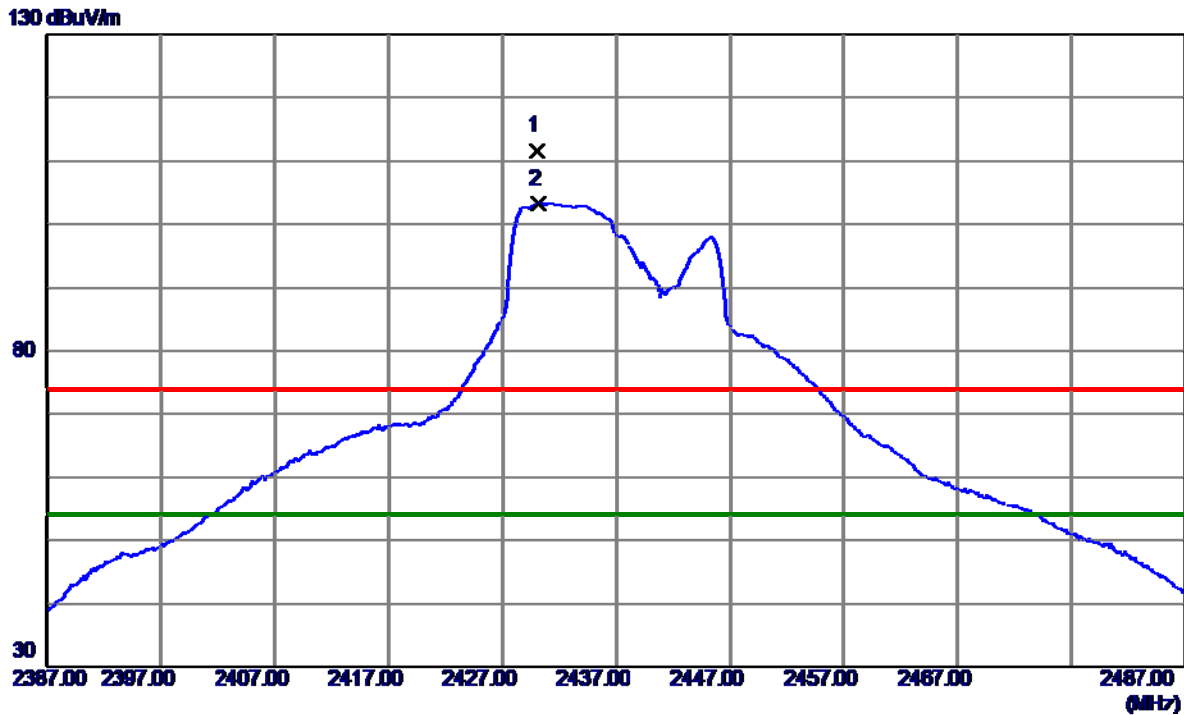


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2430.1000	104.32	7.25	111.57	74.00	37.57	Peak	No Limit
2 *	2430.2000	96.00	7.25	103.25	54.00	49.25	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20M Mode 2437 MHz
------------	------------------------

Vertical

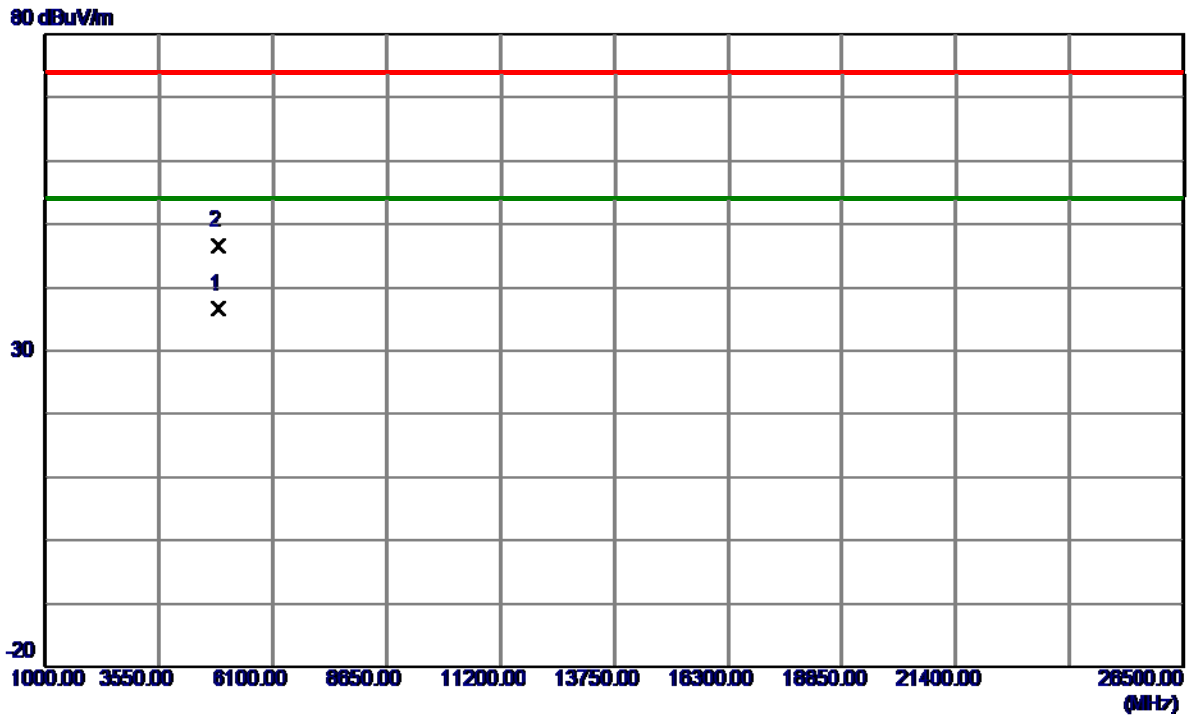


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.5500	31.97	4.58	36.55	54.00	17.45	AVG	
2	4874.1500	41.97	4.58	46.55	74.00	-27.45	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

Horizontal

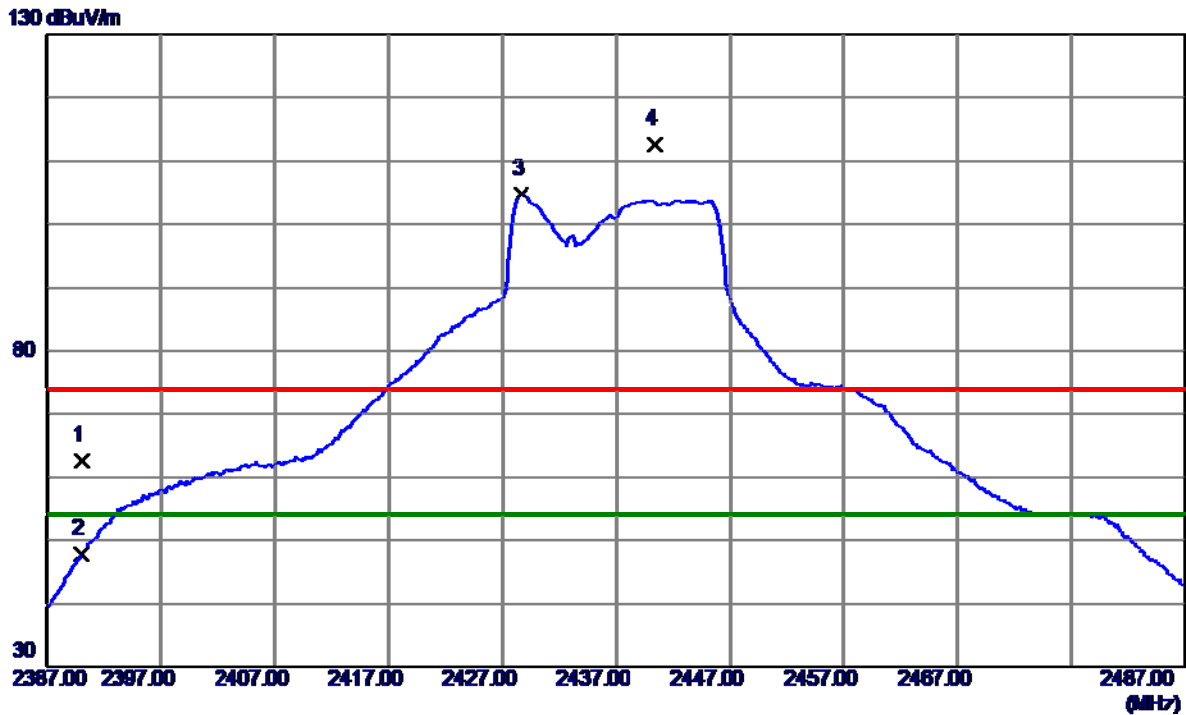


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	55.27	7.26	62.53	74.00	11.47	Peak	
2	2390.0000	40.61	7.26	47.87	54.00	-6.13	AVG	
3 *	2428.7000	97.62	7.25	104.87	54.00	50.87	AVG	No Limit
4	2440.4000	105.40	7.25	112.65	74.00	38.65	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20M Mode 2437 MHz
------------	------------------------

Horizontal

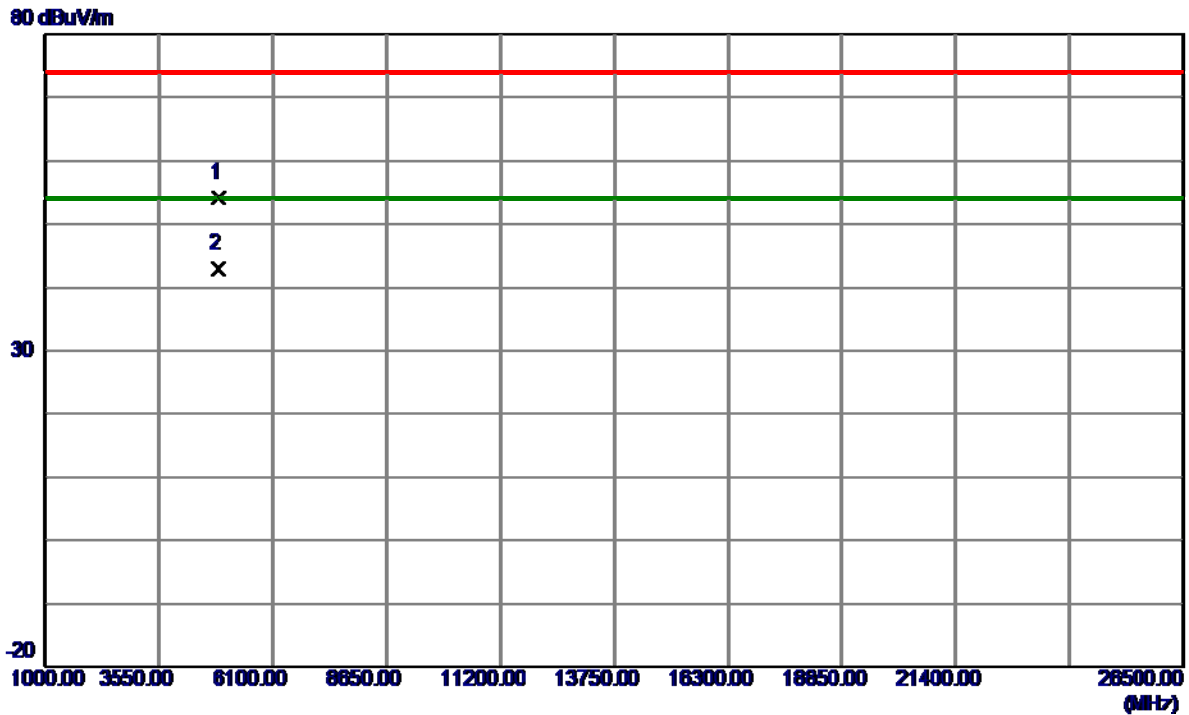


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4872.4400	49.70	4.58	54.28	74.00	19.72	Peak	
2 *	4873.8200	38.41	4.58	42.99	54.00	-11.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical

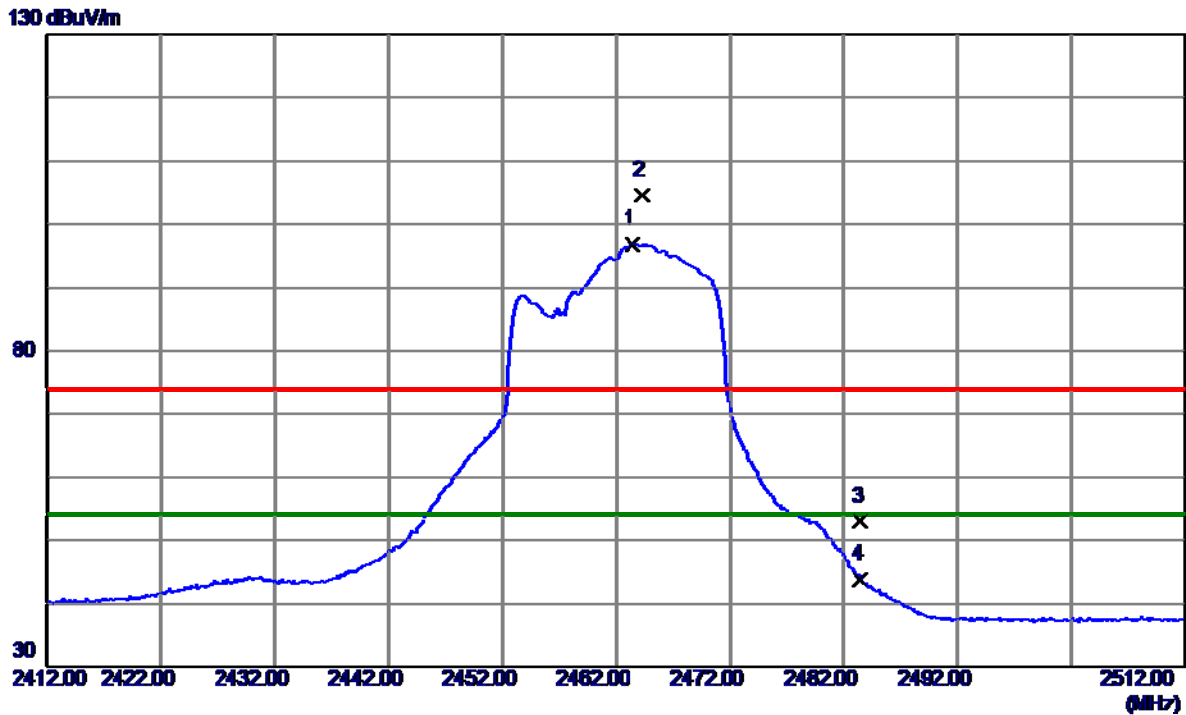


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.4000	89.64	7.25	96.89	54.00	42.89	AVG	No Limit
2	2464.3000	97.29	7.25	104.54	74.00	30.54	Peak	No Limit
3	2483.5000	45.80	7.25	53.05	74.00	-20.95	Peak	
4	2483.5000	36.63	7.25	43.88	54.00	-10.12	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20M Mode 2462 MHz
------------	------------------------

Vertical

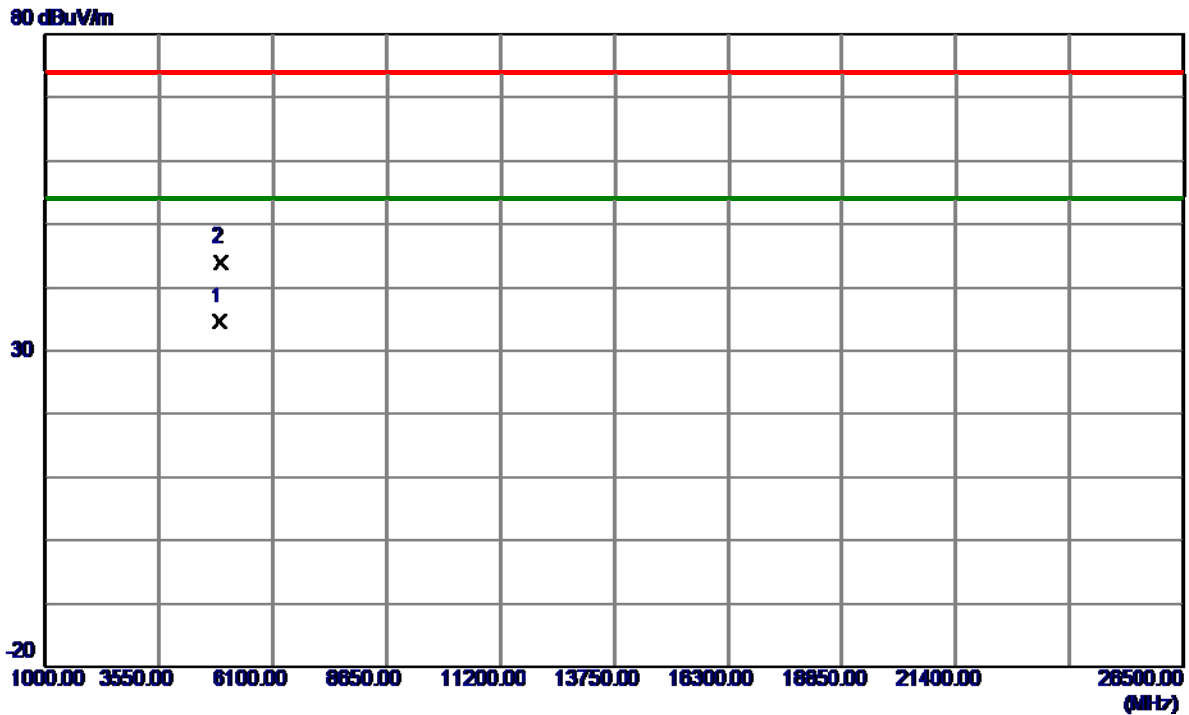


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4921.0400	29.94	4.71	34.65	54.00	19.35	AVG	
2	4927.4300	39.23	4.73	43.96	74.00	-30.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

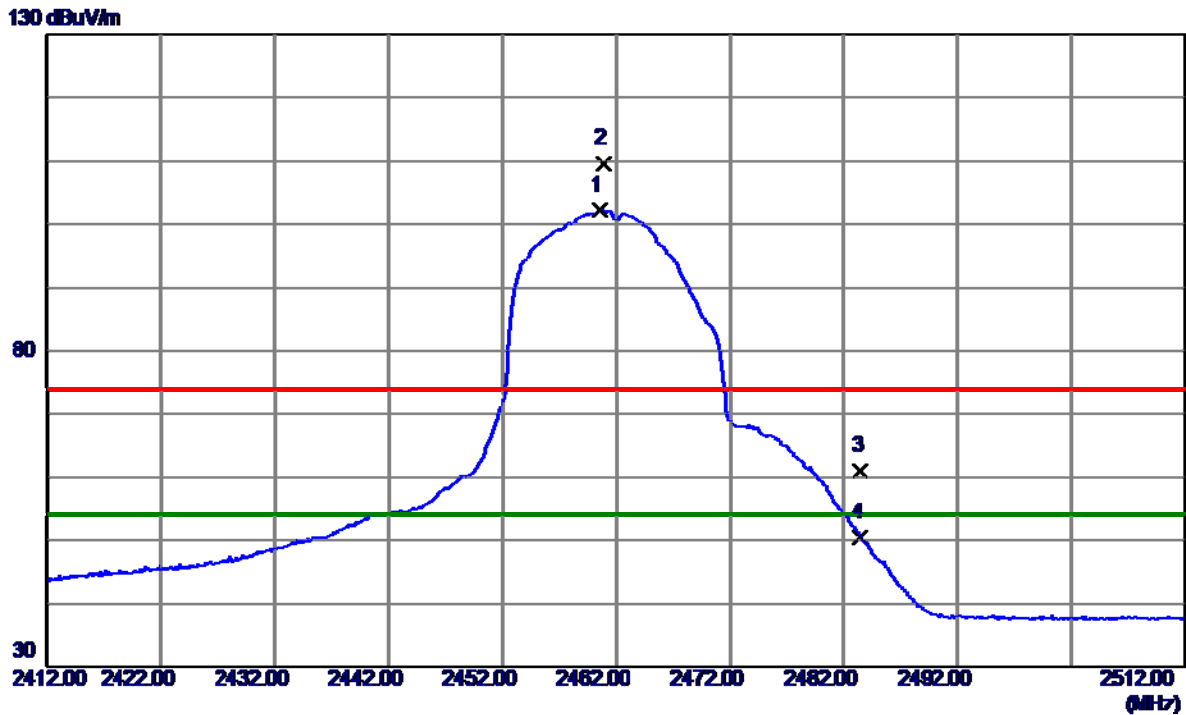


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.6000	94.87	7.25	102.12	54.00	48.12	AVG	No Limit
2	2460.9000	102.35	7.25	109.60	74.00	35.60	Peak	No Limit
3	2483.5000	53.83	7.25	61.08	74.00	-12.92	Peak	
4	2483.5000	43.19	7.25	50.44	54.00	-3.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20M Mode 2462 MHz
------------	------------------------

Horizontal

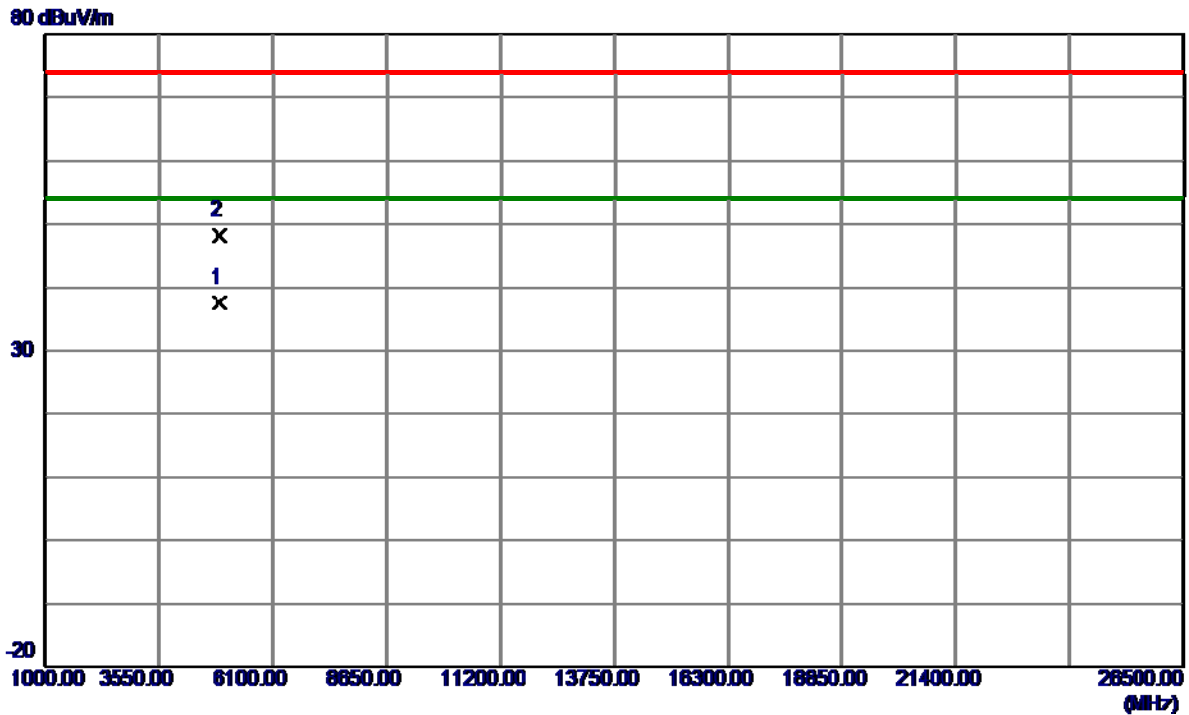


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0800	32.81	4.72	37.53	54.00	16.47	AVG	
2	4924.1100	43.53	4.72	48.25	74.00	-25.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical

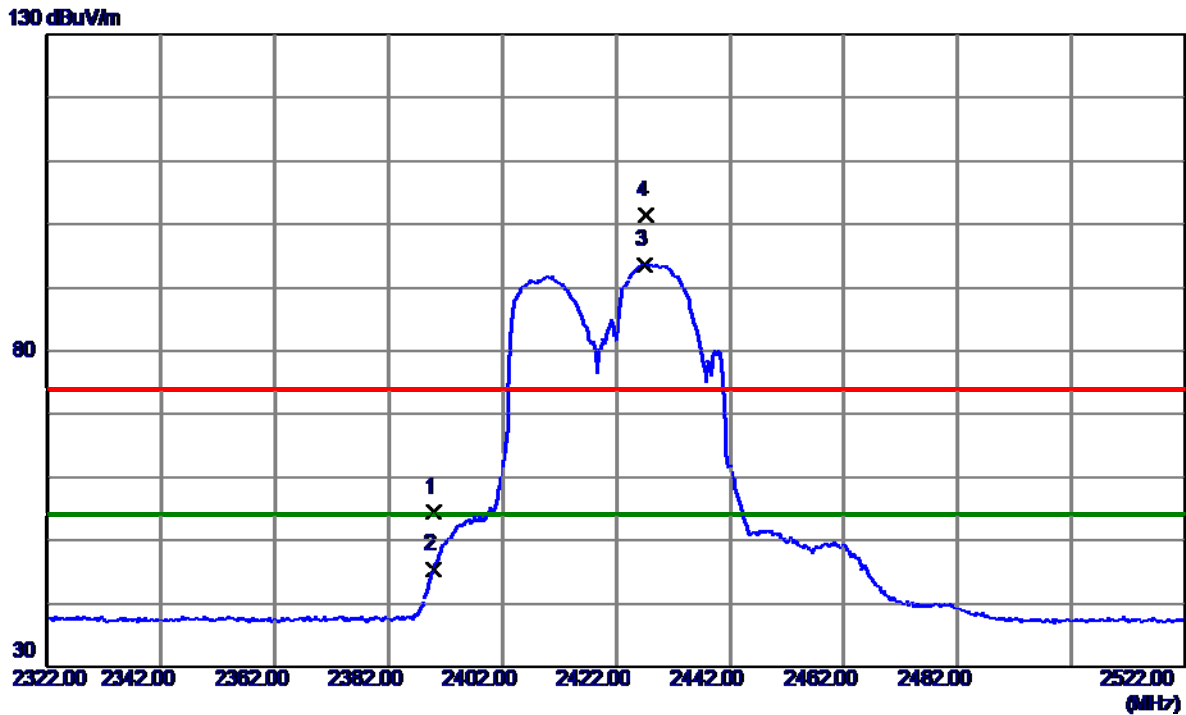


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	47.20	7.26	54.46	74.00	19.54	Peak	
2	2390.0000	38.20	7.26	45.46	54.00	-8.54	AVG	
3 *	2427.2000	86.44	7.25	93.69	54.00	39.69	AVG	No Limit
4	2427.4000	94.07	7.25	101.32	74.00	27.32	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2422MHz
------------	-----------------------

Vertical

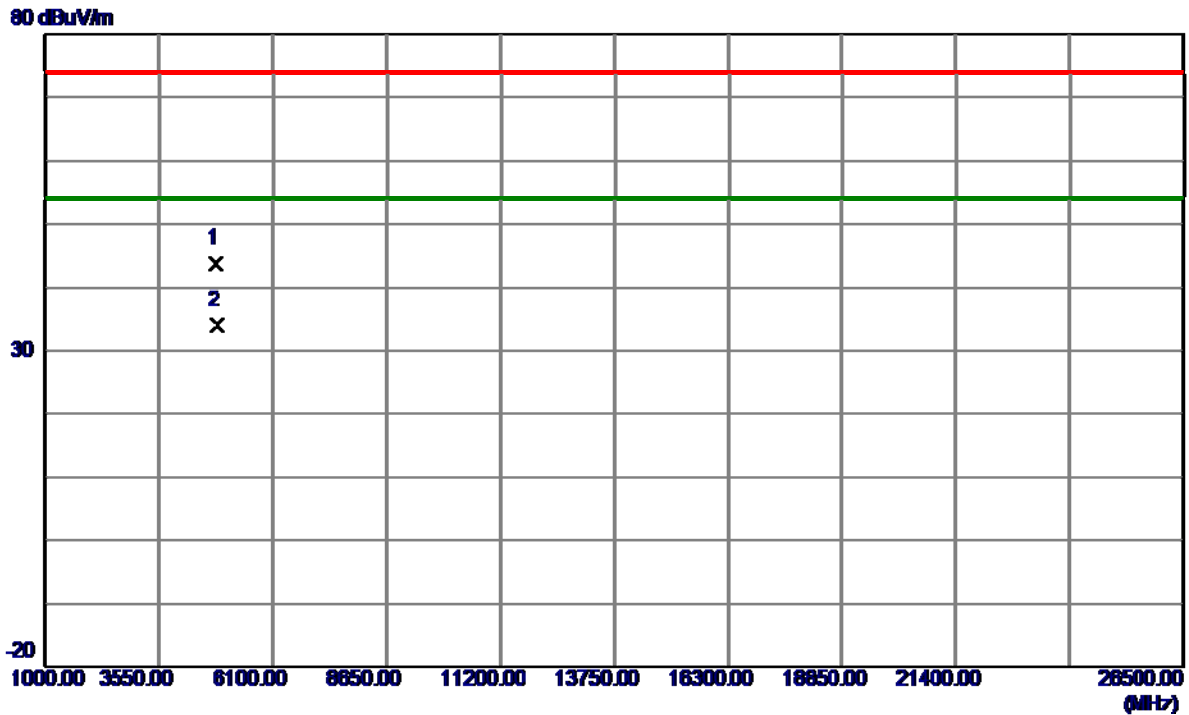


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4822.1600	39.27	4.45	43.72	74.00	30.28	Peak	
2 *	4842.1600	29.46	4.50	33.96	54.00	-20.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

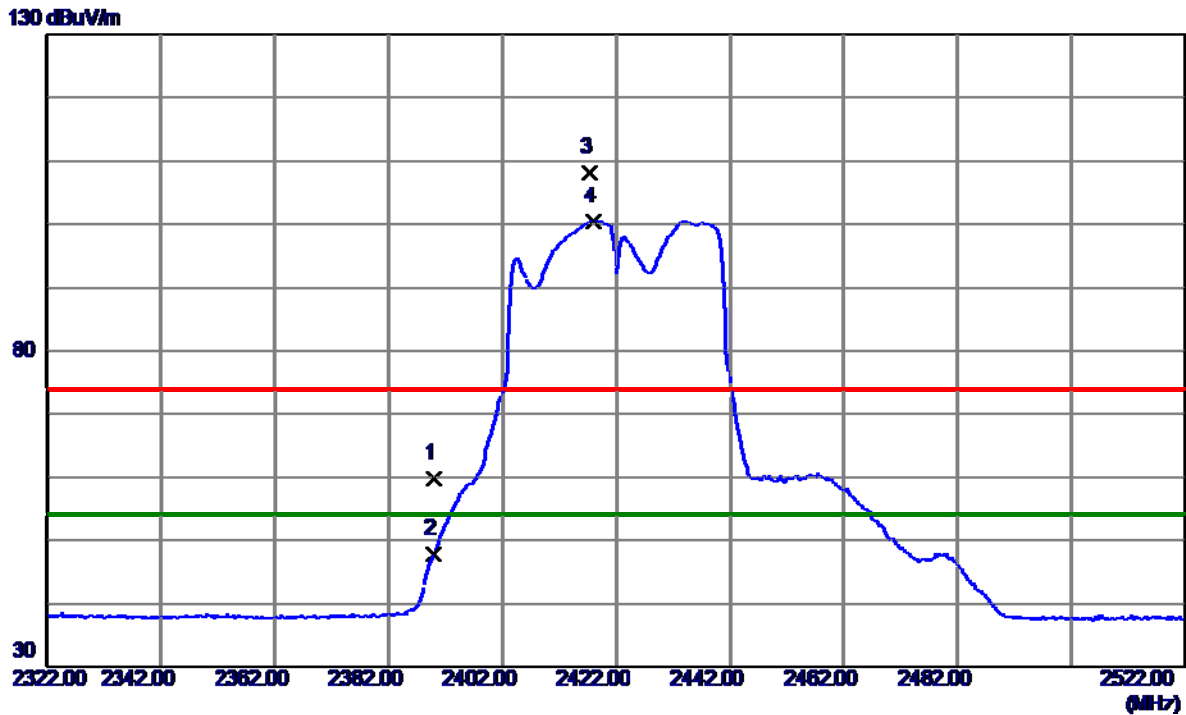


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	52.46	7.26	59.72	74.00	14.28	Peak	
2	2390.0000	40.46	7.26	47.72	54.00	-6.28	AVG	
3	2417.4000	100.95	7.26	108.21	74.00	34.21	Peak	No Limit
4 *	2418.0000	93.12	7.26	100.38	54.00	46.38	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2422MHz
------------	-----------------------

Horizontal

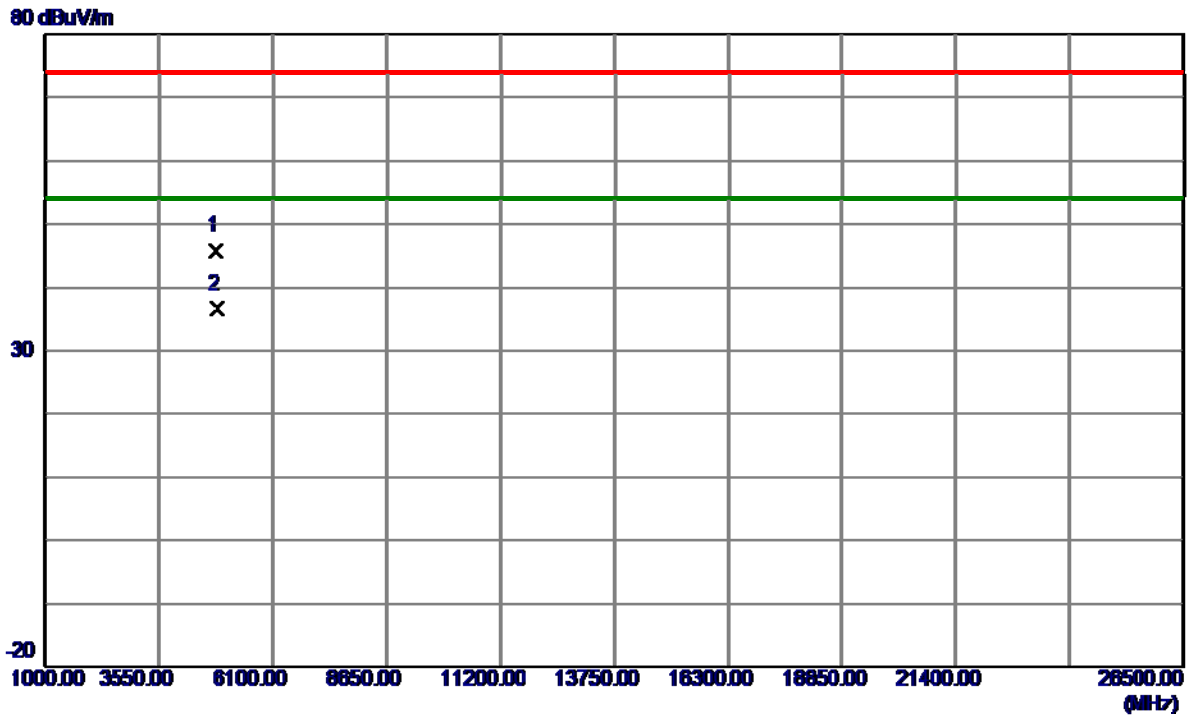


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4839.0000	41.26	4.49	45.75	74.00	28.25	Peak	
2 *	4843.9600	32.13	4.50	36.63	54.00	-17.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

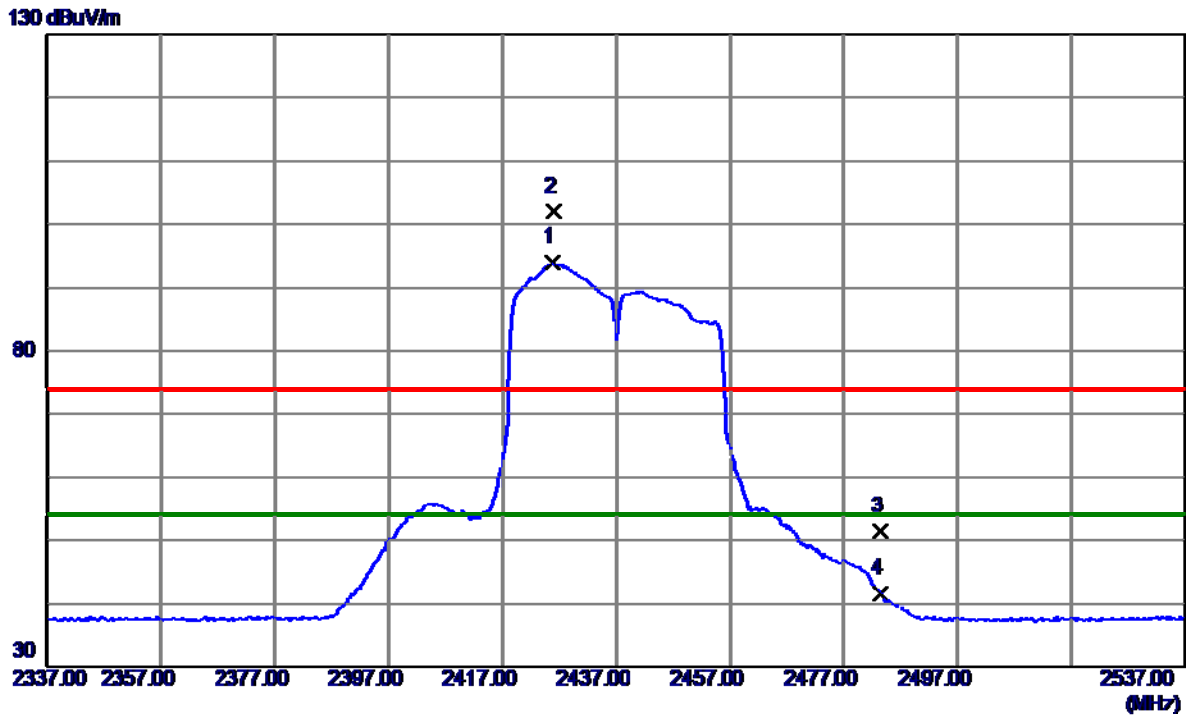


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2425.8000	86.65	7.25	93.90	54.00	39.90	AVG	No Limit
2	2426.2000	94.68	7.25	101.93	74.00	27.93	Peak	No Limit
3	2483.5000	44.11	7.25	51.36	74.00	-22.64	Peak	
4	2483.5000	34.42	7.25	41.67	54.00	-12.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2437 MHz
------------	------------------------

Vertical

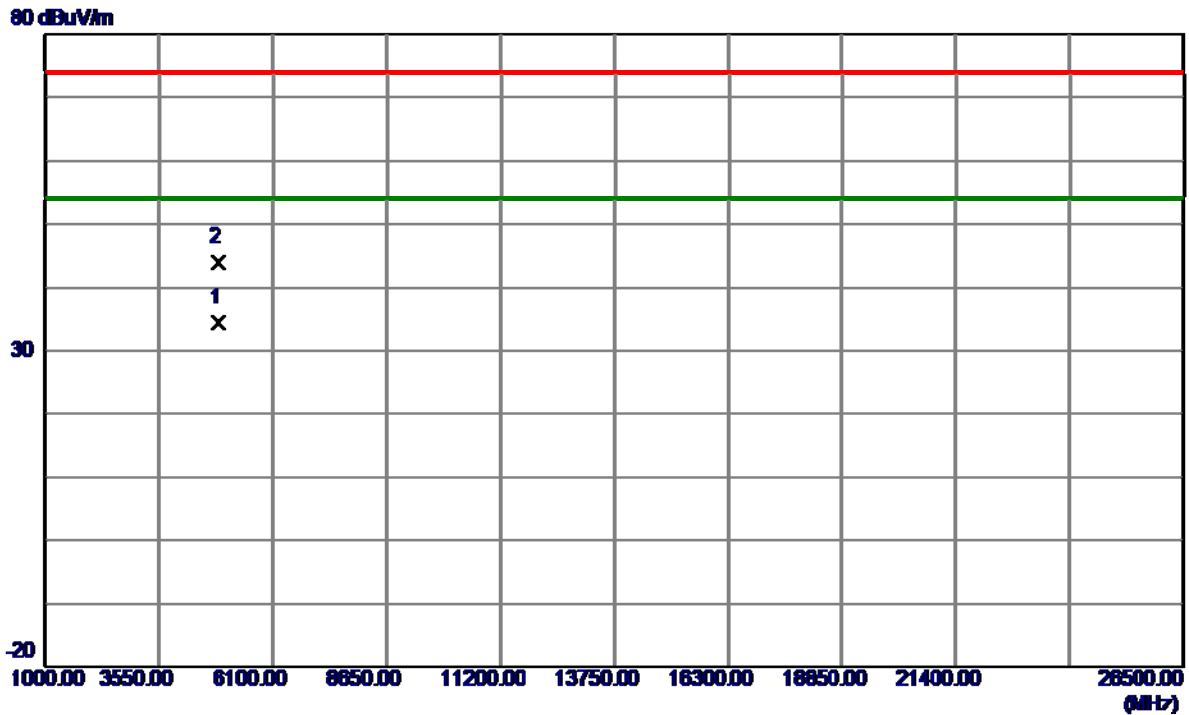


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4870.3200	29.78	4.57	34.35	54.00	19.65	AVG	
2	4873.5200	39.42	4.58	44.00	74.00	-30.00	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

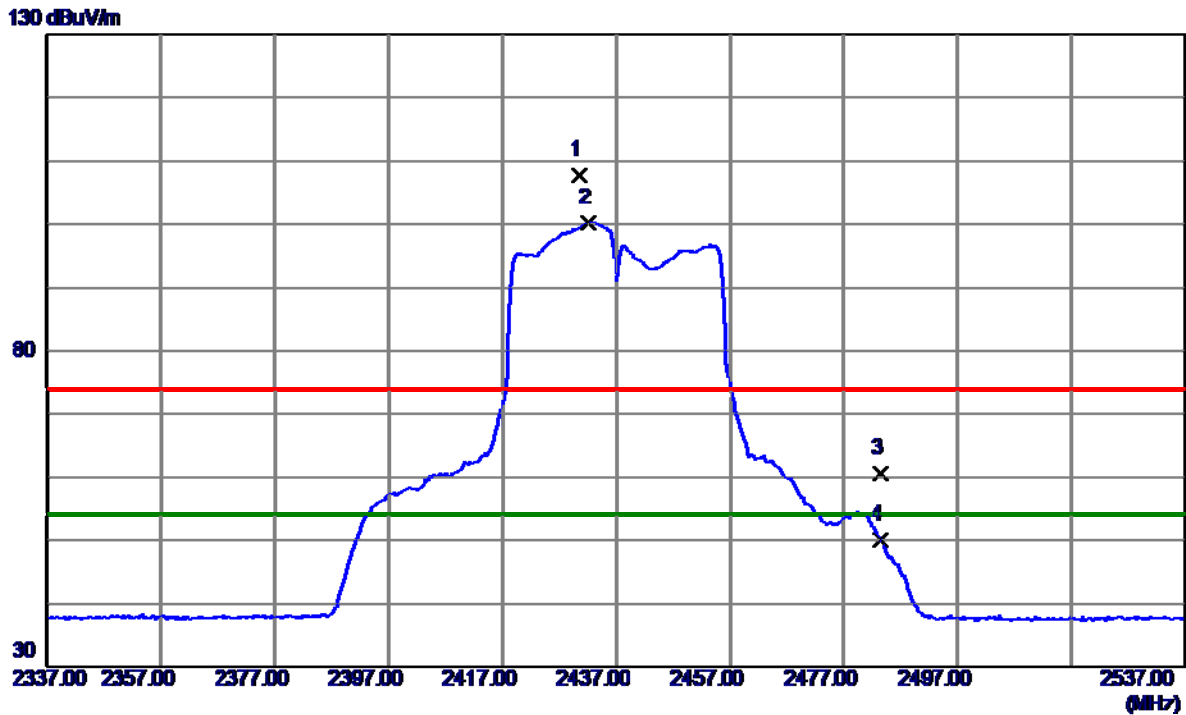


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2430.6000	100.46	7.25	107.71	74.00	33.71	Peak	No Limit
2 *	2432.2000	93.04	7.25	100.29	54.00	46.29	AVG	No Limit
3	2483.5000	53.40	7.25	60.65	74.00	-13.35	Peak	
4	2483.5000	42.68	7.25	49.93	54.00	-4.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2437 MHz
------------	------------------------

Horizontal

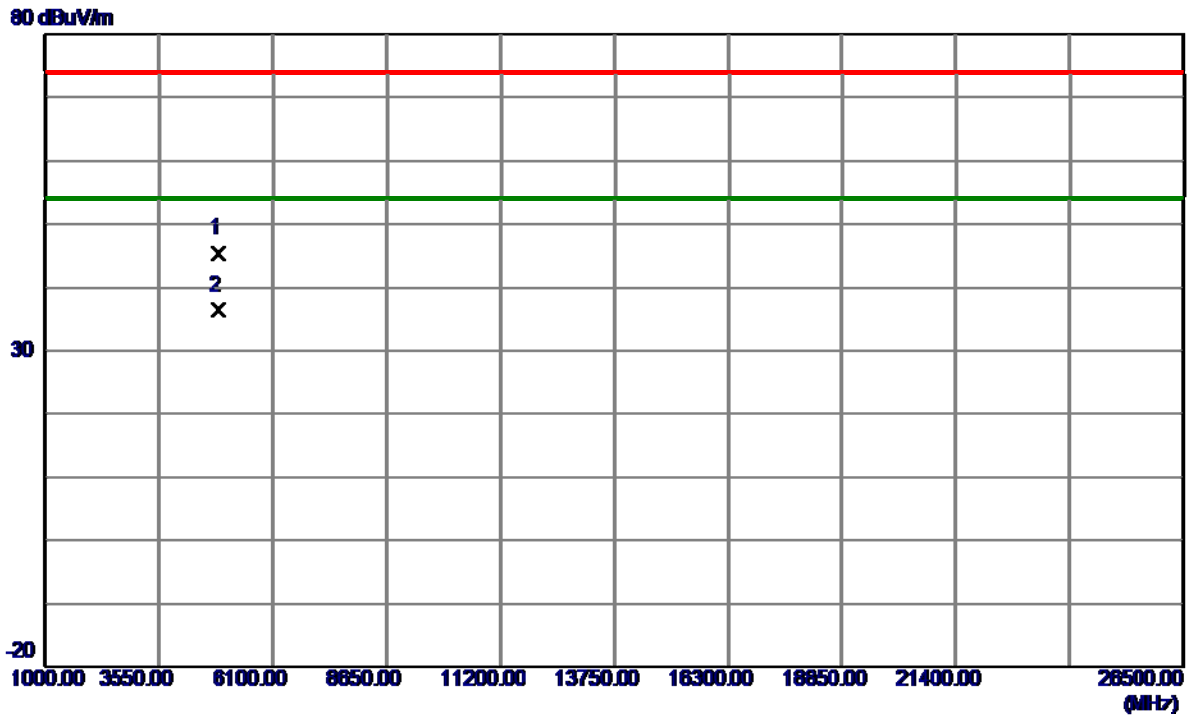


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4872.4000	40.75	4.58	45.33	74.00	28.67	Peak	
2 *	4873.9200	31.83	4.58	36.41	54.00	-17.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical

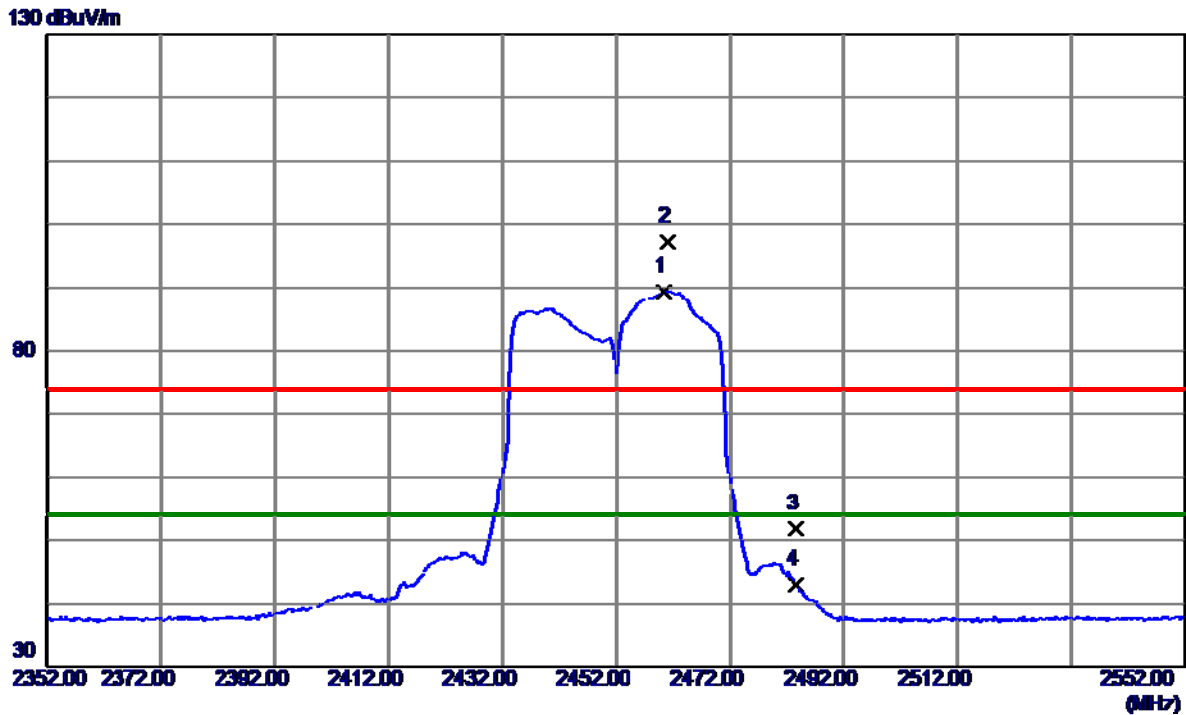


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2460.4000	82.16	7.25	89.41	54.00	35.41	AVG	No Limit
2	2461.2000	89.89	7.25	97.14	74.00	23.14	Peak	No Limit
3	2483.5000	44.51	7.25	51.76	74.00	-22.24	Peak	
4	2483.5000	35.78	7.25	43.03	54.00	-10.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2452 MHz
------------	------------------------

Vertical

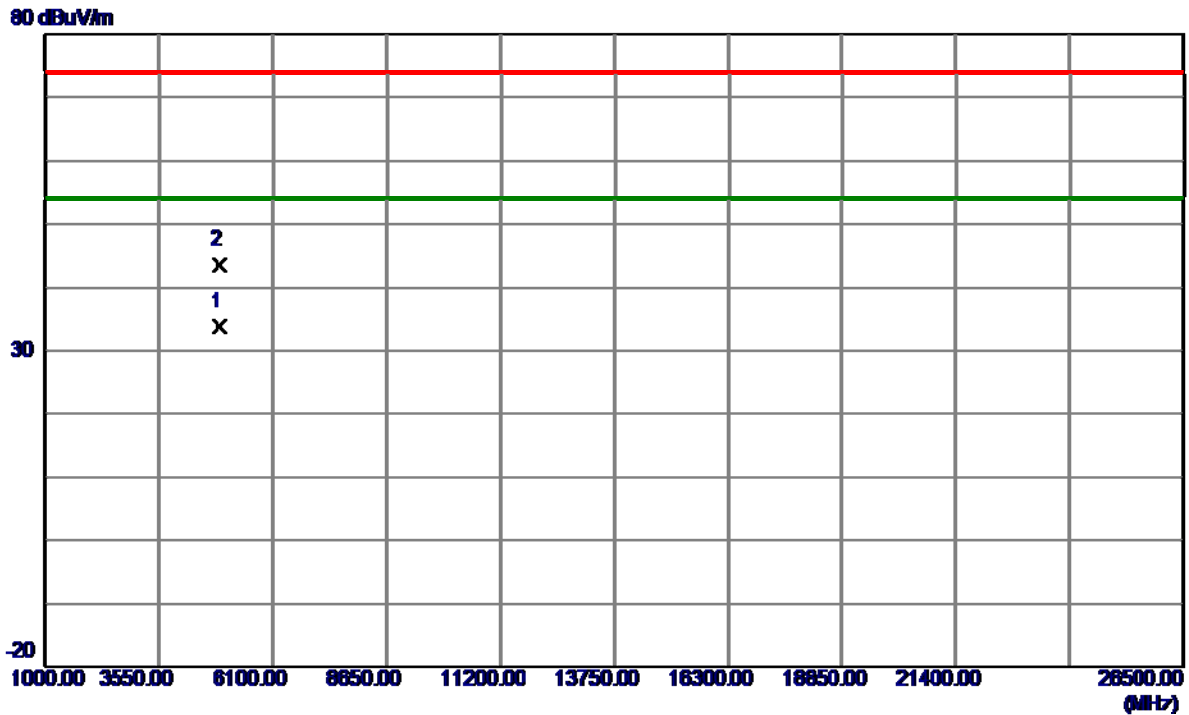


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4903.7000	29.17	4.66	33.83	54.00	20.17	AVG	
2	4905.8100	38.96	4.67	43.63	74.00	-30.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

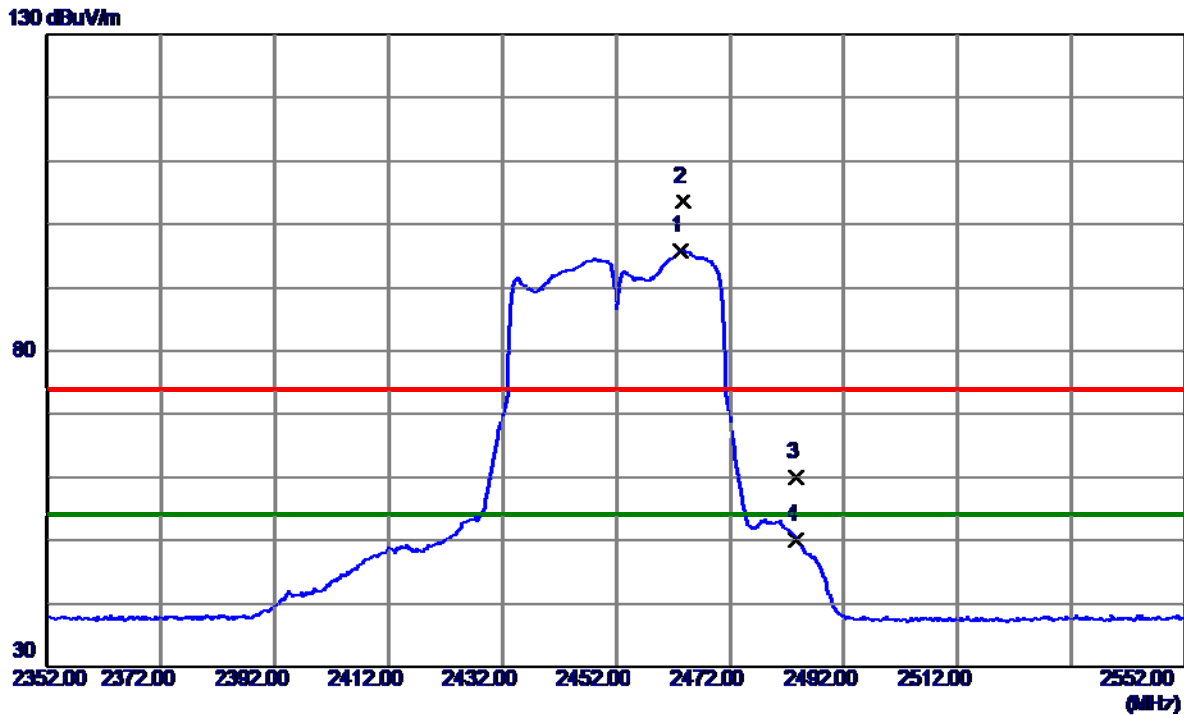


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2463.4000	88.64	7.25	95.89	54.00	41.89	AVG	No Limit
2	2463.8000	96.33	7.25	103.58	74.00	29.58	Peak	No Limit
3	2483.5000	52.75	7.25	60.00	74.00	-14.00	Peak	
4	2483.5000	42.76	7.25	50.01	54.00	-3.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-40M Mode 2452 MHz
------------	------------------------

Horizontal

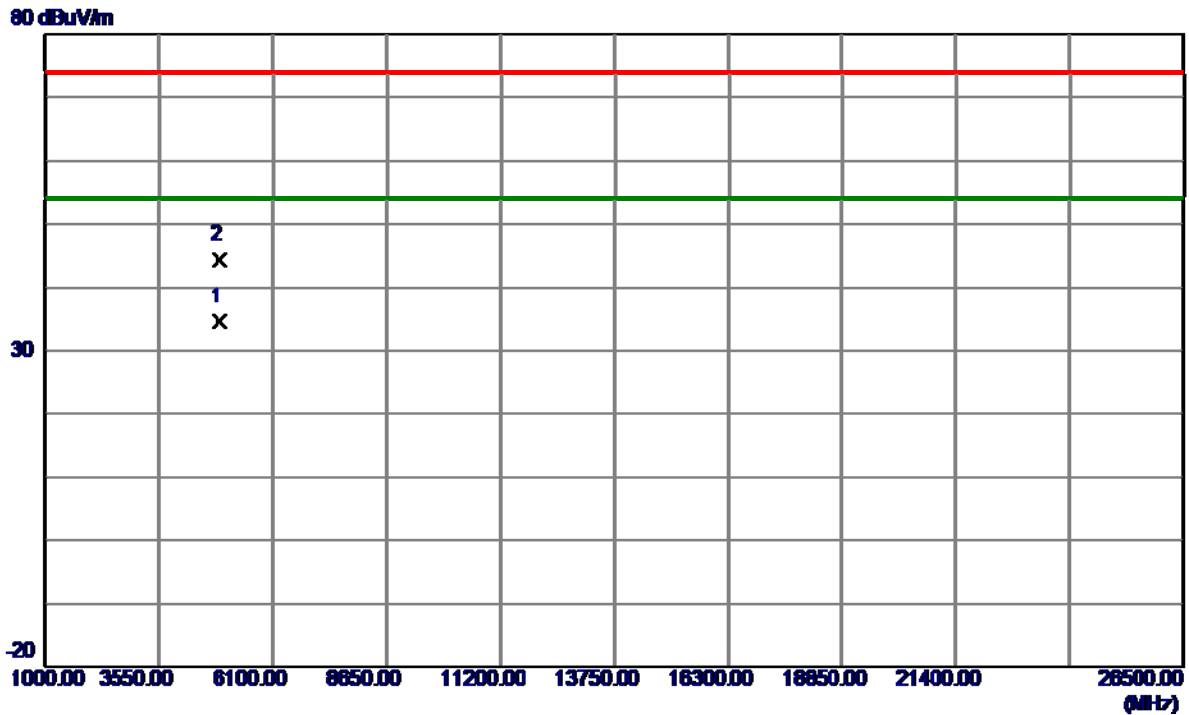

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4904.0099	29.99	4.66	34.65	54.00	19.35	AVG	
2	4910.9600	39.75	4.68	44.43	74.00	-29.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

The worst case of simultaneous transmission:

Test Mode: TX WLAN BLE 2Mbps Mode 2402MHz + WLAN 2.4G B Mode 2462 MHz

Vertical

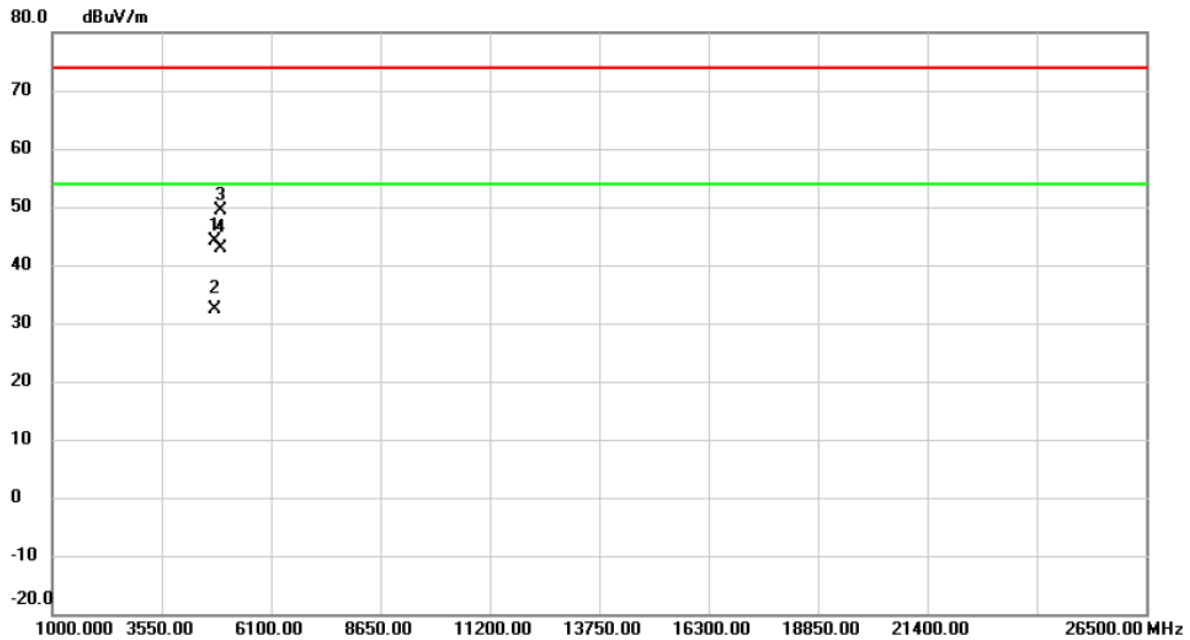


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4804.123	39.69	4.40	44.09	74.00	-29.91	peak	
2		4804.865	27.98	4.40	32.38	54.00	-21.62	AVG	
3		4923.945	44.55	4.71	49.26	74.00	-24.74	peak	
4	*	4923.967	38.28	4.71	42.99	54.00	-11.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX WLAN BLE 2Mbps Mode 2402MHz + WLAN 2.4G B Mode 2462 MHz
------------	--

Horizontal

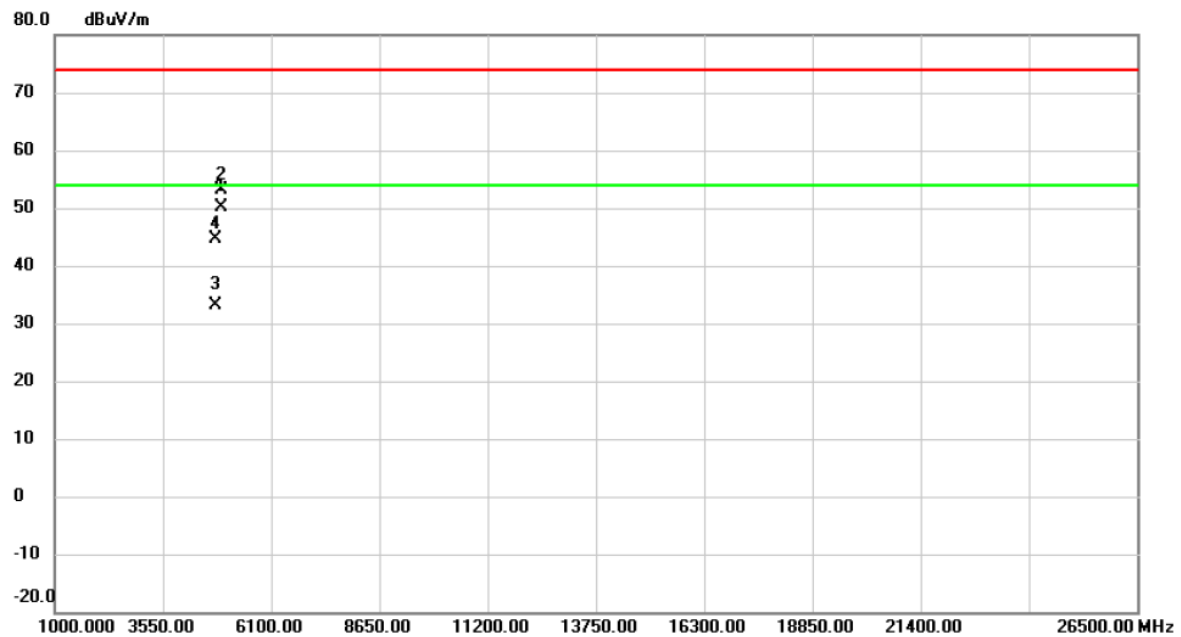

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4924.170	45.54	4.71	50.25	54.00	-3.75	AVG	
2		4924.312	48.47	4.71	53.18	74.00	-20.82	peak	
3		4804.110	28.79	4.40	33.19	54.00	-20.81	AVG	
4		4801.425	40.25	4.39	44.64	74.00	-29.36	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX E - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	9.62	500	Complies
06	2437	9.67	500	Complies
11	2462	10.07	500	Complies

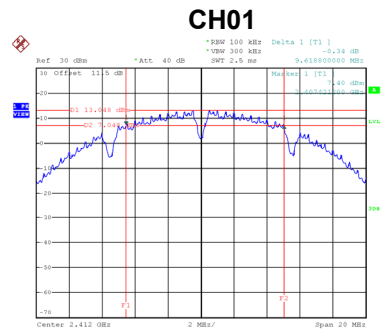

Date: 26.JAN.2021 17:54:59

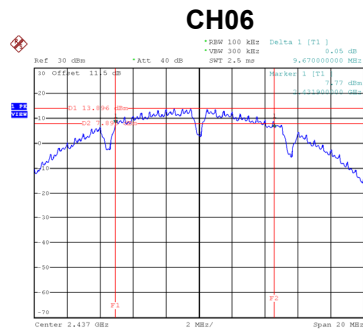


Date: 26.JAN.2021 18:13:04

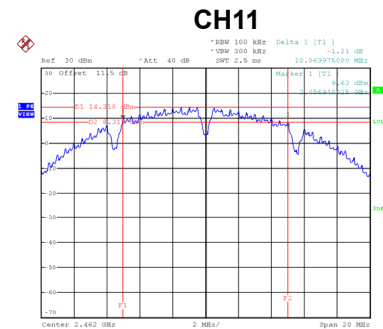


Date: 26.JAN.2021 20:19:44


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	15.28	Complies
06	2437	16.00	Complies
11	2462	16.16	Complies

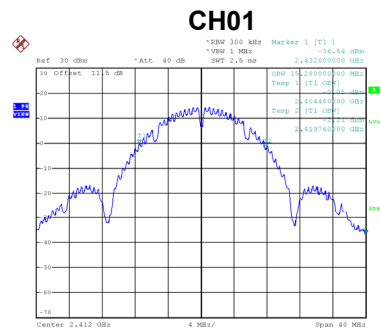

Date: 26.JAN.2021 17:54:21

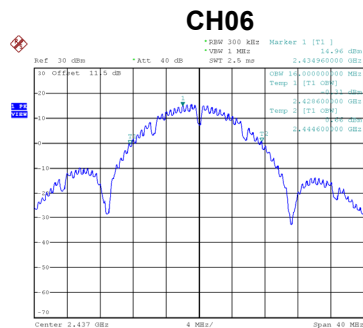


Date: 26.JAN.2021 18:13:12

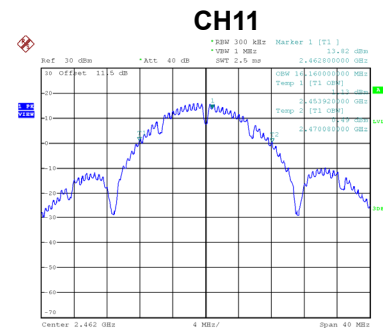


Date: 26.JAN.2021 20:19:51

Test Mode	TX G Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	16.35	500	Complies
06	2437	15.76	500	Complies
11	2462	15.76	500	Complies

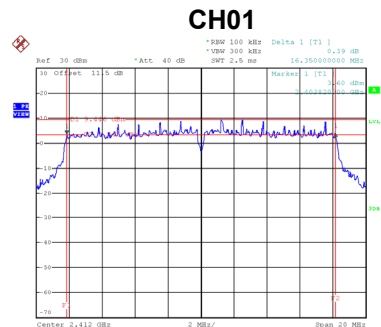

Date: 26.JAN.2021 20:35:14

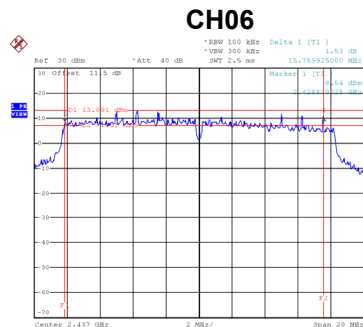


Date: 26.JAN.2021 20:39:00

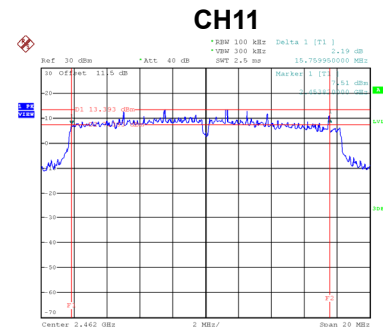


Date: 26.JAN.2021 20:45:43


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	16.96	Complies
06	2437	18.16	Complies
11	2462	17.84	Complies

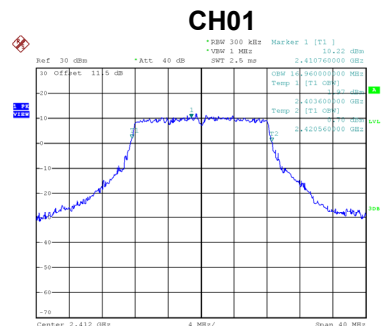

Date: 26.JAN.2021 20:35:21

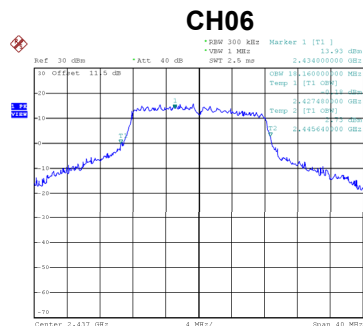


Date: 26.JAN.2021 20:39:07

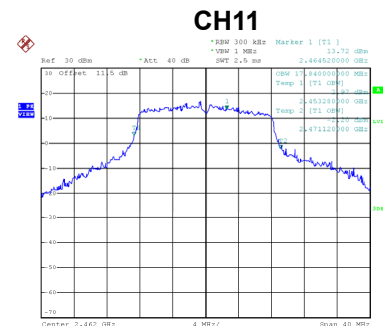


Date: 26.JAN.2021 20:45:50

Test Mode	TX N-20M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.58	500	Complies
06	2437	16.40	500	Complies
11	2462	15.48	500	Complies

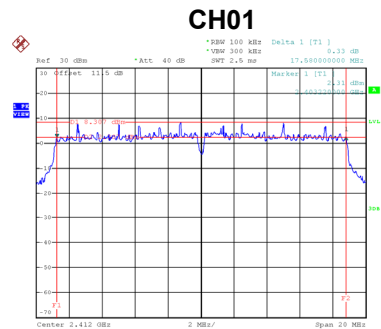

Date: 27.JAN.2021 09:29:17

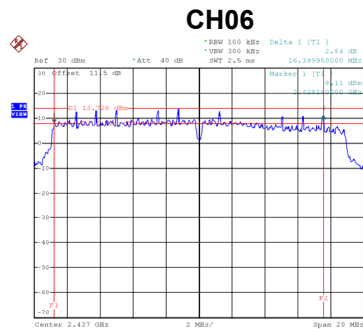


Date: 27.JAN.2021 09:43:15

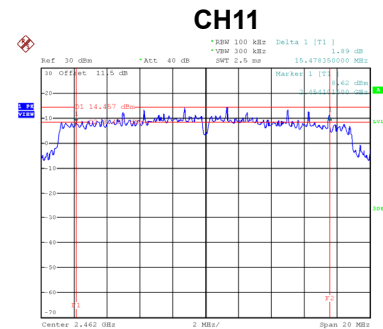


Date: 27.JAN.2021 09:46:01


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	18.08	Complies
06	2437	18.64	Complies
11	2462	24.64	Complies

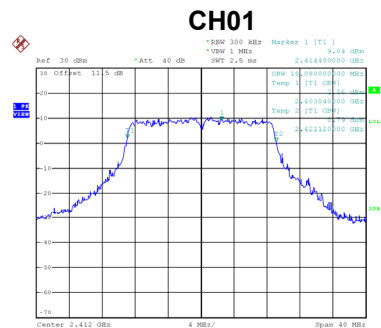

Date: 27.JAN.2021 09:29:24

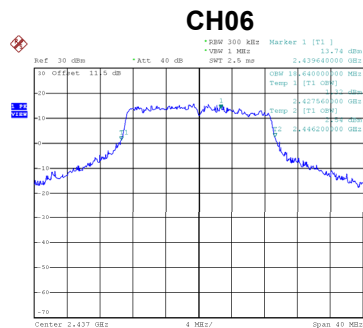


Date: 27.JAN.2021 09:43:22

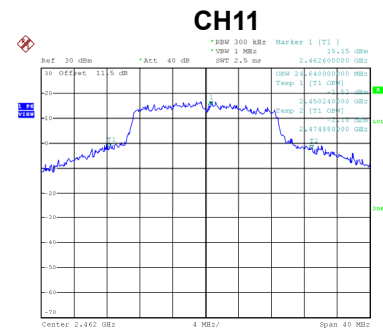


Date: 27.JAN.2021 09:46:08

Test Mode	TX N-40M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	35.24	500	Complies
06	2437	35.52	500	Complies
09	2452	35.84	500	Complies

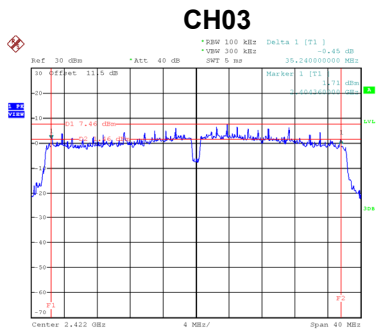

Date: 27.JAN.2021 09:56:30

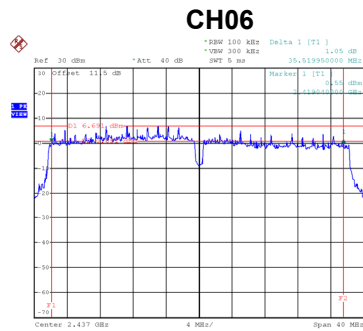


Date: 27.JAN.2021 10:01:57

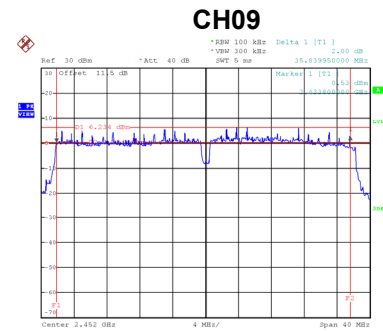


Date: 27.JAN.2021 10:21:35


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.48	Complies
06	2437	36.64	Complies
09	2452	36.80	Complies

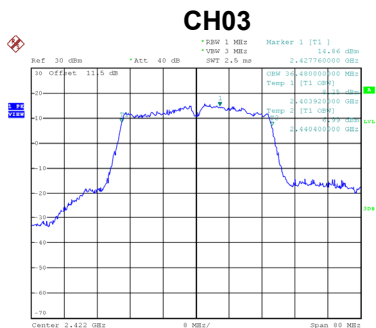

Date: 27.JAN.2021 09:59:35

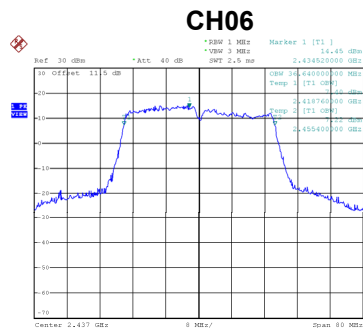

Date: 27.JAN.2021 10:02:04

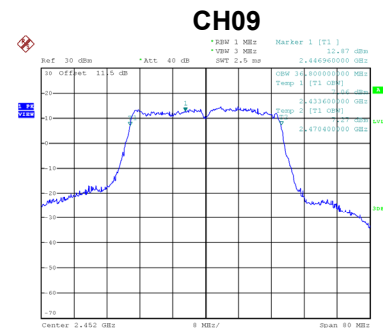

Date: 27.JAN.2021 10:21:42

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	8.77	0.00	8.77	30.00	1.0000	Complies
06	2437	8.73	0.00	8.73	30.00	1.0000	Complies
11	2462	8.81	0.00	8.81	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	8.38	0.00	8.38	30.00	1.0000	Complies
06	2437	8.36	0.00	8.36	30.00	1.0000	Complies
11	2462	8.49	0.00	8.49	30.00	1.0000	Complies

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	11.59	30.00	1.0000	Complies
06	2437	11.56	30.00	1.0000	Complies
11	2462	11.66	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	8.09	0.00	8.09	30.00	1.0000	Complies
06	2437	8.16	0.00	8.16	30.00	1.0000	Complies
11	2462	8.29	0.00	8.29	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	8.43	0.00	8.43	30.00	1.0000	Complies
06	2437	8.45	0.00	8.45	30.00	1.0000	Complies
11	2462	8.49	0.00	8.49	30.00	1.0000	Complies

Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	11.27	30.00	1.0000	Complies
06	2437	11.32	30.00	1.0000	Complies
11	2462	11.40	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	7.46	0.09	7.55	30.00	1.0000	Complies
06	2437	7.46	0.09	7.55	30.00	1.0000	Complies
11	2462	7.58	0.09	7.67	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	7.49	0.09	7.58	30.00	1.0000	Complies
06	2437	7.57	0.09	7.66	30.00	1.0000	Complies
11	2462	7.70	0.09	7.79	30.00	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	10.58	30.00	1.0000	Complies
06	2437	10.62	30.00	1.0000	Complies
11	2462	10.74	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	7.98	0.22	8.20	30.00	1.0000	Complies
06	2437	8.07	0.22	8.29	30.00	1.0000	Complies
09	2452	8.02	0.22	8.24	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Avg Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	8.10	0.22	8.32	30.00	1.0000	Complies
06	2437	8.12	0.22	8.34	30.00	1.0000	Complies
09	2452	7.89	0.22	8.11	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------


Channel	Frequency (MHz)	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	11.27	30.00	1.0000	Complies
06	2437	11.33	30.00	1.0000	Complies
09	2452	11.19	30.00	1.0000	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Test Mode


TX B Mode_Ant. 1

Bandedge-CH01

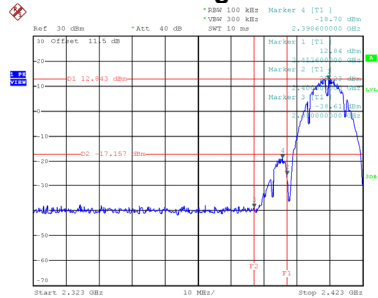


Date: 26.JAN.2021 17:53:47

Bandedge-CH11

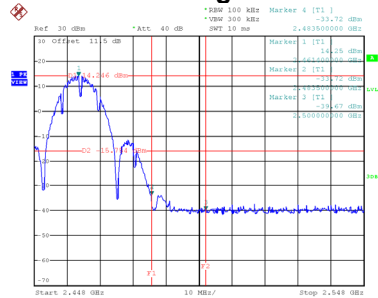


Date: 26.JAN.2021 20:20:15


CH01 – 10th Harmonic of the fundamental frequency

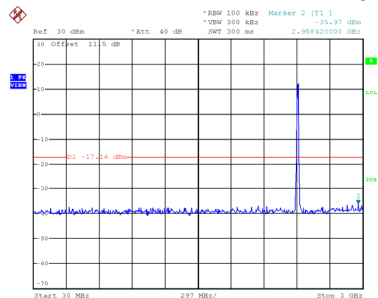

Date: 26.JAN.2021 17:54:00

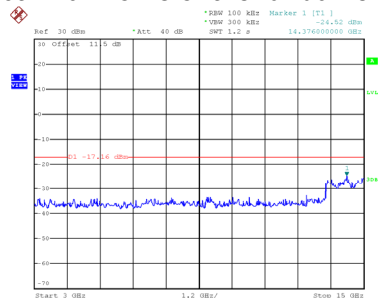


Date: 26.JAN.2021 17:54:07

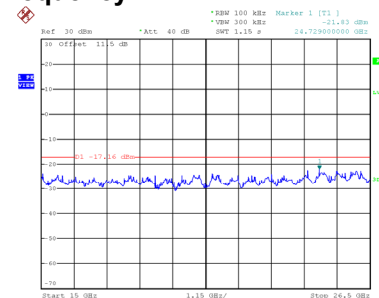


Date: 26.JAN.2021 17:54:14


CH06 – 10th Harmonic of the fundamental frequency

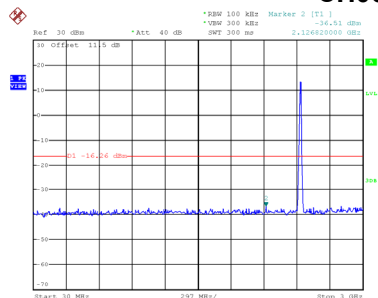

Date: 26.JAN.2021 18:38:49

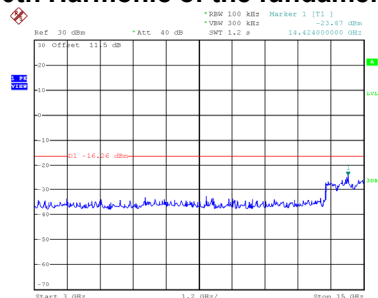


Date: 26.JAN.2021 18:38:56

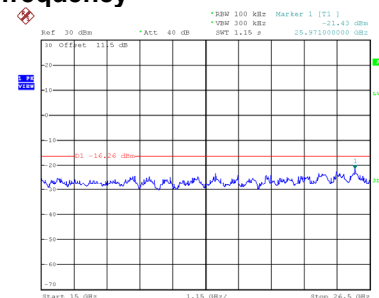


Date: 26.JAN.2021 18:39:03


CH11 – 10th Harmonic of the fundamental frequency

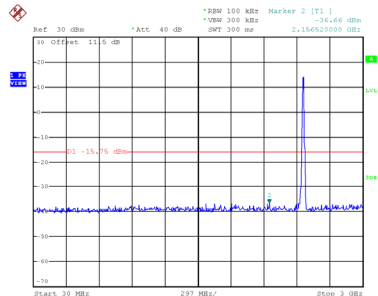

Date: 26.JAN.2021 20:20:28

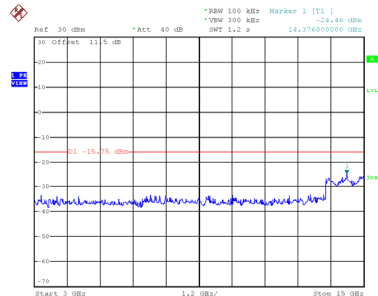


Date: 26.JAN.2021 20:20:35

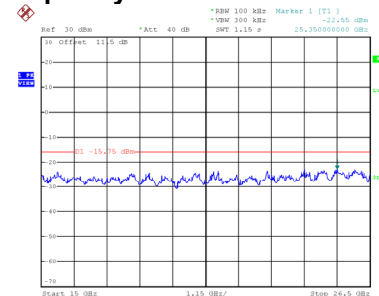

Date: 26.JAN.2021 20:20:42


Test Mode TX B Mode_Ant. 2

Bandedge-CH01

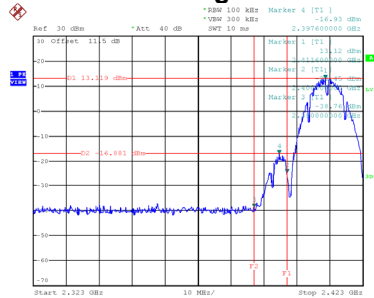


Date: 26.JAN.2021 18:00:01

Bandedge-CH11

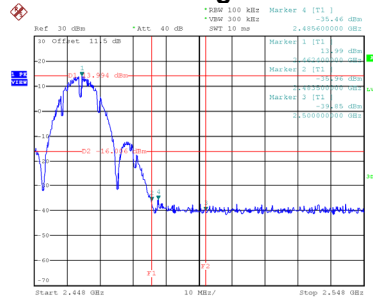


Date: 26.JAN.2021 20:16:31


CH01 – 10th Harmonic of the fundamental frequency

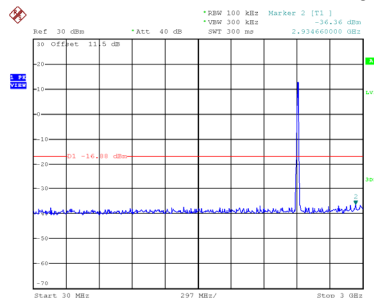

Date: 26.JAN.2021 18:00:14

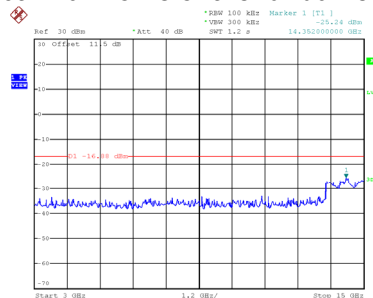


Date: 26.JAN.2021 18:00:22

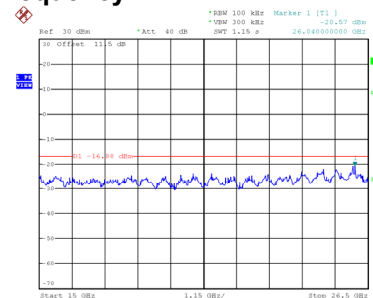


Date: 26.JAN.2021 18:00:29


CH06 – 10th Harmonic of the fundamental frequency

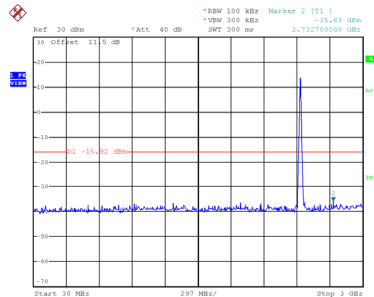

Date: 26.JAN.2021 18:34:52

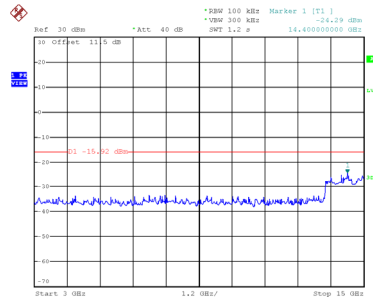


Date: 26.JAN.2021 18:34:59

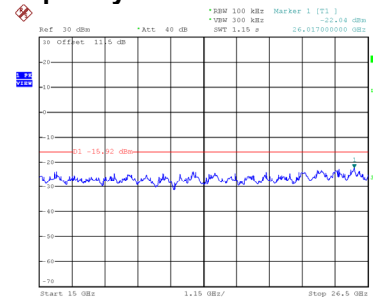


Date: 26.JAN.2021 18:35:06


CH11 – 10th Harmonic of the fundamental frequency

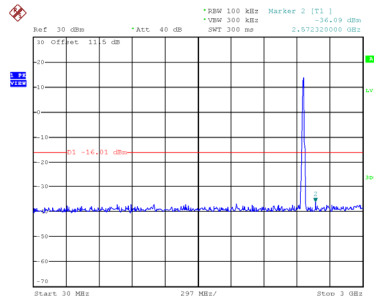

Date: 26.JAN.2021 20:17:27

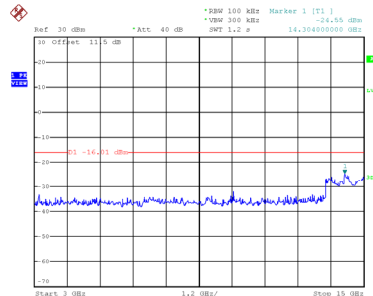


Date: 26.JAN.2021 20:17:34

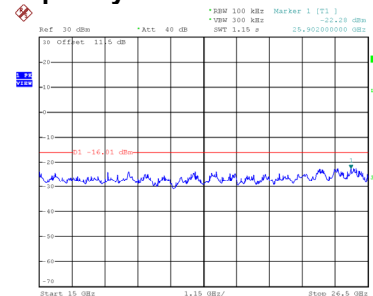

Date: 26.JAN.2021 20:17:41


Test Mode TX G Mode_Ant. 1

Bandedge-CH01

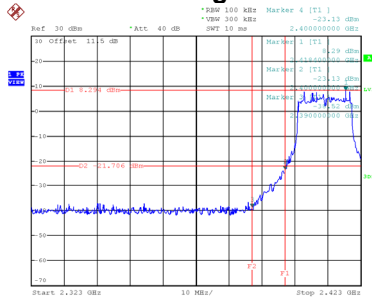


Date: 26.JAN.2021 20:35:45

Bandedge-CH11

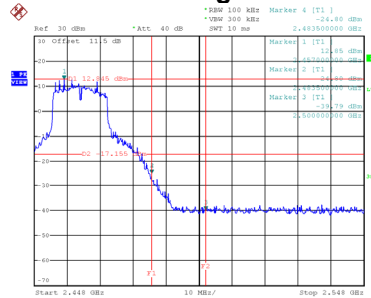


Date: 26.JAN.2021 20:45:57


CH01 – 10th Harmonic of the fundamental frequency



Date: 26.JAN.2021 20:35:59




Date: 26.JAN.2021 20:36:06




Date: 26.JAN.2021 20:37:12


CH06 – 10th Harmonic of the fundamental frequency



Date: 26.JAN.2021 20:39:20




Date: 26.JAN.2021 20:39:27




Date: 26.JAN.2021 20:39:34


CH11 – 10th Harmonic of the fundamental frequency



Date: 26.JAN.2021 20:46:10



Date: 26.JAN.2021 20:46:17



Date: 26.JAN.2021 20:46:24

TX G Mode_Ant. 2



Date: 26.JAN.2021 20:33:36



Date: 26.JAN.2021 20:41:43




Date: 26.JAN.2021 20:43:57




Test Mode TX N-20M Mode_Ant. 1

Bandedge-CH01

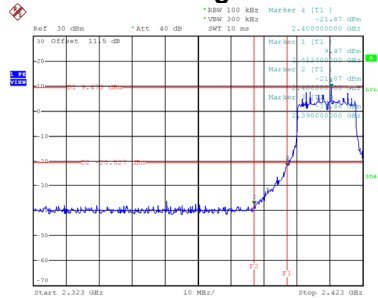


Date: 27.JAN.2021 09:29:02

Bandedge-CH11

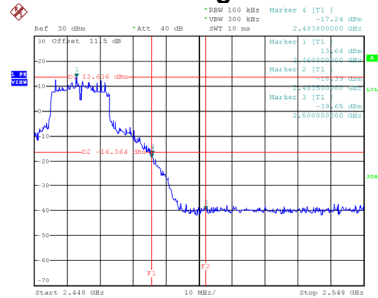


Date: 27.JAN.2021 09:45:139


CH01 – 10th Harmonic of the fundamental frequency

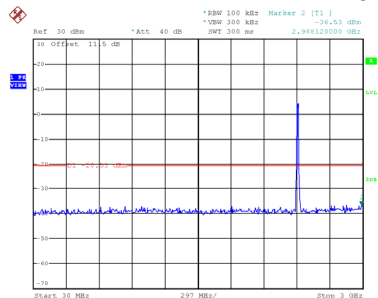

Date: 27.JAN.2021 09:29:137

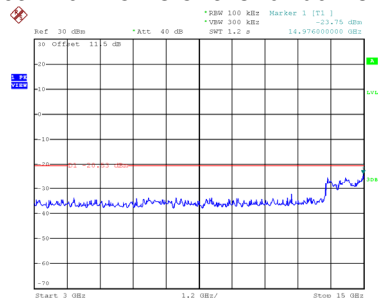


Date: 27.JAN.2021 09:12944

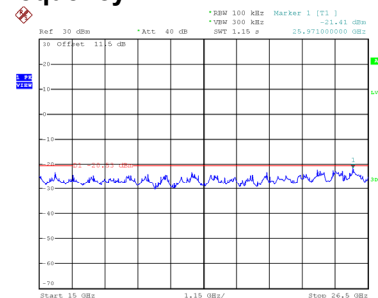


Date: 27.JAN.2021 09:129151


CH06 – 10th Harmonic of the fundamental frequency

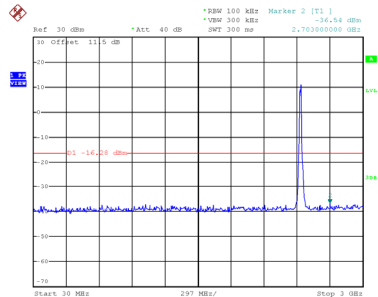

Date: 27.JAN.2021 09:43:135

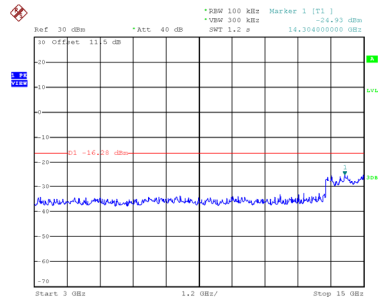


Date: 27.JAN.2021 09:43:142

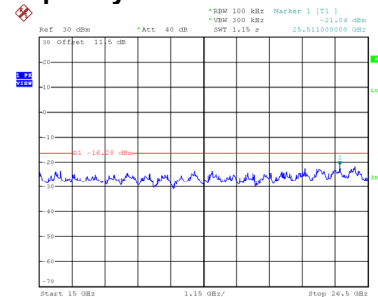


Date: 27.JAN.2021 09:43:149


CH11 – 10th Harmonic of the fundamental frequency

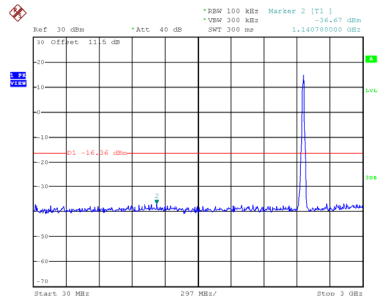

Date: 27.JAN.2021 09:46:122

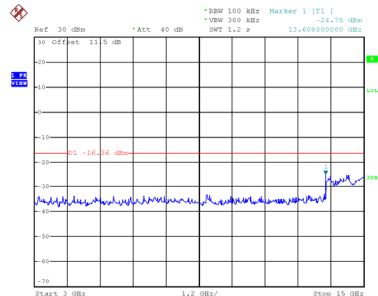


Date: 27.JAN.2021 09:46:129

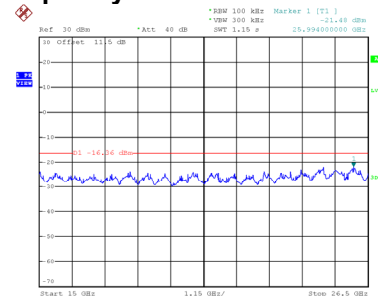

Date: 27.JAN.2021 09:46:136


Test Mode TX N-20M Mode_Ant. 2

Bandedge-CH01

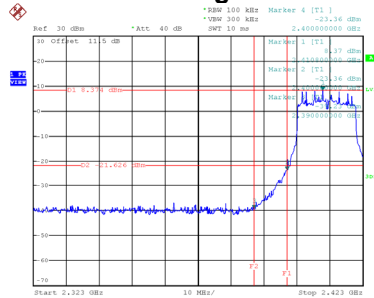


Date: 27.JAN.2021 09:33:35

Bandedge-CH11

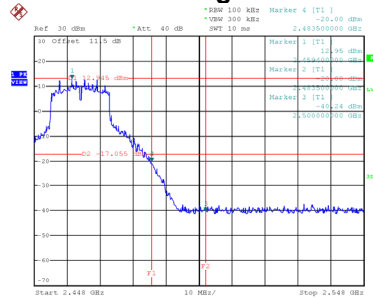


Date: 27.JAN.2021 09:49:31


CH01 – 10th Harmonic of the fundamental frequency

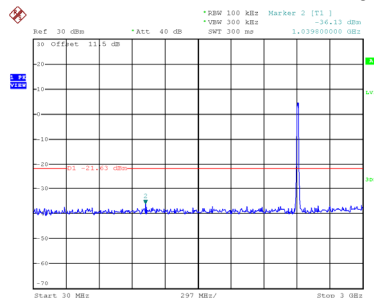

Date: 27.JAN.2021 09:34:11

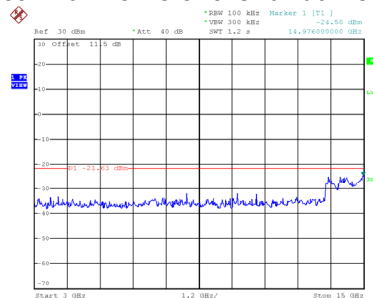


Date: 27.JAN.2021 09:34:19

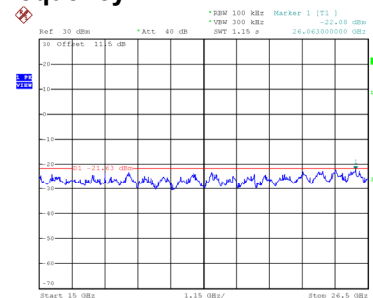


Date: 27.JAN.2021 09:34:26


CH06 – 10th Harmonic of the fundamental frequency

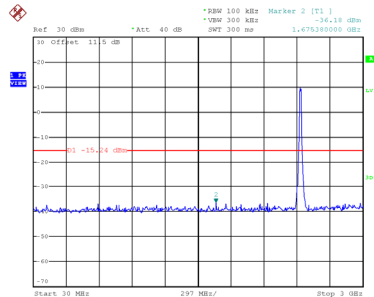

Date: 27.JAN.2021 09:40:30




Date: 27.JAN.2021 09:40:37




Date: 27.JAN.2021 09:40:44


CH11 – 10th Harmonic of the fundamental frequency

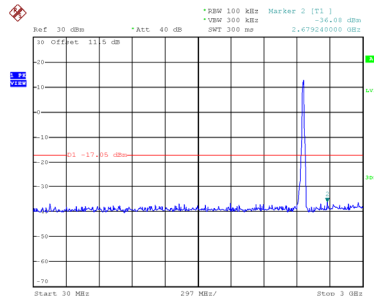

Date: 27.JAN.2021 09:49:44




Date: 27.JAN.2021 09:49:51



Date: 27.JAN.2021 09:49:59


Test Mode TX N-40M Mode_Ant. 1

Bandedge-CH03

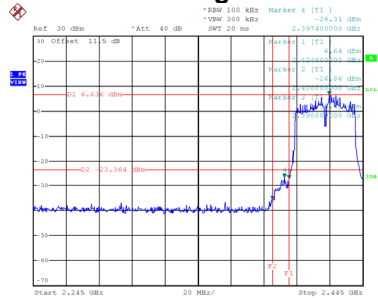


Date: 27.JAN.2021 09:56:16

Bandedge-CH09




Date: 27.JAN.2021 10:21:22


CH03 – 10th Harmonic of the fundamental frequency

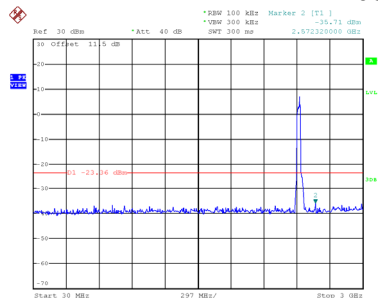

Date: 27.JAN.2021 09:56:50




Date: 27.JAN.2021 09:56:57

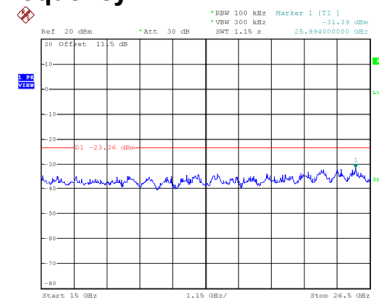


Date: 27.JAN.2021 09:57:49


CH06 – 10th Harmonic of the fundamental frequency

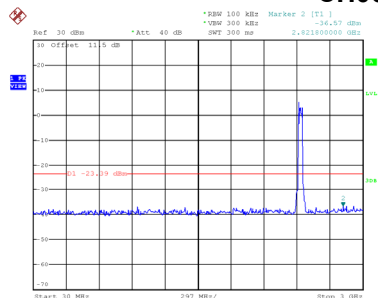

Date: 27.JAN.2021 10:02:17




Date: 27.JAN.2021 10:02:24

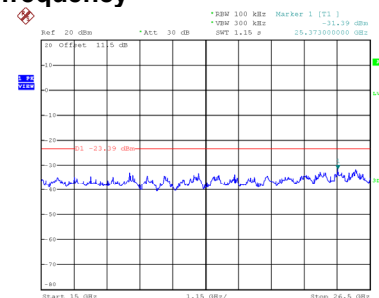


Date: 27.JAN.2021 10:03:02


CH09 – 10th Harmonic of the fundamental frequency

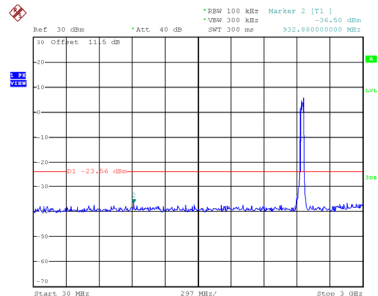

Date: 27.JAN.2021 10:21:55

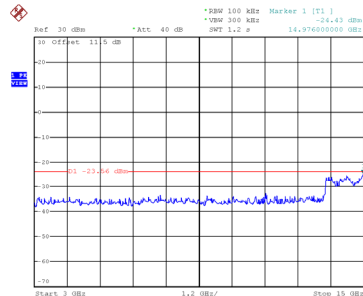


Date: 27.JAN.2021 10:22:02

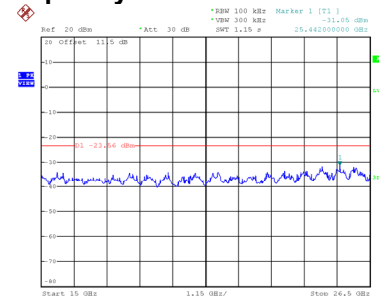

Date: 27.JAN.2021 10:22:13


Test Mode TX N-40M Mode_Ant. 2

Bandedge-CH03

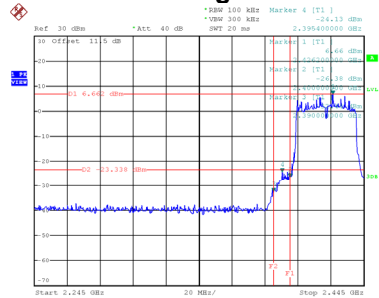


Date: 27.JAN.2021 09:52:13

Bandedge-CH09

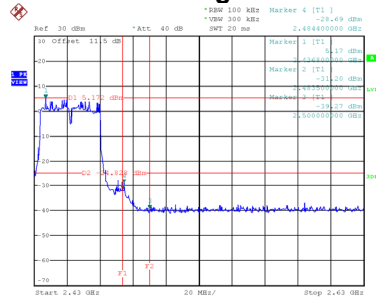


Date: 27.JAN.2021 10:10:49


CH03 – 10th Harmonic of the fundamental frequency

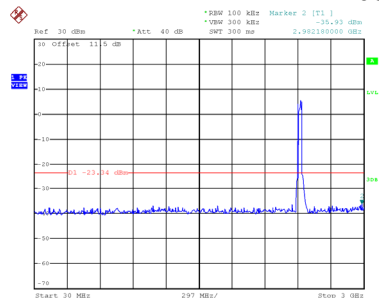

Date: 27.JAN.2021 09:52:48

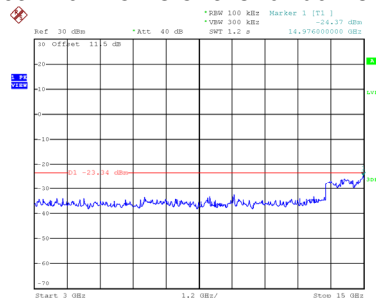


Date: 27.JAN.2021 09:52:55

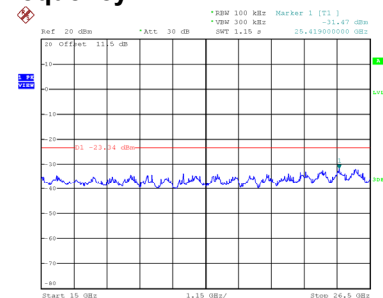


Date: 27.JAN.2021 09:55:21


CH06 – 10th Harmonic of the fundamental frequency

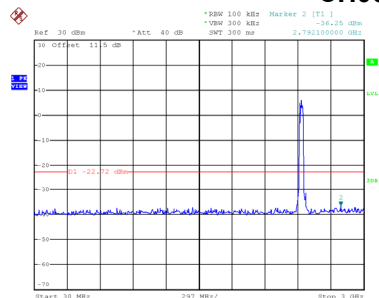

Date: 27.JAN.2021 10:06:48

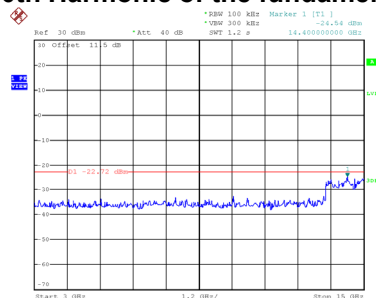


Date: 27.JAN.2021 10:06:56

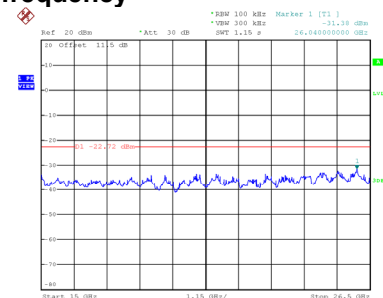


Date: 27.JAN.2021 10:07:28


CH09 – 10th Harmonic of the fundamental frequency

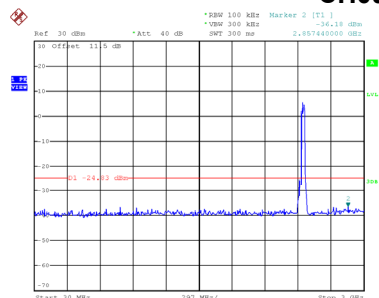

Date: 27.JAN.2021 10:11:24

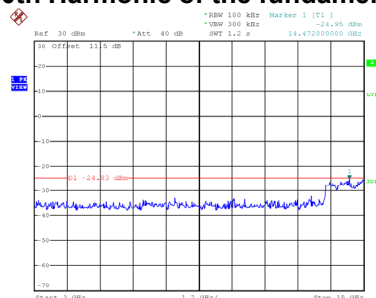

Date: 27.JAN.2021 10:11:31

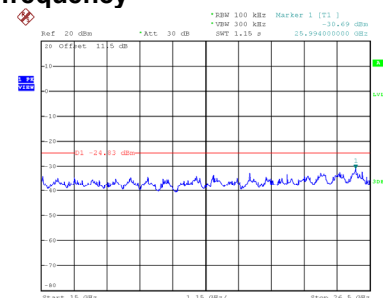


Date: 27.JAN.2021 10:12:06


APPENDIX H - POWER SPECTRAL DENSITY

Test Mode	TX B Mode_Ant. 1
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.16	8	Complies
06	2437	-3.08	8	Complies
11	2462	-1.03	8	Complies

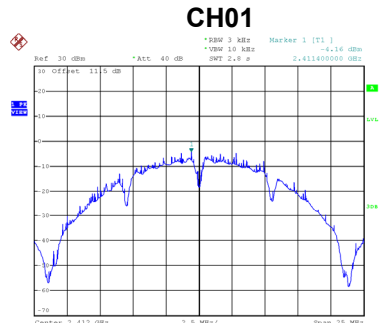

Date: 26.JAN.2021 17:55:08

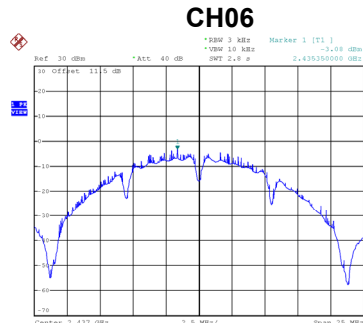


Date: 26.JAN.2021 18:13:12

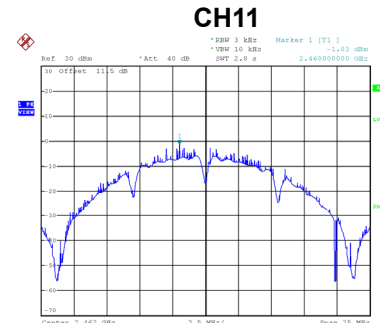


Date: 26.JAN.2021 20:22:09

Test Mode	TX B Mode_Ant. 2
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-3.97	8	Complies
06	2437	-2.49	8	Complies
11	2462	-1.98	8	Complies

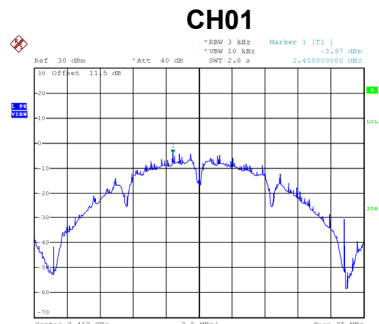

Date: 26.JAN.2021 18:33:14

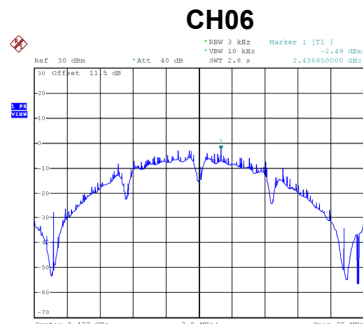

Date: 26.JAN.2021 18:41:02

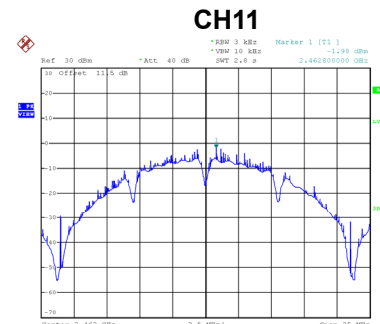


Date: 26.JAN.2021 20:18:49

Test Mode	TX B Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-1.05	8	Complies
06	2437	0.24	8	Complies
11	2462	1.53	8	Complies


Test Mode	TX G Mode_Ant. 1
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-7.11	8	Complies
06	2437	-2.58	8	Complies
11	2462	-3.76	8	Complies

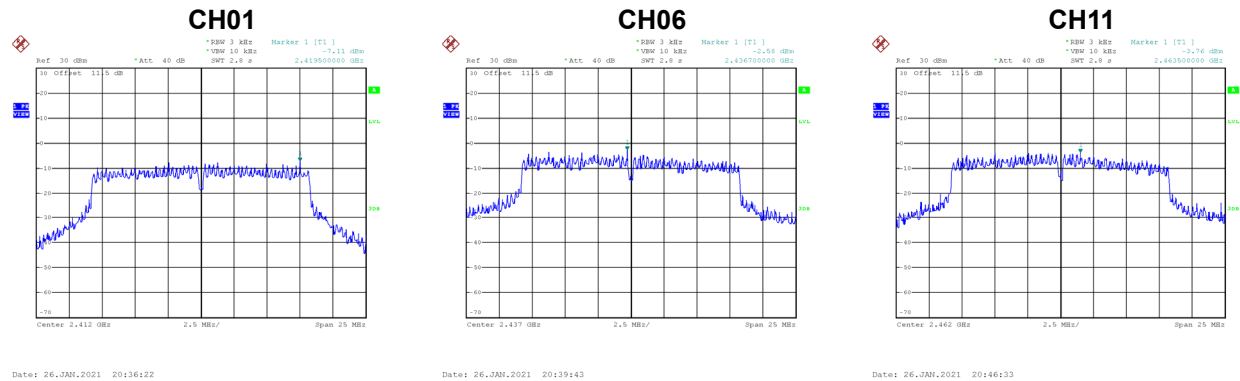

Test Mode	TX G Mode_Ant. 2
-----------	------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-8.22	8	Complies
06	2437	-2.32	8	Complies
11	2462	-3.08	8	Complies

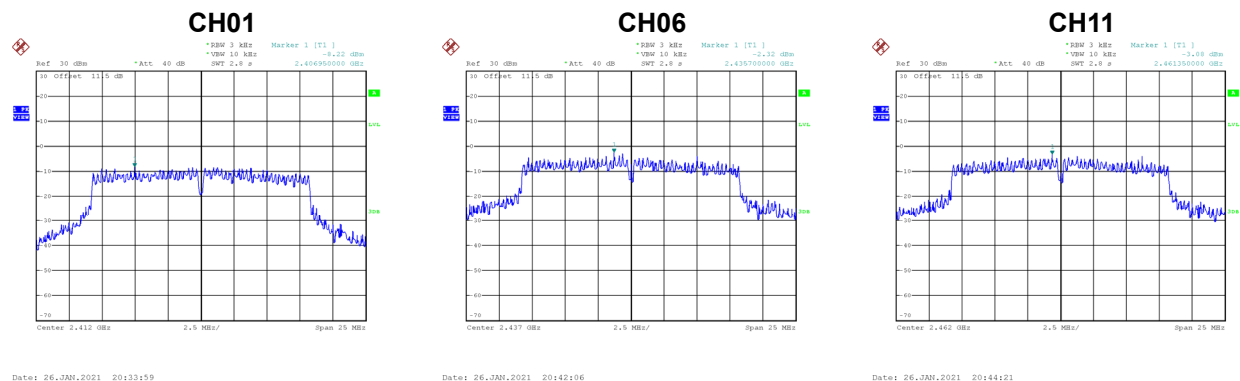


Test Mode	TX G Mode_Total
-----------	-----------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.62	8	Complies
06	2437	0.56	8	Complies
11	2462	-0.40	8	Complies


Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-7.23	8	Complies
06	2437	-3.56	8	Complies
11	2462	-2.86	8	Complies

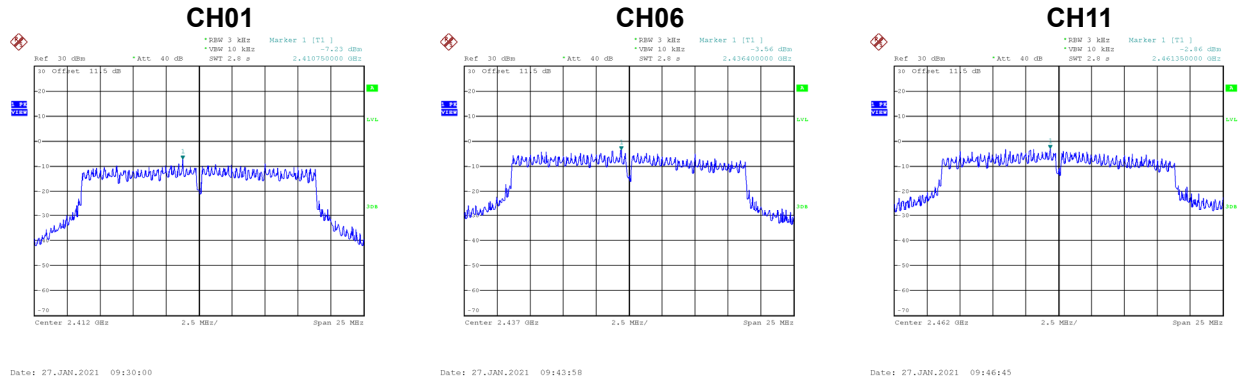

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-8.39	8	Complies
06	2437	-3.71	8	Complies
11	2462	-3.19	8	Complies

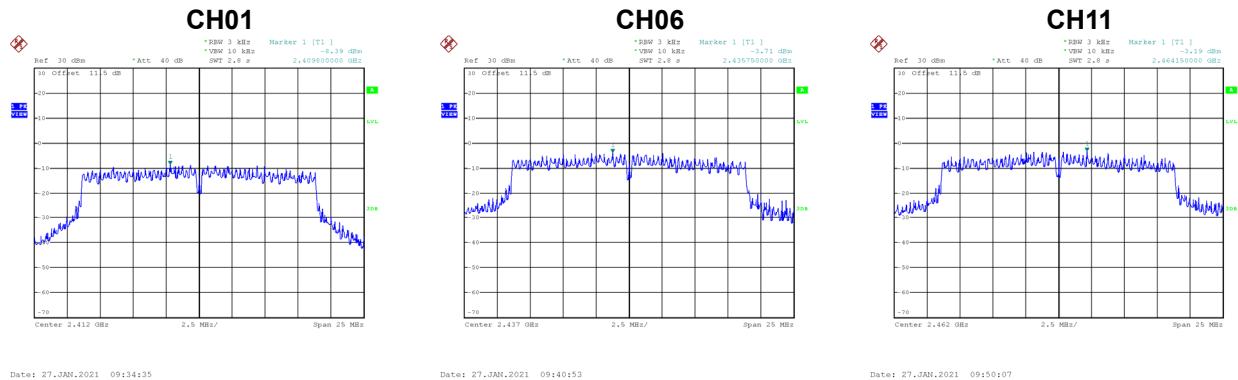


Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.76	8	Complies
06	2437	-0.62	8	Complies
11	2462	-0.01	8	Complies


Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-8.01	8	Complies
06	2437	-9.81	8	Complies
09	2452	-10.70	8	Complies

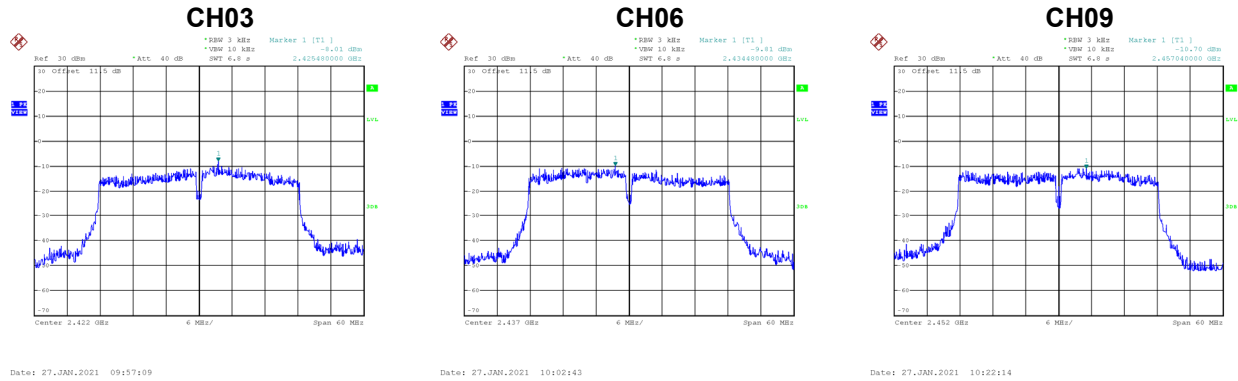

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-7.71	8	Complies
06	2437	-10.37	8	Complies
09	2452	-10.06	8	Complies

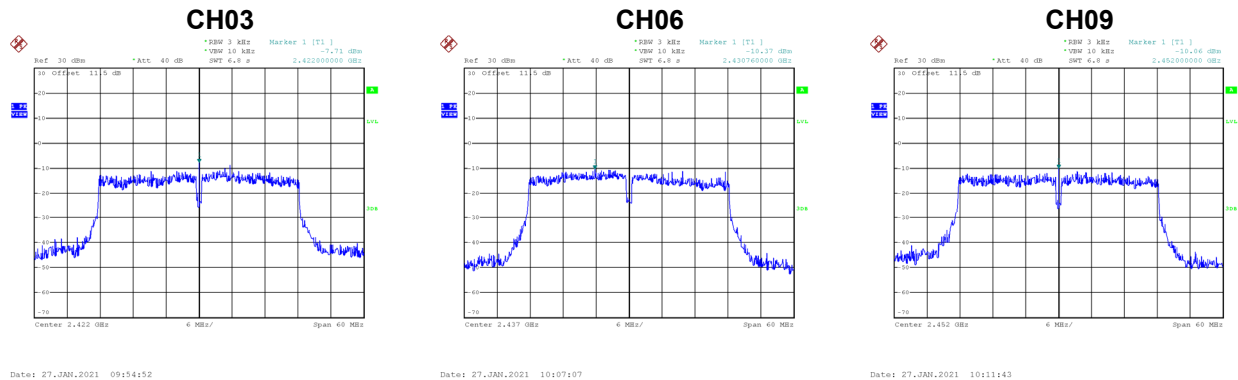

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-4.85	8	Complies
06	2437	-7.07	8	Complies
09	2452	-7.36	8	Complies

End of Test Report