



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Tait International Limited

Address: 245 Wooldridge Road, Harewood, P.O. Box 1645 Christchurch 8051
New Zealand

FCC ID: CASTPEB1G

Product Name: TP3350 Two Way Radio

Type Code/HVIN: TPEB1G

Test Model: T03-00313-BAAA, T03-00313-BBEA,
T03-00313-BCDA

Standard(s): FCC PART 22, 74 and 90
ANSI C63.26-2015
TIA-603-E-2016

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22030025-00A

Date Of Issue: 2022-05-23

Reviewed By: Sun Zhong

Title: Manager

Sun Zhong

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 TRANSMITTER FREQUENCY STABILITY	10
3.1.1 Applicable Standard.....	10
3.1.2 Test Procedure	11
3.1.3 EUT Setup Block Diagram	11
3.2 TRANSMITTER OUTPUT POWER	12
3.2.1 Applicable Standard.....	12
3.2.2 Test Procedure	13
3.2.3 EUT Setup Block Diagram	13
3.3 OCCUPIED BANDWIDTH & EMISSION MASK.....	14
3.3.1 Applicable Standard.....	14
3.3.2 Test Procedure	15
3.3.3 EUT Setup Block Diagram	16
3.4 TRANSMITTER UNWANTED EMISSIONS(CONDUCTED).....	17
3.4.1 Applicable Standard.....	17
3.4.2 Test Procedure	18
3.4.3 EUT Setup Block Diagram	19
3.5 TRANSIENT FREQUENCY BEHAVIOR	20
3.5.1 Applicable Standard.....	20
3.5.2 Test Procedure	20
3.6 MODULATION CHARACTERISTICS.	22
3.6.1 Applicable Standard.....	22
3.6.2 Test Procedure	22
3.6.3 EUT Setup Block Diagram	23
3.7 TRANSMITTER UNWANTED EMISSIONS(RADIATED)	24
3.7.1 Applicable Standard.....	24
4. TEST DATA AND RESULTS	27
4.1 RF OUTPUT POWER	27
4.2 MODULATION CHARACTERISTIC:.....	33

4.3 OCCUPIED BANDWIDTH & EMISSION MASK:	39
4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:	51
4.5 RADIATED SPURIOUS EMISSIONS:	56
4.6 FREQUENCY STABILITY:.....	79
4.7 TRANSIENT FREQUENCY BEHAVIOR.....	81

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	TP3350 Two Way Radio
EUT Model:	T03-00313-BCDA, T03-00313-BAAA, T03-00313-BBEA
Multiple Model:	T03-00313-BXXX ("XXX" please refer to the DoS)
Operation Frequency:	136-174 MHz
Modulation Type:	FM, 4FSK
Channel Spacing:	12.5 kHz /25 kHz
Rated Output Power: (Conducted)	High Power Level: 5W Low Power Level: 1W
Rated Input Voltage:	DC 7.4V from battery, DC 12V charging from charger base
Serial Number:	T03-00313-BCDA:CR22030025-RF-S1 T03-00313-BBEA:CR22030025-RF-S2 T03-00313-BAAA:CR22030025-RF-S3
EUT Received Date:	2022.3.10
EUT Received Status:	Good
Note: The multiple models are electrically identical with the Test Models, please refer to the declaration letter for more details which was provided by manufacturer. Tests were performed at model: T03-00313-BCDA, except radiated emission test with 3 models: T03-00313-BAAA, T03-00313-BBEA, T03-00313-BCDA.	

Antenna Information Detail ▲:

Antenna	Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	Length
PTT Antenna1	Tait International Limited	Helical	50	2.5 dBi/136-145MHz	96
PTT Antenna2	Tait International Limited	Helical	50	2.5 dBi/144-154MHz	96
PTT Antenna3	Tait International Limited	Helical	50	2.5 dBi/153-164MHz	96
PTT Antenna4	Tait International Limited	Helical	50	2.5 dBi/163-174MHz	96
PTT Antenna5	Tait International Limited	Helical	50	2 dBi/136-150MHz	173
PTT Antenna6	Tait International Limited	Helical	50	2 dBi/150-174MHz	154

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Shi Ying Yuan Electronics Co., Ltd.	ICP30-120-2000	Input: 100-240V~50/60Hz 0.8A Output: 12V 2A
Charger	Tait International Ltd.	T03-00322-AAAA	Not Applicable
Headset		T03-00047-BAAA	Not Applicable
Belt Clip		Not Applicable	Not Applicable
Speaker Mic		T03-00045-ND*	Not Applicable

Test Frequency Detail:

Per C63.26-2015, section 5.1, the lowest frequency, middle frequency, and highest frequency was performed the test as below:

Modulation/ Channel Bandwidth	Test Channel	Frequency (MHz)	Rule Part
FM 12.5kHz	Lowest	136.0125	For Federal
	Middle	155.7525	For Part 90
	Highest	173.9875	For Federal
	Additional	150.8125	For Part 22
	Additional	161.1000	For Part 74
4FSK 12.5kHz	Lowest	136.0125	For Federal
	Middle	155.7525	For Part 90
	Highest	173.9875	For Federal
	Additional	150.8125	For Part 22
	Additional	161.1000	For Part 74
FM 25kHz	Additional	150.8125	For Part 22
	Additional	161.1000	For Part 74

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
WEINSCHEL Corp	Load	50oml	50oml Load

1.2.3 Support Cable List and Details

Cable Description	Shielding Cable	Ferrite Core	Length (m)	From Port	To
\	\	\	\	\	\

1.2.4 Block Diagram of Test Setup

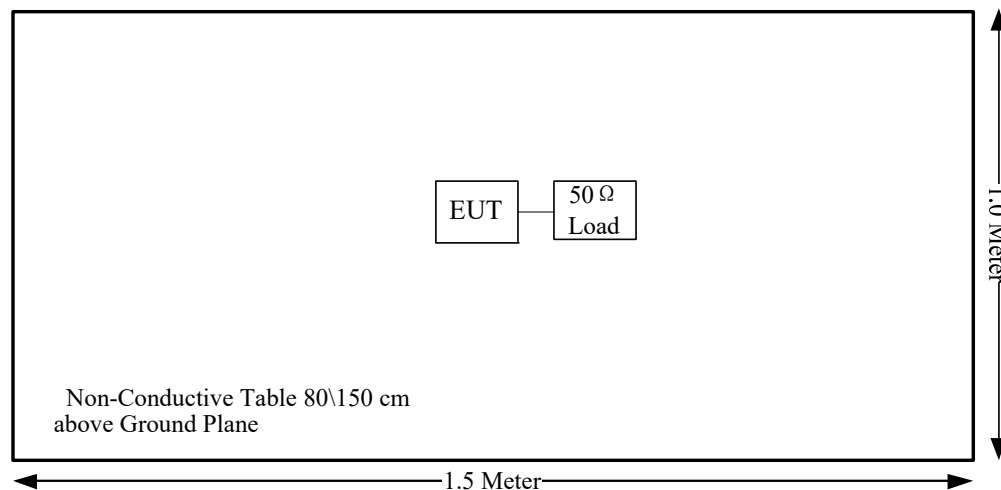

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶
Audio Frequency/Low Pass Filter Response	4.02%
Modulation Limiting	1.19%

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1046; § 22.727; §74.461; §90.205	RF Output Power	Compliant
§2.1047	Modulation Characteristic	Compliant
§2.1049; §22.357; § 22.731; §74.462; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliant
§2.1051; §22.861; §74.462; §90.210	Spurious Emission at Antenna Terminal	Compliant
§2.1053; §22.861; §74.462; §90.210	Spurious Radiated Emissions	Compliant
§2.1055; § 22.355; §74.464; §90.213	Frequency Stability	Compliant
§90.214	Transient Frequency Behavior	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Transmitter Frequency Stability

3.1.1 Applicable Standard

FCC §90.213

In the 150-174 MHz band, fixed and base stations with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Fixed and base stations with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

In the 150-174 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth or designed to operate on a frequency specifically designated for itinerant use or designed for low-power operation of two watts or less, must have a frequency stability of 5.0 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 2.0 ppm.

In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

FCC §74.464

For operations on frequencies above 25 MHz using authorized bandwidths up to 30 kHz, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in compliance with the frequency tolerance requirements of §90.213 of this chapter. For all other operations, the licensee of a remote pickup broadcast station or system shall maintain the operating frequency of each station in accordance with the following:


Frequency range	Tolerance (percent)	
	Base station	Mobile station
25 to 30 MHz:		
3 W or less	.002	.005
Over 3 W	.002	.002
30 to 300 MHz:		
3 W or less	.0005	.005
Over 3 W	.0005	.0005
300 to 500 MHz, all powers	.00025	.0005

3.1.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC or AC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

3.1.3 EUT Setup Block Diagram

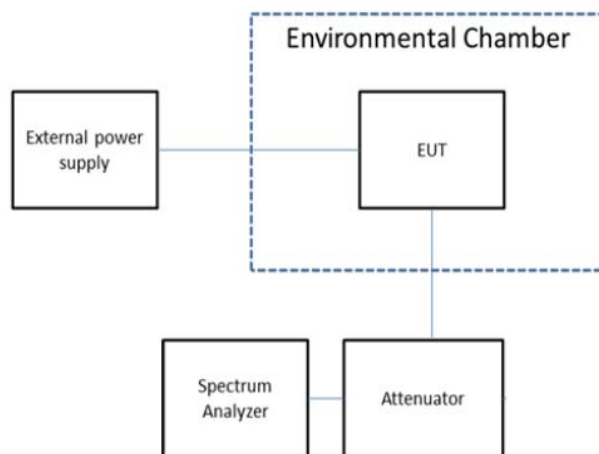

3.2 Transmitter Output Power

3.2.1 Applicable Standard

FCC §90.205

(d) 150-174 MHz. (1) The maximum allowable station ERP is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 1. Applicants requesting an ERP in excess of that listed in table 1 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.

(h) 450-470 MHz.

(1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2. Applicants requesting an ERP in excess of that listed in table 2 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.

(2) Applications for stations where special circumstances exist that make it necessary to deviate from the ERP and antenna heights in Table 2 will be submitted to the frequency coordinator accompanied by a technical analysis, based upon generally accepted engineering practices and standards, that demonstrates that the requested station parameters will not produce a signal strength in excess of 39 dBu at any point along the edge of the requested service area. The coordinator may then recommend any ERP appropriate to meet this condition.

(3) An applicant for a station with a service area radius greater than 32 km (20 mi) must justify the requested service area radius, which may be authorized only in accordance with table 2, note 4. For base stations with service areas greater than 80 km, all operations 80 km or less from the base station will be on a primary basis and all operations outside of 80 km from the base station will be on a secondary basis and will be entitled to no protection from primary operations.

(s) The output power shall not exceed by more than 20 percent either the output power shown in the Radio Equipment List [available in accordance with §90.203(a)(1)] for transmitters included in this list or when not so listed, the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

FCC §22.727

(a) *Maximum ERP.* The effective radiated power (ERP) of central office and rural subscriber station transmitters must not exceed the applicable limits in this paragraph under any circumstances.

Frequency range (MHz)	Maximum ERP (watts)
152-153	1400
157-159	150
454-455	3500
459-460	150

FCC §74.461

(a) Transmitter power is the power at the transmitter output terminals and delivered to the antenna, antenna transmission line, or any other impedance-matched, radio frequency load. For the purpose of this Subpart, the transmitter power is the carrier power.

(b) The authorized transmitter power for a remote pickup broadcast station shall be limited to that necessary for satisfactory service and, in any event, shall not be greater than 100 watts, except that a station to be operated aboard an aircraft shall normally be limited to a maximum authorized power of 15 watts. Specific authorization to operate stations on board aircraft with an output power exceeding 15 watts will be issued only upon an adequate engineering showing of need, and of the procedures that will be taken to avoid harmful interference to other licensees.


3.2.2 Test Procedure

Before performing this measurement, the power of the EUT shall be set or controlled to the maximum rating of the range for which equipment certification or verification is sought.

Except where otherwise specified, tests shall be performed at the ambient temperature, at the manufacturer's rated supply voltage, and with the transmitter modulating signal representative (i.e. typical) of those encountered in a real system operation.

The spectrum analyzer shall be configured with a resolution bandwidth that encompasses the entire occupied bandwidth (see section 6.7) of the EUT. If the spectrum analyzer's largest available resolution bandwidth is smaller than the occupied bandwidth of the EUT, it is permitted to use a narrower resolution bandwidth plus numerical integration, in linear power terms, over the occupied bandwidth of the transmitter in order to measure its output power, except when the emission is a wideband noise-like signal and being measured for peak power. For transmitters with constant envelope modulation, RF output power and field strength measurements performed on the fundamental frequency can be carried out with an unmodulated carrier. The method used shall be described in the test report.

3.2.3 EUT Setup Block Diagram

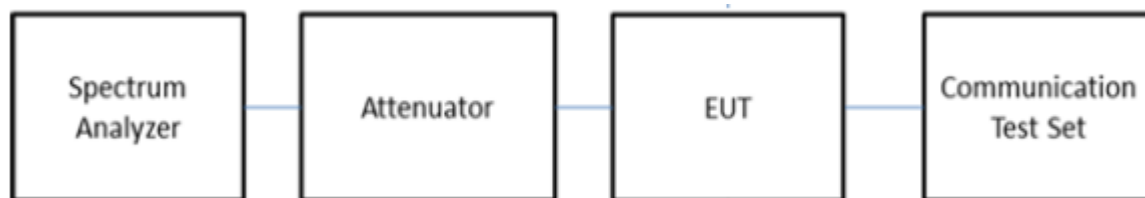

3.3 Occupied Bandwidth & Emission Mask

3.3.1 Applicable Standard

FCC §90.209

(a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where §2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

(b) (5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table: STANDARD CHANNEL SPACING/BANDWIDTH

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC §74.462

(a) Each authorization for a new remote pickup broadcast station or system shall require the use of certificated equipment and such equipment shall be operated in accordance with emission specifications included in the grant of certification and as prescribed in paragraphs (b), (c), and (d) of this section.

3.3.2 Test Procedure

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).


Emission Mask D for Transmitters Equipped With or Without an Audio Low-Pass Filter

The power of any emission shall be attenuated below the transmitter output power P (dBW) as specified in Table.

Displacement Frequency, f_d (kHz)	Minimum Attenuation (dB)	Resolution Bandwidth (Hz)
$5.625 < f_d \leq 12.5$	$7.27(f_d - 2.88)$	Specified in Section 4.2.2
$f_d > 12.5$	Whichever is the lesser: 70 or $50 + 10 \log_{10}(p)$	Specified in Section 4.2.2

In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak mode. For emissions beyond 50 kHz from the edge of the authorized bandwidth, the resolution bandwidth shall be 100 kHz for frequencies at or below 1 GHz, and 1 MHz for frequencies above 1 GHz. However, for emission mask F, at a displacement frequency of less than 3.75 kHz, the resolution bandwidth shall be 30 Hz.

3.3.3 EUT Setup Block Diagram

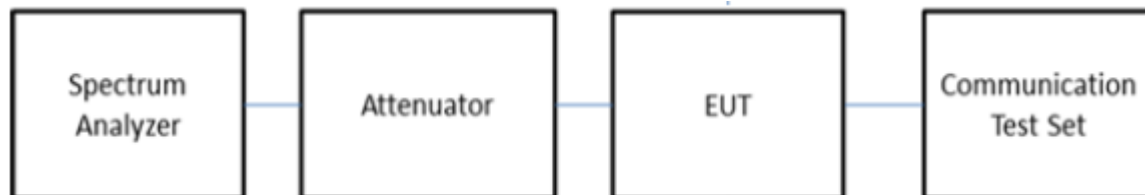

3.4 Transmitter Unwanted Emissions(Conducted)

3.4.1 Applicable Standard

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (5) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (6) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (7) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- (8) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC §74.462

(c) For emissions on frequencies above 25 MHz with authorized bandwidths up to 30 kHz, the emissions shall comply with the emission mask and transient frequency behavior requirements of §§90.210 and 90.214 of this chapter. For all other emissions, the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the assignment frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- (3) On any frequency removed from the assigned frequency by more than 250 percent on the authorized bandwidth; at least 43 plus $10 \log_{10}$ (mean output power, in watts) dB.

3.4.2 Test Procedure

In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak mode. For emissions beyond 50 kHz from the edge of the authorized bandwidth, the resolution bandwidth shall be 100 kHz for frequencies at or below 1 GHz, and 1 MHz for frequencies above 1 GHz. However, for emission mask F, at a displacement frequency of less than 3.75 kHz, the resolution bandwidth shall be 30 Hz.

In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated or used in the equipment, whichever is lower, without going below 9 kHz, up to at least the applicable frequency given below:


- (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (b) If the equipment operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (c) If the equipment operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise in the applicable RSS.
- (d) If the equipment contains a digital device that is exclusively used for enabling the operation of the radio apparatus: the spectrum shall be investigated according to the conditions specified in paragraphs (a) through (c) of this section or the range applicable to the digital device, as shown in table 2, whichever is the higher frequency range of investigation.

Table 2 – Frequency range for radiated measurement for equipment with a digital device

Highest frequency generated, operated or used in the equipment (MHz)	Upper frequency limit of measurement range (MHz)
< 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
> 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

It is not necessary to report the amplitude of spurious emissions attenuated more than 20 dB below the permissible value

3.4.3 EUT Setup Block Diagram

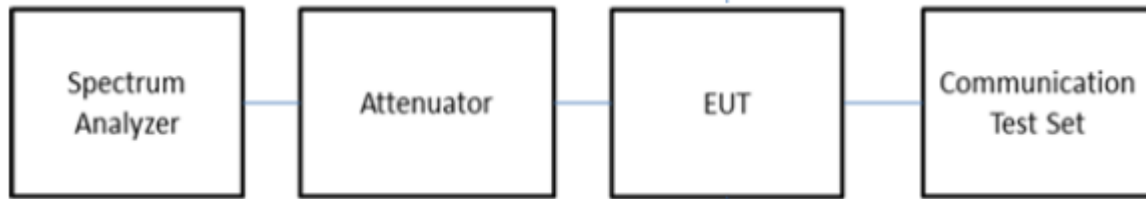

3.5 Transient Frequency Behavior

3.5.1 Applicable Standard


FCC §90.214

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t ₁ ⁴	±12.5 kHz	5.0 ms	10.0 ms
t ₂	±6.25 kHz	20.0 ms	25.0 ms
t ₃ ⁴	±12.5 kHz	5.0 ms	10.0 ms

3.5.2 Test Procedure

TIA-603-E Clause 2.2.19

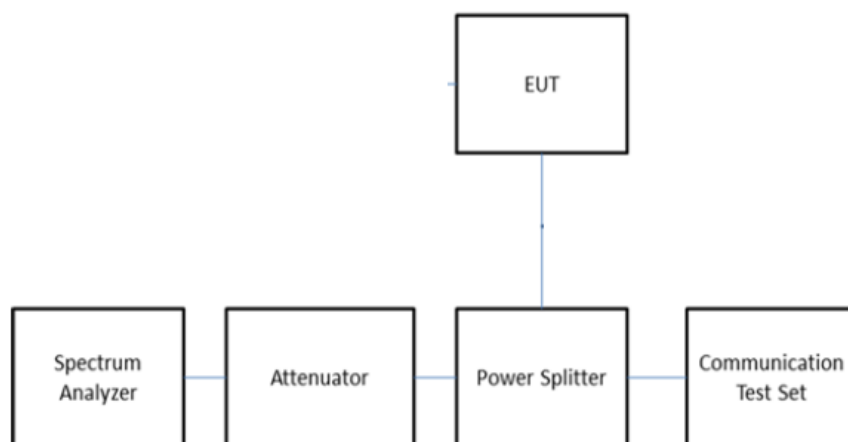

- Connect the equipment as illustrated.
- Connect the output of the standard transmitter load to the RF power meter. Supply sufficient attenuation via the RF attenuator to provide a level that is approximately 40 dB below the maximum allowable input to the modulation domain analyzer.
- Unkey the transmitter.
- Disconnect the RF power meter and connect the modulation domain analyzer in its place. Set the envelope trigger of the modulation domain analyzer to the minimum level that will trigger when the transmitter is keyed.
- Reduce the attenuation of the RF attenuator so that the input to the modulation domain analyzer is increased by 30 dB when the transmitter is keyed.
- Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signal.
- Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the left for observing the transmitter turn-on transient.
- Key the transmitter.
- Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t_1 and t_2 , and shall also remain within limits following t_2 .

- j) Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transient of the transmitter signal.
- k) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the right for observing the transmitter turn-off transient.
- l) Unkey the transmitter.
- m) Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the period t_3 .

3.6 Modulation characteristics.

3.6.1 Applicable Standard

FCC §2.1047

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

3.6.2 Test Procedure

C63.26-2015, Clause 5.3.2 Modulation limiting test methodology


Modulation limiting is the ability of a transmitter circuit to limit the transmitter from producing deviations in excess of a rated system deviation.

- a) Connect the equipment as illustrated in Figure 1.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to ≥ 15000 Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation. This is the 0 dB reference level.
- e) Increase the level from the audio generator by 20 dB in 5 dB increments recording the deviation as measured from the test receiver in each step. Verify that the audio level used to make the OBW measurement is included in the sweep.
- f) Repeat for step e) at 300 Hz, 2500 Hz and 3000 Hz at a minimum using the 0 dB reference level obtained in step d).
- g) Set the test receiver to measure peak negative deviation and repeat step d) through step f).
- h) The values recorded in step f) and step g) are the modulation limiting.
- i) Plot the data set as a percentage of deviation relative to the 0 dB reference point versus input voltage.

C63.26-2015, Clause 5.3.3.2 Audio frequency response test methodology—Constant Input

- a) Connect the equipment as illustrated in Figure 3.
- b) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 50 Hz to $\geq 15\ 000$ Hz. Turn the de-emphasis function off.
- c) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- d) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- e) Set the test receiver to measure rms deviation and record the deviation reading as DEVREF.
- f) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.

3.6.3 EUT Setup Block Diagram

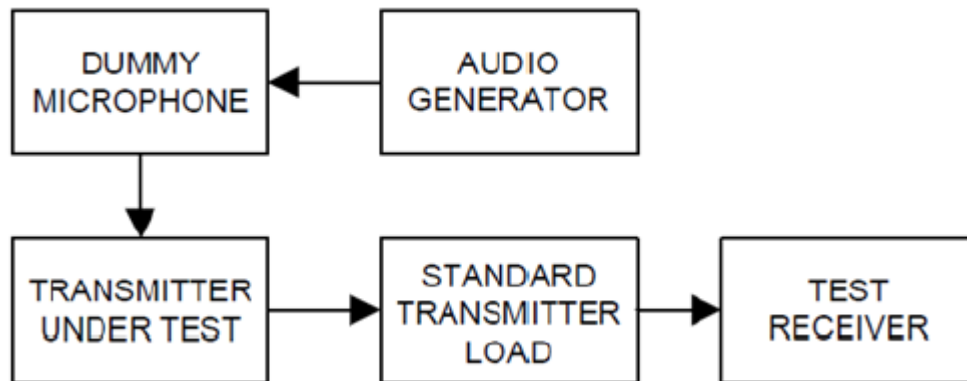

3.7 Transmitter Unwanted Emissions(Radiated)

3.7.1 Applicable Standard

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 :
Zero dB.

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC §74.462

(c) For emissions on frequencies above 25 MHz with authorized bandwidths up to 30 kHz, the emissions shall comply with the emission mask and transient frequency behavior requirements of §§90.210 and

90.214 of this chapter. For all other emissions, the mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- (1) On any frequency removed from the assignment frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- (2) On any frequency removed from the assigned frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- (3) On any frequency removed from the assigned frequency by more than 250 percent on the authorized bandwidth; at least 43 plus $10 \log_{10}$ (mean output power, in watts) dB.

3.7.2 Test setup:

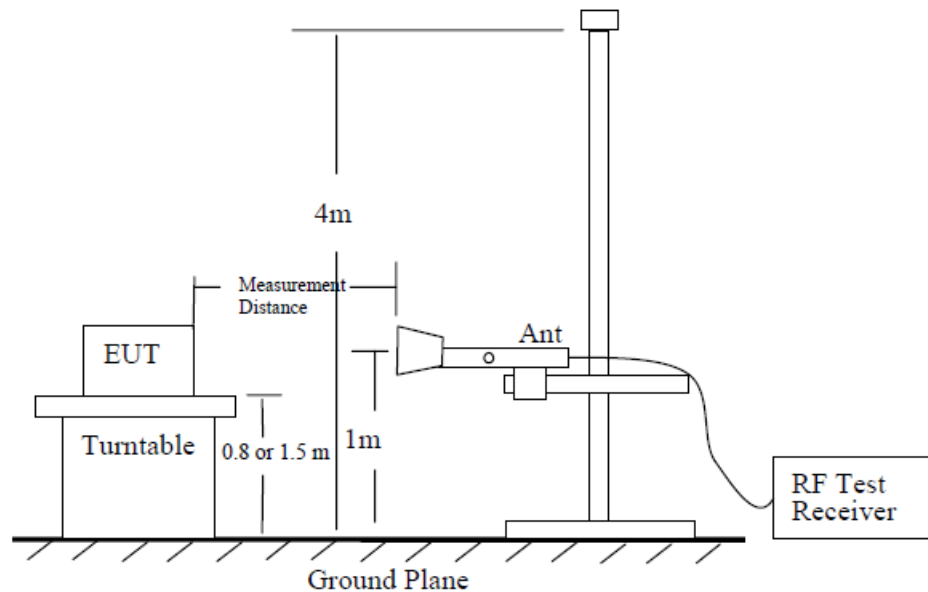


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

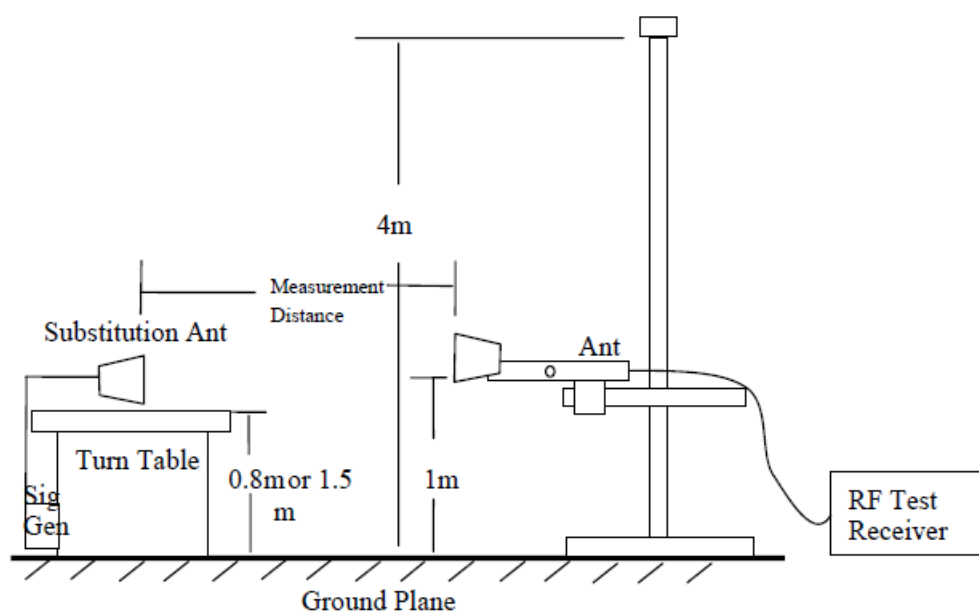


Figure 7—Substitution method set-up for radiated emission

3.7.3 Test Procedure:

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
 - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
 - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
 - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where

$$P_e = \text{equivalent emission power in dBm}$$

$$P_s = \text{source (signal generator) power in dBm}$$
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from: $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$. If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

4. TEST DATA AND RESULTS

4.1 RF OUTPUT POWER

Serial Number:	CR22030025-RF-S1	Test Date:	2022/4/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	68	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:







Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)	
				High Power Level	Low Power Level	High Power Level	Low Power Level
12.5kHz	FM	Low	136.0125	36.30	29.74	37.78	30.79
		Middle	155.7525	36.35	29.55	37.78	30.79
		High	173.9875	36.20	29.93	37.78	30.79
		Additional	150.8125	36.33	29.65	37.78	30.79
		Additional	161.1	36.47	30.05	37.78	30.79
	4FSK	Low	136.0125	36.39	30.76	37.78	30.79
		Middle	155.7525	36.49	30.71	37.78	30.79
		High	173.9875	36.30	30.54	37.78	30.79
		Additional	150.8125	36.42	30.23	37.78	30.79
		Additional	161.1	36.57	30.56	37.78	30.79
25kHz	FM	Additional	150.8125	36.31	29.64	37.78	30.79
		Additional	161.1	36.47	30.06	37.78	30.79

Note:


The high rated power level is 5W(37dBm), and low rated power level is 1W(30dBm).

The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

The 30.30dB is the Insertion loss of the RF cable, Coaxial Attenuators, which was offset into the Spectrum Analyzer.

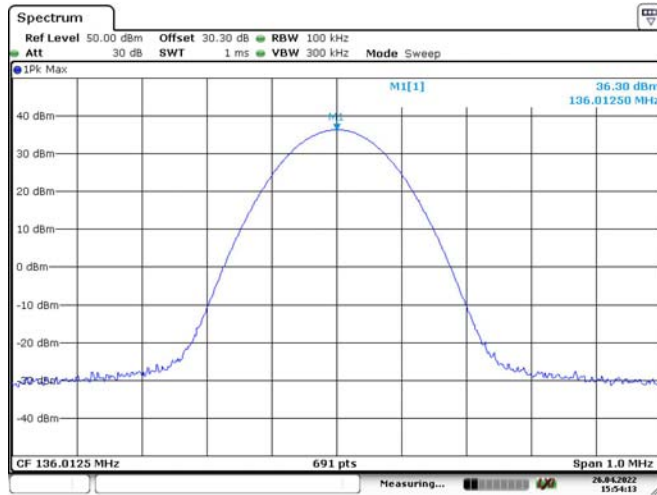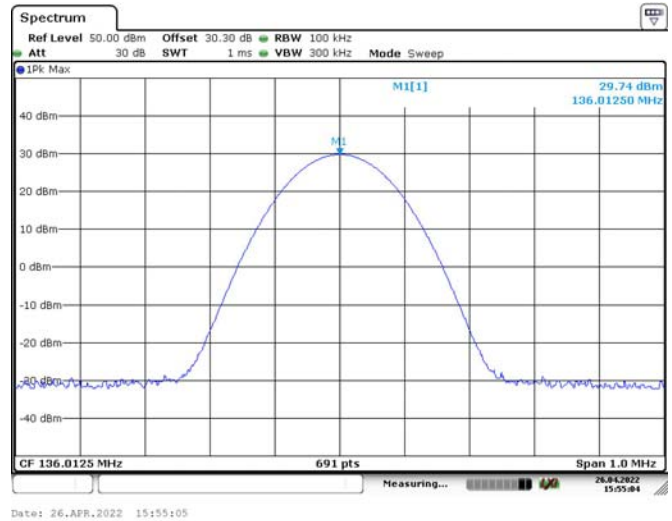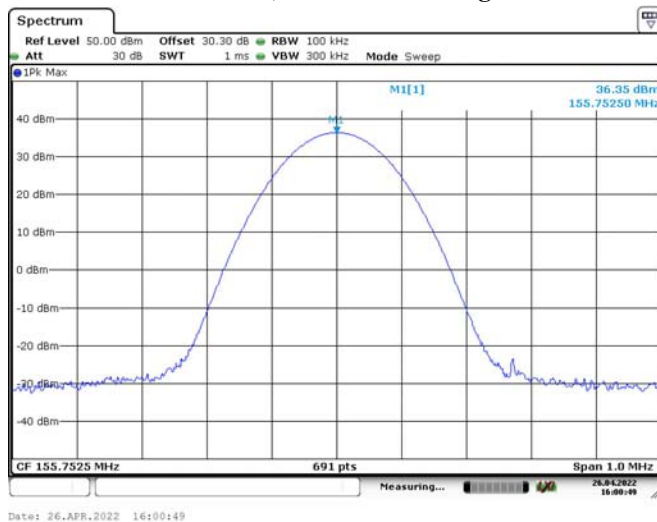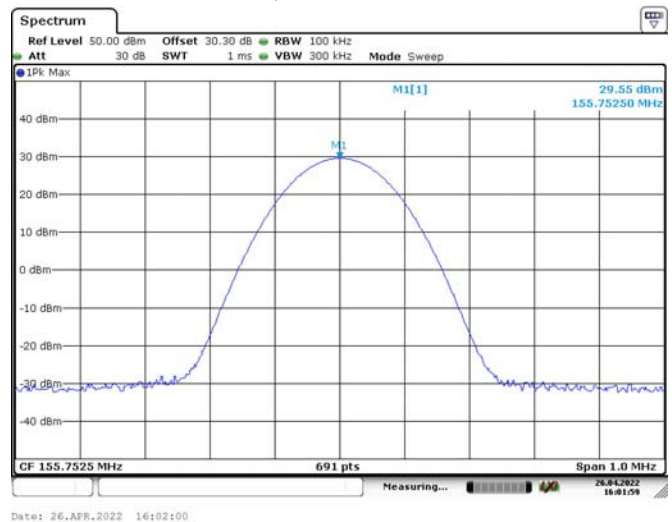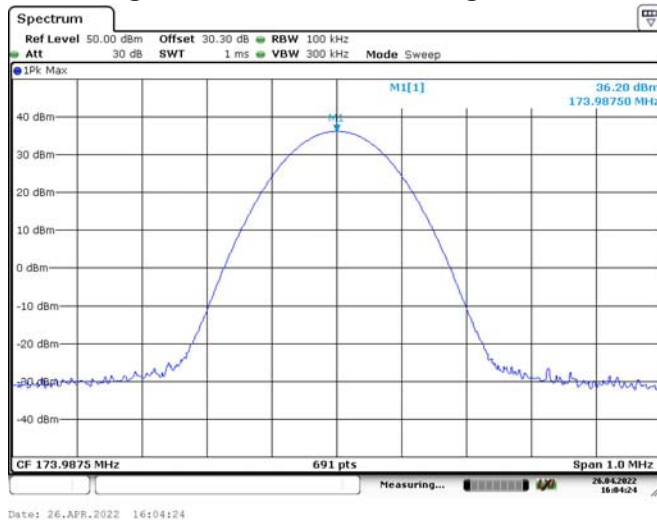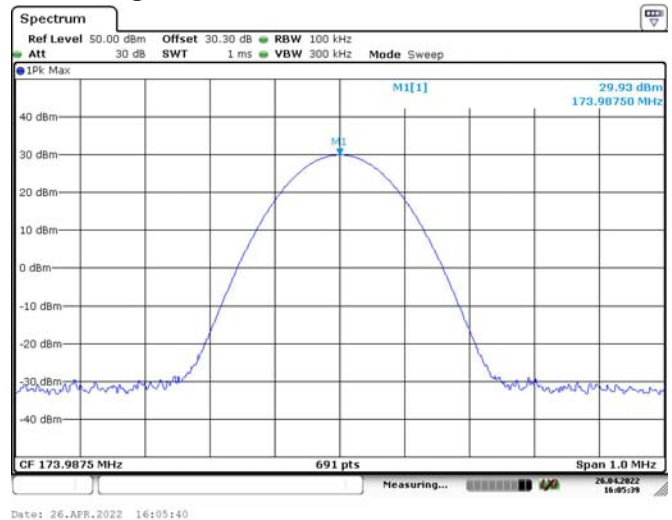
FM, 12.5kHz:**Low Channel, 136.0125 MHz High Power****Low Channel, 136.0125 MHz Low Power****Middle Channel, 155.7525 MHz High Power****Middle Channel, 155.7525 MHz Low Power****High Channel, 173.9875 MHz High Power****High Channel, 173.9875 MHz Low Power**

Additional, For Part 74, 161.1 MHz High Power

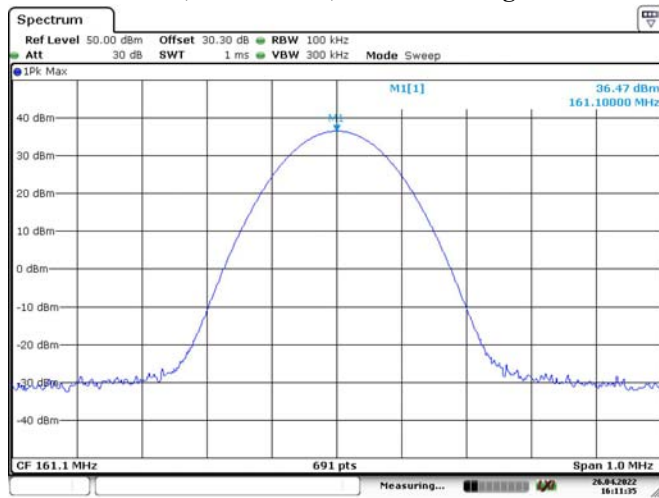


Date: 26.APR.2022 16:11:35

Additional, For Part 74, 161.1 MHz Low Power

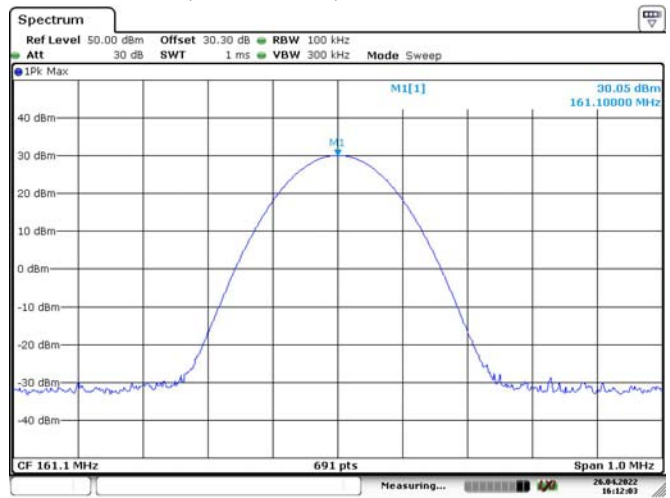


Date: 26.APR.2022 16:12:04

Additional, For Part 22, 150.8125 MHz High Power

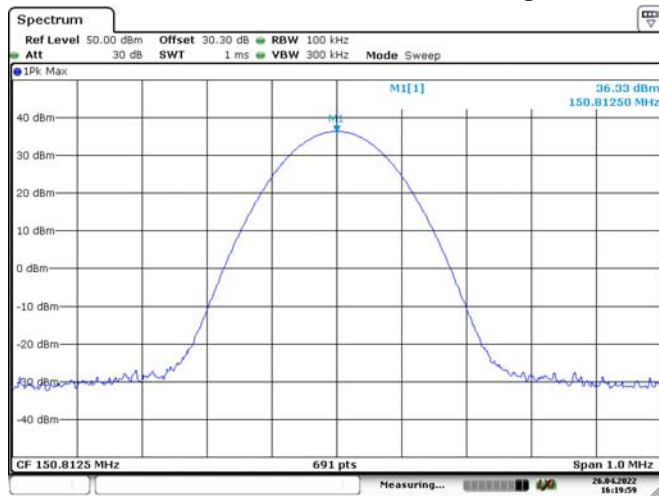


Date: 26.APR.2022 16:20:00


Additional, For Part 22, 150.8125 MHz Low Power

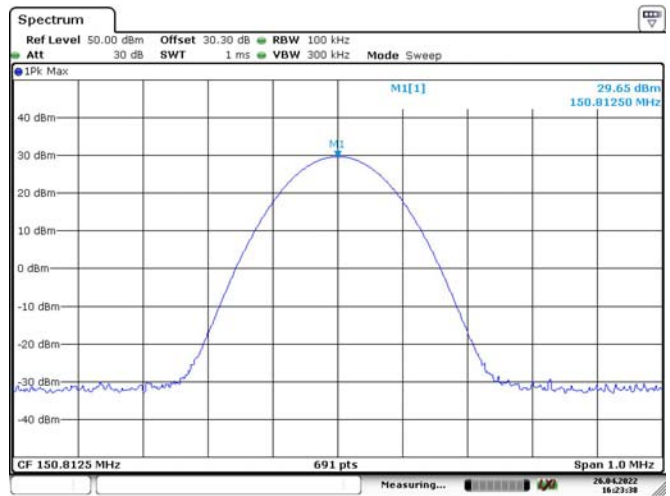


Date: 26.APR.2022 16:23:38

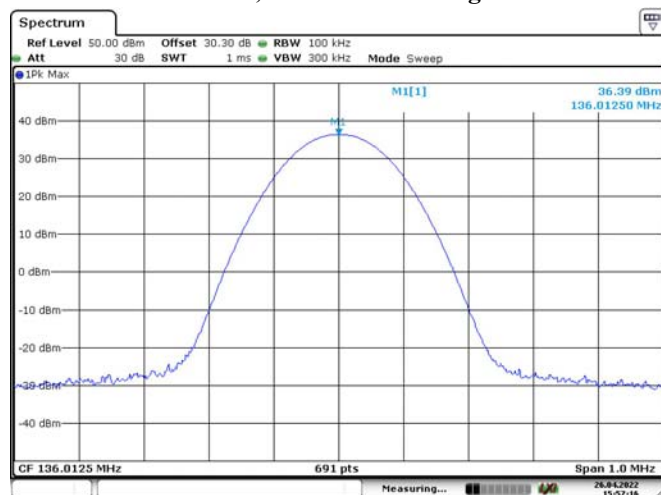4FSK, 12.5kHz:**Low Channel, 136.0125 MHz High Power**


Date: 26.APR.2022 15:57:17

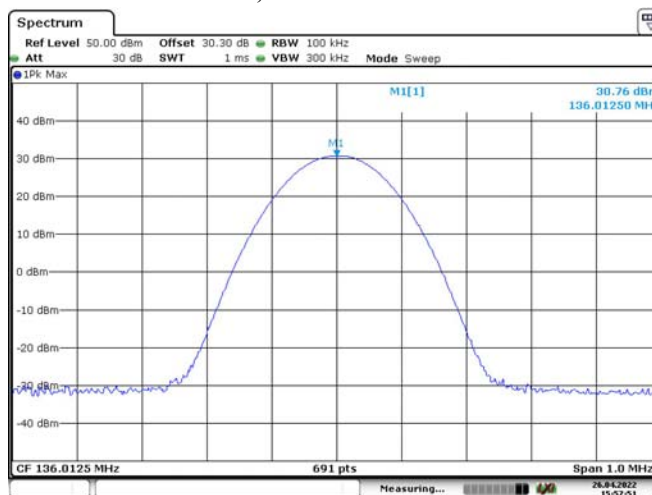Low Channel, 136.0125 MHz Low Power


Date: 26.APR.2022 15:57:52

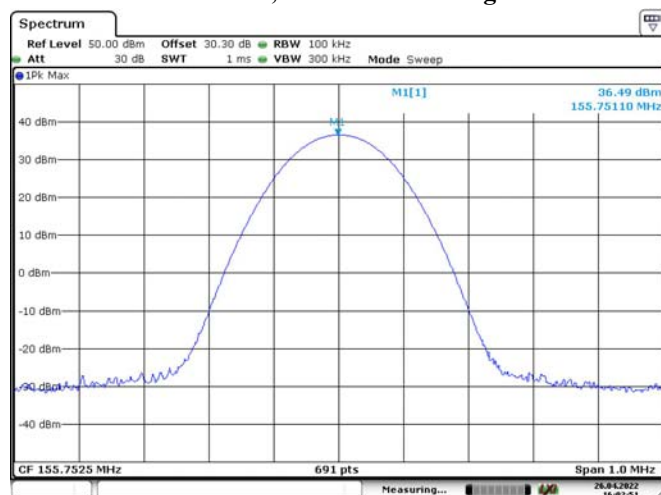Middle Channel, 155.7525 MHz High Power


Date: 26.APR.2022 16:02:52

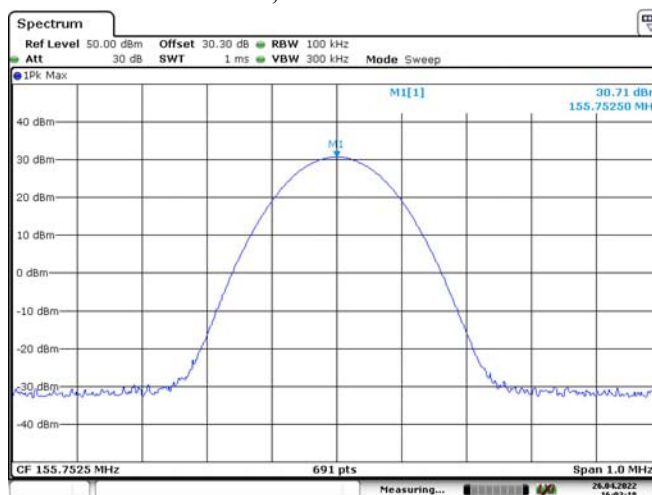Middle Channel, 155.7525 MHz Low Power

Date: 26.APR.2022 16:03:19

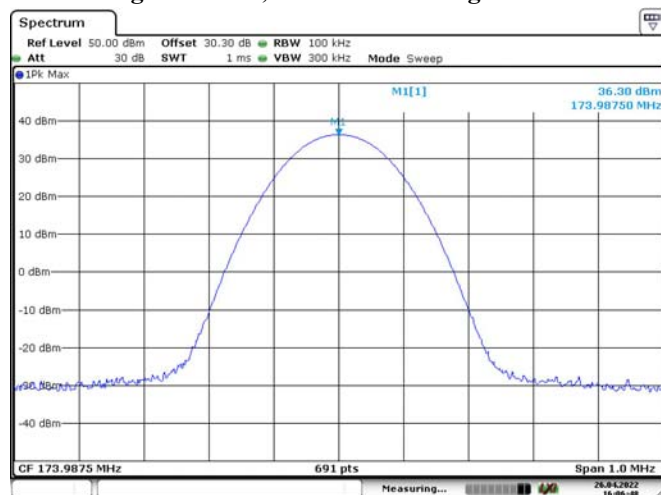
High Channel, 173.9875 MHz High Power

Date: 26.APR.2022 16:06:49

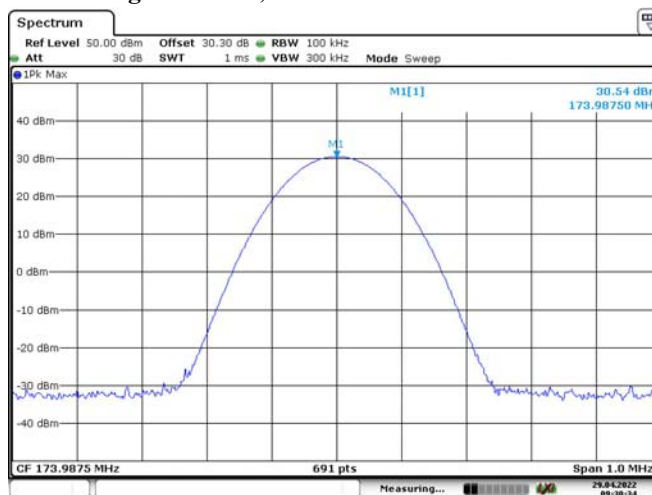
High Channel, 173.9875 MHz Low Power

Date: 29.APR.2022 09:30:35


Additional, For Part 74, 161.1 MHz High Power

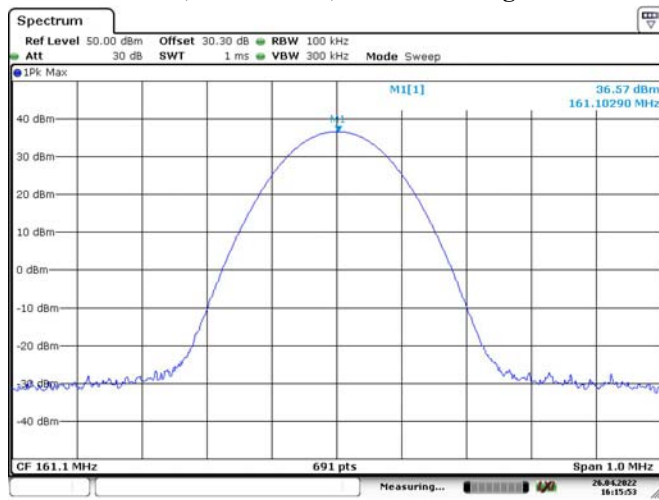


Additional, For Part74, 161.1 MHz Low Power

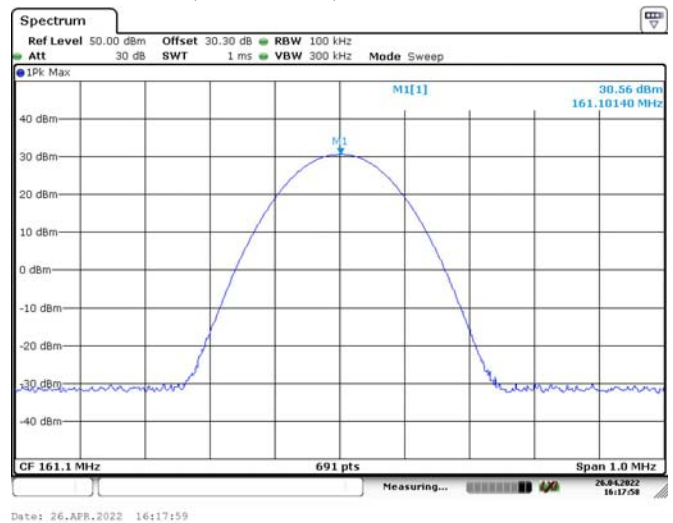


Additional, For Part 22, 150.8125 MHz High Power

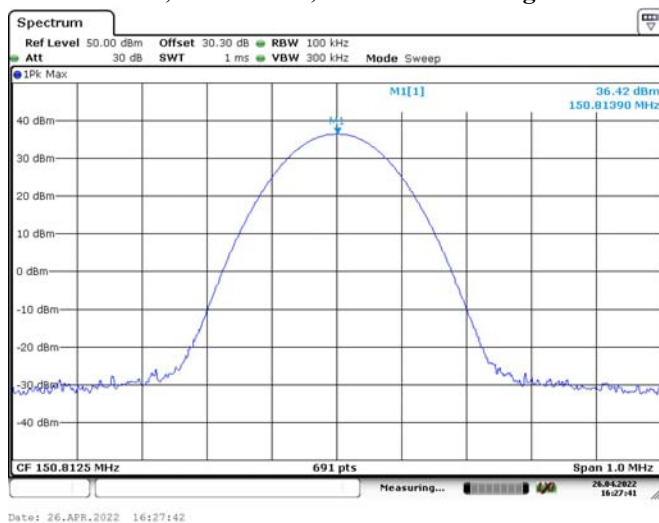


Additional, For Part 22, 150.8125 MHz Low Power

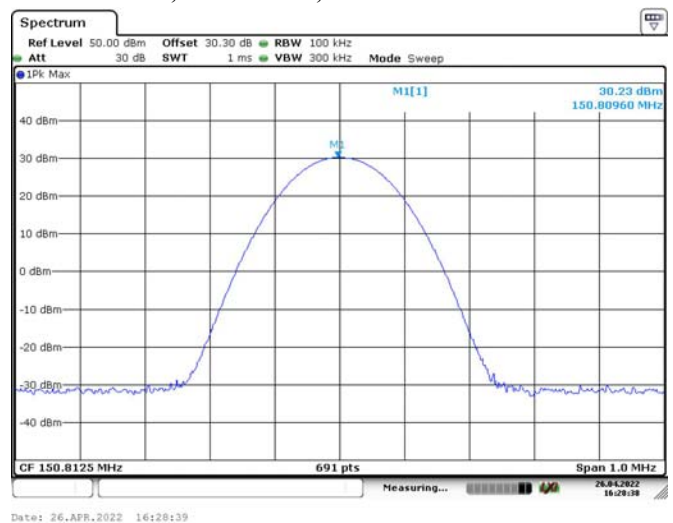


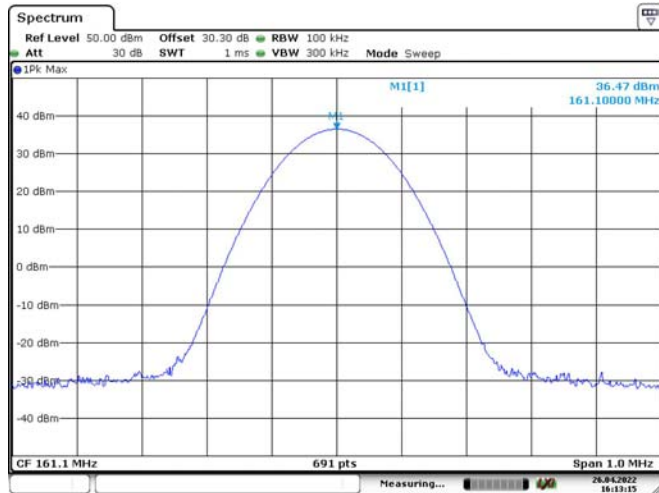FM, 25kHz:**Additional Channel, Part 74, 161.1 MHz High Power**


Date: 26.APR.2022 16:13:16

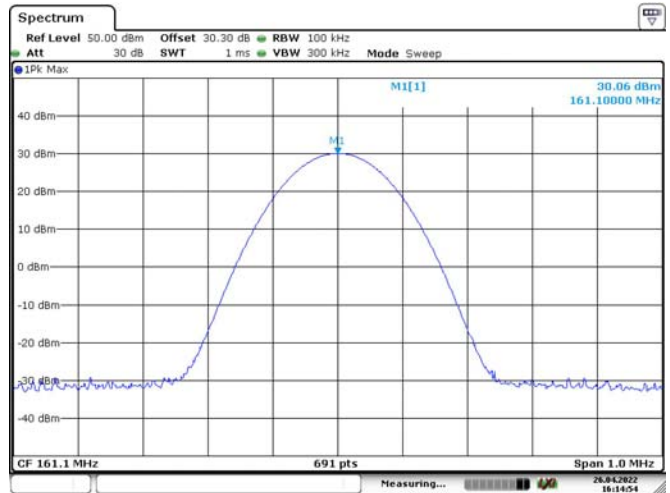Additional Channel, Part 74, 161.1 MHz Low Power

Date: 26.APR.2022 16:14:55

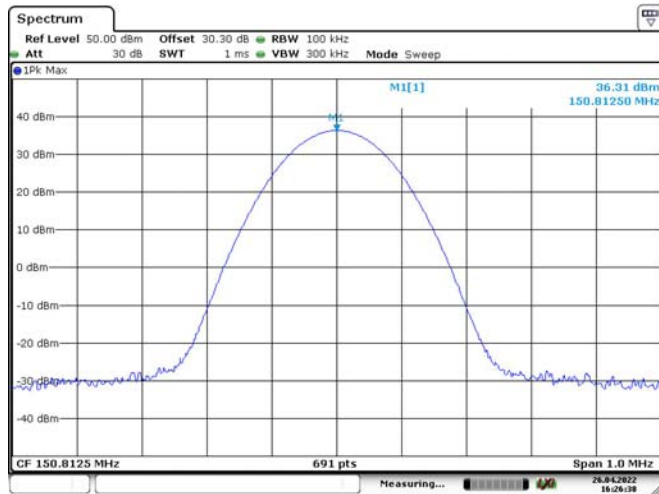Additional Channel, Part 22, 150.8125 MHz High Power

Date: 26.APR.2022 16:26:38

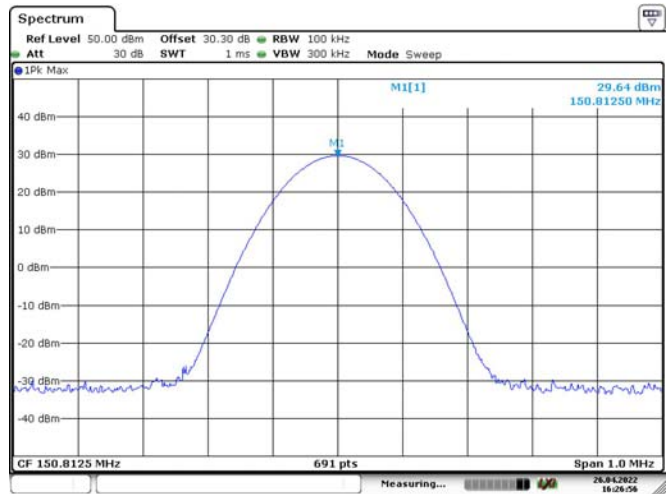Additional Channel, Part 22, 150.8125 MHz Low Power

Date: 26.APR.2022 16:26:57

4.2 MODULATION CHARACTERISTIC:

Serial Number:	CR22030025-RF-S1	Test Date:	2022/4/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	68	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**Audio Frequency Response – High Power**

Carrier Frequency: 155.7525 MHz	
Channel Spacing: 12.5kHz	
Modulation Frequency (Hz)	Response data (dB)
300	-13.72
400	-9.74
500	-7.05
600	-5.04
700	-3.38
800	-2.05
900	-0.90
1000	0.00
1200	1.71
1400	2.98
1600	4.13
1800	5.17
2000	6.14
2200	6.72
2400	7.11
2600	7.27
2800	7.14
3000	6.59

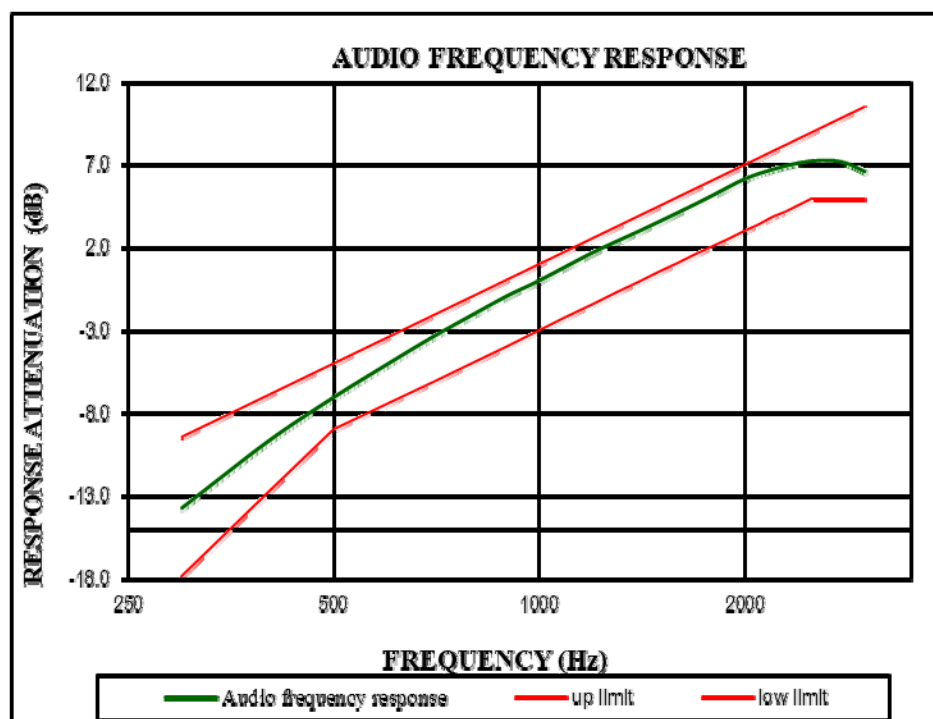


Carrier Frequency: 161.1 MHz	
Channel Spacing: 25kHz	
Modulation Frequency (Hz)	Response data (dB)
300	-13.81
400	-9.82
500	-7.17
600	-5.13
700	-3.49
800	-2.16
900	-1.00
1000	0.00
1200	1.61
1400	2.89
1600	4.01
1800	5.03
2000	6.00
2200	6.81
2400	7.29
2600	7.50
2800	7.41
3000	6.90

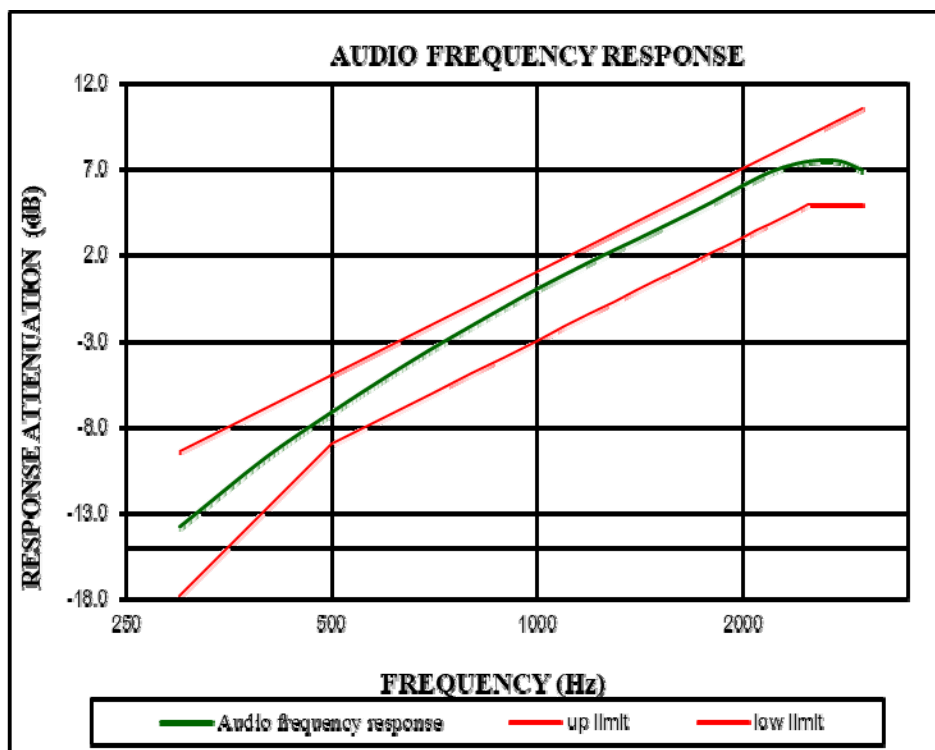


Modulation Limiting – High Power



Channel Spacing: 12.5kHz		Carrier Frequency: 155.7525 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.625	0.086	1.606	0.074	2.5
400	1.729	0.095	1.706	0.05	2.5
500	1.777	0.125	1.725	0.113	2.5
600	1.819	0.126	1.801	0.114	2.5
700	1.875	0.147	1.843	0.125	2.5
800	1.902	0.165	1.881	0.132	2.5
900	1.856	0.185	1.834	0.165	2.5
1000	1.794	0.204	1.746	0.182	2.5
1200	1.789	0.223	1.756	0.201	2.5
1400	1.905	0.254	1.863	0.233	2.5
1600	1.935	0.288	1.852	0.261	2.5
1800	1.813	0.323	1.801	0.301	2.5
2000	1.854	0.356	1.821	0.323	2.5
2200	1.876	0.386	1.843	0.362	2.5
2400	1.962	0.421	1.923	0.402	2.5
2600	1.944	0.449	1.913	0.426	2.5
2800	1.963	0.467	1.943	0.431	2.5
3000	1.917	0.452	1.863	0.436	2.5

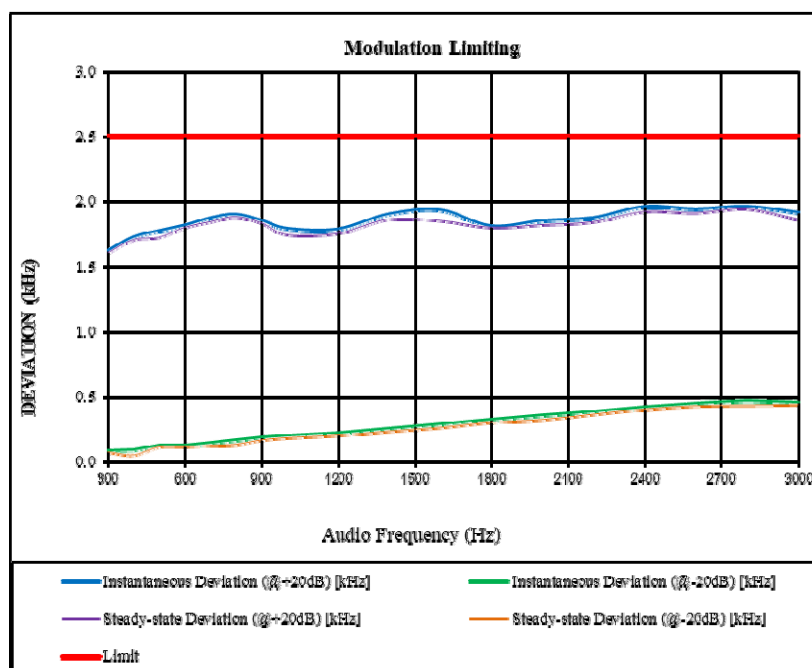

Channel Spacing: 25kHz		Carrier Frequency: 161.1 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	3.365	0.118	3.263	0.101	5
400	3.576	0.145	3.469	0.116	5
500	3.626	0.166	3.543	0.143	5
600	3.723	0.212	3.614	0.201	5
700	3.821	0.263	3.751	0.243	5
800	3.886	0.279	3.763	0.246	5
900	3.796	0.315	3.624	0.301	5
1000	3.663	0.347	3.551	0.331	5
1200	3.609	0.402	3.463	0.376	5
1400	3.856	0.459	3.746	0.436	5
1600	3.884	0.522	3.716	0.503	5
1800	3.667	0.574	3.573	0.543	5
2000	3.654	0.651	3.516	0.616	5
2200	3.759	0.717	3.635	0.703	5
2400	3.923	0.779	3.806	0.731	5
2600	3.926	0.839	3.816	0.807	5
2800	4.036	0.864	3.986	0.834	5
3000	3.942	0.849	3.832	0.831	5

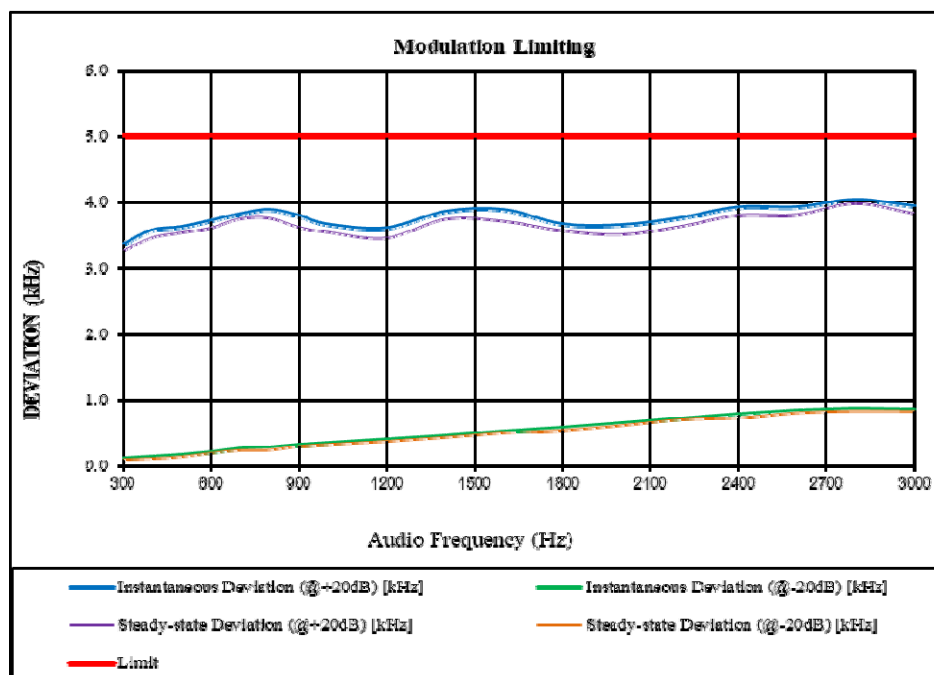

Audio Frequency Low Pass Filter Response – High Power

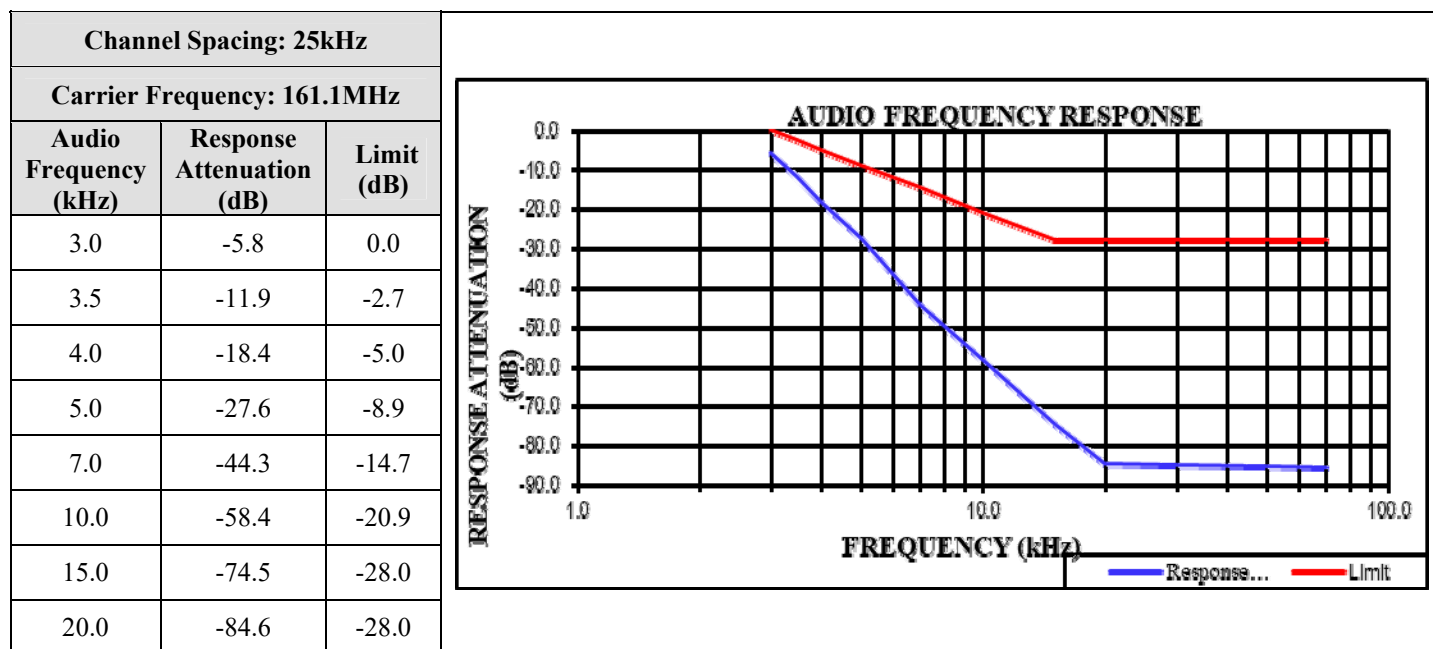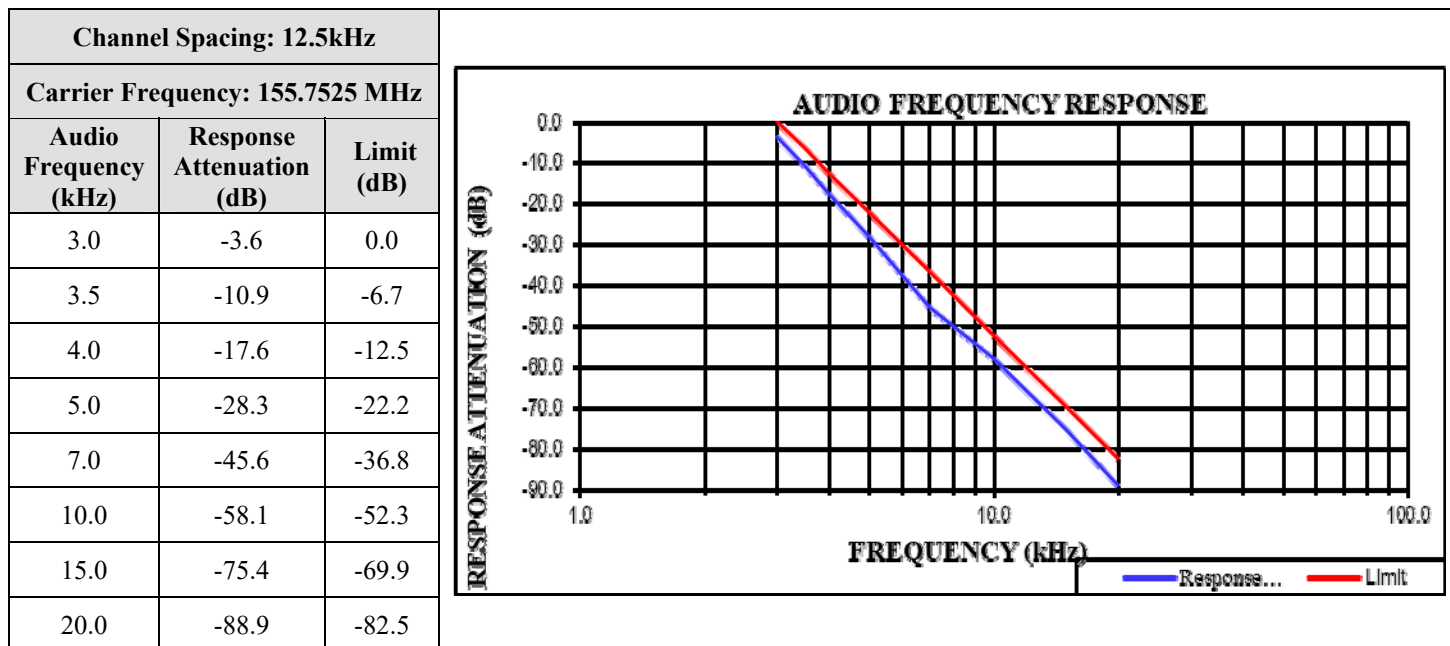

4.3 OCCUPIED BANDWIDTH & EMISSION MASK:

Serial Number:	CR22030025-RF-S1	Test Date:	2022/4/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	68	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Test Mode	Test Channel	Test Frequency (MHz)	High Power Level		Low Power Level	
			99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)
FM 12.5kHz	Low	136.0125	5.355	10.275	5.282	10.058
	Middle	155.7525	5.209	10.275	5.209	10.275
	High	173.9875	5.282	10.203	5.282	10.203
	Additional	150.8125	5.282	10.275	5.572	10.275
	Additional	161.1	5.644	10.275	5.644	10.275
4FSK 12.5kHz	Low	136.0125	6.295	8.611	6.295	8.394
	Middle	155.7525	6.439	8.973	6.512	9.117
	High	173.9875	6.729	9.117	6.729	9.117
	Additional	150.8125	6.367	8.611	6.512	9.190
	Additional	161.1	6.367	8.755	6.657	8.973
FM 25kHz	Additional	150.8125	13.024	15.770	12.735	15.920
	Additional	161.1	13.169	15.770	14.327	15.770

Note:

Emission bandwidth was based on calculation method instead of measurement.

Emission Designator: Per CFR 47 §2.201& §2.202, BW = 2M + 2D

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 7K60F1D and 7K60F1E

The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).



F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.



The 30.30dB is the Insertion loss of the RF cable, Coaxial Attenuators, which was offset into the Spectrum Analyzer.

FM, 12.5kHz, High Power:



Low Channel

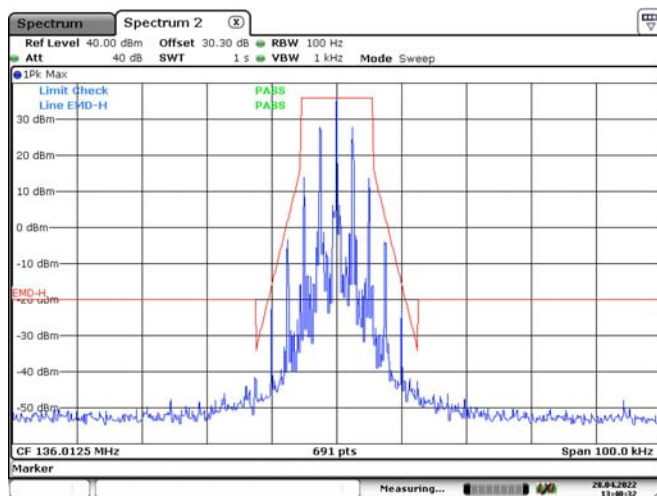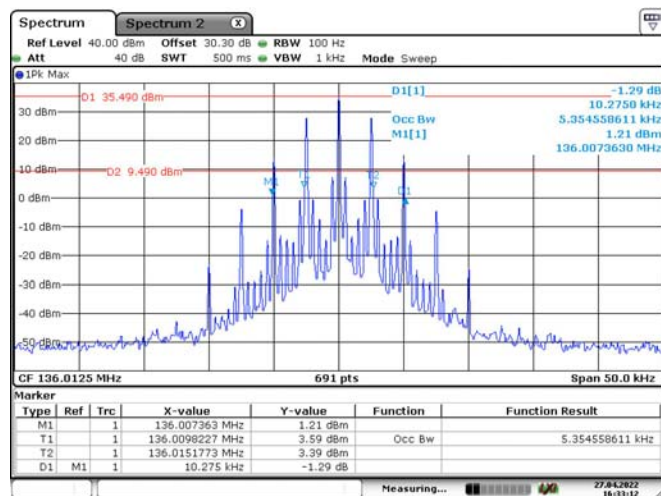


Middle Channel

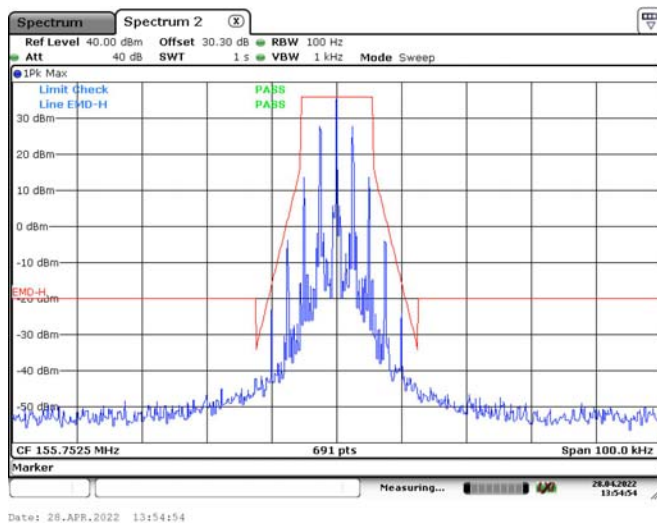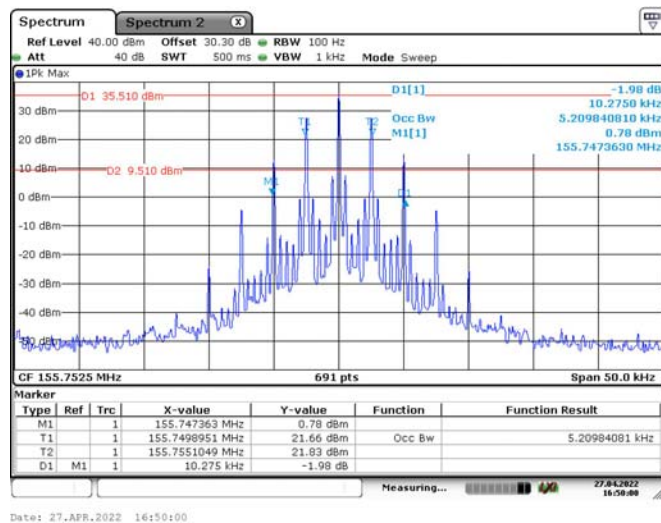


High Channel

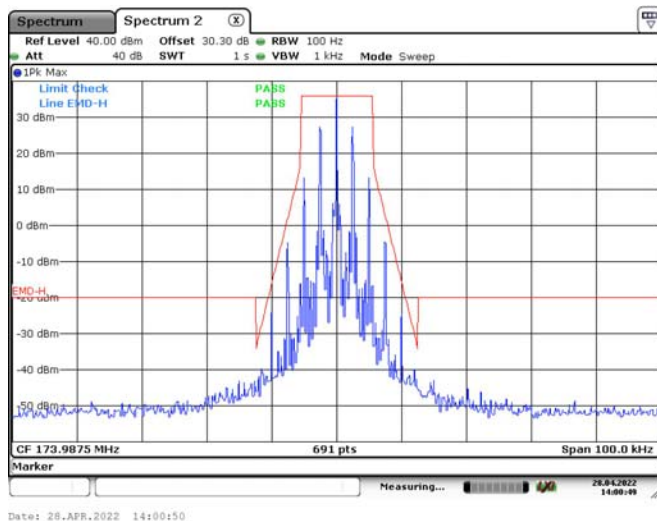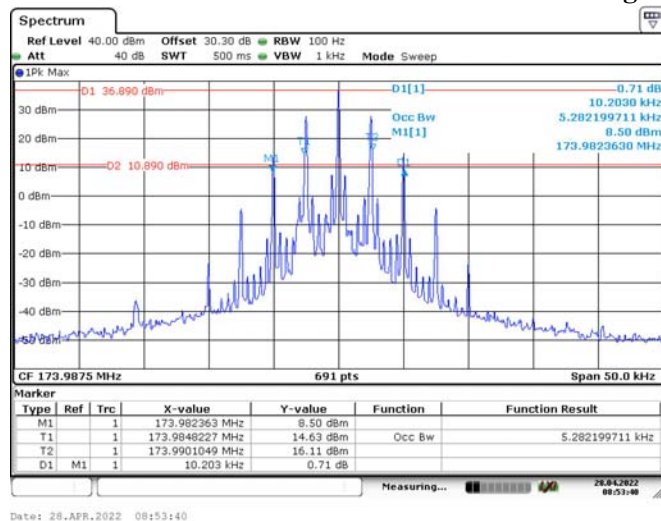

Additional Channel Part 74, 161.1 MHz

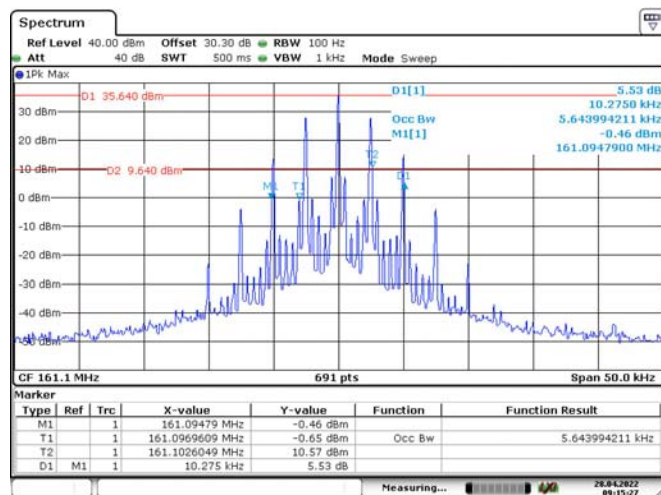


Date: 28.APR.2022 09:15:27

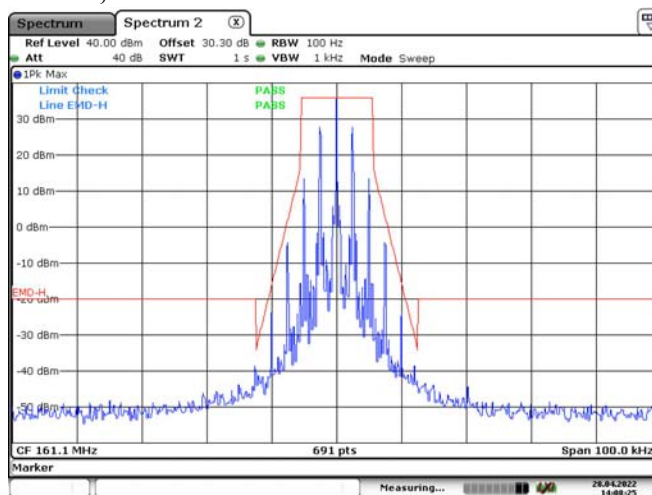


Date: 28.APR.2022 14:08:25

Additional Channel Part 22, 150.8125 MHz

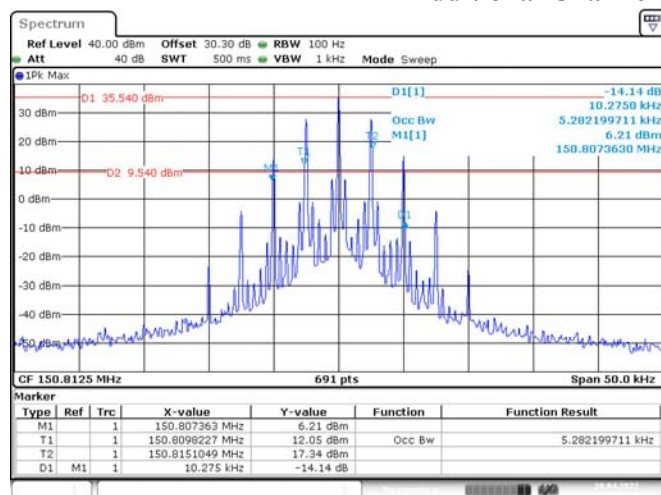



Date: 28.APR.2022 09:15:35

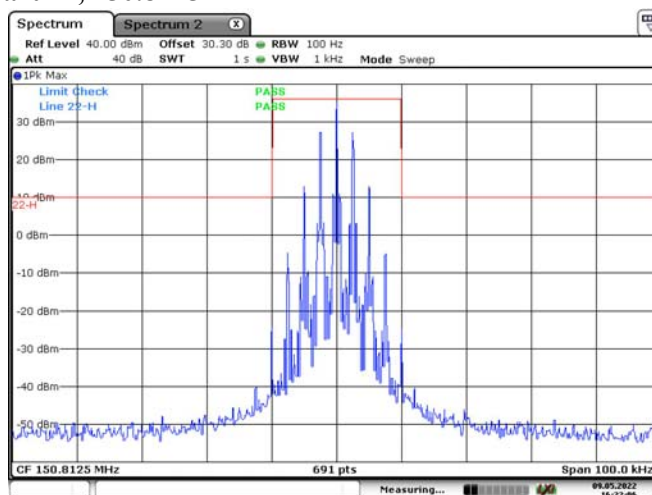



Date: 9.MAY.2022 16:22:06

FM, 12.5kHz, Low Power:



Low Channel

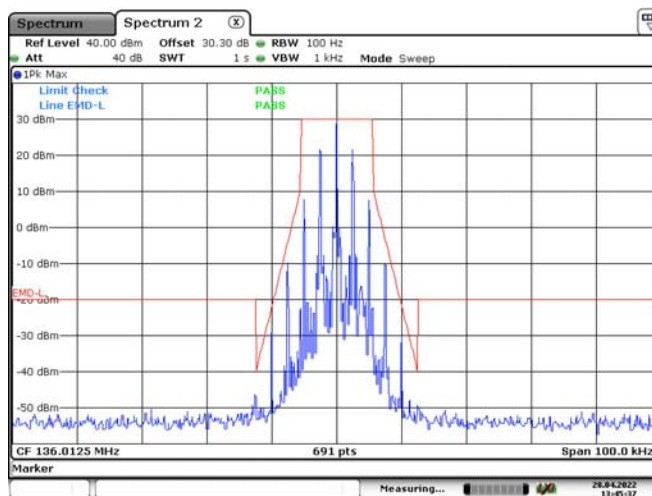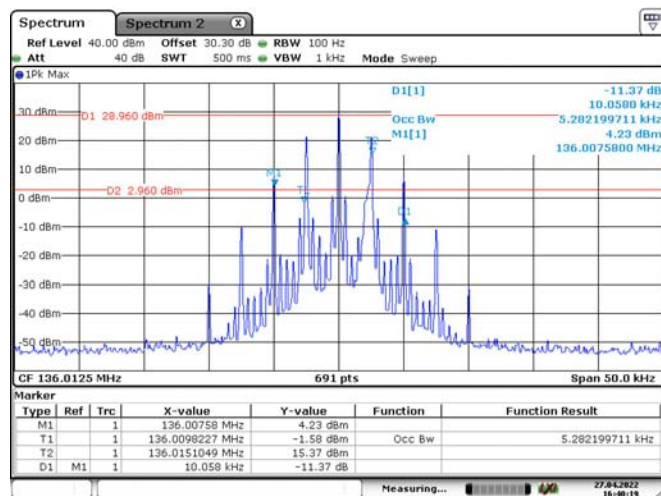


Middle Channel

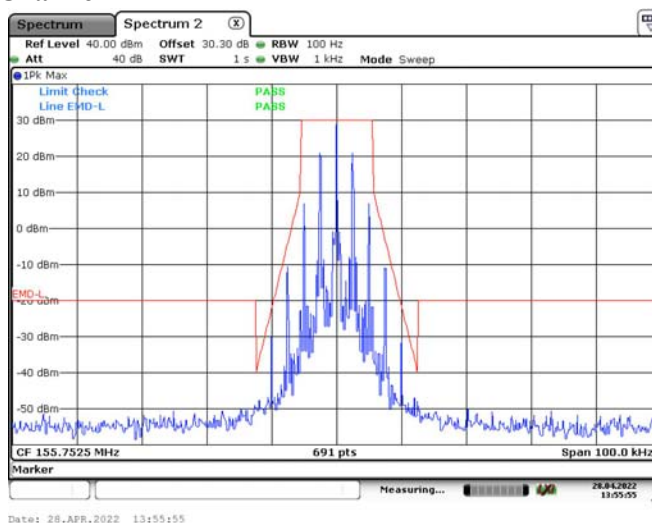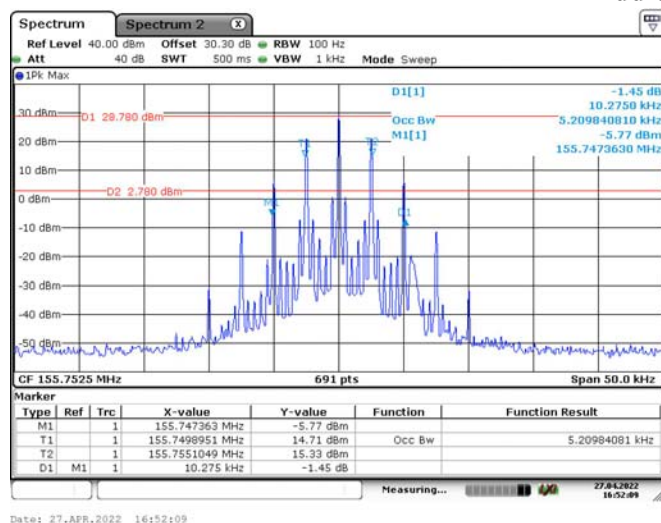


High Channel

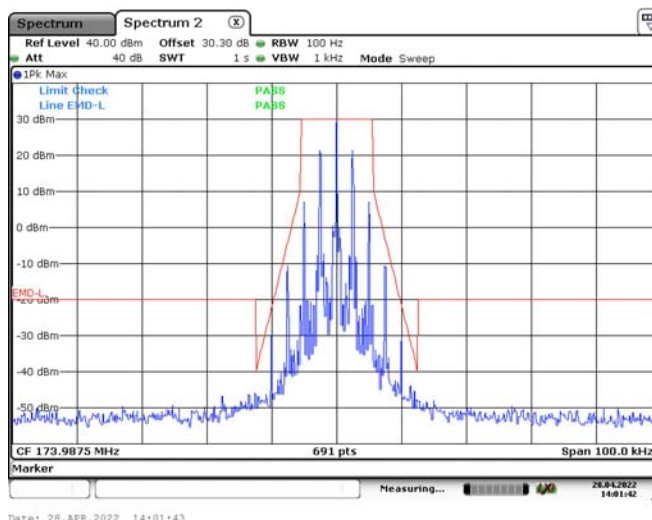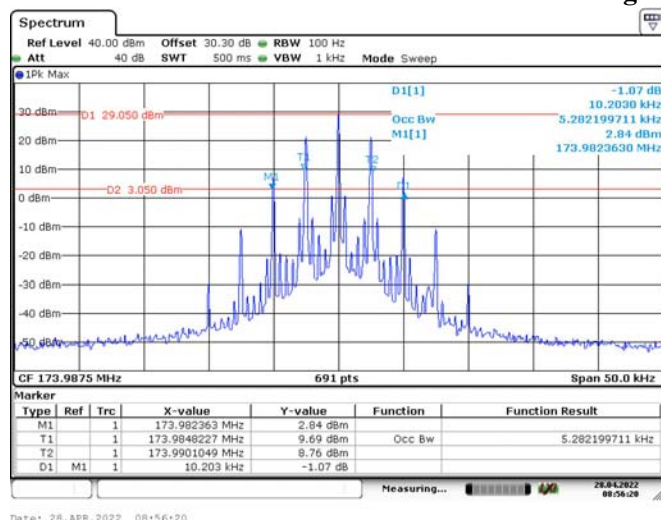

Additional Channel Part 74, 161.1 MHz

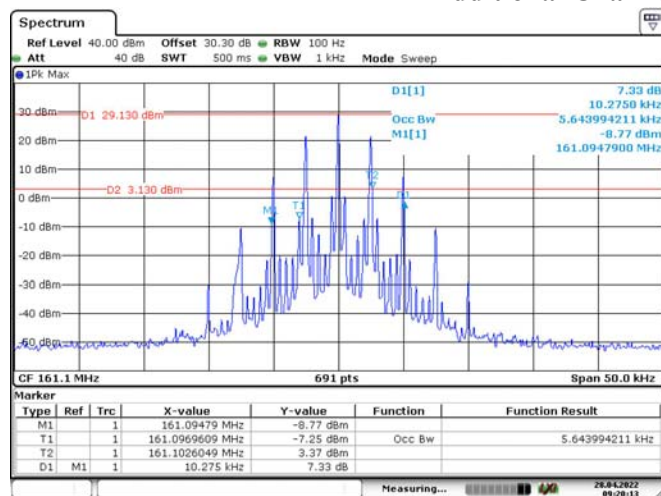


Date: 28.APR.2022 09:20:13

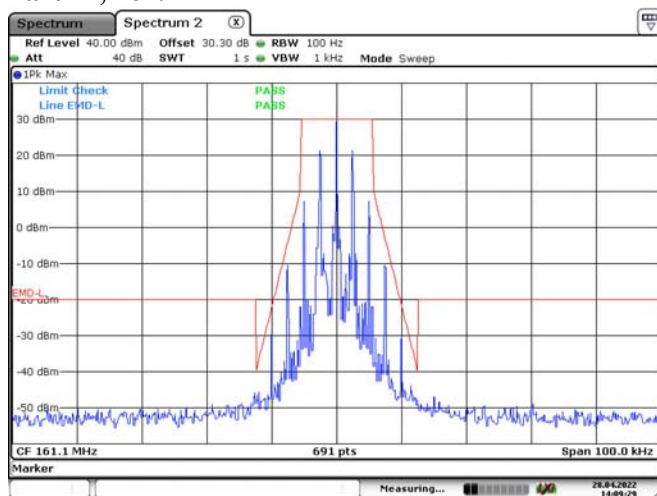


Date: 28.APR.2022 14:09:30

Additional Channel Part 22, 150.8125 MHz

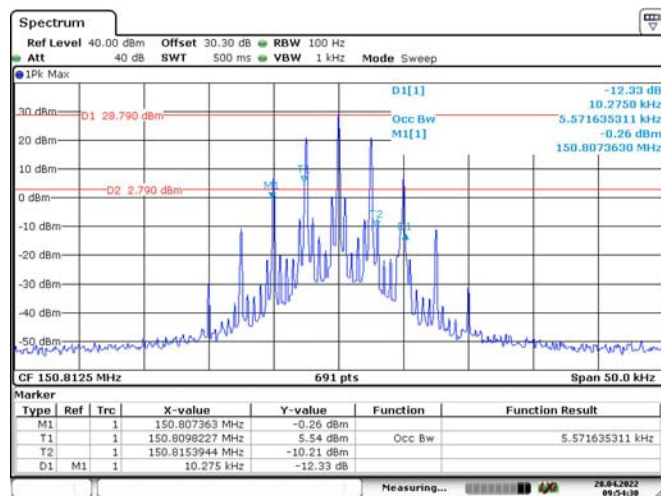



Date: 28.APR.2022 09:54:30

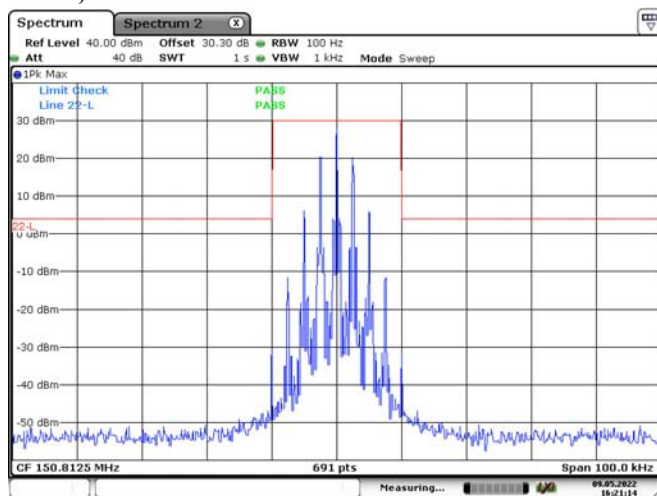



Date: 9.MAY.2022 16:21:14

4FSK, 12.5kHz, High Power:



Low Channel

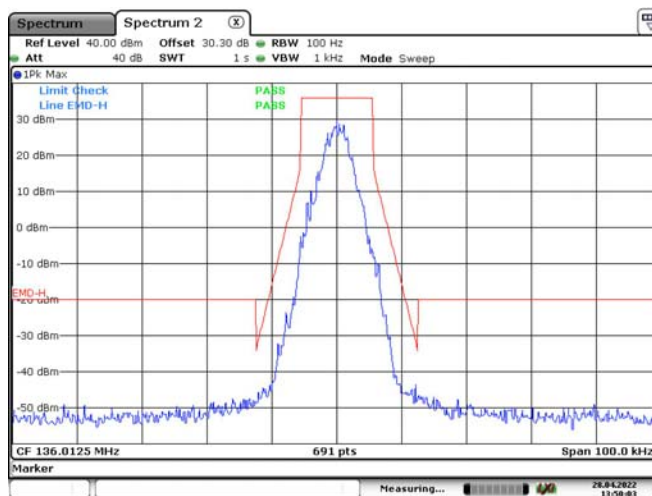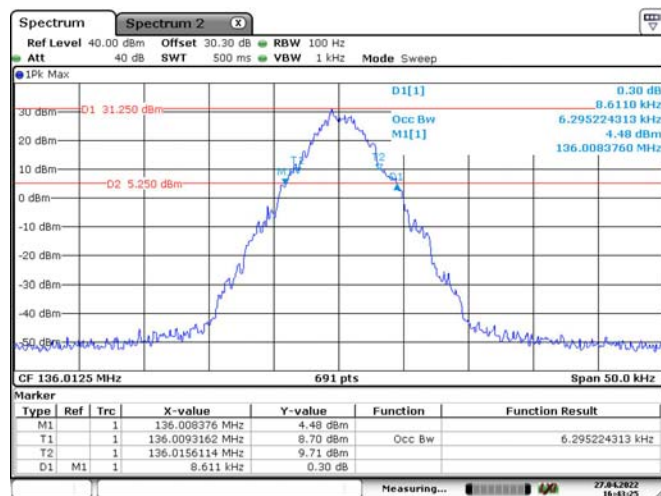


Middle Channel

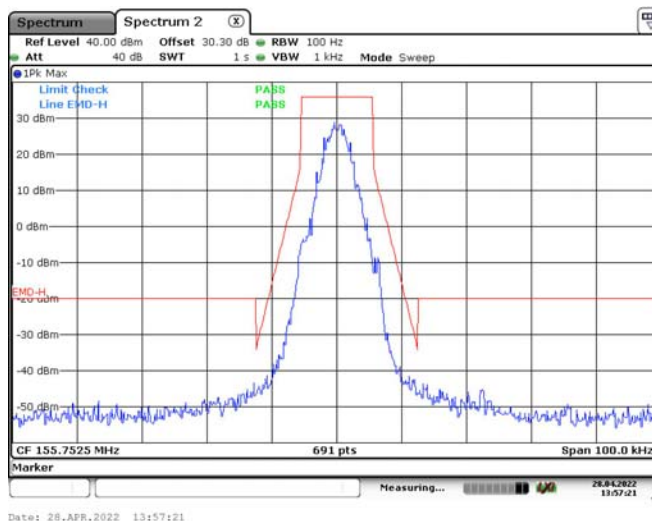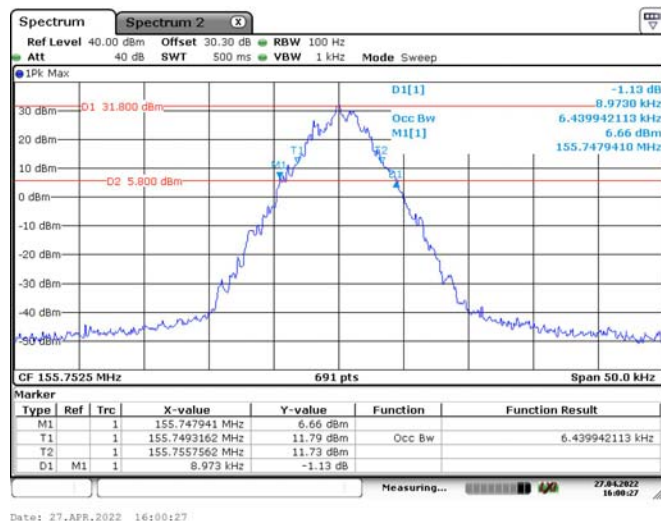


High Channel

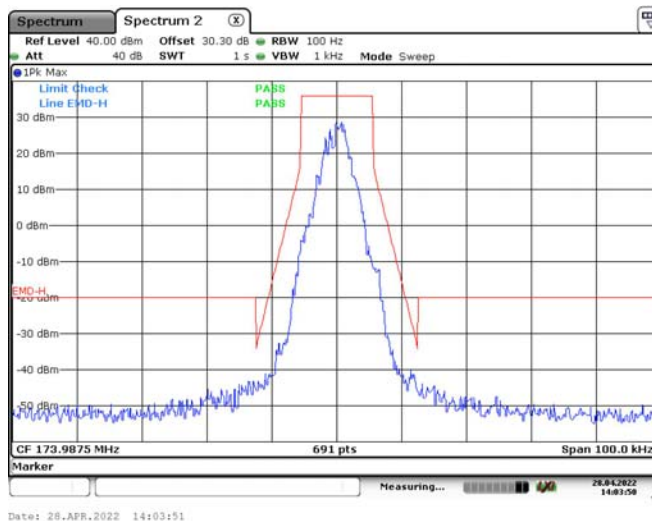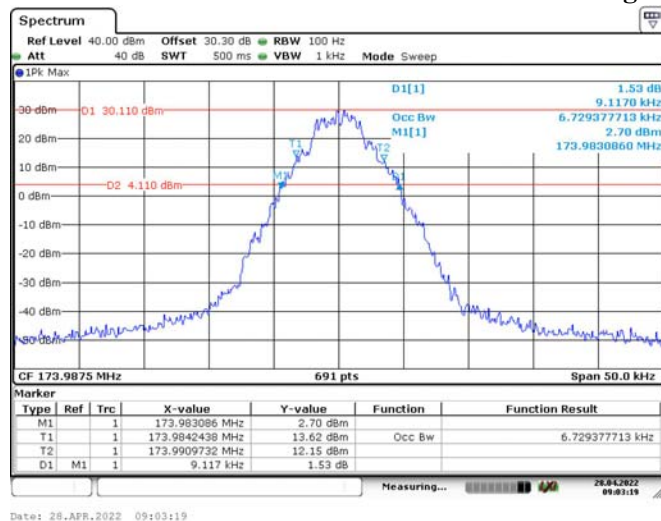

Additional Channel Part 74, 161.1 MHz

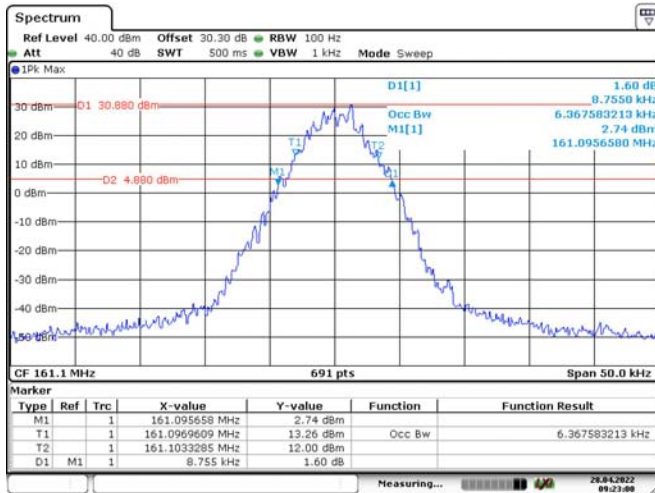


Date: 28.APR.2022 09:23:00

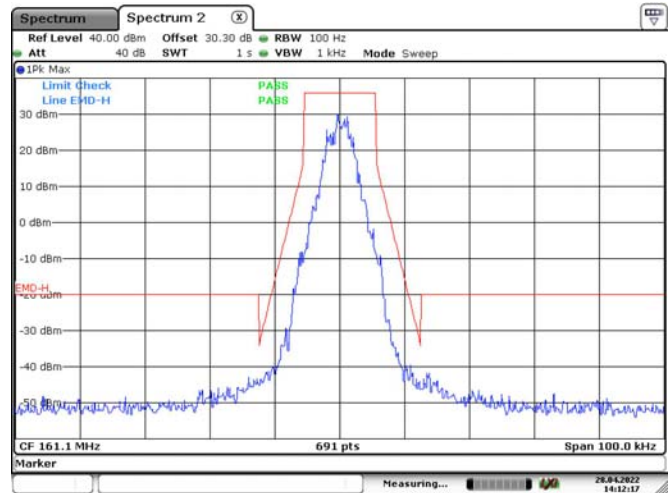


Date: 28.APR.2022 14:12:18

Additional Channel Part 22, 150.8125 MHz

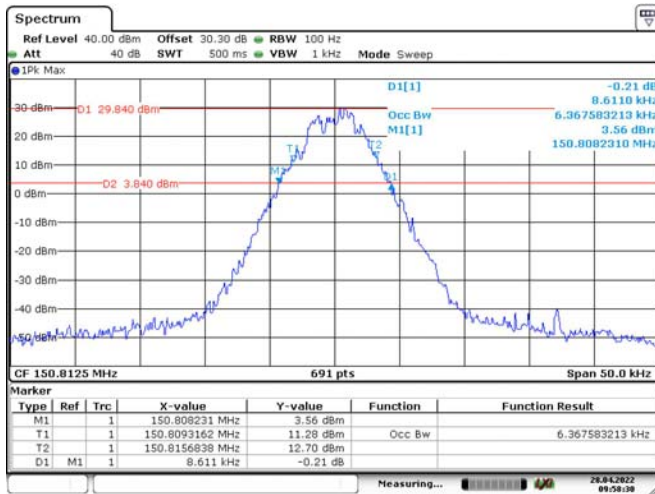



Date: 28.APR.2022 09:58:30

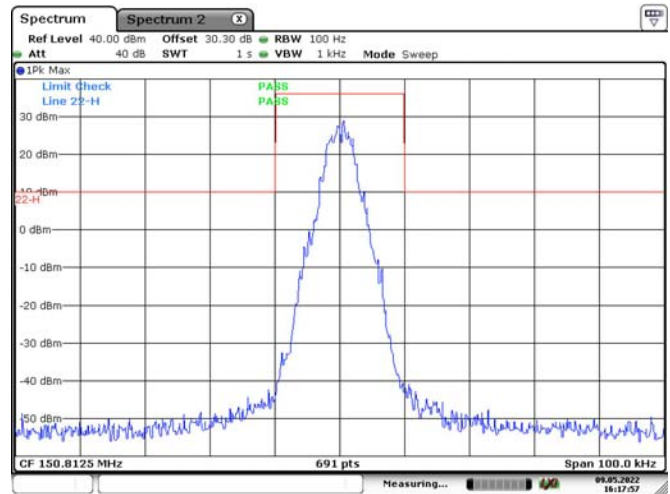



Date: 9.MAY.2022 16:17:57

4FSK, 12.5kHz, Low Power:



Low Channel

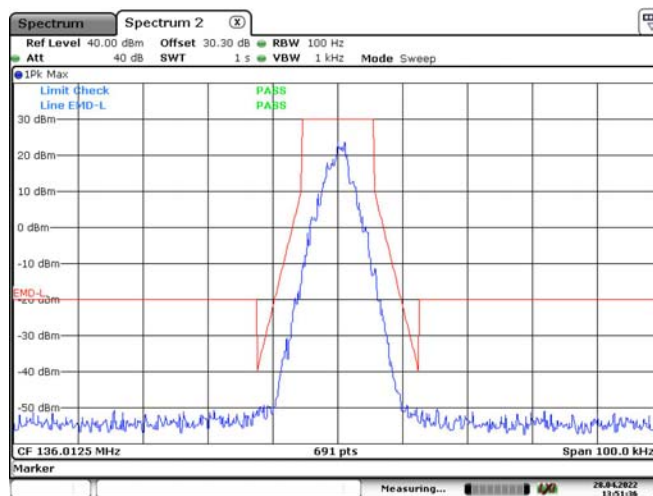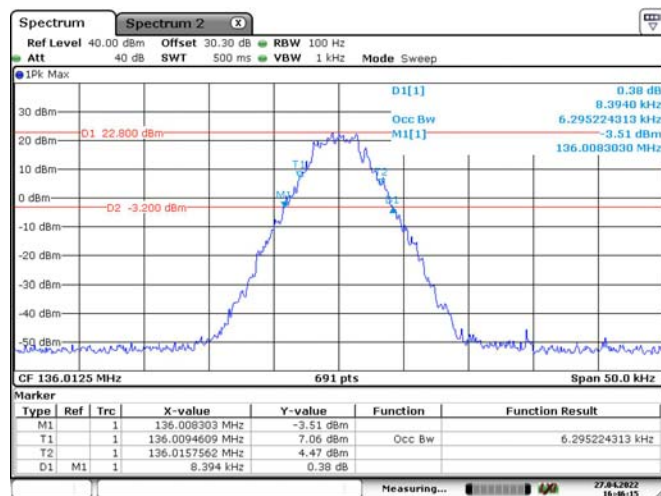


Middle Channel

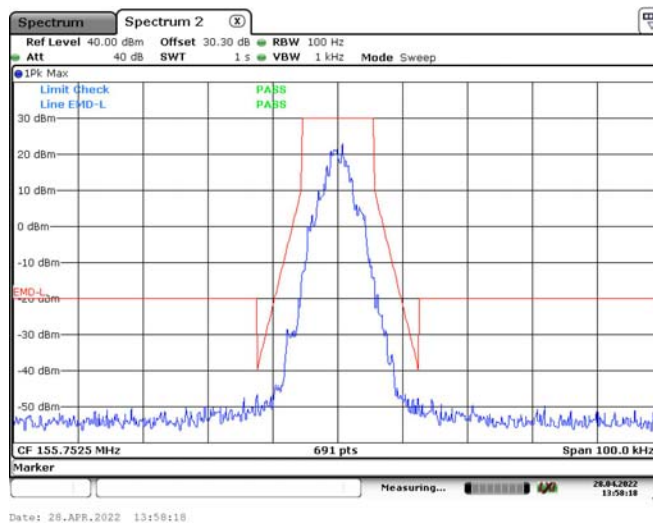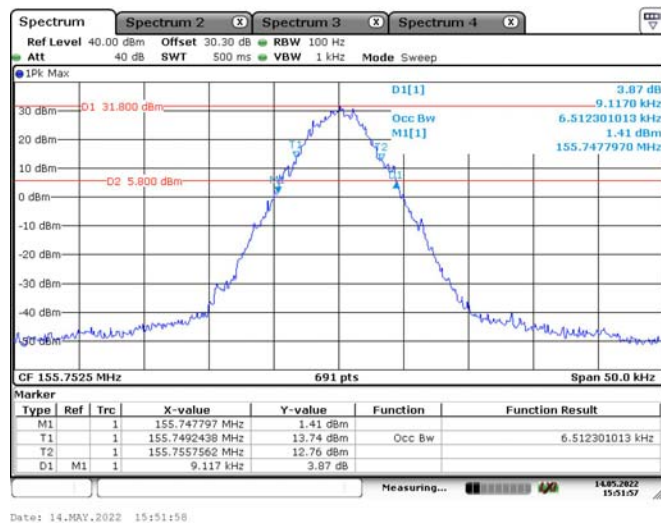


High Channel

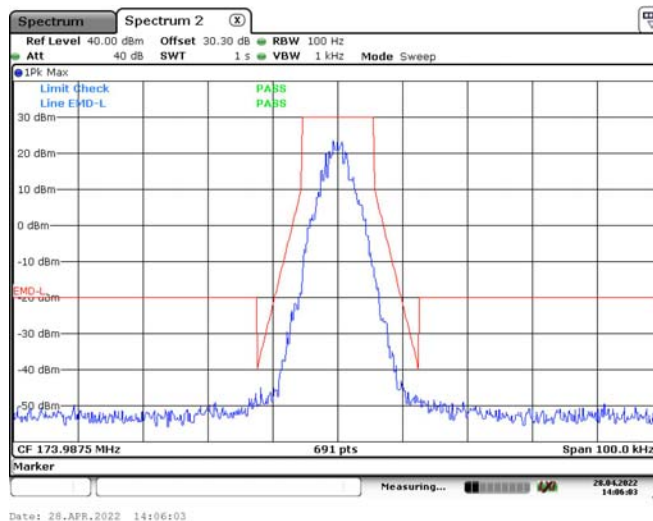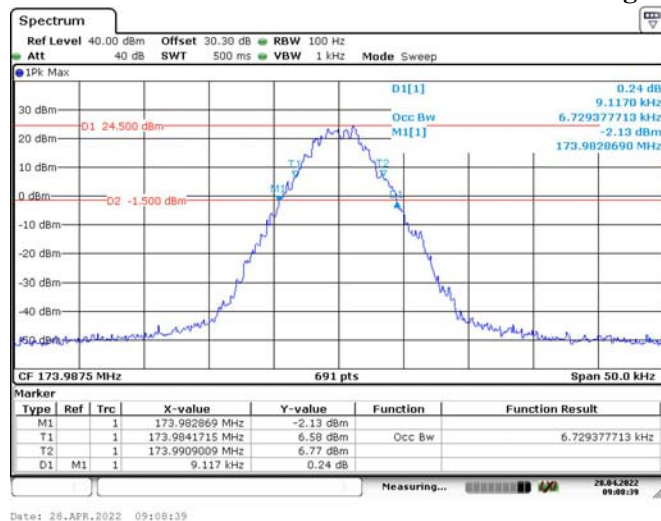

Additional Channel Part 74, 161.1 MHz

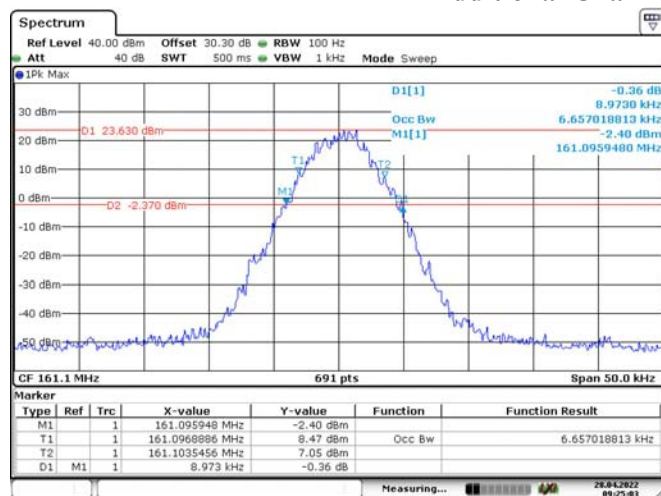


Date: 28.APR.2022 09:25:03

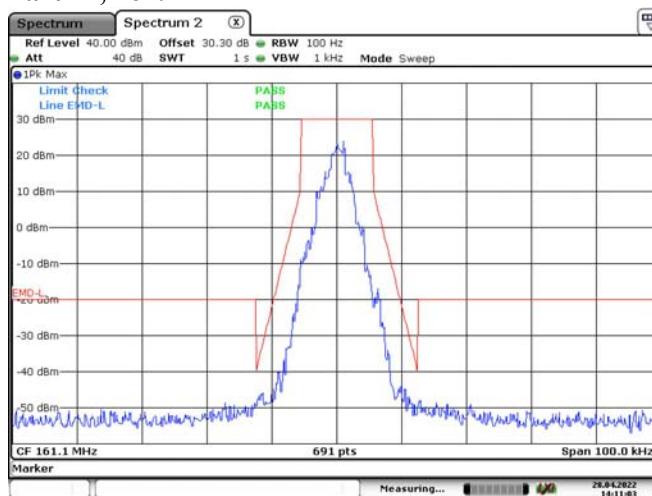


Date: 28.APR.2022 14:11:04

Additional Channel Part 22, 150.8125 MHz

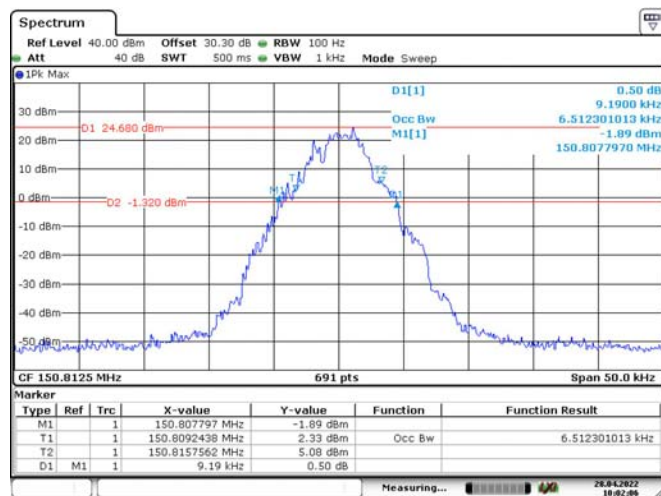


Date: 28.APR.2022 10:02:06

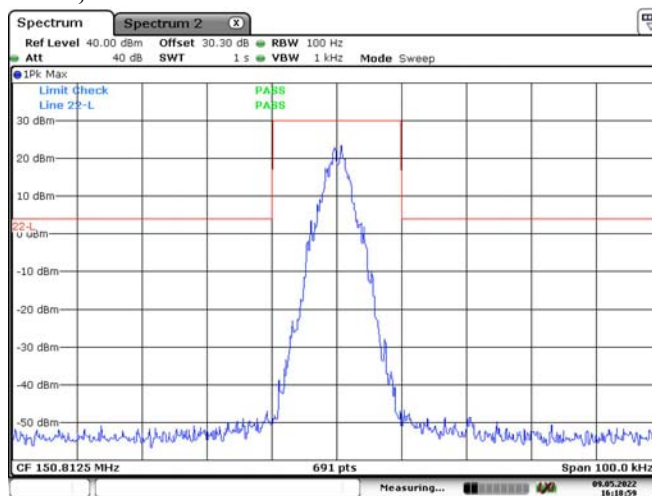


Date: 9.MAY.2022 16:10:59

FM, 25 kHz, High Power:

Additional Channel Part 74, 161.1 MHz

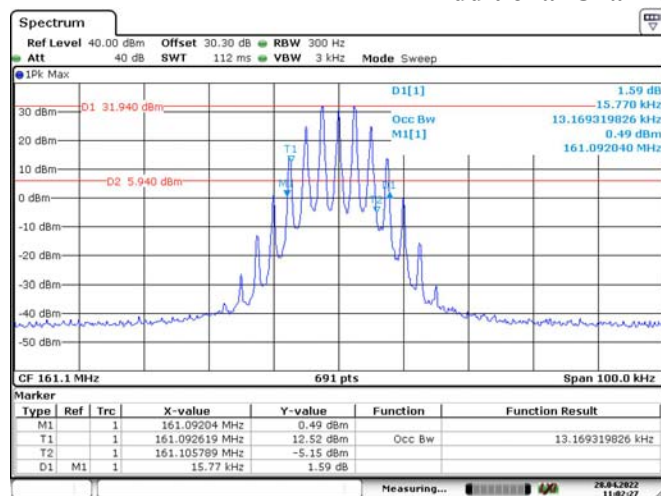


Date: 28.APR.2022 11:02:28

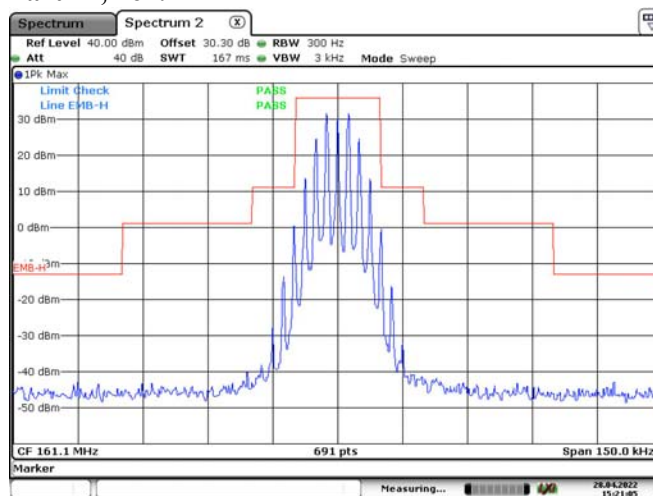


Date: 28.APR.2022 15:21:05

Additional Channel Part 22, 150.8125 MHz

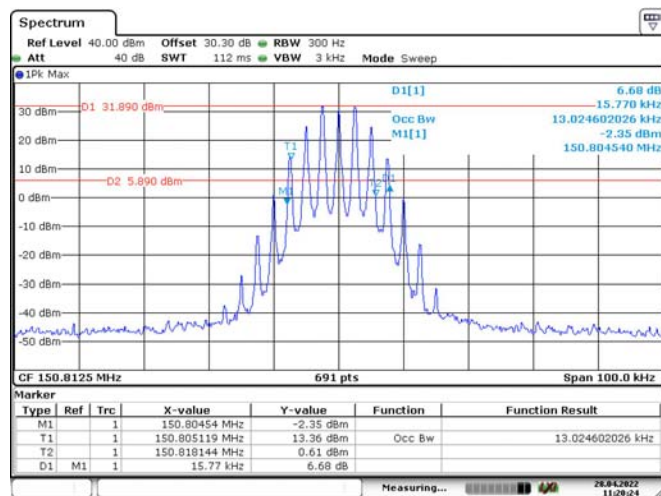



Date: 28.APR.2022 11:20:24

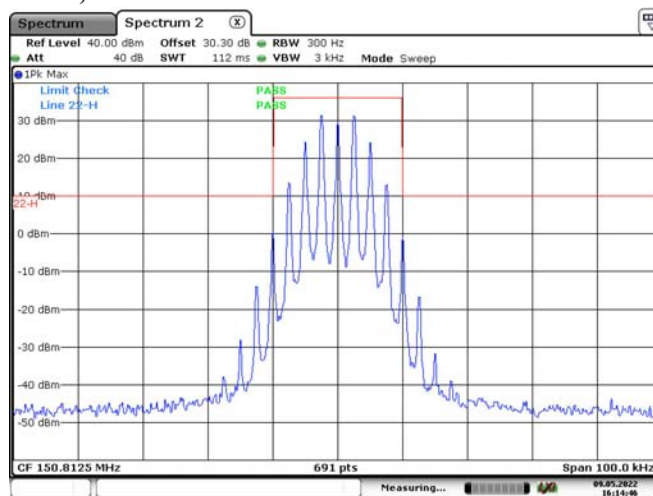



Date: 9.MAY.2022 16:14:47

FM, 25 kHz, Low Power:

Additional Channel Part 74, 161.1 MHz

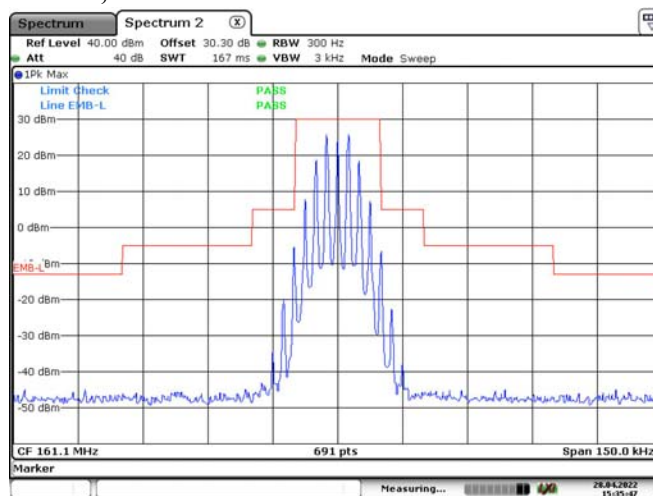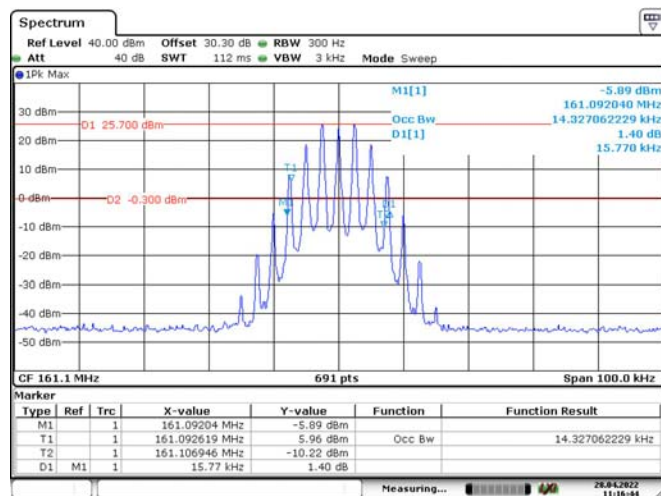

Additional Channel Part 22, 150.8125 MHz

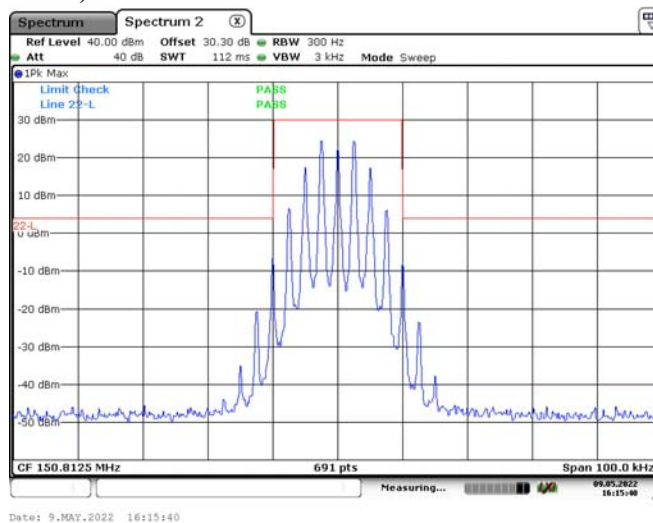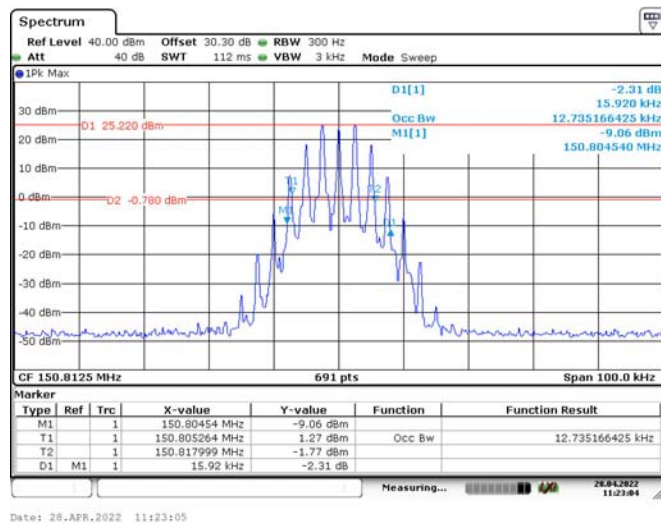

4.4 SPURIOUS EMISSIONS AT ANTENNA TERMINALS:

Serial Number:	CR22030025-RF-S1	Test Date:	2022/4/27~2022/05/06
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~26.1	Relative Humidity: (%)	62~63	ATM Pressure: (kPa)	100.3~100.7
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A







** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

Note:


Only High power was tested.

The 30.30dB is the Insertion loss of the RF cable, Coaxial Attenuators, which was offset into the Spectrum Analyzer.

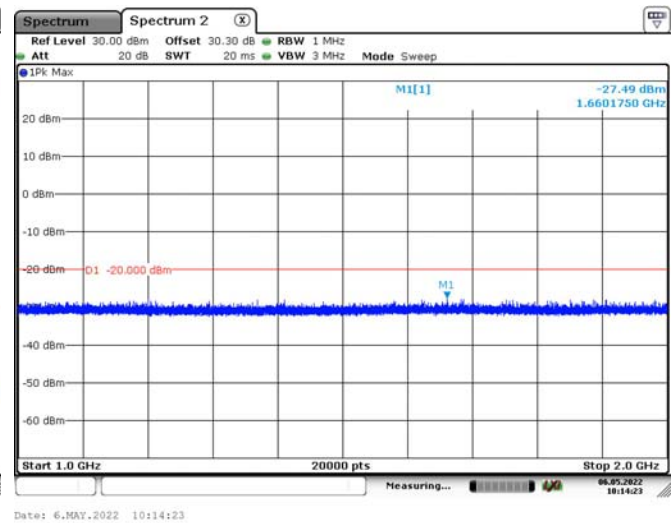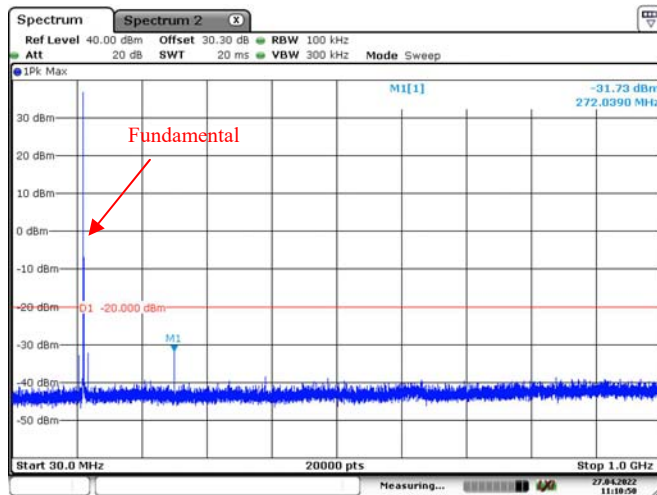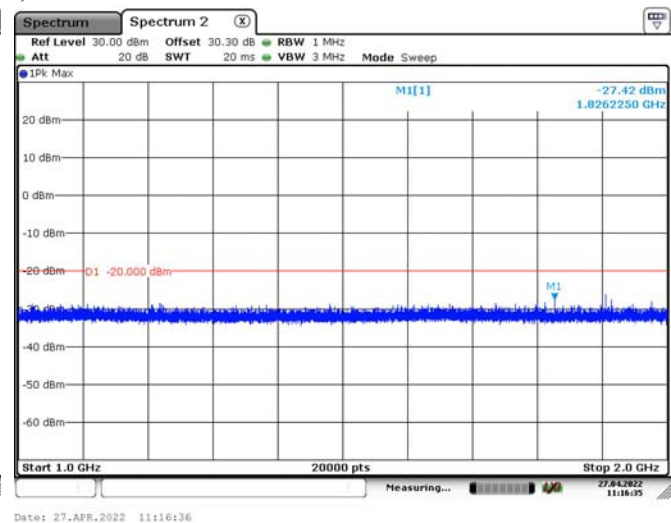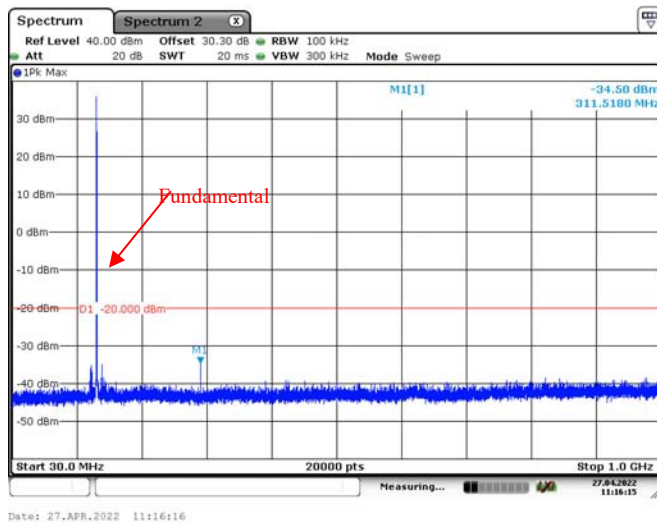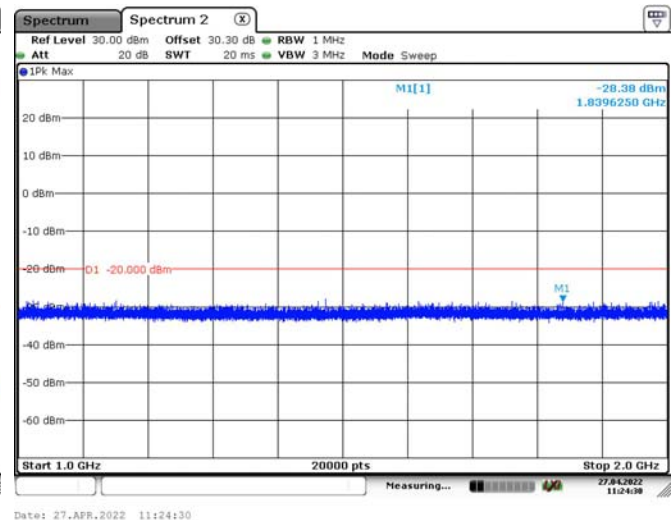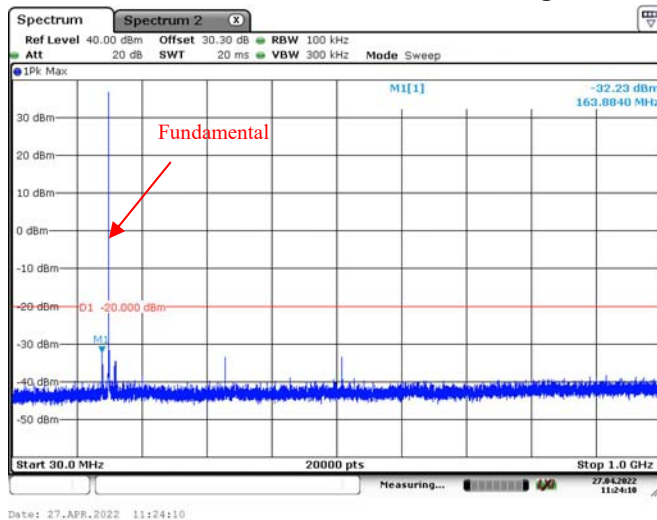
Test Data:**FM, 12.5kHz:****Low Channel, 136.0125 MHz****Middle Channel, 155.7525 MHz****High Channel, 173.9875 MHz**

4FSK, 12.5kHz:

Low Channel, 136.0125 MHz

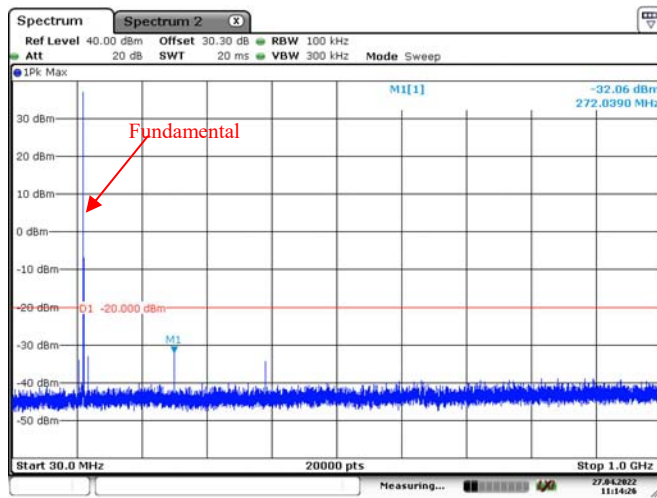


Date: 27.APR.2022 11:14:26

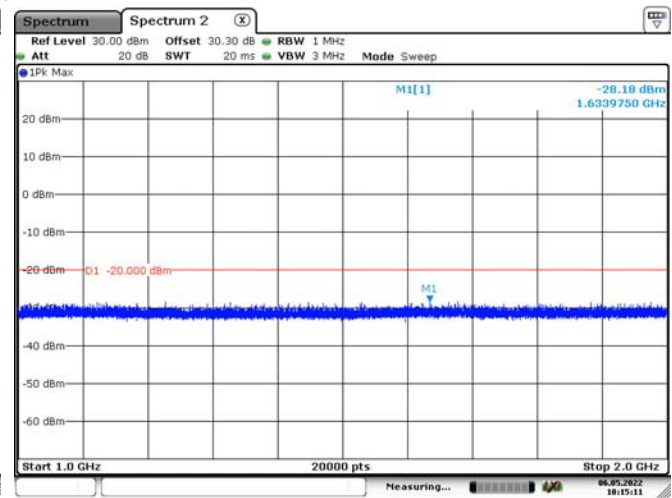


Date: 06.MAY.2022 10:15:11

Middle Channel, 155.7525 MHz

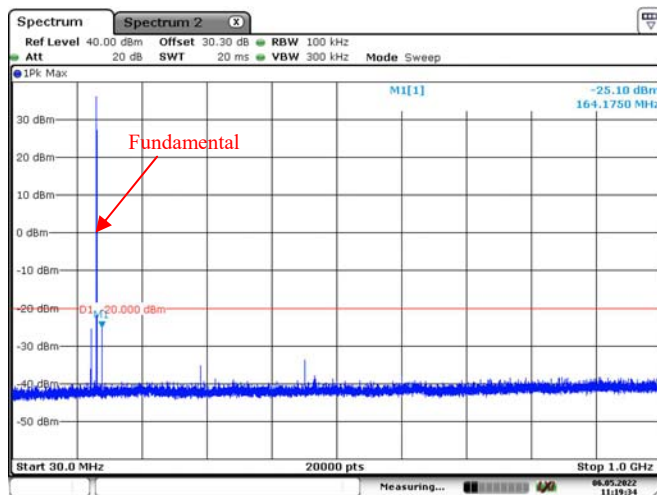


Date: 06.MAY.2022 11:19:34

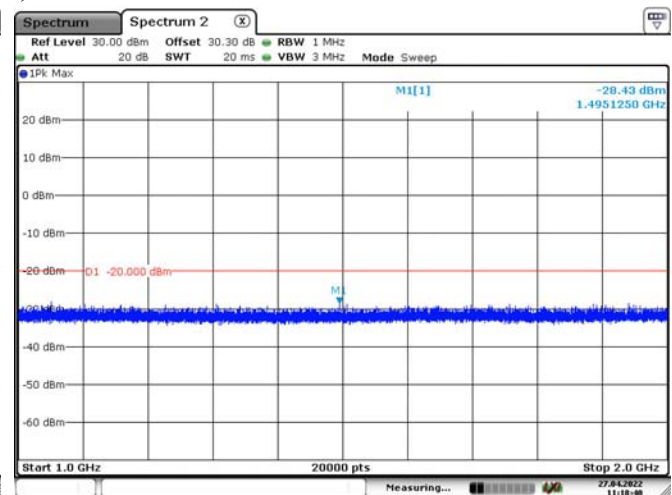


Date: 27.APR.2022 11:18:40

High Channel, 173.9875 MHz

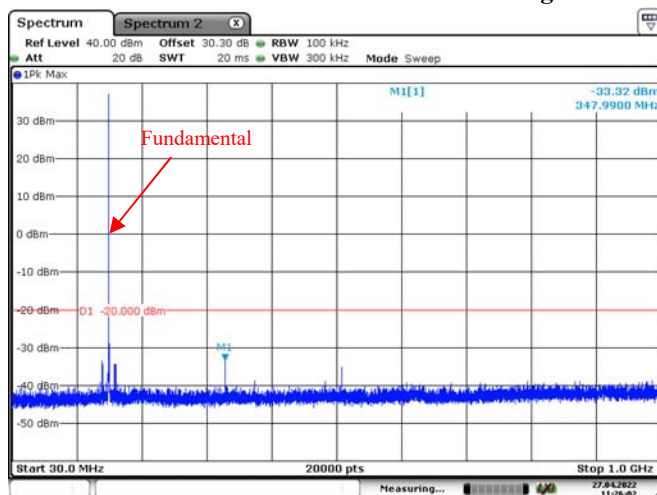



Date: 27.APR.2022 11:26:03

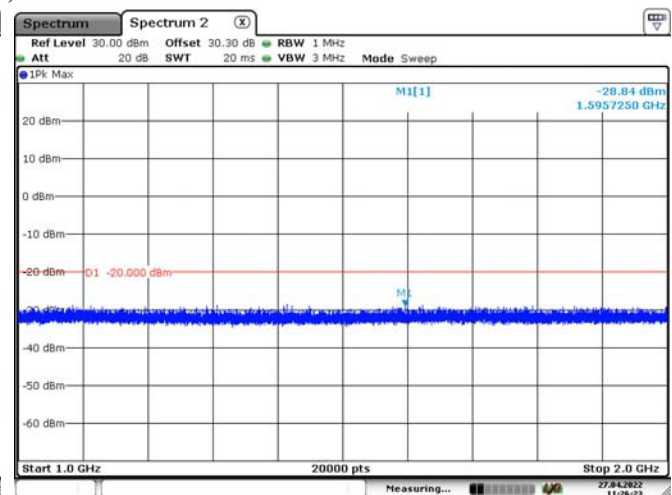



Date: 27.APR.2022 11:26:03

Part 74:



FM,12.5kHz, 161.1 MHz

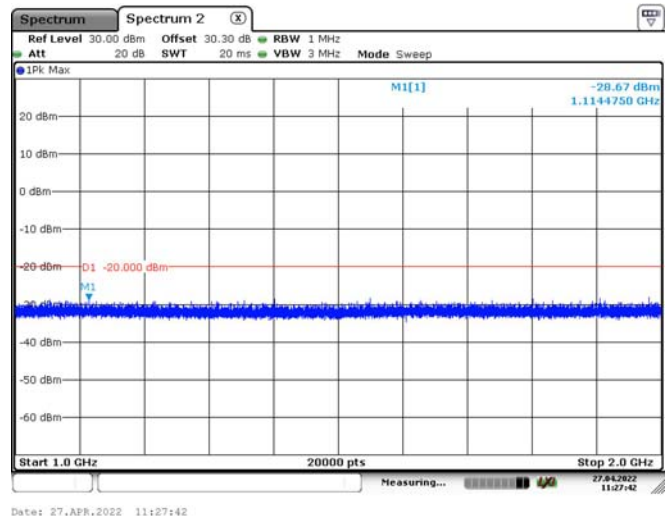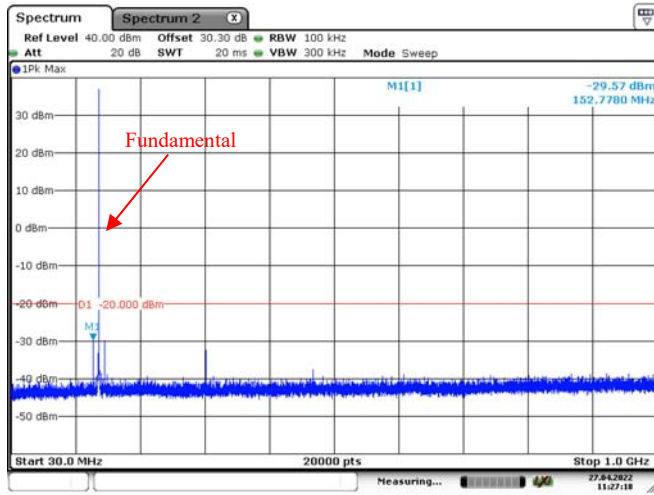

FM,25kHz, 161.1 MHz

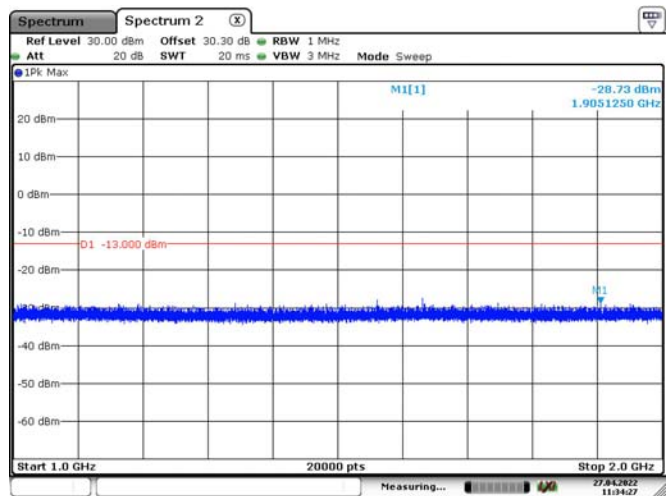
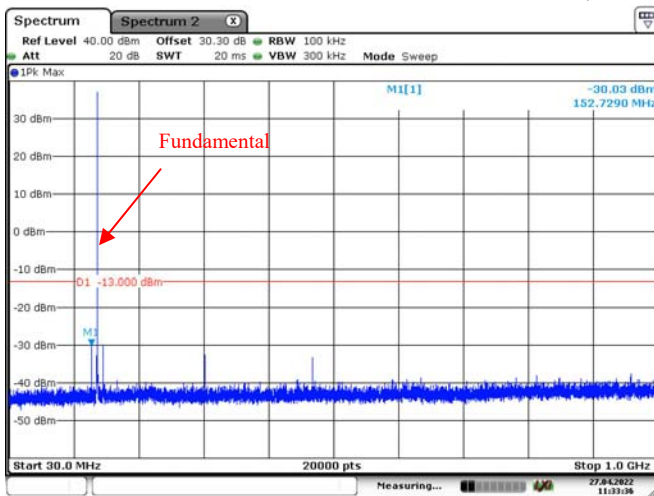


4FSK,12.5kHz, 161.1 MHz

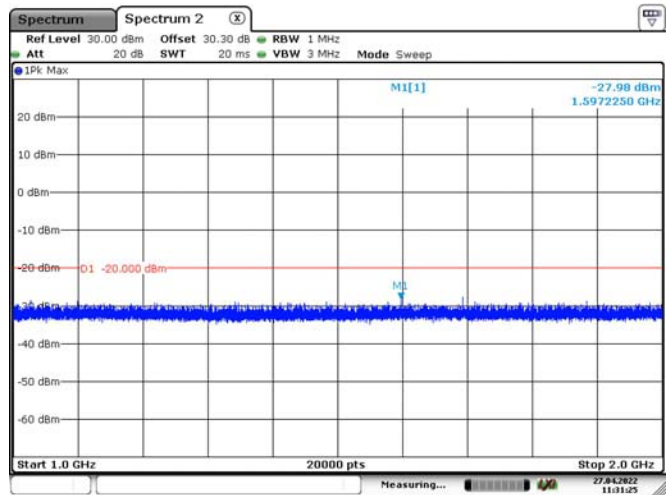
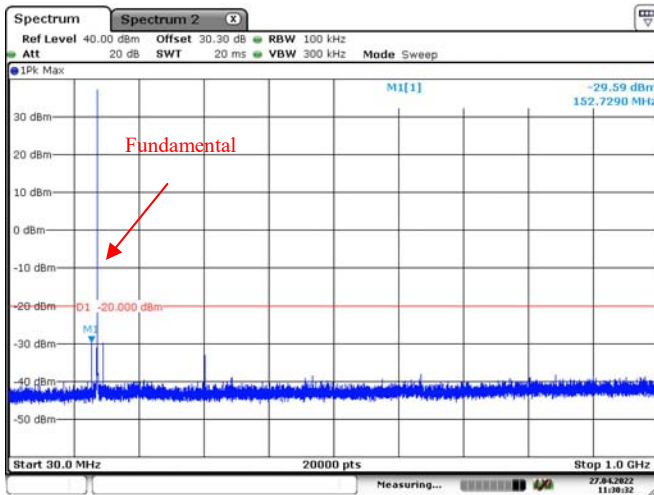


Part 22:



FM,12.5kHz, 150.8125 MHz

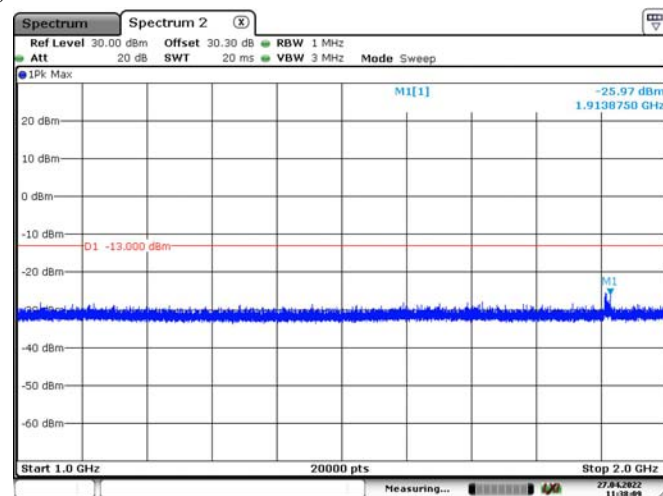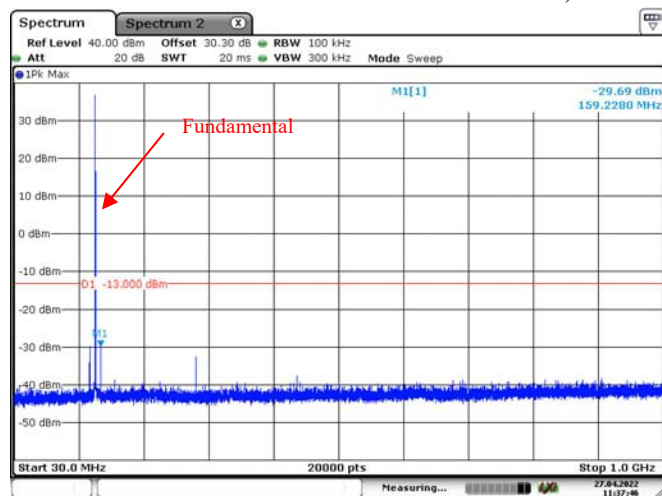

FM,25kHz, 150.8125 MHz

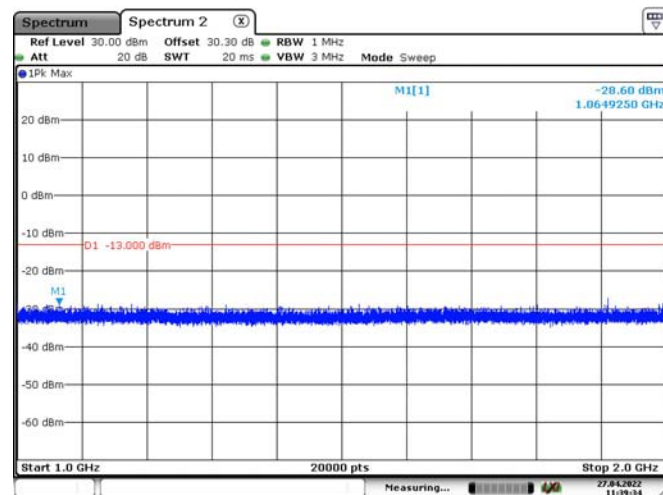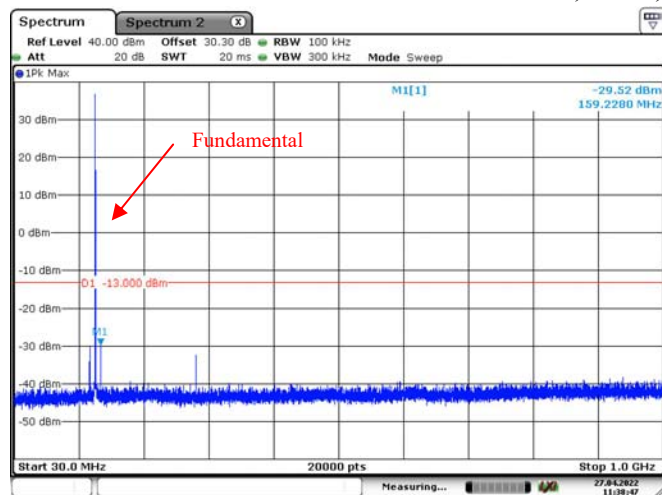

4FSK,12.5kHz, 150.8125 MHz

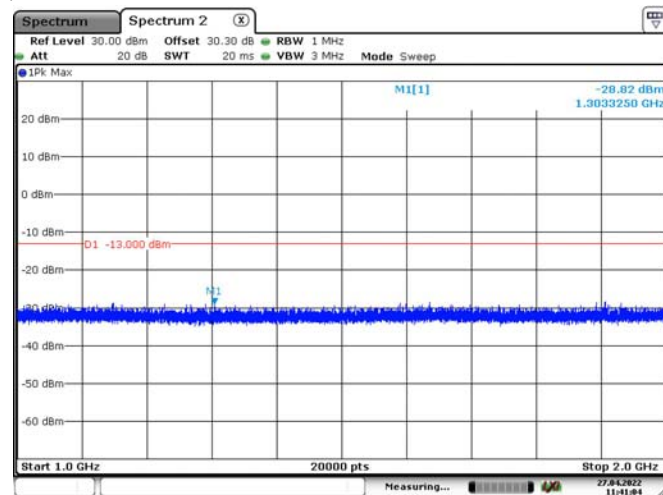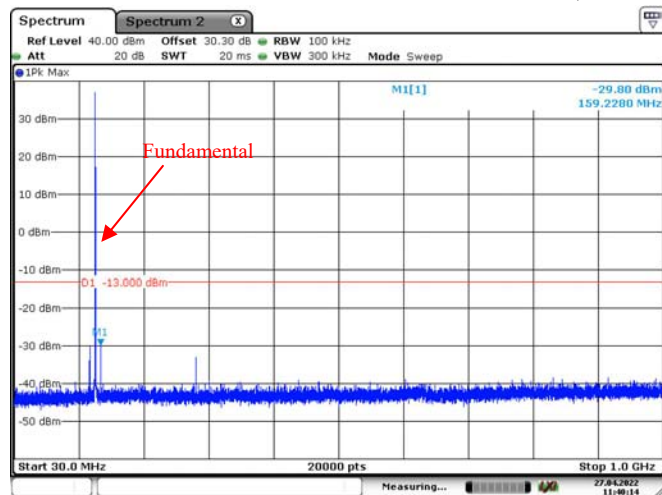

4.5 RADIATED SPURIOUS EMISSIONS:

Serial Number:	CR22030025-RF-S1 CR22030025-RF-S2 CR22030025-RF-S3	Test Date:	2022/05/01~2022/05/10
Test Site:	966-1, 966-2	Test Mode:	Transmit
Tester:	Nick Tang, Gary Ling	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.3~26.7	Relative Humidity: (%)	69~73	ATM Pressure: (kPa)	100.3~101.03
----------------------	-----------	---------------------------	-------	---------------------------	--------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720-300300	99G1448	2021-07-25	2022-07-24
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021-10-18	2024-10-17
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
Agilent	Signal Generator	E8247C	MY43321352	2022-04-25	2023-04-24

*** Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**Note:**

Test only performed with High power level. The device can be mounted in multiple orientations, test was performed with X,Y, Z Axis according to C63.26 Figure 5, the worst orientation was photographed and it's data was recorded.

30MHz - 2GHz:**Model: T03-00313-BCDA****Part 90**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	43.22	-68.16	0.00	0.31	-68.47	-20.00	48.47
272.03	V	33.58	-76.44	0.00	0.31	-76.75	-20.00	56.75
408.04	H	46.31	-62.71	0.00	0.40	-63.11	-20.00	43.11
408.04	V	41.21	-64.72	0.00	0.40	-65.12	-20.00	45.12
544.05	H	32.68	-73.28	0.00	0.47	-73.75	-20.00	53.75
544.05	V	44.48	-58.66	0.00	0.47	-59.13	-20.00	39.13
680.06	H	42.13	-62.52	0.00	0.52	-63.04	-20.00	43.04
680.06	V	46.25	-55.51	0.00	0.52	-56.03	-20.00	36.03
816.08	H	34.61	-67.23	0.00	0.55	-67.78	-20.00	47.78
816.08	V	36.23	-62.14	0.00	0.55	-62.69	-20.00	42.69
952.09	H	29.93	-67.80	0.00	0.59	-68.39	-20.00	48.39
952.09	V	37.22	-58.07	0.00	0.59	-58.66	-20.00	38.66
1088.10	H	37.72	-64.19	7.35	0.67	-57.51	-20.00	37.51
1088.10	V	40.37	-61.99	7.35	0.67	-55.31	-20.00	35.31
1224.11	H	35.93	-66.90	7.73	0.69	-59.86	-20.00	39.86
1224.11	V	38.69	-64.81	7.73	0.69	-57.77	-20.00	37.77
1360.13	H	37.29	-66.03	8.11	0.77	-58.69	-20.00	38.69
1360.13	V	39.73	-63.80	8.11	0.77	-56.46	-20.00	36.46
4FSK, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	44.22	-67.16	0.00	0.31	-67.47	-20.00	47.47
272.03	V	33.18	-76.84	0.00	0.31	-77.15	-20.00	57.15
408.04	H	37.43	-71.59	0.00	0.40	-71.99	-20.00	51.99
408.04	V	41.21	-64.72	0.00	0.40	-65.12	-20.00	45.12
544.05	H	32.16	-73.80	0.00	0.47	-74.27	-20.00	54.27
544.05	V	44.14	-59.00	0.00	0.47	-59.47	-20.00	39.47
680.06	H	40.52	-64.13	0.00	0.52	-64.65	-20.00	44.65
680.06	V	42.33	-59.43	0.00	0.52	-59.95	-20.00	39.95
816.08	H	36.11	-65.73	0.00	0.55	-66.28	-20.00	46.28
816.08	V	35.85	-62.52	0.00	0.55	-63.07	-20.00	43.07
952.09	H	30.66	-67.07	0.00	0.59	-67.66	-20.00	47.66

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
952.09	V	38.72	-56.57	0.00	0.59	-57.16	-20.00	37.16
1088.10	H	38.61	-63.30	7.35	0.67	-56.62	-20.00	36.62
1088.10	V	41.02	-61.34	7.35	0.67	-54.66	-20.00	34.66
1224.11	H	35.59	-67.24	7.73	0.69	-60.20	-20.00	40.20
1224.11	V	39.66	-63.84	7.73	0.69	-56.80	-20.00	36.80
1360.13	H	35.78	-67.54	8.11	0.77	-60.20	-20.00	40.20
1360.13	V	41.39	-62.14	8.11	0.77	-54.80	-20.00	34.80

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 155.7525MHz-12.5 kHz								
311.51	H	38.46	-72.09	0.00	0.34	-72.43	-20.00	52.43
311.51	V	33.66	-74.85	0.00	0.34	-75.19	-20.00	55.19
467.26	H	40.18	-67.45	0.00	0.42	-67.87	-20.00	47.87
467.26	V	40.23	-63.61	0.00	0.42	-64.03	-20.00	44.03
623.01	H	49.28	-55.48	0.00	0.48	-55.96	-20.00	35.96
623.01	V	49.38	-53.77	0.00	0.48	-54.25	-20.00	34.25
778.76	H	38.26	-64.55	0.00	0.54	-65.09	-20.00	45.09
778.76	V	35.46	-63.82	0.00	0.54	-64.36	-20.00	44.36
934.52	H	28.77	-69.49	0.00	0.66	-70.15	-20.00	50.15
934.52	V	34.29	-61.39	0.00	0.66	-62.05	-20.00	42.05
1090.27	H	37.60	-64.26	7.35	0.67	-57.58	-20.00	37.58
1090.27	V	39.79	-62.53	7.35	0.67	-55.85	-20.00	35.85
1246.02	H	35.85	-66.95	7.79	0.68	-59.84	-20.00	39.84
1246.02	V	38.80	-64.61	7.79	0.68	-57.50	-20.00	37.50
1401.77	H	37.29	-66.42	8.22	0.71	-58.91	-20.00	38.91
1401.77	V	39.31	-64.44	8.22	0.71	-56.93	-20.00	36.93
1557.53	H	36.35	-67.62	8.57	0.80	-59.85	-20.00	39.85
1557.53	V	37.38	-66.65	8.57	0.80	-58.88	-20.00	38.88
4FSK, Frequency: 155.7525MHz -12.5 kHz								
311.51	H	40.13	-70.42	0.00	0.34	-70.76	-20.00	50.76
311.51	V	36.15	-72.36	0.00	0.34	-72.70	-20.00	52.70
467.26	H	41.56	-66.07	0.00	0.42	-66.49	-20.00	46.49
467.26	V	42.38	-61.46	0.00	0.42	-61.88	-20.00	41.88
623.01	H	52.46	-52.30	0.00	0.48	-52.78	-20.00	32.78
623.01	V	49.36	-53.79	0.00	0.48	-54.27	-20.00	34.27
778.76	H	37.43	-65.38	0.00	0.54	-65.92	-20.00	45.92
778.76	V	36.78	-62.50	0.00	0.54	-63.04	-20.00	43.04
934.52	H	28.31	-69.95	0.00	0.66	-70.61	-20.00	50.61
934.52	V	34.52	-61.16	0.00	0.66	-61.82	-20.00	41.82
1090.27	H	37.38	-64.48	7.35	0.67	-57.80	-20.00	37.80
1090.27	V	40.74	-61.58	7.35	0.67	-54.90	-20.00	34.90
1246.02	H	35.99	-66.81	7.79	0.68	-59.70	-20.00	39.70
1246.02	V	40.51	-62.90	7.79	0.68	-55.79	-20.00	35.79
1401.77	H	36.76	-66.95	8.22	0.71	-59.44	-20.00	39.44
1401.77	V	40.96	-62.79	8.22	0.71	-55.28	-20.00	35.28
1557.53	H	35.36	-68.61	8.57	0.80	-60.84	-20.00	40.84
1557.53	V	37.80	-66.23	8.57	0.80	-58.46	-20.00	38.46

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	46.21	-63.79	0.00	0.36	-64.15	-20.00	44.15
347.98	V	41.36	-66.20	0.00	0.36	-66.56	-20.00	46.56
521.96	H	30.25	-76.16	0.00	0.41	-76.57	-20.00	56.57
521.96	V	45.62	-57.29	0.00	0.41	-57.70	-20.00	37.70
695.95	H	37.83	-66.79	0.00	0.55	-67.34	-20.00	47.34
695.95	V	38.64	-62.74	0.00	0.55	-63.29	-20.00	43.29
869.94	H	31.45	-68.76	0.00	0.58	-69.34	-20.00	49.34
869.94	V	36.78	-60.34	0.00	0.58	-60.92	-20.00	40.92
1043.93	H	37.13	-65.69	7.22	0.65	-59.12	-20.00	39.12
1043.93	V	39.77	-63.37	7.22	0.65	-56.80	-20.00	36.80
1217.91	H	37.50	-65.34	7.71	0.69	-58.32	-20.00	38.32
1217.91	V	41.99	-61.54	7.71	0.69	-54.52	-20.00	34.52
1391.90	H	35.92	-67.71	8.20	0.72	-60.23	-20.00	40.23
1391.90	V	42.85	-60.85	8.20	0.72	-53.37	-20.00	33.37
1565.89	H	37.99	-66.06	8.58	0.80	-58.28	-20.00	38.28
1565.89	V	44.00	-60.11	8.58	0.80	-52.33	-20.00	32.33
1739.88	H	38.82	-65.15	8.79	0.85	-57.21	-20.00	37.21
1739.88	V	43.05	-61.08	8.79	0.85	-53.14	-20.00	33.14
4FSK, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	40.56	-69.44	0.00	0.36	-69.80	-20.00	49.80
347.98	V	42.64	-64.92	0.00	0.36	-65.28	-20.00	45.28
521.96	H	28.86	-77.55	0.00	0.41	-77.96	-20.00	57.96
521.96	V	45.23	-57.68	0.00	0.41	-58.09	-20.00	38.09
695.95	H	38.88	-65.74	0.00	0.55	-66.29	-20.00	46.29
695.95	V	40.12	-61.26	0.00	0.55	-61.81	-20.00	41.81
869.94	H	36.35	-63.86	0.00	0.58	-64.44	-20.00	44.44
869.94	V	33.69	-63.43	0.00	0.58	-64.01	-20.00	44.01
1043.93	H	37.52	-65.30	7.22	0.65	-58.73	-20.00	38.73
1043.93	V	39.89	-63.25	7.22	0.65	-56.68	-20.00	36.68
1217.91	H	36.38	-66.46	7.71	0.69	-59.44	-20.00	39.44
1217.91	V	42.05	-61.48	7.71	0.69	-54.46	-20.00	34.46
1391.90	H	37.46	-66.17	8.20	0.72	-58.69	-20.00	38.69
1391.90	V	43.78	-59.92	8.20	0.72	-52.44	-20.00	32.44
1565.89	H	37.85	-66.20	8.58	0.80	-58.42	-20.00	38.42
1565.89	V	43.02	-61.09	8.58	0.80	-53.31	-20.00	33.31
1739.88	H	40.04	-63.93	8.79	0.85	-55.99	-20.00	35.99
1739.88	V	43.63	-60.50	8.79	0.85	-52.56	-20.00	32.56

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 161.1MHz-12.5 kHz								
322.20	H	41.23	-69.15	0.00	0.34	-69.49	-20.00	49.49
322.20	V	37.32	-70.91	0.00	0.34	-71.25	-20.00	51.25
483.30	H	32.55	-74.70	0.00	0.42	-75.12	-20.00	55.12
483.30	V	41.56	-61.72	0.00	0.42	-62.14	-20.00	42.14
644.40	H	46.25	-58.47	0.00	0.52	-58.99	-20.00	38.99
644.40	V	48.36	-54.27	0.00	0.52	-54.79	-20.00	34.79
805.50	H	35.26	-66.90	0.00	0.56	-67.46	-20.00	47.46
805.50	V	35.65	-62.96	0.00	0.56	-63.52	-20.00	43.52
966.60	H	30.96	-66.33	0.00	0.59	-66.92	-20.00	46.92
966.60	V	38.67	-56.31	0.00	0.59	-56.90	-20.00	36.90
1127.70	H	38.64	-63.35	7.46	0.64	-56.53	-20.00	36.53
1127.70	V	41.79	-60.76	7.46	0.64	-53.94	-20.00	33.94
1288.80	H	37.44	-65.30	7.91	0.70	-58.09	-20.00	38.09
1288.80	V	43.08	-60.16	7.91	0.70	-52.95	-20.00	32.95
1449.90	H	36.19	-67.39	8.36	0.75	-59.78	-20.00	39.78
1449.90	V	40.46	-63.19	8.36	0.75	-55.58	-20.00	35.58
1611.00	H	36.48	-67.88	8.63	0.82	-60.07	-20.00	40.07
1611.00	V	41.00	-63.40	8.63	0.82	-55.59	-20.00	35.59
FM, Frequency: 161.1MHz-25 kHz								
322.20	H	42.36	-68.02	0.00	0.34	-68.36	-13.00	55.36
322.20	V	40.26	-67.97	0.00	0.34	-68.31	-13.00	55.31
483.30	H	31.68	-75.57	0.00	0.42	-75.99	-13.00	62.99
483.30	V	42.36	-60.92	0.00	0.42	-61.34	-13.00	48.34
644.40	H	44.90	-59.82	0.00	0.52	-60.34	-13.00	47.34
644.40	V	49.61	-53.02	0.00	0.52	-53.54	-13.00	40.54
805.50	H	35.62	-66.54	0.00	0.56	-67.10	-13.00	54.1
805.50	V	36.66	-61.95	0.00	0.56	-62.51	-13.00	49.51
966.60	H	28.42	-68.87	0.00	0.59	-69.46	-13.00	56.46
966.60	V	40.23	-54.75	0.00	0.59	-55.34	-13.00	42.34
1127.70	H	36.62	-65.37	7.46	0.64	-58.55	-13.00	45.55
1127.70	V	39.19	-63.36	7.46	0.64	-56.54	-13.00	43.54
1288.80	H	36.67	-66.07	7.91	0.70	-58.86	-13.00	45.86
1288.80	V	41.33	-61.91	7.91	0.70	-54.70	-13.00	41.7
1449.90	H	35.60	-67.98	8.36	0.75	-60.37	-13.00	47.37
1449.90	V	36.83	-66.82	8.36	0.75	-59.21	-13.00	46.21
1611.00	H	35.69	-68.67	8.63	0.82	-60.86	-13.00	47.86
1611.00	V	37.11	-67.29	8.63	0.82	-59.48	-13.00	46.48

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 161.1MHz-12.5 kHz								
322.20	H	41.23	-69.15	0.00	0.34	-69.49	-20.00	49.49
322.20	V	38.37	-69.86	0.00	0.34	-70.20	-20.00	50.2
483.30	H	33.69	-73.56	0.00	0.42	-73.98	-20.00	53.98
483.30	V	41.25	-62.03	0.00	0.42	-62.45	-20.00	42.45
644.40	H	45.25	-59.47	0.00	0.52	-59.99	-20.00	39.99
644.40	V	48.33	-54.30	0.00	0.52	-54.82	-20.00	34.82
805.50	H	36.66	-65.50	0.00	0.56	-66.06	-20.00	46.06
805.50	V	34.97	-63.64	0.00	0.56	-64.20	-20.00	44.2
966.60	H	28.87	-68.42	0.00	0.59	-69.01	-20.00	49.01
966.60	V	40.11	-54.87	0.00	0.59	-55.46	-20.00	35.46
1127.70	H	35.54	-66.45	7.46	0.64	-59.63	-20.00	39.63
1127.70	V	36.90	-65.65	7.46	0.64	-58.83	-20.00	38.83
1288.80	H	35.46	-67.28	7.91	0.70	-60.07	-20.00	40.07
1288.80	V	36.51	-66.73	7.91	0.70	-59.52	-20.00	39.52
1449.90	H	34.76	-68.82	8.36	0.75	-61.21	-20.00	41.21
1449.90	V	35.25	-68.40	8.36	0.75	-60.79	-20.00	40.79
1611.00	H	35.58	-68.78	8.63	0.82	-60.97	-20.00	40.97
1611.00	V	34.91	-69.49	8.63	0.82	-61.68	-20.00	41.68

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 150.8125MHz-12.5 kHz								
301.63	H	37.89	-72.81	0.00	0.34	-73.15	-13.00	60.15
301.63	V	33.36	-75.41	0.00	0.34	-75.75	-13.00	62.75
452.44	H	31.25	-76.73	0.00	0.43	-77.16	-13.00	64.16
452.44	V	42.45	-61.91	0.00	0.43	-62.34	-13.00	49.34
603.25	H	38.69	-66.11	0.00	0.50	-66.61	-13.00	53.61
603.25	V	48.23	-55.40	0.00	0.50	-55.90	-13.00	42.90
754.06	H	38.13	-65.25	0.00	0.52	-65.77	-13.00	52.77
754.06	V	36.67	-63.24	0.00	0.52	-63.76	-13.00	50.76
904.88	H	28.89	-70.26	0.00	0.55	-70.81	-13.00	57.81
904.88	V	36.95	-59.37	0.00	0.55	-59.92	-13.00	46.92
1055.69	H	38.26	-64.31	7.26	0.65	-57.70	-13.00	44.70
1055.69	V	38.11	-64.82	7.26	0.65	-58.21	-13.00	45.21
1206.50	H	35.62	-67.23	7.68	0.69	-60.24	-13.00	47.24
1206.50	V	37.01	-66.56	7.68	0.69	-59.57	-13.00	46.57
1357.31	H	35.64	-67.65	8.10	0.78	-60.33	-13.00	47.33
1357.31	V	38.72	-64.79	8.10	0.78	-57.47	-13.00	44.47
1508.13	H	36.27	-67.25	8.51	0.76	-59.50	-13.00	46.50
1508.13	V	36.08	-67.53	8.51	0.76	-59.78	-13.00	46.78
FM, Frequency: 150.8125MHz-25 kHz								
301.63	H	38.66	-72.04	0.00	0.34	-72.38	-13.00	59.38
301.63	V	31.26	-77.51	0.00	0.34	-77.85	-13.00	64.85
452.44	H	31.48	-76.50	0.00	0.43	-76.93	-13.00	63.93
452.44	V	41.86	-62.50	0.00	0.43	-62.93	-13.00	49.93
603.25	H	39.61	-65.19	0.00	0.50	-65.69	-13.00	52.69
603.25	V	47.53	-56.10	0.00	0.50	-56.60	-13.00	43.60
754.06	H	38.64	-64.74	0.00	0.52	-65.26	-13.00	52.26
754.06	V	35.31	-64.60	0.00	0.52	-65.12	-13.00	52.12
904.88	H	29.91	-69.24	0.00	0.55	-69.79	-13.00	56.79
904.88	V	35.49	-60.83	0.00	0.55	-61.38	-13.00	48.38
1055.69	H	36.62	-65.95	7.26	0.65	-59.34	-13.00	46.34
1055.69	V	38.99	-63.94	7.26	0.65	-57.33	-13.00	44.33
1206.50	H	35.59	-67.26	7.68	0.69	-60.27	-13.00	47.27
1206.50	V	38.26	-65.31	7.68	0.69	-58.32	-13.00	45.32
1357.31	H	35.29	-68.00	8.10	0.78	-60.68	-13.00	47.68
1357.31	V	39.13	-64.38	8.10	0.78	-57.06	-13.00	44.06
1508.13	H	35.38	-68.14	8.51	0.76	-60.39	-13.00	47.39
1508.13	V	36.23	-67.38	8.51	0.76	-59.63	-13.00	46.63

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 150.8125MHz-12.5 kHz								
301.63	H	38.66	-72.04	0.00	0.34	-72.38	-13.00	59.38
301.63	V	34.21	-74.56	0.00	0.34	-74.90	-13.00	61.90
452.44	H	35.62	-72.36	0.00	0.43	-72.79	-13.00	59.79
452.44	V	46.33	-58.03	0.00	0.43	-58.46	-13.00	45.46
603.25	H	40.28	-64.52	0.00	0.50	-65.02	-13.00	52.02
603.25	V	48.69	-54.94	0.00	0.50	-55.44	-13.00	42.44
754.06	H	38.34	-65.04	0.00	0.52	-65.56	-13.00	52.56
754.06	V	36.11	-63.80	0.00	0.52	-64.32	-13.00	51.32
904.88	H	31.27	-67.88	0.00	0.55	-68.43	-13.00	55.43
904.88	V	36.32	-60.00	0.00	0.55	-60.55	-13.00	47.55
1055.69	H	35.23	-67.34	7.26	0.65	-60.73	-13.00	47.73
1055.69	V	35.19	-67.74	7.26	0.65	-61.13	-13.00	48.13
1206.50	H	35.07	-67.78	7.68	0.69	-60.79	-13.00	47.79
1206.50	V	35.81	-67.76	7.68	0.69	-60.77	-13.00	47.77
1357.31	H	34.98	-68.31	8.10	0.78	-60.99	-13.00	47.99
1357.31	V	35.03	-68.48	8.10	0.78	-61.16	-13.00	48.16
1508.13	H	36.00	-67.52	8.51	0.76	-59.77	-13.00	46.77
1508.13	V	36.50	-67.11	8.51	0.76	-59.36	-13.00	46.36

Model: T03-00313-BBEA
Part 90

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	41.25	-70.13	0.00	0.31	-70.44	-20.00	50.44
272.03	V	34.56	-75.46	0.00	0.31	-75.77	-20.00	55.77
408.04	H	44.78	-64.24	0.00	0.40	-64.64	-20.00	44.64
408.04	V	43.66	-62.27	0.00	0.40	-62.67	-20.00	42.67
544.05	H	31.75	-74.21	0.00	0.47	-74.68	-20.00	54.68
544.05	V	44.57	-58.57	0.00	0.47	-59.04	-20.00	39.04
680.06	H	40.65	-64.00	0.00	0.52	-64.52	-20.00	44.52
680.06	V	42.89	-58.87	0.00	0.52	-59.39	-20.00	39.39
816.08	H	36.52	-65.32	0.00	0.55	-65.87	-20.00	45.87
816.08	V	36.34	-62.03	0.00	0.55	-62.58	-20.00	42.58
952.09	H	29.04	-68.69	0.00	0.59	-69.28	-20.00	49.28
952.09	V	36.82	-58.47	0.00	0.59	-59.06	-20.00	39.06
1088.10	H	37.76	-64.15	7.35	0.67	-57.47	-20.00	37.47
1088.10	V	40.75	-61.61	7.35	0.67	-54.93	-20.00	34.93
1224.11	H	36.11	-66.72	7.73	0.69	-59.68	-20.00	39.68
1224.11	V	38.59	-64.91	7.73	0.69	-57.87	-20.00	37.87
1360.13	H	37.58	-65.74	8.11	0.77	-58.40	-20.00	38.40
1360.13	V	39.66	-63.87	8.11	0.77	-56.53	-20.00	36.53
4FSK, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	44.33	-67.05	0.00	0.31	-67.36	-20.00	47.36
272.03	V	34.38	-75.64	0.00	0.31	-75.95	-20.00	55.95
408.04	H	38.09	-70.93	0.00	0.40	-71.33	-20.00	51.33
408.04	V	41.27	-64.66	0.00	0.40	-65.06	-20.00	45.06
544.05	H	32.46	-73.50	0.00	0.47	-73.97	-20.00	53.97
544.05	V	44.34	-58.80	0.00	0.47	-59.27	-20.00	39.27
680.06	H	41.35	-63.30	0.00	0.52	-63.82	-20.00	43.82
680.06	V	43.16	-58.60	0.00	0.52	-59.12	-20.00	39.12
816.08	H	37.61	-64.23	0.00	0.55	-64.78	-20.00	44.78
816.08	V	36.49	-61.88	0.00	0.55	-62.43	-20.00	42.43
952.09	H	29.75	-67.98	0.00	0.59	-68.57	-20.00	48.57
952.09	V	37.11	-58.18	0.00	0.59	-58.77	-20.00	38.77
1088.10	H	38.66	-63.25	7.35	0.67	-56.57	-20.00	36.57
1088.10	V	41.39	-60.97	7.35	0.67	-54.29	-20.00	34.29
1224.11	H	35.86	-66.97	7.73	0.69	-59.93	-20.00	39.93
1224.11	V	39.83	-63.67	7.73	0.69	-56.63	-20.00	36.63
1360.13	H	36.10	-67.22	8.11	0.77	-59.88	-20.00	39.88
1360.13	V	41.40	-62.13	8.11	0.77	-54.79	-20.00	34.79

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 155.7525MHz-12.5 kHz								
311.51	H	39.66	-70.89	0.00	0.34	-71.23	-20.00	51.23
311.51	V	33.03	-75.48	0.00	0.34	-75.82	-20.00	55.82
467.26	H	41.46	-66.17	0.00	0.42	-66.59	-20.00	46.59
467.26	V	41.76	-62.08	0.00	0.42	-62.50	-20.00	42.50
623.01	H	50.27	-54.49	0.00	0.48	-54.97	-20.00	34.97
623.01	V	50.46	-52.69	0.00	0.48	-53.17	-20.00	33.17
778.76	H	38.08	-64.73	0.00	0.54	-65.27	-20.00	45.27
778.76	V	35.41	-63.87	0.00	0.54	-64.41	-20.00	44.41
934.52	H	28.83	-69.43	0.00	0.66	-70.09	-20.00	50.09
934.52	V	35.95	-59.73	0.00	0.66	-60.39	-20.00	40.39
1090.27	H	37.72	-64.14	7.35	0.67	-57.46	-20.00	37.46
1090.27	V	40.11	-62.21	7.35	0.67	-55.53	-20.00	35.53
1246.02	H	36.06	-66.74	7.79	0.68	-59.63	-20.00	39.63
1246.02	V	39.29	-64.12	7.79	0.68	-57.01	-20.00	37.01
1401.77	H	37.48	-66.23	8.22	0.71	-58.72	-20.00	38.72
1401.77	V	39.67	-64.08	8.22	0.71	-56.57	-20.00	36.57
1557.53	H	36.48	-67.49	8.57	0.80	-59.72	-20.00	39.72
1557.53	V	37.59	-66.44	8.57	0.80	-58.67	-20.00	38.67
4FSK, Frequency: 155.7525MHz -12.5 kHz								
311.51	H	40.33	-70.22	0.00	0.34	-70.56	-20.00	50.56
311.51	V	35.11	-73.40	0.00	0.34	-73.74	-20.00	53.74
467.26	H	41.89	-65.74	0.00	0.42	-66.16	-20.00	46.16
467.26	V	41.91	-61.93	0.00	0.42	-62.35	-20.00	42.35
623.01	H	50.58	-54.18	0.00	0.48	-54.66	-20.00	34.66
623.01	V	50.09	-53.06	0.00	0.48	-53.54	-20.00	33.54
778.76	H	38.54	-64.27	0.00	0.54	-64.81	-20.00	44.81
778.76	V	35.47	-63.81	0.00	0.54	-64.35	-20.00	44.35
934.52	H	28.77	-69.49	0.00	0.66	-70.15	-20.00	50.15
934.52	V	35.35	-60.33	0.00	0.66	-60.99	-20.00	40.99
1090.27	H	37.76	-64.10	7.35	0.67	-57.42	-20.00	37.42
1090.27	V	41.00	-61.32	7.35	0.67	-54.64	-20.00	34.64
1246.02	H	36.11	-66.69	7.79	0.68	-59.58	-20.00	39.58
1246.02	V	40.56	-62.85	7.79	0.68	-55.74	-20.00	35.74
1401.77	H	37.26	-66.45	8.22	0.71	-58.94	-20.00	38.94
1401.77	V	40.88	-62.87	8.22	0.71	-55.36	-20.00	35.36
1557.53	H	35.35	-68.62	8.57	0.80	-60.85	-20.00	40.85
1557.53	V	37.70	-66.33	8.57	0.80	-58.56	-20.00	38.56

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	41.34	-68.66	0.00	0.36	-69.02	-20.00	49.02
347.98	V	42.21	-65.35	0.00	0.36	-65.71	-20.00	45.71
521.96	H	29.77	-76.64	0.00	0.41	-77.05	-20.00	57.05
521.96	V	45.43	-57.48	0.00	0.41	-57.89	-20.00	37.89
695.95	H	38.93	-65.69	0.00	0.55	-66.24	-20.00	46.24
695.95	V	39.84	-61.54	0.00	0.55	-62.09	-20.00	42.09
869.94	H	34.01	-66.20	0.00	0.58	-66.78	-20.00	46.78
869.94	V	34.48	-62.64	0.00	0.58	-63.22	-20.00	43.22
1043.93	H	37.34	-65.48	7.22	0.65	-58.91	-20.00	38.91
1043.93	V	40.02	-63.12	7.22	0.65	-56.55	-20.00	36.55
1217.91	H	37.58	-65.26	7.71	0.69	-58.24	-20.00	38.24
1217.91	V	42.16	-61.37	7.71	0.69	-54.35	-20.00	34.35
1391.90	H	36.12	-67.51	8.20	0.72	-60.03	-20.00	40.03
1391.90	V	42.91	-60.79	8.20	0.72	-53.31	-20.00	33.31
1565.89	H	38.31	-65.74	8.58	0.80	-57.96	-20.00	37.96
1565.89	V	44.04	-60.07	8.58	0.80	-52.29	-20.00	32.29
1739.88	H	38.97	-65.00	8.79	0.85	-57.06	-20.00	37.06
1739.88	V	43.32	-60.81	8.79	0.85	-52.87	-20.00	32.87
4FSK, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	41.67	-68.33	0.00	0.36	-68.69	-20.00	48.69
347.98	V	42.29	-65.27	0.00	0.36	-65.63	-20.00	45.63
521.96	H	28.87	-77.54	0.00	0.41	-77.95	-20.00	57.95
521.96	V	45.29	-57.62	0.00	0.41	-58.03	-20.00	38.03
695.95	H	38.99	-65.63	0.00	0.55	-66.18	-20.00	46.18
695.95	V	40.00	-61.38	0.00	0.55	-61.93	-20.00	41.93
869.94	H	35.51	-64.70	0.00	0.58	-65.28	-20.00	45.28
869.94	V	33.86	-63.26	0.00	0.58	-63.84	-20.00	43.84
1043.93	H	37.46	-65.36	7.22	0.65	-58.79	-20.00	38.79
1043.93	V	40.26	-62.88	7.22	0.65	-56.31	-20.00	36.31
1217.91	H	36.60	-66.24	7.71	0.69	-59.22	-20.00	39.22
1217.91	V	42.35	-61.18	7.71	0.69	-54.16	-20.00	34.16
1391.90	H	37.48	-66.15	8.20	0.72	-58.67	-20.00	38.67
1391.90	V	44.03	-59.67	8.20	0.72	-52.19	-20.00	32.19
1565.89	H	37.83	-66.22	8.58	0.80	-58.44	-20.00	38.44
1565.89	V	43.21	-60.90	8.58	0.80	-53.12	-20.00	33.12
1739.88	H	40.19	-63.78	8.79	0.85	-55.84	-20.00	35.84
1739.88	V	43.86	-60.27	8.79	0.85	-52.33	-20.00	32.33

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 161.1MHz-12.5 kHz								
322.20	H	40.95	-69.43	0.00	0.34	-69.77	-20.00	49.77
322.20	V	38.11	-70.12	0.00	0.34	-70.46	-20.00	50.46
483.30	H	30.61	-76.64	0.00	0.42	-77.06	-20.00	57.06
483.30	V	42.38	-60.90	0.00	0.42	-61.32	-20.00	41.32
644.40	H	43.65	-61.07	0.00	0.52	-61.59	-20.00	41.59
644.40	V	49.43	-53.20	0.00	0.52	-53.72	-20.00	33.72
805.50	H	36.90	-65.26	0.00	0.56	-65.82	-20.00	45.82
805.50	V	36.34	-62.27	0.00	0.56	-62.83	-20.00	42.83
966.60	H	29.92	-67.37	0.00	0.59	-67.96	-20.00	47.96
966.60	V	39.31	-55.67	0.00	0.59	-56.26	-20.00	36.26
1127.70	H	38.81	-63.18	7.46	0.64	-56.36	-20.00	36.36
1127.70	V	41.70	-60.85	7.46	0.64	-54.03	-20.00	34.03
1288.80	H	37.65	-65.09	7.91	0.70	-57.88	-20.00	37.88
1288.80	V	43.42	-59.82	7.91	0.70	-52.61	-20.00	32.61
1449.90	H	36.49	-67.09	8.36	0.75	-59.48	-20.00	39.48
1449.90	V	40.49	-63.16	8.36	0.75	-55.55	-20.00	35.55
1611.00	H	36.96	-67.40	8.63	0.82	-59.59	-20.00	39.59
1611.00	V	41.28	-63.12	8.63	0.82	-55.31	-20.00	35.31
FM, Frequency: 161.1MHz-25 kHz								
322.20	H	41.09	-69.29	0.00	0.34	-69.63	-13.00	56.63
322.20	V	38.09	-70.14	0.00	0.34	-70.48	-13.00	57.48
483.30	H	29.91	-77.34	0.00	0.42	-77.76	-13.00	64.76
483.30	V	41.38	-61.90	0.00	0.42	-62.32	-13.00	49.32
644.40	H	44.68	-60.04	0.00	0.52	-60.56	-13.00	47.56
644.40	V	49.58	-53.05	0.00	0.52	-53.57	-13.00	40.57
805.50	H	36.73	-65.43	0.00	0.56	-65.99	-13.00	52.99
805.50	V	35.89	-62.72	0.00	0.56	-63.28	-13.00	50.28
966.60	H	29.79	-67.50	0.00	0.59	-68.09	-13.00	55.09
966.60	V	39.77	-55.21	0.00	0.59	-55.80	-13.00	42.8
1127.70	H	37.06	-64.93	7.46	0.64	-58.11	-13.00	45.11
1127.70	V	39.65	-62.90	7.46	0.64	-56.08	-13.00	43.08
1288.80	H	36.64	-66.10	7.91	0.70	-58.89	-13.00	45.89
1288.80	V	41.71	-61.53	7.91	0.70	-54.32	-13.00	41.32
1449.90	H	35.50	-68.08	8.36	0.75	-60.47	-13.00	47.47
1449.90	V	37.28	-66.37	8.36	0.75	-58.76	-13.00	45.76
1611.00	H	35.84	-68.52	8.63	0.82	-60.71	-13.00	47.71
1611.00	V	37.41	-66.99	8.63	0.82	-59.18	-13.00	46.18

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 161.1MHz-12.5 kHz								
322.20	H	41.03	-69.35	0.00	0.34	-69.69	-20.00	49.69
322.20	V	38.18	-70.05	0.00	0.34	-70.39	-20.00	50.39
483.30	H	30.18	-77.07	0.00	0.42	-77.49	-20.00	57.49
483.30	V	42.10	-61.18	0.00	0.42	-61.60	-20.00	41.6
644.40	H	43.75	-60.97	0.00	0.52	-61.49	-20.00	41.49
644.40	V	49.40	-53.23	0.00	0.52	-53.75	-20.00	33.75
805.50	H	37.33	-64.83	0.00	0.56	-65.39	-20.00	45.39
805.50	V	35.82	-62.79	0.00	0.56	-63.35	-20.00	43.35
966.60	H	28.86	-68.43	0.00	0.59	-69.02	-20.00	49.02
966.60	V	39.19	-55.79	0.00	0.59	-56.38	-20.00	36.38
1127.70	H	35.56	-66.43	7.46	0.64	-59.61	-20.00	39.61
1127.70	V	36.80	-65.75	7.46	0.64	-58.93	-20.00	38.93
1288.80	H	35.93	-66.81	7.91	0.70	-59.60	-20.00	39.6
1288.80	V	36.60	-66.64	7.91	0.70	-59.43	-20.00	39.43
1449.90	H	35.15	-68.43	8.36	0.75	-60.82	-20.00	40.82
1449.90	V	35.64	-68.01	8.36	0.75	-60.40	-20.00	40.4
1611.00	H	35.49	-68.87	8.63	0.82	-61.06	-20.00	41.06
1611.00	V	35.17	-69.23	8.63	0.82	-61.42	-20.00	41.42

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 150.8125MHz-12.5 kHz								
301.63	H	38.79	-71.91	0.00	0.34	-72.25	-13.00	59.25
301.63	V	33.67	-75.10	0.00	0.34	-75.44	-13.00	62.44
452.44	H	32.51	-75.47	0.00	0.43	-75.90	-13.00	62.90
452.44	V	42.13	-62.23	0.00	0.43	-62.66	-13.00	49.66
603.25	H	39.13	-65.67	0.00	0.50	-66.17	-13.00	53.17
603.25	V	48.45	-55.18	0.00	0.50	-55.68	-13.00	42.68
754.06	H	38.61	-64.77	0.00	0.52	-65.29	-13.00	52.29
754.06	V	36.24	-63.67	0.00	0.52	-64.19	-13.00	51.19
904.88	H	28.55	-70.60	0.00	0.55	-71.15	-13.00	58.15
904.88	V	35.41	-60.91	0.00	0.55	-61.46	-13.00	48.46
1055.69	H	38.35	-64.22	7.26	0.65	-57.61	-13.00	44.61
1055.69	V	38.09	-64.84	7.26	0.65	-58.23	-13.00	45.23
1206.50	H	36.10	-66.75	7.68	0.69	-59.76	-13.00	46.76
1206.50	V	37.40	-66.17	7.68	0.69	-59.18	-13.00	46.18
1357.31	H	36.06	-67.23	8.10	0.78	-59.91	-13.00	46.91
1357.31	V	38.73	-64.78	8.10	0.78	-57.46	-13.00	44.46
1508.13	H	36.50	-67.02	8.51	0.76	-59.27	-13.00	46.27
1508.13	V	36.33	-67.28	8.51	0.76	-59.53	-13.00	46.53
FM, Frequency: 150.8125MHz-25 kHz								
301.63	H	39.56	-71.14	0.00	0.34	-71.48	-13.00	58.48
301.63	V	32.94	-75.83	0.00	0.34	-76.17	-13.00	63.17
452.44	H	31.44	-76.54	0.00	0.43	-76.97	-13.00	63.97
452.44	V	42.07	-62.29	0.00	0.43	-62.72	-13.00	49.72
603.25	H	38.48	-66.32	0.00	0.50	-66.82	-13.00	53.82
603.25	V	48.52	-55.11	0.00	0.50	-55.61	-13.00	42.61
754.06	H	38.89	-64.49	0.00	0.52	-65.01	-13.00	52.01
754.06	V	35.82	-64.09	0.00	0.52	-64.61	-13.00	51.61
904.88	H	29.65	-69.50	0.00	0.55	-70.05	-13.00	57.05
904.88	V	36.27	-60.05	0.00	0.55	-60.60	-13.00	47.60
1055.69	H	36.95	-65.62	7.26	0.65	-59.01	-13.00	46.01
1055.69	V	38.96	-63.97	7.26	0.65	-57.36	-13.00	44.36
1206.50	H	35.74	-67.11	7.68	0.69	-60.12	-13.00	47.12
1206.50	V	38.47	-65.10	7.68	0.69	-58.11	-13.00	45.11
1357.31	H	35.55	-67.74	8.10	0.78	-60.42	-13.00	47.42
1357.31	V	39.62	-63.89	8.10	0.78	-56.57	-13.00	43.57
1508.13	H	35.69	-67.83	8.51	0.76	-60.08	-13.00	47.08
1508.13	V	36.27	-67.34	8.51	0.76	-59.59	-13.00	46.59

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 150.8125MHz-12.5 kHz								
301.63	H	39.16	-71.54	0.00	0.34	-71.88	-13.00	58.88
301.63	V	34.23	-74.54	0.00	0.34	-74.88	-13.00	61.88
452.44	H	34.83	-73.15	0.00	0.43	-73.58	-13.00	60.58
452.44	V	45.73	-58.63	0.00	0.43	-59.06	-13.00	46.06
603.25	H	39.74	-65.06	0.00	0.50	-65.56	-13.00	52.56
603.25	V	48.54	-55.09	0.00	0.50	-55.59	-13.00	42.59
754.06	H	38.63	-64.75	0.00	0.52	-65.27	-13.00	52.27
754.06	V	36.77	-63.14	0.00	0.52	-63.66	-13.00	50.66
904.88	H	32.41	-66.74	0.00	0.55	-67.29	-13.00	54.29
904.88	V	35.42	-60.90	0.00	0.55	-61.45	-13.00	48.45
1055.69	H	35.27	-67.30	7.26	0.65	-60.69	-13.00	47.69
1055.69	V	35.63	-67.30	7.26	0.65	-60.69	-13.00	47.69
1206.50	H	35.53	-67.32	7.68	0.69	-60.33	-13.00	47.33
1206.50	V	36.14	-67.43	7.68	0.69	-60.44	-13.00	47.44
1357.31	H	35.37	-67.92	8.10	0.78	-60.60	-13.00	47.60
1357.31	V	35.51	-68.00	8.10	0.78	-60.68	-13.00	47.68
1508.13	H	36.25	-67.27	8.51	0.76	-59.52	-13.00	46.52
1508.13	V	36.44	-67.17	8.51	0.76	-59.42	-13.00	46.42

Model: T03-00313-BAAA
Part 90

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	42.38	-69.00	0.00	0.31	-69.31	-20.00	49.31
272.03	V	35.36	-74.66	0.00	0.31	-74.97	-20.00	54.97
408.04	H	46.63	-62.39	0.00	0.40	-62.79	-20.00	42.79
408.04	V	42.31	-63.62	0.00	0.40	-64.02	-20.00	44.02
544.05	H	31.52	-74.44	0.00	0.47	-74.91	-20.00	54.91
544.05	V	44.46	-58.68	0.00	0.47	-59.15	-20.00	39.15
680.06	H	42.31	-62.34	0.00	0.52	-62.86	-20.00	42.86
680.06	V	45.85	-55.91	0.00	0.52	-56.43	-20.00	36.43
816.08	H	35.11	-66.73	0.00	0.55	-67.28	-20.00	47.28
816.08	V	35.89	-62.48	0.00	0.55	-63.03	-20.00	43.03
952.09	H	29.22	-68.51	0.00	0.59	-69.10	-20.00	49.10
952.09	V	37.22	-58.07	0.00	0.59	-58.66	-20.00	38.66
1088.10	H	37.46	-64.45	7.35	0.67	-57.77	-20.00	37.77
1088.10	V	40.28	-62.08	7.35	0.67	-55.40	-20.00	35.40
1224.11	H	36.13	-66.70	7.73	0.69	-59.66	-20.00	39.66
1224.11	V	38.21	-65.29	7.73	0.69	-58.25	-20.00	38.25
1360.13	H	37.51	-65.81	8.11	0.77	-58.47	-20.00	38.47
1360.13	V	39.23	-64.30	8.11	0.77	-56.96	-20.00	36.96
4FSK, Frequency: 136.0125MHz-12.5 kHz								
272.03	H	43.63	-67.75	0.00	0.31	-68.06	-20.00	48.06
272.03	V	33.33	-76.69	0.00	0.31	-77.00	-20.00	57.00
408.04	H	38.66	-70.36	0.00	0.40	-70.76	-20.00	50.76
408.04	V	42.87	-63.06	0.00	0.40	-63.46	-20.00	43.46
544.05	H	36.34	-69.62	0.00	0.47	-70.09	-20.00	50.09
544.05	V	41.25	-61.89	0.00	0.47	-62.36	-20.00	42.36
680.06	H	42.28	-62.37	0.00	0.52	-62.89	-20.00	42.89
680.06	V	41.93	-59.83	0.00	0.52	-60.35	-20.00	40.35
816.08	H	35.22	-66.62	0.00	0.55	-67.17	-20.00	47.17
816.08	V	36.65	-61.72	0.00	0.55	-62.27	-20.00	42.27
952.09	H	30.76	-66.97	0.00	0.59	-67.56	-20.00	47.56
952.09	V	34.13	-61.16	0.00	0.59	-61.75	-20.00	41.75
1088.10	H	38.19	-63.72	7.35	0.67	-57.04	-20.00	37.04
1088.10	V	41.42	-60.94	7.35	0.67	-54.26	-20.00	34.26
1224.11	H	35.60	-67.23	7.73	0.69	-60.19	-20.00	40.19
1224.11	V	39.67	-63.83	7.73	0.69	-56.79	-20.00	36.79
1360.13	H	35.97	-67.35	8.11	0.77	-60.01	-20.00	40.01
1360.13	V	41.25	-62.28	8.11	0.77	-54.94	-20.00	34.94

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 155.7525MHz-12.5 kHz								
311.51	H	38.69	-71.86	0.00	0.34	-72.20	-20.00	52.20
311.51	V	34.66	-73.85	0.00	0.34	-74.19	-20.00	54.19
467.26	H	41.24	-66.39	0.00	0.42	-66.81	-20.00	46.81
467.26	V	40.84	-63.00	0.00	0.42	-63.42	-20.00	43.42
623.01	H	48.99	-55.77	0.00	0.48	-56.25	-20.00	36.25
623.01	V	49.11	-54.04	0.00	0.48	-54.52	-20.00	34.52
778.76	H	37.26	-65.55	0.00	0.54	-66.09	-20.00	46.09
778.76	V	36.67	-62.61	0.00	0.54	-63.15	-20.00	43.15
934.52	H	27.63	-70.63	0.00	0.66	-71.29	-20.00	51.29
934.52	V	33.56	-62.12	0.00	0.66	-62.78	-20.00	42.78
1090.27	H	37.72	-64.14	7.35	0.67	-57.46	-20.00	37.46
1090.27	V	40.19	-62.13	7.35	0.67	-55.45	-20.00	35.45
1246.02	H	35.68	-67.12	7.79	0.68	-60.01	-20.00	40.01
1246.02	V	39.17	-64.24	7.79	0.68	-57.13	-20.00	37.13
1401.77	H	37.32	-66.39	8.22	0.71	-58.88	-20.00	38.88
1401.77	V	39.42	-64.33	8.22	0.71	-56.82	-20.00	36.82
1557.53	H	36.35	-67.62	8.57	0.80	-59.85	-20.00	39.85
1557.53	V	37.38	-66.65	8.57	0.80	-58.88	-20.00	38.88
4FSK, Frequency: 155.7525MHz -12.5 kHz								
311.51	H	43.62	-66.93	0.00	0.34	-67.27	-20.00	47.27
311.51	V	35.21	-73.30	0.00	0.34	-73.64	-20.00	53.64
467.26	H	41.33	-66.30	0.00	0.42	-66.72	-20.00	46.72
467.26	V	42.83	-61.01	0.00	0.42	-61.43	-20.00	41.43
623.01	H	50.03	-54.73	0.00	0.48	-55.21	-20.00	35.21
623.01	V	48.88	-54.27	0.00	0.48	-54.75	-20.00	34.75
778.76	H	37.26	-65.55	0.00	0.54	-66.09	-20.00	46.09
778.76	V	35.09	-64.19	0.00	0.54	-64.73	-20.00	44.73
934.52	H	36.45	-61.81	0.00	0.66	-62.47	-20.00	42.47
934.52	V	33.32	-62.36	0.00	0.66	-63.02	-20.00	43.02
1090.27	H	37.86	-64.00	7.35	0.67	-57.32	-20.00	37.32
1090.27	V	40.99	-61.33	7.35	0.67	-54.65	-20.00	34.65
1246.02	H	36.17	-66.63	7.79	0.68	-59.52	-20.00	39.52
1246.02	V	40.32	-63.09	7.79	0.68	-55.98	-20.00	35.98
1401.77	H	37.30	-66.41	8.22	0.71	-58.90	-20.00	38.90
1401.77	V	40.71	-63.04	8.22	0.71	-55.53	-20.00	35.53
1557.53	H	35.05	-68.92	8.57	0.80	-61.15	-20.00	41.15
1557.53	V	37.63	-66.40	8.57	0.80	-58.63	-20.00	38.63

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	45.24	-64.76	0.00	0.36	-65.12	-20.00	45.12
347.98	V	42.42	-65.14	0.00	0.36	-65.50	-20.00	45.50
521.96	H	36.04	-70.37	0.00	0.41	-70.78	-20.00	50.78
521.96	V	44.80	-58.11	0.00	0.41	-58.52	-20.00	38.52
695.95	H	36.56	-68.06	0.00	0.55	-68.61	-20.00	48.61
695.95	V	38.34	-63.04	0.00	0.55	-63.59	-20.00	43.59
869.94	H	30.09	-70.12	0.00	0.58	-70.70	-20.00	50.70
869.94	V	35.92	-61.20	0.00	0.58	-61.78	-20.00	41.78
1043.93	H	37.08	-65.74	7.22	0.65	-59.17	-20.00	39.17
1043.93	V	39.90	-63.24	7.22	0.65	-56.67	-20.00	36.67
1217.91	H	37.28	-65.56	7.71	0.69	-58.54	-20.00	38.54
1217.91	V	41.69	-61.84	7.71	0.69	-54.82	-20.00	34.82
1391.90	H	36.21	-67.42	8.20	0.72	-59.94	-20.00	39.94
1391.90	V	42.51	-61.19	8.20	0.72	-53.71	-20.00	33.71
1565.89	H	38.33	-65.72	8.58	0.80	-57.94	-20.00	37.94
1565.89	V	43.94	-60.17	8.58	0.80	-52.39	-20.00	32.39
1739.88	H	38.71	-65.26	8.79	0.85	-57.32	-20.00	37.32
1739.88	V	42.90	-61.23	8.79	0.85	-53.29	-20.00	33.29
4FSK, Frequency: 173.9875MHz-12.5 kHz								
347.98	H	41.23	-68.77	0.00	0.36	-69.13	-20.00	49.13
347.98	V	42.25	-65.31	0.00	0.36	-65.67	-20.00	45.67
521.96	H	28.28	-78.13	0.00	0.41	-78.54	-20.00	58.54
521.96	V	44.61	-58.30	0.00	0.41	-58.71	-20.00	38.71
695.95	H	37.07	-67.55	0.00	0.55	-68.10	-20.00	48.10
695.95	V	41.02	-60.36	0.00	0.55	-60.91	-20.00	40.91
869.94	H	38.34	-61.87	0.00	0.58	-62.45	-20.00	42.45
869.94	V	35.42	-61.70	0.00	0.58	-62.28	-20.00	42.28
1043.93	H	37.43	-65.39	7.22	0.65	-58.82	-20.00	38.82
1043.93	V	39.97	-63.17	7.22	0.65	-56.60	-20.00	36.60
1217.91	H	36.47	-66.37	7.71	0.69	-59.35	-20.00	39.35
1217.91	V	42.15	-61.38	7.71	0.69	-54.36	-20.00	34.36
1391.90	H	37.54	-66.09	8.20	0.72	-58.61	-20.00	38.61
1391.90	V	43.67	-60.03	8.20	0.72	-52.55	-20.00	32.55
1565.89	H	37.87	-66.18	8.58	0.80	-58.40	-20.00	38.40
1565.89	V	43.25	-60.86	8.58	0.80	-53.08	-20.00	33.08
1739.88	H	40.05	-63.92	8.79	0.85	-55.98	-20.00	35.98
1739.88	V	43.96	-60.17	8.79	0.85	-52.23	-20.00	32.23

Part 74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 161.1MHz-12.5 kHz								
322.20	H	40.25	-70.13	0.00	0.34	-70.47	-20.00	50.47
322.20	V	38.36	-69.87	0.00	0.34	-70.21	-20.00	50.21
483.30	H	31.26	-75.99	0.00	0.42	-76.41	-20.00	56.41
483.30	V	40.29	-62.99	0.00	0.42	-63.41	-20.00	43.41
644.40	H	45.55	-59.17	0.00	0.52	-59.69	-20.00	39.69
644.40	V	48.35	-54.28	0.00	0.52	-54.80	-20.00	34.80
805.50	H	34.33	-67.83	0.00	0.56	-68.39	-20.00	48.39
805.50	V	36.67	-61.94	0.00	0.56	-62.50	-20.00	42.50
966.60	H	30.21	-67.08	0.00	0.59	-67.67	-20.00	47.67
966.60	V	37.28	-57.70	0.00	0.59	-58.29	-20.00	38.29
1127.70	H	38.59	-63.40	7.46	0.64	-56.58	-20.00	36.58
1127.70	V	41.56	-60.99	7.46	0.64	-54.17	-20.00	34.17
1288.80	H	37.23	-65.51	7.91	0.70	-58.30	-20.00	38.30
1288.80	V	43.31	-59.93	7.91	0.70	-52.72	-20.00	32.72
1449.90	H	36.04	-67.54	8.36	0.75	-59.93	-20.00	39.93
1449.90	V	40.09	-63.56	8.36	0.75	-55.95	-20.00	35.95
1611.00	H	37.03	-67.33	8.63	0.82	-59.52	-20.00	39.52
1611.00	V	40.83	-63.57	8.63	0.82	-55.76	-20.00	35.76
FM, Frequency: 161.1MHz-25 kHz								
322.20	H	41.23	-69.15	0.00	0.34	-69.49	-13.00	56.49
322.20	V	40.15	-68.08	0.00	0.34	-68.42	-13.00	55.42
483.30	H	33.68	-73.57	0.00	0.42	-73.99	-13.00	60.99
483.30	V	41.46	-61.82	0.00	0.42	-62.24	-13.00	49.24
644.40	H	42.03	-62.69	0.00	0.52	-63.21	-13.00	50.21
644.40	V	48.61	-54.02	0.00	0.52	-54.54	-13.00	41.54
805.50	H	34.35	-67.81	0.00	0.56	-68.37	-13.00	55.37
805.50	V	35.82	-62.79	0.00	0.56	-63.35	-13.00	50.35
966.60	H	28.94	-68.35	0.00	0.59	-68.94	-13.00	55.94
966.60	V	41.17	-53.81	0.00	0.59	-54.40	-13.00	41.4
1127.70	H	36.59	-65.40	7.46	0.64	-58.58	-13.00	45.58
1127.70	V	39.65	-62.90	7.46	0.64	-56.08	-13.00	43.08
1288.80	H	36.57	-66.17	7.91	0.70	-58.96	-13.00	45.96
1288.80	V	41.52	-61.72	7.91	0.70	-54.51	-13.00	41.51
1449.90	H	35.06	-68.52	8.36	0.75	-60.91	-13.00	47.91
1449.90	V	37.35	-66.30	8.36	0.75	-58.69	-13.00	45.69
1611.00	H	35.63	-68.73	8.63	0.82	-60.92	-13.00	47.92
1611.00	V	37.13	-67.27	8.63	0.82	-59.46	-13.00	46.46

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 161.1MHz-12.5 kHz								
322.20	H	40.26	-70.12	0.00	0.34	-70.46	-20.00	50.46
322.20	V	37.69	-70.54	0.00	0.34	-70.88	-20.00	50.88
483.30	H	33.96	-73.29	0.00	0.42	-73.71	-20.00	53.71
483.30	V	40.86	-62.42	0.00	0.42	-62.84	-20.00	42.84
644.40	H	44.08	-60.64	0.00	0.52	-61.16	-20.00	41.16
644.40	V	48.71	-53.92	0.00	0.52	-54.44	-20.00	34.44
805.50	H	35.90	-66.26	0.00	0.56	-66.82	-20.00	46.82
805.50	V	34.15	-64.46	0.00	0.56	-65.02	-20.00	45.02
966.60	H	29.36	-67.93	0.00	0.59	-68.52	-20.00	48.52
966.60	V	40.13	-54.85	0.00	0.59	-55.44	-20.00	35.44
1127.70	H	35.32	-66.67	7.46	0.64	-59.85	-20.00	39.85
1127.70	V	36.87	-65.68	7.46	0.64	-58.86	-20.00	38.86
1288.80	H	35.90	-66.84	7.91	0.70	-59.63	-20.00	39.63
1288.80	V	36.30	-66.94	7.91	0.70	-59.73	-20.00	39.73
1449.90	H	34.72	-68.86	8.36	0.75	-61.25	-20.00	41.25
1449.90	V	35.66	-67.99	8.36	0.75	-60.38	-20.00	40.38
1611.00	H	35.48	-68.88	8.63	0.82	-61.07	-20.00	41.07
1611.00	V	34.78	-69.62	8.63	0.82	-61.81	-20.00	41.81

Part 22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 150.8125MHz-12.5 kHz								
301.63	H	37.66	-73.04	0.00	0.34	-73.38	-13.00	60.38
301.63	V	33.54	-75.23	0.00	0.34	-75.57	-13.00	62.57
452.44	H	32.29	-75.69	0.00	0.43	-76.12	-13.00	63.12
452.44	V	41.03	-63.33	0.00	0.43	-63.76	-13.00	50.76
603.25	H	37.46	-67.34	0.00	0.50	-67.84	-13.00	54.84
603.25	V	48.55	-55.08	0.00	0.50	-55.58	-13.00	42.58
754.06	H	37.16	-66.22	0.00	0.52	-66.74	-13.00	53.74
754.06	V	35.13	-64.78	0.00	0.52	-65.30	-13.00	52.30
904.88	H	28.54	-70.61	0.00	0.55	-71.16	-13.00	58.16
904.88	V	35.63	-60.69	0.00	0.55	-61.24	-13.00	48.24
1055.69	H	38.11	-64.46	7.26	0.65	-57.85	-13.00	44.85
1055.69	V	37.83	-65.10	7.26	0.65	-58.49	-13.00	45.49
1206.50	H	36.09	-66.76	7.68	0.69	-59.77	-13.00	46.77
1206.50	V	37.20	-66.37	7.68	0.69	-59.38	-13.00	46.38
1357.31	H	36.11	-67.18	8.10	0.78	-59.86	-13.00	46.86
1357.31	V	38.52	-64.99	8.10	0.78	-57.67	-13.00	44.67
1508.13	H	36.00	-67.52	8.51	0.76	-59.77	-13.00	46.77
1508.13	V	35.93	-67.68	8.51	0.76	-59.93	-13.00	46.93
FM, Frequency: 150.8125MHz-25 kHz								
301.63	H	38.49	-72.21	0.00	0.34	-72.55	-13.00	59.55
301.63	V	35.21	-73.56	0.00	0.34	-73.90	-13.00	60.90
452.44	H	32.25	-75.73	0.00	0.43	-76.16	-13.00	63.16
452.44	V	44.61	-59.75	0.00	0.43	-60.18	-13.00	47.18
603.25	H	38.69	-66.11	0.00	0.50	-66.61	-13.00	53.61
603.25	V	48.82	-54.81	0.00	0.50	-55.31	-13.00	42.31
754.06	H	39.62	-63.76	0.00	0.52	-64.28	-13.00	51.28
754.06	V	34.21	-65.70	0.00	0.52	-66.22	-13.00	53.22
904.88	H	30.01	-69.14	0.00	0.55	-69.69	-13.00	56.69
904.88	V	36.22	-60.10	0.00	0.55	-60.65	-13.00	47.65
1055.69	H	36.77	-65.80	7.26	0.65	-59.19	-13.00	46.19
1055.69	V	39.01	-63.92	7.26	0.65	-57.31	-13.00	44.31
1206.50	H	35.24	-67.61	7.68	0.69	-60.62	-13.00	47.62
1206.50	V	38.13	-65.44	7.68	0.69	-58.45	-13.00	45.45
1357.31	H	35.48	-67.81	8.10	0.78	-60.49	-13.00	47.49
1357.31	V	39.52	-63.99	8.10	0.78	-56.67	-13.00	43.67
1508.13	H	35.50	-68.02	8.51	0.76	-60.27	-13.00	47.27
1508.13	V	36.01	-67.60	8.51	0.76	-59.85	-13.00	46.85

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK,Frequency: 150.8125MHz-12.5 kHz								
301.63	H	37.25	-73.45	0.00	0.34	-73.79	-13.00	60.79
301.63	V	33.32	-75.45	0.00	0.34	-75.79	-13.00	62.79
452.44	H	34.68	-73.30	0.00	0.43	-73.73	-13.00	60.73
452.44	V	47.61	-56.75	0.00	0.43	-57.18	-13.00	44.18
603.25	H	42.31	-62.49	0.00	0.50	-62.99	-13.00	49.99
603.25	V	47.52	-56.11	0.00	0.50	-56.61	-13.00	43.61
754.06	H	38.33	-65.05	0.00	0.52	-65.57	-13.00	52.57
754.06	V	35.23	-64.68	0.00	0.52	-65.20	-13.00	52.20
904.88	H	34.29	-64.86	0.00	0.55	-65.41	-13.00	52.41
904.88	V	38.56	-57.76	0.00	0.55	-58.31	-13.00	45.31
1055.69	H	35.09	-67.48	7.26	0.65	-60.87	-13.00	47.87
1055.69	V	35.34	-67.59	7.26	0.65	-60.98	-13.00	47.98
1206.50	H	35.63	-67.22	7.68	0.69	-60.23	-13.00	47.23
1206.50	V	35.84	-67.73	7.68	0.69	-60.74	-13.00	47.74
1357.31	H	35.41	-67.88	8.10	0.78	-60.56	-13.00	47.56
1357.31	V	35.51	-68.00	8.10	0.78	-60.68	-13.00	47.68
1508.13	H	36.30	-67.22	8.51	0.76	-59.47	-13.00	46.47
1508.13	V	36.28	-67.33	8.51	0.76	-59.58	-13.00	46.58

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

4.6 FREQUENCY STABILITY:

Serial Number:	CR22030025-RF-S1	Test Date:	2022/4/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.4	Relative Humidity: (%)	68	ATM Pressure: (kPa)	101.1
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101943	2021-10-10	2022-10-09
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
UNI-T	Multimeter	UT39A+	C210582554	2021-09-30	2022-09-29
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021-07-22	2022-07-21
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**FCC Part 90:**

Un-modulation, Reference Frequency: 155.7525 MHz, Limit: ± 5 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-20	7.4	155.7525521	0.33
-10		155.7525431	0.28
0		155.7525336	0.22
10		155.7525293	0.19
20		155.7525000	0.00
30		155.7525012	0.01
40		155.7525063	0.04
50		155.7525169	0.11
60		155.7525354	0.23
20	6.3	155.7525534	0.34
20	8.4	155.7525544	0.35

FCC Part 74:

Un-modulation, Reference Frequency: 150.8125 MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-20	7.4	150.8125463	0.31
-10		150.8125410	0.27
0		150.8125356	0.24
10		150.8125258	0.17
20		150.8125290	0.19
30		150.8125338	0.22
40		150.8125632	0.42
50		150.8125335	0.22
60		150.8125359	0.24
20	6.3	150.8125425	0.28
20	8.4	150.8125523	0.35

FCC Part 22:

Un-modulation, Reference Frequency: 161.1MHz, Limit: ± 5.0 ppm			
Temperature (°C)	Voltage Supplied (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)
-20	7.4	161.1000557	0.35
-10		161.1000488	0.30
0		161.1000346	0.21
10		161.1000288	0.18
20		161.1000000	0.00
30		161.1000088	0.05
40		161.1000155	0.10
50		161.1000365	0.23
60		161.1000446	0.28
20	6.3	161.1000511	0.32
20	8.4	161.1000543	0.34

4.7 TRANSIENT FREQUENCY BEHAVIOR

Serial Number:	CR22030025-RF-S1	Test Date:	2022/4/29
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus shi	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	24.9	Relative Humidity: (%)	58	ATM Pressure: (kPa)	100.7

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
YINSAIGE	Coaxial Cable	SS402	SJ0100002	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100003	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21
Weinschel	Coaxial Attenuators	53-20-34	LN751	2021-08-08	2022-08-07



* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	5(t ₁)	±12.5 kHz	Pass
	20(t ₂)	±6.25 kHz	
	5(t ₃)	±12.5 kHz	

Note: During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits:

For 155.7525 MHz 12.5kHz mode, limit is: 155.7525 MHz* 5ppm = 0.779kHz

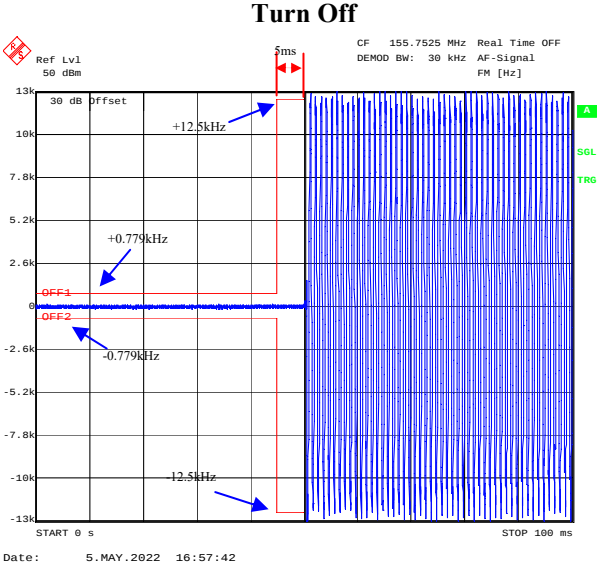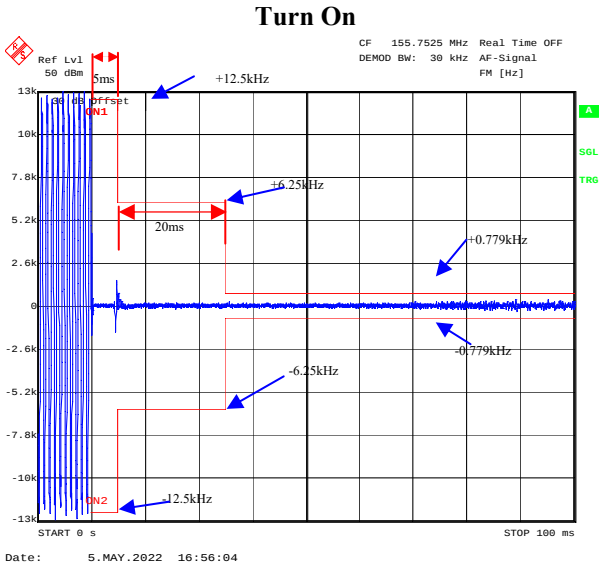

***** END OF REPORT *****