



FCC PART 18 TEST REPORT

Report No.: SET2021-13007

Product Name: Microwave Oven

Trade Name: Midea

Model No. : EC9P04###-S00A0A, EC9P04***-S00A0A

FCC ID : VG8XC9P04YY

Applicant: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

Received Date: 2021.09.15

Test Data: 2021.09.15-2021.09.28

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: ElectronicTestingBuilding, No.43ShaheRoad, Xili Street, Nanshan District, Shenzhen, Guangdong, China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **27** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name.....: Microwave Oven

Model No.: EC9P04##-S00A0A, EC9P04***-S00A0A

Trade name: Midea

Applicant.....: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

Applicant Address.....: No.6, Yong An Road, Beijiao, Shunde, Foshan, China

Manufacturer: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

Manufacturer Address ...: No.6, Yong An Road, Beijiao, Shunde, Foshan, China

Test Standards: 47 CFR Part 18
47 CFR Part 15 Subpart B

Test Result.....: PASS

Tested by: Ruihong Xie
Ruihong Xie Test Engineer 2021.09.28

Reviewed by: Chris You
Chris You Senior Engineer 2021.09.28

Approved by: Shuangwen Zhang
Shuangwen Zhang, Manager 2021.09.28

**TABLE OF CONTENTS**

1.	GENERAL INFORMATION	5
1.1	GENERAL DESCRIPTION OF EUT	5
1.2	Test Standards and Results.....	6
1.3	Facilities and Accreditations.....	7
1.3.1	Facilities	7
1.3.2	Test Environment Conditions.....	7
1.3.3	Measurement Uncertainty	7
2.	EQUIPMENTS LIST	8
3.	EMC EMISSION TEST.....	9
3.1	Test Procedure.....	9
3.1.1	Frequency For Normal Voltage	9
3.1.2	Frequency For Line Voltage	9
3.1.3	Measurement data	10
3.2	RADIATION HAZARD TEST.....	10
3.2.1	Test Setup	10
3.2.2	Limit.....	10
3.2.3	Test results.....	10
3.3	RF OUTPUT POWER MEASUREMENT	10
3.3.1	Test Standard	10
3.3.2	EUT Operating mode	11
3.3.3	Test Data.....	11
4.	CONDUCTED EMISSION	12
4.1.1	Conducted Emission Limit.....	12
4.1.2	Test Procedure	12
4.1.3	Test Setup	12
5.	RADIATED EMISSION	17
5.1.1	Radiated Emission Limits	17
5.1.2	Test Setup	17
5.1.3	Test Procedure	18
APPENDIX I: PHOTOGRAPHS OF EMC TEST CONFIGURATION		26



Change History		
Issue	Date	Reason for change
1.0	2021.09.27	First edition



1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

EUT Name	Microwave Oven
Trade Name.....	Midea
Serial model No.....	EC9P04##-S00A0A, EC9P04***-S00A0A
Brand Name.....	N/A
Hardware Version.....	N/A
Software Version	N/A
Model	EC9P04##-S00A0A, EC9P04***-S00A0A model designations as follows: E: Film type keypad; C=Microwave +convection function; 9: indicates the microwave output power is 900W, P04: indicate the design No.; ## or ***: “#”, “*” indicates different appearance; S: Indicates Stainless Steel Cavity. 00A0A: indicates other design No. Model of EC9P042FY-S00A0A was selected for final testing.
Power Supply	120V AC/60Hz
Rated input Power(microwave):	1450W
Rated output Power(microwave):	900W
Convection Power	1500W
Magnetron Model.....	2M519J
Magnetron Manufacturer ...	WITOL
Description of Support Units:	-Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven. -Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven. -Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner. -Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.

Note 1: The EUT have the following typical setups during the test:



Setup1: Microwave heating mode (According to FCC PART 18);

Setup2: Preheating convection mode (According to FCC PART 15B, digital device)

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 18:

No.	Identity	Document Title
1	47 CFR Part 18:2021	ISM Devices
2	47 CFR Part 15 Subpart B 2021	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

Emission			
Standard	Item	Class / Severity	Result
47 CFR PART 18	Conducted Emission (150 kHz to 30 MHz)	18.307(b)	PASS
	Radiated Emission (30 MHz to 1 GHz)	18.305(b)	PASS
47 CFR PART 15	Conducted Emission (150 kHz to 30 MHz)	15.107	PASS
	Radiated Emission (30 MHz to 1 GHz)	15.109	PASS



1.3 Facilities and Accreditations

1.3.1 Facilities

CNAS-Lab Code: L1659

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 19th, 2023.

A2LA Code: 5721.01

CCIC-

SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C- 35°C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 2.6 dB (k=2)
Uncertainty of Radiated Emission:(30MHz~1GHz)	Uc = 3.91 dB (k=2)
Uncertainty of Radiated Emission:(1~18GHz)	Uc = 4.5 dB (k=2)



2. EQUIPMENTS LIST

A. Use of Software Checklist

Software	Version number	Manufacturer	Use the project
ES-K1	V1.73	ROHDE&SCHWARZ	Radiated Emissions below 1GHz
TS+	JS32-RE 2.5.2.0	Tonsceng	Radiated Emissions above 1GHz
EMC32	Version 10.35.10	ROHDE&SCHWARZ	Conducted Emission

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A14120203 6	2021.09.20	2022.08.04
LISN	ROHDE&SCHWARZ	ESH2-Z5	A0304221	2021.04.03	2022.03.18
Shield Room	Xinju Electronics	L7300*W4500* H3100	A18100322 6	2021.09.05	2024.07.29
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2021.06.23	2022.05.23
Broadband Ant.	2786	ETC	A15040223 9	2021.09.16	2024.03.04
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A18050293 5	2021.08.12	2022.08.02
System Simulator	ROHDE&SCHWARZ	CMW500	A15080221 4	2021.07.29	2022.07.22
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17
Spectrum Analyzer	ROHDE&SCHWARZ	ESW26	A18050293 5	2021.08.11	2022.08.02



3. EMC EMISSION TEST

3.1 Test Procedure

Test Requirement: 47 CFR PART 18

Test Method: FCC/OST MP-5:1986

Power Supply: AC 120V/ 60Hz

Frequency Range: 2400-2500MHz

Detector: Peak

Limit: ISM equipment may be operated at any frequency above 9KHz and the frequency band 2400-2500MHz is allocated for use by ISM equipment

ISM frequency	Tolerance
6.78 MHz	±15.0 kHz
13.56 MHz	±7.0 kHz
27.12 MHz	±163.0 kHz
40.68 MHz	±20.0 kHz
915 MHz	±13.0 MHz
2,450 MHz	±50.0 MHz
5,800 MHz	±75.0 MHz
24,125 MHz	±125.0 MHz
61.25 GHz	±250.0 MHz
122.50 GHz	±500.0 MHz
245.00 GHz	±1.0 GHz

3.1.1 Frequency For Normal Voltage

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000mL water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

3.1.2 Frequency For Line Voltage

The EUT was operated / warmed by at least 10 minutes of use with a 1000mL water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

3.1.3 Measurement data

Operating Mode	Frequency(MHz)
Normal Voltage	2452.4-2475.3
Line Voltage	2453.5-2476.2

3.2 RADIATION HAZARD TEST

3.2.1 Test Setup

The EUT was set-up according to the FCC MP-5 and FCC Part 18 for radiation Hazard measurement. The measurement was using a microwave leakage meter to measure the radiation leakage in the as-received condition with the oven door closed A 700mL water load in a breaker was located in the center of the oven and the microwave oven was set to maximum power. While the oven operating, the microwave meter will check the leakage and then record the maximum leakage.

3.2.2 Limit

A maximum of 1.0mW/cm² is allowed in according with the applicable FCC standards

3.2.3 Test results

There was no microwave leakage exceeding a power level of 0.24 m W/cm² Observed at any point 5cm or more from the external surface of the oven

3.3 RF OUTPUT POWER MEASUREMENT

3.3.1 Test Standard

Test Requirement	47 CFR PART 18
Test Method	FCC/OST MP-5:1986
Power Supply	AC120/60Hz

3.3.2 EUT Operating mode

Test the EUT in microwave mode with full power.

3.3.3 Test Data

Mass of Water(g)	Mass of the container(g)	ambient temperature (°C)	Initial temperature(°C)	Final temperature(°C)	Heating Time(S)	Output Power(Watt)
1000	280	22.3	11	33	120	792.47

Formula:

$$P = \frac{4.2 \times m_w (T_2 - T_1) + 0.9 \times m_c (T_2 - T_0)}{t}$$

P is the microwave power output, in watts

M_w is the mass of the water, in grams

M_c is the mass of the container, in grams

T₀ is the ambient temperature, in degrees Celsius

T₁ is Initial temperature of the water, in degrees Celsius

T₂ is final temperature of the water, in degrees Celsius

T is heating time, in seconds, excluding the magnetron filament heating-up time

4. CONDUCTED EMISSION

4.1.1 Conducted Emission Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50


Note:

- The limit decreases linearly with the logarithm of the frequency in the range 0.05 MHz to 0.5 MHz.
- The lower limit is applicable at the transition frequency.

4.1.2 Test Procedure


The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

4.1.3 Test Setup

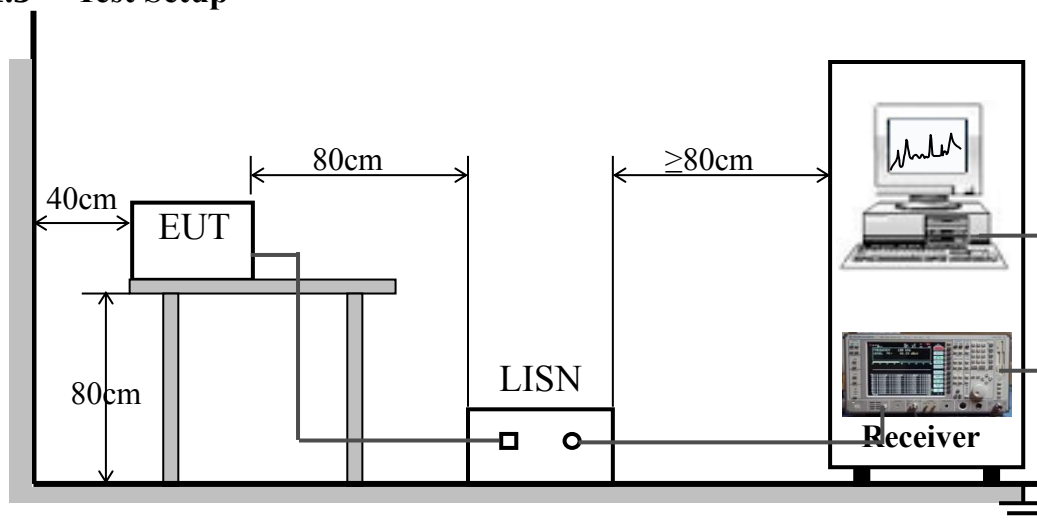

A. Test Result:


Mains terminal disturbance voltage, Setup1,L phase

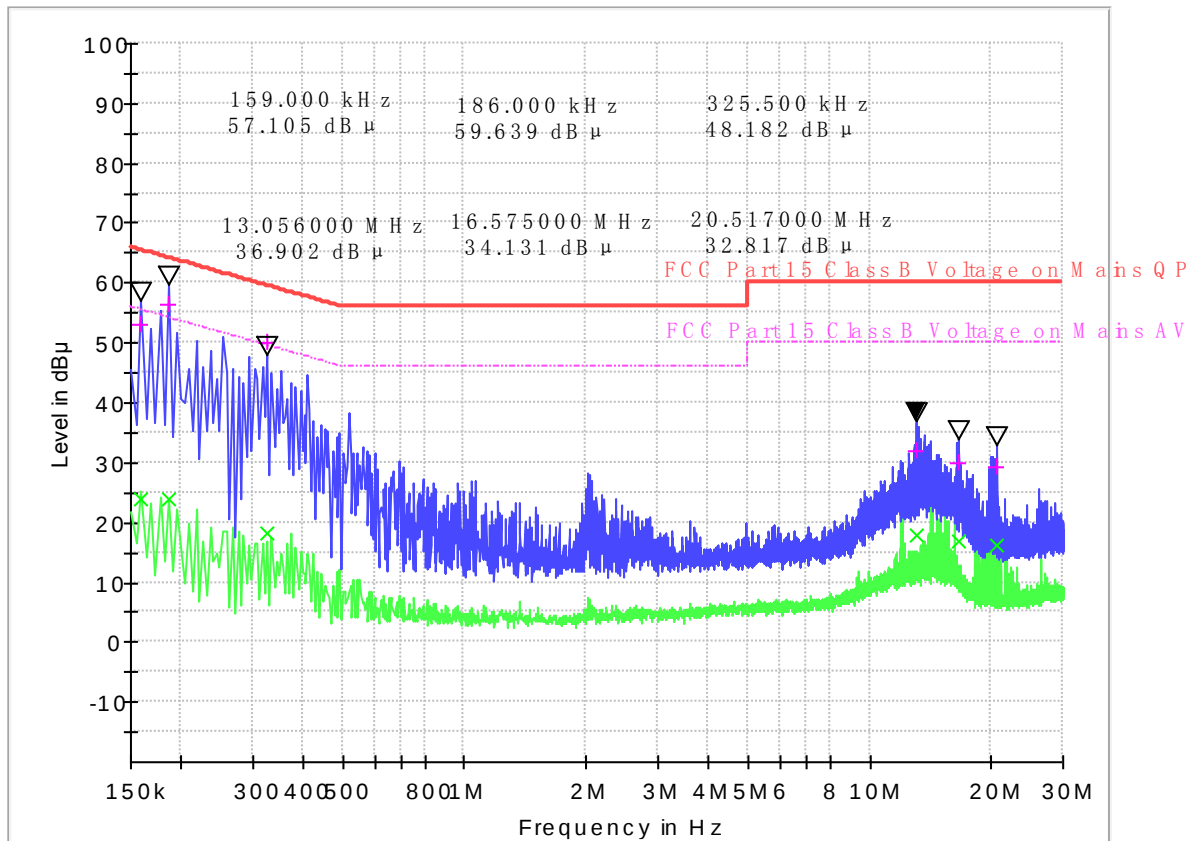

(Plot A: L Phase)

Frequency (MHz)	QuasiPeak (dB μV)	CAverage (dB μV)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μV)
0.159000	53.00	24.06	0.1	10.3	12.52	65.5	31.46	55.5
0.186000	56.30	23.93	0.1	10.3	7.91	64.2	30.28	54.2
0.325500	50.11	18.10	0.2	10.3	9.46	59.6	31.47	49.6
13.05600	32.07	17.73	0.2	10.8	27.93	60.0	32.27	50.0
16.57500	30.04	16.77	0.2	11.0	29.96	60.0	33.23	50.0
20.51700	29.30	16.23	0.2	11.3	30.70	60.0	33.77	50.0


Mains terminal disturbance voltage, Setup 1, N phase

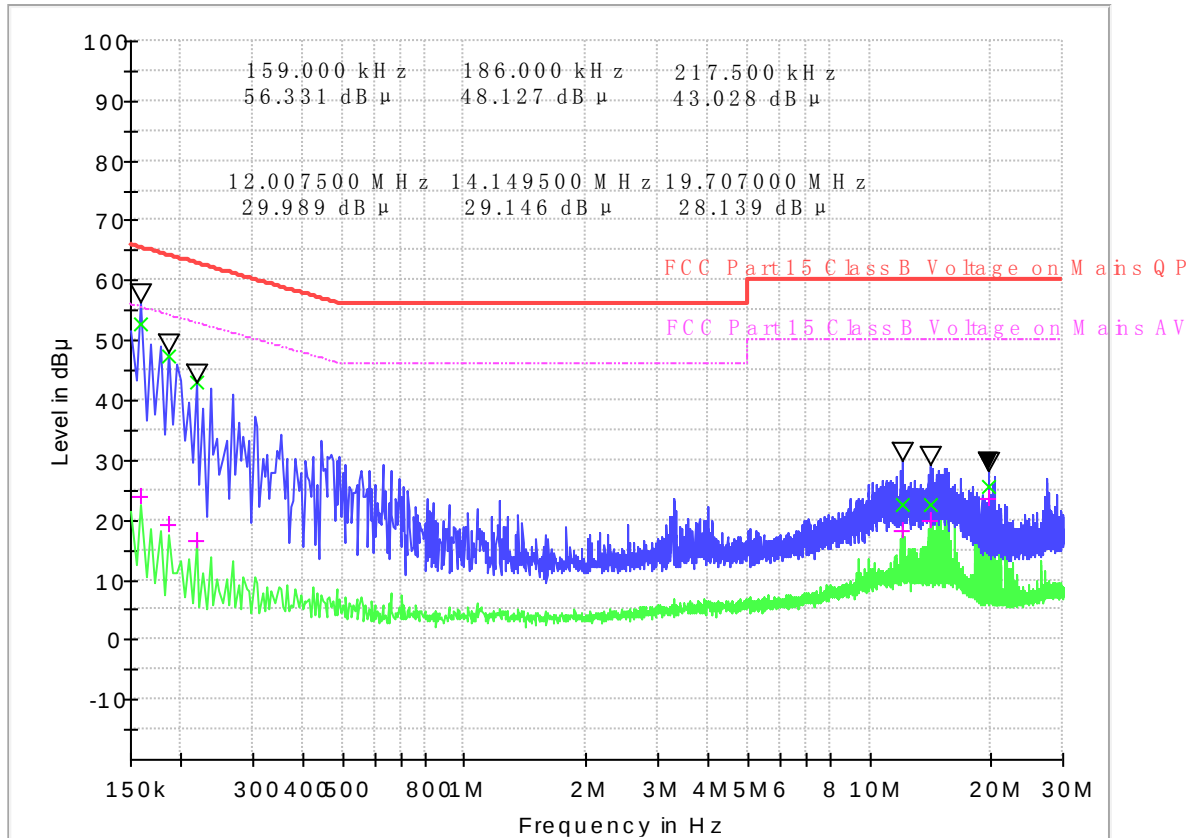

(Plot B: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.159000	52.59	23.79	0.1	10.2	12.93	65.5	31.73	55.5
0.186000	47.34	19.19	0.1	10.3	16.87	64.2	35.02	54.2
0.217500	42.85	16.59	0.1	10.3	20.06	62.9	36.32	52.9
12.00750	22.60	18.25	0.2	10.7	37.40	60.0	31.75	50.0
14.14950	22.53	19.89	0.2	10.9	37.47	60.0	30.11	50.0
19.70700	25.50	23.74	0.2	11.2	34.50	60.0	26.26	50.0


Mains terminal disturbance voltage, Setup2,L phase

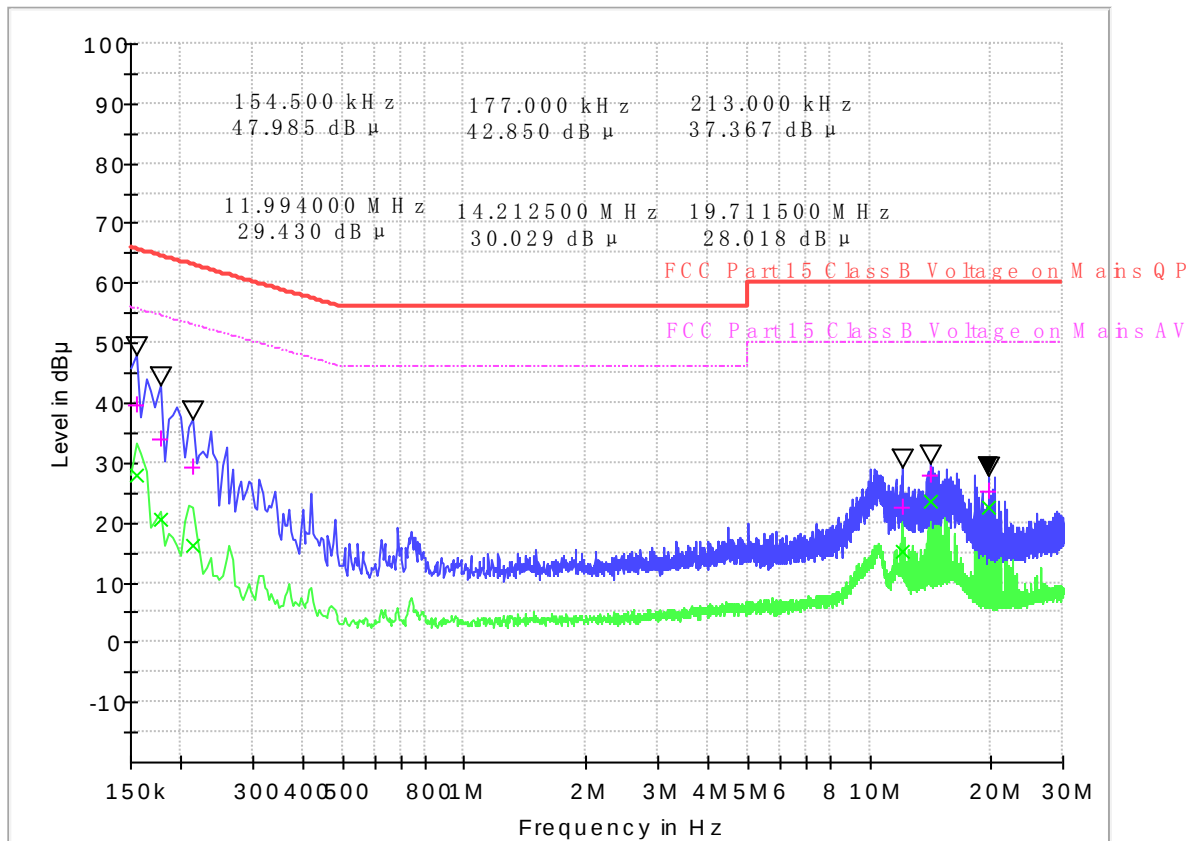

(Plot C: L Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.154500	39.56	28.08	0.1	10.3	26.19	65.8	27.67	55.8
0.177000	34.13	20.57	0.1	10.3	30.50	64.6	34.06	54.6
0.213000	29.42	16.26	0.2	10.3	33.67	63.1	36.83	53.1
11.99400	22.56	15.15	0.1	10.7	37.44	60.0	34.85	50.0
14.21250	28.00	23.60	0.2	10.9	32.00	60.0	26.40	50.0
19.71150	25.21	22.72	0.2	11.3	34.79	60.0	27.28	50.0

Mains terminal disturbance voltage, Setup 2, N phase

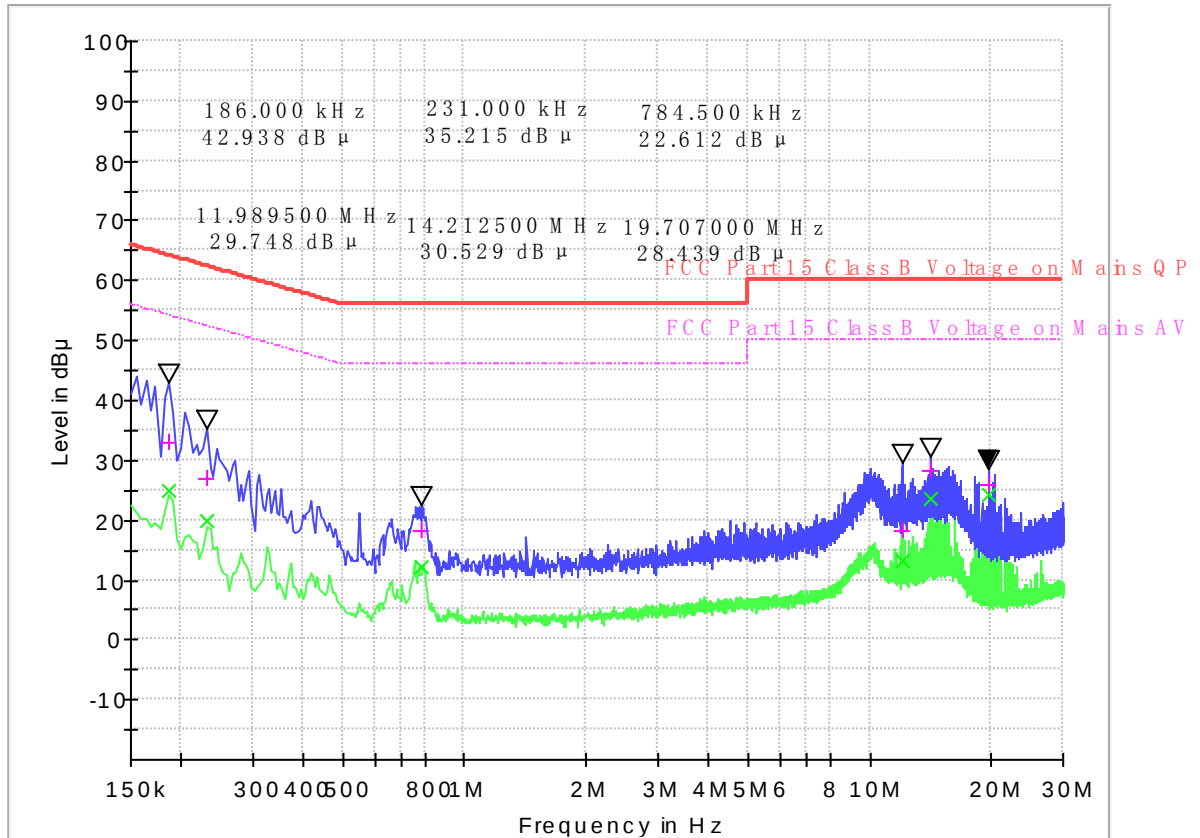

(Plot D: N Phase)

Frequency (MHz)	QuasiPeak (dB μ V)	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.154500	39.56	28.08	0.1	10.3	26.19	65.8	27.67	55.8
0.177000	34.13	20.57	0.1	10.3	30.50	64.6	34.06	54.6
0.213000	29.42	16.26	0.1	10.3	33.67	63.1	36.83	53.1
11.99400	22.56	15.15	0.1	10.7	37.44	60.0	34.85	50.0
14.21250	28.00	23.60	0.2	10.9	32.00	60.0	26.40	50.0
19.71150	25.21	22.72	0.2	11.3	34.79	60.0	27.28	50.0

Test Result: PASS

5. RADIATED EMISSION

5.1.1 Radiated Emission Limits

- (a) ISM equipment operation on a frequency specified in § 18.301 is permitted unlimited radiated energy in the band specified for that frequency.
- (b) The field strength levels of emissions which lie outside the bands specified in § 18.301, unless otherwise indicated, shall not exceed the following:


RF Power generated by equipment(watts)	Field strength limit(uV/m) @300m
Below 500	25
500or more	$25 \times \text{SQRT}(\text{power}/500)$

Power =792.47W


Limit= $20\lg(25 \times \text{SQRT}(\text{power}/500)) + 20\lg(300/3)$ @ 3m distance.

5.1.2 Test Setup

For radiated emissions from 30MHz to1GHz

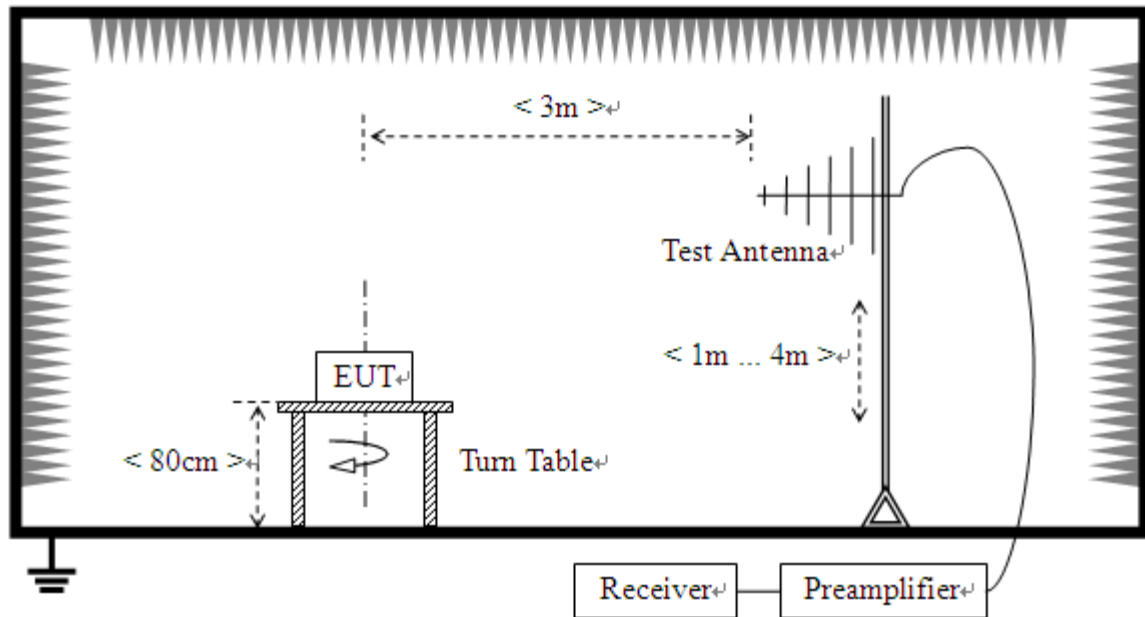

For radiated emissions above 1GHz

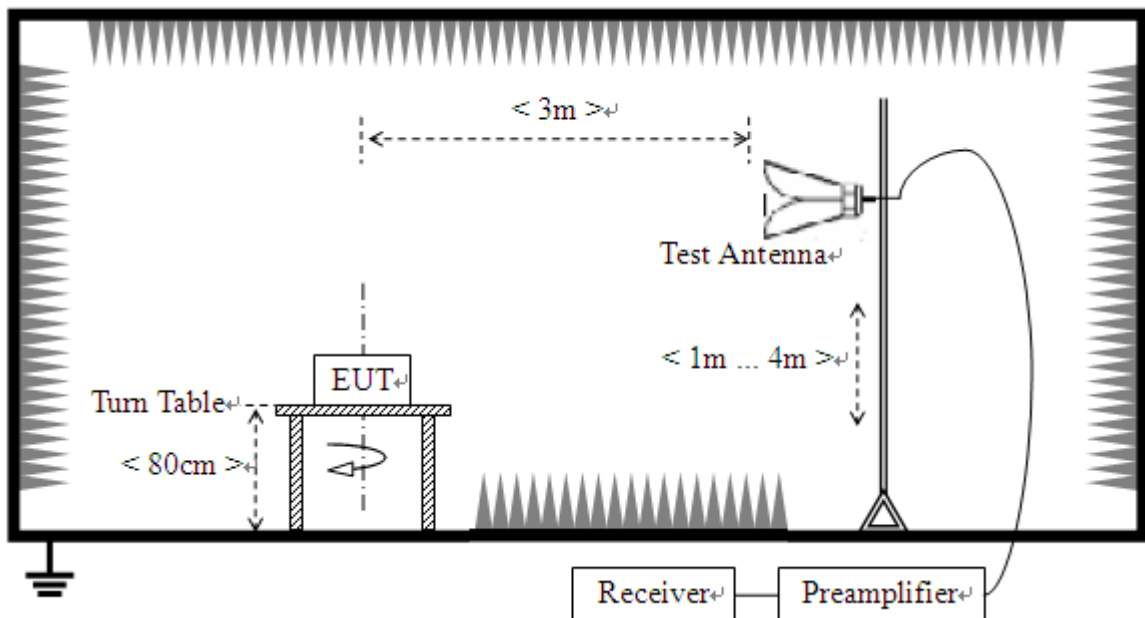

5.1.3 Test Procedure

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.




- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

Test Result:


Radiation disturbances, antenna polarization: Setup1, Horizontal

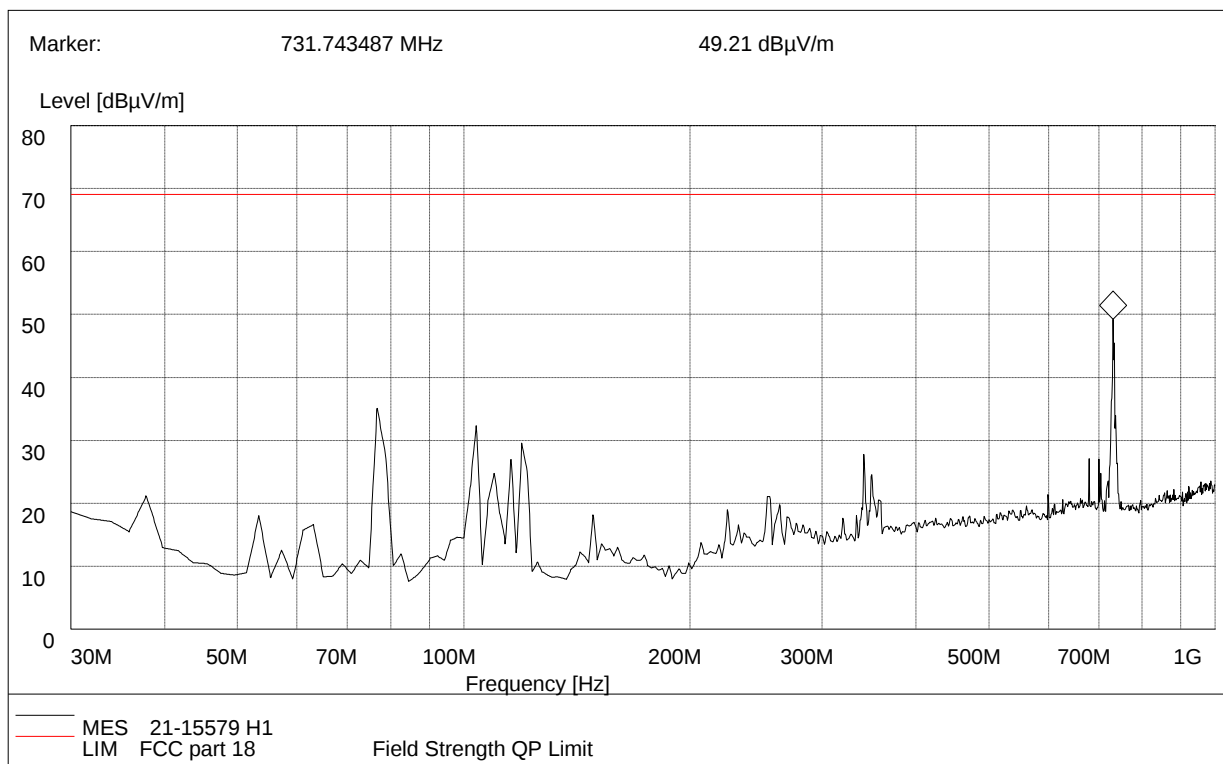

(Plot A: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
37.77	21.20	120.000	100.0	69.96	48.76	Horizontal	Pass
76.21	35.03	120.000	100.0	69.96	34.93	Horizontal	Pass
103.85	31.20	120.000	100.0	69.96	38.76	Horizontal	Pass
119.23	28.60	120.000	100.0	69.96	41.36	Horizontal	Pass
255.48	31.08	120.000	100.0	69.96	38.88	Horizontal	Pass
731.74	48.69	120.000	100.0	69.96	21.27	Horizontal	Pass


Radiation disturbances, antenna polarization:Setup1,Vertical

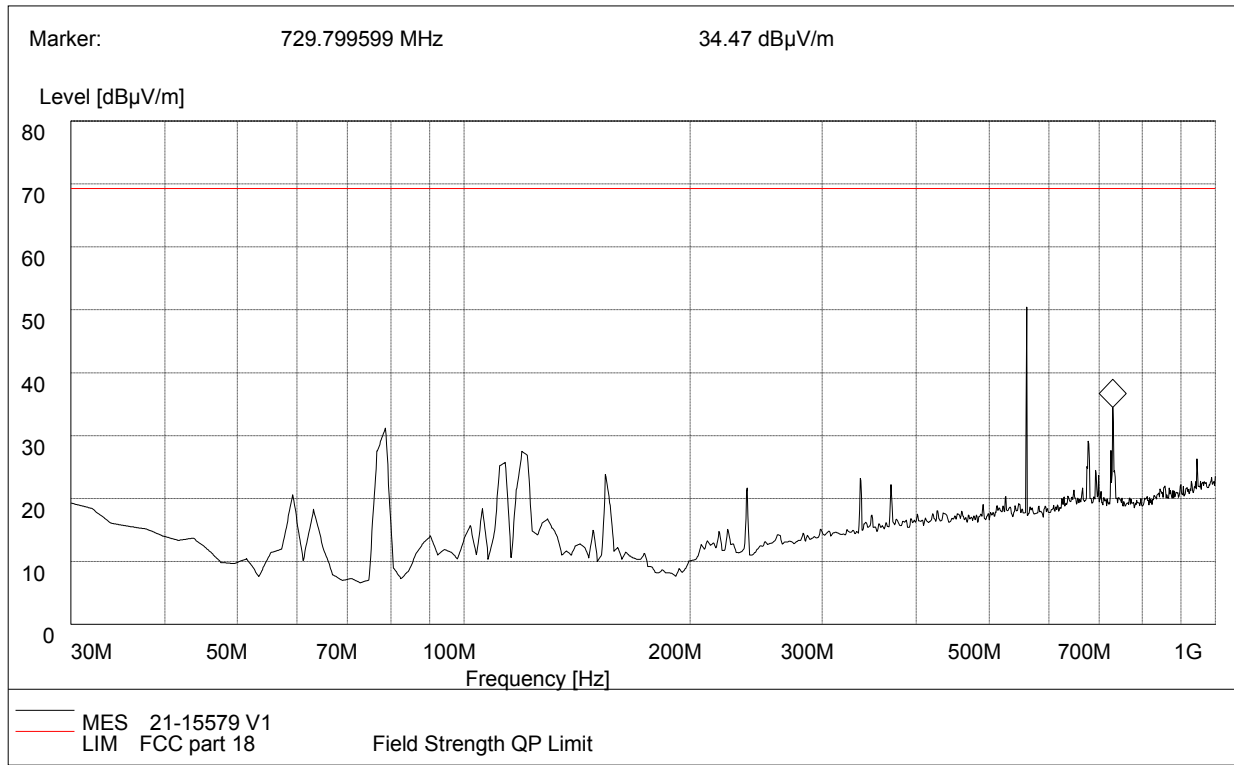

(Plot B: Test Antenna Horizontal30M - 1G)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Horizontal
78.23	31.05	120.000	100.0	69.69	38.91	Vertical	Pass
113.28	25.01	120.000	100.0	69.69	44.95	Vertical	Pass
119.54	27.43	120.000	100.0	69.69	42.53	Vertical	Pass
154.23	23.81	120.000	100.0	69.69	46.15	Vertical	Pass
677.31	29.12	120.000	100.0	69.69	40.84	Vertical	Pass
729.53	34.47	120.000	100.0	69.69	35.49	Vertical	Pass


Radiation disturbances, antenna polarization: Setup2, Horizontal

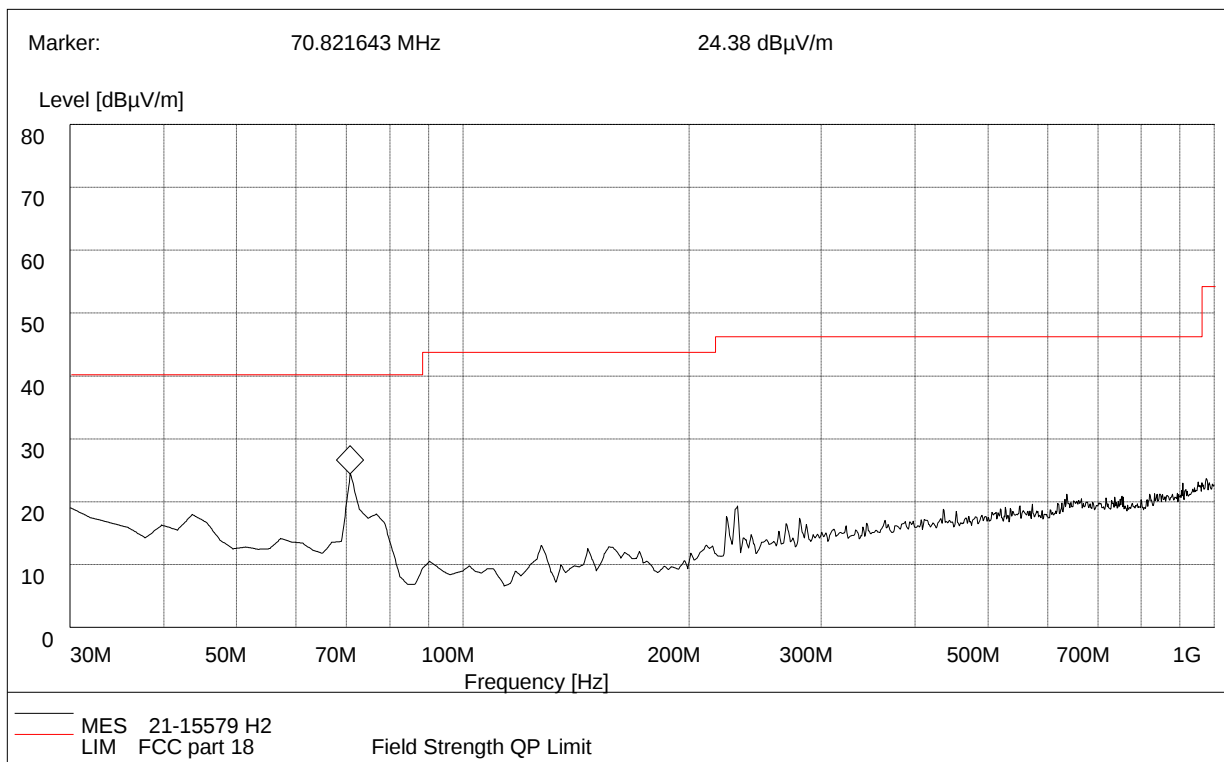

(Plot C: Test Antenna Horizontal30M - 1G)

Frequency (MHz)	CAverage (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
30.00	19.05	120.000	100.0	40.00	20.95	Horizontal	Pass
43.05	17.92	120.000	100.0	40.00	22.08	Horizontal	Pass
70.25	24.09	120.000	100.0	40.00	15.91	Horizontal	Pass
127.06	13.02	120.000	100.0	43.50	30.48	Horizontal	Pass
232.05	19.32	120.000	100.0	46.00	26.68	Horizontal	Pass
636.42	21.00	120.000	100.0	46.00	25.00	Horizontal	Pass

Radiation disturbances, antenna polarization: Setup2, Vertical

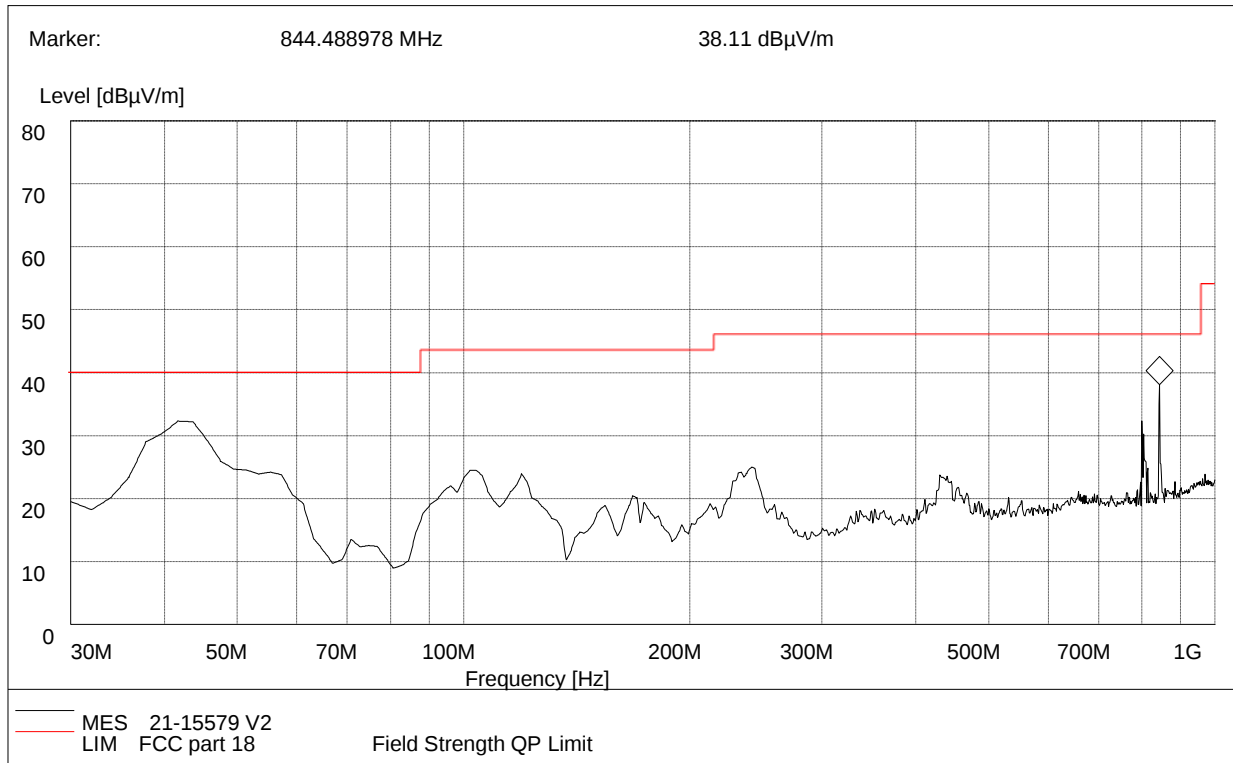

(Plot D: Test Antenna Vertical30M - 1G)

Frequency (MHz)	CAverage (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Horizontal
43.02	31.08	120.000	100.0	40.00	8.92	Vertical	Pass
55.21	23.49	120.000	100.0	40.00	16.51	Vertical	Pass
103.86	24.49	120.000	100.0	43.50	19.01	Vertical	Pass
119.53	23.95	120.000	100.0	43.50	19.55	Vertical	Pass
168.01	20.10	120.000	100.0	43.50	23.40	Vertical	Pass
844.48	38.20	120.000	100.0	46.00	7.80	Vertical	Pass

Above 1GHzSetup1

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2190.5953	31.57	-10.37	71.68	38.39	100	10	Horizontal
2	4095.5478	38.51	-2.82	71.68	31.45	100	30	Horizontal
3	4724.8624	41.11	0.25	71.68	28.85	100	20	Horizontal
4	7378.1891	45.64	2.86	71.68	24.32	100	40	Horizontal
5	9555.2776	42.82	5.75	71.68	27.14	100	10	Horizontal
6	12259.629	43.90	7.37	71.68	26.06	100	20	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2207.6038	40.70	-10.31	71.68	29.26	100	10	Vertical
2	4886.4432	40.48	0.03	71.68	29.48	100	10	Vertical
3	7327.1636	43.44	3.27	71.68	26.52	100	60	Vertical
4	8390.1951	42.15	4.44	71.68	27.81	100	50	Vertical
5	9546.7734	43.08	5.76	71.68	26.88	100	20	Vertical
6	12217.108	44.26	7.34	71.68	25.70	100	20	Vertical

Above 1GHzSetup2 (See Remark 3)

NO.	Freq. [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	--	--	--	--	--	--	Vertical
2	--	--	--	--	--	--	Vertical
3	--	--	--	--	--	--	Vertical
4	--	--	--	--	--	--	Vertical
5	--	--	--	--	--	--	Vertical
6	--	--	--	--	--	--	Vertical

NO.	Freq. [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	--	--	--	--	--	--	Horizontal
2	--	--	--	--	--	--	Horizontal
3	--	--	--	--	--	--	Horizontal
4	--	--	--	--	--	--	Horizontal
5	--	--	--	--	--	--	Horizontal
6	--	--	--	--	--	--	Horizontal




REMARKS:


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)
- Pre-Amplifier Factor(dB)
3. For Set up 2 mode, The EUT's internal highest frequency is less than 108MHz, so test frequency range is up to 1000MHz. Other frequency reading was too low against the official limit that not recorded.

APPENDIX I: PHOTOGRAPHS OF EMC TEST CONFIGURATION

1. Radiated Emission Measurement below 1GHz

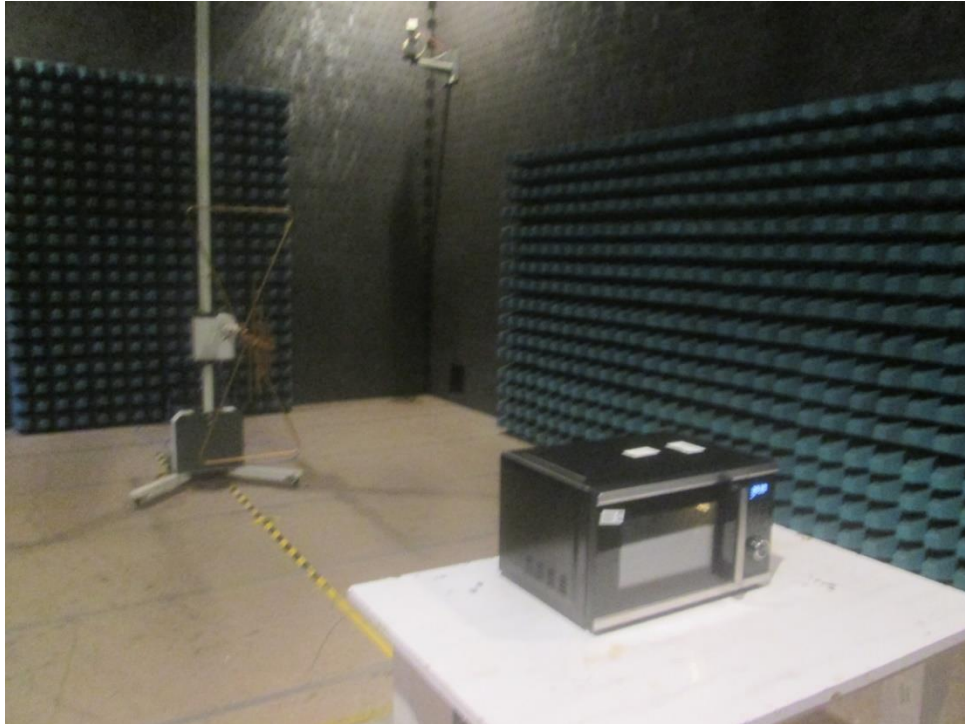

2. Radiated Emission Measurement above 1GHz

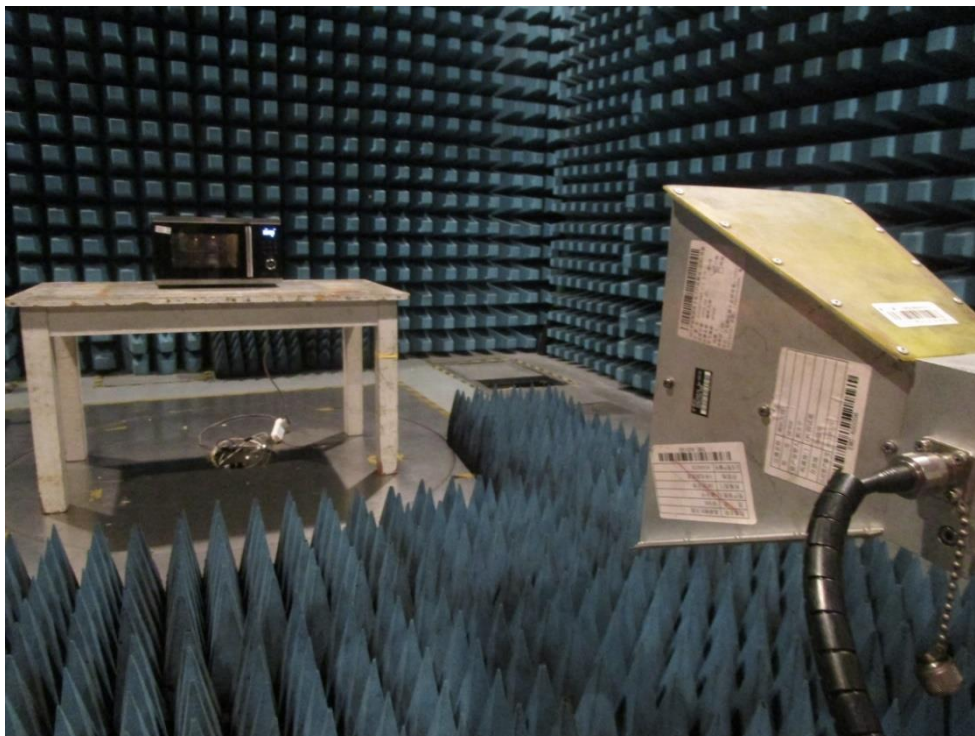

3. Conducted emission at AC mains input/output port Measurement






APPENDIX II: PHOTOGRAPHS OF PRODUCT PHOTO



External Photo




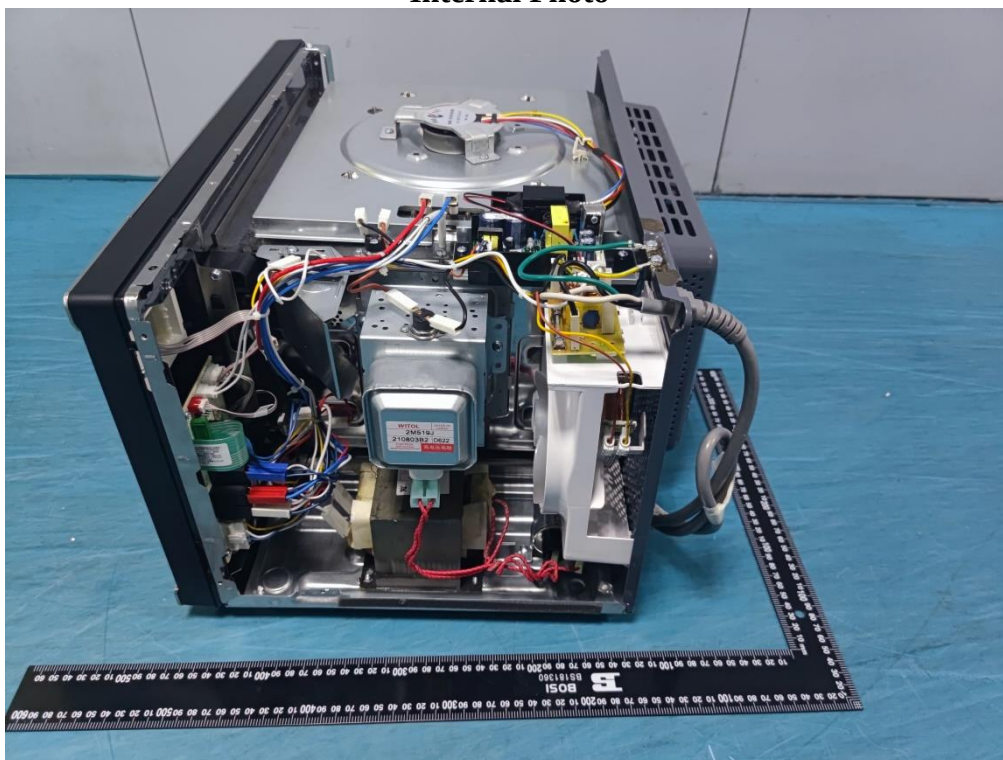

Internal Photo

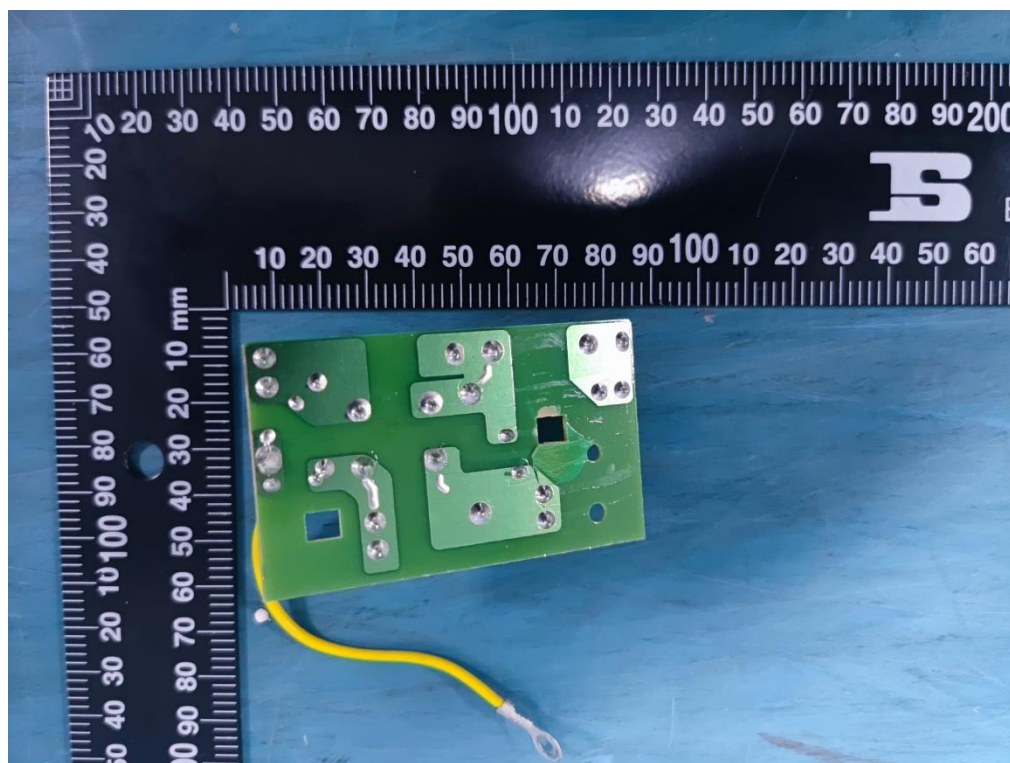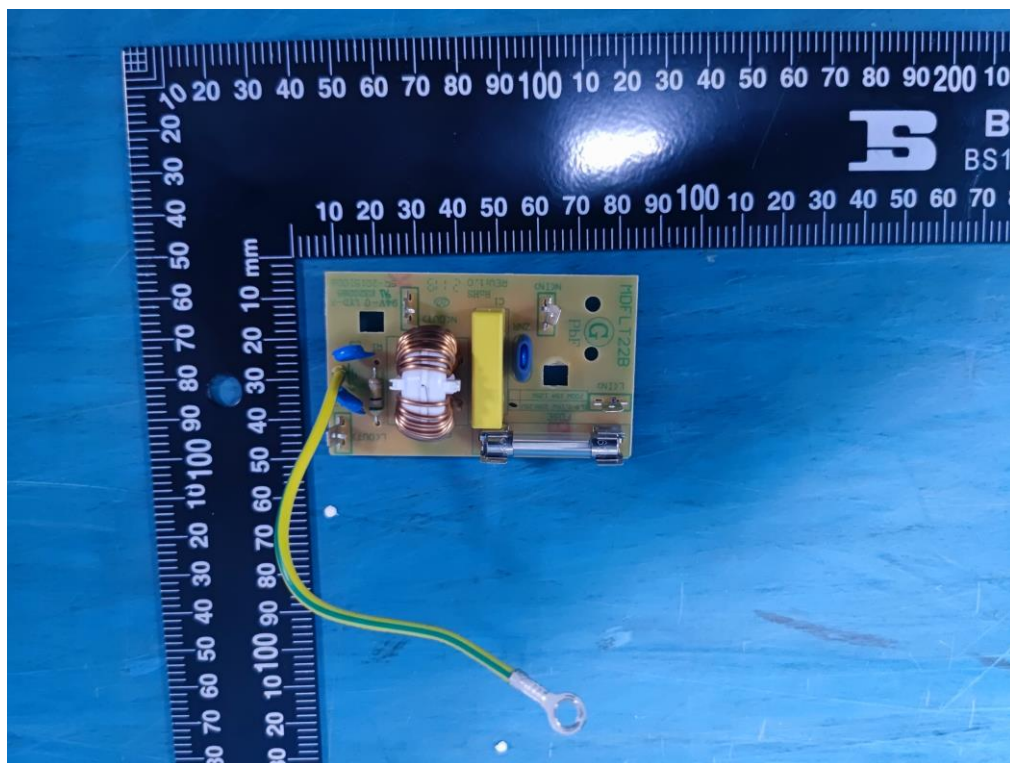

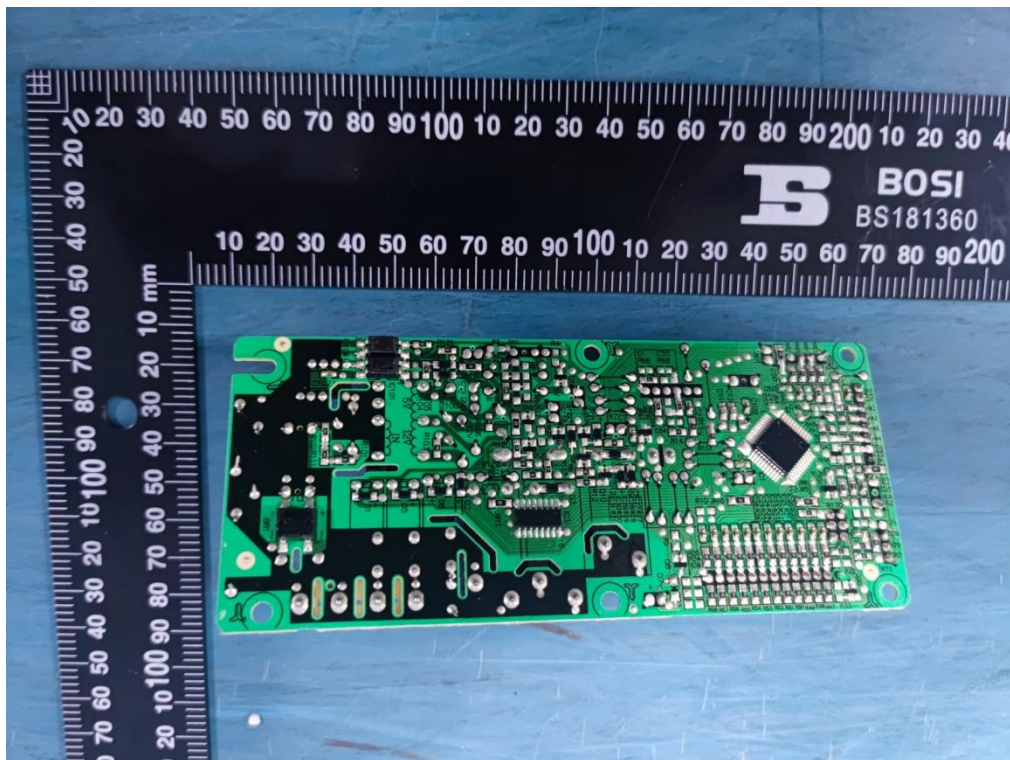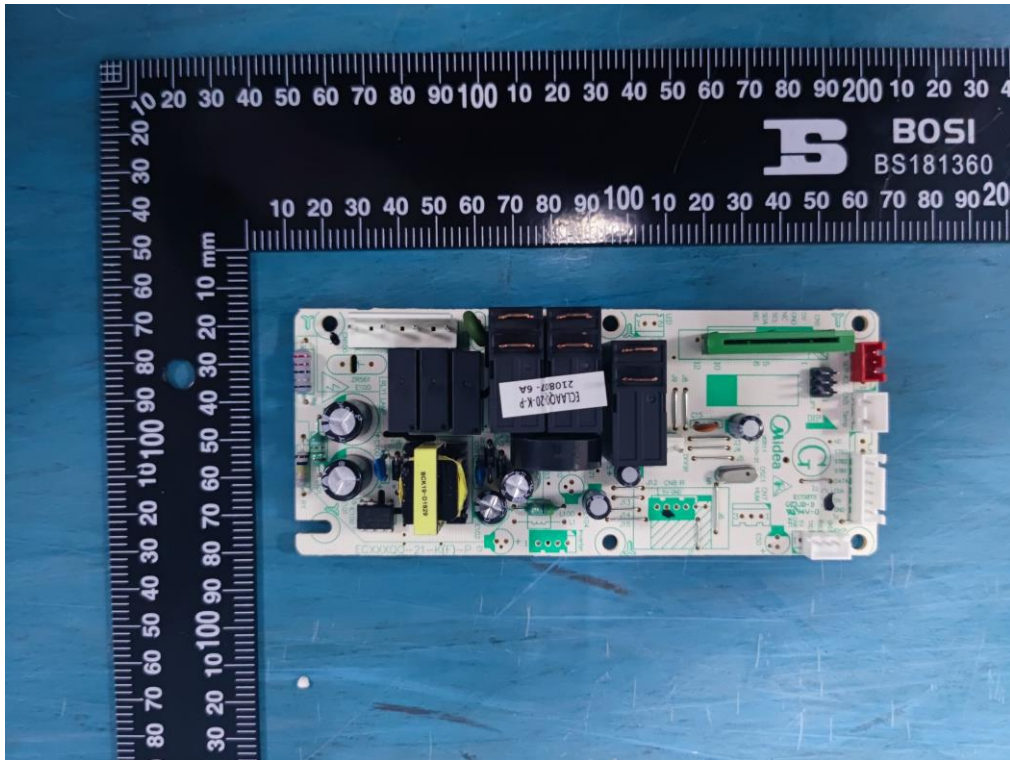

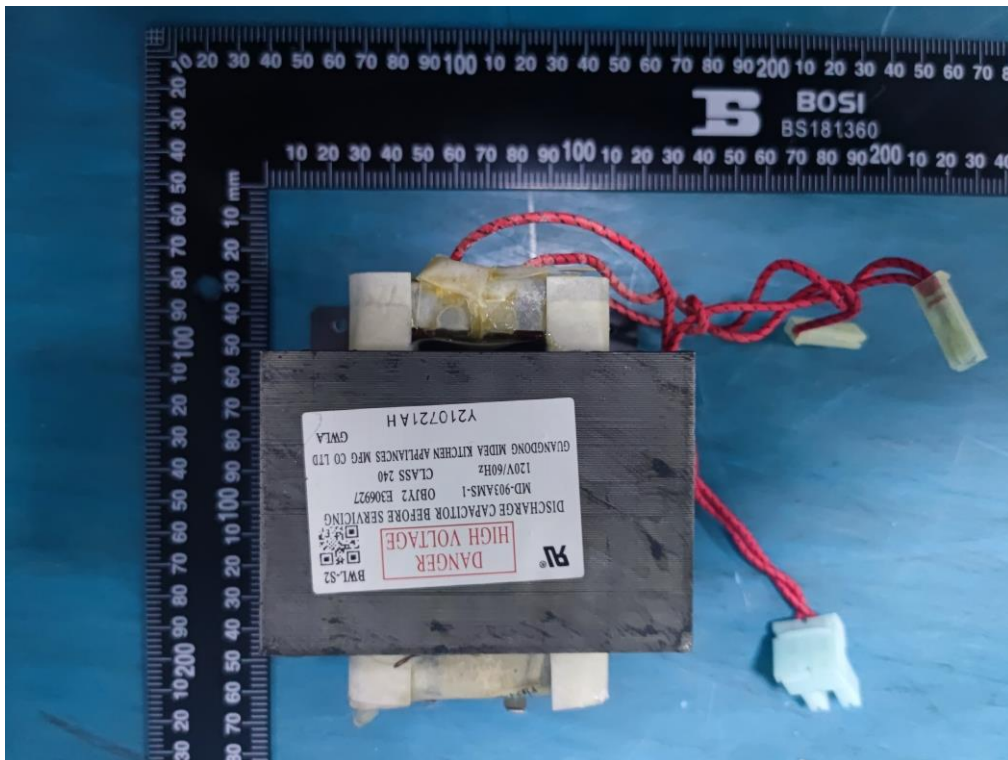

*** End Of Report ***