


---

## **Appendix A. Test Result of AC Power Line Conducted Emission**

Owing to the battery operation of EUT, this test item is not performed.

## Appendix B. Test Result of Field Strength of Fundamental

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_Fundamental\_X  
 Test BY :Bob

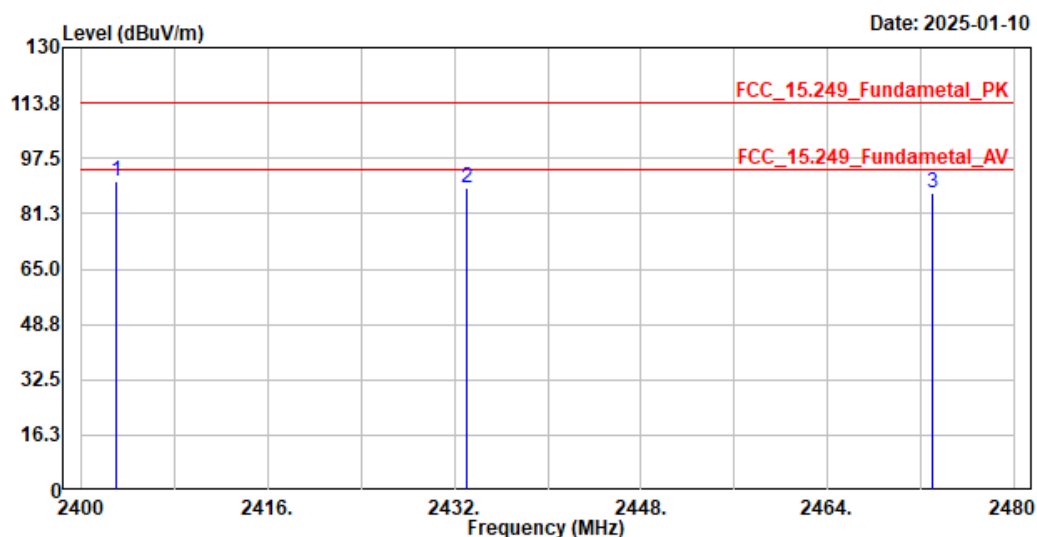

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2403.000  | 90.69  | 113.97        | -23.28        | 60.00         | 30.69  | Peak   |
| 2   | 2433.000  | 88.97  | 113.97        | -25.00        | 58.32         | 30.65  | Peak   |
| 3   | 2473.000  | 87.51  | 113.97        | -26.46        | 56.89         | 30.62  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2403               | 90.69                        | -37.589                   | 53.101                        | -40.869        | 93.970            |
| 2433               | 88.97                        | -37.589                   | 51.381                        | -42.589        | 93.970            |
| 2473               | 87.51                        | -37.589                   | 49.921                        | -44.049        | 93.970            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_Fundamental\_X  
 Test BY :Bob

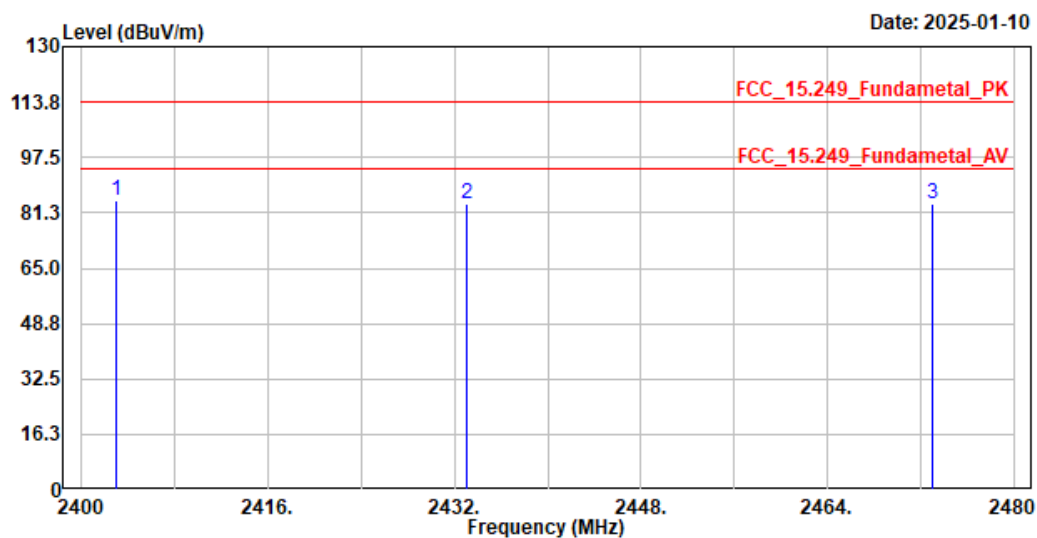

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2403.000  | 84.72  | 113.97        | -29.25        | 54.02         | 30.70  | Peak   |
| 2   | 2433.000  | 83.88  | 113.97        | -30.09        | 53.23         | 30.65  | Peak   |
| 3   | 2473.000  | 83.89  | 113.97        | -30.08        | 53.27         | 30.62  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2403               | 84.72                        | -37.589                   | 47.131                        | -46.839        | 93.970            |
| 2433               | 83.88                        | -37.589                   | 46.291                        | -47.679        | 93.970            |
| 2473               | 83.89                        | -37.589                   | 46.301                        | -47.669        | 93.970            |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_Fundamental\_Y  
 Test BY :Bob

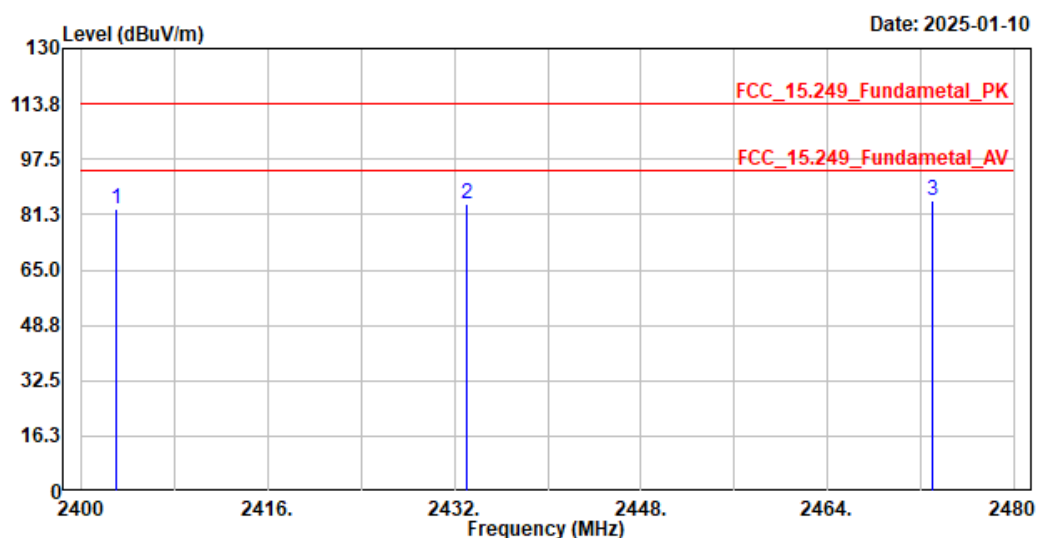

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2403.000  | 83.08  | 113.97        | -30.89        | 52.38         | 30.70  | Peak   |
| 2   | 2433.000  | 84.23  | 113.97        | -29.74        | 53.58         | 30.65  | Peak   |
| 3   | 2473.000  | 85.53  | 113.97        | -28.44        | 54.91         | 30.62  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2403               | 83.08                        | -37.589                   | 45.491                        | -48.479        | 93.970            |
| 2433               | 84.23                        | -37.589                   | 46.641                        | -47.329        | 93.970            |
| 2473               | 85.53                        | -37.589                   | 47.941                        | -46.029        | 93.970            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_Fundamental\_Y  
 Test BY :Bob

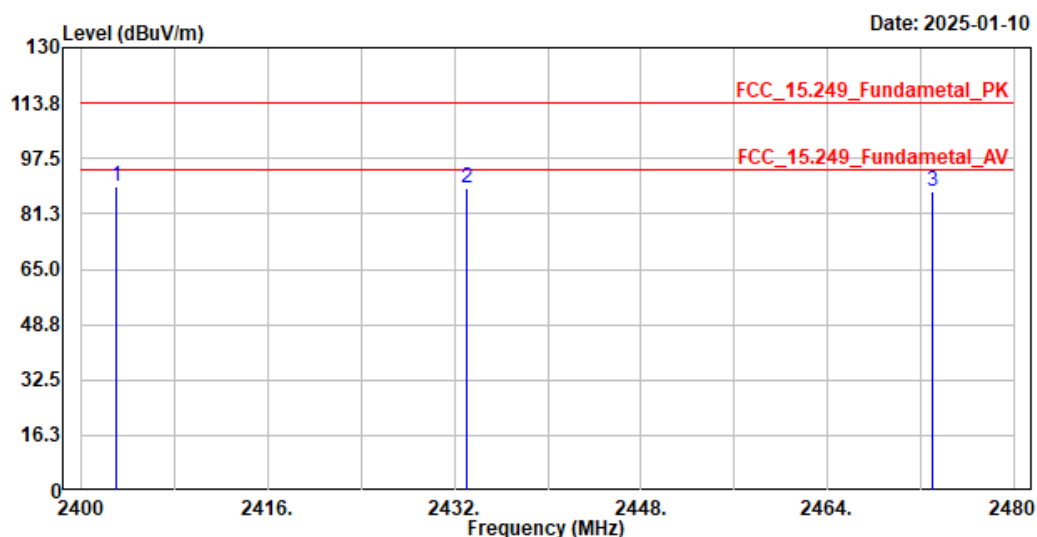

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2403.000  | 89.52  | 113.97        | -24.45        | 58.82         | 30.70  | Peak   |
| 2   | 2433.000  | 88.68  | 113.97        | -25.29        | 58.03         | 30.65  | Peak   |
| 3   | 2473.000  | 87.68  | 113.97        | -26.29        | 57.06         | 30.62  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2403               | 89.52                        | -37.589                   | 51.931                        | -42.039        | 93.970            |
| 2433               | 88.68                        | -37.589                   | 51.091                        | -42.879        | 93.970            |
| 2473               | 87.68                        | -37.589                   | 50.091                        | -43.879        | 93.970            |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_Fundamental\_Z  
 Test BY :Bob

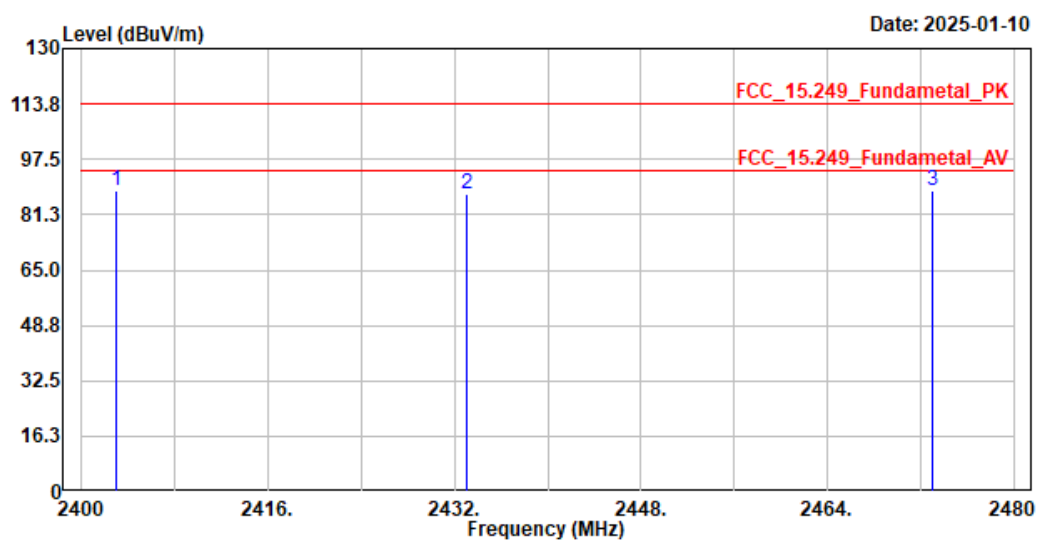

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2403.000  | 88.27  | 113.97        | -25.70        | 57.57         | 30.70  | Peak   |
| 2   | 2433.000  | 87.50  | 113.97        | -26.47        | 56.85         | 30.65  | Peak   |
| 3   | 2473.000  | 88.44  | 113.97        | -25.53        | 57.82         | 30.62  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2403               | 88.27                        | -37.589                   | 50.681                        | -43.289        | 93.970            |
| 2433               | 87.50                        | -37.589                   | 49.911                        | -44.059        | 93.970            |
| 2473               | 88.44                        | -37.589                   | 50.851                        | -43.119        | 93.970            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_Fundamental\_Z  
 Test BY :Bob

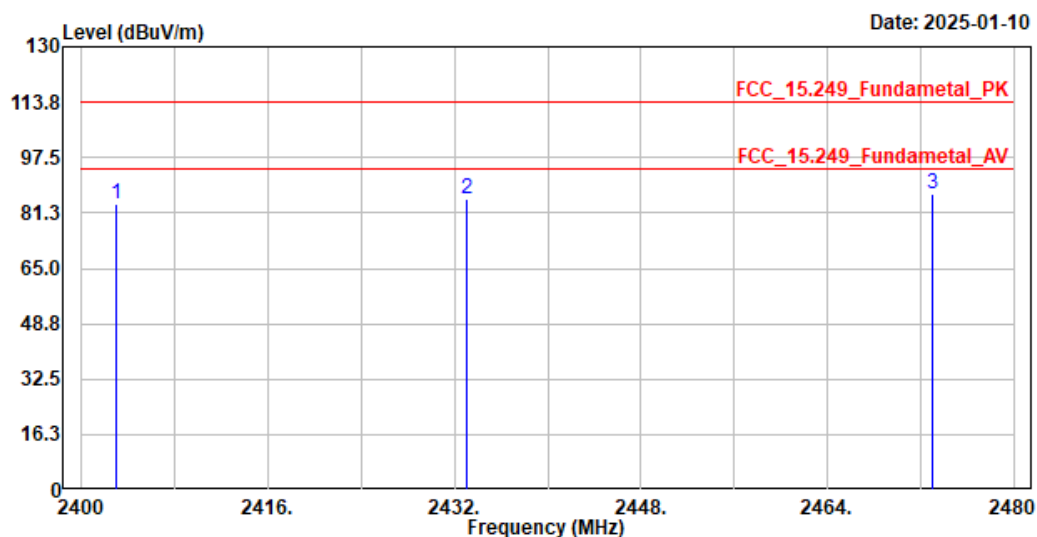

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2403.000  | 83.77  | 113.97        | -30.20        | 53.07         | 30.70  | Peak   |
| 2   | 2433.000  | 85.19  | 113.97        | -28.78        | 54.54         | 30.65  | Peak   |
| 3   | 2473.000  | 86.76  | 113.97        | -27.21        | 56.14         | 30.62  | Peak   |

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2403               | 83.77                        | -37.589                   | 46.181                        | -47.789        | 93.970            |
| 2433               | 85.19                        | -37.589                   | 47.601                        | -46.369        | 93.970            |
| 2473               | 86.76                        | -37.589                   | 49.171                        | -44.799        | 93.970            |

## Appendix C. Test Result of Radiated Emissions

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_2403MHz  
 Test BY :Bob

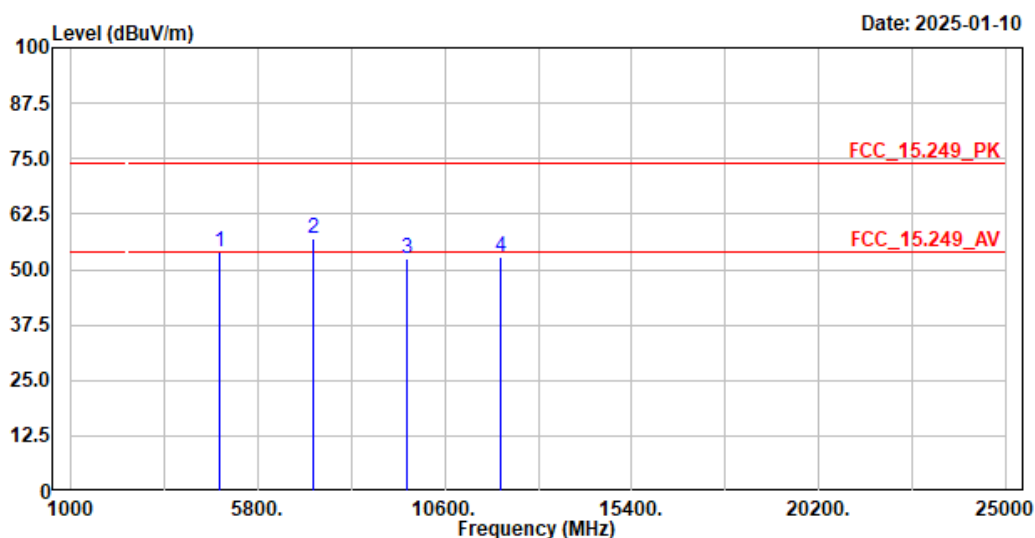

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4806.000  | 53.78  | 74.00  | -20.22 | 68.41 | -14.63 | Peak   |
| 2   | 7209.000  | 56.88  | 74.00  | -17.12 | 63.77 | -6.89  | Peak   |
| 3   | 9612.000  | 52.36  | 74.00  | -21.64 | 58.17 | -5.81  | Peak   |
| 4   | 12015.000 | 52.75  | 74.00  | -21.25 | 53.60 | -0.85  | Peak   |

### Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

### Horizontal-Average Detector:

| Frequency (MHz) | Peak Measurement (dBμV/m) | Duty Cycle Factor (dB) | Measurement Level (dBμV/m) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 4806            | 53.78                     | -37.589                | 16.191                     | -37.809     | 54.000         |
| 7209            | 56.88                     | -37.589                | 19.291                     | -34.709     | 54.000         |
| 9612            | 52.36                     | -37.589                | 14.771                     | -39.229     | 54.000         |
| 12015           | 52.75                     | -37.589                | 15.161                     | -38.839     | 54.000         |



Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_2403MHz  
 Test BY :Bob

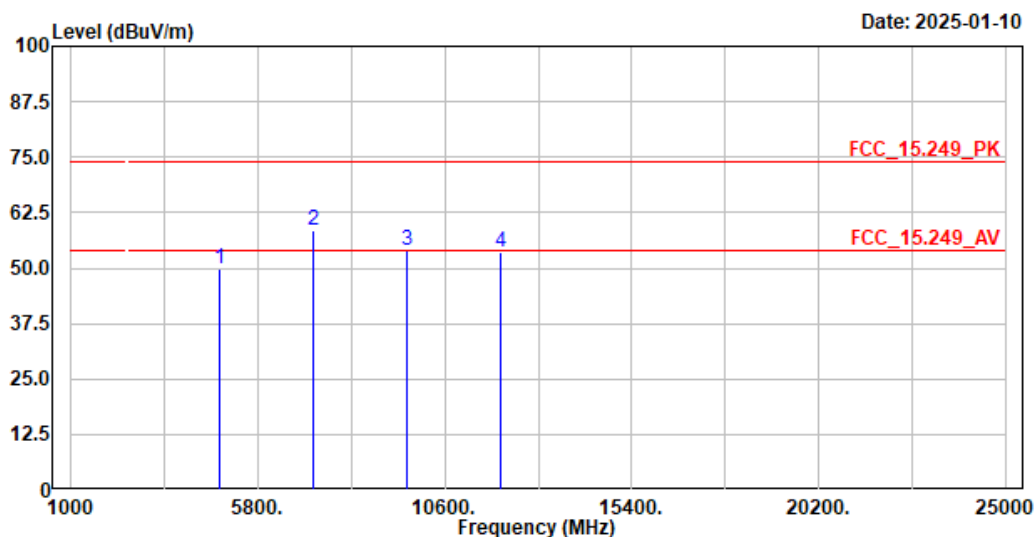

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     |           |        | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4806.000  | 49.80  | 74.00  | -24.20 | 64.43 | -14.63 | Peak   |
| 2   | 7209.000  | 58.62  | 74.00  | -15.38 | 65.51 | -6.89  | Peak   |
| 3   | 9612.000  | 53.79  | 74.00  | -20.21 | 59.60 | -5.81  | Peak   |
| 4   | 12015.000 | 53.66  | 74.00  | -20.34 | 54.51 | -0.85  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency (MHz) | Peak Measurement (dBμV/m) | Duty Cycle Factor (dB) | Measurement Level (dBμV/m) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 4806            | 49.80                     | -37.589                | 12.211                     | -41.789     | 54.000         |
| 7209            | 58.62                     | -37.589                | 21.031                     | -32.969     | 54.000         |
| 9612            | 53.79                     | -37.589                | 16.201                     | -37.799     | 54.000         |
| 12015           | 53.66                     | -37.589                | 16.071                     | -37.929     | 54.000         |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_2433MHz  
 Test BY :Bob

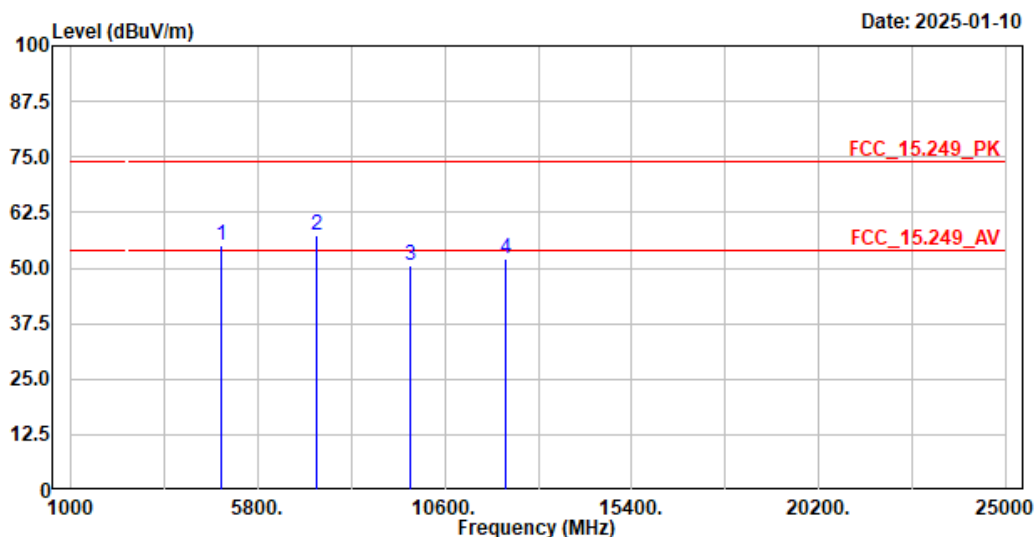

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4866.000  | 55.24  | 74.00  | -18.76 | 69.58 | -14.34 | Peak   |
| 2   | 7299.000  | 57.45  | 74.00  | -16.55 | 64.03 | -6.58  | Peak   |
| 3   | 9732.000  | 50.58  | 74.00  | -23.42 | 55.26 | -4.68  | Peak   |
| 4   | 12165.000 | 52.09  | 74.00  | -21.91 | 53.06 | -0.97  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 4866               | 55.24                        | -37.589                   | 17.651                        | -36.349        | 54.000            |
| 7299               | 57.45                        | -37.589                   | 19.861                        | -34.139        | 54.000            |
| 9732               | 50.58                        | -37.589                   | 12.991                        | -41.009        | 54.000            |
| 12165              | 52.09                        | -37.589                   | 14.501                        | -40.499        | 55.000            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_2433MHz  
 Test BY :Bob

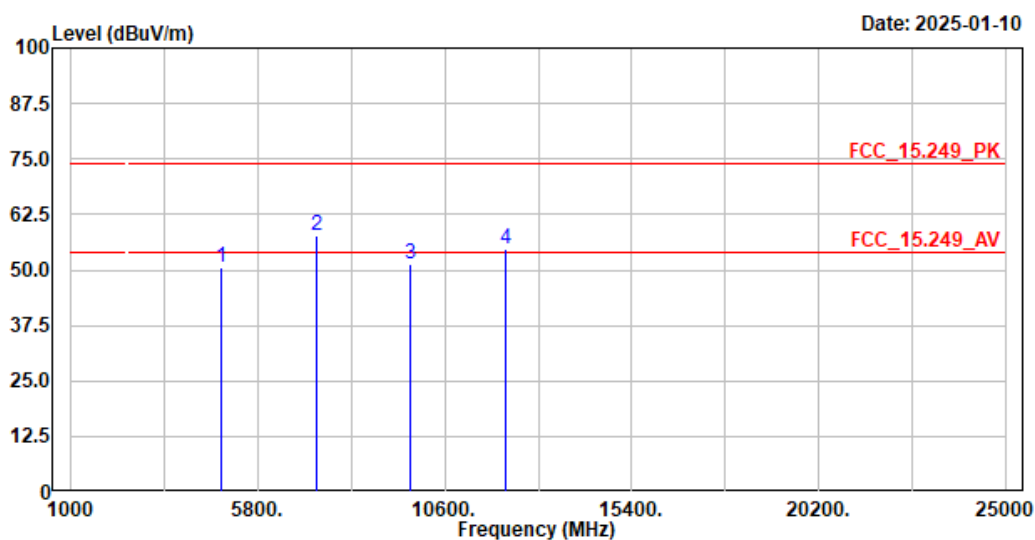

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4866.000  | 50.67  | 74.00         | -23.33        | 65.01         | -14.34 | Peak   |
| 2   | 7299.000  | 57.63  | 74.00         | -16.37        | 64.21         | -6.58  | Peak   |
| 3   | 9732.000  | 51.30  | 74.00         | -22.70        | 55.98         | -4.68  | Peak   |
| 4   | 12165.000 | 54.59  | 74.00         | -19.41        | 55.56         | -0.97  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 4866               | 50.67                        | -37.589                   | 13.081                        | -40.919        | 54.000            |
| 7299               | 57.63                        | -37.589                   | 20.041                        | -33.959        | 54.000            |
| 9732               | 51.30                        | -37.589                   | 13.711                        | -40.289        | 54.000            |
| 12165              | 54.59                        | -37.589                   | 17.001                        | -37.999        | 55.000            |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_2473MHz  
 Test BY :Bob

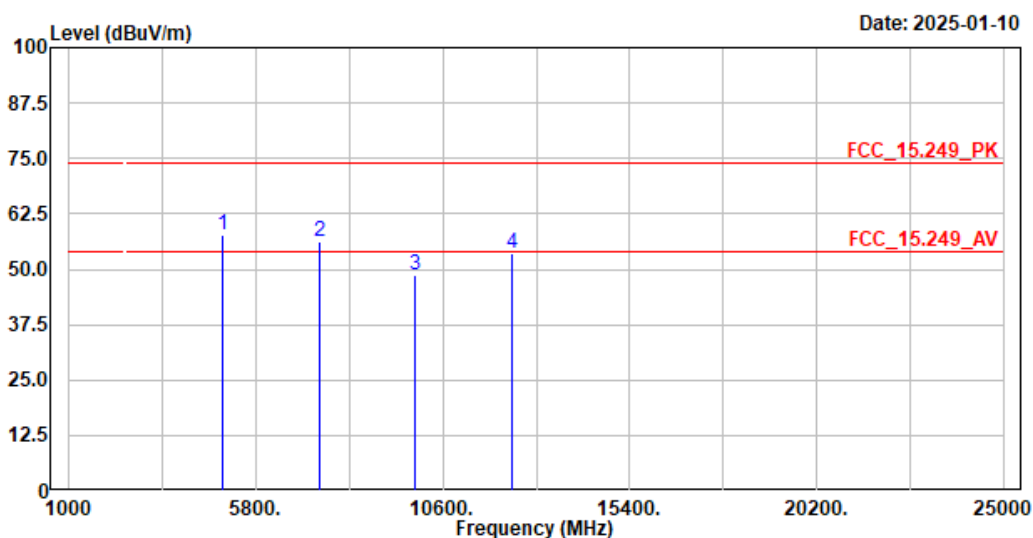

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4946.000  | 57.83  | 74.00  | -16.17 | 71.77 | -13.94 | Peak   |
| 2   | 7419.000  | 56.24  | 74.00  | -17.76 | 62.85 | -6.61  | Peak   |
| 3   | 9892.000  | 48.82  | 74.00  | -25.18 | 53.79 | -4.97  | Peak   |
| 4   | 12365.000 | 53.49  | 74.00  | -20.51 | 53.85 | -0.36  | Peak   |


**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**Horizontal-Average Detector:**

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 4946               | 57.83                        | -37.589                   | 20.241                        | -33.759        | 54.000            |
| 7419               | 56.24                        | -37.589                   | 18.651                        | -35.349        | 54.000            |
| 9892               | 48.82                        | -37.589                   | 11.231                        | -42.769        | 54.000            |
| 12365              | 53.49                        | -37.589                   | 15.901                        | -39.099        | 55.000            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_2473MHz  
 Test BY :Bob

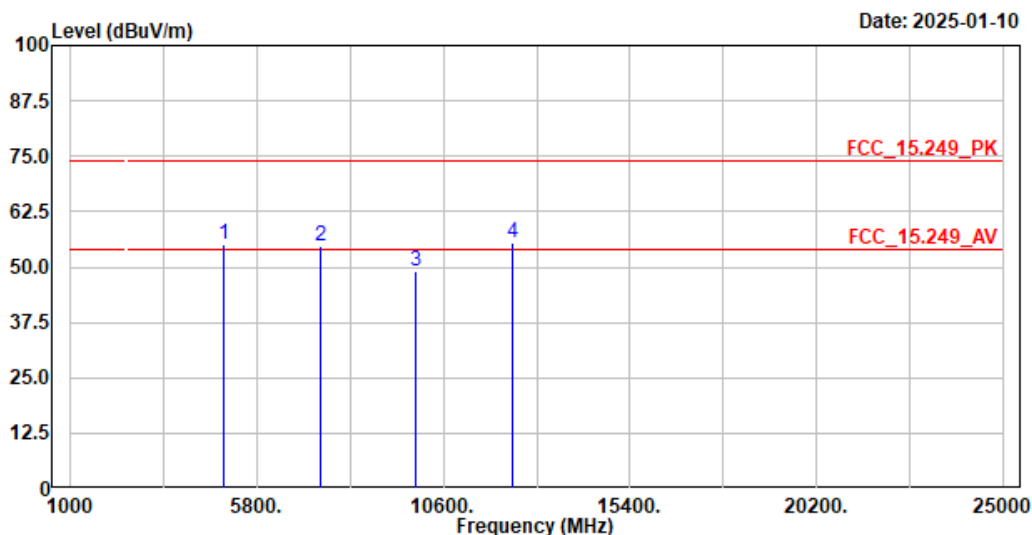

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 4946.000  | 55.08  | 74.00  | -18.92 | 69.02 | -13.94 | Peak   |
| 2   | 7419.000  | 54.53  | 74.00  | -19.47 | 61.14 | -6.61  | Peak   |
| 3   | 9892.000  | 48.92  | 74.00  | -25.08 | 53.89 | -4.97  | Peak   |
| 4   | 12365.000 | 55.61  | 74.00  | -18.39 | 55.97 | -0.36  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency (MHz) | Peak Measurement (dBμV/m) | Duty Cycle Factor (dB) | Measurement Level (dBμV/m) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 4946            | 55.08                     | -37.589                | 17.491                     | -36.509     | 54.000         |
| 7419            | 54.53                     | -37.589                | 16.941                     | -37.059     | 54.000         |
| 9892            | 48.92                     | -37.589                | 11.331                     | -42.669     | 54.000         |
| 12365           | 55.61                     | -37.589                | 18.021                     | -36.979     | 55.000         |


Site :HY-CB03  
Condition :3m ,Horizontal  
Mode :TX\_2433MHz  
Test BY :Ashton

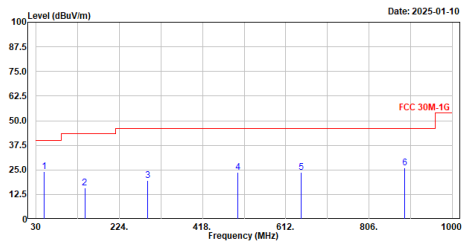

| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 48.430    | 24.13  | 40.00 | -15.87 | 47.47 | -23.34 | QP     |
| 2   | 143.490   | 15.66  | 43.50 | -27.84 | 39.86 | -24.20 | QP     |
| 3   | 289.960   | 19.48  | 46.00 | -26.52 | 42.84 | -23.36 | QP     |
| 4   | 499.480   | 23.65  | 46.00 | -22.35 | 41.67 | -18.02 | QP     |
| 5   | 647.890   | 23.94  | 46.00 | -22.06 | 38.86 | -14.92 | QP     |
| 6   | 889.420   | 26.16  | 46.00 | -19.84 | 37.89 | -11.73 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03  
Condition :3m ,Vertical  
Mode :TX\_2433MHz  
Test BY :Ashton

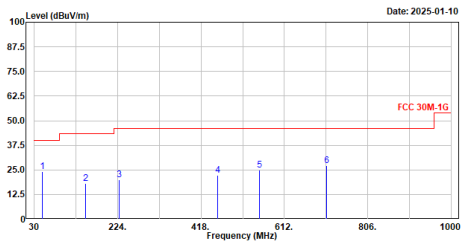

| No. | Frequency | Level  | Limit | Over   | Read  | Factor | Remark |
|-----|-----------|--------|-------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line  | Limit  | Level | dB/m   |        |
| 1   | 48.430    | 24.04  | 40.00 | -15.96 | 47.38 | -23.34 | QP     |
| 2   | 150.280   | 18.24  | 43.50 | -25.26 | 42.17 | -23.93 | QP     |
| 3   | 227.880   | 20.10  | 46.00 | -25.90 | 46.12 | -26.02 | QP     |
| 4   | 456.800   | 22.18  | 46.00 | -23.82 | 40.86 | -18.68 | QP     |
| 5   | 553.800   | 24.90  | 46.00 | -21.10 | 41.95 | -17.05 | QP     |
| 6   | 709.970   | 27.11  | 46.00 | -18.89 | 41.03 | -13.92 | QP     |

Note:  
1. Level = Read Level + Factor  
2. Factor = Antenna Factor + Cable Loss - Preamp Factor  
3. Over Limit = Level - Limit Line  
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_2403MHz  
 Test BY :Bob

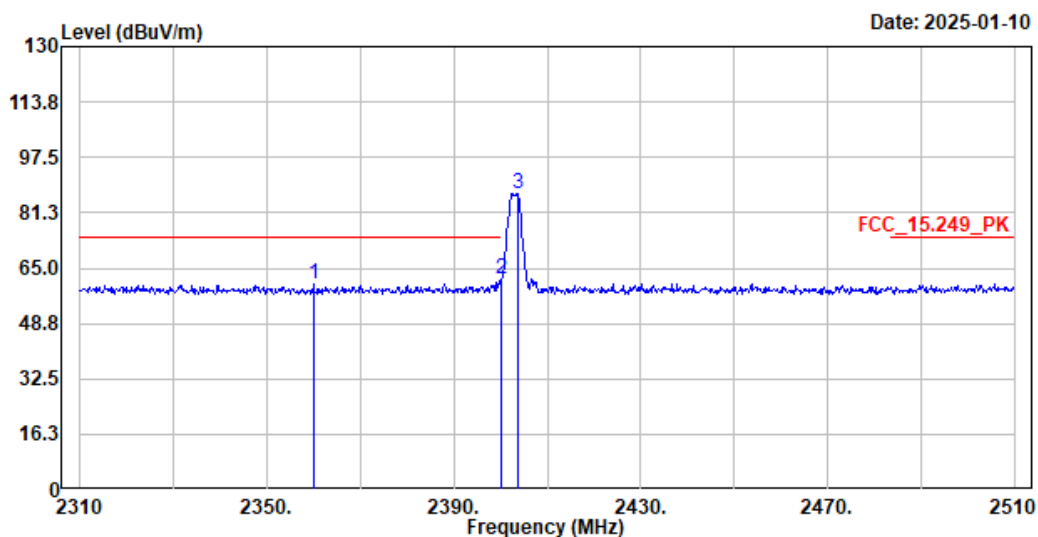

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     |           |        | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 2360.000  | 60.32  | 74.00  | -13.68 | 29.67 | 30.65  | Peak   |
| 2   | 2400.000  | 61.94  | 74.00  | -12.06 | 31.27 | 30.67  | Peak   |
| 3   | 2403.600  | 86.76  | -----  | -----  | 56.05 | 30.71  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2360               | 60.32                        | -37.589                   | 22.731                        | -31.269        | 54.000            |
| 2400               | 61.94                        | -37.589                   | 24.351                        | -29.649        | 54.000            |
| 2403.6             | 86.76                        | -37.589                   | 49.171                        | --             | --                |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_2403MHz  
 Test BY :Bob

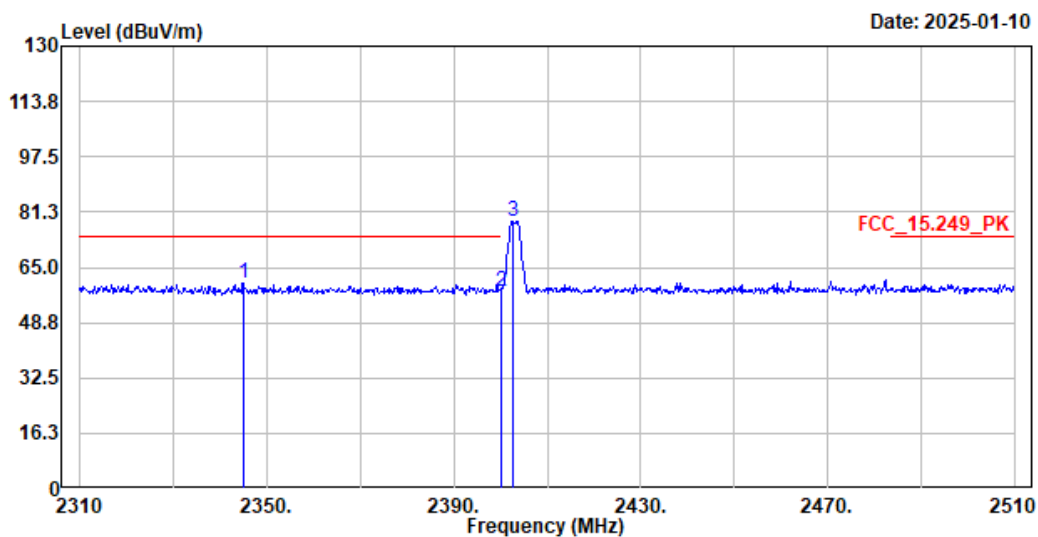

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     |           |        | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 2345.000  | 60.34  | 74.00  | -13.66 | 29.70 | 30.64  | Peak   |
| 2   | 2400.000  | 57.93  | 74.00  | -16.07 | 27.26 | 30.67  | Peak   |
| 3   | 2402.600  | 78.65  | -----  | -----  | 47.95 | 30.70  | Peak   |

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2345               | 60.34                        | -37.589                   | 22.751                        | -31.249        | 54.000            |
| 2400               | 57.93                        | -37.589                   | 20.341                        | -33.659        | 54.000            |
| 2402.6             | 78.65                        | -37.589                   | 41.061                        | --             | --                |



Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_2473MHz  
 Test BY :Bob

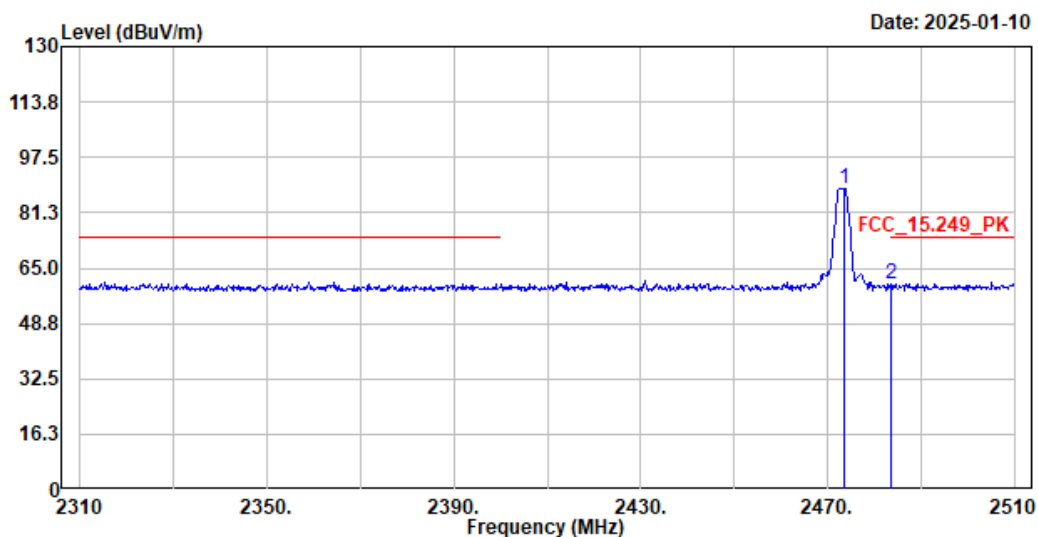

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     |           |        | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 2473.600  | 88.43  | -----  | -----  | 57.81 | 30.62  | Peak   |
| 2   | 2483.600  | 60.53  | 74.00  | -13.47 | 29.86 | 30.67  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2473.6             | 88.43                        | -37.589                   | 50.841                        | --             | --                |
| 2483.6             | 60.53                        | -37.589                   | 22.941                        | -31.059        | 54.000            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_2473MHz  
 Test BY :Bob

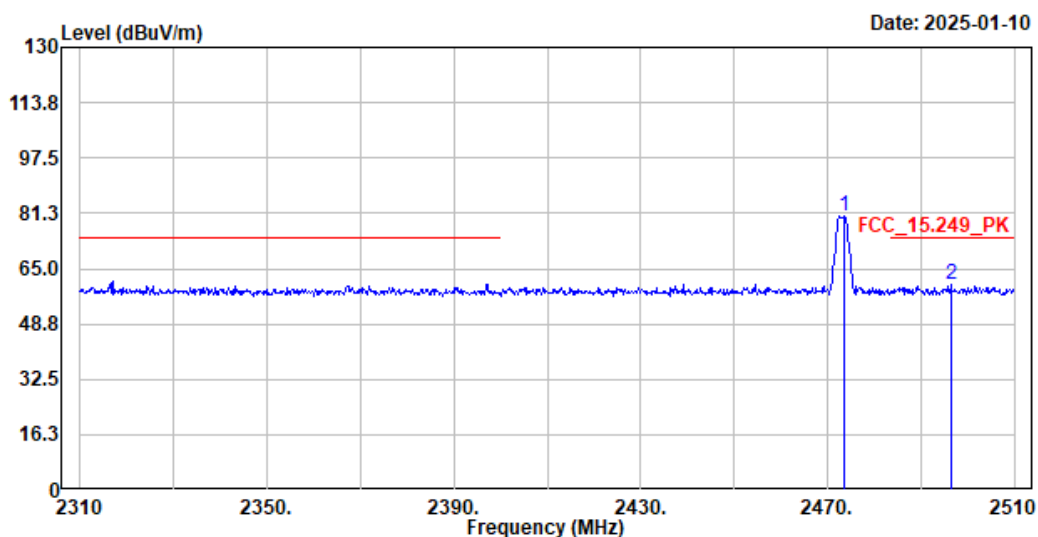

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2473.600  | 80.32  | -----         | -----         | 49.70         | 30.62  | Peak   |
| 2   | 2496.400  | 60.45  | 74.00         | -13.55        | 29.71         | 30.74  | Peak   |

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 2473.6             | 80.32                        | -37.589                   | 42.731                        | --             | --                |
| 2496.4             | 60.45                        | -37.589                   | 22.861                        | -31.139        | 54.000            |