




Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: LED Controller

Test Model: SP601E

Environmental Conditions

Temperature:	23.5℃
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	 Bill Zhu
Supervised by:	 Li Huan



A.1 DTS Bandwidth


Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.712	2401.640	2402.352	0.5	PASS
		2440	0.716	2439.636	2440.352	0.5	PASS
		2480	0.712	2479.636	2480.348	0.5	PASS




Test Graphs


BLE_1M_Ant1_2402

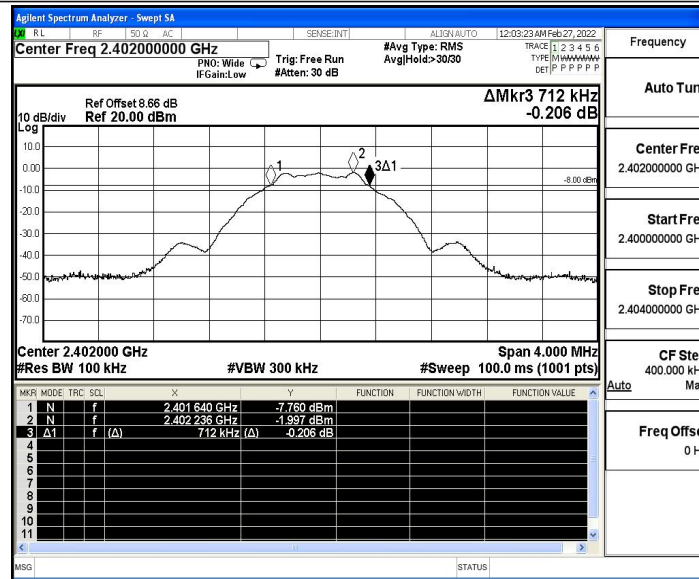

BLE_1M_Ant1_2440

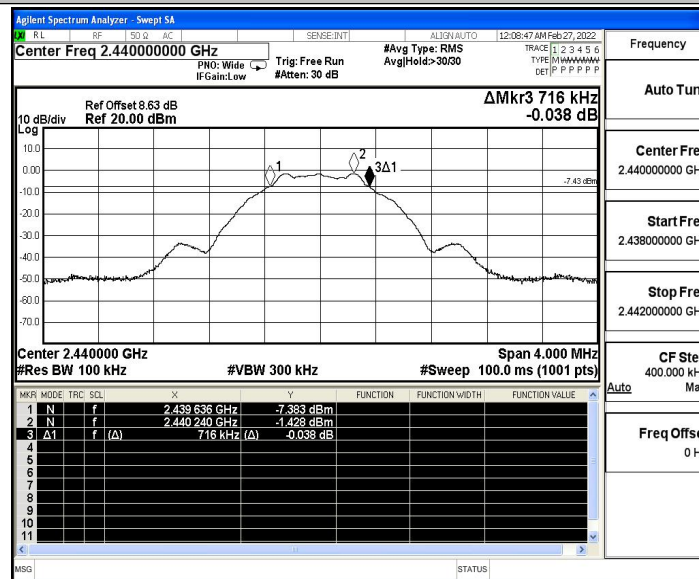

BLE_1M_Ant1_2480

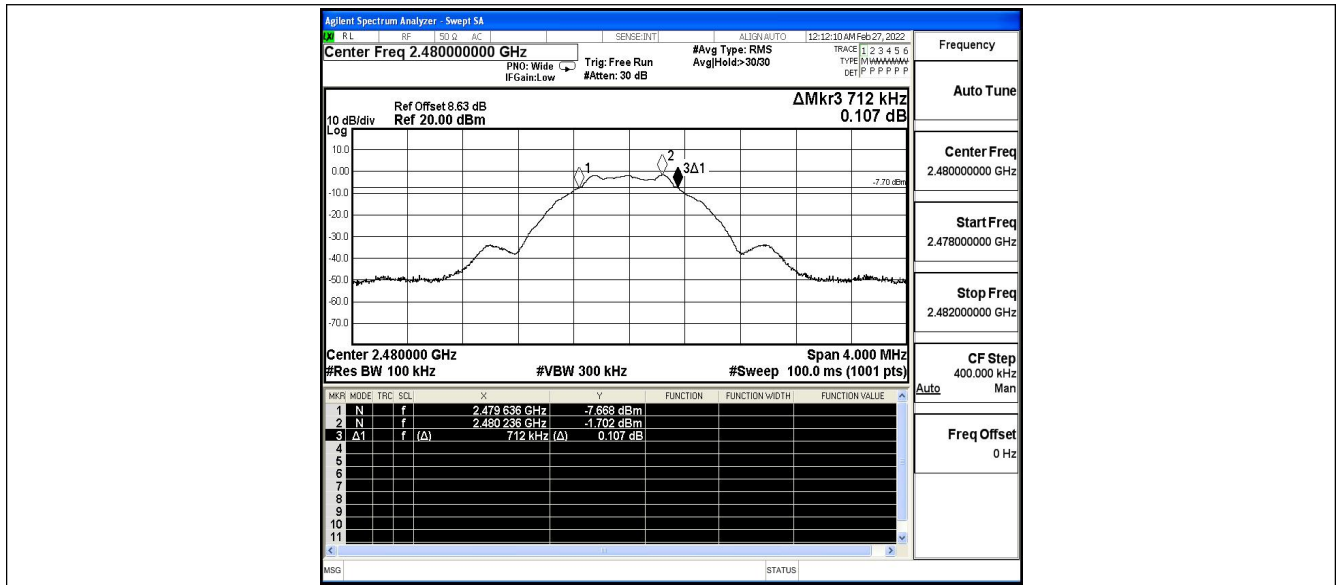



A.2 Maximum peak conducted output power


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-1.04	≤30	PASS
		2440	-0.48	≤30	PASS
		2480	-0.73	≤30	PASS




Test Graphs


BLE_1M_Ant1_2402

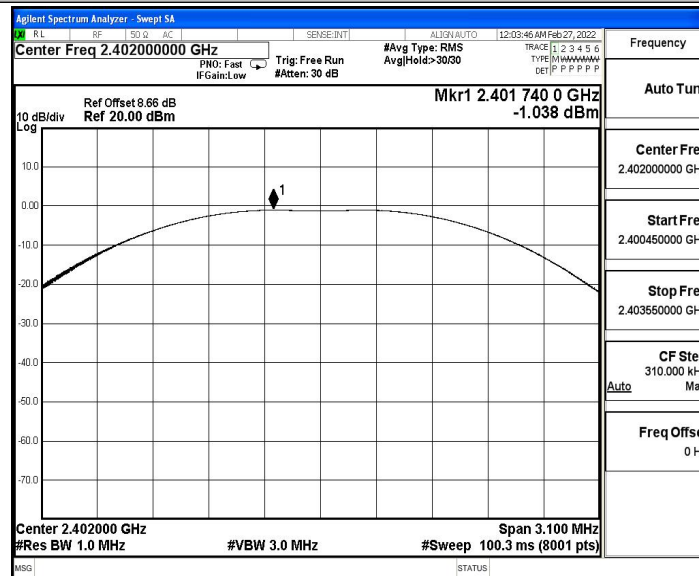

BLE_1M_Ant1_2440

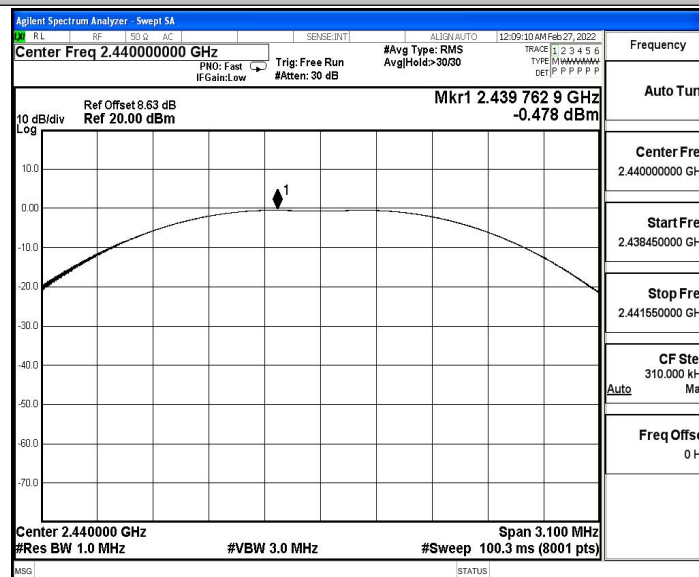

BLE_1M_Ant1_2480

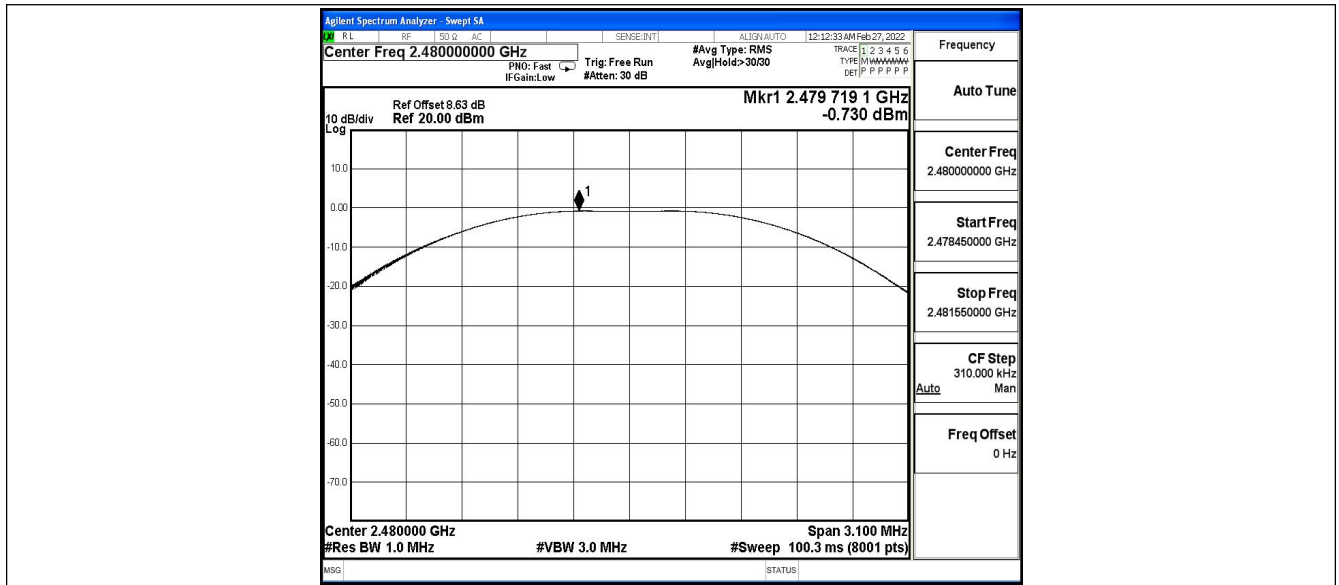



A.3 Maximum power spectral density


Test Result

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-16.12	≤8.00	PASS
		2440	-15.59	≤8.00	PASS
		2480	-15.83	≤8.00	PASS




Test Graphs


BLE_1M_Ant1_2402

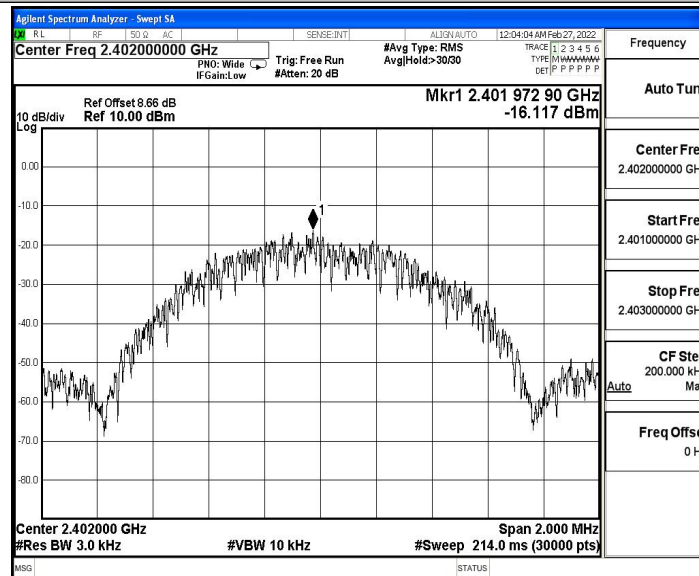

BLE_1M_Ant1_2440

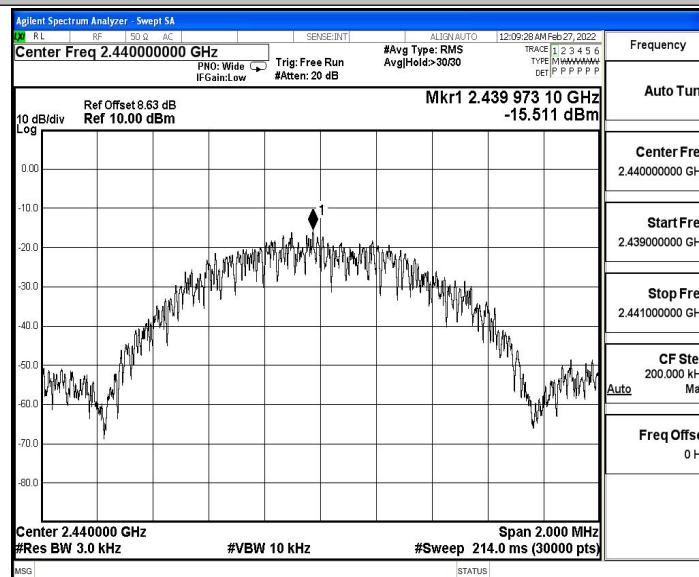

BLE_1M_Ant1_2480

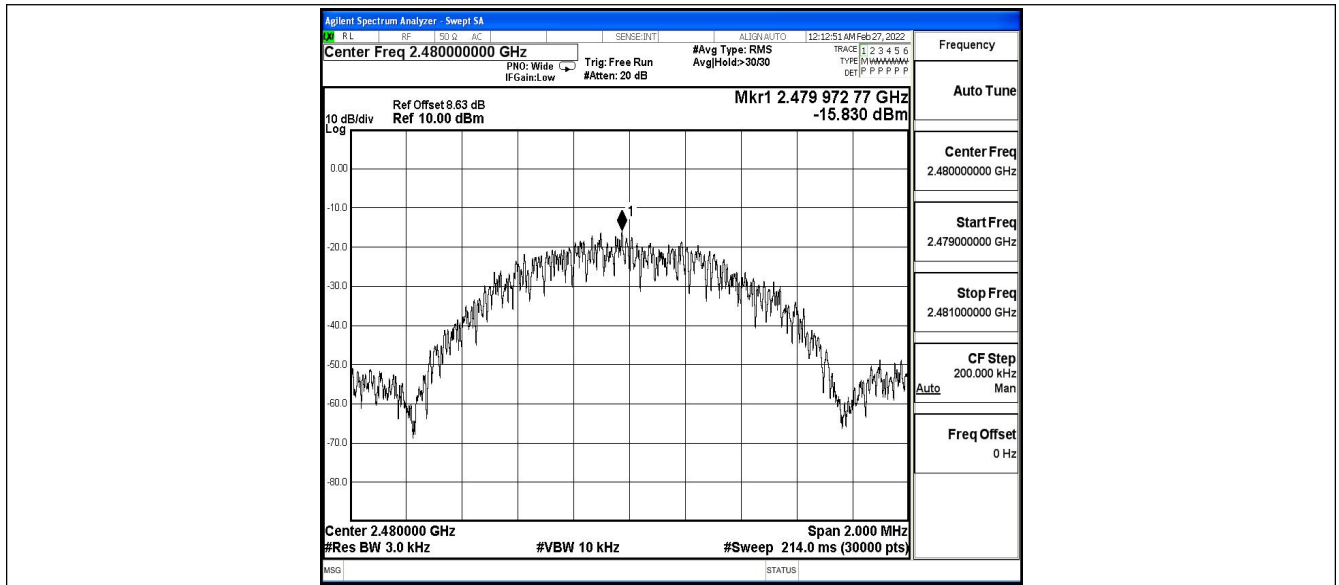



A.4 Band edge measurements


Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-1.73	-48.9	≤ -21.73	PASS
		High	2480	-1.43	-47.41	≤ -21.43	PASS




Test Graphs

BLE_1M_Ant1_Low_2402

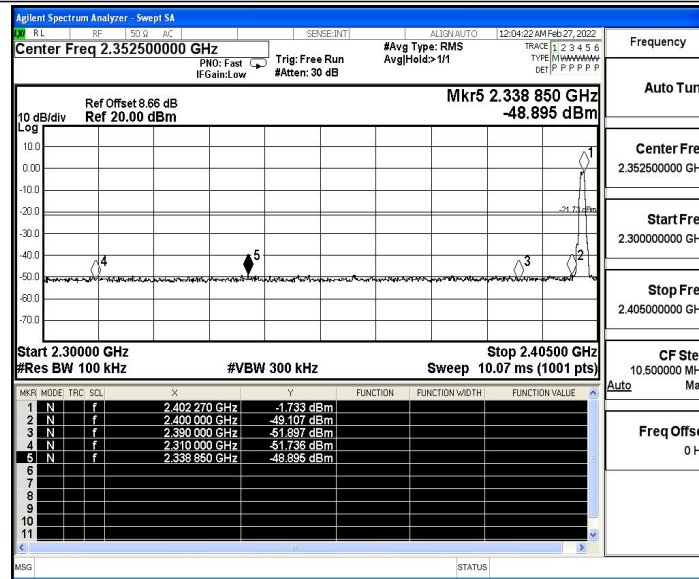

BLE_1M_Ant1_High_2480

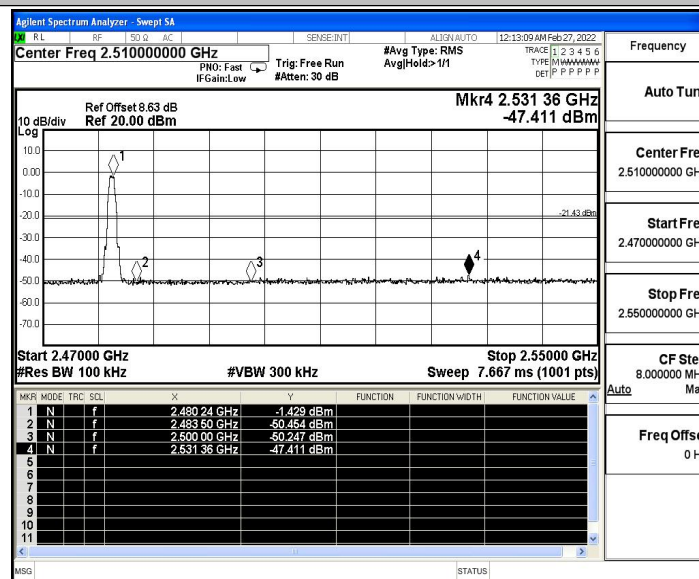



A.5 Conducted Spurious Emission


Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	-2.00	-2.00	---	PASS
			30~1000	-2.00	-60.02	≤ -22	PASS
			1000~26500	-2.00	-46.2	≤ -22	PASS
		2440	Reference	-1.41	-1.41	---	PASS
			30~1000	-1.41	-58.73	≤ -21.41	PASS
			1000~26500	-1.41	-46.57	≤ -21.41	PASS
		2480	Reference	-1.72	-1.72	---	PASS
			30~1000	-1.72	-59.81	≤ -21.72	PASS
			1000~26500	-1.72	-45.89	≤ -21.72	PASS




Test Graphs


BLE_1M_Ant1_2402_0~Reference

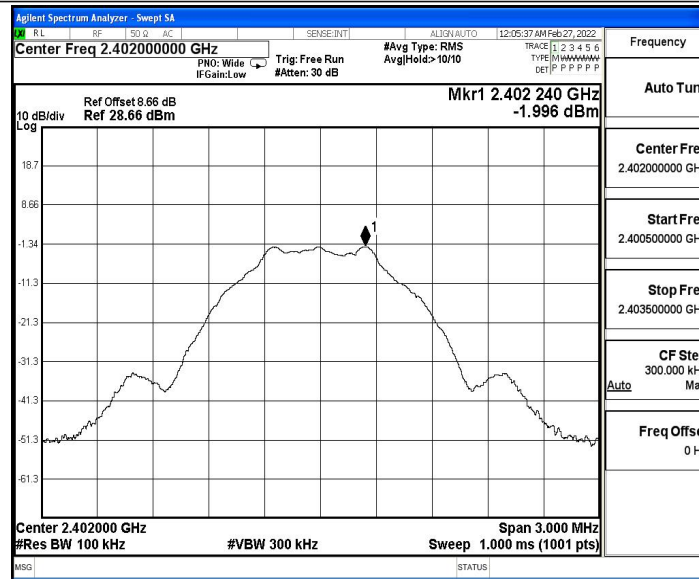


BLE_1M_Ant1_2402_30~1000

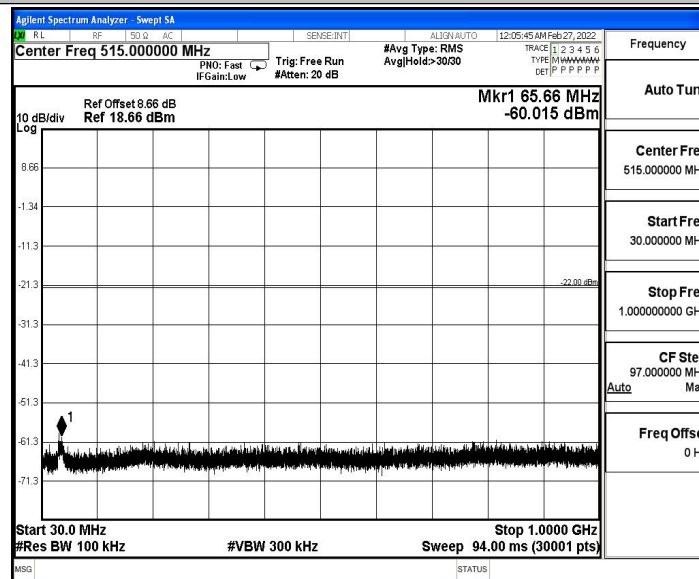


BLE_1M_Ant1_2402_1000~26500

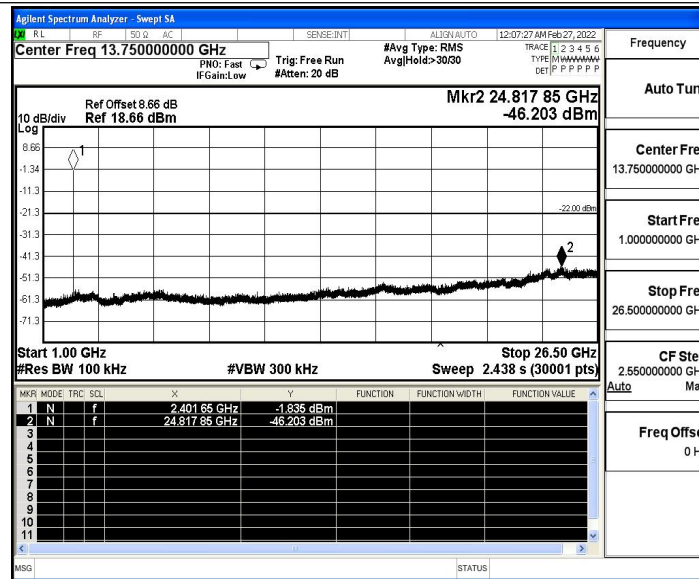

BLE_1M_Ant1_2440_0~Reference

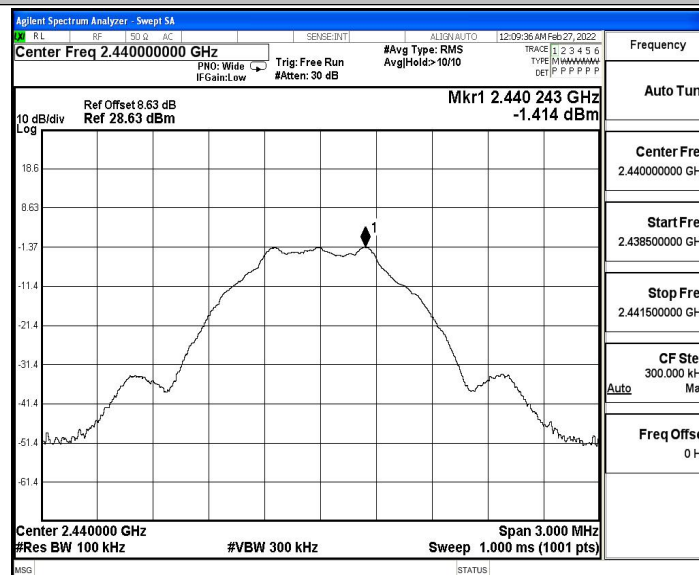


BLE_1M_Ant1_2440_30~1000

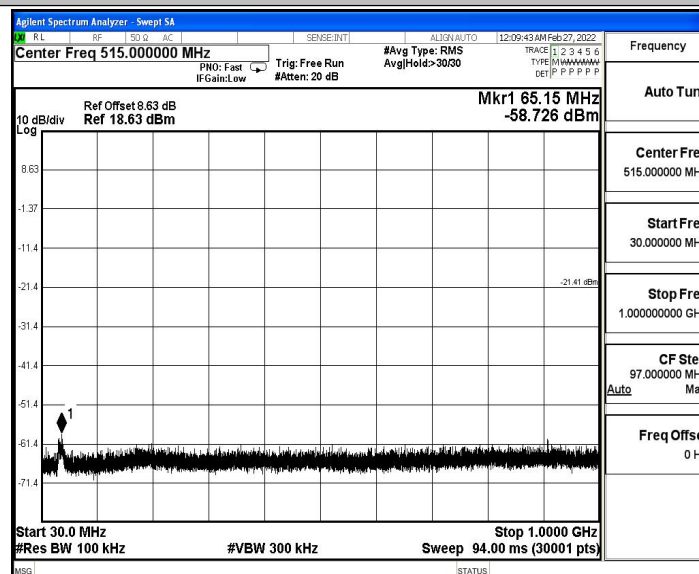





BLE_1M_Ant1_2440_1000~26500

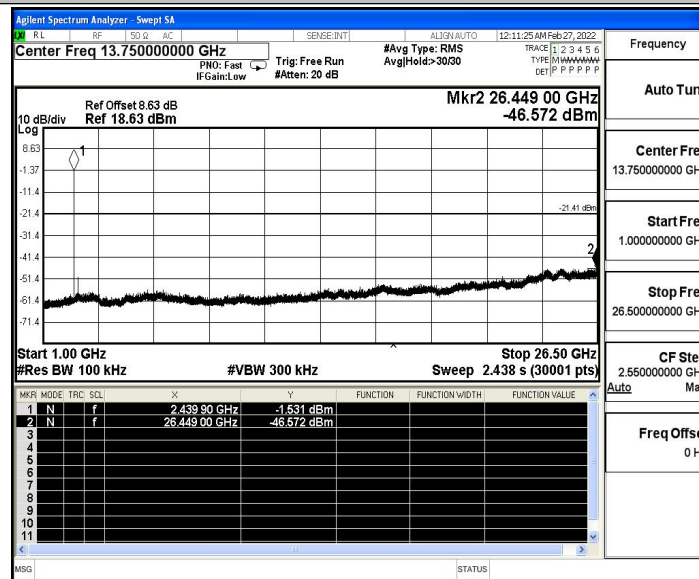


BLE_1M_Ant1_2480_0~Reference

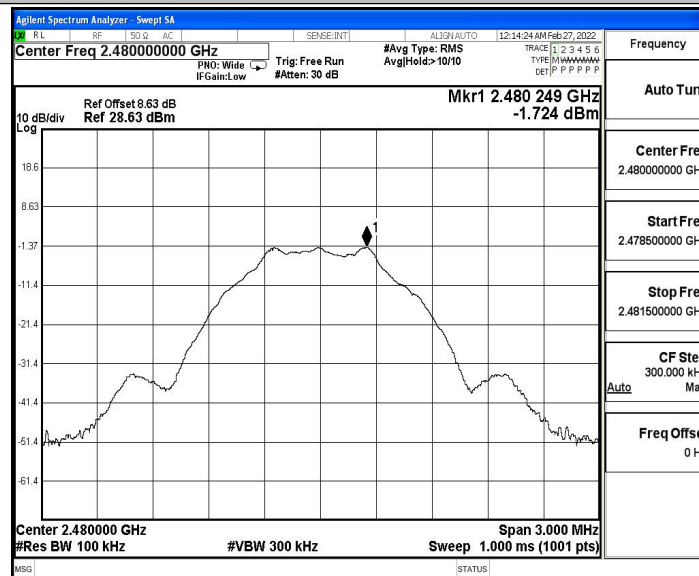

BLE_1M_Ant1_2480_30~1000

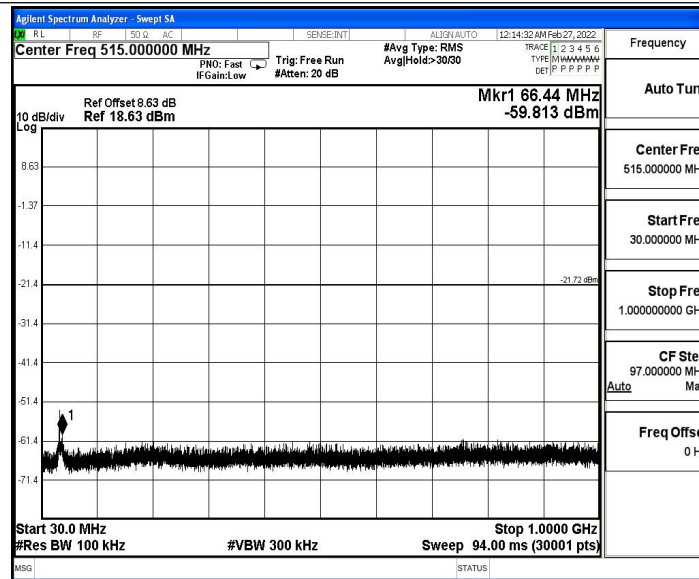

BLE_1M_Ant1_2480_1000~26500

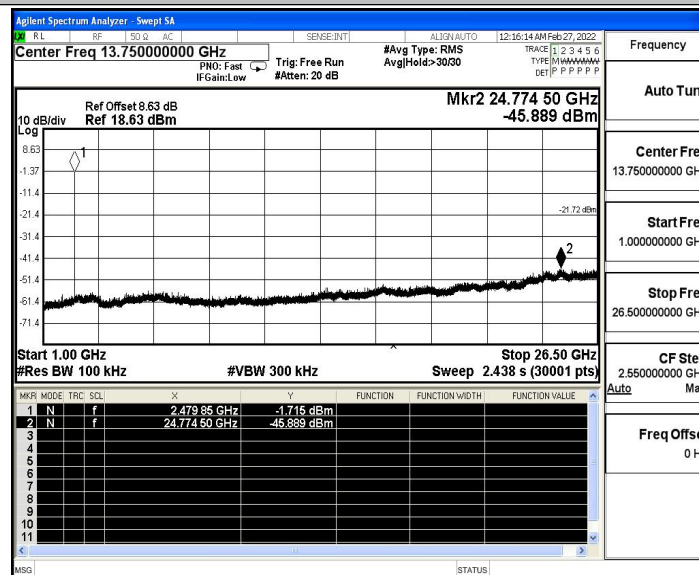



A.6 Duty Cycle


Test Result

TestMode	Antenna	Channel	ON Time [ms]	Period [ms]	X	DC [%]	xFactor	1/T[kHz]
BLE_1M	Ant1	2402	0.39	0.63	0.6190	61.90	2.08	2.63
		2440	0.38	0.62	0.6129	61.29	2.13	2.63
		2480	0.39	0.63	0.6190	61.90	2.08	2.63




Test Graphs


BLE_1M_Ant1_2402

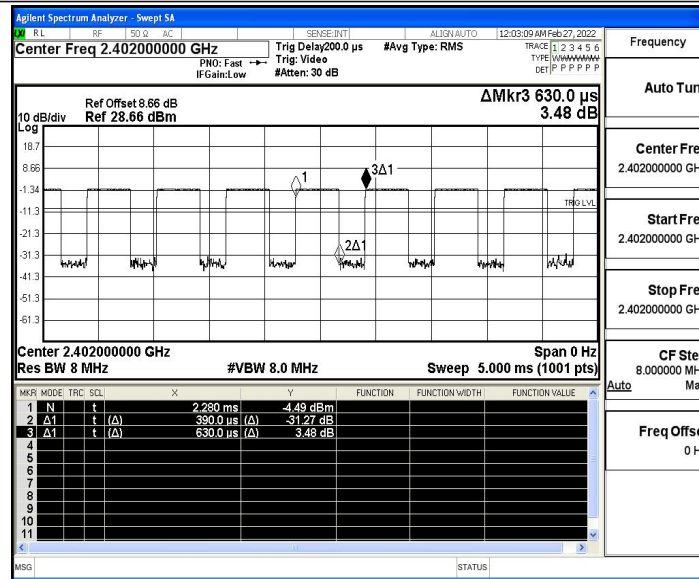

BLE_1M_Ant1_2440

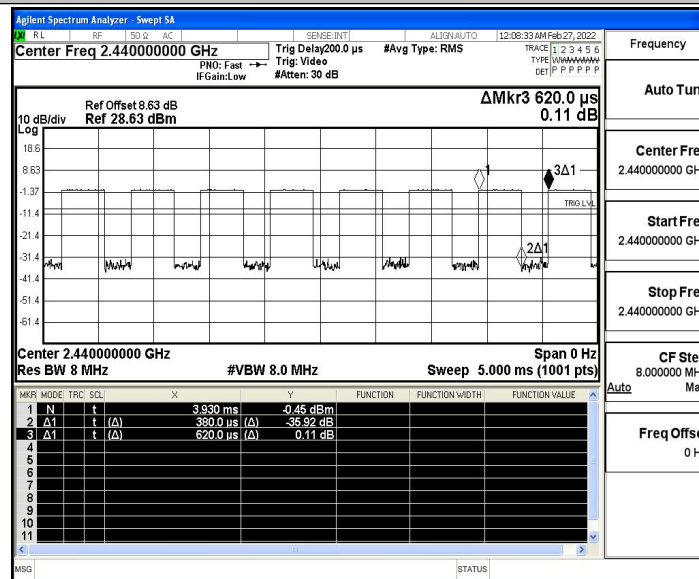

BLE_1M_Ant1_2480

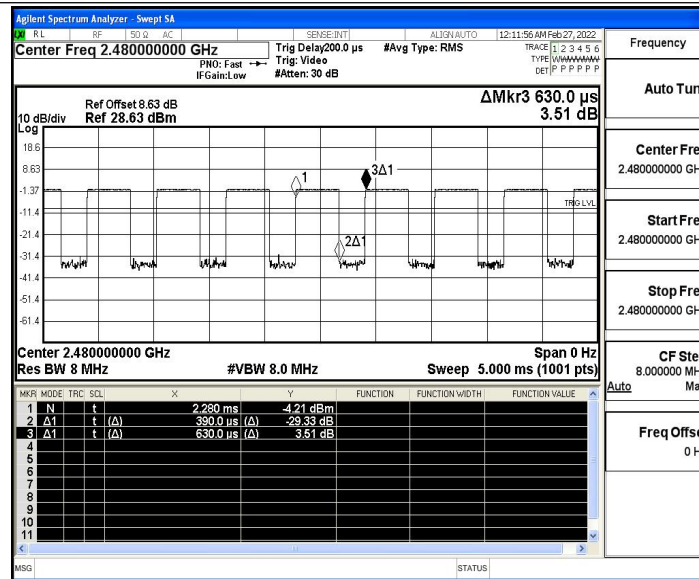



A.7 Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-47.37	≤-41.20	47.83	≤54	PASS
				AV	2386.940	-46.77	≤-41.20	48.43	≤54	PASS
				AV	2390.000	-47.08	≤-41.20	48.12	≤54	PASS
				Peak	2310.000	-38.46	≤-21.20	56.74	≤74	PASS
				Peak	2376.860	-36.55	≤-21.20	58.65	≤74	PASS
				Peak	2390.000	-38.12	≤-21.20	57.08	≤74	PASS
		High	2480	AV	2483.500	-46.76	≤-41.20	48.44	≤54	PASS
				AV	2494.720	-46.4	≤-41.20	48.80	≤54	PASS
				AV	2500.000	-46.37	≤-41.20	48.83	≤54	PASS
				Peak	2483.500	-38.17	≤-21.20	57.03	≤74	PASS
				Peak	2492.400	-36.33	≤-21.20	58.87	≤74	PASS
				Peak	2500.000	-37.36	≤-21.20	57.84	≤74	PASS


Note:

1. The Antenna Gain is compensated in the graph.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.




Test Graphs


BLE_1M_Ant1_Low_2402_AV

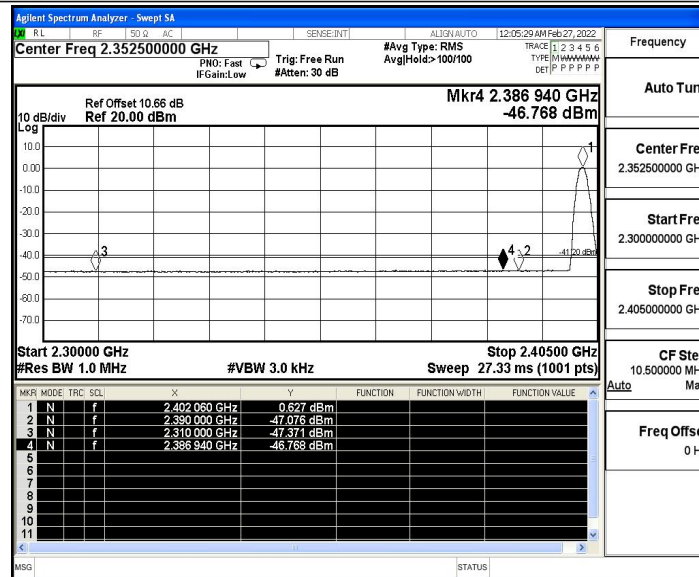

BLE_1M_Ant1_Low_2402_Peak

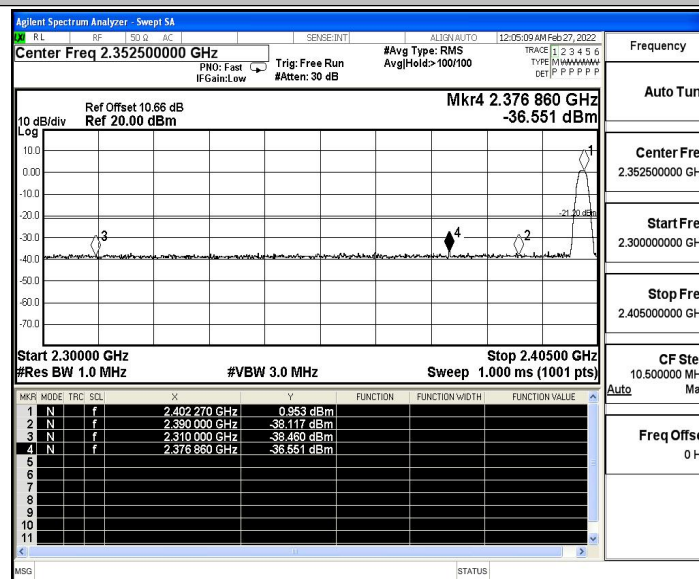

BLE_1M_Ant1_High_2480_AV

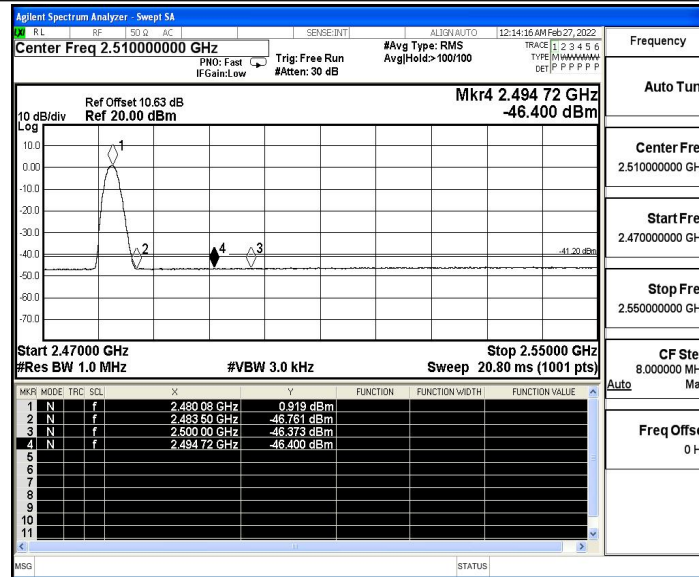

BLE_1M_Ant1_High_2480_Peak

