

# TEST REPORT

Report No.: BCTC2305121507E

---

Applicant: Shenzhen Nito Power Source Technology Co., Ltd.

---

Product Name: Dog Training Collar

---

Model/Type  
reference: FN-T01

---

Tested Date: 2023-06-01 to 2023-06-15

---

Issued Date: 2023-06-15

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID:2BA8XFN-T01

Product Name: Dog Training Collar  
Trademark: N/A  
Model/Type reference: FN-T01  
Prepared For: Shenzhen Nito Power Source Technology Co., Ltd.  
Address: 201, No. 8 Building, No. 49 WuheNan Rd., Jinfanghua Electricity industrial Park  
Bantian St., Longgang District, Shenzhen, China  
Manufacturer: Shenzhen Nito Power Source Technology Co., Ltd.  
Address: 201, No. 8 Building, No. 49 WuheNan Rd., Jinfanghua Electricity industrial Park  
Bantian St., Longgang District, Shenzhen, China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road,  
Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2023-06-01  
Sample tested Date: 2023-06-01 to 2023-06-15  
Issue Date: 2023-06-15  
Report No.: BCTC2305121507E  
Test Standards: FCC Part15.231  
ANSI C63.10-2013  
Test Results: PASS

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

Test Report Declaration	Page
1. Version .....	4
2. Test Summary .....	5
3. Measurement Uncertainty .....	6
4. Product Information And Test Setup .....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment .....	8
4.4 Channel List .....	8
4.5 Test Mode .....	8
5. Test Facility And Test Instrument Used .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
6. Conducted Emissions .....	11
6.1 Block Diagram Of Test Setup .....	11
6.2 Limit .....	11
6.3 Test Procedure .....	11
6.4 EUT Operating Conditions .....	11
6.5 Test Result .....	12
7. Radiated Emissions .....	14
7.1 Block Diagram Of Test Setup .....	14
7.2 Limit .....	15
7.3 Test Procedure .....	16
7.4 EUT Operating Conditions .....	18
7.5 Test Result .....	18
8. Bandwidth Test .....	25
8.1 Block Diagram Of Test Setup .....	25
8.2 Limit .....	25
8.3 Test Procedure .....	25
8.4 EUT Operating Conditions .....	25
8.5 Test Result .....	25
9. Calculation Of Average Factor .....	27
10. Dwell Time .....	29
10.1 Block Diagram Of Test Setup .....	29
10.2 Limit .....	29
10.3 Test Procedure .....	29
10.4 Test Result .....	30
11. Antenna Requirement .....	31
11.1 Standard Requirement .....	31
11.2 EUT Antenna .....	31
12. EUT Photographs .....	32
13. EUT Test Setup Photographs .....	33

(Note: N/A Means Not Applicable)

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2305121507E	2023-06-15	Original	Valid

TEST  
TC  
OVER  
檢

## 2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	§15.207	PASS
2	Fundamental & Radiated Spurious Emission Measurement	15.209, 15.231b	PASS
3	Occupy Bandwidth	15.231c	PASS
4	Dwell time	15.231a	PASS
5	Antenna Requirement	15.203	PASS

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission(150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

CO., LTD.

## 4. Product Information And Test Setup


### 4.1 Product Information

Model/Type reference:	FN-T01
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	433.24-433.31MHz
Type of Modulation:	ASK
Number Of Channel	2CH
Antenna installation:	Spring antenna
Antenna Gain:	-4.27 dBi
Ratings:	USB:DC 5V    Battery:DC 3.7V


### 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



### 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Dog Training Collar	N/A	FN-T01	N/A	EUT
E-2	Adapter	N/A	CD122	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.5M	USB cable unshielded

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

### 4.4 Channel List

CH	Frequency (MHz)
1	433.24
2	433.31

### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Final Test Mode	Description
Mode 1	Charging
Mode 2	TX

**Note:**

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test



## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

FCC Designation Number: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
LISN	R&S	ENV216	101375	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 15, 2023	May 14, 2024

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 15, 2023	May 14, 2024
Power Sensor (AV)	Keysight	E9300A	\	May 15, 2023	May 14, 2024
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 15, 2023	May 14, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
Receiver	R&S	ESRP	101154	May 15, 2023	May 14, 2024
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 15, 2023	May 14, 2024
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 29, 2023	May 28, 2024
Loop Antenna(9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	May 31, 2023	May 30, 2024
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 15, 2023	May 14, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 31, 2023	May 30, 2024
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 15, 2023	May 14, 2024
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 31, 2023	May 30, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

TE  
TC  
OV  
檢

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup



### 6.2 Limit

FREQUENCY (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- \*Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

### 6.3 Test Procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

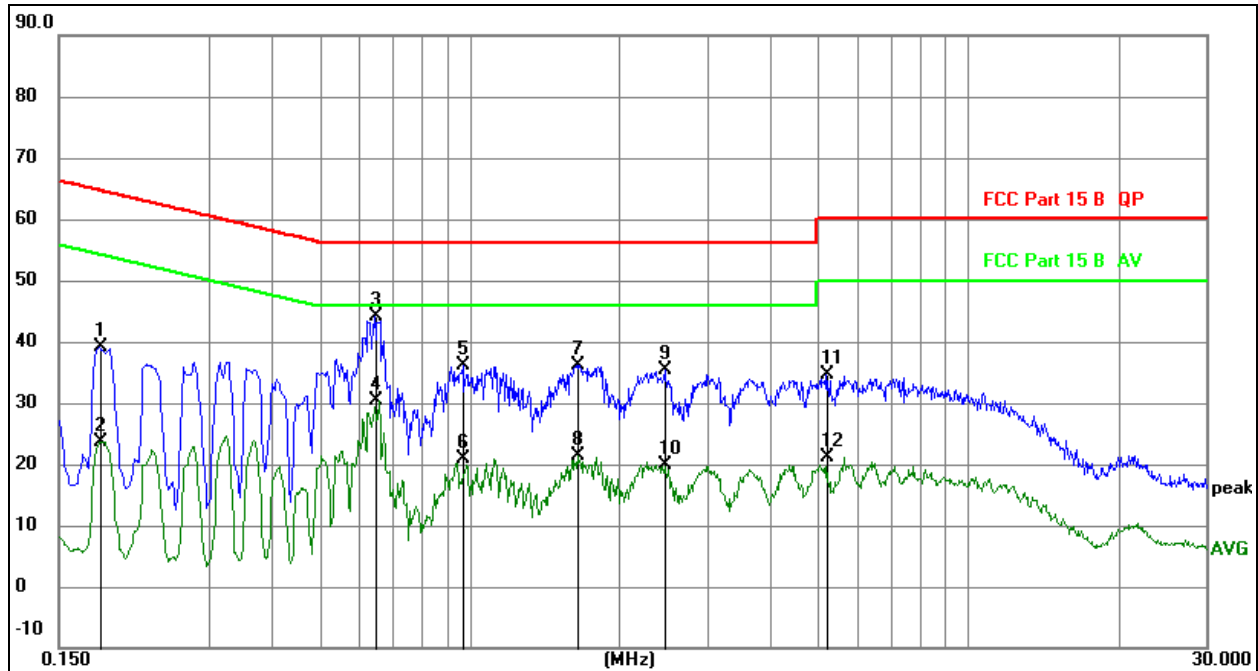


### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over=Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1815	19.37	19.75	39.12	64.42	-25.30	QP
2		0.1815	3.91	19.75	23.66	54.42	-30.76	AVG
3	*	0.6450	24.36	19.73	44.09	56.00	-11.91	QP
4		0.6450	10.67	19.73	30.40	46.00	-15.60	AVG
5		0.9735	16.34	19.76	36.10	56.00	-19.90	QP
6		0.9735	1.04	19.76	20.80	46.00	-25.20	AVG
7		1.6395	16.35	19.84	36.19	56.00	-19.81	QP
8		1.6395	1.52	19.84	21.36	46.00	-24.64	AVG
9		2.4630	15.43	19.93	35.36	56.00	-20.64	QP
10		2.4630	0.01	19.93	19.94	46.00	-26.06	AVG
11		5.1989	14.50	20.13	34.63	60.00	-25.37	QP
12		5.1989	1.07	20.13	21.20	50.00	-28.80	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

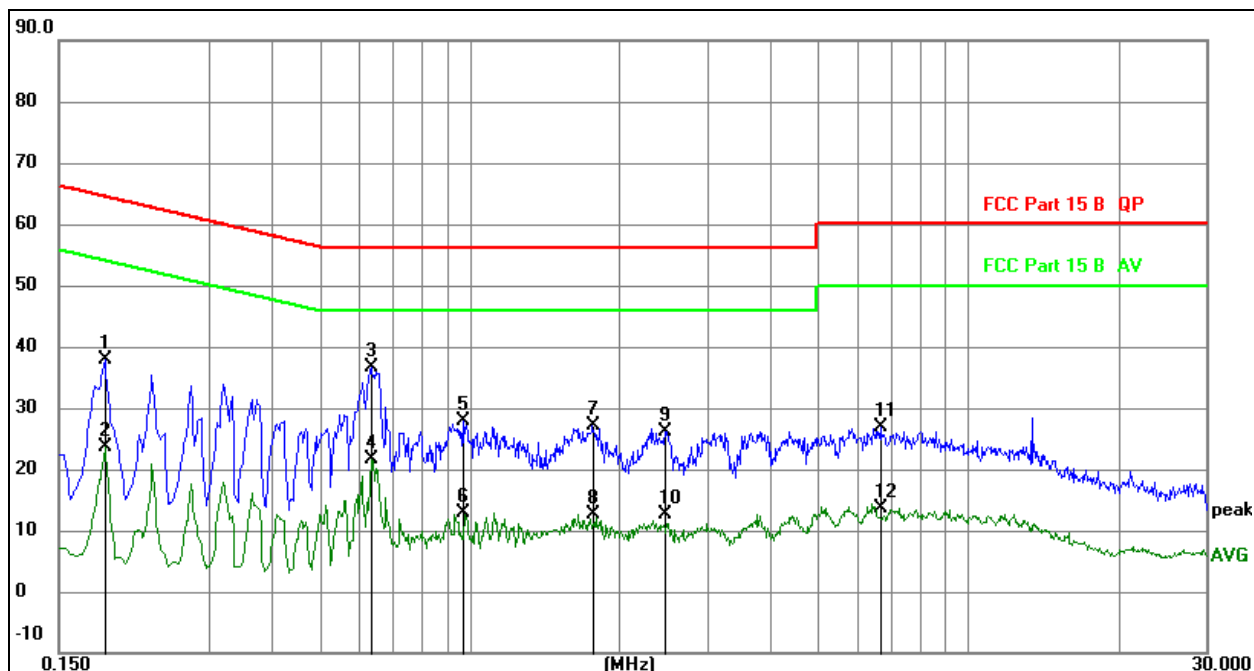

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement=Reading Level+ Correct Factor
4. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dB	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1853	18.04	19.76	37.80	64.24	-26.44	QP
2		0.1853	3.95	19.76	23.71	54.24	-30.53	AVG
3	*	0.6338	16.80	19.73	36.53	56.00	-19.47	QP
4		0.6338	1.88	19.73	21.61	46.00	-24.39	AVG
5		0.9684	8.03	19.76	27.79	56.00	-28.21	QP
6		0.9684	-6.83	19.76	12.93	46.00	-33.07	AVG
7		1.7623	7.21	19.85	27.06	56.00	-28.94	QP
8		1.7623	-7.31	19.85	12.54	46.00	-33.46	AVG
9		2.4736	6.23	19.93	26.16	56.00	-29.84	QP
10		2.4736	-7.19	19.93	12.74	46.00	-33.26	AVG
11		6.6624	6.70	20.17	26.87	60.00	-33.13	QP
12		6.6624	-6.60	20.17	13.57	50.00	-36.43	AVG


## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

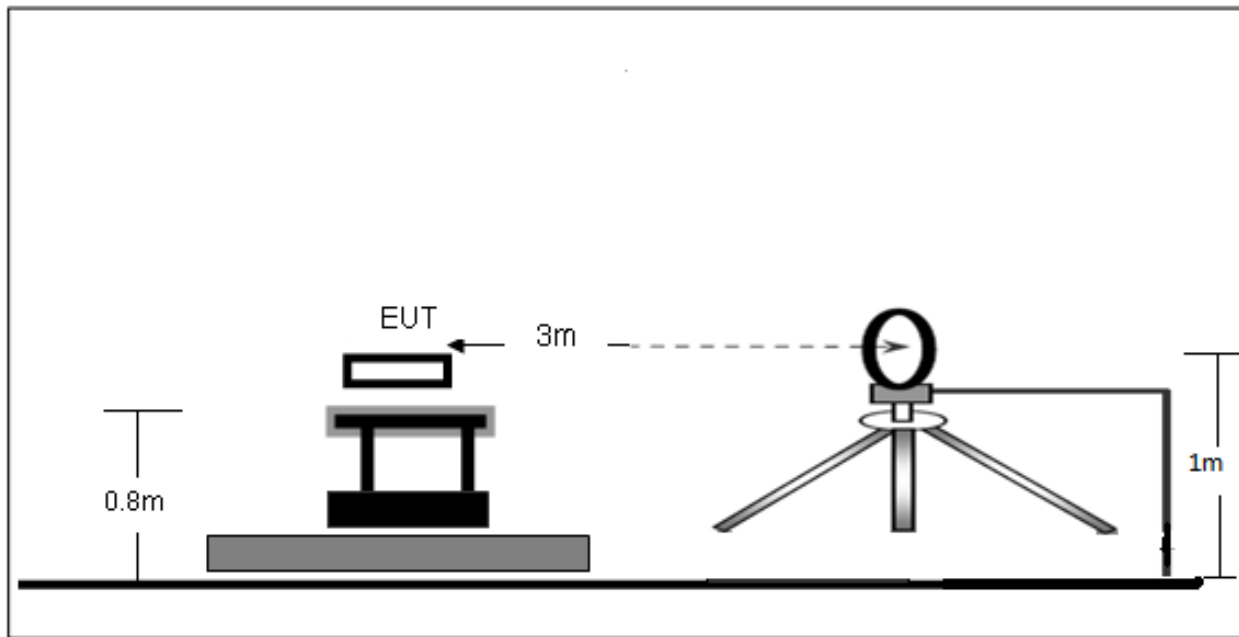

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

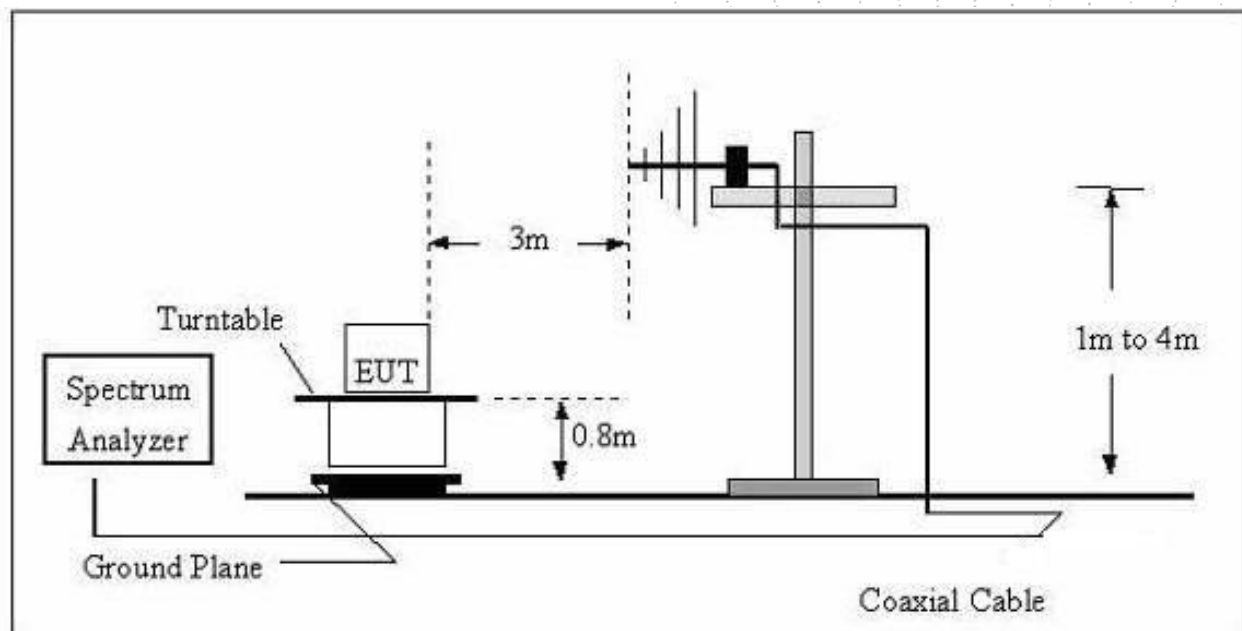

(C) Radiated Emission Test-Up Frequency Above 1GHz

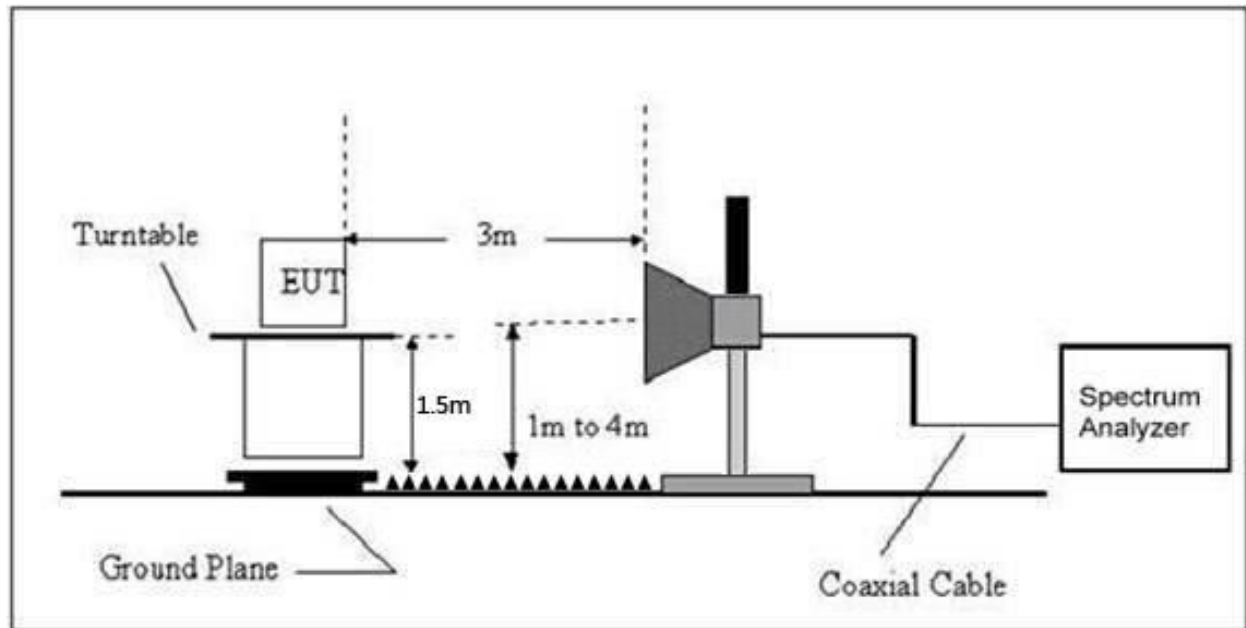

## 7.2 Limit

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

## Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

## Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

The field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750	125 to 375
174-260	3750	375 to 1250
260-470	3750 to 12500	1250
Above 470	12500	

## FREQUENCY RANGE OF RADIATED MEASUREMENT

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

## 7.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP




Spectrum Parameter	Setting
1-6GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre( Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel ,the Highest channel.

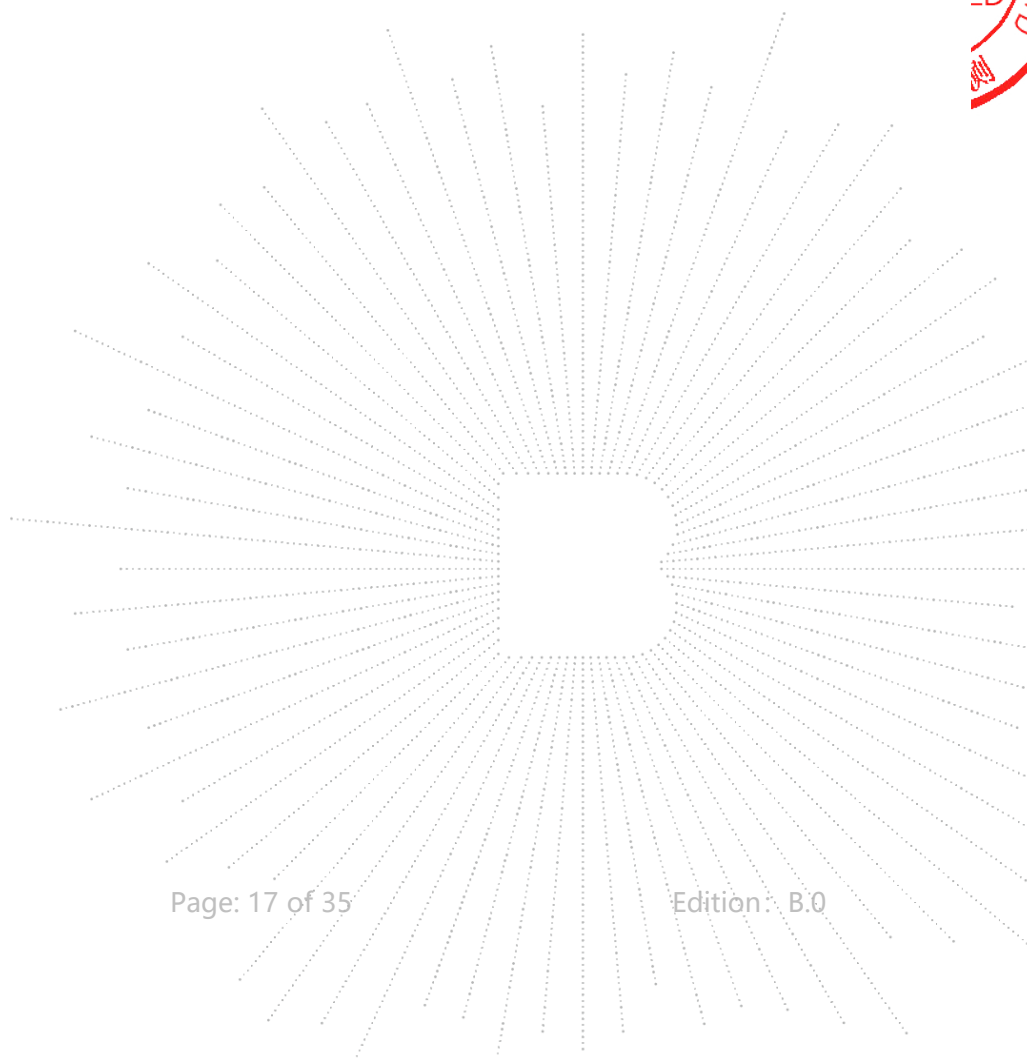

**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the Highest channel.

**Note:**

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage:	DC 3.7V
Test Mode:	Mode 2	Polarization:	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = 40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 2(433.24MHz)	Remark:	N/A

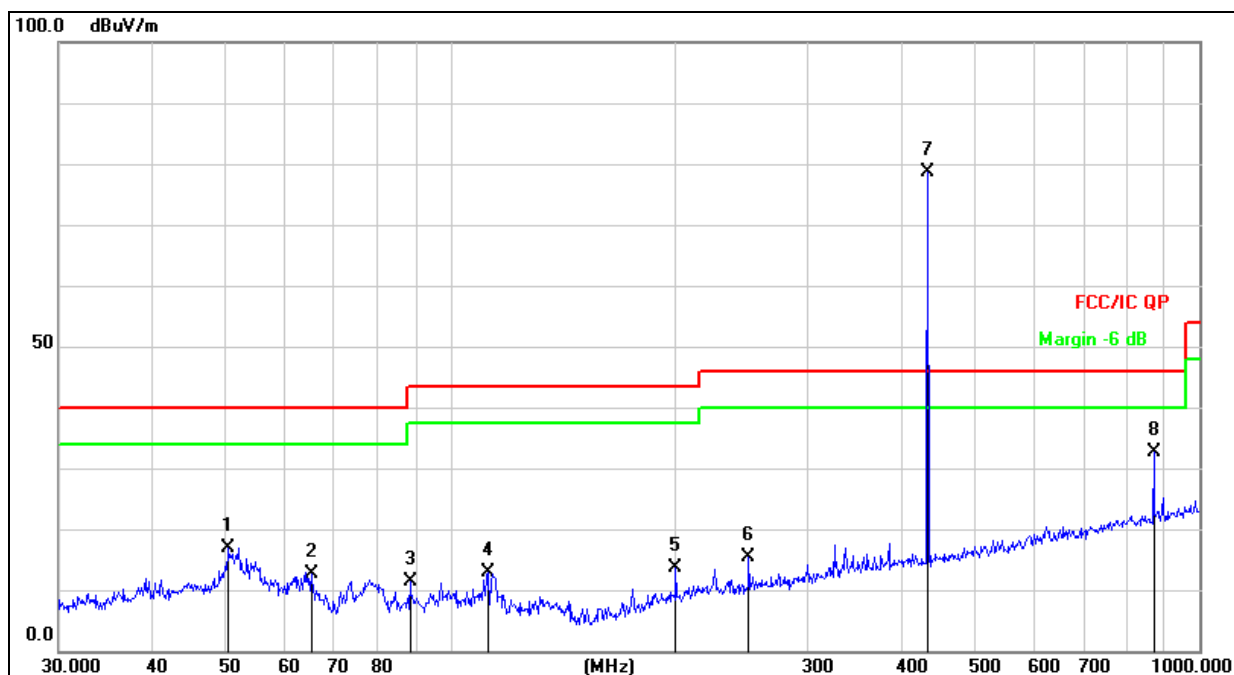

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Measurement=Reading Level+ Correct Factor

3. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.5859	32.65	-15.68	16.97	40.00	-23.03	QP
2		65.3431	31.26	-18.62	12.64	40.00	-27.36	QP
3		88.3421	30.93	-19.62	11.31	43.50	-32.19	QP
4		112.1304	31.32	-18.56	12.76	43.50	-30.74	QP
5		199.9856	31.08	-17.37	13.71	43.50	-29.79	QP
6		250.3011	31.30	-15.82	15.48	46.00	-30.52	QP
7	*	434.0651	90.36	-11.72	78.64	100.83	-22.19	peak
8		869.1302	37.45	-4.94	32.51	80.83	-48.32	peak

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 2(433.31MHz)	Remark:	N/A

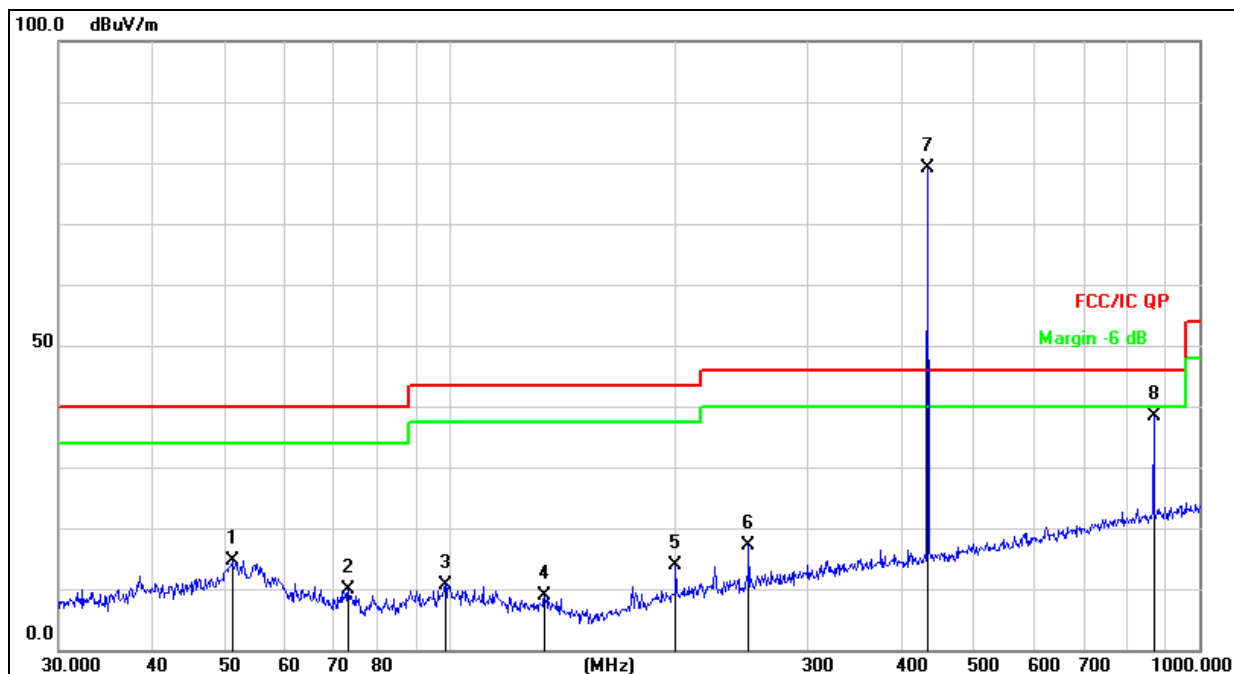

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Measurement=Reading Level+ Correct Factor

3. Over= Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm
1		51.1208	30.32	-15.76	14.56	40.00	-25.44	QP
2		73.1025	30.34	-20.45	9.89	40.00	-30.11	QP
3		98.4865	28.73	-17.98	10.75	43.50	-32.75	QP
4		133.6187	28.92	-19.97	8.95	43.50	-34.55	QP
5		199.9856	31.14	-17.37	13.77	43.50	-29.73	QP
6		250.3011	33.02	-15.82	17.20	46.00	-28.80	QP
7	*	434.0651	90.79	-11.72	79.07	100.83	-21.76	peak
8		869.1302	43.24	-4.94	38.30	80.83	-42.53	peak

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 2(433.24MHz)	Remark:	N/A

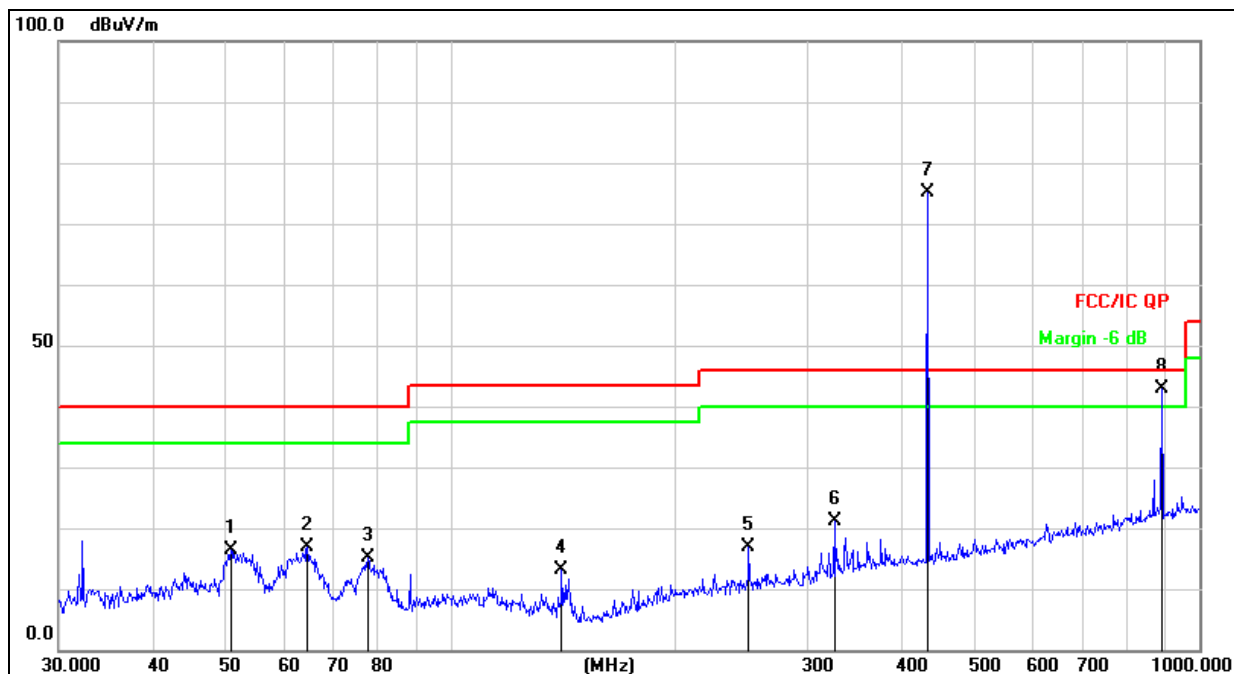

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Measurement=Reading Level+ Correct Factor

3. Over= Measurement-Limit

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.9420	32.20	-15.73	16.47	40.00	-23.53	QP
2		64.4330	35.20	-18.36	16.84	40.00	-23.16	QP
3		77.5927	36.31	-21.17	15.14	40.00	-24.86	QP
4		140.8351	33.58	-20.45	13.13	43.50	-30.37	QP
5		250.3011	32.63	-15.82	16.81	46.00	-29.19	QP
6		325.5957	34.72	-13.66	21.06	46.00	-24.94	QP
7	*	434.0651	86.91	-11.72	75.19	100.83	-25.64	peak
8	!	890.7278	47.57	-4.69	42.88	80.83	-37.95	peak

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 2(433.31MHz)	Remark:	N/A

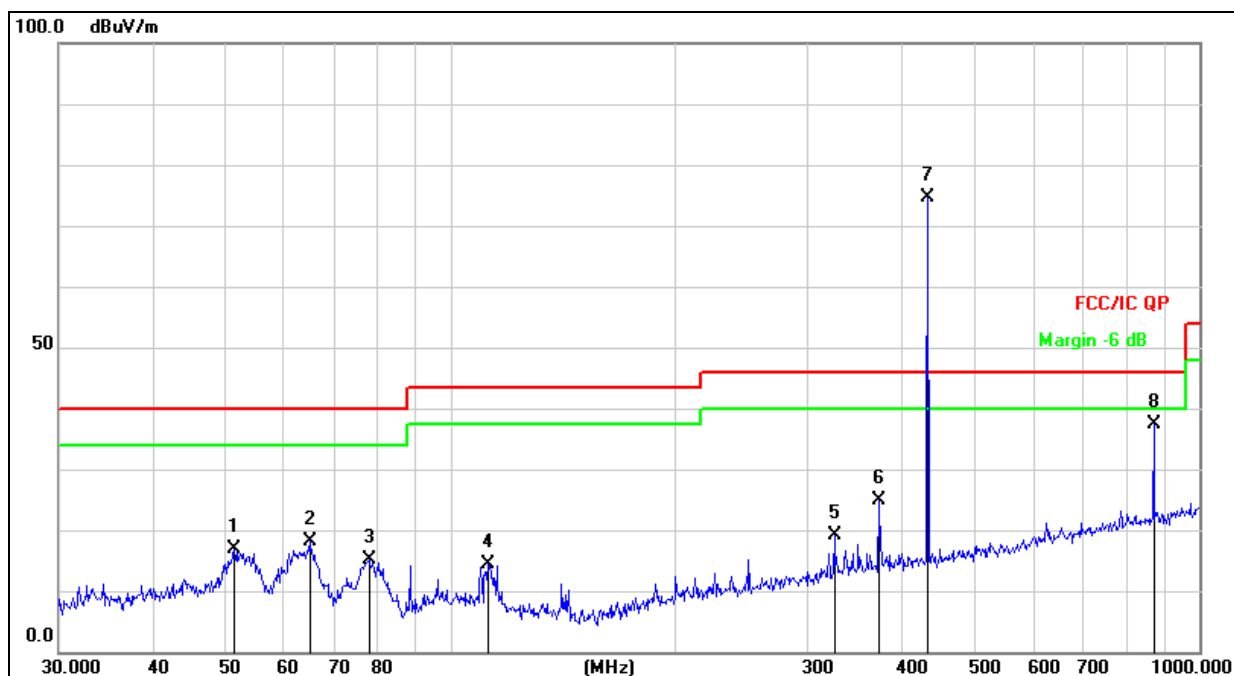

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Measurement=Reading Level+ Correct Factor

3. Over= Measurement-Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Alt
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		51.4806	32.67	-15.81	16.86	40.00	-23.14	QP
2		64.8864	36.53	-18.49	18.04	40.00	-21.96	QP
3		77.8653	36.23	-21.22	15.01	40.00	-24.99	QP
4		112.1304	32.86	-18.56	14.30	43.50	-29.20	QP
5		325.5957	32.75	-13.66	19.09	46.00	-26.91	QP
6		373.3110	37.29	-12.52	24.77	46.00	-21.23	QP
7	*	434.0651	86.40	-11.72	74.68	100.83	-26.15	peak
8		869.1302	42.42	-4.94	37.48	80.83	-43.35	peak


For average Emission

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
433.24	78.64	0.00	78.64	80.83	-2.19	Horizontal
866.48	32.51	0.00	32.51	60.83	-28.32	Horizontal
433.31	79.07	0.00	79.07	80.83	-1.76	Horizontal
866.62	38.30	0.00	38.3	60.83	-22.53	Horizontal

Notes: 1. Average emission Level = Peak Level + Duty cycle factor  
2. Duty cycle level please see clause 9.

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit AV	Margin	Polarization
433.24	75.19	0.00	75.19	80.83	-5.64	Vertical
866.48	42.88	0.00	42.88	60.83	-17.95	Vertical
433.31	74.68	0.00	74.68	80.83	-6.15	Vertical
866.62	37.48	0.00	37.48	60.83	-23.35	Vertical

Notes: 1. Average emission Level = Peak Level + Duty cycle factor  
2. Duty cycle level please see clause 9.

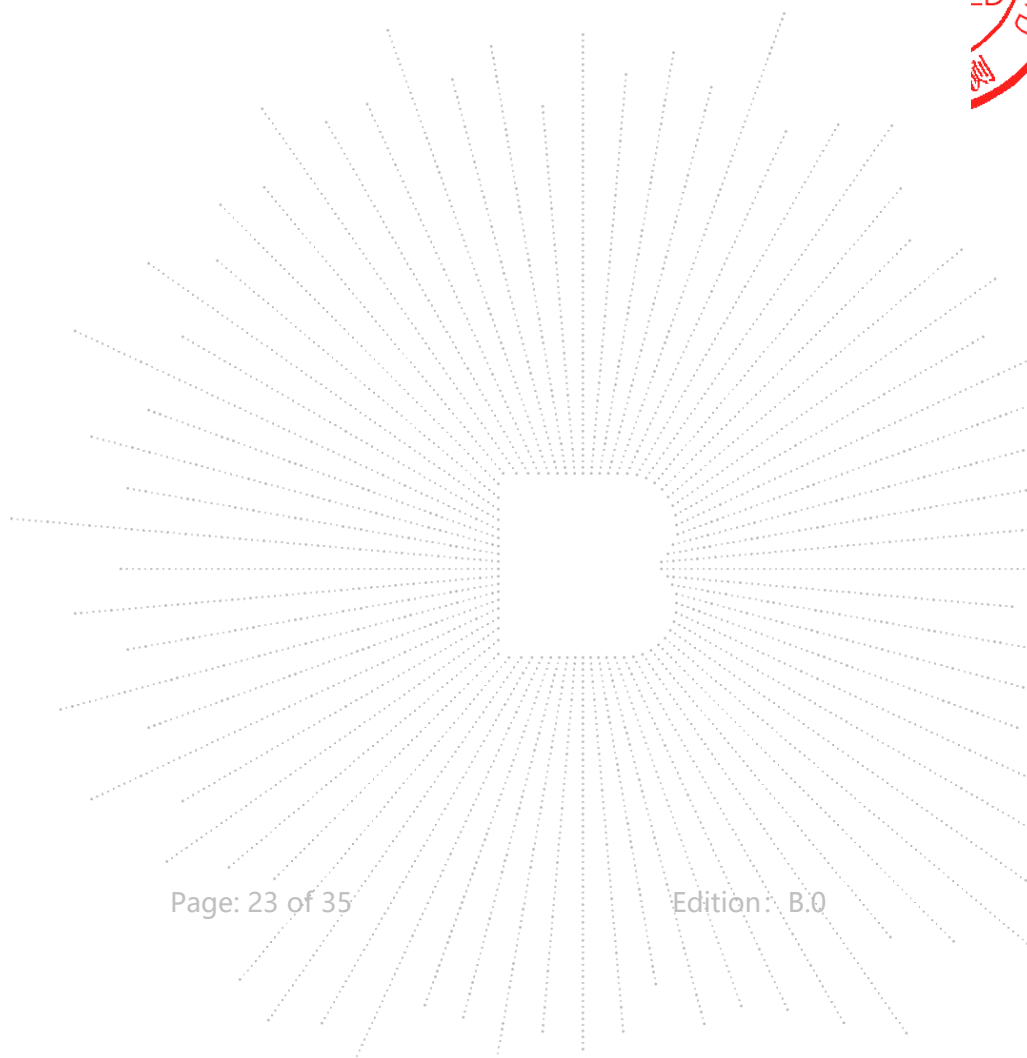



## 433.24MHz

Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1299.72	51.23	0	51.23	74	54	-22.77	-2.77	Vertical
1732.96	48.63	0	48.63	80.8	60.8	-32.17	-12.17	Vertical
2599.44	51.52	0	51.52	80.8	60.8	-29.28	-9.28	Vertical
3032.68	52.74	0	52.74	80.8	60.8	-28.06	-8.06	Vertical
3465.92	45.37	0	45.37	80.8	60.8	-35.43	-15.43	Vertical
3899.16	46.27	0	46.27	74	54	-27.73	-7.73	Vertical
1299.72	47.32	0	47.32	74	54	-26.68	-6.68	Horizontal
1732.96	46.32	0	46.32	80.8	60.8	-34.48	-14.48	Horizontal
2599.44	41.62	0	41.62	80.8	60.8	-39.18	-19.18	Horizontal
3032.68	42.85	0	42.85	80.8	60.8	-37.95	-17.95	Horizontal
3465.92	43.76	0	43.76	80.8	60.8	-37.04	-17.04	Horizontal
3899.16	43.58	0	43.58	74	54	-30.42	-10.42	Horizontal

## 433.31MHz

Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)

Frequency MHz	Peak Level dBuV/m	Duty cycle factor	Average Level dBuV/m	Limit		Margin dB		Polarization
				PK	AV	PK	AV	
1299.93	50.36	0	50.36	74	54	-23.64	-3.64	Vertical
1733.24	48.63	0	48.63	80.8	60.8	-32.17	-12.17	Vertical
2599.86	51.52	0	51.52	80.8	60.8	-29.28	-9.28	Vertical
3033.17	52.74	0	52.74	80.8	60.8	-28.06	-8.06	Vertical
3466.48	45.37	0	45.37	80.8	60.8	-35.43	-15.43	Vertical
3899.79	46.27	0	46.27	74	54	-27.73	-7.73	Vertical
1299.93	47.32	0	47.32	74	54	-26.68	-6.68	Horizontal
1733.24	46.32	0	46.32	80.8	60.8	-34.48	-14.48	Horizontal
2599.86	41.62	0	41.62	80.8	60.8	-39.18	-19.18	Horizontal
3033.17	42.85	0	42.85	80.8	60.8	-37.95	-17.95	Horizontal
3466.48	43.76	0	43.76	80.8	60.8	-37.04	-17.04	Horizontal
3899.79	43.58	0	43.58	74	54	-30.42	-10.42	Horizontal

Notes: 1.Average emission Level = Peak Level + Duty cycle factor

2.Duty cycle level please see clause 9.

3. Pulse Desensitization Correction Factor

Pulse Width (PW) =100ms

RBW=1 MHz

PW(100 ms) > 1/RBW (1us)

Therefore PDCF is not needed

4.Other harmonics emissions are lower than 20dB below the allowable limit.

CO.LTD



## 8. Bandwidth Test

### 8.1 Block Diagram Of Test Setup



### 8.2 Limit

According to FCC 15.231(c) requirement:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating between 70 MHz to 900 MHz. Those devices operating above 900 MHz, the emission spurious shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

$$\text{B.W (20dBc) Limit} = 0.25\% * f(\text{MHz}) = 0.25\% * 433.79\text{MHz} = 1.0845\text{MHz}$$

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	1% to 5% of the OBW
VB	≥RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.3 Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 1% to 5% of the OBW, VBW≥ RBW, Sweep time = Auto.



### 8.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 8.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 3.7V
Test Mode:	Mode 2		

Frequency	20dB Bandwidth (kHz)	Limit (MHz)	Result
433.24 MHz	10.92	1.0845	PASS
433.31 MHz	15.28	1.0845	PASS

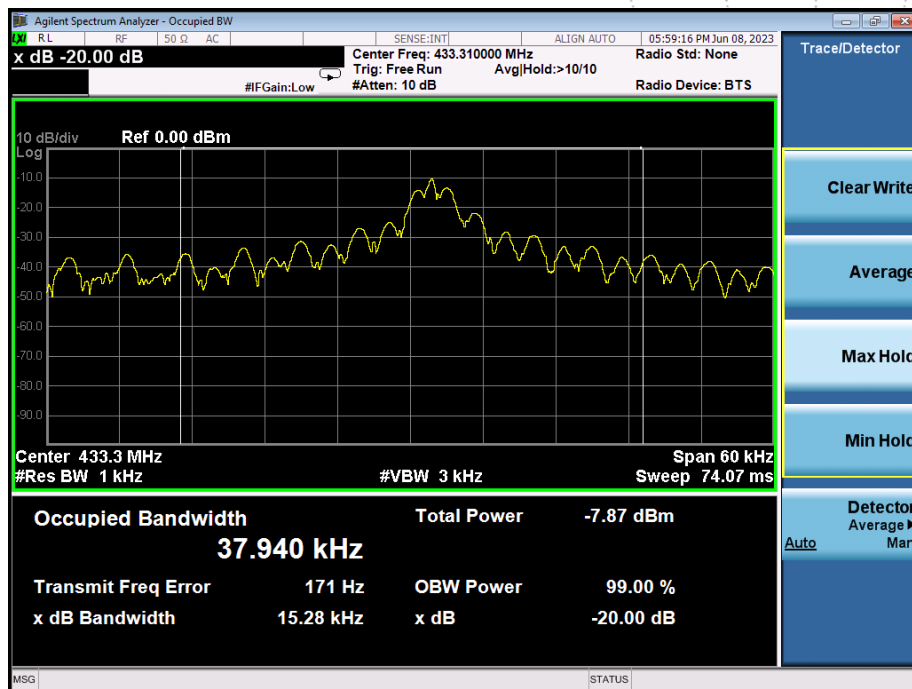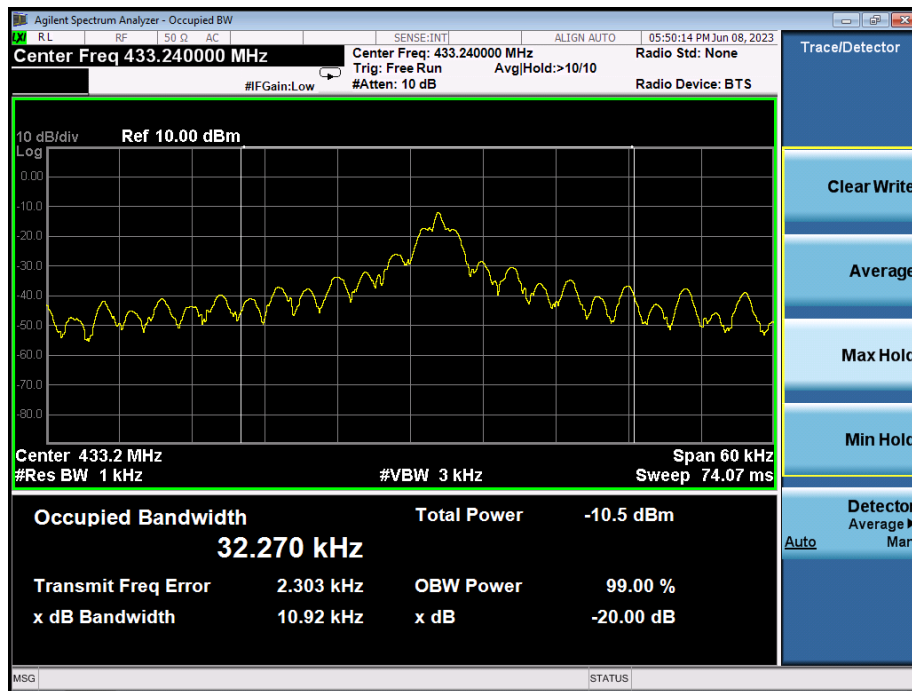

## 9. Calculation Of Average Factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

The duty cycle is measured in 100 ms or the repetition cycle period, whichever is a shorter time frame. The duty cycle is measured by placing the spectrum analyzer to set zero span at 100kHz resolution bandwidth. Averaging factor in dB =  $20\log(\text{duty cycle})$

433.24MHz

The duty cycle is simply the on-time divided the duration of one cycle


Duty Cycle =  $100\text{ms} / 100\text{ms} = 1$

Therefore, the averaging factor is found by  $20\log 1 = 0\text{dB}$

Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.

### Cycle

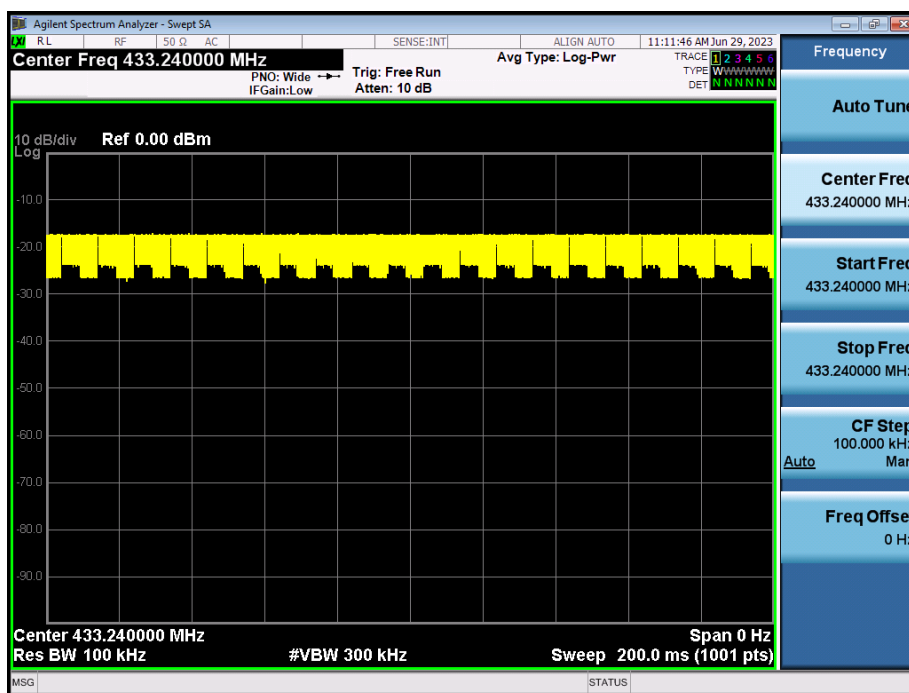

433.31MHz

The duty cycle is simply the on-time divided the duration of one cycle


Duty Cycle =100ms/ 100ms=1

Therefore, the averaging factor is found by  $20\log 1=0\text{dB}$

Test plot as follows:

Note: During the 100ms, the amount of pulse and on-time of pulse are the same for every pulse train.

### Cycle

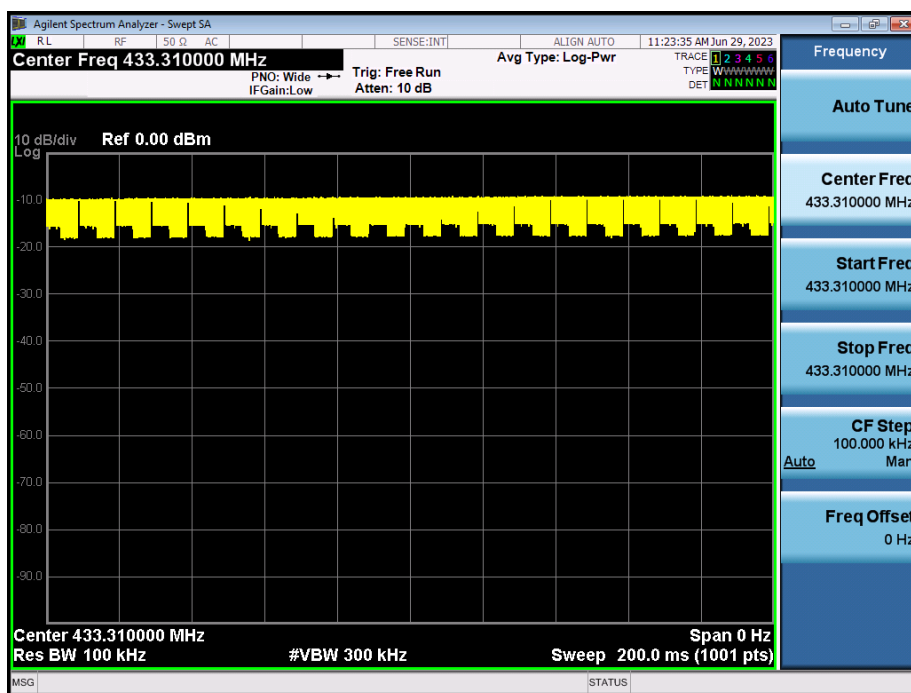

## 10. Dwell Time

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

According to FCC 15.231(a) requirement:



A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### 10.3 Test Procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

## 10.4 Test Result

Frequency (MHz)	Dwell time (second)	Limit (second)	Result
433.24	0.24s	<5s	Pass
433.31	0.24s	<5s	Pass

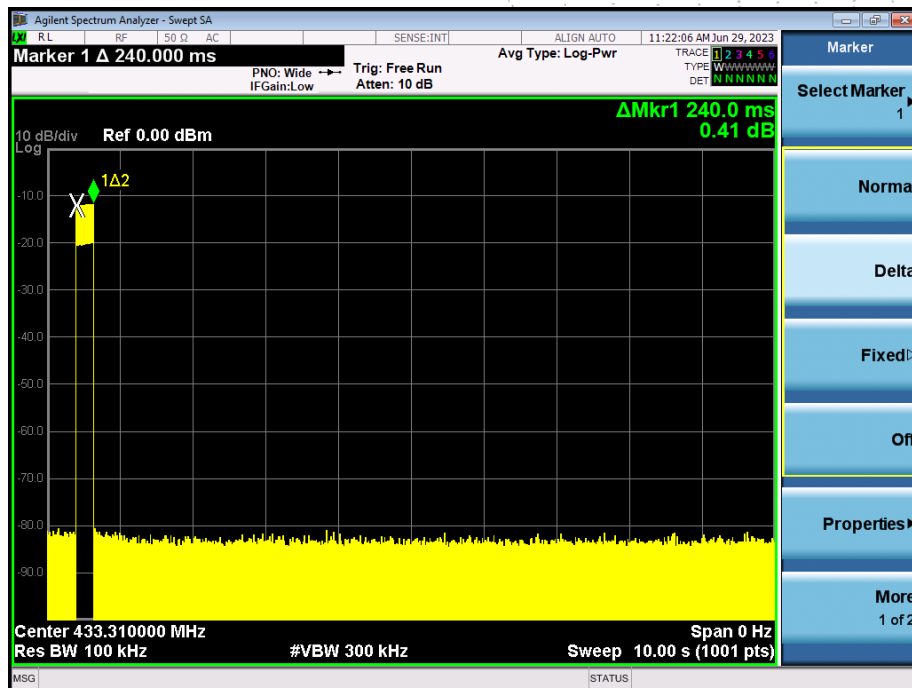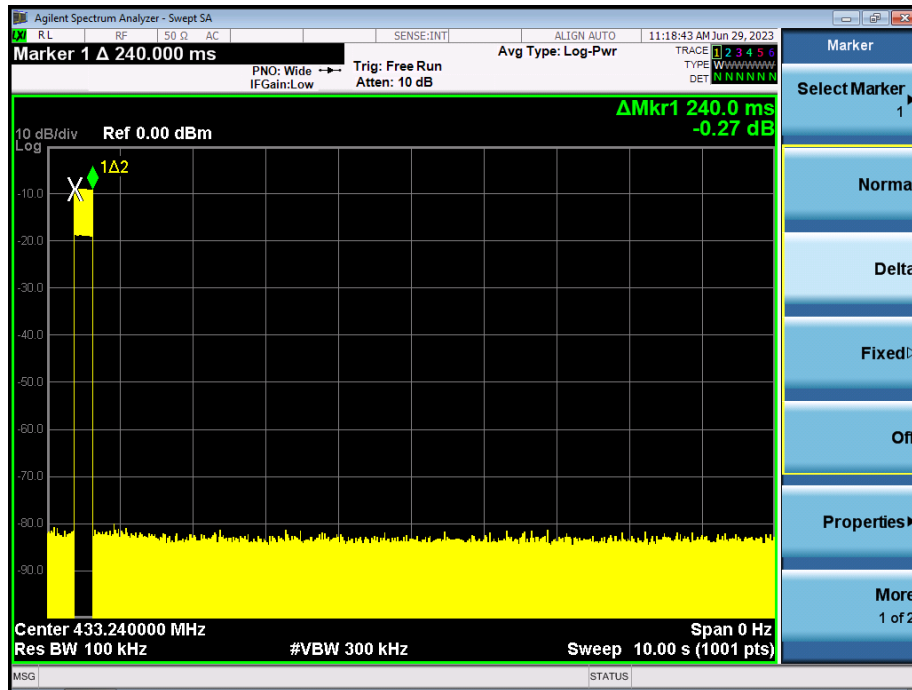

## 11. Antenna Requirement

### 11.1 Standard Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 11.2 EUT Antenna

The EUT antenna is the spring antenna. It comply with the standard requirement.



## 12. EUT Photographs

EUT Photo



NOTE: Appendix-Photographs Of EUT Constructional Details





### 13. EUT Test Setup Photographs

Conducted Emissions Photo



Radiated Measurement Photos





**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

**\*\*\*\*\* END \*\*\*\*\***

ing  
CO., LTD