

Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 1 of 140

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART E REQUIREMENT AND INDUSTRY CANADA RSS 210 CLASS II PC REPORT

Product Name: 802.11abgn+BT4.0 module

FOXCONN Brand Name:

T77H462 Model No.:

Model Difference: N/A

FCC ID: **MCLT77H462**

IC: 2878D-T77H462

E2/2014/30021 **Report No.:**

Issue Date: Apr. 10, 2014

§15.407 FCC Rule Part:

IC Rule Part: RSS-210 issue 8:2010, Annex 9

Prepared for: HON HAI PRECISION IND. CO., LTD

5F-1, 5 Hsin-An Road, Hsinchu Science-Based

Industrial Park, Taiwan, R.O.C.

SGS Taiwan Ltd. Prepared by:

> **Electronics & Communication Laboratory** No.2, Keji 1st Rd., Guishan Township, Taoyuan

County, Taiwan 333





Test ing Lebo reto re 0513

Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

体形力分配型 : UnderSate は列列へと体の発育 : 門中国体の主体権団がと、本格子を全体を対象と可含曲です。不可可力を表 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 2 of 140

VERIFICATION OF COMPLIANCE

HON HAI PRECISION IND. CO., LTD **Applicant:**

5F-1, 5 Hsin-An Road, Hsinchu Science-Based Industrial Park, Taiwan,

R.O.C.

Product Name: 802.11abgn+BT4.0 module

Brand Name: FOXCONN

Model No.: T77H462

Model Difference: N/A

FCC ID: **MCLT77H462**

IC: 2878D-T77H462

File Number: E2/2014/30021

Date of test: Apr. 03, 2014 ~ Apr. 09, 2014

Date of EUT Received: Apr. 03, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407 and RSS-210 issue 8: 2010 Annex 9.

The test results of this report relate only to the tested sample identified in this report.

Test By: Date: Apr. 10, 2014 Jazz Huang / Sr. Engineer Apr. 10, 2014 Prepared By: Date: Tiffany Kao / Clerk Approved By: Date: Apr. 10, 2014

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 3 of 140

Version

Version No.	Date	Description				
00	Apr. 10, 2014	Initial creation of document				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Tailwan Ltd.

No.134, WuKungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

10.200.0

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 4 of 140

Table of Contents

1.	GEN	VERAL INFORMATION	7
	1.1.	Product Description	7
	1.2.	Related Submittal(s) / Grant (s)	13
	1.3.	Test Methodology	13
	1.4.	Test Facility	13
	1.5.	Special Accessories	13
	1.6.	Equipment Modifications	13
2.	SYS	TEM TEST CONFIGURATION	14
	2.1.	EUT Configuration.	14
	2.2.	EUT Exercise	14
	2.3.	Test Procedure	14
	2.4.	Configuration of Tested System	15
3.	SUM	IMARY OF TEST RESULT	16
4.	DES	CRIPTION OF TEST MODES	17
5.	MEA	ASUREMENT UNCERTAINTY	23
6.	CON	NDUCTED EMISSION TEST	24
	6.1.	Standard Applicable	24
	6.2.	Measurement Equipment Used:	24
	6.3.	EUT Setup	24
	6.4.	Test SET-UP (Block Diagram of Configuration)	25
	6.5.	Measurement Procedure	25
	6.6.	Measurement Result	25
7.	26dB	3 and 99%EMISSION BANDWIDTH MEASUREMENT	26
	7.1	Standard Applicable	26
	7.2	Measurement Procedure	26
	7.3	Measurement Equipment Used:	27
	7.4	Test Set-up:	28
	7.5	Measurement Result	28
	7.6	Measurement Result	28
8.	The 1	MAXIMUM OUTPUT POWER MEASUREMENT	29
	8.1	Standard Applicable	
	8.2	Measurement Procedure	30
	8 3	Measurement Equipment Used:	31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No 134 WulkunRoad New TaipeiIndustrialPark WukupDistrict New TaipeiCity Taiwan 24803/新北市五股區新北產業園區五工路 134 赞

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 5 of 140

	8.4	Test Set-up:	31
	8.5	Measurement Result	32
9.	PEAF	K POWER SPECTRAL DENSITY	56
	9.1	Standard Applicable	56
	9.2	Measurement Procedure (following procedure F, & E) d) method SA-2 in KDB789033 D01)	57
	9.3	Measurement Equipment Used:	57
	9.4	Test Set-up:	57
	9.5	Measurement Result	57
10.	PEAF	K EXCURSION MEASUREMENT	58
	10.1	Standard Applicable	58
	10.2 N	Measurement Procedure (following procedure G in KDB789033)	58
	10.3	Measurement Equipment Used:	61
	10.4	Test Set-up:	61
	10.5	Test Results:	61
11.	UND	ESIRABLE EMISSION - CONDUCTED MEASUREMENT	62
	11.1	Standard Applicable	62
	11.2	Measurement Procedure	63
	11.3	Measurement Equipment Used:	63
	11.4	Test Set-up:	63
	11.5	Measurement Result:	63
12.	UND	ESIRABLE EMISSION - RADIATED MEASUREMENT	64
	12.1	Standard Applicable	64
	12.2	EUT Setup	70
	12.3	Measurement Procedure	70
	12.4	Test SET-UP (Block Diagram of Configuration)	71
	12.5	Measurement Equipment Used:	72
	12.6	Field Strength Calculation	73
	12.7	Measurement Result	73

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of his document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Tailwan Ltd.

No.134, WuKungRoad, NewTaipeiIndustrict, NewTaipeiCity, Tailwan 24803/新北市五股區新北產業園區五工路 134 號

No.134, WuKungRoad, NewTaipeiIndustrict, NewTaipeiCity, Tailwan 24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 6 of 140

13.	TRA	NSMISSION IN THE ABSENCE OF DATA	138
	13.1	Standard Applicable	138
	13.2	Result:	138
14.	FREC	QUENCY STABILITY	139
	14.1	Standard Applicable	139
	14.2	Result:	139
15.	ANTI	ENNA REQUIREMENT	140
	15.1	Standard Applicable	140
	15.2	Antenna Connected Construction	140

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 7 of 140

GENERAL INFORMATION

1.1. Product Description

1.2. General Information of Tablet:

Product Name:	Tablet Computer		
Brand Name:	acer		
Model No.:	POJAC		
Model Difference:	N/A		
Hardware Version:	R1.3		
Software Version:	Win8.1		
Model No. for BT Module:	T77H462		
Module FCC ID:	MCLT77H462		
Module IC:	2878D-T77H462		
Scope:	The test report covers the radiated emissions requirements of the standards referenced in the report to allow system level approval of the module in this specific host.		
Class II Permissive change:	802.11abgn+BT4.0 module (T77H462) card INSTALLED IN AN Tablet Computer		
	3.8Vdc Rechargeable Li-polymer battery pack or 12Vdc from AC/DC adapter		
Power Supply:	Battery: Model No.: AP14A8M, Supplier: LG		
	Adapter: Model No.: ADP-18TB C, Supplier: DELTA		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 8 of 140

WLAN 5GHz:

WLAN 5GH Wi-Fi	Frequency Range	Channels	Rated Power (Avg.) / Average Rated Power(EIRP)	Modulation Technology	Type of Emission
11a	5150~5250	4	14.27dBm (Avg.) 14.69dBm (EIRP)		16M7D1D
	5250~5350	4	13.75dBm (Avg.) 15.02dBm (EIRP)	OFDM	30M5D1D
11a	5470~5600	5	14.67dBm (Avg.) 16.41dBm (EIRP)	OFDM	30M8D1D
	5650~5725	3	13.44dBm (Avg.) 14.46dBm (EIRP)		16M6D1D
	HT20 5150~5250	4	Avg. Power: HT 20: 14.25dBm (MIMO Chain 0): 13.58dBm (MIMO Chain 1): 14.32dBm (MIMO Chain 0+1): 16.97dBm EIRP: HT20: 14.64dBm (MIMO Chain 0+1): 18.19dBm		17M5D1D
1.1	HT20 5250~5350	4	Avg. Power: HT 20: 13.70dBm (MIMO Chain 0): 13.65dBm (MIMO Chain 1): 14.27dBm (MIMO Chain 0+1): 16.98dBm EIRP: HT20: 15.04dBm (MIMO Chain 0+1): 19.20dBm		37M4D1D
11n	HT20 5470~5600	5	Avg. Power: HT 20:14.49dBm (MIMO Chain 0): 13.57dBm (MIMO Chain 1): 14.14dBm (MIMO Chain 0+1): 16.87dBm EIRP HT20:16.39dBm (MIMO Chain 0+1): 20.41dBm	OFDM	34M2D1D
	HT20 5650~5725	3	Avg. Power: HT 20: 11.78dBm (MIMO Chain 0): 11.56dBm (MIMO Chain 1): 11.32dBm (MIMO Chain 0+1): 14.45dBm EIRP HT20: 13.10dBm (MIMO Chain 0+1): 17.99dBm		17M5D1D

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Tailwan Ltd.

No.134, WuKungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

10.200.0



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 9 of 140

	HT40 5150-5250	2	Avg. Power: HT 40: 13.96dBm (MIMO Chain 0): 13.70dBm (MIMO Chain 1): 13.68dBm (MIMO Chain 0+1): 16.70dBm EIRP HT40: 14.70dBm (MIMO Chain 0+1): 17.92dBm	.68dBm 16.70dBm				
11	HT40 5250-5350	2	Avg. Power: HT40: 14.13dBm (MIMO Chain 0): 13.75dBm (MIMO Chain 1): 13.95dBm (MIMO Chain 0+1): 16.86dBm EIRP HT40: 15.46dBm (MIMO Chain 0+1): 19.08dBm	.75dBm .95dBm 16.86dBm	37M4D1D			
11n	HT40 5470-5600	2	Avg. Power: HT40: 14.49dBm (MIMO Chain 0):14.22dBm (MIMO Chain 1): 13.70dBm (MIMO Chain 0+1): 16.98dBm EIRP HT40: 15.70dBm (MIMO Chain 0+1): 20.52dBm	OFDM	70M4D1D			
	HT40 5650-5725	1	Avg. Power: HT40:14.02dBm (MIMO Chain 0):13.61dBm (MIMO Chain 1): 13.57dBm (MIMO Chain 0+1): 16.60dBm EIRP HT40: 15.89dBm (MIMO Chain 0+1): 20.14dBm		37M2D1D			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Tailwan Ltd.

No.134, WuKungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

10.200.0

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 10 of 140

	DVE 4 4	
	PIFA Antenna	
	1. Main:	
	5GHz Gain: 0.21dBi (5150MHz-5250MHz)	
	5GHz Gain: 0.36dBi (5250MHz-5350MHz)	
Antenna Designation	5GHz Gain: 1.02dBi (5470MHz-5725MHz)	
	2. Aux:	
	5GHz Gain: 0.74dBi (5150MHz-5250MHz)	
	5GHz Gain: 1.34dBi (5250MHz-5350MHz)	
	5GHz Gain: 2.00dBi (5470MHz-5725MHz)	
26.11.	CCK, DQPSK, DBPSK for DSSS	
Modulation type	64QAM, 16QAM, QPSK, BPSK for OFDM	
	802.11 a: 6/9/12/18/24/36/48/54 Mbps	
Transition Rate:	802.11 n_20MHz: 6.5 – 144Mbps	
	802.11 n_40MHz: 13.5 – 300Mbps	

This report applies for frequency bands 5150MHz-5250MHz, 5250MHz-5350MHz and 5470MHz-5725MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows are proposed to the language of this document is unauthorized. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 11 of 140

IEEE 802.11n Spec:

MCS					NCBPS NDBPS		nna	Datarate(Mbps)				
Index	Nss	Modulation	R	NBPSC			NDBPS		800nsGI		400nsGI	
			12541165		20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150

Symbol	Explanation					
NSS	Number of spatial streams					
R	Code rate					
NBPSC	Number of coded bite per single carrier					
NCBPS	Number of coded bite per symbol					
NDBPS	Number of data bite per symbol					
GI	Guard interval					

802.11n HT20 MCS8 -15

Mos	Modulation		$N_{BPSCS}(i_{SS})$			N_{CBPS}	N_{DBPS}	Data rate (Mb/s)		
MCS Index		R		N _{SD}	N _{SP}			800 ns GI	400 ns GI (see NOTE)	
8	BPSK	1/2	1	52	4	104	52	13.0	14.4	
9	QPSK	1/2	2	52	4	208	104	26.0	28.9	
10	QPSK	3/4	2	52	4	208	156	39.0	43.3	
11	16-QAM	1/2	4	52	4	416	208	52.0	57.8	
12	16-QAM	3/4	4	52	4	416	312	78.0	86.7	
13	64-QAM	2/3	6	52	4	624	416	104.0	115.6	
14	64-QAM	3/4	6	52	4	624	468	117.0	130.0	
15	64-QAM	5/6	6	52	4	624	520	130.0	144.4	
NOTE—T	The 400 ns GI rate	values	are rounded to 1	decima	l place.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows are proposed to the language of this document is unauthorized. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 12 of 140

802.11n HT40 MCS8 -15

MCS		R $N_{BPSCS}(i_{SS})$ N_{SD} N_{SP} N_{CBPS} N_{DBPS}						Data rate (Mb/s)		
Index	Modulation		NDBPS	800 ns GI	400 ns GI					
8	BPSK	1/2	1	108	6	216	108	27.0	30.0	
9	QPSK	1/2	2	108	6	432	216	54.0	60.0	
10	QPSK	3/4	2	108	6	432	324	81.0	90.0	
11	16-QAM	1/2	4	108	6	864	432	108.0	120.0	
12	16-QAM	3/4	4	108	6	864	648	162.0	180.0	
13	64-QAM	2/3	6	108	6	1296	864	216.0	240.0	
14	64-QAM	3/4	6	108	6	1296	972	243.0	270.0	
15	64-QAM	5/6	6	108	6	1296	1080	270.0	300.0	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.* No 134 WulkungRand NewTaipeilindustrialPark WukupDistrict NewTaipeiCity. Taiwan 24803/新北市市及股區新北產業園區五工路 134 號

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 13 of 140

1.1. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: MCLT77H462 filing to comply with Section 15.407 of the FCC Part 15, Subpart C Rules. And IC: 2878D-T77H462 filing to comply with Industry Canada RSS-210 issue 8: 2010 Annex 9. The composite system (digital device) is compliance with Subpart B is authorized under a DoC procedure.

1.2. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:2009 & KDB 789033 D01published on 04, 08, 2013. Radiated testing was performed at an antenna to EUT distance 3 meters.

Tested in accordance with FCC KDB789033 D01 for compliance to FCC 47CFR 15.407 requirements.

1.3. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333 which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number is: 990257. Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.4. Special Accessories

There are no special accessories used while test was conducted.

1.5. Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

t (886-2) 2299-3279

SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 14 of 140

2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 & 6.2.2, is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 and of ANSI C63.4:2009,.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 15 of 140

2.4. Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration

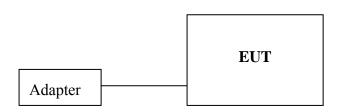


Table 2-1 Equipment Used in Tested System

I	tem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
	1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows are proposed to the language of this document is unauthorized. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 16 of 140

SUMMARY OF TEST RESULT

FCC/IC Rules	Description Of Test	Result
§15.207	AC Power Line Conducted	N/A
RSS-Gen §7.2.4	Emission	
§15.407(a) (1) (2)	26 dB and 99% Emission	N/A
RSS 210 A9.2	Bandwidth	
RSS-Gen §4.6.1	Banawiatii	
§15.407(a) (1) (2)	The Maximum Output Pow-	Compliant
RSS 210 A9.2(1)(2)(3)	er Measurement	
§15.407(a) (5)	Peak Power Spectral Density	N/A
RSS 210 A9.2(1)(2)(3)	Measurement	
15.407(a)(6)	Peak Excursion Measurement	N/A
§15.407(b) (1) (2) (3)	Undesirable Emission – Con-	N/A
RSS 210 A9.2(1)(2)(3)	ducted Measurement	
§15.407(b) (1) (2) (3)(6) (7)	Undesirable Emission – Radiated	Compliant
RSS 210 A9.2 (1) (2)(3)	Measurement	
RSS-Gen 7.2.5		
§15.407(c)	Transmission in case of Absence	N/A
RSS 210 A9.4(4)	of Information	
§15.407(g)	Frequency Stability	N/A
§15.203	Antenna Requirement	Compliant
RSS-Gen 7.1.2		
§15.407(h)	TPC and DFS Measurement	N/A
RSS 210 A9.3		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.* No 134 WulkungRand NewTaipeilindustrialPark WukupDistrict NewTaipeiCity. Taiwan 24803/新北市市及股區新北產業園區五工路 134 號

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 17 of 140

4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting mode is programmed.

a mode:

5150MHz-5250MHz: Channel lowest(5180MHz), Mid(5220MHz) and Highest(5240MHz). 5250MHz-5350MHz: Channel lowest(5260MHz), Mid(5300MHz) and Highest(5320MHz).

5470MHz-5725MHz: Channel lowest(5500MHz)、 Mid(5580MHz) and Highest(5700MHz) and with

6Mbps data rate are chosen for full testing.

n HT 20 mode:

5150MHz-5250MHz: Channel lowest(5180MHz)、 Mid(5220MHz) and Highest(5240MHz). 5250MHz-5350MHz: Channel lowest(5260MHz)、 Mid(5300MHz) and Highest(5320MHz).

5470MHz-5725MHz: Channel lowest(5500MHz), Mid(5580MHz) and Highest(5700MHz)with 6.5Mbps

data rate are chosen for full testing

n HT 40 mode:

5150MHz-5250MHz: Channel lowest (5190MHz) and Highest (5230MHz). 5250MHz-5350MHz: Channel lowest (5270MHz) and Highest (5310MHz).

5470MHz-5725MHz: Channel lowest(5510MHz), Mid(5550MHz) and Highest(5670MHz) with

13.5Mbps data rate are chosen for full testing

The worst case is determined by the output power that generates the highest emission. As examined in the section of output power measurement, the section 7.5, the lowest data rate at a/b/g/n_HT20/n_HT40 resulted the highest level of fundamental emission, and therefore, the lowest data rate is chosen as the worst-case to conduct the remaining of other mandatory test cases.

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11a/n WLAN Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

Pre-scanned was done on Antenna Main and Antenna Aux, and Antenna Aux results higher emission at 5GHz. Therefore, the completed set of measurement was done on Antenna Aux to be presented on this test repot.

For radiation spurious emission test relevant n_HT20&HT40, MIMO mode that generates the higher emission is chosen to be tested in comparison with transmission at SISO mode.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 18 of 140

Directional gain (MIMO)

The Tx transmission to construct MIMO operation is cyclic delay diversity, and the following deduction to obtain the array gain of MIMO operation is based on the approach given by KDB 662911 D01.

Array gain = 3.01dBi (peak spectral density, conducted spurious emission)

Gain that is combined with different magnitude of two antennas:

- (ii) If antenna gains are not equal, the user may use either of the following methods to calculate directional gain, provided that each transmit antenna is driven by only one spatial stream:
 - Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain; or,

$$\bullet \quad Directional Gain = 10 \cdot \log \left[\frac{\sum\limits_{j=1}^{N_{SS}} \left\{ \sum\limits_{k=1}^{N_{ANT}} g_{j,k} \right\}^{2}}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

 N_{SS} = the number of independent spatial streams of data;

 N_{ANT} = the total number of antennas

 $g_{j,k} = 10^{G_k/20}$ if the kth antenna is being fed by spatial stream j, or zero if it is not; G_k is the gain in dBi of the kth antenna.

Directive Gain = 0.48dBi for 802.11 a/n20, 0.48dBi for 802.11 n40 ($5150 \sim 5250$ MHz)

Directive Gain = 0.87dBi for 802.11 a/n20, 0.87dBi for 802.11 n40 ($5250 \sim 5350$ MHz)

Directive Gain = 1.54dBi for 802.11 a/n20, 1.54dBi for 802.11 n40 (5470~5725MHz)

MIMO Gain = 1.22dBi for 802.11 a/n20, 1.22dBi for 802.11 n40 (5150~5250MHz)

MIMO Gain = 2.22dBi for 802.11 a/n20, 2.22dBi for 802.11 n40 (5250~5350MHz)

MIMO Gain = 3.54dBi for 802.11 a/n20, 3.54dBi for 802.11 n40 ($5470\sim5725$ MHz)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 19 of 140

Duty Cycle Analysis:

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode (a/n_ht20/n_ht40) shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, resulted as obtained below, and showed only the most representative ones

Tabular results as indicates below entails the results of duty factor for all supported modes.

Formula:

 $Duty\ Cycle = Ton/(Ton+Toff)$

Test Procedure:

Set span = 0, RBW = 8MHz, the largest as possible, VBW = 8MHz, Detector = Peak, and RBW, and VBW = the highest RBW the spectrum is capable of, where zero-span is permissible, that > 50/T, where T is $\sim 4.3ms$

Duty Cycle:

5150-5725MHz	Antenna	Duty Cycle	Duty Factor (dBm)
802.11a	Single	0.954	0.22
902 11m 20	SISO	0.950	0.22
802.11n_20	MIMO 0.908	0.908	0.41
202 11 40	SISO 0.90		0.46
802.11n_40	MIMO	0.835	0.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司


t (886-2) 2299-3279




Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 20 of 140

DUTY CYCLE OF TEST SIGNAL 802.11a, CH Low 5180 MHz

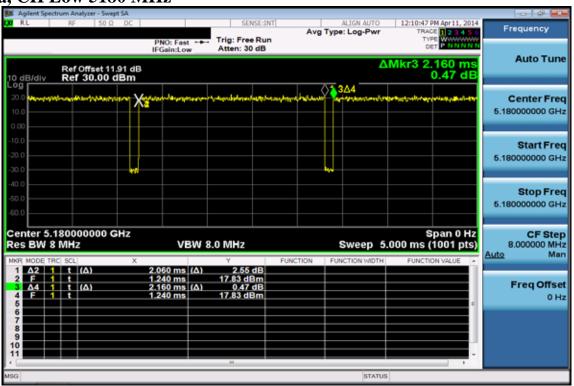

802.11n HT20, CH Low 5180 MHz, SISO

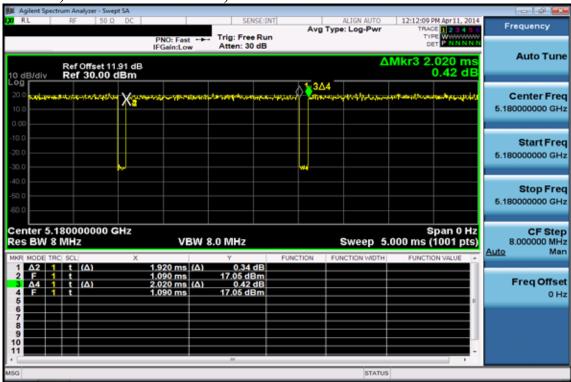

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in various descriptions. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488


www.tw.sqs.com




Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 21 of 140

802.11n HT20, CH Low 5180 MHz, MIMO

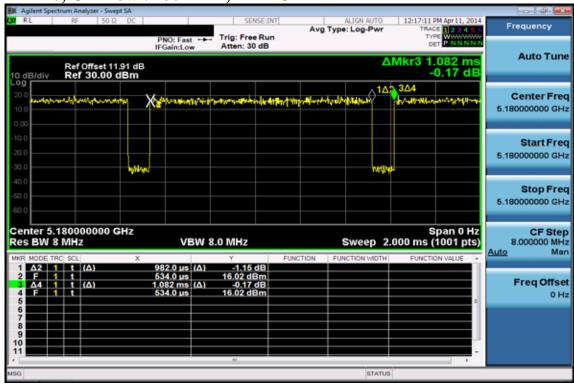

802.11n HT40, CH Low 5190 MHz, MIMO SISO

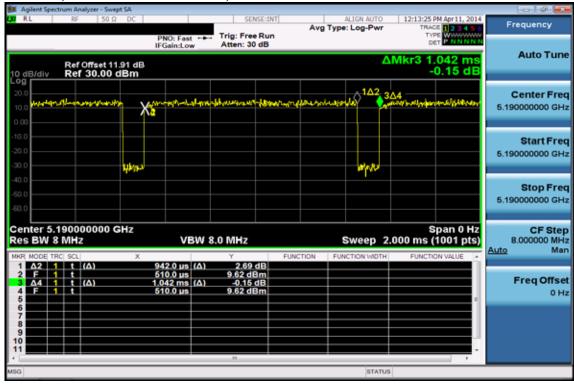

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this less report teler only to me sample(s) tested and such sample(s) are fetalined for 90 days only.

Pk 非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without print without price of this document is required and the produced except in full, without prior or the land. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 22 of 140

802.11n HT40, CH Low 5190 MHz, MIMO MIMO

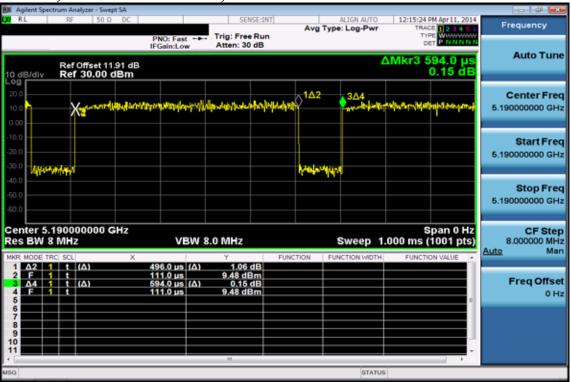

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in view to the devict of this document is unauthorized. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 23 of 140

MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	
AC Power Line Conducted Emission	+/- 2.586 dB	
26 dB and 99% Emission Bandwidth	+/- 123.36 Hz	
The Maximum Output Power Measurement	+/- 1.42 dB	
Peak Power Spectral Density Measurement	+/- 1.55 dB	
Peak Excursion Measurement	+/- 1.55 dB	
Undesirable Emission –	+/- 1.55 dB	
Conducted Measurement	17 1.55 dD	
Transmission in case of Absence of Information	+/- 1.55 dB	
Frequency Stability	+/- 123.36 Hz	
TPC and DFS Measurement	+/- 123.36 Hz	
Temperature	+/- 0.8 °C	
Humidity	+/- 4.7 %	
DC / AC Power Source	DC= +/- 1%, AC=+/- 0.2%	

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows are proposed to the language of this document is unauthorized. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 24 of 140

6. CONDUCTED EMISSION TEST

6.1. Standard Applicable

According to §15.207 and RSS-Gen §7.2.4, frequency range within 150 KHz to 30 MHz shall not exceed the Limit table as below.

Frequency range		mits (uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

- 1. The lower limit shall apply at the transition frequencies
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2. Measurement Equipment Used:

SGS Conducted Emission Test Site No.A					
Name of Favinament	Manufac-	Mr. 1.1	Serial Num-	Calibration	Calibration
Name of Equipment	turer	Model	ber	Date	Due
EMI Test Receiver	R&S	ESCI 3	101311	06/27/2013	06/26/2014
Coaxial Cables	N/A	N30N30-1042-150 cm	N/A	02/07/2014	02/06/2015
LISN	Schwarzbeck	NSLK 8127	8127-648	06/17/2013	06/16/2014
LISN	Rolf-Heine	NNB-2/16Z	99012	08/18/2013	08/17/2014

6.3. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.


t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 25 of 140

6.4. Test SET-UP (Block Diagram of Configuration)

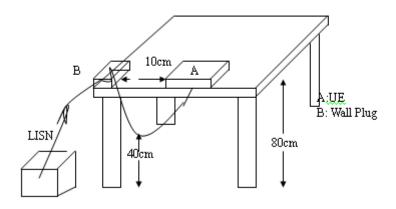

6.5. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6. Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This documents, subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 26 of 140

26dB and 99%EMISSION BANDWIDTH MEASUREMENT

7.1 Standard Applicable

According to §15.407(a). No Limit required.

According to RSS 210 A9.2 (1), No Limit required

RSS-Gen §4.6, the transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.2 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the Antenna port to the spectrum analyzer.

3.

- a. 26dB Band width Measurement: Set the spectrum analyzer as 1% of emission BW Sweep=auto, Detector = Peak, Trace Mode = Max Hold, Manually readjust RBW until the RBW/EBW ratio is 1% based on EBW as observed on the result of pre-sequence measurement.
- b. A) 99% Bandwidth Measurement: set resolution BW as close to 1% of the selected span without it is being lower than 1%, & VBW = 3 XRBW. Detector = Peak or Sample, where sample must be selected whenever it is appropriate, Trace Mode = Max Hold
 - B) Mark the peak frequency and -26dB (upper and lower) frequency.
- 4. Repeat the procedures as list above until all test default channels (low, middle, and high) are completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 27 of 140

7.3 Measurement Equipment Used:

SGS Conducted Room					
Name of Equip- ment	Manufacturer	Model	Serial Num- ber	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/26/2013	10/25/2014
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014
Power Sensor	Anritsu	MA2411B	1315048	06/28/2013	06/27/2014
Power Sensor	Anritsu	MA2411B	1315049	06/28/2013	06/27/2014
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-144	01/06/2014	01/05/2015
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-145	01/06/2014	01/05/2015
Coaxial Cable 80cm	WOKEN	00100A1F1A1 85C	HY-143	01/06/2014	01/05/2015
DC Block	Mini-Circuits	BLK-18-S+	HY-146	01/06/2014	01/05/2015
DC Block	PASTERNACK	PE8210	HY-147	01/06/2014	01/05/2015
Splitter	RF-LAMBAD	RFLT2W1G1 8G	11-JSPF412-0 19	01/06/2014	01/05/2015
Splitter	WOKEN	-	DOM35LW1 A2	01/06/2014	01/05/2015
Attenuator	Mini-Circuits	BW-S10W2+	HY-148	01/06/2014	01/05/2015
Attenuator	WOKEN	218FS-10	HY-149	01/06/2014	01/05/2015
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014
DC Power Supply	HOLA	DP-3003	D707003S	N.C.R.	N.C.R.
DC Power Supply	DHA	DPS-3003	9411005787	N.C.R.	N.C.R.
DC Power Supply	Agilent	E3640A	MY53140006	N.C.R.	N.C.R.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No 134 WulkunRoad New TaipeiIndustrialPark WukupDistrict New TaipeiCity Taiwan 24803/新北市五股區新北產業園區五工路 134 赞

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號


SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 28 of 140

7.4 Test Set-up:



7.5 Measurement Result

N/A

7.6 Measurement Result

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 29 of 140

8. The MAXIMUM OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

According to §15.407(a)

- 1. For the band 5.15-5.25 GHz, the maximum conducted power over the frequency of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B.
- 2. For the band 5.25-5.35 GHz and 5.47-5.725GMHz, the maximum conducted power over the frequency of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B.
- 3. For the band 5.725-5.825 GHz, the maximum conducted power over the frequency of operation shall not exceed the lesser of 1W (30dBm) or 17 dBm + 10log B.

According to RSS-210 A9.2

- 1. For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or 10 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- 2. For the bands 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log10 B, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

In addition, devices with maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

In addition to the above requirements, devices operating in the band 5250-5350 MHz with maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. elevation mask where θ is the angle above the local horizontal plane (of the earth) as shown below:

- (i) -13 dB(W/MHz) for $0o \le \theta \le 8o$
- (ii) -13 0.716 (θ -8) dB(W/MHz) for 80 < θ < 400
- (iii) -35.9 1.22 (θ -40) dB(W/MHz) for $40o < \theta < 45o$
- (iv) -42 dB(W/MHz) for $\theta > 45$ o

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留旬天。本報告未總本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.

t (886-2) 2299-3279



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 30 of 140

3. For the band 5725-5825 MHz, the maximum conducted output power shall not exceed 1.0 W or 17 + 10 log10 B, dBm, whichever power is less. The power spectral density shall not exceed 17 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 4.0 W or 23 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Fixed point-to-point systems for this band are permitted to have an e.i.r.p. greater than 4 W, provided that the higher e.i.r.p. is achieved by employing higher gain antennas, but not higher transmitter output powers. Point-to-multipoint systems, omni-directional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding 4 W e.i.r.p. However, remote stations of point-to-multipoint systems shall be permitted to operate at greater than 4 W e.i.r.p, under the same conditions as for point-to-point systems.

where B is the 26dB emission bandwidth in MHz.

8.2 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter
- 3. Set the offset $10*\log(1/x)$, n HT20=0.10, n HT40=0.12
- 4. Record the max. reading.
- 5. Repeat above procedures until all frequency (low, middle, and high channel) measured were complete.
- 6. Employing step 1 to 4 obtaining per-chain basis in MIMO operation, and sum the power in linear to result the output of MIMO operation at frequency of interest (, where MIMO is applicable).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014


Page 31 of 140

Note: For EIRP/ERP measurement complying with RSS-210 9.2, the formula as deduced in 1.3.2 of KDB 412172 D01 is used to calculate. ERP/EIRP = Pt + Gt - Lc, where Pt= transmitter output power measured directly at antenna port, expressing in dBm, and Gt = gain of the transmitting antenna in dBi that can be referred in antenna spec provided by the manufacturer in section 1.1, Lc = signal attenuation in the cable between the transmitting port and antenna.

8.3 Measurement Equipment Used:

Refer to section 7.3 for details.

8.4 Test Set-up:



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 32 of 140

8.5 Measurement Result

802.11a (Antenna Main)

Cal	ole loss = 0	The Maximum C	Output Power
СН	Frequency (MHz)	Data Rate	Required Limit
	(1,112)	6	Trequired Emili
36	5180	14.05	16.99dBm or 4+10log(B) = 18.64dBm
44	5220	14.27	16.99dBm or 4+10log(B) = 19.01dBm
48	5240	14.26	16.99dBm or 4+10log(B) = 18.15dBm
52	5260	13.56	23.98dBm or 11+10log(B) = 27.63dBm
60	5300	13.75	23.98dBm or 11+10log(B) = 26.54dBm
64	5320	13.67	23.98dBm or 11+10log(B) = 24.59dBm
100	5500	14.67	23.98dBm or 11+10log(B) = 26.75dBm
116	5580	14.61	23.98dBm or 11+10log(B) = 27.60dBm
140	5700	13.44	23.98dBm or 11+10log(B) = 24.61dBm

Note: Limit is re-adjusted in terms of dBm

10*log(50mW) = 16.99dBm for the limit on the band of $5150\sim5250MHz$

10*log(250mW)=23.98dBm for the limit on the band of 5260~5320Mz, &5470~5725MHz

Note: Cable loss is 11.91dB is set as the offset on the spectrum to compensate the loss causing by cable

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full transaction of the company is unquited and find the prior that the full transaction of the company. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 33 of 140

802.11n HT20 – SISO (Antenna Main)

Cable loss = 0		The Maximum (Output Power
СН	Frequency (MHz)	Data Rate	Required Limit
	(=-==)	MCS0	
			16.99dBm or
36	5180	13.88	$4+10\log(B) =$
			17.45dBm
			16.99dBm or
44	5220	14.25	$4+10\log(B) =$
			17.30dBm
			16.99dBm or
48	5240	14.25	$4+10\log(B) =$
			17.49dBm
			23.98dBm or
52	5260	13.47	$11+10\log(B) =$
			28.38dBm
		13.55	23.98dBm or
60	5300		$11+10\log(B) =$
			25.94dBm
5226	5220	40.00	23.98dBm or
64	5320	13.66	11+10log(B) = 24.59dBm
			23.98dBm or
100	5500	1 4 1 4	23.98aBm or 11+10log(B) =
100	5500	14.14	26.84dBm
			23.98dBm or
116	5500	14.40	23.98dBill of 11+10log(B) =
110	5580	14.49	27.78dBm
			23.98dBm or
140	5700	11.78	11+10log(B) =
140	3/00	11./0	25.14dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows are proposed to the language of this document is unauthorized. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.

t (886-2) 2299-3279

f (886-2) 2298-0488

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 34 of 140

802.11n HT40 – SISO (Antenna Main)

Cable loss = 0		The Maximum O	utput Power
СН	Frequency (MHz)	Data Rate	Required Limit
	(14112)	MCS0	Required Limit
			16.99dBm or
38	5190	12.35	$4+10\log(B) =$
			20.85dBm
			16.99dBm or
46	5230	13.94	$4+10\log(B) =$
			21.57dBm
			23.98dBm or
54	5270	14.13	$11+10\log(B) =$
			30.33dBm
		2:	23.98dBm or
62	62 5310 11.98	$11+10\log(B) =$	
			27.73dBm
			23.98dBm or
102	5510	510 10.72 11+1	$11+10\log(\mathbf{B}) =$
			30.27dBm
			23.98dBm or
110	5550	5550 14.49 11+10log	$11+10\log(B) =$
			31.41dBm
			23.98dBm or
134	5670	14.02	$11+10\log(B) =$
			30.44dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows are proposed to the language and the first description of the content or appropriate in languaged and the propriate of the follows are proposed to the language and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content of the following the content of the first description of the content of the first description of the content of the content of the first description of the content of the content of the content o pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 35 of 140

802.11a (Antenna Aux)

Cable loss = 0		The Maximum Output Power	
СН	Frequency (MHz)	Data Rate	Required Limit
	,	6	1
36	5180	13.93	16.99dBm or
			$4+10\log(B) =$
			18.64dBm
	5220	13.95	16.99dBm or
44			$4+10\log(B) =$
			19.01dBm
	5240	13.92	16.99dBm or
48			4+10log(B) = 18.15dBm
-	5260	13.47	23.98dBm or
52			25.980Bii or 11+10log(B) =
32			27.63dBm
	5300	13.68	23.98dBm or
60			$11+10\log(B) =$
			26.54dBm
	5320	13.61	23.98dBm or
64			$11+10\log(B) =$
			24.59dBm
	5500	14.41	23.98dBm or
100			$11+10\log(B) =$
			26.75dBm
	5580	14.29	23.98dBm or
116			$11+10\log(B) =$
			27.60dBm
	5700	13.23	23.98dBm or
140			11+10log(B) = 24.61dBm
			24.010BIII

Note: Limit is re-adjusted in terms of dBm

10*log(50mW) = 16.99dBm for the limit on the band of $5150\sim5250MHz$

10*log(250mW)=23.98dBm for the limit on the band of $5260\sim5320Mz$, & $5470\sim5725MHz$

Note: Cable loss is 11.91dB is set as the offset on the spectrum to compensate the loss causing by cable

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full transaction of the company is unquited and find the prior that the full transaction of the company. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 36 of 140

802.11n HT20 – SISO (Antenna Aux)

Cable loss = 0		The Maximum Output Power	
СН	Frequency (MHz)	Data Rate	Required Limit
		MCS0	•
36		13.87	16.99dBm or
	5180		$4+10\log(B) =$
			17.45dBm
44		13.89	16.99dBm or
	5220		$4+10\log(B) =$
			17.30dBm
		13.90	16.99dBm or
48	5240		$4+10\log(B) =$
			17.49dBm
		13.55	23.98dBm or
52	5260		$11+10\log(B) =$
			28.38dBm
60		13.62	23.98dBm or
	5300		$11+10\log(B) =$
			25.94dBm
64	5320	13.70	23.98dBm or
			$11+10\log(B) =$
			24.59dBm
		13.28	23.98dBm or
100	5500		$11+10\log(B) =$
			26.84dBm
116	5580	14.39	23.98dBm or
			$11+10\log(B) =$
			27.78dBm
140	5700	11.10	23.98dBm or
			$11+10\log(B) =$
			25.14dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows are proposed to the language and the first description of the content or appropriate in languaged and the propriate of the follows are proposed to the language and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content or appropriate in languaged and the first description of the content of the following the content of the first description of the content of the first description of the content of the content of the first description of the content of the content of the content o pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 37 of 140

802.11n HT40 – SISO (Antenna Aux)

Cable loss = 0		The Maximum O	utput Power
СН	Frequency (MHz)	Data Rate	Required Limit
	(11112)	MCS0	required 2mile
			16.99dBm or
38	5190	11.90	$4+10\log(B) =$
			20.85dBm
			16.99dBm or
46	5230	13.96	$4+10\log(B) =$
			21.57dBm
			23.98dBm or
54	5270	14.12	$11+10\log(B) =$
			30.33dBm
			23.98dBm or
62	5310	11.56	$11+10\log(B) =$
			27.73dBm
			23.98dBm or
102	5510	10.45	$11+10\log(B) =$
			30.27dBm
			23.98dBm or
110	5550	13.70	$11+10\log(B) =$
			31.41dBm
			23.98dBm or
134	5670	13.89	$11+10\log(B) =$
			30.44dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 38 of 140

802.11n HT20 MIMO operation CH0

Cable loss = 0		The Maximum C	Output Power CH 0
СН	Frequency (MHz)	Data Rate	Required Limit
	, ,	MCS8	1
			16.99dBm or
36	5180	13.49	$4+10\log(B) =$
			17.45dBm
			16.99dBm or
44	5220	13.53	$4+10\log(B) =$
			17.30dBm
			16.99dBm or
48	5240	13.58	$4+10\log(B) =$
			17.49dBm
			23.98dBm or
52	5260	13.65	$11+10\log(B) =$
			28.38dBm
	5300 13.58		23.98dBm or
60		13.58	$11+10\log(B) =$
			25.94dBm
			23.98dBm or
64	5320	13.57	$11+10\log(B) =$
			24.59dBm
			23.98dBm or
100	5500	13.20	$11+10\log(B) =$
			26.84dBm
			23.98dBm or
116	5580	13.57	$11+10\log(B) =$
			27.78dBm
			23.98dBm or
140	5700	11.56	$11+10\log(B) =$
			25.14dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 39 of 140

802.11n HT20 MIMO operation CH 1

Cable loss = 0		The Maximum O	output Power CH 1
СН	Frequency (MHz)	Data Rate	Required Limit
		MCS8	
			16.99dBm or
36	5180	14.26	$4+10\log(B) =$
			17.45dBm
			16.99dBm or
44	5220	14.32	$4+10\log(B) =$
			17.30dBm
			16.99dBm or
48	5240	14.30	$4+10\log(B) =$
			17.49dBm
			23.98dBm or
52	5260	14.27	$11+10\log(B) =$
			28.38dBm
	5300 14.16	23.98dBm or	
60		14.16	$11+10\log(B) =$
			25.94dBm
			23.98dBm or
64	5320	14.05	$11+10\log(B) =$
			24.59dBm
			23.98dBm or
100	5500	13.75	$11+10\log(B) =$
			26.84dBm
			23.98dBm or
116	5580	14.14	$11+10\log(B) =$
			27.78dBm
			23.98dBm or
140	5700	11.32	$11+10\log(B) =$
			25.14dBm

Note: Offset 11.91dB

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 40 of 140

802.11n HT20 MIMO operation CH 0 + CH 1

Cable loss = 0			m Output Power 0 +CH 1
СН	Frequency (MHz)	Data Rate	Required Limit
	(=:===)	MCS8	Tiequirea 211111
			16.99dBm or
36	5180	16.90	$4+10\log(B) =$
			17.45dBm
			16.99dBm or
44	5220	16.95	$4+10\log(B) =$
			17.30dBm
			16.99dBm or
48	5240	16.97	$4+10\log(B) =$
			17.49dBm
	5260	16.98	23.98dBm or
52			$11+10\log(B) =$
			28.38dBm
			23.98dBm or
60	5300	16.89	$11+10\log(B) =$
			25.94dBm
			23.98dBm or
64	5320	16.83	$11+10\log(B) =$
			24.59dBm
			23.98dBm or
100	5500	16.49	$11+10\log(B) =$
			26.84dBm
			23.98dBm or
116	5580	16.87	$11+10\log(B) =$
			27.78dBm
			23.98dBm or
140	5700	14.45	$11+10\log(B) =$
			25.14dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 41 of 140

802.11n HT40 MIMO operation CH 0

Cable loss = 0		Cable loss = 0 The Maximum Output Power C	
СН	Frequency (MHz)	Data Rate	Required Limit
	(IVIIIZ)	MCS8	- Kequirea Limit
			16.99dBm or
38	5190	12.25	$4+10\log(B) =$
			20.85dBm
			16.99dBm or
46	5230	13.70	$4+10\log(B) =$
	3230	200.0	21.57dBm
		5270 13.75	23.98dBm or
54	5270		$11+10\log(B) =$
			30.33dBm
	5310	11.40	23.98dBm or
62			$11+10\log(B) =$
			27.73dBm
			23.98dBm or
102	5510	10.14	$11+10\log(B) =$
			30.27dBm
			23.98dBm or
110	5550	14,22	$11+10\log(B) =$
			31.41dBm
			23.98dBm or
134	5670	13.61	$11+10\log(B) =$
101	3070	20.02	30.44dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 42 of 140

802.11n HT40 MIMO operation CH 1

Cable loss = 0		The Maximum C	Output Power CH 1
СН	Frequency (MHz)	Data Rate	Required Limit
	(11112)	MCS8	Trequired Emili
			16.99dBm or
38	5190	12.45	$4+10\log(B) =$
			20.85dBm
			16.99dBm or
46	5230	13.68	$4+10\log(B) =$
			21.57dBm
			23.98dBm or
54	5270	13.95	$11+10\log(B) =$
			30.33dBm
			23.98dBm or
62	5310	12.27	$11+10\log(B) =$
			27.73dBm
			23.98dBm or
102	5510	9.42	$11+10\log(B) =$
			30.27dBm
			23.98dBm or
110	5550	13.70	$11+10\log(B) =$
			31.41dBm
			23.98dBm or
134	5670	13.57	$11+10\log(B) =$
			30.44dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 43 of 140

802.11n HT40 MIMO operation CH 0 + CH 1

Cable loss = 0			n Output Power) +CH1
СН	Frequency (MHz)	Data Rate	Required Limit
	(1.222)	MCS8	Trequired 2mm
			16.99dBm or
38	5190	15.36	$4+10\log(B) =$
			20.85dBm
			16.99dBm or
46	5230	16.70	$4+10\log(B) =$
			21.57dBm
			23.98dBm or
54	5270	16.86	$11+10\log(B) =$
			30.33dBm
			23.98dBm or
62	5310	14.87	$11+10\log(B) =$
			27.73dBm
			23.98dBm or
102	5510	12.81	$11+10\log(B) =$
			30.27dBm
			23.98dBm or
110	5550	16.98	$11+10\log(B) =$
			31.41dBm
			23.98dBm or
134	5670	16.60	$11+10\log(B) =$
			30.44dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 44 of 140

ERP/EIRP Measurement:

802.11a (Antenna Main)

Cable loss = 0		El	IRP
СН	Frequency (MHz)	Data Rate	Required Limit
	(171112)	6	- Required Emili
			23.01dBm or
36	5180	14.26	10+10log(B) = 22.22dBm
			23.01dBm or
44	5220	14.48	$10+10\log(B) =$
			22.22dBm
10	5240	1 / 47	23.01dBm or 10+10log(B) =
48	5240	14.47	22.19dBm
		5260 13.92	30.00dBm or
52	5260		$17+10\log(B) =$
			31.84dBm
60	5300	5200	30.00dBm or 17+10log(B) =
00	3300	14.11	29.31dBm
			30.00dBm or
64	5320	14.03	$17+10\log(B) =$
			29.19dBm
100	5500	15.69	30.00dBm or 17+10log(B) =
100	3300	15.09	29.58dBm
			30.00dBm or
116	5580	15.63	$17+10\log(B) =$
			31.89dBm
1.40	5700	14.46	30.00dBm or 17+10log(B) =
140	5700	14.40	29.19dBm

Note: Limit is re-adjusted in terms of dBm

10*log(50mW) = 16.99dBm for the limit on the band of $5150\sim5250MHz$

10*log(250mW)=23.98dBm for the limit on the band of 5260~5320Mz, &5470~5725MHz

Note: Cable loss is 11.91dB is set as the offset on the spectrum to compensate the loss causing by cable

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,比賴告結果僅對測試之樣品負責,同時此樣品性保留別大。本報告未經本公司者如評可,不可能价模製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279

f (886-2) 2298-0488

www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 45 of 140

802.11n HT20 – SISO (Antenna Main)

Cable loss = 0		EI	RP
СН	Frequency (MHz)	Data Rate	Required Limit
	(1,222)	MCS0	Troquir ou Zimir
36	5180	14.09	23.01dBm or 10+10log(B) = 22.43dBm
44	5220	14.46	23.01dBm or 10+10log(B) = 22.43dBm
48	5240	14.46	23.01dBm or 10+10log(B) = 22.43dBm
52	5260	13.83	30.00dBm or 17+10log(B) = 31.53dBm
60	5300	13.91	30.00dBm or 17+10log(B) = 29.46dBm
64	5320	14.02	30.00dBm or 17+10log(B) = 29.43dBm
100	5500	15.16	30.00dBm or 17+10log(B) = 29.83dBm
116	5580	15.51	30.00dBm or 17+10log(B) = 32.23dBm
140	5700	12.80	30.00dBm or 17+10log(B) = 29.43dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 46 of 140

802.11n HT40 – SISO (Antenna Main)

Cable loss = 0 EIRP		RP	
СН	Frequency (MHz)	Data Rate	Required Limit
	(1,112)	MCS0	Required Elimit
			23.01dBm or
38	5190	12.56	$10+10\log(B) =$
			25.65dBm
			23.01dBm or
46	5230	14.15	$10+10\log(B) =$
			25.63dBm
			30.00dBm or
54	5270	5270 14.49	$17+10\log(\mathbf{B}) =$
			32.68dBm
	5310	0 12.34	30.00dBm or
62			$17+10\log(B) =$
			32.65dBm
			30.00dBm or
102	5510	11.74	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
110	5550	15.51	$17+10\log(B) =$
			32.36dBm
			30.00dBm or
134	5670	15.04	$17+10\log(B) =$
			32.68dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 47 of 140

802.11a (Antenna Aux)

Cal	ble $loss = 0$	E	ZIRP
СН	Frequency (MHz)	Data Rate	Required Limit
		6	
36	5180	14.67	23.01dBm or 10+10log(B) = 22.22dBm
44	5220	14.69	23.01dBm or 10+10log(B) = 22.22dBm
48	5240	14.66	23.01dBm or 10+10log(B) = 22.19dBm
52	5260	14.81	30.00dBm or 17+10log(B) = 31.84dBm
60	5300	15.02	30.00dBm or 17+10log(B) = 29.31dBm
64	5320	14.95	30.00dBm or 17+10log(B) = 29.19dBm
100	5500	16.41	30.00dBm or 17+10log(B) = 29.58dBm
116	5580	16.29	30.00dBm or 17+10log(B) = 31.89dBm
140	5700	15.23	30.00dBm or 17+10log(B) = 29.19dBm

Note: Limit is re-adjusted in terms of dBm

10*log(50mW) = 16.99dBm for the limit on the band of $5150\sim5250MHz$

10*log(250mW)=23.98dBm for the limit on the band of $5260\sim5320Mz$, & $5470\sim5725MHz$

Note: Cable loss is 11.91dB is set as the offset on the spectrum to compensate the loss causing by cable

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 48 of 140

802.11n HT20 – SISO (Antenna Aux)

Cal	ole $loss = 0$	F	EIRP
СН	Frequency (MHz)	Data Rate	Required Limit
		MCS0	1
36	5180	14.61	23.01dBm or 10+10log(B) = 22.43dBm
44	5220	14.63	23.01dBm or 10+10log(B) = 22.43dBm
48	5240	14.64	23.01dBm or 10+10log(B) = 22.43dBm
52	5260	14.89	30.00dBm or 17+10log(B) = 31.53dBm
60	5300	14.96	30.00dBm or 17+10log(B) = 29.46dBm
64	5320	15.04	30.00dBm or 17+10log(B) = 29.43dBm
100	5500	15.28	30.00dBm or 17+10log(B) = 29.83dBm
116	5580	16.39	30.00dBm or 17+10log(B) = 32.23dBm
140	5700	13.10	30.00dBm or 17+10log(B) = 29.43dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 49 of 140

802.11n HT40 – SISO (Antenna Aux)

Cal	ole $loss = 0$	EII	RP
СН	Frequency (MHz)	Data Rate	Required Limit
	(1/11/2)	MCS0	- Required Ellint
			23.01dBm or
38	5190	12.64	$10+10\log(B) =$
			25.65dBm
			23.01dBm or
46	5230	14.70	$10+10\log(B) =$
			25.63dBm
			30.00dBm or
54	5270	15.46	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
62	5310	12.90	$17+10\log(B) =$
			32.65dBm
			30.00dBm or
102	5510	12.45	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
110	5550	15.70	$17+10\log(B) =$
			32.36dBm
			30.00dBm or
134	5670	15.89	$17+10\log(B) =$
			32.68dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 50 of 140

802.11n HT20 MIMO operation CH0

	$\frac{\text{obs operation C}}{\text{ole loss}} = 0$		CH 0
СН	Frequency (MHz)	Data Rate	Required Limit
		MCS8	
			23.01dBm or
36	5180	14.71	$10+10\log(B) =$
			22.43dBm
			23.01dBm or
44	5220	14.75	$10+10\log(B) =$
			22.43dBm
			23.01dBm or
48	5240	14.80	$10+10\log(B) =$
			22.43dBm
			30.00dBm or
52	5260	15.87	$17+10\log(B) =$
			31.53dBm
			30.00dBm or
60	5300	15.80	$17+10\log(B) =$
			29.46dBm
			30.00dBm or
64	5320	15.79	$17+10\log(B) =$
			29.43dBm
			30.00dBm or
100	5500	16.74	$17+10\log(B) =$
			29.83dBm
			30.00dBm or
116	5580	17.11	$17+10\log(B) =$
			32.23dBm
			30.00dBm or
140	5700	15.10	$17+10\log(B) =$
			29.43dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 51 of 140

802.11n HT20 MIMO operation CH 1

Cal	ole loss = 0	EIRI	P CH 1
СН	Frequency (MHz)	Data Rate	Required Limit
		MCS8	
36	5180	15.48	23.01dBm or 10+10log(B) = 22.43dBm
44	5220	15.54	23.01dBm or 10+10log(B) = 22.43dBm
48	5240	15.52	23.01dBm or 10+10log(B) = 22.43dBm
52	5260	16.49	30.00dBm or 17+10log(B) = 31.53dBm
60	5300	16.38	30.00dBm or 17+10log(B) = 29.46dBm
64	5320	16.27	30.00dBm or 17+10log(B) = 29.43dBm
100	5500	17.29	30.00dBm or 17+10log(B) = 29.83dBm
116	5580	17.68	30.00dBm or 17+10log(B) = 32.23dBm
140	5700	14.86	30.00dBm or 17+10log(B) = 29.43dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 52 of 140

802.11n HT20 MIMO operation CH 0 + CH 1

Cal	ole $loss = 0$	EIRP C	CH 0 +CH 1
СН	Frequency (MHz)	Data Rate	Required Limit
	,	MCS8	1
			23.01dBm or
36	5180	18.12	$10+10\log(B) =$
			22.43dBm
			23.01dBm or
44	5220	18.17	10+10log(B) = 22.43dBm
			22.45dBm 23.01dBm or
48	5240	10 10	10+10log(B) =
40	3240	18.19	22.43dBm
			30.00dBm or
52	5260	19.20	$17+10\log(B) =$
		27.20	31.53dBm
			30.00dBm or
60	5300	19.11	$17+10\log(B) =$
			29.46dBm
			30.00dBm or
64	5320	19.05	$17+10\log(B) =$
			29.43dBm
100	5500	20.02	30.00dBm or 17+10log(B) =
100	5500	20.03	29.83dBm
			30.00dBm or
116	5580	20.41	17+10log(B) =
110	3300	2 0. T1	32.23dBm
			30.00dBm or
140	5700	17.99	$17+10\log(B) =$
			29.43dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 53 of 140

802.11n HT40 MIMO operation CH 0

Cal	ole $loss = 0$	EIRP	CH 0
СН	Frequency (MHz)	Data Rate	Required Limit
	(11112)	MCS8	required Emile
			23.01dBm or
38	5190	13.47	$10+10\log(B) =$
			25.65dBm
			23.01dBm or
46	5230	14.92	$10+10\log(B) =$
			25.63dBm
	5270		30.00dBm or
54		15.97	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
62	5310	13.62	$17+10\log(B) =$
			32.65dBm
			30.00dBm or
102	5510	13.68	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
110	5550	17.76	$17+10\log(\mathbf{B}) =$
			32.36dBm
			30.00dBm or
134	5670	17.15	$17+10\log(\mathbf{B}) =$
			32.68dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 54 of 140

802.11n HT40 MIMO operation CH 1

	ole $loss = 0$		P CH 1
СН	Frequency (MHz)	Data Rate	- Required Limit
	(1,112)	MCS8	Required Limit
			23.01dBm or
38	5190	13.67	$10+10\log(B) =$
			25.65dBm
			23.01dBm or
46	5230	14.90	$10+10\log(B) =$
			25.63dBm
			30.00dBm or
54	5270	16.17	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
62	5310	14.49	$17+10\log(B) =$
			32.65dBm
			30.00dBm or
102	5510	12.96	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
110	5550	17.24	$17+10\log(B) =$
			32.36dBm
			30.00dBm or
134	5670	17.11	$17+10\log(B) =$
			32.68dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd. t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 55 of 140

802.11n HT40 MIMO operation CH 0 + CH 1

	ole loss = 0		CH 0 +CH1
СН	Frequency (MHz)	Data Rate	Required Limit
	(=:===)	MCS8	210401100 211110
			23.01dBm or
38	5190	16.58	$10+10\log(B) =$
			25.65dBm
			23.01dBm or
46	5230	17.92	$10+10\log(B) =$
			25.63dBm
			30.00dBm or
54	5270	19.08	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
62	5310	17.09	$17+10\log(B) =$
			32.65dBm
			30.00dBm or
102	5510	16.35	$17+10\log(B) =$
			32.68dBm
			30.00dBm or
110	5550	20.52	$17+10\log(B) =$
			32.36dBm
			30.00dBm or
134	5670	20.14	$17+10\log(B) =$
			32.68dBm

Note: Offset 11.91dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

^{*} Note: EIRP = Average Power + Gain, where the nominal gain of the antenna:

^{0.21}dBi for 5150-5250MHz for Antenna Main, 0.74dBi for 5150-5250MHz for Antenna Aux,

^{0.36}dBi for 5250-5350MHz for Antenna Main, 1.34dBi for 5250-5350MHz for Antenna Aux,

^{1.02}dBi for 5470-5725MHz for Antenna Main, 2.00dBi for 5740-5725MHz for Antenna Aux

^{1.22}dBi for 5150-5250MHz (MIMO), 2.22dBi for 5250-5350MHz(MIMO) and 3.54dBi for 5470-5725MHz (MIMO) where MIMO gain = directive gain + nominal gain.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 56 of 140

PEAK POWER SPECTRAL DENSITY

Standard Applicable

According to §15.407(a)

- 1. For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band.
- 2. For the band 5.25-5.35 GHz and 5.47-5.725GMHz, the peak power spectral density shall not exceed 11 dBm in any 1-MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-210 A9.2

- 1. For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or 10 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- 2. For the bands 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log10 B, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log10 B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

In addition, devices with maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

In addition to the above requirements, devices operating in the band 5250-5350 MHz with maximum e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. elevation mask where θ is the angle above the local horizontal plane (of the earth) as shown below:

- (i) -13 dB (W/MHz) for $0o < \theta < 8o$
- (ii) -13 0.716 (θ -8) dB (W/MHz) for $80 \le \theta < 400$
- (iii) -35.9 1.22 (θ -40) dB (W/MHz) for $40o \le \theta \le 45o$
- (iv) -42 dB (W/MHz) for $\theta > 45$ o

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留旬天。本報告未總本公司書面許可,不可都份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

台灣檢驗科技股份有限公司

SGS Taiwan Ltd.

t (886-2) 2299-3279

www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 57 of 140

Measurement Procedure (following procedure F, & E) d) method SA-2 in KDB789033 D01)

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
- 3. Set RBW=1MHz, VBW=3MHz, Span=50MHz/80MHz (Base Mode), where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
- 4. User the cursor on spectrum to peak search the highest level of trace
- 5. Add offset, duty factor n HT20=0.10, n HT40=0.12
- 6. Record the max. reading.
- 7. Repeat above procedures until all default test channel (low, middle, and high) was complete.
- 8. For MIMO mode, add the appropriate offset.

9.3 Measurement Equipment Used:

Refer to section 7.3 for details.

Test Set-up: 9.4

Refer to section 7.4 for details.

Remark: as per KDB 662291, MIMO mode is accomplished by the addition of 10 log(N), where N=2 as the simultaneous emission of PSD

9.5 Measurement Result

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 58 of 140

10. PEAK EXCURSION MEASUREMENT

10.1 Standard Applicable

15.407(a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

10.2 Measurement Procedure (following procedure G in KDB789033)

- 1. Pre-evaluation in selection for test mode based on KDB789033
- 2. Tests mode selection is based on the variations in signal structure,
 - (i) All signal types OFDM;
 - (ii) All modulation types (BPSK, QPSK, 16-QAM, 64-QAM);
 - (iii) All bandwidth modes (20MHz, and 40MHz for 802.11n);
 - (iv) All variations in signal parameters (inapplicable);
 - (v) Error-correction coding rate (not required);
- 3. Place the EUT on the table and set it in transmitting mode.
- 4. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
- 5. Set RBW=1MHz, VBW = 3MHz, span = enough to capture the signal of the interest, Max. Hold, Detector = peak
- 6. use the procedure specified in KDB 789033 F) to determine the PPSD
- 7. compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD by the subtraction
- 8. Repeat above procedures until all default test mode of default frequency band of the test is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 www.tw.sqs.com

SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 59 of 140

802.11a

Table 18-4—Modulation-dependent parameters

Modulation	Coding rate (R)	Coded bits per subcarrier (N _{BPSC})	Coded bits per OFDM symbol (N_{CBPS})	Data bits per OFDM symbol (N _{DBPS})	Data rate (Mb/s) (20 MHz channel spacing)	Data rate (Mb/s) (10 MHz channel spacing)	Data rate (Mb/s) (5 MHz channel spacing)
BPSK	1/2	1	48	24	6	3	1.5
BPSK	3/4	1	48	36	9	4.5	2.25
QPSK	1/2	2	96	48	12	6	3
QPSK	3/4	2	96	72	18	9	4.5
16-QAM	1/2	4	192	96	24	12	6
16-QAM	3/4	4	192	144	36	18	9
64-QAM	2/3	6	288	192	48	24	12
64-QAM	3/4	6	288	216	54	27	13.5

802.11n 20

Table 20-30—MCS parameters for mandatory 20 MHz, N_{SS} = 1, N_{ES} = 1

1100								Data ra	Data rate (Mb/s)	
MCS Index	Modulation	R	N _{BPSCS} (i _{SS})	N _{SD}	N _{SP}	N _{CBPS}	N _{DBPS}	800 ns GI	400 ns GI (see NOTE)	
0	BPSK	1/2	1	52	4	52	26	6.5	7.2	
1	QPSK	1/2	2	52	4	104	52	13.0	14.4	
2	QPSK	3/4	2	52	4	104	78	19.5	21.7	
3	16-QAM	1/2	4	52	4	208	104	26.0	28.9	
4	16-QAM	3/4	4	52	4	208	156	39.0	43.3	
5	64-QAM	2/3	6	52	4	312	208	52.0	57.8	
6	64-QAM	3/4	6	52	4	312	234	58.5	65.0	
7	64-QAM	5/6	6	52	4	312	260	65.0	72.2	
NOTE—S	upport of 400 ns (3I is op	tional on transm	it and re	eceive.					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 60 of 140

802.11n_40

Table 20-34—MCS parameters for optional 40 MHz, N_{SS} = 1, N_{ES} = 1

MCS	Modulation R Neprocellee) Nep Nep Neprocellee		D N G)	N N	Nonna	N	Data rate (Mb/s)		
Index		N_{DBPS}	800 ns GI	400 ns GI					
0	BPSK	1/2	1	108	6	108	54	13.5	15.0
1	QPSK	1/2	2	108	6	216	108	27.0	30.0
2	QPSK	3/4	2	108	6	216	162	40.5	45.0
3	16-QAM	1/2	4	108	6	432	216	54.0	60.0
4	16-QAM	3/4	4	108	6	432	324	81.0	90.0
5	64-QAM	2/3	6	108	6	648	432	108.0	120.0
6	64-QAM	3/4	6	108	6	648	486	121.5	135.0
7	64-QAM	5/6	6	108	6	648	540	135.0	150.0

802.11n_20_MIMO

Mee								Data ra	ite (Mb/s)
MCS Index	Modulation	R	$N_{BPSCS}(i_{SS})$	N _{SD}	N_{SP}	N_{CBPS}	N_{DBPS}	800 ns GI	400 ns GI (see NOTE)
8	BPSK	1/2	1	52	4	104	52	13.0	14.4
9	QPSK	1/2	2	52	4	208	104	26.0	28.9
10	QPSK	3/4	2	52	4	208	156	39.0	43.3
11	16-QAM	1/2	4	52	4	416	208	52.0	57.8
12	16-QAM	3/4	4	52	4	416	312	78.0	86.7
13	64-QAM	2/3	6	52	4	624	416	104.0	115.6
14	64-QAM	3/4	6	52	4	624	468	117.0	130.0
15	64-QAM	5/6	6	52	4	624	520	130.0	144.4
NOTE-T	he 400 ns GI rate	values	are rounded to 1	decima	l place.				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 61 of 140

802.11n_40_MIMO

MCS	Modulation R Nanacollea Nep Nep Neps		P N G)	37		Nonna		Data rate (Mb/s)	
Index		N_{DBPS}	800 ns GI	400 ns GI					
8	BPSK	1/2	1	108	6	216	108	27.0	30.0
9	QPSK	1/2	2	108	6	432	216	54.0	60.0
10	QPSK	3/4	2	108	6	432	324	81.0	90.0
11	16-QAM	1/2	4	108	6	864	432	108.0	120.0
12	16-QAM	3/4	4	108	6	864	648	162.0	180.0
13	64-QAM	2/3	6	108	6	1296	864	216.0	240.0
14	64-QAM	3/4	6	108	6	1296	972	243.0	270.0
15	64-QAM	5/6	6	108	6	1296	1080	270.0	300.0

Note: The test mode to be performed is circle in red as presents above

Measurement Equipment Used: 10.3

Refer to section 7.3 for details.

Remark: as per KDB 662291, MIMO mode is accomplished by the addition of 10 log(N), where N=2 as the simultaneous emission of Peak Excursion.

10.4 Test Set-up:

Refer to section 7.4 for details.

10.5 Test Results:

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 62 of 140

11. UNDESIRABLE EMISSION - CONDUCTED MEASUREMENT

Standard Applicable

According to §15.407(b),

- (b) Undesirable Emission Limits: Except as shown in Paragraph (b)(6) of this section, the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
 - For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
 - (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.
 - For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz (3) band shall not exceed an EIRP of -27 dBm/MHz.
 - The above emission measurements shall be performed using a minimum resolution bandwidth of 1 (4) MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

According to RSS-210 A9.2

- 1. For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.
- 2. Emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.
- 3. For transmitters operating in the band 5470-5725 MHz, all emissions outside that band shall not exceed -27 dBm/MHz e.i.r.p.

Procedure H2) a) b) c) are adopted, KDB 789033 D01, where the conducted measurement is being used to comply with out of emission requirement as per FCC 15.407 b) 1) 2) 3), and RSS-210 A9.2 1), 2), and 3)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com

SGS Taiwan Ltd.



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 63 of 140

11.2 Measurement Procedure

Conducted Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100 kHz, VBW = 300 kHz while frequency of the measurement is swept below 1GHz, RBW = 1MHz & VBW = 3MHz while frequency of the measurement is swept above 1GHz on Spectrum. Detector = Peak, set DL as the limit line to -27dBm, add the offset = 4.7dB for frequency below 1GHz, and 2dB for frequency above 1GHz.
- 3. Sweep the frequency to determine spurious emission as seen on spectrum from span of 30 to 1G, 1G to 3G, 3G to 6G, 6G to 13G,13G to 18G, 18G to 26.5G and 26.5G to 40GHz
- 4. Via Software, combine 6 spans of frequency range into one plot

Conducted RF measurements of the transmitter output were made at the band edges and the adjacent restricted bands.

Also, conducted RF measurements of the transmitter output over the 30 MHz to 40 GHz band were made in order to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

Note: the spike on the spectrum is the fundamental emission that does not account for the test outside the frequency band as required by associative regulatory provision.

11.3 Measurement Equipment Used:

Refer to section 7.3 for details.

11.4 Test Set-up:

Refer to section 7.4 for details.

11.5 Measurement Result:

N/A.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeiIndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 64 of 140

12. UNDESIRABLE EMISSION - RADIATED MEASUREMENT

Standard Applicable

According to §15.407(b) (6) (7),

- (b) Undesirable Emission Limits: Except as shown in Paragraph (b)(6) of this section, the peak emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:
 - Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in (1) Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.
 - (2) The provisions of Section 15.205 of this part apply to intentional radiators operating under this sec-
 - When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the (3) upper and lower frequency block edges as the design of the equipment permits.

Procedure H1) a) b) c) are adopted, KDB 789033 D01, where the conducted measurement is being used to comply with out of emission requirement as per FCC 15.407 b) 6) 7), and RSS-Gen 7.2.2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 65 of 140

§15.205- RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz	
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15	
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46	
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75	
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5	
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2	
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5	
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4	
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2	
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4	
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12	
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0	
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8	
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5	
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)	
13.36 - 13.41	322 - 335.4			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.

² Above 38.6



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 66 of 140

§15.209- RADIATED EMISSION LIMITS: GENERAL REQUIREMENTS

FCC PART 15.209

MEASURING DISTANCE OF 3 METER			
FREQUENCY RANGE	FIELD STRENGTH	FIELD STRENGTH	
(MHz)	(Microvolts/m)	(dBuV/m)	
30-88	100	40	
88-216	150	43.5	
216-960	200	46	
Above 960	500	54	

According to RSS-Gen section 4.9 Transmitter Unwanted Emissions

The measurement method shall be described in the test report. When the applicable unwanted emissions limits are defined in relative terms, the same parameter, peak power or average power, used for the transmitter output power measurement, shall be used for unwanted emission measurements.

In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given in (a) and (b):

- (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

Particular attention should be paid to harmonics and sub-harmonics of the carrier frequency, as well as to those frequencies removed from the carrier by multiples of the oscillator frequency. Radiation at the frequencies of multiplier stages should also be checked.

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value need not be reported.

When limits are expressed in absolute terms, compliance with the emission limits shall be demonstrated using a CISPR quasi-peak detector and the related measurement bandwidth for emissions below1000MHz. As an alternative to CISPR quasi-peak measurement, compliance with the emission limits can be demonstrated using measuring equipment employing a peak detector function properly adjusted for factors such as pulse desensitization as required, with an equal or greater measurement bandwidth relative to the applicable CISPR quasi-peak bandwidth.

Above 1000 MHz, compliance with the emission limits shall be demonstrated using an average detector with a minimum resolution bandwidth of 1 MHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 67 of 140

According to RSS-Gen section 7.2.2 Emissions Falling Within Restricted Frequency Bands

Restricted bands, identified in Table 1, are designated primarily for safety-of-life services (distress calling and certain aeronautical bands), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following restrictions apply:

- (a) Fundamental components of modulation of licence-exempt radio apparatus shall not fall within the restricted bands of Table 1;
- (b) Unwanted emissions falling into restricted bands of Table 1 shall comply with the limits specified in RSS-Gen;
- (c) Unwanted emissions not falling within restricted frequency bands shall either comply with the limits specified in the applicable RSS, or with those specified in RSS-Gen.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 68 of 140

Table 3: Restricted Frequency Bands (Note)

MHz
0.090-0.110
2.1735-2.1905
3.020-3.026
4.125-4.128
4.17725-4.17775
4.20725-4.20775
5.677-5.683
6.215-6.218
6.26775-6.26825
6.31175-6.31225
8.291-8.294
8.362-8.366
8.37625-8.38675
8.41425-8.41475
12.29-12.293
12.51975-12.52025
12.57675-12.57725
13.36-13.41
16.42-16.423
16.69475-16.69525
16.80425-16.80475
25.5-25.67
37.5-38.25
73-74.6
74.8-75.2
108-138
156.52475-156.52525
156.7-156.9

MHz
240-285
322-335.4
399.9-410
608-614
960-1427
1435-1626.5
1645.5-1646.5
1660-1710
1718.8-1722.2
2200-2300
2310-2390
2655-2900
3260-3267
3332-3339
3345.8-3358
3500-4400
4500-5150
5350-5460
7250-7750
8025-8500

GHz
9.0-9.2
9.3-9.5
10.6-12.7
13.25-13.4
14.47-14.5
15.35-16.2
17.7-21.4
22.01-23.12
23.6-24.0
31.2-31.8
36.43-36.5
Above 38.6

Note: Certain frequency bands listed in Table 1 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in the 200- and 300- series RSSs, such as RSS-210 and RSS-310, which contain the requirements that apply to licence-exempt radio apparatus.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 69 of 140

12.1.1 Transmitter Spurious Emission Limits

Spurious emissions from licence-exempt transmitters shall comply with the field strength limits shown below. Additionally, the level of any transmitter spurious emission shall not exceed the level of the transmitter's fundamental emission.

Table 5: General Field Strength Limits for Transmitters at Frequencies Above 30 MHz

Frequency (MHz)	Field Strength (microvolt/m at 3 metres)	
30-88	100	
88-216	150	
216-960	200	
Above 960	500	

Note: Transmitting devices are not permitted in Table 1 bands or, unless stated otherwise, in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz and 614-806 MHz).

12.1.2 Unwanted Emission that complies with the undesirable emission ruling by 15.407 (b) (1) (2) (3), RSS-210 A9.2 (1) (2) (3)

Frequencies (MHz)	EIRP Limit (dBm) Equivalent Field Strengt	
		3m (dBuV/m)
5150 - 5250	-27	68.3
5250 – 5350	-27	68.3
5470 - 5725	-27	68.3

Limit derivation in terms of Field Strength:

EIRP = $((E*d)^2) / 30$, where E is the field in V/m, d is the measurement distance (3m), EIRP is the equivalent isotropically radiated power in Watts.

 $E = 1000000* (30*EIRP)^(1/2) / 3 \text{ uV/m}$

= 68.3 dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 70 of 140

12.2 EUT Setup

- The radiated emission tests were performed in the 3 meter open-test site, using the setup in accordance with the ANSI C63.4:2009.
- The EUT was put in the front of the test table. The host PC system was placed on the center of the 2. back edge on the test table. The peripherals like modem, monitor printer, K/B, and mouse were placed on the side of the host PC system. The rear of the EUT and peripherals were placed flushed with the rear of the tabletop.
- The keyboard was placed directly in the front of the monitor, flushed with the front tabletop. The 3. mouse was placed next to the Keyboard, flushed with the back of keyboard.
- 4. The spacing between the peripherals was 10 centimeters.
- 5. External I/O cables were draped along the edge of the test table and bundle when necessary.
- 6. The host PC system was connected with 120Vac/60Hz power source.

12.3 Measurement Procedure

- The EUT was placed on a turn table which is 0.8m above ground plane. 1.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the high-3. est emissions.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance. 4.
- And also, each emission was to be maximized by changing the polarization of receiving antenna 5. both horizontal and vertical.
- Repeat above procedures until all frequency measured were complete. 6.

For measurements below 1GHz, follow the KDB 789033 D01 requirements in section H)3), "General Requirements for Unwanted Emissions Measurements" Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

For Measurement above 1GHz, for peak unwanted emission measurements follow the KDB 789033 D01 requirements in section H)5) b), for average unwanted emission measurements follow the KDB 789033 D01 requirements in section H)6) c) or d).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

体形力分配型 : UnderSate は列列へと体の発育 : 門中国体の主体権団が、本格子を全体を対象と可含曲です。不可可力を表 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

f (886-2) 2298-0488 www.tw.sqs.com

SGS Taiwan Ltd.




Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**


Page 71 of 140

Test SET-UP (Block Diagram of Configuration)

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

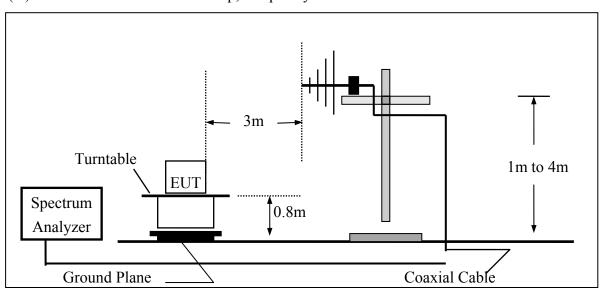

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

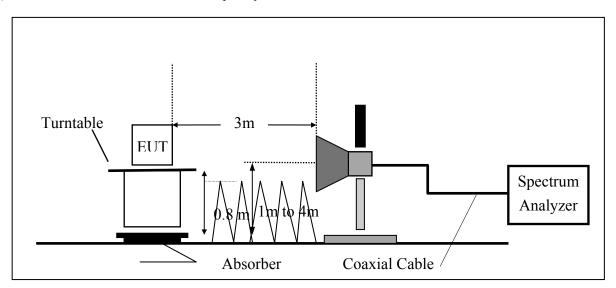

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 72 of 140

12.5 **Measurement Equipment Used:**

SGS SAC Chamber No.C					
N. C.F.	CF : M. C. A. M. I		Serial Num-	Calibration	Calibration
Name of Equipment	Name of Equipment Manufacturer M	Model	ber	Date	Due
Signal Analyzer	R&S	FSV 40	101493	01/07/2014	01/06/2015
EMI Test Receiver	R&S	ESCI 7	100950	01/11/2014	01/10/2015
Broadband Antenna	TESEQ	CBL 6112D	35240	01/17/2014	01/16/2015
Horn Antenna	ETS-Lindgren	3117	00143272	01/27/2014	01/26/2015
Horn Antenna	ETS-Lindgren	3160-09	00117911	01/22/014	01/21/2015
Horn Antenna	ETS-Lindgren	3160-10	00117783	01/22/2014	01/21/2015
Pre-Amplifier	R&S	SCU-18	10203	04/29/2013	04/28/2014
Pre-Amplifier	EM Electronics Corp.	EMC330	980096	01/24/2014	01/23/2015
Pre-Amplifier	EM Electronics Corp.	EMC184045	980135	01/24/2014	01/23/2015
Coaxial Cable	Huber+Suhner	SAC-C TX-30M-1G Hz	TX1	04/22/2013	04/21/2014
Coaxial Cable	Huber+Suhner	SAC-C TX-1-26.5G Hz	TX2	04/22/2013	04/21/2014
Coaxial Cable	Huber+Suhner	SAC-C RX-150k-30 MHz	RX1	04/22/2013	04/21/2014
Coaxial Cable	Huber+Suhner	SAC-C RX-30M-1G Hz	RX2	04/22/2013	04/21/2014
Coaxial Cable	Huber+Suhner	SAC-C RX-1-26.5G Hz	RX3	04/22/2013	04/21/2014
Filter Bank	R&S	TS8996	SCIN.EMC.1 023.12	04/22/2013	04/21/2014
Attenuator	WOKEN	218FS-10	HY-151	01/06/2014	01/05/2015
Controller	Chance Most	886	N/A	N.C.R.	N.C.R.
Antenna Master	Chance Most	N/A	N/A	N.C.R.	N.C.R.
Turn Table	Chance Most	N/A	N/A	N.C.R.	N.C.R.
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未總本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appropriate in languaged and the propriate of the follows. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 73 of 140

12.6 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	
	RA = Reading Amplitude

12.7 **Measurement Result**

Refer to attach tabular data sheets.

NOTE:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 74 of 140

Radiated Spurious Emission Measurement Result 802.11a, 5150~5250 MHz

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5180 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10360.00	Peak	Н	38.70	15.31	54.02	68.30	-14.28
15540.00	Н						
20720.00	Н						
25900.00	Н						
31080.00	Н						
36260.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 75 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5180 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

:H Plan EUT Pol. Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10360.00	Peak	Н	38.39	15.31	53.70	68.30	-14.60
15540.00	Н						
20720.00	Н						
25900.00	Н						
31080.00	Н						
36260.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 76 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5220 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX MID Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10440.00	Peak	Н	38.44	15.68	54.12	68.30	-14.18
15660.00	Н						
20880.00	Н						
26100.00	Н						
31320.00	Н						
36540.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 77 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5220 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10440.00	Peak	Н	39.88	15.99	55.87	68.30	-12.43
15660.00	Н						
20880.00	Н						
26100.00	Н						
31320.00	Н						
36540.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 78 of 140

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5240 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10480.00	Peak	Н	38.46	16.23	54.68	68.30	-13.62
15720.00	Н						
20960.00	Н						
26200.00	Н						
31440.00	Н						
36680.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 79 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5240 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10480.00	Peak	Н	38.39	16.23	54.62	68.30	-13.68
15720.00	Н						
20960.00	Н						
26200.00	Н						
31440.00	Н						
36680.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 80 of 140

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5180 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5150.0	0 Peak	E	61.22	6.12	67.34	74.00	-6.66
5150.0	0 Average	E	41.88	6.12	48.00	54.00	-6.00

Operation Band Test Date 2014-04-08 :802.11 a

Fundamental Frequency :5180 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBµV/m	dB
5150.00	Peak	E	54.67	6.12	60.78	74.00	-13.22
5150.00	Average	E	39.92	6.12	46.04	54.00	-7.97

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 81 of 140

Radiated Spurious Emission Measurement Result 802.11n HT20, 5150~5250 MHz (MIMO)

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5180 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{dB}\mu\mathrm{V}$	dB	dBμV/m	dBμV/m	dB
10360.00	Peak	Н	40.98	15.56	56.54	68.30	-11.76
15540.00	Н						
20720.00	Н						
25900.00	Н						
31080.00	Н						
36260.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 82 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5180 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10360.00	Peak	Н	38.75	15.31	54.07	68.30	-14.23
15540.00	Н						
20720.00	Н						
25900.00	Н						
31080.00	Н						
36260.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 83 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5220 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode Engineer :TX MID :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	$dB\mu V/m$	dBμV/m	dB
10440.00	Peak	Н	42.98	15.68	58.66	68.30	-9.64
15660.00	Н						
20880.00	Н						
26100.00	Н						
31320.00	Н						
36540.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 84 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5220 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	$dB\mu V/m$	dBμV/m	dB
10440.00	Peak	Н	41.10	15.68	56.78	68.30	-11.52
15660.00	Н						
20880.00	Н						
26100.00	Н						
31320.00	Н						
36540.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 85 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5240 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBµV/m	dB
10480.00	Peak	Н	42.58	16.23	58.81	68.30	-9.49
15720.00	Н						
20960.00	Н						
26200.00	Н						
31440.00	Н						
36680.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 86 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5240 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	dBμV/m	dBμV/m	dB
10480.00	Peak	Н	40.91	16.23	57.13	68.30	-11.17
15720.00	Н						
20960.00	Н						
26200.00	Н						
31440.00	Н						
36680.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 87 of 140

Operation Band :802.11 n20M Test Date :2014-04-08

Fundamental Frequency :5180 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Free	q. Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MH	z PK/QP/AV	F/H/E/S	dΒμV	dB	dBµV/m	dBμV/m	dB
5150	00 Peak	E	66.13	6.12	72.25	74.00	-1.75
5150	00 Average	E	46.79	6.12	52.91	54.00	-1.10

Operation Band :802.11 n20M Test Date 2014-04-08

Fundamental Frequency :5180 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5150.00	Peak	E	66.22	6.12	72.33	74.00	-1.67
5150.00	Average	E	46.68	6.12	52.80	54.00	-1.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 88 of 140

Radiated Spurious Emission Measurement Result 802.11n HT40, 5150~5250 MHz (MIMO)

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5190 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{dB}\mu\mathrm{V}$	dB	dBμV/m	dBμV/m	dB
10380.00	Peak	Н	37.94	15.80	53.74	68.30	-14.56
15570.00	Н						
20760.00	Н						
25950.00	Н						
31140.00	Н						
36330.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 89 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5190 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	$dB\mu V/m$	dBμV/m	dB
10380.00	Peak	Н	37.84	15.80	53.64	68.30	-14.66
15570.00	Н						
20760.00	Н						
25950.00	Н						
31140.00	Н						
36330.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 90 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5230 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10460.00	Peak	Н	40.48	15.76	56.24	68.30	-12.06
15690.00	Н						
20920.00	Н						
26150.00	Н						
31380.00	Н						
36610.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 91 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5230 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10460.00	Peak	Н	39.69	15.76	55.45	68.30	-12.85
15690.00	Н						
20920.00	Н						
26150.00	Н						
31380.00	Н						
36610.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 92 of 140

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5190 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBµV/m	dB
5150.00	Peak	E	65.28	6.12	71.40	74.00	-2.60
5150.00	Average	E	46.80	6.12	52.92	54.00	-1.08

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5190 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5150.00	Peak	E	65.26	6.12	71.38	74.00	-2.62
5150.00	Average	E	45.36	6.12	51.48	54.00	-2.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 93 of 140

Radiated Spurious Emission Measurement Result 802.11a, 5250MHz-5350MHz

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5260 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	Н	39.60	16.27	55.87	68.30	-12.43
15780.00	Н						
21040.00	Н						
26300.00	Н						
31560.00	Н						
36820.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 94 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5260 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	Н	38.40	16.27	54.67	68.30	-13.63
15780.00	Н						
21040.00	Н						
26300.00	Н						
31560.00	Н						
36820.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 95 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5300 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX MID Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10600.00	Peak	Н	40.33	16.43	56.76	74.00	-17.24
10600.00	Average	Н	26.75	16.43	43.18	54.00	-10.82
15900.00	Н						
21200.00	Н						
26500.00	Н						
31800.00	Н						
37100.00	Н						

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

f (886-2) 2298-0488 www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 96 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5300 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBµV/m	dBμV/m	dB
10600.00	Peak	Н	38.51	16.43	54.94	74.00	-19.06
10600.00	Average	Н	26.62	16.43	43.05	54.00	-10.95
15900.00	Н						
21200.00	Н						
26500.00	Н						
31800.00	Н						
37100.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 97 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5320 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
 MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10640.00	Peak	Н	39.00	15.97	54.97	74.00	-19.03
10640.00	Average	Н	26.37	15.97	42.34	54.00	-11.66
15960.00	Н						
21280.00	Н						
26600.00	Н						
31920.00	Н						
37240.00	Н						

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 98 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5320 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

:H Plan EUT Pol. Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10640.00	Peak	Н	38.56	15.97	54.53	74.00	-19.48
10640.00	Average	Н	26.41	15.97	42.38	54.00	-11.62
15960.00	Н						
21280.00	Н						
26600.00	Н						
31920.00	Н						
37240.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 99 of 140

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5320 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5350.00	Peak	E	56.13	6.66	62.78	74.00	-11.22
5350.00	Average	E	38.88	6.66	45.54	54.00	-8.46

Operation Band Test Date 2014-04-08 :802.11 a

Fundamental Frequency :5320 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5350.00	Peak	E	54.89	6.66	61.54	74.00	-12.46
5350.00	Average	E	38.91	6.66	45.57	54.00	-8.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 100 of 140

Radiated Spurious Emission Measurement Result 802.11n HT20, 5250~5350 MHz (MIMO)

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5260 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	Н	42.98	16.27	59.25	68.30	-9.05
15780.00	Н						
21040.00	Н						
26300.00	Н						
31560.00	Н						
36820.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 101 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5260 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10520.00	Peak	Н	40.94	16.27	57.21	68.30	-11.09
15780.00	Н						
21040.00	Н						
26300.00	Н						
31560.00	Н						
36820.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 102 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5300 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX MID Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBµV/m	dBμV/m	dB
10600.00	Peak	Н	40.85	16.43	57.28	74.00	-16.72
10600.00	Average	Н	28.50	16.43	44.93	54.00	-9.07
15900.00	Н						
21200.00	Н						
26500.00	Н						
31800.00	Н						
37100.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 103 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5300 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10610.00	Peak	Н	41.56	16.32	57.87	74.00	-16.13
10610.00	Average	Н	28.94	16.32	45.26	54.00	-8.74
15900.00	Н						
21200.00	Н						
26500.00	Н						
31800.00	Н						
37100.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 104 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5320 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10640.00	Peak	Н	42.09	15.97	58.06	74.00	-15.94
10640.00	Average	Н	27.84	15.97	43.81	54.00	-10.19
15960.00	Н						
21280.00	Н						
26600.00	Н						
31920.00	Н						
37240.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 105 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5320 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10640.00	Peak	Н	40.50	15.97	56.47	74.00	-17.53
10640.00	Average	Н	28.31	15.97	44.28	54.00	-9.72
15960.00	Н						
21280.00	Н						
26600.00	Н						
31920.00	Н						
37240.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 106 of 140

Operation Band :802.11 n20M Test Date :2014-04-08

Fundamental Frequency :5320 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
 MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5350.00	Peak	E	61.84	6.66	68.49	74.00	-5.51
5350.00	Average	E	45.57	6.66	52.23	54.00	-1.77
5350.80	Peak	S	64.86	6.65	71.52	74.00	-2.48
5350.80	Average	S	45.76	6.65	52.41	54.00	-1.59

:2014-04-08 **Operation Band** :802.11 n20M Test Date

Fundamental Frequency :5320 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken

EUT Pol. :HORIZONTAL :H Plan Measurement Antenna Pol.

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5350.00	Peak	E	63.14	6.66	69.80	74.00	-4.20
5350.00	Average	E	45.45	6.66	52.11	54.00	-1.89
5352.60	Peak	S	66.40	6.65	72.99	74.00	-1.01
5352.60	Average	S	42.64	6.65	49.29	54.00	-4.71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 107 of 140

Radiated Spurious Emission Measurement Result 802.11n HT40, 5250~5350 MHz (MIMO)

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5270 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	$dB\mu V/m$	dBμV/m	dB
10540.00	Peak	Н	40.99	15.85	56.84	68.30	-11.46
15810.00	Н						
21080.00	Н						
26350.00	Н						
31620.00	Н						
36890.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 108 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5270 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	dBμV/m	dBμV/m	dB
10540.00	Peak	Н	38.86	15.85	54.71	68.30	-13.59
15810.00	Н						
21080.00	Н						
26350.00	Н						
31620.00	Н						
36890.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 109 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5310 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10620.00	Peak	Н	38.18	16.20	54.38	74.00	-19.62
10620.00	Average	Н	25.25	16.20	41.45	54.00	-12.55
15930.00	Н						
21240.00	Н						
26550.00	Н						
31860.00	Н						
37170.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 110 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5310 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
10640.00	Peak	Н	39.69	15.97	55.66	74.00	-18.34
10640.00	Average	Н	25.05	15.97	41.02	54.00	-12.98
15930.00	Н						
21240.00	Н						
26550.00	Н						
31860.00	Н						
37170.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 111 of 140

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5310 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBµV/m	dB
5350.00	Peak	E	61.64	6.66	68.29	74.00	-5.71
5350.00	Average	E	43.93	6.66	50.59	54.00	-3.41

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5310 MHz Temp./Humi. :25.4 deg C / 57 RH

Engineer Operation Mode :Bandedge HIGH :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5350.00	Peak	Е	64.06	6.66	70.72	74.00	-3.28
5350.00	Average	Е	45.52	6.66	52.18	54.00	-1.82

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 112 of 140

Radiated Spurious Emission Measurement Result 802.11a, 5470~5725 MHz

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11000.00	Peak	Н	38.82	16.23	55.05	74.00	-18.95
11000.00	Average	Н	26.81	16.23	43.04	54.00	-10.96
16500.00	Н						
22000.00	Н						
27500.00	Н						
33000.00	Н						
38500.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 113 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
 MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBµV/m	dBμV/m	dB
11000.00	Peak	Н	38.93	16.23	55.16	74.00	-18.84
11000.00	Average	Н	26.36	16.23	42.59	54.00	-11.41
16500.00	Н						
22000.00	Н						
27500.00	Н						
33000.00	Н						
38500.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 114 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5580 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX MID Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11160.00	Peak	Н	38.94	17.50	56.44	74.00	-17.56
11160.00	Average	Н	26.12	17.50	43.62	54.00	-10.38
16740.00	Н						
22320.00	Н						
27900.00	Н						
33480.00	Н						
39060.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 115 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5580 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBµV/m	dBμV/m	dB
11160.00	Peak	Н	38.41	17.50	55.91	74.00	-18.09
11160.00	Average	Н	26.02	17.50	43.52	54.00	-10.48
16740.00	Н						
22320.00	Н						
27900.00	Н						
33480.00	Н						
39060.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 116 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11400.00	Peak	Н	38.26	17.42	55.68	74.00	-18.32
11400.00	Average	Н	26.02	17.42	43.44	54.00	-10.56
17100.00	Н						
22800.00	Н						
28500.00	Н						
34200.00	Н						
39900.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 117 of 140

Operation Band :802.11 a **Test Date** :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11400.00	Peak	Н	38.66	17.42	56.08	74.00	-17.92
11400.00	Average	Н	26.21	17.42	43.63	54.00	-10.37
17100.00	Н						
22800.00	Н						
28500.00	Н						
34200.00	Н						
39900.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 118 of 140

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5350.00	Peak	E	56.13	6.66	62.78	74.00	-11.22
5350.00	Average	E	38.88	6.66	45.54	54.00	-8.46

Operation Band Test Date :2014-04-08 :802.11 a

Fundamental Frequency :5500 MHz Temp./Humi. :25.4 deg C / 57 RH

Engineer Operation Mode :Bandedge LOW :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBµV/m	dBµV/m	dB
5350.00	Peak	E	54.89	6.66	61.54	74.00	-12.46
5350.00	Average	E	38.91	6.66	45.57	54.00	-8.43

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 119 of 140

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	$dB\mu V/m$	dBμV/m	dB
5470.00	Peak	E	56.55	6.41	62.96	68.30	-5.34

Operation Band Test Date :2014-04-08 :802.11 a

Fundamental Frequency :5500 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

 $Factor(dB) = Antenna \; Factor(dB\mu V/m) + Cable \; Loss(dB) - Pre_Amplifier \; Gain(dB)$

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
		Mode		Reading Level		FS	@3m	
_	MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	dBμV/m	dBμV/m	dB
	5470.00	Peak	Е	56.69	6.41	63.10	68.30	-5.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this less report teler only to me sample(s) tested and such sample(s) are fetalined for 90 days only.

Pk 非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without print without price of this document is required and the produced except in full, without prior or the land. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 120 of 140

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :25.4 deg_C / 57 RH

Operation Mode :Bandedge HIGH Engineer EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	${ m d} B \mu V$	dB	dBμV/m	dBμV/m	dB
5725.00	Peak	E	58.34	7.15	65.50	68.30	-2.80

Operation Band :802.11 a Test Date :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	$dB\mu V/m$	dBμV/m	dB
5725.0	00 Peak	Е	59.41	7.15	66.56	68.30	-1.74

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 121 of 140

Radiated Spurious Emission Measurement Result 802.11n HT20, 5470~5725 MHz (MIMO)

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11000.00	Peak	Н	39.34	16.49	55.83	74.00	-18.17
11000.00	Average	Н	25.31	16.49	41.80	54.00	-12.20
16500.00	Н						
22000.00	Н						
27500.00	Н						
33000.00	Н						
38500.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 122 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11000.0	0 Peak	Н	40.16	16.38	56.54	74.00	-17.46
11000.0	0 Average	Н	24.62	16.38	41.00	54.00	-13.00
16500.0	0 H						
22000.0	0 H						
27500.0	0 H						
33000.0	0 H						
38500.0	0 Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 123 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5580 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode Engineer :TX MID :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11160.00	Peak	Н	39.22	17.50	56.72	74.00	-17.28
11160.00	Average	Н	27.01	17.50	44.51	54.00	-9.49
16740.00	Н						
22320.00	Н						
27900.00	Н						
33480.00	Н						
39060.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 124 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5580 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11160.00	Peak	Н	38.67	17.50	56.18	74.00	-17.82
11160.00	Average	Н	26.97	17.50	44.47	54.00	-9.53
16740.00	Н						
22320.00	Н						
27900.00	Н						
33480.00	Н						
39060.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 125 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11400.00	Peak	Н	37.98	17.42	55.40	74.00	-18.60
11400.00	Average	Н	25.38	17.42	42.80	54.00	-11.20
17100.00	Н						
22800.00	Н						
28500.00	Н						
34200.00	Н						
39900.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 126 of 140

Operation Band :802.11 n20M **Test Date** :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11420.00	Peak	Н	39.65	17.64	57.29	74.00	-16.71
11420.00	Average	Н	25.07	17.64	42.71	54.00	-11.29
17100.00	Н						
22800.00	Н						
28500.00	Н						
34200.00	Н						
39900.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 127 of 140

Operation Band :802.11 n20M Test Date :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5460.00	Peak	E	54.27	6.43	60.70	74.00	-13.30
5460.00	Average	E	40.64	6.43	47.07	54.00	-6.93

Operation Band :802.11 n20M Test Date :2014-04-08

Fundamental Frequency :5500 MHz Temp./Humi. :25.4 deg C / 57 RH

Engineer Operation Mode :Bandedge LOW :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBμV	dB	dBμV/m	dBµV/m	dB
5460.00	Peak	E	55.24	6.43	61.67	74.00	-12.33
5460.00	Average	Е	39.70	6.43	46.13	54.00	-7.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 128 of 140

Operation Band :802.11 n20M Test Date :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :25.4 deg_C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	${ m d} B \mu V$	dB	$dB\mu V/m$	dBμV/m	dB
5725.00	Peak	E	55.74	7.15	62.89	68.30	-5.41

Operation Band :802.11 n20M Test Date :2014-04-08

Fundamental Frequency :5700 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	dBμV/m	dBμV/m	dB
5725.00	Peak	Е	56.44	7.15	63.60	68.30	-4.70

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 129 of 140

Radiated Spurious Emission Measurement Result 802.11n HT40, 5470~5725 MHz (MIMO)

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5510 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
		Mode		Reading Level		FS	@3m	
	MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
1	1020.00	Peak	Н	39.90	16.83	56.72	74.00	-17.28
1	1020.00	Average	Н	25.06	16.83	41.89	54.00	-12.11
10	6530.00	Н						
22	2040.00	Н						
2	7550.00	Н						
33	3060.00	Н						
38	8570.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 130 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5510 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX LOW Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11020.00	Peak	Н	38.82	16.53	55.34	74.00	-18.66
11020.00	Average	Н	25.28	16.53	41.81	54.00	-12.19
16530.00	Н						
22040.00	Н						
27550.00	Н						
33060.00	Н						
38570.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 131 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5550 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode Engineer :TX MID :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11100.00	Peak	Н	39.06	16.77	55.83	74.00	-18.18
11100.00	Average	Н	26.23	16.77	43.00	54.00	-11.00
16650.00	Н						
22200.00	Н						
27750.00	Н						
33300.00	Н						
38850.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 132 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5550 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX MID Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11100.00	Peak	Н	39.19	16.77	55.96	74.00	-18.04
11100.00	Average	Н	26.14	16.77	42.91	54.00	-11.09
16650.00	Н						
22200.00	Н						
27750.00	Н						
33300.00	Н						
38850.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 133 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5670 MHz Temp./Humi. :24 deg C / 61 RH

Operation Mode :TX HIGH Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11340.00	Peak	Н	37.81	17.49	55.29	74.00	-18.71
11340.00	Average	Н	25.65	17.49	43.14	54.00	-10.86
17010.00	Н						
22680.00	Н						
28350.00	Н						
34020.00	Н						
39690.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 134 of 140

Operation Band :802.11 n40M **Test Date** :2014-04-08

Fundamental Frequency :5670 MHz Temp./Humi. :24 deg_C / 61 RH

Operation Mode :TX HIGH Engineer

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
11340.00	Peak	Н	37.66	17.49	55.15	74.00	-18.85
11340.00	Average	Н	25.13	17.49	42.62	54.00	-11.38
17010.00	Н						
22680.00	Н						
28350.00	Н						
34020.00	Н						
39690.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 135 of 140

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5510 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dΒμV	dB	dBμV/m	dBμV/m	dB
5460.00	Peak	E	52.49	6.43	58.92	74.00	-15.08
5460.00	Average	E	38.20	6.43	44.63	54.00	-9.37

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5510 MHz Temp./Humi. :25.4 deg C / 57 RH

Engineer Operation Mode :Bandedge LOW :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency. Note:

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBμV	dB	dBµV/m	dBµV/m	dB
5460.00	Peak	E	56.43	6.43	62.86	74.00	-11.14
5460.00	Average	E	38.21	6.43	44.64	54.00	-9.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留到天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司

t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sqs.com



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 136 of 140

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5510 MHz Temp./Humi. :25.4 deg_C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	${ m d} B \mu V$	dB	$dB\mu V/m$	dBμV/m	dB
5470.00	Peak	E	58.17	6.41	64.58	68.30	-3.72

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5510 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge LOW Engineer :Aken

EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
 MHz	PK/QP/AV	F/H/E/S	${ m d} B \mu V$	dB	dBμV/m	dBμV/m	dB
5470.00	Peak	Е	58.36	6.41	64.77	68.30	-3.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 137 of 140

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5670 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer EUT Pol. :H Plan Measurement Antenna Pol. :VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	$\mathrm{d} B \mu V$	dB	dBμV/m	dBµV/m	dB
5725.00	Peak	Е	58.22	7.15	65.38	68.30	-2.92

Operation Band :802.11 n40M Test Date :2014-04-08

Fundamental Frequency :5670 MHz Temp./Humi. :25.4 deg C / 57 RH

Operation Mode :Bandedge HIGH Engineer :Aken

EUT Pol. :HORIZONTAL :H Plan Measurement Antenna Pol.

Actual $FS(dB\mu V/m) = SPA$. Reading level $(dB\mu V) + Factor(dB)$

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F": denotes Fundamental Frequency.; "H": denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---": denotes Noise Floor.

The trace on RE (radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	${ m d} B \mu V$	dB	dBμV/m	dBμV/m	dB
5725.00	Peak	Е	57.82	7.15	64.98	68.30	-3.32

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279

台灣檢驗科技股份有限公司



Report No.: E2/2014/30021 Issue Date: Apr. 10, 2014

Page 138 of 140

13. TRANSMISSION IN THE ABSENCE OF DATA

13.1 Standard Applicable

According to §15.407(c)

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

According to RSS-210 A9.4(4)

The device shall automatically discontinue transmission in case of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signaling information or the use of repetitive codes where required by the technology.

13.2 Result:

No non-compliance noted:

Refer to the theory of operation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 139 of 140

14. FREQUENCY STABILITY

Standard Applicable

According to §15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

14.2 **Result:**

N/A.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卯天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or approval of this document is unquited and find the prior that the full terms of the low. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279



Report No.: E2/2014/30021 **Issue Date: Apr. 10, 2014**

Page 140 of 140

15. ANTENNA REQUIREMENT

Standard Applicable 15.1

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

According to RSS-GEN 7.1.2, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

15.2 **Antenna Connected Construction**

The directional gains of antenna used for transmitting is 2.00dBi for frequency band of 5150~5725MHz, 1.22dBi for 802.11 a/n20, 1.22dBi for 802.11 n40 (5150~5250MHz MIMO gain); 2.22dBi for 802.11 a/n20, 2.22dBi for 802.11 n40 (5250~5350MHz MIMO gain), and 3.54dBi for 802.11 a/n20, 3.54dBi for 802.11 n40 (5470~5725MHz MIMO Gain), and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec.for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.