

Date: 2015-09-01 No.: DM120749	Page 1 of 84		
Applicant:	HORI Co., Ltd. 640 Saedo-Cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken 224-0054, Japan		
Manufacturer:	HORI Co., Ltd. 640 Saedo-Cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken 224-0054, Japan		
Description of Sample(s):	Product:HORI PAD ULTIMATEBrand Name:HORIModel Number:HIP-047(U/E)FCC ID:RQZHIP-1850		
Date Sample(s) Received:	2015-08-21		
Date Tested:	2015-08-25 to 2015-09-01		
Investigation Requested:	Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 and ANSI C63.4: 2009 for FCC Certification.		
Conclusion(s):	The submitted product <u>COMPLIED</u> with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.		
Remark(s):	LONG Yun Jian, Along Authorized Signatory ElectroMagnetic Compatibility Department For and on behalf of STC (Dongguan) Company Limited		

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



	2015-09-01 DM120749	Page 2 of 84
CONT	ENT:	
	Cover Content	Page 1 of 84 Page 2 of 84
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 3 of 84
1.2	Equipment Under Test [EUT] Description of EUT operation	Page 3 of 84
1.3	Date of Order	Page 3 of 84
1.4	Submitted Sample	Page 3 of 84
1.5	Test Duration	Page 3 of 84
1.6	Country of Origin	Page 3 of 84
1.7	RF Module Details	Page 4 of 84
1.8	Antenna Details	Page 4 of 84
<u>2.0</u>	Technical Details	
2.1	Investigations Requested	Page 5 of 84
2.2	Test Standards and Results Summary	Page 5 of 84
2.3	Table for Test Modes	Page 6 of 84
<u>3.0</u>	Test Results	
3.1	Emission	Page 7 – 78 of 84
	<u>Appendix A</u> List of Measurement Equipment	Page 79 of 84
	<u>Appendix B</u> Ancillary Equipment	Page 80 of 84
	Appendix C Photographs	Page 81-84 of 84

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 3 of 84

<u>1.0</u> General Details

1.1 Test Laboratory

STC (Dongguan) Company Limited EMC Laboratory 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, China Telephone: (86 769) 81119888 Fax: (86 769) 81116222

1.2 Equipment Under Test [EUT] Description of Sample(s)

Product:HORI PAD ULTIMATEManufacturer:HORI Co., Ltd.
640 Saedo-Cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken
224-0054, JapanBrand Name:HORIModel Number:HIP-047(U/E)Rating:5.0Vd.c. (Powered by USB port) / Li-ion rechargeable
battery x1 = 3.7Vd.c

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a HORI PAD ULTIMATE. The r.f. signal was modulated by IC and type of modulation was frequency hopping spread spectrum Modulation.

1.3 Date of Order

2015-08-21

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2015-08-25 to 2015-09-01

1.6 Country of Origin

China

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 4 of 84

1.7 **RF Module Details**

Module Model Number:	CSRB5342
Module FCC ID:	
Module Transmission Type:	Bluetooth V4.1+ EDR
Modulation:	FHSS (GFSK / π /4-DQPSK / 8DPSK)
Data Rates:	1MBps: GFSK
	2 MBps: π/4-DQPSK
	3 MBps: 8DPSK
Frequency Range:	2400-2483.5MHz
Carrier Frequencies:	2402MHz - 2480MHz

Module Specification (specification provided by manufacturer)

1.8 Antenna Details

Antenna Type:	PCB antenna
Antenna Gain:	-3.41dBi

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 5 of 84

2.0 <u>Technical Details</u>

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 Regulations. FCC Pubic Notice DA 00-705 and ANSI C63.4: 2009 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
			est Resi	esult		
			Severity	Pass	Fail	N/A
Maximum Peak Conducted Output Power	FCC 47CFR 15.247(b)(1)	FCC Pubic Notice DA 00-705	N/A			
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A			
AC Mains Conducted Emissions	FCC 47CFR 15.207	ANSI C63.4:2009	N/A	\square		
Number of Hopping Frequency	FCC 47CFR 15.247 (b)(1)	FCC Pubic Notice DA 00-705	N/A			
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	FCC Pubic Notice DA 00-705	N/A			
Hopping Channel Separation	FCC 47CFR 15.247(a)(1)	FCC Pubic Notice DA 00-705	N/A			
Band-edge measurement (Radiated)	FCC 47CFR 15.247(d)	FCC Pubic Notice DA 00-705	N/A			
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A			
Time of Occupancy (Dwell Time)	FCC 47CFR 15.247(a)(1)(iii)	FCC Pubic Notice DA 00-705	N/A	\boxtimes		
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	\boxtimes		
RF Exposure	FCC 47CFR 15.247(i)	N/A	N/A	\boxtimes		

Note: N/A – Not Applicable

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 6 of 84

2.3 Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate in the table below is the worst case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The device was realized by test software.

The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate
Maximum Peak Conducted Output Power	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Hopping Channel Separation	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Number of Hopping Frequency	GFSK / π/4-DQPSK / 8DPSK	2MBps
Time of Occupancy(Dwell Time)	8DPSK (DH1 / DH3 / DH5)	2MBps
Radiated Spurious Emissions	GFSK / π/4-DQPSK / 8DPSK	1MBps / 2MBps / 3MBps
Band-edge compliance of Conducted Emission	GFSK / π/4-DQPSK / 8DPSK	2MBps

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 7 of 84

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Conducted Output Power

Test Requirement:	FCC 47CFR 15.247(b)(1)
Test Method:	FCC Pubic Notice DA 00-705
Test Date:	2015-08-29
Mode of Operation:	Tx mode


Test Method:

A temporary antenna connector was soldered to the RF output. The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in dBm.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz Detector = Peak, Trace = Max. hold

Test Setup:

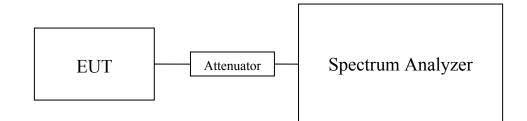

Note: a temporary antenna connector was soldered to the RF output.

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 8 of 84

Limits for Maximum Peak Conducted Output Power [FCC 47CFR 15.247]:

The maximum peak output power shall not exceeded the following limits: For frequency hopping systems employing at least 75 hopping channels: 1 Watt For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Bluetooth Communication mode (GFSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.001472
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.001429
· · · · · ·	
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.001012

Results of Bluetooth Communication mode (π/4-DQPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000873
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000881
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000627

Results of Bluetooth Communication mode (8 DPSK) (Fundamental Power): Pass

Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2402	0.000989
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2441	0.000955
Transmitter Frequency (MHz)	Maximum conducted output power (Watt)
2480	0.000684

Calculated measurement uncertainty

: 30MHz to 1GHz 1.7dB 1GHz to 18GHz 1.7dB

Remark:

1. All test data for each data rate were verified, but only the worst case was reported.

2. The EUT is programmed to transmit signals continuously for all testing.


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749 Page 9 of 84

Test plot of Maximum Peak Conducted Output Power : Bluetooth Communication mode (GFSK, 2402MHz)

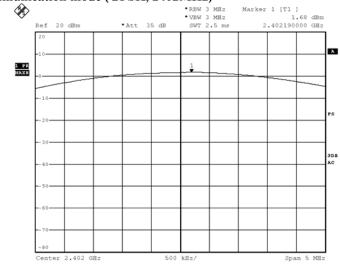

BMP Date: 29.AUG.2015 11:11:04

Bluetooth Communication mode (GFSK, 2441MHz)

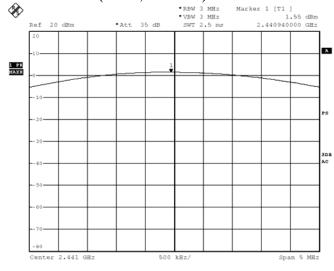

BMP Date: 29.AUG.2015 11:15:35


STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749 Page 10 of 84

Bluetooth Communication mode (GFSK, 2480MHz)

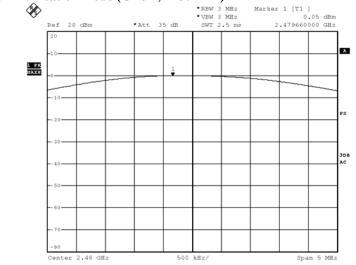

BMP Date: 29.AUG.2015 11:18:24

Bluetooth Communication mode (π/4-DQPSK, 2402MHz)

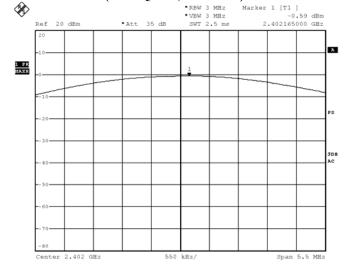


BMP Date: 29.AUG.2015 11:20:58

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749 Page 11 of 84

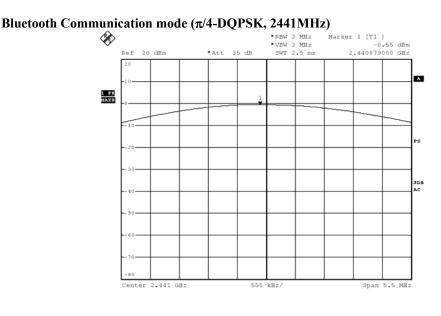

BMP

Date: 29.AUG.2015 11:20:02

Bluetooth Communication mode (π/4-DQPSK, 2480MHz)

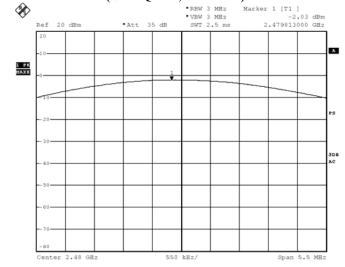

BMP Date: 29.AUG.2015 11:19:12

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749 Page 12 of 84

λ

3DB AC

Span 5.5 MHz




BMP Date: 29.AUG.2015 11:24:52

Center 2.402 GHz

40

-80

Bluetooth Communication mode (8DPSK, 2441MHz)

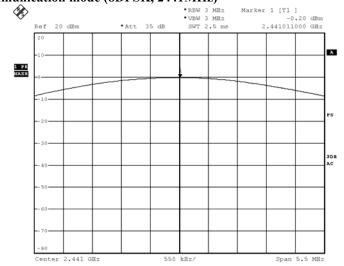

550 kHz/


BMP Date: 29.AUG.2015 11:27:40

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 13 of 84

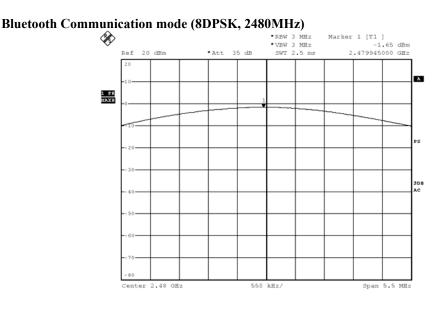

BMP Date: 29.AUG.2015 11:28:21

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 14 of 84

3.1.2 Radiated Spurious Emissions

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.4:2009
Test Date:	2015-08-31
Mode of Operation:	Tx mode/ Bluetooth mode (GFSK / π /4-DQPSK/ 8DPSK)

Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 15 of 84

Spectrum Analyzer Setting:

9KHz – 30MHz (Pk & Av)	RBW: VBW: Sweep: Span: Trace:	10kHz 30kHz Auto Fully capture the emissions being measured Max. hold
30MHz – 1GHz (QP)	RBW: VBW: Sweep: Span: Trace:	120kHz 120kHz Auto Fully capture the emissions being measured Max. hold
Above 1GHz (Pk & Av)	RBW: VBW: Sweep: Span: Trace:	1MHz 3MHz Auto Fully capture the emissions being measured Max. hold

Test Setup:

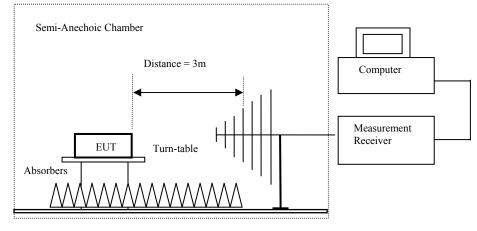

Ground Plane

- Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

- Measurements between 30MHz to 1000MHz made with Bi-log antennas, above 1000MHz horn antennas are used, 9kHz to 30MHz loop antennas are used.

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 16 of 84

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range	Quasi-Peak Limits		
[MHz]	$[\mu V/m]$		
0.009-0.490	2400/F (kHz)		
0.490-1.705	24000/F (kHz)		
1.705-30	30		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of 1 x mo	Result of 1x mode (2402.0 MHZ) (GFSK mode) (9KHZ – 50MHZ): Pass							
Field Strength of Spurious Emissions								
	Peak Value							
Frequency Measured Correction Field Field Limit E-Field								
	Level	Factor	Strength	Strength		Polarity		
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m							
	Emissions	detected are 1	nore than 20	dB below the	FCC Limits			

Result of Tx mode (2402.0 MHz) (GFSK mode) (9kHz – 30MHz): Pass

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m				
4804.0	16.0	41.5	57.5	74.0	16.5	Vertical			
4804.0	13.3	42.4	55.7	74.0	18.3	Horizontal			
7206.0	11.6	45.1	56.7	74.0	17.3	Vertical			
7206.0	7.7	46.2	53.9	74.0	20.1	Horizontal			
9608.0	7.3	48.0	55.3	74.0	18.7	Vertical			
9608.0	4	48.8	52.8	74.0	21.2	Horizontal			
12010.0	3.9	51.8	55.7	74.0	18.3	Vertical			
12010.0	0.1	52.4	52.5	74.0	21.5	Horizontal			

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 17 of 84

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	0.9	41.5	42.4	54.0	11.6	Vertical			
4804.0	-1.9	42.4	40.5	54.0	13.5	Horizontal			
7206.0	-3.7	45.1	41.4	54.0	12.6	Vertical			
7206.0	-7.4	46.2	38.8	54.0	15.2	Horizontal			
9608.0	-7.9	48.0	40.1	54.0	13.9	Vertical			
9608.0	-11.2	48.8	37.6	54.0	16.4	Horizontal			
12010.0	-11.5	51.8	40.3	54.0	13.7	Vertical			
12010.0	-15.0	52.4	37.4	54.0	16.6	Horizontal			

Result of Tx mode (2402.0 MHz) (GFSK mode) (Above 1GHz): Pass

Result of Tx mode (2441.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	15.6	41.6	57.2	74.0	16.8	Vertical			
4882.0	13.9	42.5	56.4	74.0	17.6	Horizontal			
7323.0	2.9	45.2	48.1	74.0	25.9	Vertical			
7323.0	7.2	46.3	53.5	74.0	20.5	Horizontal			
9764.0	5.6	48.1	53.7	74.0	20.3	Vertical			
9764.0	4.1	48.9	53.0	74.0	21.0	Horizontal			
12205.0	2.5	51.6	54.1	74.0	19.9	Vertical			
12205.0	0.2	52.5	52.7	74.0	21.3	Horizontal			

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

4882.0

4882.0

7323.0

7323.0

9764.0

9764.0

12205.0

12205.0

Page 18 of 84

E-Field Polarity

Vertical

Horizontal

Vertical

Horizontal

Vertical

Horizontal

Vertical

Horizontal

11.9

12.8

13.3

15.7

15.4

16.2

15.0

16.4

54.0

54.0

54.0

54.0

54.0

54.0

54.0

54.0

ſ			0	th of Spuriou			
L			A	verage Valu	e		
ſ	Frequency	Measured	Correction	Field	Limit	Margin	
L		Level @3m	Factor	Strength	@3m		
I	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	

Result of Tx mode (2441.0 MHz) (GFSK mode) (Above 1GHz): Pass

41.6

42.5

45.2

46.3

48.1

48.9

51.6

52.5

0.5

-1.3

-4.5

-8.0

-9.5

-11.1

-12.6

-14.9

Result of Tx mode (2480.0 MHz) (GFSK mode) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions								
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

42.1

41.2

40.7

38.3

38.6

37.8

39.0

37.6

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	15.5	41.4	56.9	74.0	17.1	Vertical			
4960.0	12.1	42.7	54.8	74.0	19.2	Horizontal			
7440.0	9.5	45.6	55.1	74.0	18.9	Vertical			
7440.0	7.1	46.5	53.6	74.0	20.4	Horizontal			
9920.0	6.4	48.6	55.0	74.0	19.0	Vertical			
9920.0	3.0	49.7	52.7	74.0	21.3	Horizontal			
12400.0	1.7	51.7	53.4	74.0	20.6	Vertical			
12400.0	-0.4	52.7	52.3	74.0	21.7	Horizontal			

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Result of Tx mode (2480.0 MHz) (GFSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4960.0	0.4	41.4	41.8	54.0	12.2	Vertical			
4960.0	-3.1	42.7	39.6	54.0	14.4	Horizontal			
7440.0	-5.8	45.6	39.8	54.0	14.2	Vertical			
7440.0	-8	46.5	38.5	54.0	15.5	Horizontal			
9920.0	-8.7	48.6	39.9	54.0	14.1	Vertical			
9920.0	-12.2	49.7	37.5	54.0	16.5	Horizontal			
12400.0	-13.6	51.7	38.1	54.0	15.9	Vertical			
12400.0	-15.5	52.7	37.2	54.0	16.8	Horizontal			

Result of Tx mode (2402.0 MHz) (π /4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Frequency Measured Correction Field Field Limit E-Field							
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4804.0	15.9	41.5	57.4	74.0	16.6	Vertical			
4804.0	13.6	42.4	56.0	74.0	18.0	Horizontal			
7206.0	10.7	45.1	55.8	74.0	18.2	Vertical			
7206.0	7.4	46.2	53.6	74.0	20.4	Horizontal			
9608.0	8.2	48.0	56.2	74.0	17.8	Vertical			
9608.0	4.9	48.8	53.7	74.0	20.3	Horizontal			
12010.0	2.5	51.8	54.3	74.0	19.7	Vertical			
12010.0	0.3	52.4	52.7	74.0	21.3	Horizontal			

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 20 of 84

Result of Tx mode (2402.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
1 5	Level @3m	Factor	Strength	@3m	U	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	-				
4804.0	0.7	41.5	42.2	54.0	11.8	Vertical				
4804.0	-1.6	42.4	40.8	54.0	13.2	Horizontal				
7206.0	-4.6	45.1	40.5	54.0	13.5	Vertical				
7206.0	-7.7	46.2	38.5	54.0	15.5	Horizontal				
9608.0	-6.9	48.0	41.1	54.0	12.9	Vertical				
9608.0	-10.3	48.8	38.5	54.0	15.5	Horizontal				
12010.0	-12.8	51.8	39.0	54.0	15.0	Vertical				
12010.0	-14.8	52.4	37.6	54.0	16.4	Horizontal				

Result of Tx mode (2441.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2441.0 MHz) (*π*/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions									
	Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	15.2	41.6	56.8	74.0	17.2	Vertical				
4882.0	13.5	42.5	56.0	74.0	18.0	Horizontal				
7323.0	1.7	45.2	46.9	74.0	27.1	Vertical				
7323.0	6.9	46.3	53.2	74.0	20.8	Horizontal				
9764.0	7.0	48.1	55.1	74.0	18.9	Vertical				
9764.0	5.3	48.9	54.2	74.0	19.8	Horizontal				
12205.0	3.1	51.6	54.7	74.0	19.3	Vertical				
12205.0	0.9	52.5	53.4	74.0	20.6	Horizontal				

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 21 of 84

Result of Tx mode (2441.0 MHz) (*π*/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions								
	Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field			
	Level @3m	Factor	Strength	@3m		Polarity			
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m				
4882.0	0.1	41.6	41.7	54.0	12.3	Vertical			
4882.0	-1.7	42.5	40.8	54.0	13.2	Horizontal			
7323.0	-5.6	45.2	39.6	54.0	14.4	Vertical			
7323.0	-8.3	46.3	38.0	54.0	16.0	Horizontal			
9764.0	-8.2	48.1	39.9	54.0	14.1	Vertical			
9764.0	-9.9	48.9	39.0	54.0	15.0	Horizontal			
12205.0	-12.1	51.6	39.5	54.0	14.5	Vertical			
12205.0	-14.2	52.5	38.3	54.0	15.7	Horizontal			

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (9kHz – 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	-		
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	-	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	15.4	41.4	56.8	74.0	17.2	Vertical				
4960.0	12.4	42.7	55.1	74.0	18.9	Horizontal				
7440.0	7.9	45.6	53.5	74.0	20.5	Vertical				
7440.0	6.2	46.5	52.7	74.0	21.3	Horizontal				
9920.0	5.8	48.6	54.4	74.0	19.6	Vertical				
9920.0	3.4	49.7	53.1	74.0	20.9	Horizontal				
12400.0	1.6	51.7	53.3	74.0	20.7	Vertical				
12400.0	0.0	52.7	52.7	74.0	21.3	Horizontal				

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 22 of 84

Result of Tx mode (2480.0 MHz) (π/4-DQPSK mode) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4960.0	0.3	41.4	41.7	54.0	12.3	Vertical				
4960.0	-2.8	42.7	39.9	54.0	14.1	Horizontal				
7440.0	-7.5	45.6	38.1	54.0	15.9	Vertical				
7440.0	-8.9	46.5	37.6	54.0	16.4	Horizontal				
9920.0	-9.4	48.6	39.2	54.0	14.8	Vertical				
9920.0	-11.8	49.7	37.9	54.0	16.1	Horizontal				
12400.0	-13.8	51.7	37.9	54.0	16.1	Vertical				
12400.0	-15.1	52.7	37.6	54.0	16.4	Horizontal				

Result of Tx mode (2402.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
Peak Value								
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m			
	Emissions detected are more than 20 dB below the FCC Limits							

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m	_	Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	15.4	41.5	56.9	74.0	17.1	Vertical				
4804.0	13.0	42.4	55.4	74.0	18.6	Horizontal				
7206.0	11.0	45.1	56.1	74.0	17.9	Vertical				
7206.0	8.7	46.2	54.9	74.0	19.1	Horizontal				
9608.0	6.3	48.0	54.3	74.0	19.7	Vertical				
9608.0	3.9	48.8	52.7	74.0	21.3	Horizontal				
12010.0	1.4	51.8	53.2	74.0	20.8	Vertical				
12010.0	0.0	52.4	52.4	74.0	21.6	Horizontal				

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 23 of 84

Result of Tx mode (2402.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions									
	Average Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4804.0	0.2	41.5	41.7	54.0	12.3	Vertical				
4804.0	-2.3	42.4	40.1	54.0	13.9	Horizontal				
7206.0	-4.3	45.1	40.8	54.0	13.2	Vertical				
7206.0	-6.4	46.2	39.8	54.0	14.2	Horizontal				
9608.0	-8.8	48.0	39.2	54.0	14.8	Vertical				
9608.0	-11.3	48.8	37.5	54.0	16.5	Horizontal				
12010.0	-13.9	51.8	37.9	54.0	16.1	Vertical				
12010.0	-15.1	52.4	37.3	54.0	16.7	Horizontal				

Result of Tx mode (2441.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

	Field Strength of Spurious Emissions							
	Peak Value							
Frequency	Measured	Correction	Field	Field	Limit	E-Field		
	Level	Factor	Strength	Strength		Polarity		
MHz	dBuV	dB/m	dBuV/m	uV/m	uV/m	-		
	Emissions	detected are 1	nore than 20	dB below the	FCC Limits			

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value									
Frequency	Measured	Correction	Field	Limit	Margin	E-Field				
	Level @3m	Factor	Strength	@3m		Polarity				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m					
4882.0	14.8	41.6	56.4	74.0	17.6	Vertical				
4882.0	12.3	42.5	54.8	74.0	19.2	Horizontal				
7323.0	2.1	45.2	47.3	74.0	26.7	Vertical				
7323.0	5.8	46.3	52.1	74.0	21.9	Horizontal				
9764.0	6.2	48.1	54.3	74.0	19.7	Vertical				
9764.0	4.3	48.9	53.2	74.0	20.8	Horizontal				
12205.0	2.6	51.6	54.2	74.0	19.8	Vertical				
12205.0	0.2	52.5	52.7	74.0	21.3	Horizontal				

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Result of Tx mode (2441.0 MHz) (8DPSK) (Above 1GHz): Pass

Field Strength of Spurious Emissions						
	Average Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	
4882.0	-0.3	41.6	41.3	54.0	12.7	Vertical
4882.0	-3.0	42.5	39.5	54.0	14.5	Horizontal
7323.0	-5.2	45.2	40.0	54.0	14.0	Vertical
7323.0	-9.3	46.3	37.0	54.0	17.0	Horizontal
9764.0	-9	48.1	39.1	54.0	14.9	Vertical
9764.0	-11.0	48.9	37.9	54.0	16.1	Horizontal
12205.0	-12.5	51.6	39.1	54.0	14.9	Vertical
12205.0	-14.9	52.5	37.6	54.0	16.4	Horizontal

Result of Tx mode (2480.0 MHz) (8DPSK) (9kHz - 30MHz): Pass

Field Strength of Spurious Emissions						
Peak Value						
Frequency	Measured	Correction	Field	Field	Limit	E-Field
	Level	Factor	Strength	Strength		Polarity
MHz	MHz dBuV dB/m dBuV/m uV/m uV/m					
Emissions detected are more than 20 dB below the FCC Limits						

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Peak Value					
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	
4960.0	15.0	41.4	56.4	74.0	17.6	Vertical
4960.0	12.6	42.7	55.3	74.0	18.7	Horizontal
7440.0	8.7	45.6	54.3	74.0	19.7	Vertical
7440.0	6.1	46.5	52.6	74.0	21.4	Horizontal
9920.0	5.2	48.6	53.8	74.0	20.2	Vertical
9920.0	2.7	49.7	52.4	74.0	21.6	Horizontal
12400.0	1.5	51.7	53.2	74.0	20.8	Vertical
12400.0	0.3	52.7	53.0	74.0	21.0	Horizontal

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Result of Tx mode (2480.0 MHz) (8DPSK) (Above 1GHz): Pass

	Field Strength of Spurious Emissions Average Value					
Frequency	Measured	Correction	Field	c Limit	Margin	E-Field
110010000	Level @3m	Factor	Strength	@3m	in Bin	Polarity
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dBuV/m	5
4960.0	-1.0	41.4	40.4	54.0	13.6	Vertical
4960.0	-2.6	42.7	40.1	54.0	13.9	Horizontal
7440.0	-6.6	45.6	39.0	54.0	15.0	Vertical
7440.0	-9.0	46.5	37.5	54.0	16.5	Horizontal
9920.0	-10	48.6	38.6	54.0	15.4	Vertical
9920.0	-12.6	49.7	37.1	54.0	16.9	Horizontal
12400.0	-13.8	51.7	37.9	54.0	16.1	Vertical
12400.0	-14.8	52.7	37.9	54.0	16.1	Horizontal

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty: (9kHz - 30MHz): 3.3dB

(30MHz - 1GHz): 4.6dB

(1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 26 of 84


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (8DPSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details (The data is the worst cases)

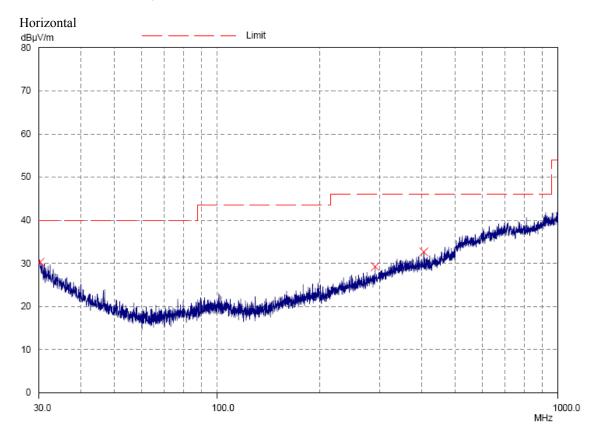

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 27 of 84

Result of Bluetooth Communication mode (8DPSK) (30MHz - 1GHz): Pass

Radiated Emissions							
	Quasi-Peak						
Emission	E-Field	Level	Limit	Level	Limit		
Frequency	Polarity	@3m	@3m	@3m	@3m		
MHz		dBµV/m	dBµV/m	μV/m	μV/m		
30.3	Horizontal	30.2	40.0	32.4	100		
291.3	Horizontal	29.2	46.0	28.8	200		
404.8	Horizontal	32.7	46.0	43.2	200		

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 28 of 84


Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range	Quasi-Peak Limits
[MHz]	[µV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Bluetooth Communication mode (8DPSK) (30MHz - 1GHz): Pass

Please refer to the following table for result details(The data is the worst cases)

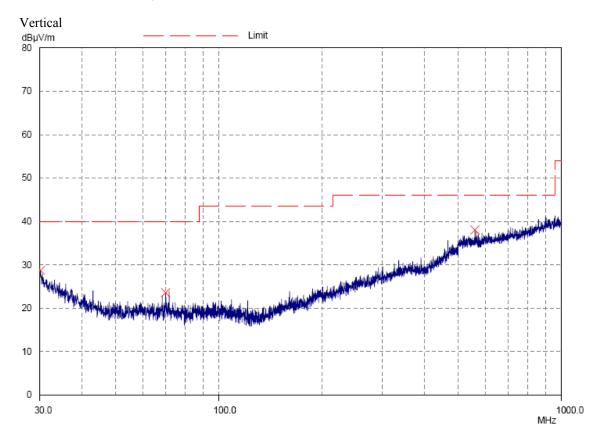

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 29 of 84

Result of Bluetooth Communication mode (8DPSK) (30MHz - 1GHz): Pass

Radiated Emissions Quasi-Peak					
Emission	E-Field	Level	Limit	Level	Limit
Frequency	Polarity	@3m	@3m	@3m	@3m
MHz		dBµV/m	dBµV/m	μV/m	μV/m
30.2	Vertical	28.7	40.0	27.2	100
70.0	Vertical	23.6	40.0	15.1	100
559.9	Vertical	38.0	46.0	79.4	200

Remarks:

Calculated measurement uncertainty (30MHz - 1GHz): 4.6dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 30 of 84


3.1.3 AC Mains Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC 47CFR 15.207
Test Method:	ANSI C63.4:2009
Test Date:	2015-08-31
Mode of Operation:	Bluetooth Communication +Charging mode
Test Voltage:	120Va.c. 60Hz

Test Method:

The test was performed in accordance with ANSI C63.4: 2009, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

Test Setup:

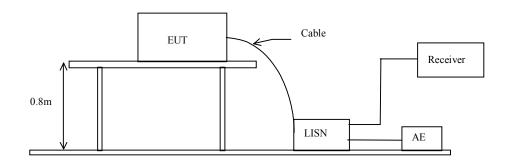

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 31 of 84

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication +Charging mode (L): PASS

Please refer to the following diagram for individual results.

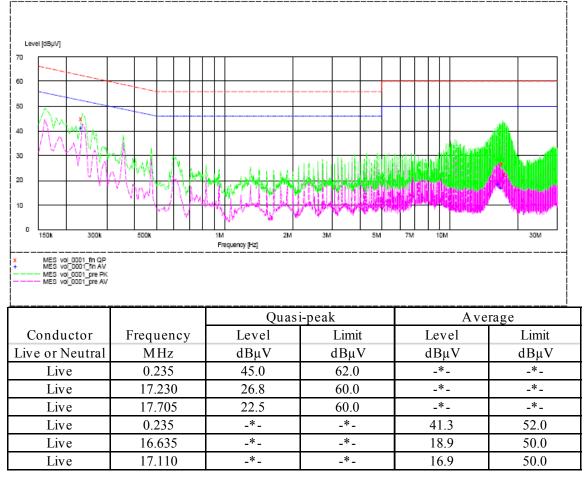

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 32 of 84

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range	Quasi-Peak Limits	Average
[MHz]	[dBµV]	[dBµV]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Result of Bluetooth Communication +Charging mode (N): PASS

Please refer to the following diagram for individual results.

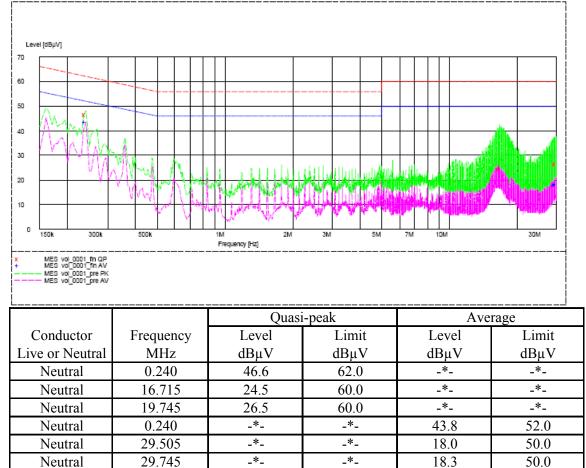

Remarks:

Calculated measurement uncertainty (0.15MHz - 30MHz): 3.2dB

-*- Emission(s) that is far below the corresponding limit line.

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 33 of 84

3.1.4 Number of Hopping Frequency

Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

Test Method:

The RF output of the EUT was connected to the spectrum analyzer by a low loss cable.

Spectrum Analyzer Setting:


RBW = 1MHz, $VBW \ge RBW$, Sweep = Auto, Span = the frequency band of operation Detector = Peak, Trace = Max. hold

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

Measurement Data:

GFSK: 79 of 79 Channel

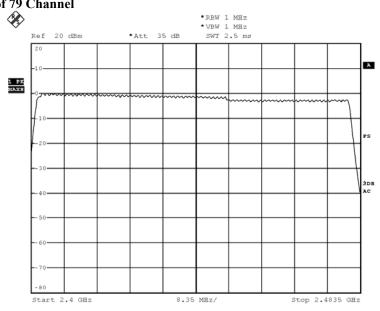

BMP Date: 28.AUG.2015 16:27:19


STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 34 of 84

Pi/4 DQPSK: 79 of 79 Channel

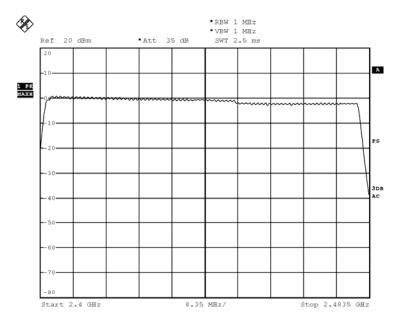


BMP Date: 28.AUG.2015 16:12:29

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 35 of 84

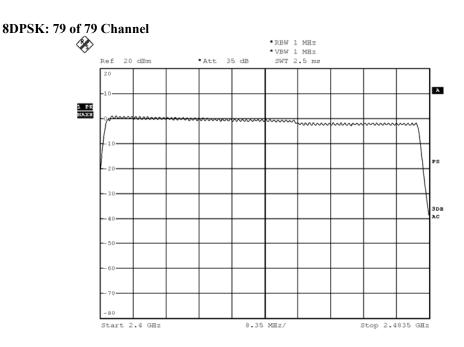

BMP Date: 28.AUG.2015 15:45:45

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 36 of 84

3.1.5 20dB Bandwidth

Test Requirement:	FCC 47CFR 15.247(a)(1)
Test Method:	ANSI C63.4:2009
Test Date:	2015-08-29
Mode of Operation:	Communication mode

Remark:

The result has been done on all the possible configurations for searching the worst cases.

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 37 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2402	840	Within 2400-2483.5

(Lowest Operating Frequency) - (GFSK)

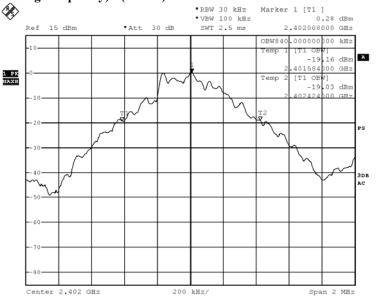

BMP Date: 29.AUG.2015 09:06:33

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 38 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2441	836	Within 2400-2483.5

(Middle Operating Frequency) - (GFSK)

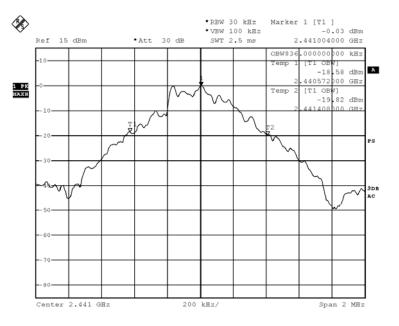

BMP Date: 29.AUG.2015 09:08:21

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 39 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[kHz]	[MHz]
2480	836	Within 2400-2483.5

(Highest Operating Frequency) - (GFSK)

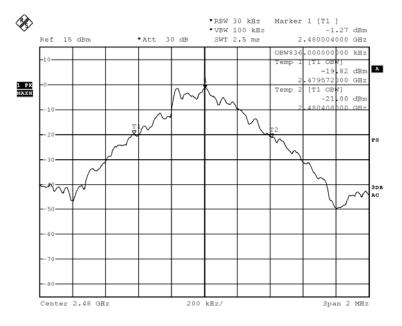

BMP Date: 29.AUG.2015 09:10:15

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 40 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.160	Within 2400-2483.5

(Lowest Operating Frequency) - (π/4-DQPSK)

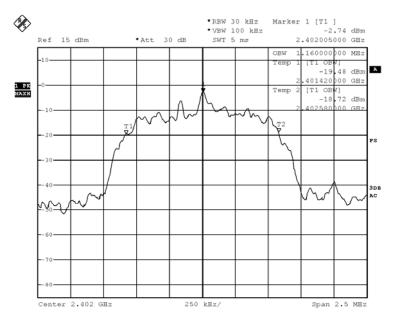

BMP Date: 29.AUG.2015 09:18:50

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 41 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.160	Within 2400-2483.5

(Middle Operating Frequency) - ($\pi/4$ -DQPSK)

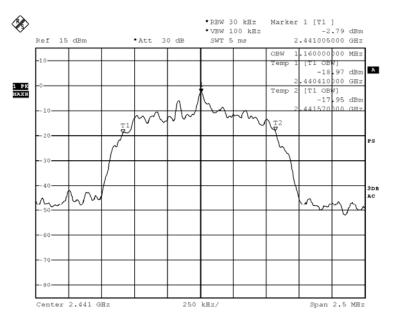

BMP Date: 29.AUG.2015 09:16:47

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 42 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.160	Within 2400-2483.5

(Highest Operating Frequency) - ($\pi/4$ -DQPSK)

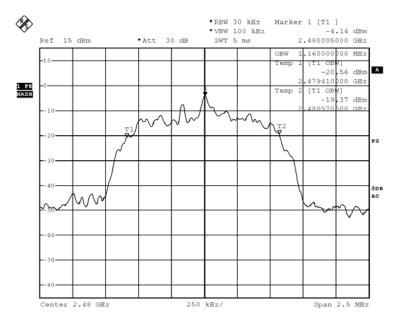

BMP Date: 29.AUG.2015 09:13:50

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 43 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2402	1.150	Within 2400-2483.5

(Lowest Operating Frequency) - (8DPSK)

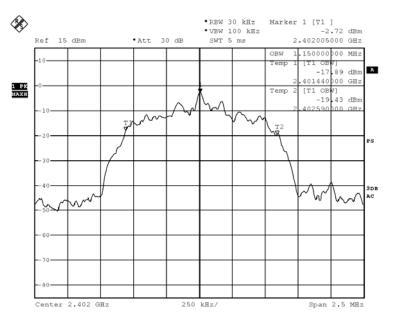

BMP Date: 29.AUG.2015 09:22:41

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 44 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2441	1.145	Within 2400-2483.5

(Middle Operating Frequency) - (8DPSK)

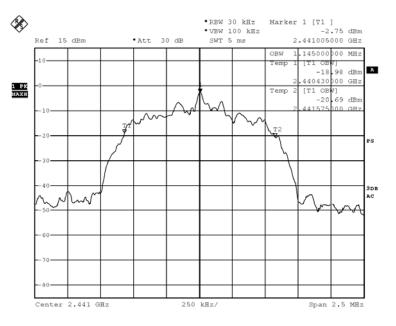

BMP Date: 29.AUG.2015 09:25:27

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 45 of 84

Fundamental Frequency	20dB Bandwidth	FCC Limits
[MHz]	[MHz]	[MHz]
2480	1.145	Within 2400-2483.5

(Highest Operating Frequency) - (8DPSK)

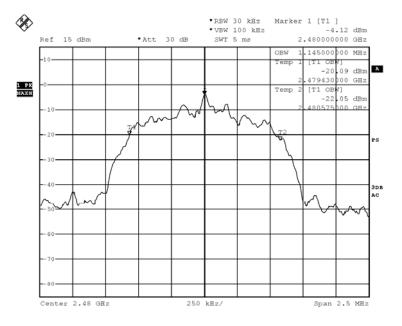

BMP Date: 29.AUG.2015 09:27:03

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 46 of 84

3.1.6 Hopping Channel Separation

Requirements:

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit:


The measured maximum bandwidth * 2/3 = 1.160MHz * 2/3 = 773kHz

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 47 of 84

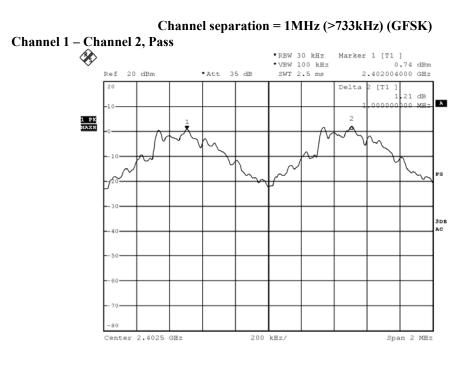

BMP Date: 28.AUG.2015 14:38:52


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 48 of 84

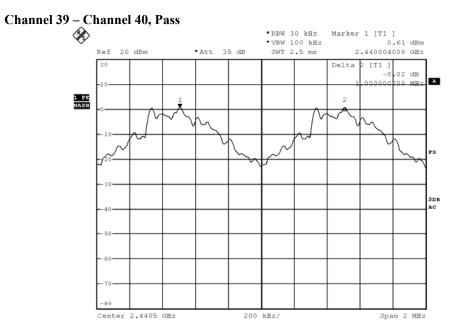

BMP Date: 28.AUG.2015 14:43:08

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 49 of 84




BMP Date: 28.AUG.2015 14:51:54

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 50 of 84

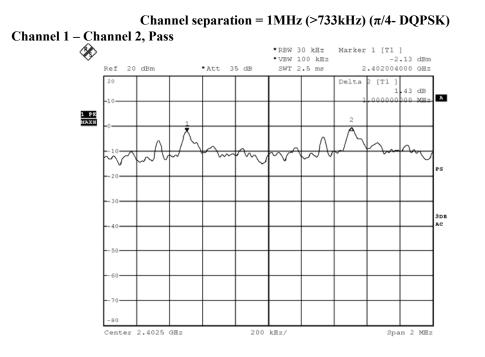


BMP Date: 28.AUG.2015 15:11:34

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 51 of 84

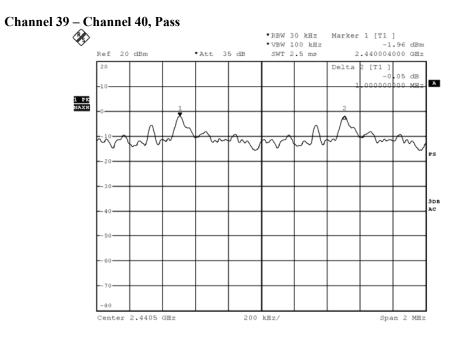

BMP Date: 28.AUG.2015 14:57:05


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 52 of 84

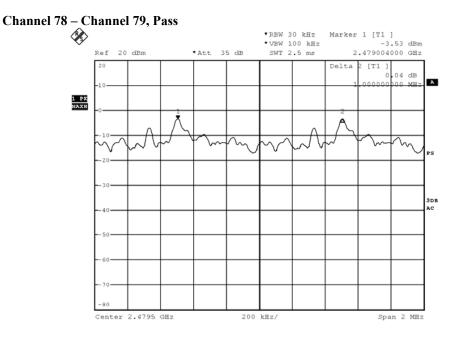


BMP Date: 28.AUG.2015 14:55:20

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 53 of 84

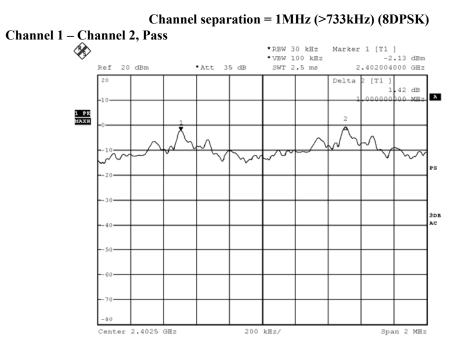

BMP Date: 28.AUG.2015 15:15:11


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 54 of 84

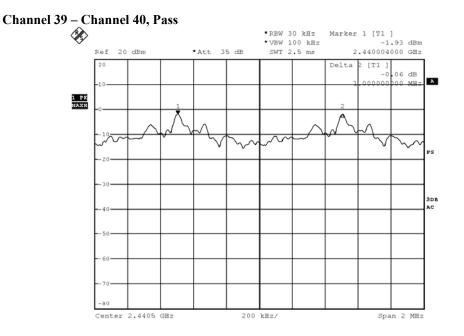

BMP Date: 28.AUG.2015 15:17:29


STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 55 of 84

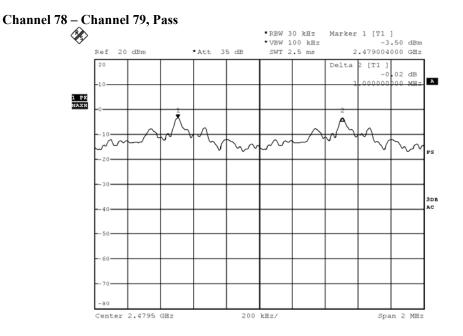

BMP Date: 28.AUG.2015 15:19:37

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 56 of 84


3.1.7 Band-edge Compliance of RF Conducted Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. According to the test method DA 00-705.

Remark: Emissions under the fixed frequency mode and hopping mode have been investigated, the worst-case measurement results were recorded in the test report

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 – Lowest Fundamental (2402)	44.9

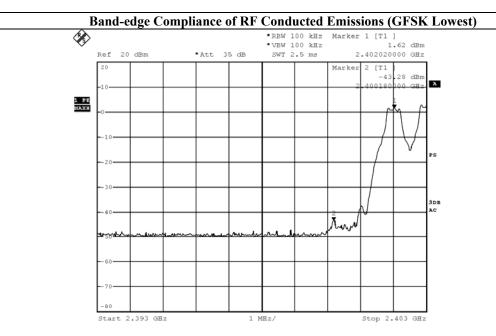

BMP Date: 29.AUG.2015 10:36:02

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 57 of 84

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	48.99

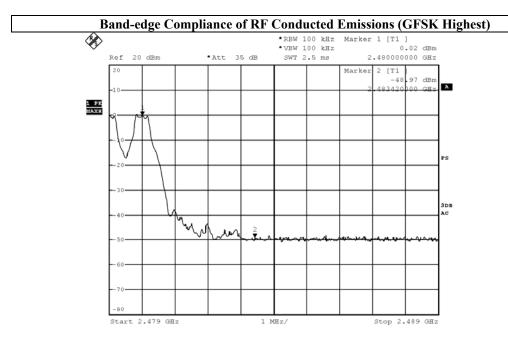

BMP Date: 29.AUG.2015 11:08:47

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 58 of 84

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 - Lowest Fundamental (2402)	45.02

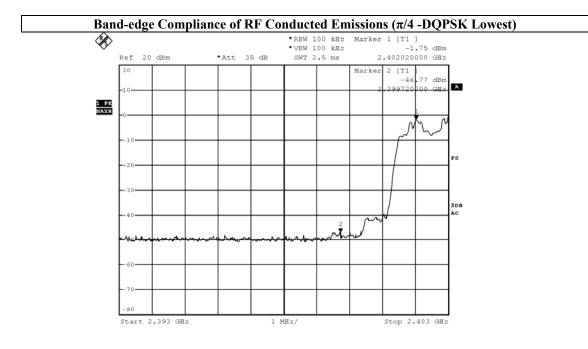

BMP Date: 29.AUG.2015 10:45:25

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 59 of 84

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	45.34

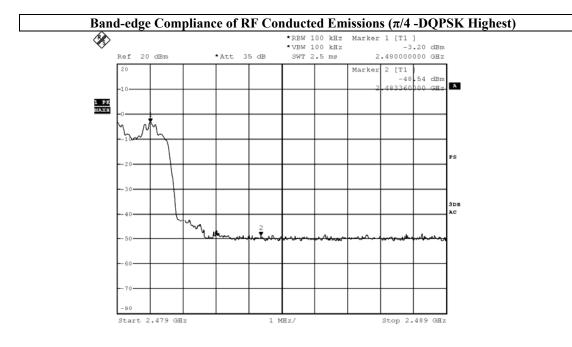

BMP Date: 29.AUG.2015 11:01:30

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 60 of 84

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
2400 - Lowest Fundamental (2402)	45.91

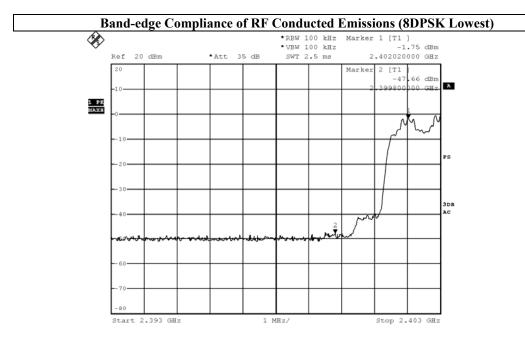

BMP Date: 29.AUG.2015 10:51:37

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 61 of 84

Band-edge Compliance of RF Conducted Emissions Measurement:

Frequency Range	Radiated Emission Attenuated below the
	Fundamental
[MHz]	[dB]
Highest Fundamental (2480) - 2483.5	46.0

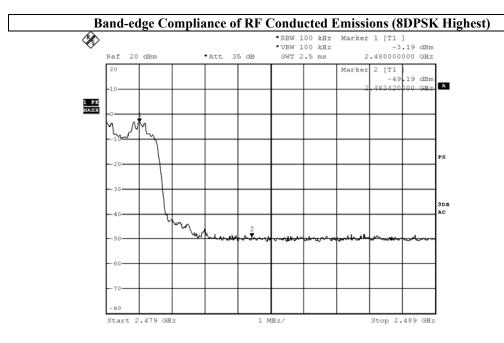

BMP Date: 29.AUG.2015 10:56:55

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 62 of 84

Band-edge Compliance of RF Radiated Emissions Measurement:

Limit :

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Lowest)

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2390.0	20.7	36.8	57.5	74.0	16.5	Vertical	

Field Strength of Band-edge Compliance Average Value							
FrequencyMeasuredCorrectionFieldLimitMarginE-Field							
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2390.0	5.5	36.8	42.3	54.0	11.7	Vertical	

Result: Band-edge Compliance of RF Radiated Emissions (GFSK Highest)

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2483.5	9.7	36.8	46.5	74.0	27.5	Vertical	

Field Strength of Band-edge Compliance Average Value								
Frequency Measured Correction Field Limit Margin E-Field								
1 2	Level @3m	Factor	Strength	@3m	C	Polarity		
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m	-		
2483.5	-5.5	36.8	31.3	54.0	22.7	Vertical		

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 63 of 84

Result: Band-edge Compliance of RF Radiated Emissions (π/4 -DQPSK Lowest)

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m		
2390.0	18.7	36.8	55.5	74.0	18.5	Vertical	

Field Strength of Band-edge Compliance Average Value								
Frequency Measured Correction Field Limit Margin E-Field								
	Level @3m	Factor	Strength	@3m	-	Polarity		
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m	-		
2390.0	3.5	36.8	40.3	54.0	13.7	Vertical		

Result: Band-edge Compliance of RF Radiated Emissions ($\pi/4$ -DQPSK Highest)

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2483.5	6.9	36.8	43.7	74.0	30.3	Vertical	

Field Strength of Band-edge Compliance								
Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m			
2483.5	-8.3	36.8	28.5	54.0	25.5	Vertical		

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 64 of 84

Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Lowest)

Field Strength of Band-edge Compliance							
Peak Value							
Frequency	Measured	Correction	Field	Limit	Margin	E-Field	
	Level @3m	Factor	Strength	@3m		Polarity	
MHz	dBµV	dB/m	dBµV/m	$dB\mu V/m$	dBµV/m		
2390.0	18.3	36.8	55.1	74.0	18.9	Vertical	

Field Strength of Band-edge Compliance								
Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m			
2390.0	3.1	36.8	39.9	54.0	14.1	Vertical		

Result: Band-edge Compliance of RF Radiated Emissions (8DPSK Highest)

Field Strength of Band-edge Compliance								
Peak Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBµV	dB/m	dBµV/m	dBµV/m	dBµV/m			
2483.5	8.5	36.8	45.3	74.0	28.7	Vertical		

Field Strength of Band-edge Compliance								
Average Value								
Frequency	Measured	Correction	Field	Limit	Margin	E-Field		
	Level @3m	Factor	Strength	@3m		Polarity		
MHz	dBµV	dB/m	dBµV/m	$dB\mu V/m$	$dB\mu V/m$			
2483.5	-6.8	36.8	30.0	54.0	24.0	Vertical		

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 65 of 84

3.1.8 Time of Occupancy (Dwell Time)

Requirements:


The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed. No requirements for Digital Transmission System.

Dwell Time = Pulse Duration * hop rate / number of channel * observation duration

Observed duration: 0.4s x 79 = 31.6s

Measurement Data:

Channel Occupied in 8DPSK: 79 of 79 Channel

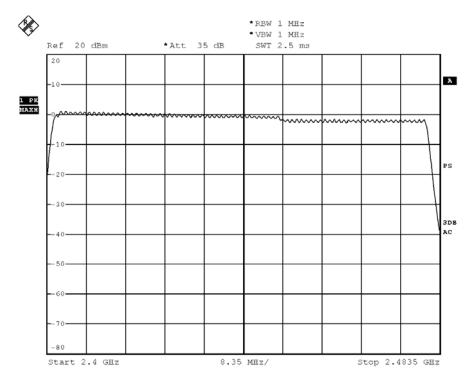

BMP Date: 28.AUG.2015 15:45:45

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 66 of 84

DH5 Packet:

DH5 Packet permit maximum 1600/79/6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds

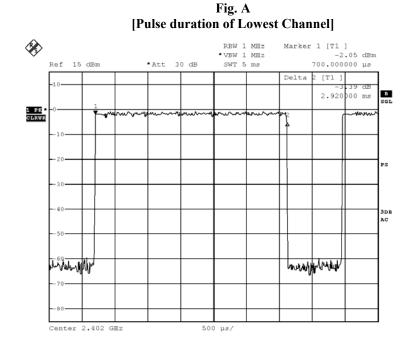


BMP Date: 29.AUG.2015 16:57:58

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 67 of 84

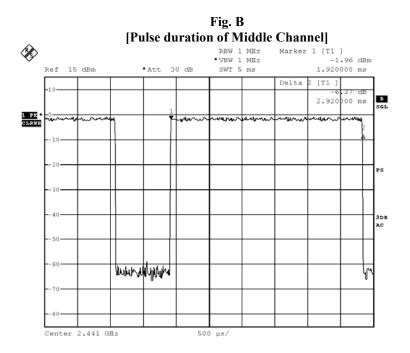


BMP Date: 29.AUG.2015 16:58:43

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 68 of 84

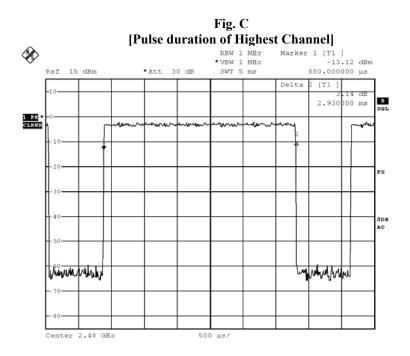

BMP Date: 29.AUG.2015 16:59:28

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 69 of 84

DH3 Packet:

DH3 Packet permit maximum 1600/79/4 = 5.06 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds

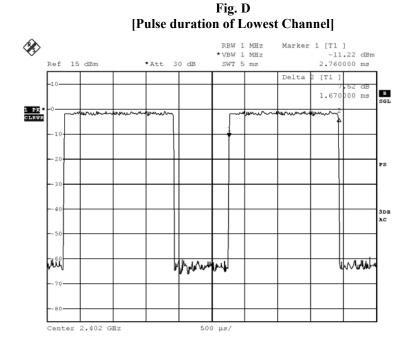

BMP Date: 29.AUG.2015 16:57:18

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 70 of 84

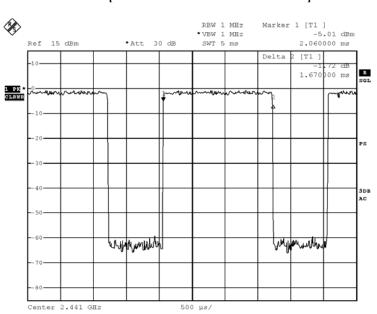


Fig. E [Pulse duration of Middle Channel]

BMP Date: 29.AUG.2015 16:56:36

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 71 of 84

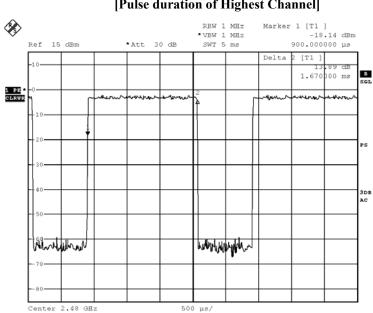


Fig. F [Pulse duration of Highest Channel]

BMP Date: 29.AUG.2015 16:55:52

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749

Page 72 of 84

DH1 Packet:

DH1 Packet permit maximum 1600/79/2 = 10.12 hops per second in each channel (3 time slots RX, 1 time slot TX). The Dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds

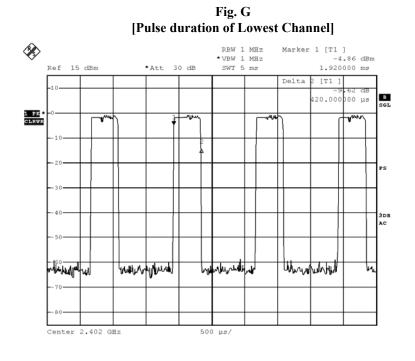


BMP Date: 29.AUG.2015 16:53:58

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 73 of 84

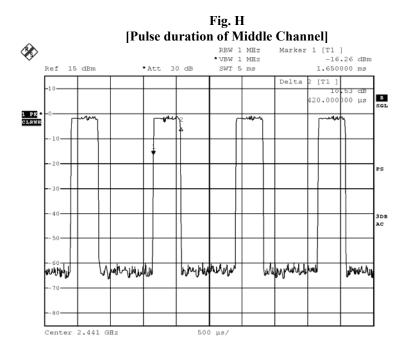

BMP Date: 29.AUG.2015 16:54:32

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 74 of 84

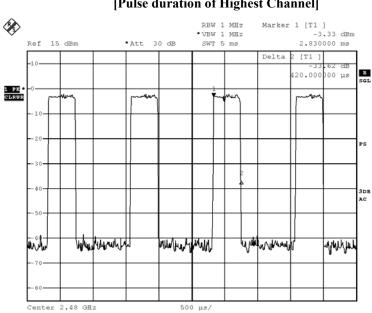


Fig. I [Pulse duration of Highest Channel]

BMP Date: 29.AUG.2015 16:55:06

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Results
DH5	2402	2.92	0.277	0.400	Complies
DH5	2441	2.92	0.277	0.400	Complies
DH5	2480	2.93	0.278	0.400	Complies
DH3	2402	1.67	0.264	0.400	Complies
DH3	2441	1.67	0.264	0.400	Complies
DH3	2480	1.67	0.264	0.400	Complies
DH1	2402	0.42	0.133	0.400	Complies
DH1	2441	0.42	0.133	0.400	Complies
DH1	2480	0.42	0.133	0.400	Complies

Time of occupancy (Dwell Time):

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 75 of 84

3.1.9 Channel Centre Frequency

Requirements:

Frequency hopping system in the 2400-2483.5MHz band shall use at least 79 (Channel 0 to 78) non-overlapping channels.

The EUT operates in according with the Bluetooth system specification within the 2400 - 2483.5 MHz frequency band.

RF channels for Bluetooth systems are spaced 1 MHz and are ordered in channel number k. In order to comply with out-of-band regulations, a lower frequency guard band of 2.0 MHz and a higher frequency guard band of 3.5MHz is used.

The operating frequencies of each channel are as follows:

First RF channel start from 2400MHz + 2MHz guard band = 2402MHz Frequency of RF Channel = 2402+k MHz, k = 0,...,78 (Channel separation = 1MHz)

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 76 of 84

3.1.10 Pseudorandom Hopping Algorithm

Requirements:

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

EUT Pseudorandom Hopping Algorithm

The EUT is a Bluetooth device, the Pseudo-random hopping pattern; hopping characteristics and algorithm are based on the Bluetooth specification.

STC (Dongguan) Company Limited

68 Furnin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 77 of 84

3.1.11 Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

This is PCB antenna. There is no external antenna, the antenna gain = -3.41dBi. User is unable to remove or changed the Antenna.

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 78 of 84

3.1.12 RF Exposure

Test Requirement: Test Date: Mode of Operation: FCC 47CFR 15.247(i) 2015-09-01 Tx mode

Requirements:

In 15.247(i), an equipment shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the limits in §§ 1.1310 and 2.1093 of this chapter. Applications to the Commission for construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities must contain a statement confirming compliance with the limits unless the facility, operation, or transmitter is categorically excluded, as discussed below. Technical information showing the basis for this statement must be submitted to the Commission upon request.

According toKDB447498 D01 General RF Exposure Guidance v05, unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition.

Test Results:

RF Exposure Evaluation

The Maximum conducted output power = 1.472 mW (at frequency = 2.402 GHz)

It's Conducted source-based time-averaging output power = 1.457 mW (at frequency = 2.402 GHz)

Since the SAR test exclusion thresholds for 2450MHz at test separation distances $\leq 5 \text{ mm} = 10 \text{mW}$ and the Conducted source-based time-averaging output power is less than 10mW.

Therefore. the SAR evaluation can be exempted.

STC (Dongguan) Company Limited



Date: 2015-09-01 No.: DM120749

Page 79 of 84

Appendix A

List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2015.3.24	2016.3.24
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2015.3.24	2016.3.24
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2015.3.24	2016.3.24
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2015.3.24	2016.3.24
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2015.3.24	2016.3.24
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2014.11.29	2016.11.29
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2015.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
EMD111	Power meter	ROHDE & SCHWARZ	NRVD	102051	2015.3.24	2016.3.24
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2015.3.24	2016.3.24
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2015.3.24	2016.3.24
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2014.04.28	2016.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2015.04.09	2017.04.09
EMD141	Spectrum Analyzer	Agilent Technologies	MXA N9020A	MY46472144	2014.11.21	2015.11.20
RE01	RF cable	N/A	N/A	N/A	2014-9-28	2015-9-27
RE02	RF cable	N/A	N/A	N/A	2014-9-28	2015-9-27
RE03	Antenna connector	N/A	N/A	N/A	2014-9-28	2015-9-27

Remarks:-

N/A Not Applicable or Not Available

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749

Page 80 of 84

Appendix B

Ancillary Equipment

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	DELL COMPUTER	DMC	N/A	N/A
2	DELL MONITOR	E177FPB	ARSCM356N	RESOLUTION 1024*768 (DURING TESTING) 1.0M UNSHIEDED POWER VORD CONNECTED TO THE COMPUTER 1.5M SHIELDED CABLE CONNECTED TO THE COMPUTER
3	DELL KEYBOARD	SK-8110	N/A	1.8M SHIELDED COILED CABLE CONNECTED TO THE COMPUTER
4	DELL MOUSE	N/A	N/A	2.4M UNSHIELDED CABLE CONNECTED TO THE COMPUTER
5	LASER PRINTER	HP LASERJET 1020 PLUS	N/A	1.8M UNSHIELDED POWER CORD 2.8M SHIELDED CABLE (BUNDLED TO 1M) CONNECTED TO THE COMPUTER

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749 Page 81 of 84

Appendix C

Photographs of EUT



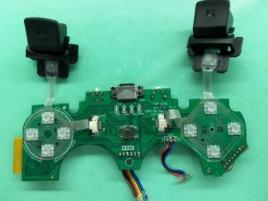



STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749 Page 82 of 84

Photographs of EUT

Inner Circuit Bottom View

Inner Circuit Bottom View

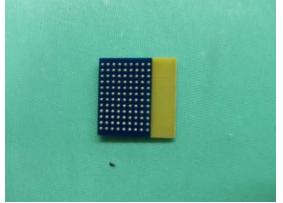

Inner Circuit Top View



STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org




Date: 2015-09-01 No.: DM120749 Page 83 of 84

Photographs of EUT

Measurement of Radiated Emission Test Set Up



Measurement of Radiated Emission Test Set Up

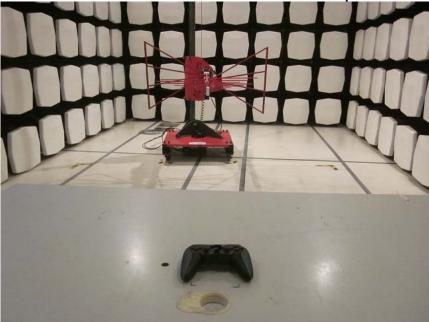

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org



Date: 2015-09-01 No.: DM120749 Page 84 of 84

Photographs of EUT



Measurement of Conducted Emission Test Set Up



***** End of Test Report *****

STC (Dongguan) Company Limited

68 Fumin Nan Road, Dalang, Dongguan, China. (Zip Code : 523 770) Tel : (86 769) 8111 9888 Fax : (86 769) 8111 6222 E-mail : dgstc@dgstc.org Homepage : www.dgstc.org