



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd

Report No.: SUCR241100049001
Rev.: 01

Appendix B
Detailed Test Results

1. LTE
LTE Band 7 for Body 10mm & Limbs
LTE Band 12 for Body 10mm & Limbs
LTE Band 13 for Body 10mm & Limbs
LTE Band 25 for Body 10mm & Limbs
LTE Band 26 for Body 10mm & Limbs
LTE Band 41 for Body 10mm & Limbs
LTE Band 66 for Body 10mm & Limbs
LTE Band 71 for Body 10mm & Limbs
2. WIFI2.4G
WIFI2.4G for Body 10mm & Limbs
3. WIFI5G
WIFI5G for Body 10mm & Limbs
4. Bluetooth
Bluetooth for Body 10mm & Limbs

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd
Wireless Laboratory South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 t (86-512) 62992980 www.sgsgroup.com.cn

Member of the SGS Group (SGS SA)

Test Laboratory: SGS-SAR Lab

N950S LTE Band 7 QPSK 20M 1RB0 21100CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2535$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 38.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.814 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.406 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.15 W/kg

SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.322 W/kg

Maximum value of SAR (measured) = 0.942 W/kg

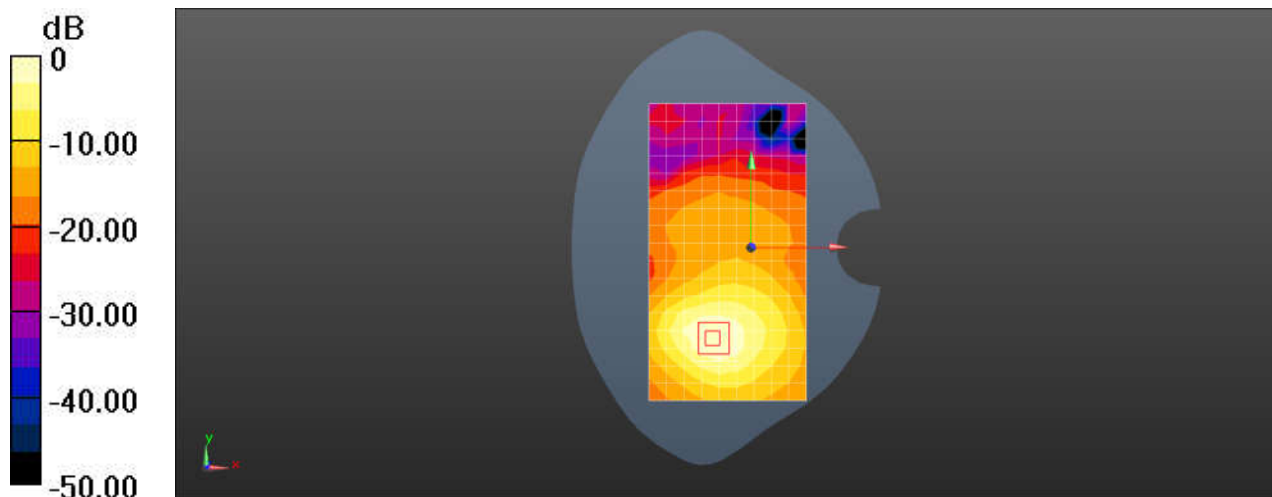

0 dB = 0.814 W/kg = -0.89 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 7 QPSK 20M 1RB0 21100CH Back side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz;Duty Cycle: 1:1

Medium: HSL2600;Medium parameters used: $f = 2535$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 38.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 3.19 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.231 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.43 W/kg

SAR(1 g) = 2.27 W/kg; SAR(10 g) = 1.03 W/kg

Maximum value of SAR (measured) = 3.69 W/kg

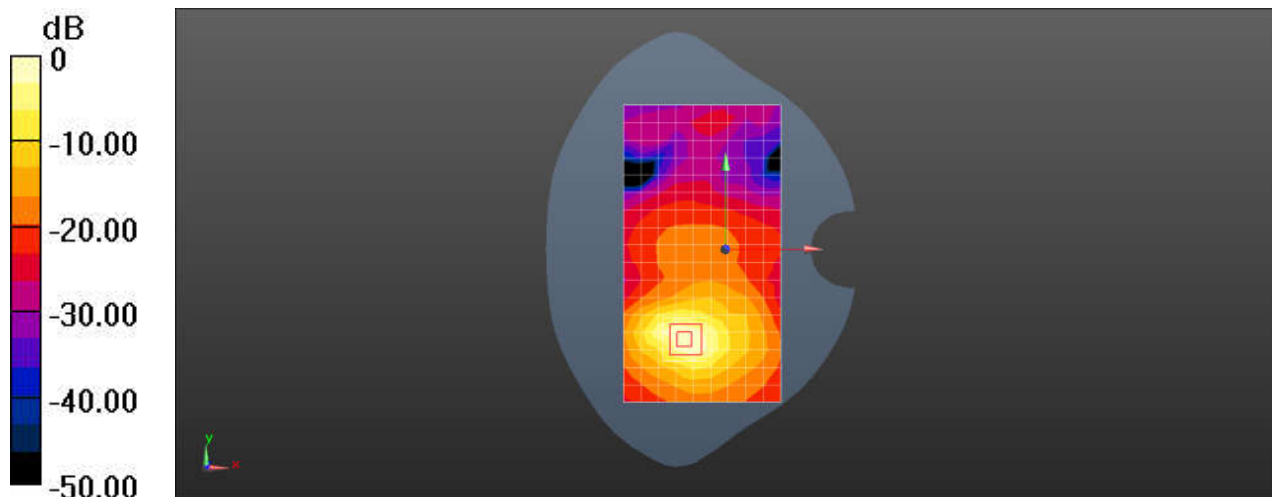

0 dB = 3.19 W/kg = 5.04 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 12 QPSK 10M 1RB0 23095CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 43.626$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.29, 9.29, 9.29); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.213 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.217 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.314 W/kg

SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

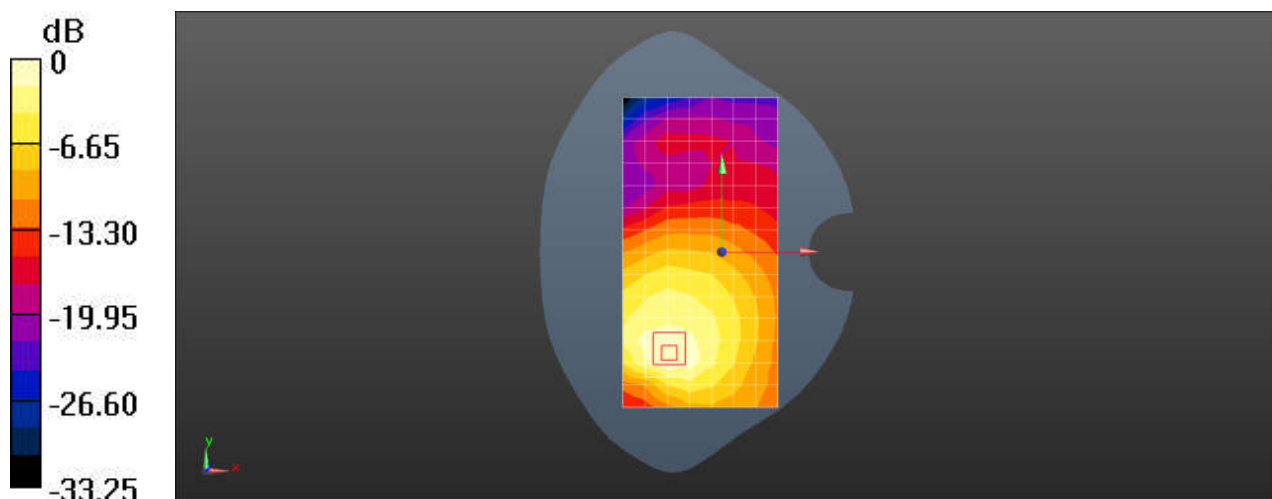

Test Laboratory: SGS-SAR Lab

N950S LTE Band 12 QPSK 10M 1RB0 23095CH Back side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.85$ S/m; $\epsilon_r = 43.626$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.29, 9.29, 9.29); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.96 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.46 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 1.77 W/kg; SAR(10 g) = 0.885 W/kg

Maximum value of SAR (measured) = 3.10 W/kg

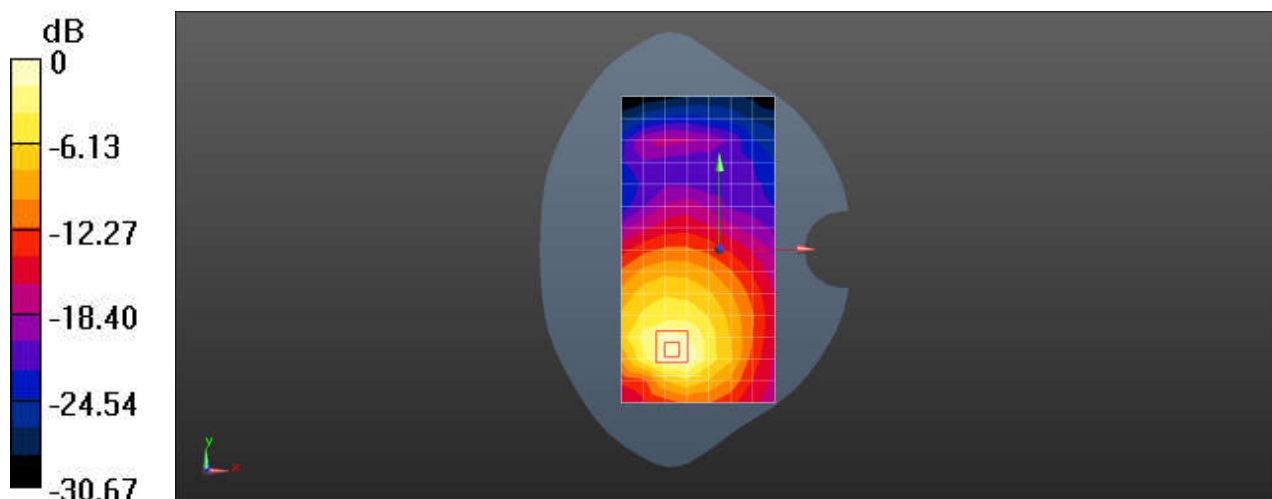

0 dB = 1.96 W/kg = 2.93 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 13 QPSK 10M 1RB0 23230CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.187$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.29, 9.29, 9.29); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.494 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.28 V/m ; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.777 W/kg

SAR(1 g) = 0.418 W/kg ; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.618 W/kg

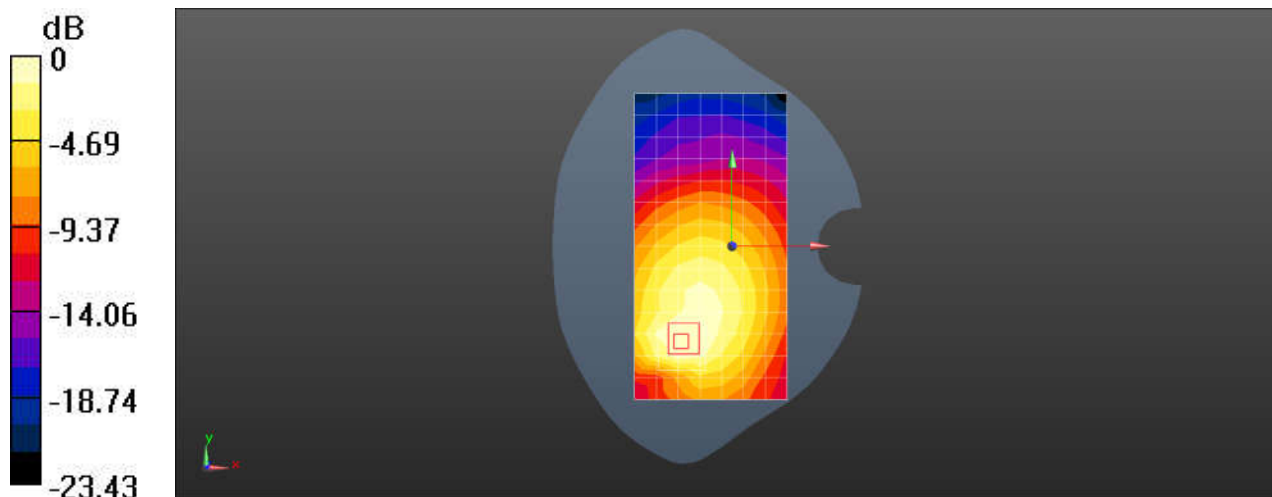

0 dB = 0.494 W/kg = -3.06 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 13 QPSK 10M 1RB0 23230CH Bottom side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.916 \text{ S/m}$; $\epsilon_r = 42.187$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.29, 9.29, 9.29); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.95 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 38.83 V/m ; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 1.31 W/kg ; SAR(10 g) = 0.639 W/kg

Maximum value of SAR (measured) = 2.63 W/kg

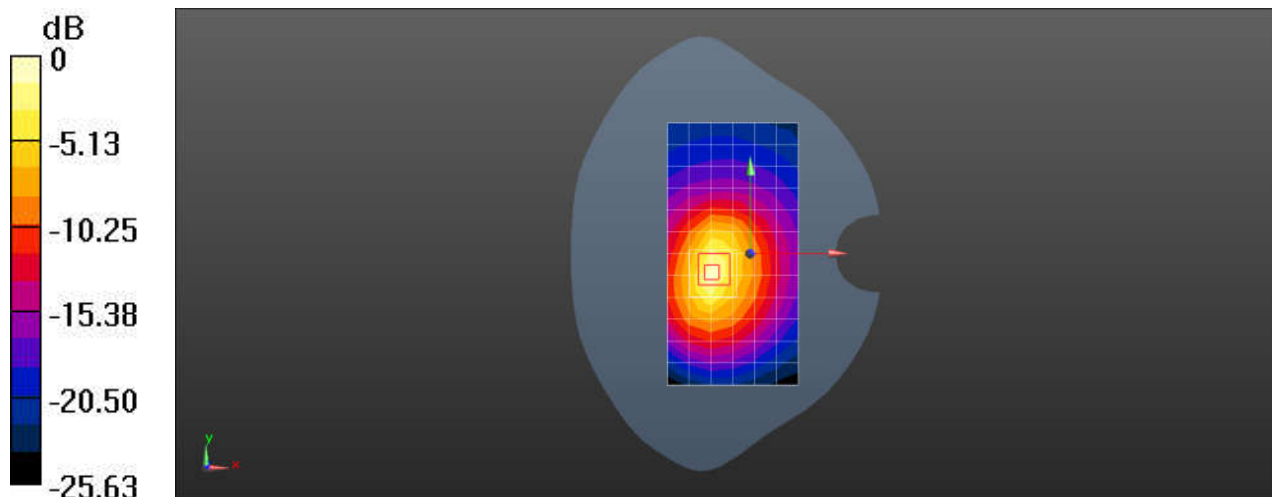

$0 \text{ dB} = 2.95 \text{ W/kg} = 4.70 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

N950S LTE Band 25 QPSK 20M 1RB50 26365CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.744$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.57, 7.57, 7.57); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.747 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.499 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.619 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.916 W/kg

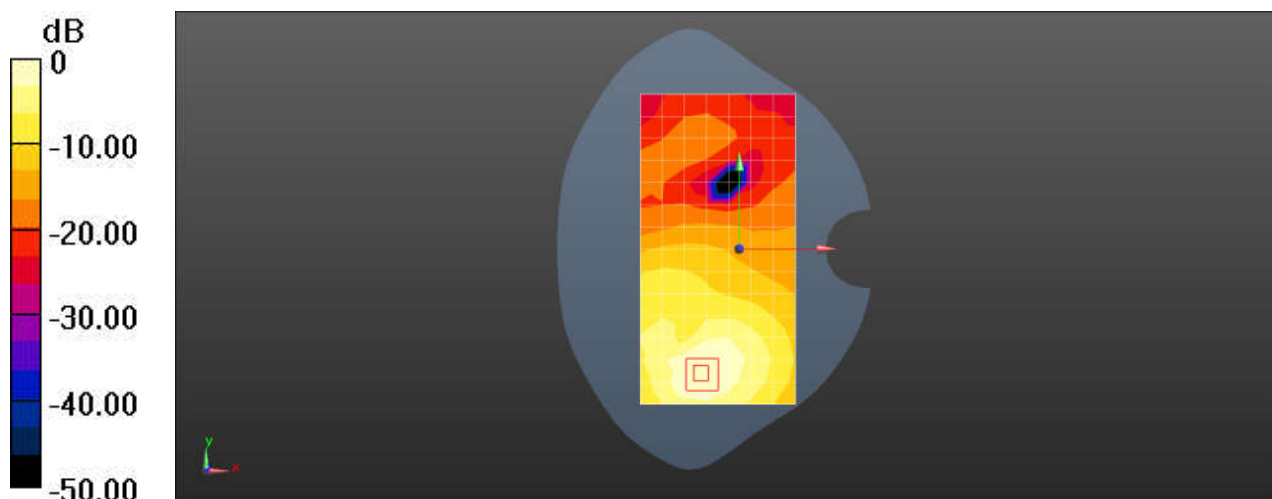

Test Laboratory: SGS-SAR Lab

N950S LTE Band 25 QPSK 20M 1RB50 26365CH Back side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.374$ S/m; $\epsilon_r = 40.744$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.57, 7.57, 7.57); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 3.17 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.127 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 5.63 W/kg

SAR(1 g) = 2.77 W/kg; SAR(10 g) = 1.27 W/kg

Maximum value of SAR (measured) = 4.36 W/kg

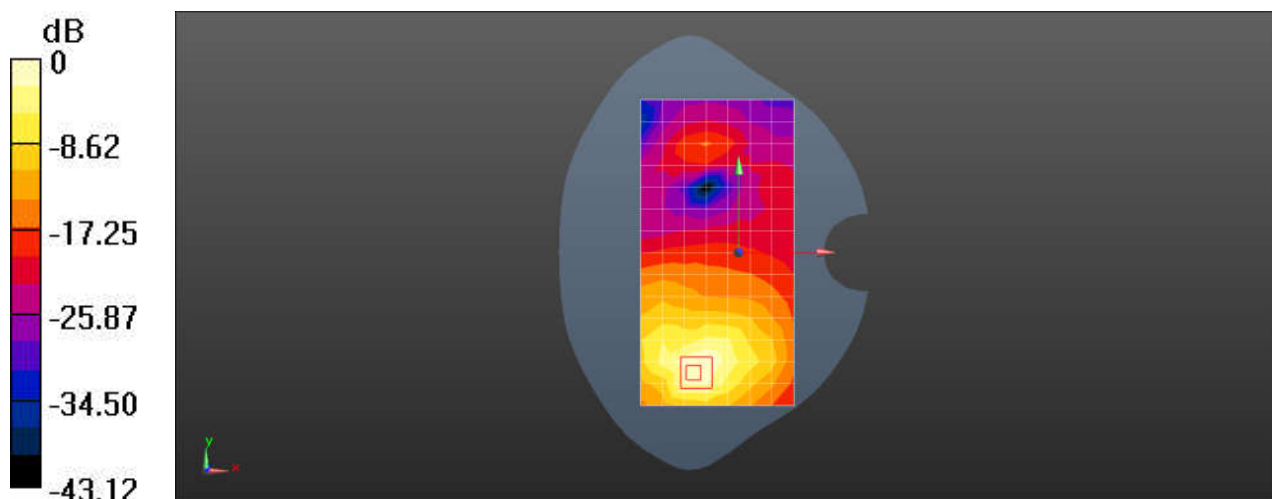

0 dB = 3.17 W/kg = 5.00 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 26 QPSK 15M 1RB0 26865CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium: HSL835;Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(8.88, 8.88, 8.88); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.433 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.32 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.234 W/kg

Maximum value of SAR (measured) = 0.554 W/kg

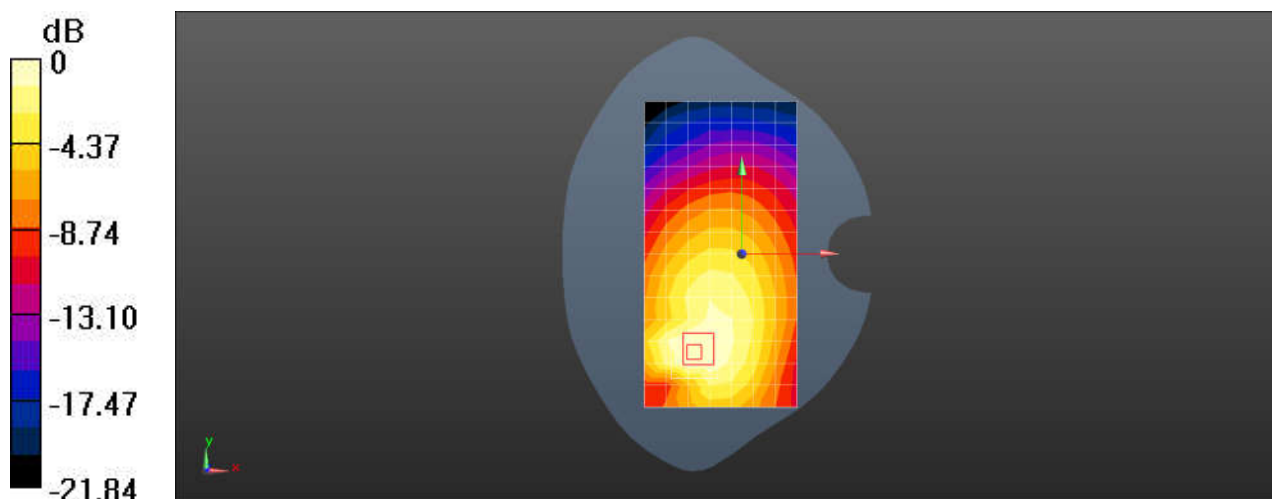

0 dB = 0.433 W/kg = -3.63 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 26 QPSK 15M 1RB0 26865CH Right side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.595$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(8.88, 8.88, 8.88); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.16 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.14 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 0.986 W/kg; SAR(10 g) = 0.496 W/kg

Maximum value of SAR (measured) = 1.72 W/kg

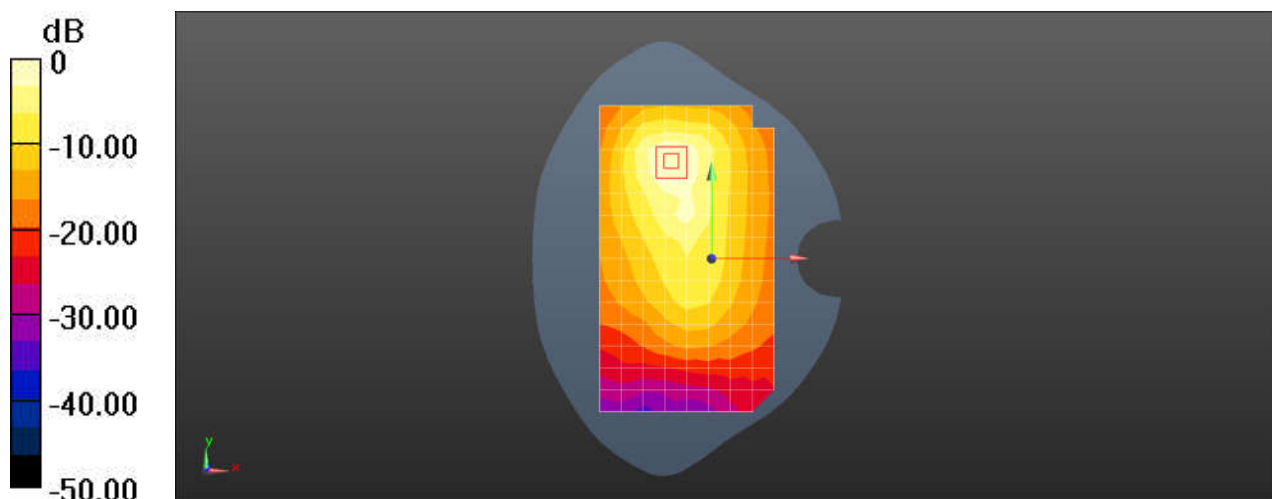

0 dB = 1.16 W/kg = 0.66 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 41 QPSK 20M 1RB0 40620CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 38.232$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(6.94, 6.94, 6.94); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 1.54 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.908 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.613 W/kg

Maximum value of SAR (measured) = 1.84 W/kg

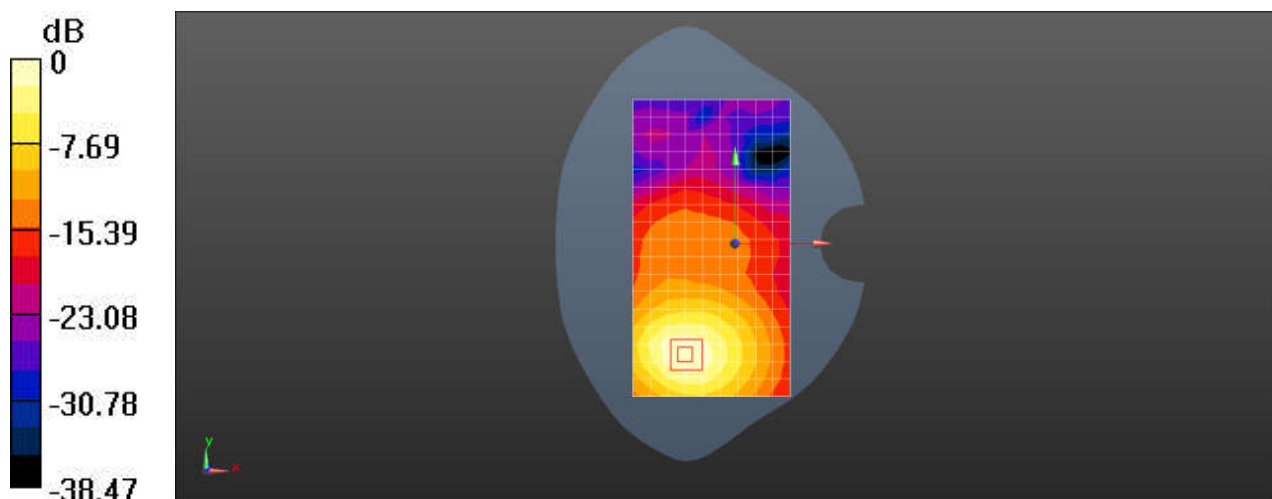

Test Laboratory: SGS-SAR Lab

N950S LTE Band 41 QPSK 20M 1RB0 40620CH Back side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 38.232$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(6.94, 6.94, 6.94); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (10x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 7.01 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.046 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 9.12 W/kg

SAR(1 g) = 4.73 W/kg; SAR(10 g) = 1.96 W/kg

Maximum value of SAR (measured) = 7.36 W/kg

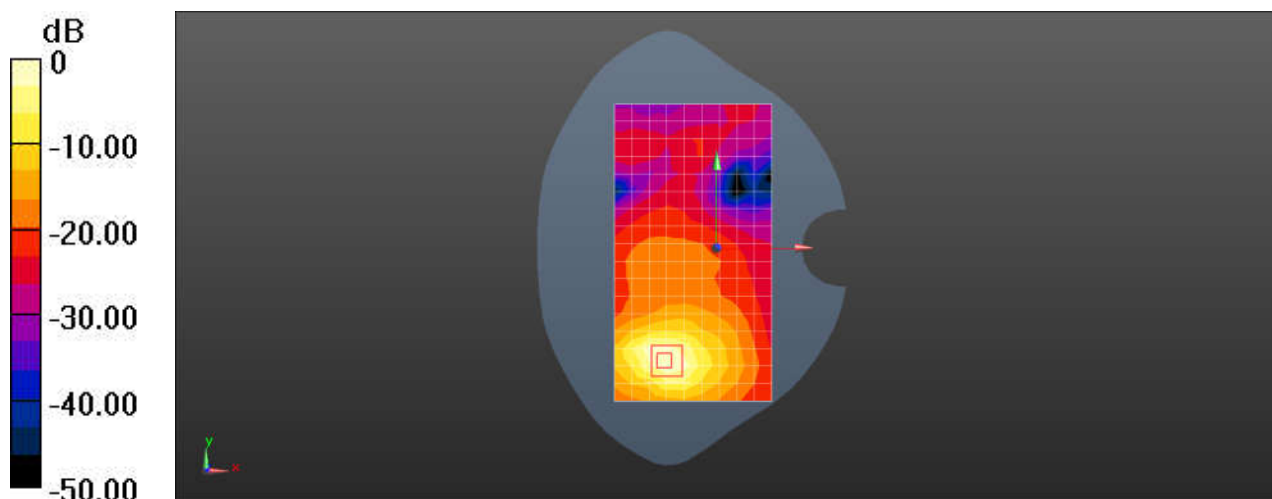

0 dB = 7.01 W/kg = 8.46 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 66 QPSK 20M 1RB50 132322CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.348$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.86, 7.86, 7.86); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.33 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.605 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.965 W/kg; SAR(10 g) = 0.531 W/kg

Maximum value of SAR (measured) = 1.47 W/kg

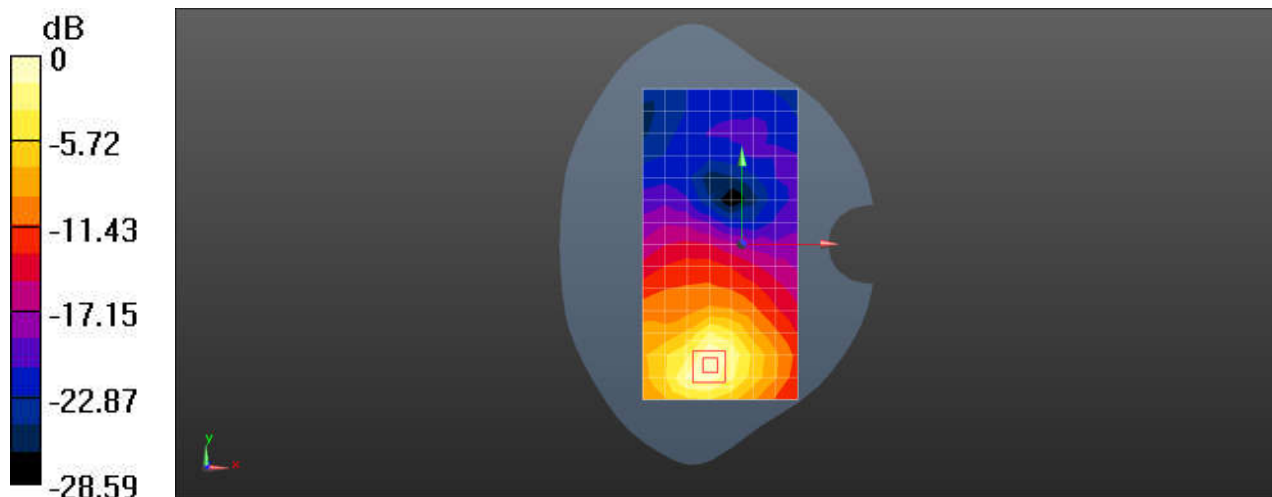

0 dB = 1.33 W/kg = 1.23 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 66 QPSK 20M 1RB50 132322CH Bottom side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.348$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.86, 7.86, 7.86); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.29 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=3.8mm, dy=3.8mm, dz=1.4mm

Reference Value = 30.10 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 6.66 W/kg

SAR(1 g) = 3.26 W/kg; SAR(10 g) = 1.48 W/kg

Maximum value of SAR (measured) = 5.30 W/kg

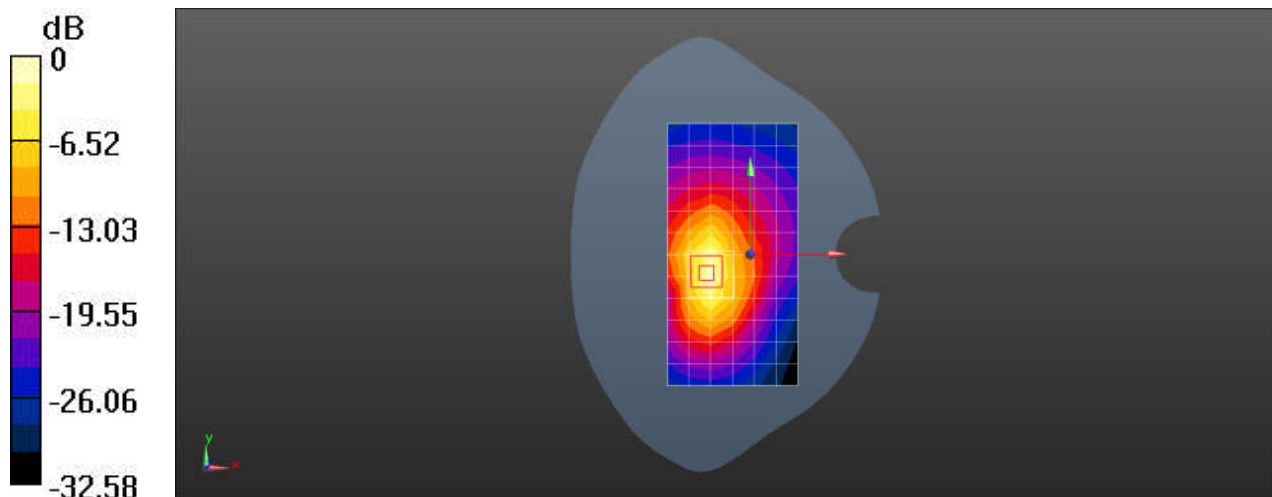

0 dB = 5.29 W/kg = 7.23 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S LTE Band 71 QPSK 20M 1RB0 133322CH Back side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 683$ MHz; $\sigma = 0.846$ S/m; $\epsilon_r = 43.918$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.29, 9.29, 9.29); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.291 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.092 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

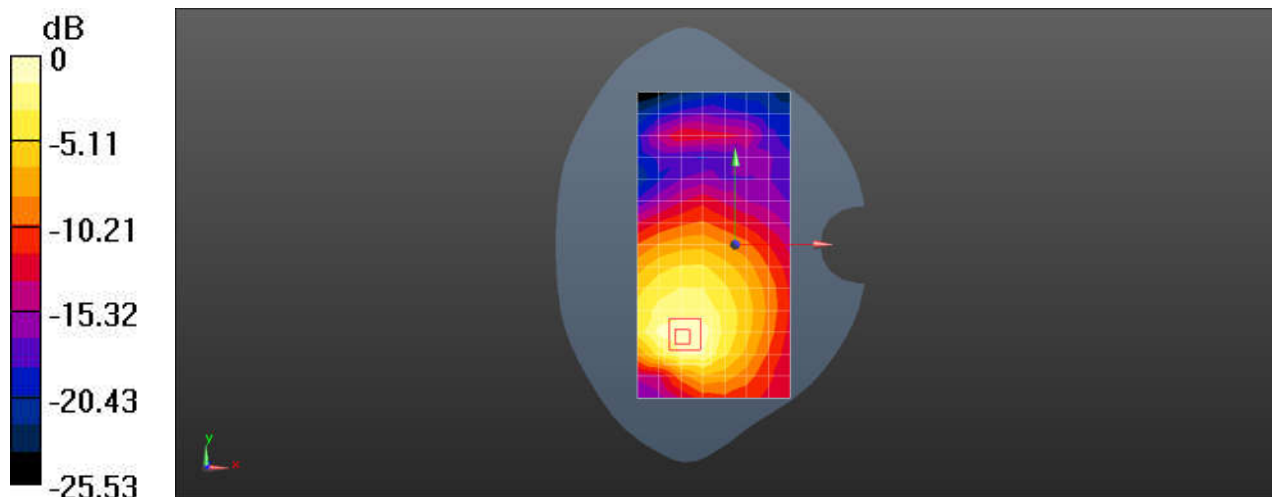

Test Laboratory: SGS-SAR Lab

N950S LTE Band 71 QPSK 20M 1RB0 133322CH Back side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 683 \text{ MHz}$; $\sigma = 0.846 \text{ S/m}$; $\epsilon_r = 43.918$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(9.29, 9.29, 9.29); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.72 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.78 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 4.01 W/kg

SAR(1 g) = 1.66 W/kg ; SAR(10 g) = 0.832 W/kg

Maximum value of SAR (measured) = 2.96 W/kg

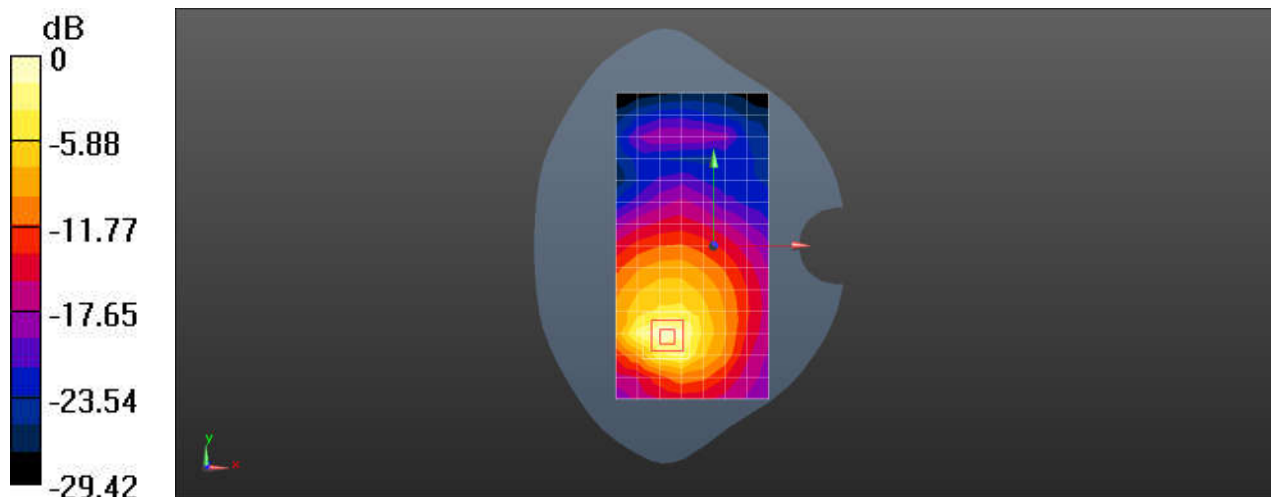

Test Laboratory: SGS-SAR Lab

N950S WiFi2.4G 802.11b 1CH Left side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.03

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 38.888$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.365 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.611 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.472 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.383 W/kg

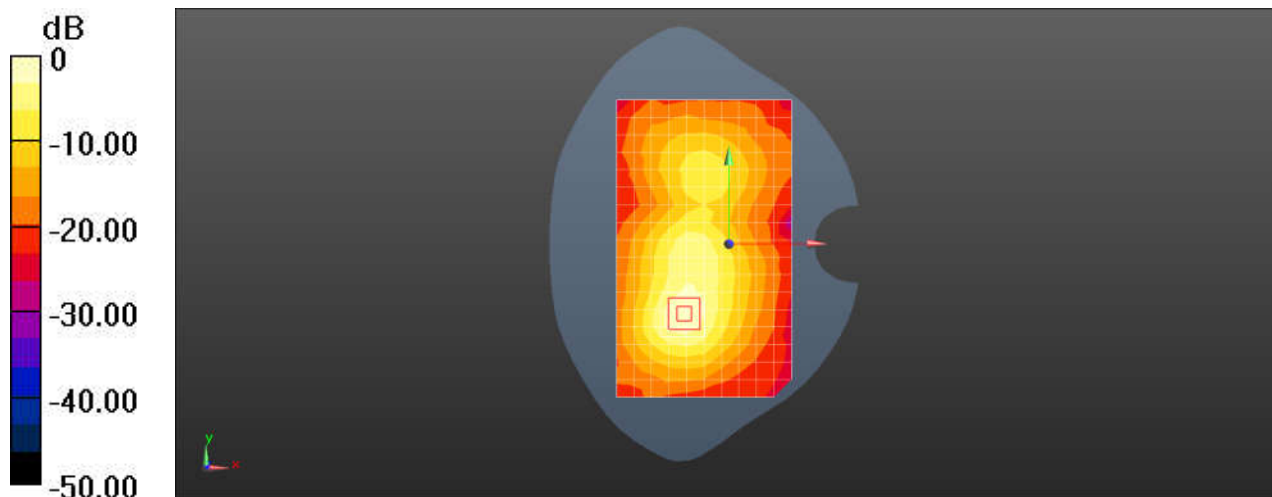

Test Laboratory: SGS-SAR Lab

N950S WiFi2.4G 802.11b 1CH Left side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.03

Medium: HSL2450; Medium parameters used: $f = 2412$ MHz; $\sigma = 1.769$ S/m; $\epsilon_r = 38.888$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 2.68 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.79 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.14 W/kg

SAR(1 g) = 1.53 W/kg; SAR(10 g) = 0.604 W/kg

Maximum value of SAR (measured) = 2.92 W/kg

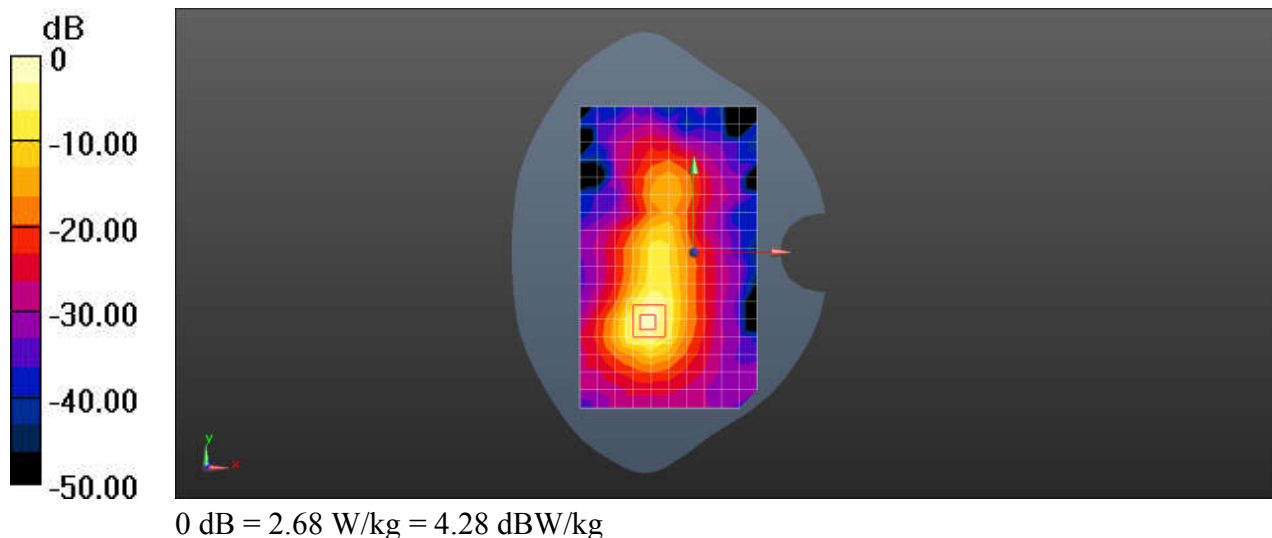

Test Laboratory: SGS-SAR Lab

N950S WiFi5G 802.11a 60CH Left side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz; Duty Cycle: 1:1.017

Medium: HSL5G; Medium parameters used: $f = 5300$ MHz; $\sigma = 4.903$ S/m; $\epsilon_r = 36.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.02, 5.02, 5.02); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.509 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 3.091 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.899 W/kg

SAR(1 g) = 0.262 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.568 W/kg

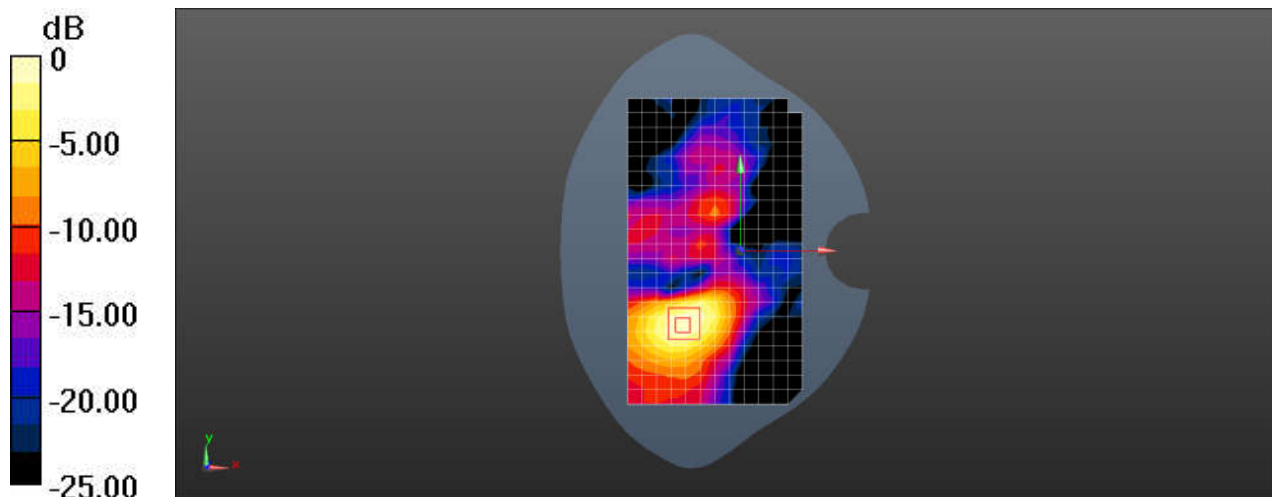

Test Laboratory: SGS-SAR Lab

N950S WiFi5G 802.11a 140CH Left side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5700 MHz; Duty Cycle: 1:1.017

Medium: HSL5G; Medium parameters used: $f = 5700$ MHz; $\sigma = 5.378$ S/m; $\epsilon_r = 35.663$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.48, 4.48, 4.48); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 1.63 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 2.046 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.85 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.303 W/kg

Maximum value of SAR (measured) = 1.73 W/kg

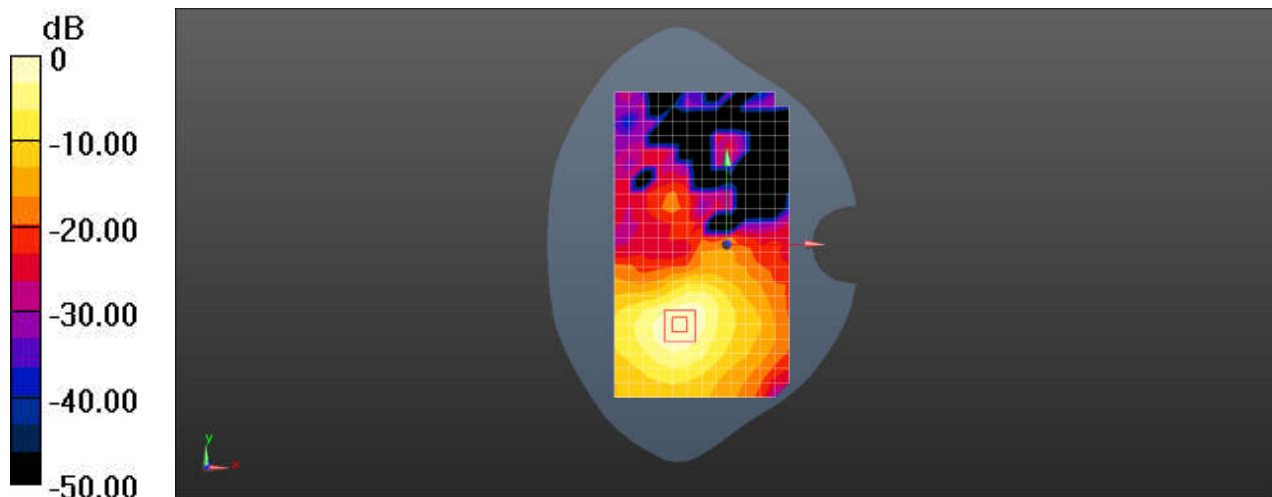

Test Laboratory: SGS-SAR Lab

N950S WiFi5G 802.11a 165CH Left side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz; Duty Cycle: 1:1.018

Medium: HSL5G; Medium parameters used: $f = 5825$ MHz; $\sigma = 5.531$ S/m; $\epsilon_r = 35.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.58, 4.58, 4.58); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 2.39 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.073 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 4.56 W/kg

SAR(1 g) = 0.918 W/kg; SAR(10 g) = 0.404 W/kg

Maximum value of SAR (measured) = 2.69 W/kg

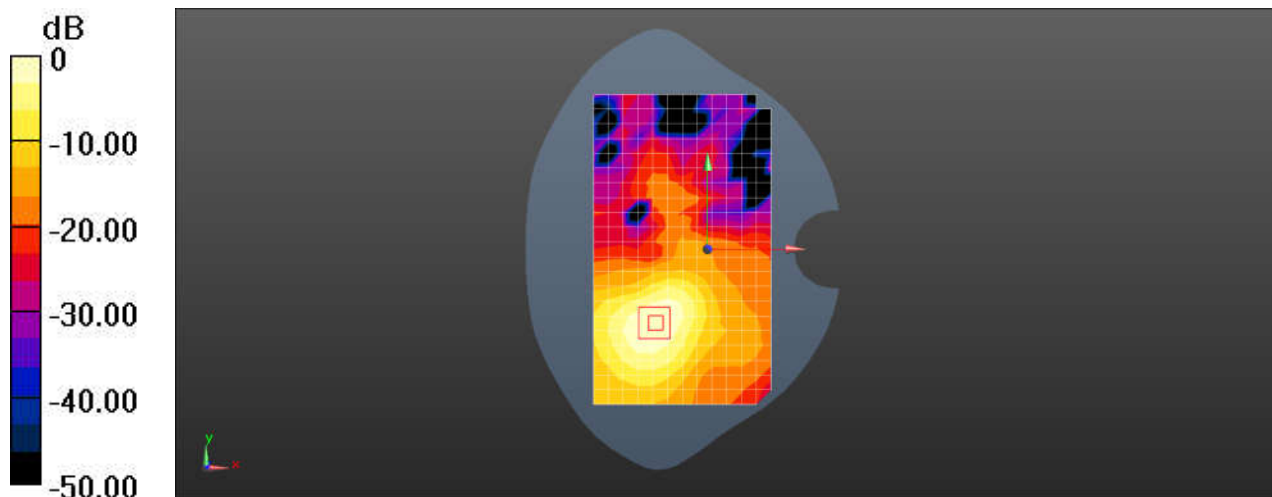

0 dB = 2.39 W/kg = 3.78 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S WiFi5G 802.11a 60CH Left side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz; Duty Cycle: 1:1.017

Medium: HSL5G; Medium parameters used: $f = 5300$ MHz; $\sigma = 4.903$ S/m; $\epsilon_r = 36.72$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(5.02, 5.02, 5.02); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 3.34 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 5.830 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 7.76 W/kg

SAR(1 g) = 1.52 W/kg; SAR(10 g) = 0.414 W/kg

Maximum value of SAR (measured) = 4.19 W/kg

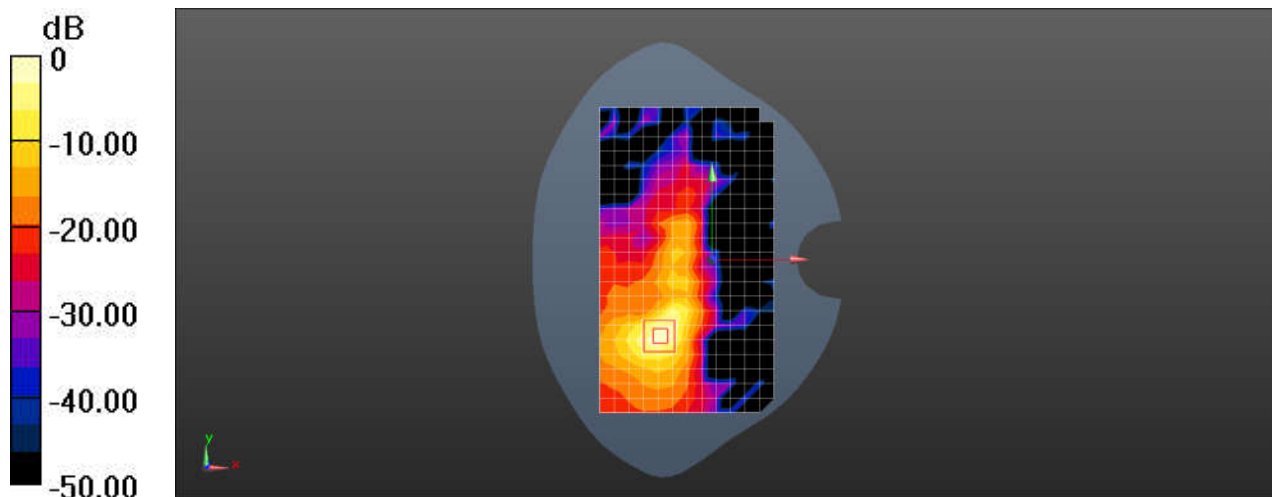

0 dB = 3.34 W/kg = 5.24 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S WiFi5G 802.11a 140CH Left side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5700 MHz; Duty Cycle: 1:1.017

Medium: HSL5G; Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.378 \text{ S/m}$; $\epsilon_r = 35.663$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.48, 4.48, 4.48); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 13.8 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 5.682 V/m ; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 4.47 W/kg ; SAR(10 g) = 1.11 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

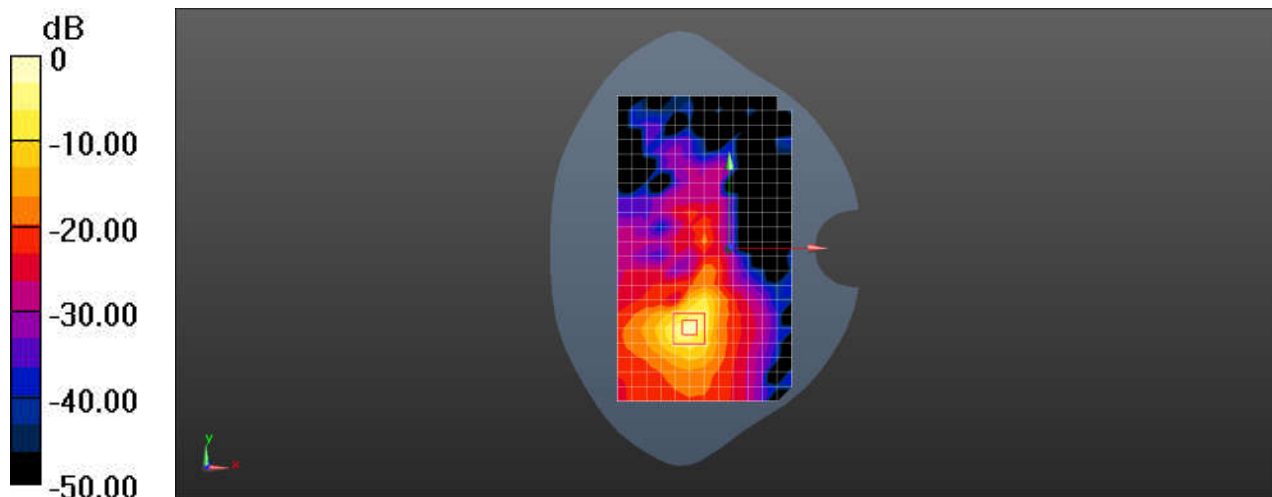

0 dB = 13.8 W/kg = 11.41 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S WiFi5G 802.11a 165CH Left side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5825 MHz; Duty Cycle: 1:1.018

Medium: HSL5G; Medium parameters used: $f = 5825$ MHz; $\sigma = 5.531$ S/m; $\epsilon_r = 35.358$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(4.58, 4.58, 4.58); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (13x22x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 10.2 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 4.432 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 39.5 W/kg

SAR(1 g) = 6.67 W/kg; SAR(10 g) = 1.67 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

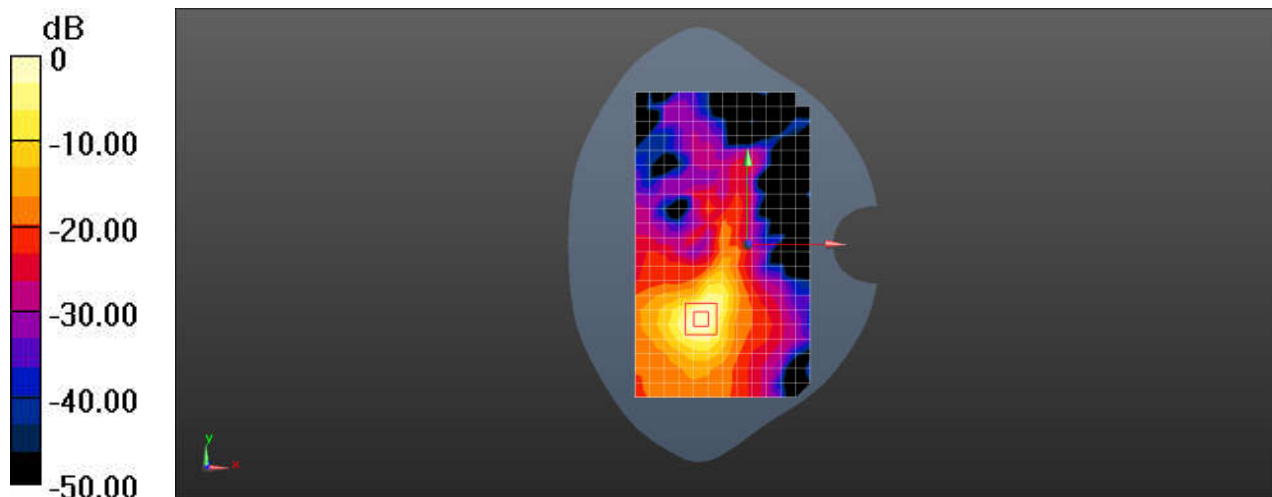

0 dB = 10.2 W/kg = 10.07 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S Bluetooth DH5 39CH Left side 10mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.289

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 38.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.0263 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.805 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00483 W/kg

Maximum value of SAR (measured) = 0.0215 W/kg

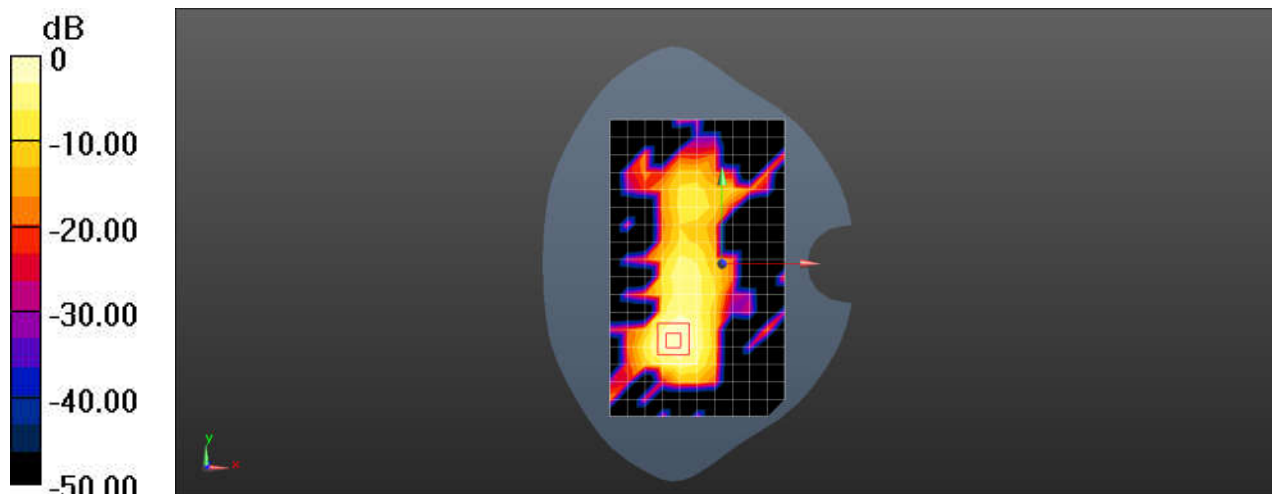

0 dB = 0.0263 W/kg = -15.79 dBW/kg

Test Laboratory: SGS-SAR Lab

N950S Bluetooth DH5 39CH Left side 0mm

DUT: N950S; Type: POS Terminal; Serial: 861534074005493

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.289

Medium: HSL2450; Medium parameters used: $f = 2441$ MHz; $\sigma = 1.802$ S/m; $\epsilon_r = 38.764$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3793; ConvF(7.18, 7.18, 7.18); Calibrated: 2024/03/04
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 2024/06/05
- Phantom: SAM 7; Type: SAM; Serial: 1702
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x18x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.429 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.389 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00505 W/kg

Maximum value of SAR (measured) = 0.0223 W/kg

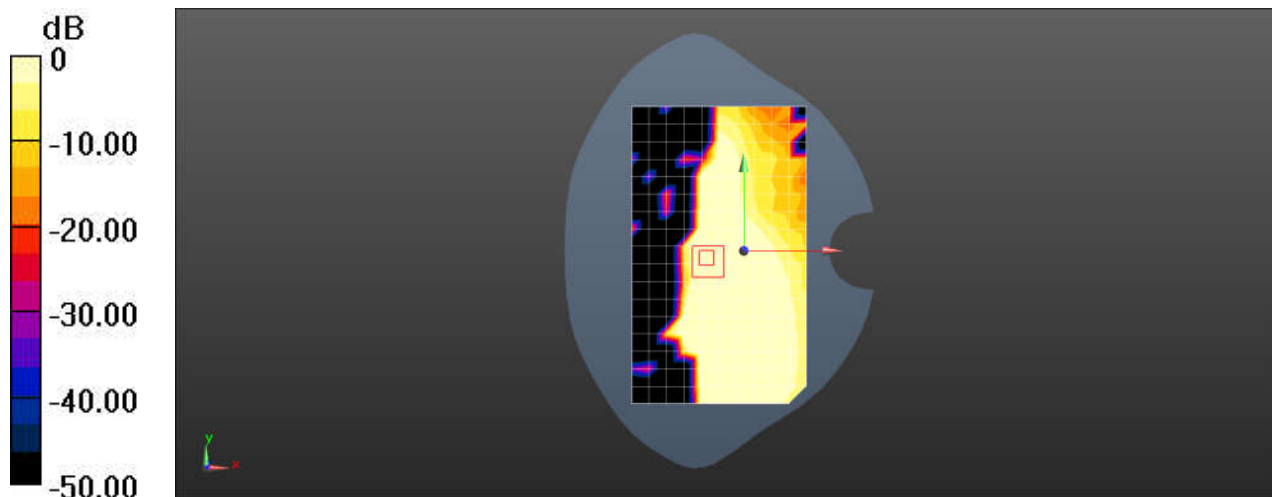

0 dB = 0.0223 W/kg = -16.52 dBW/kg