







Serial control mode select :
3 Wire interface format

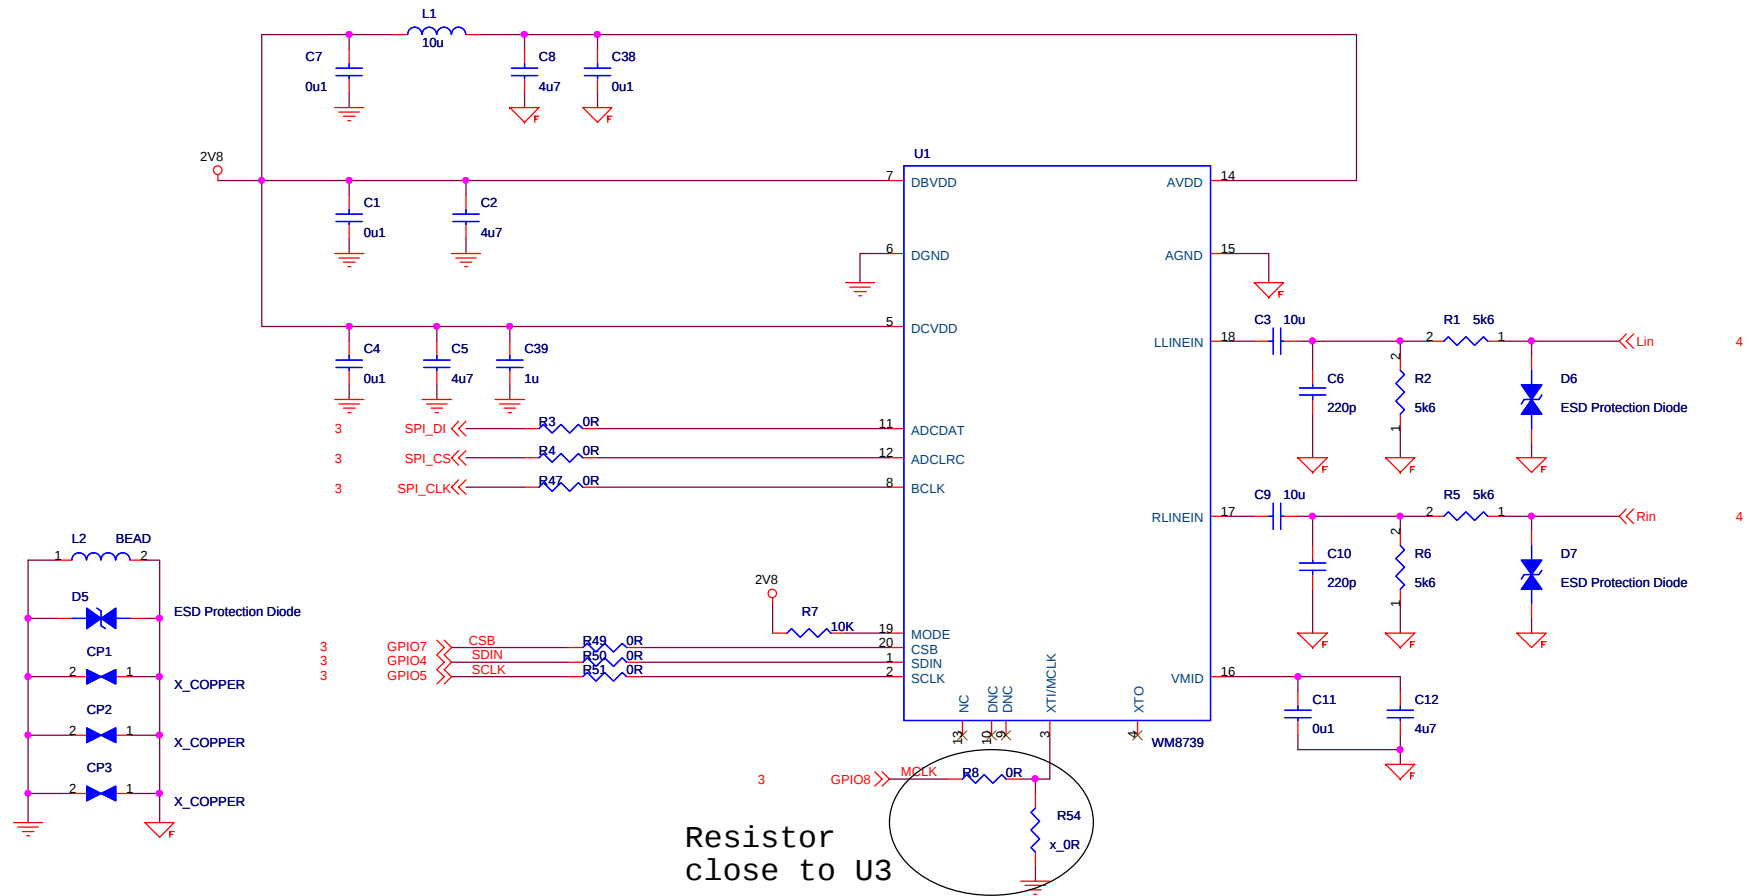

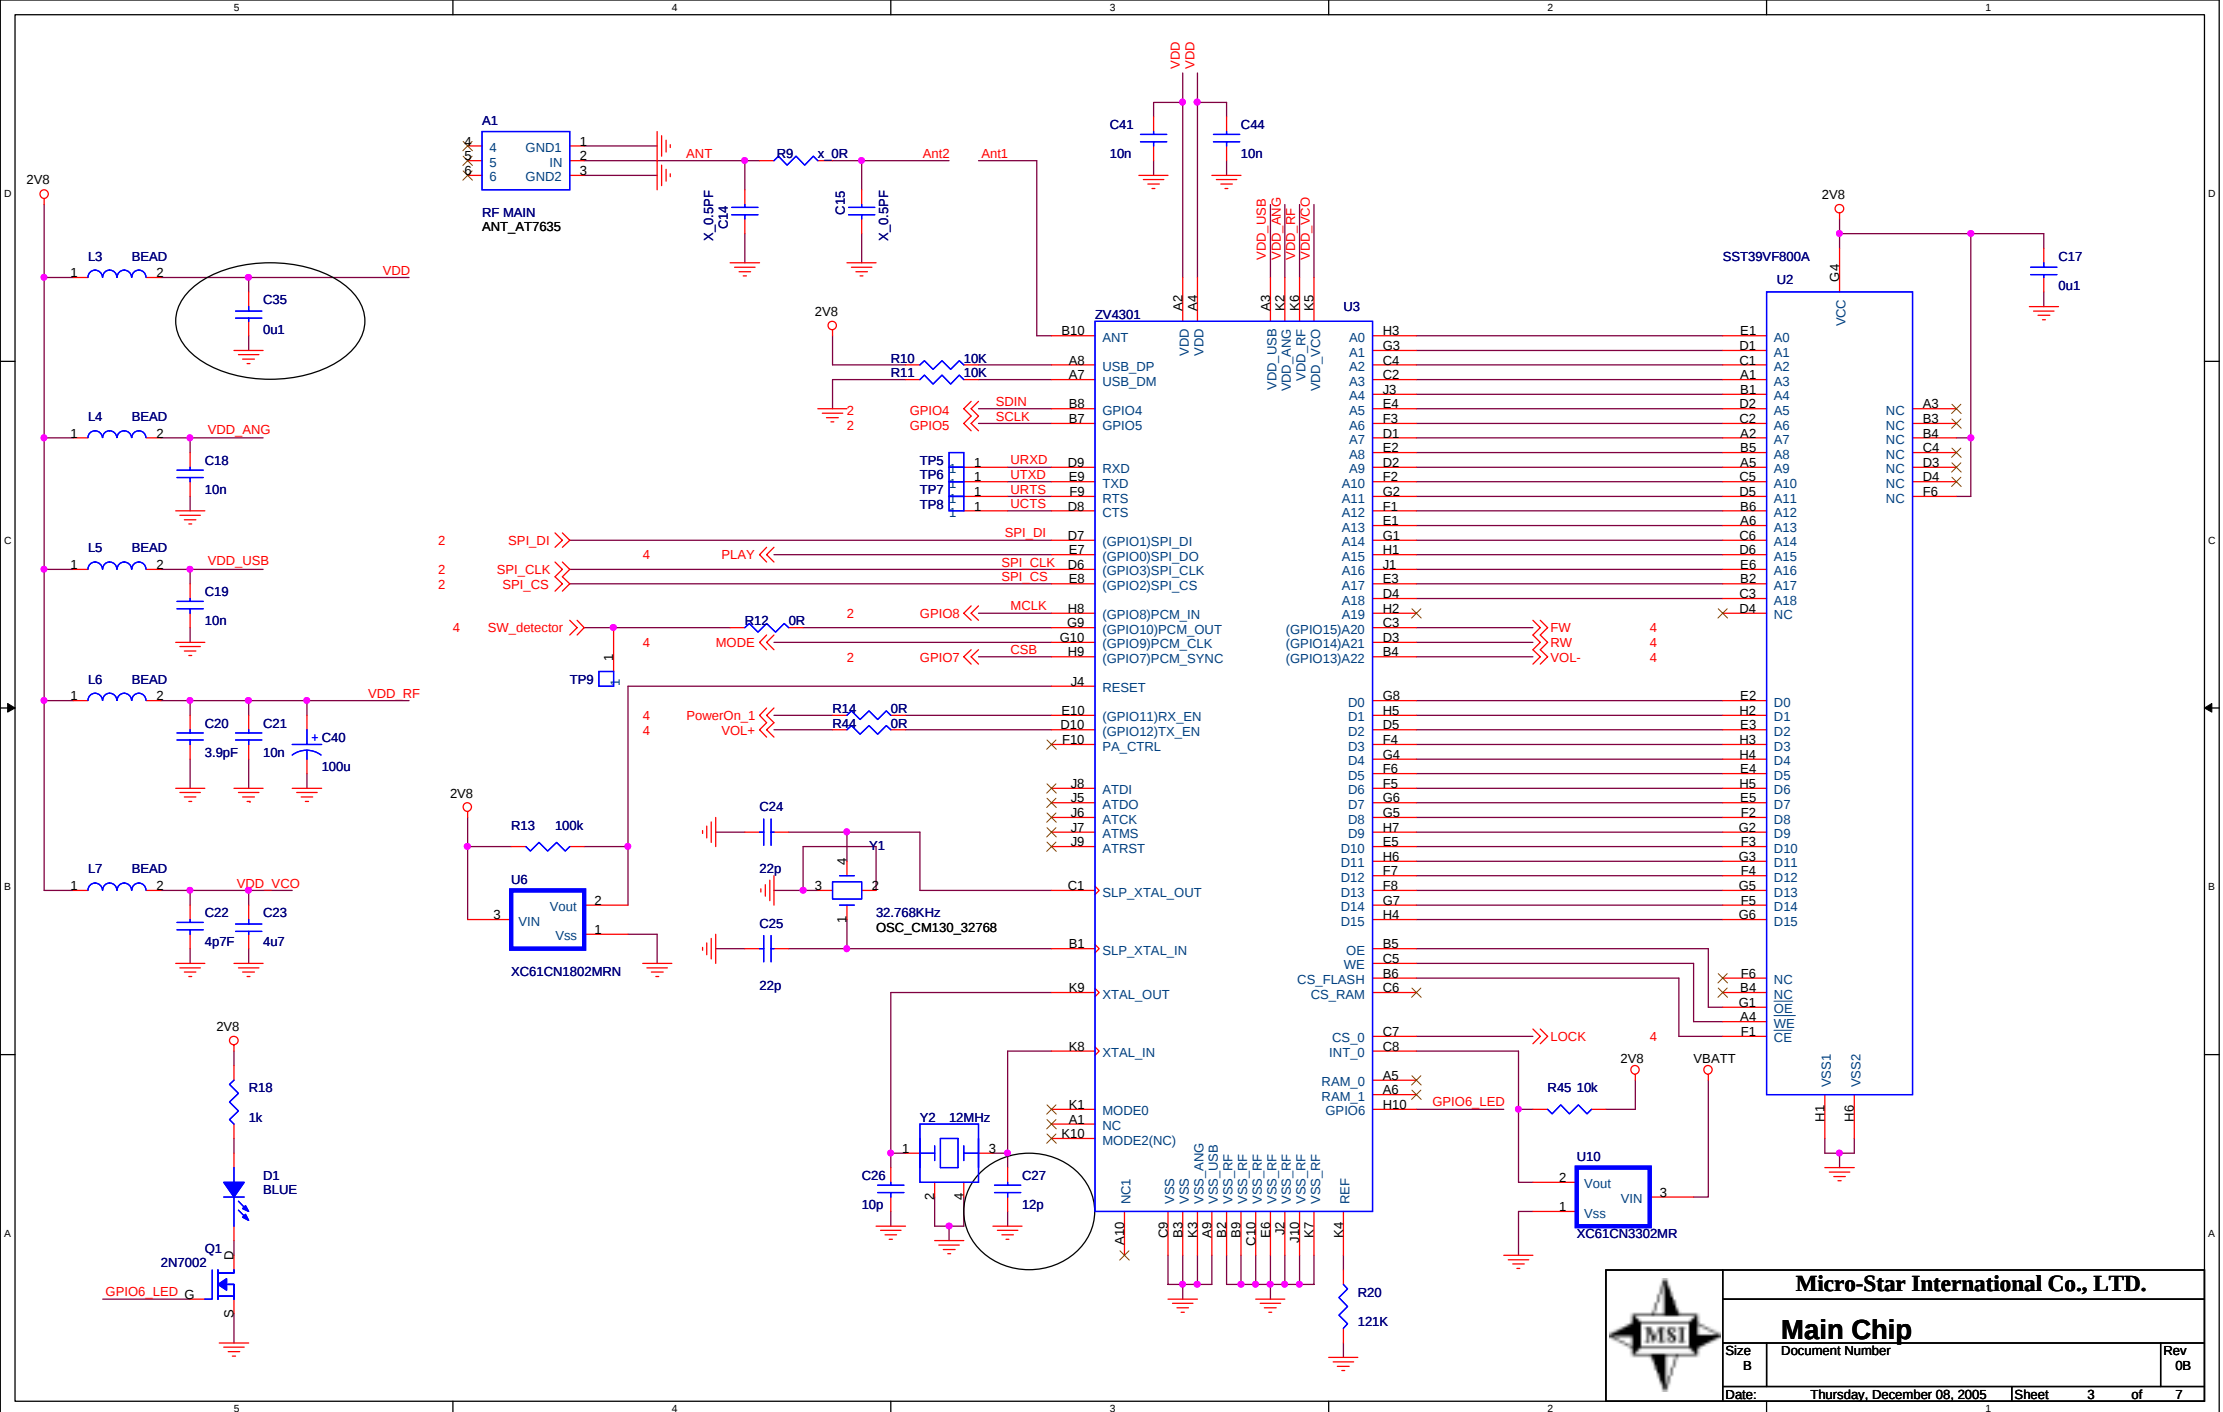

Micro-Star International Co., LTD.		
Main Chip		
Size B	Document Number	Rev 0B
Date:	Thursday, December 08, 2005	Sheet 3 of 7

Power On/Off

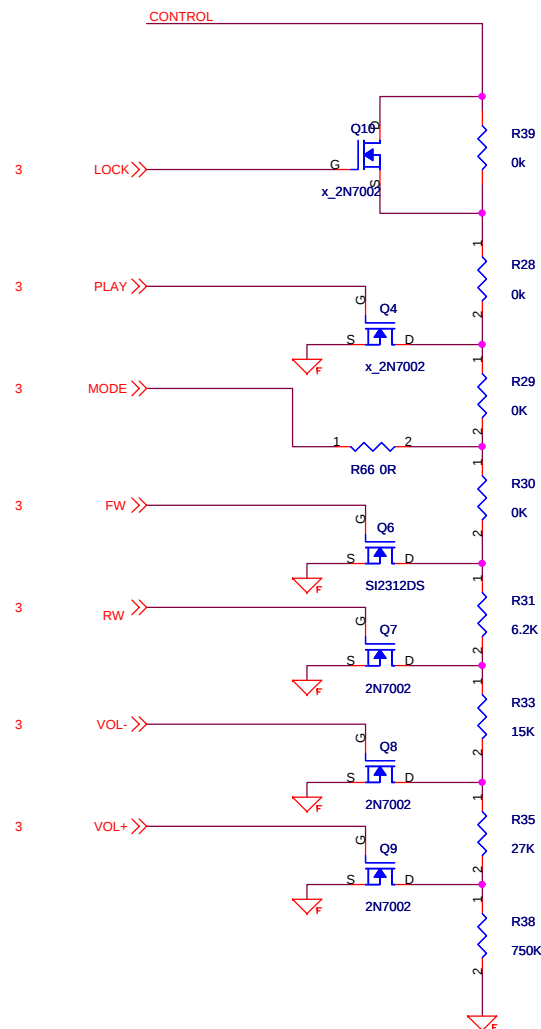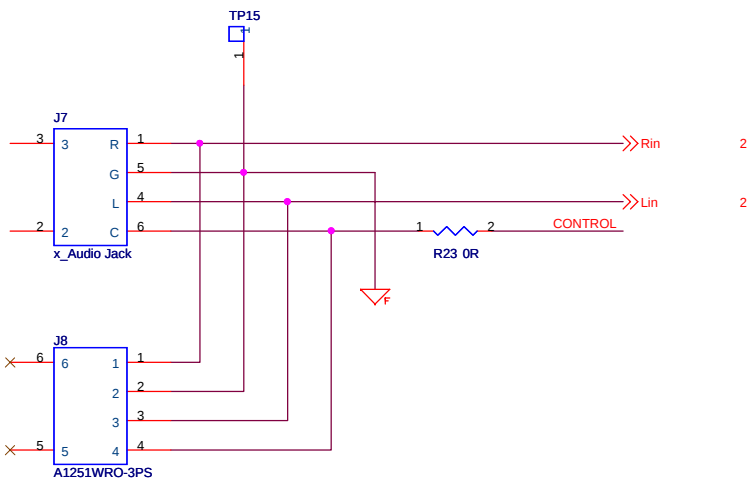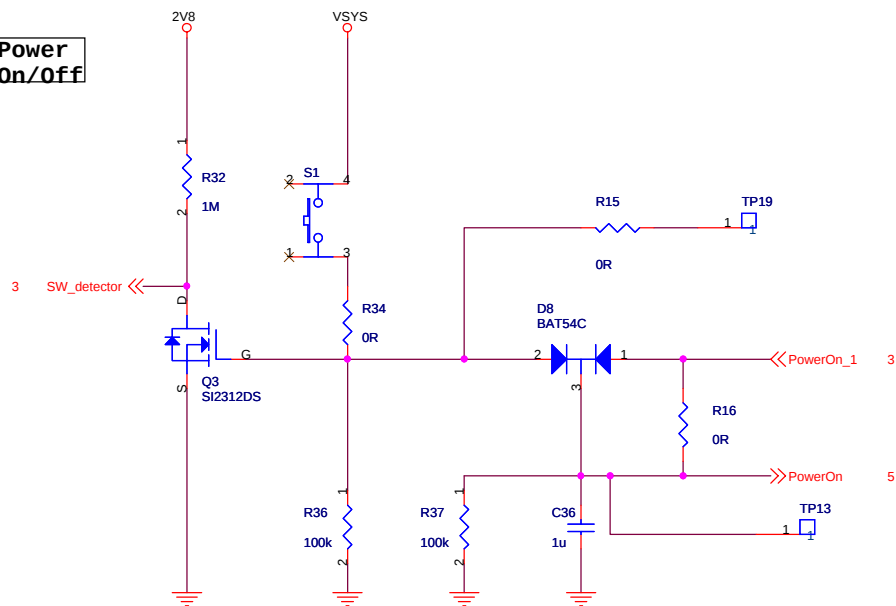


Micro-Star International Co., LTD.

Power

Size B	Document Number	Rev 0B
Date:	Thursday, December 08, 2005	Sheet 4 of 7





2.8V converter

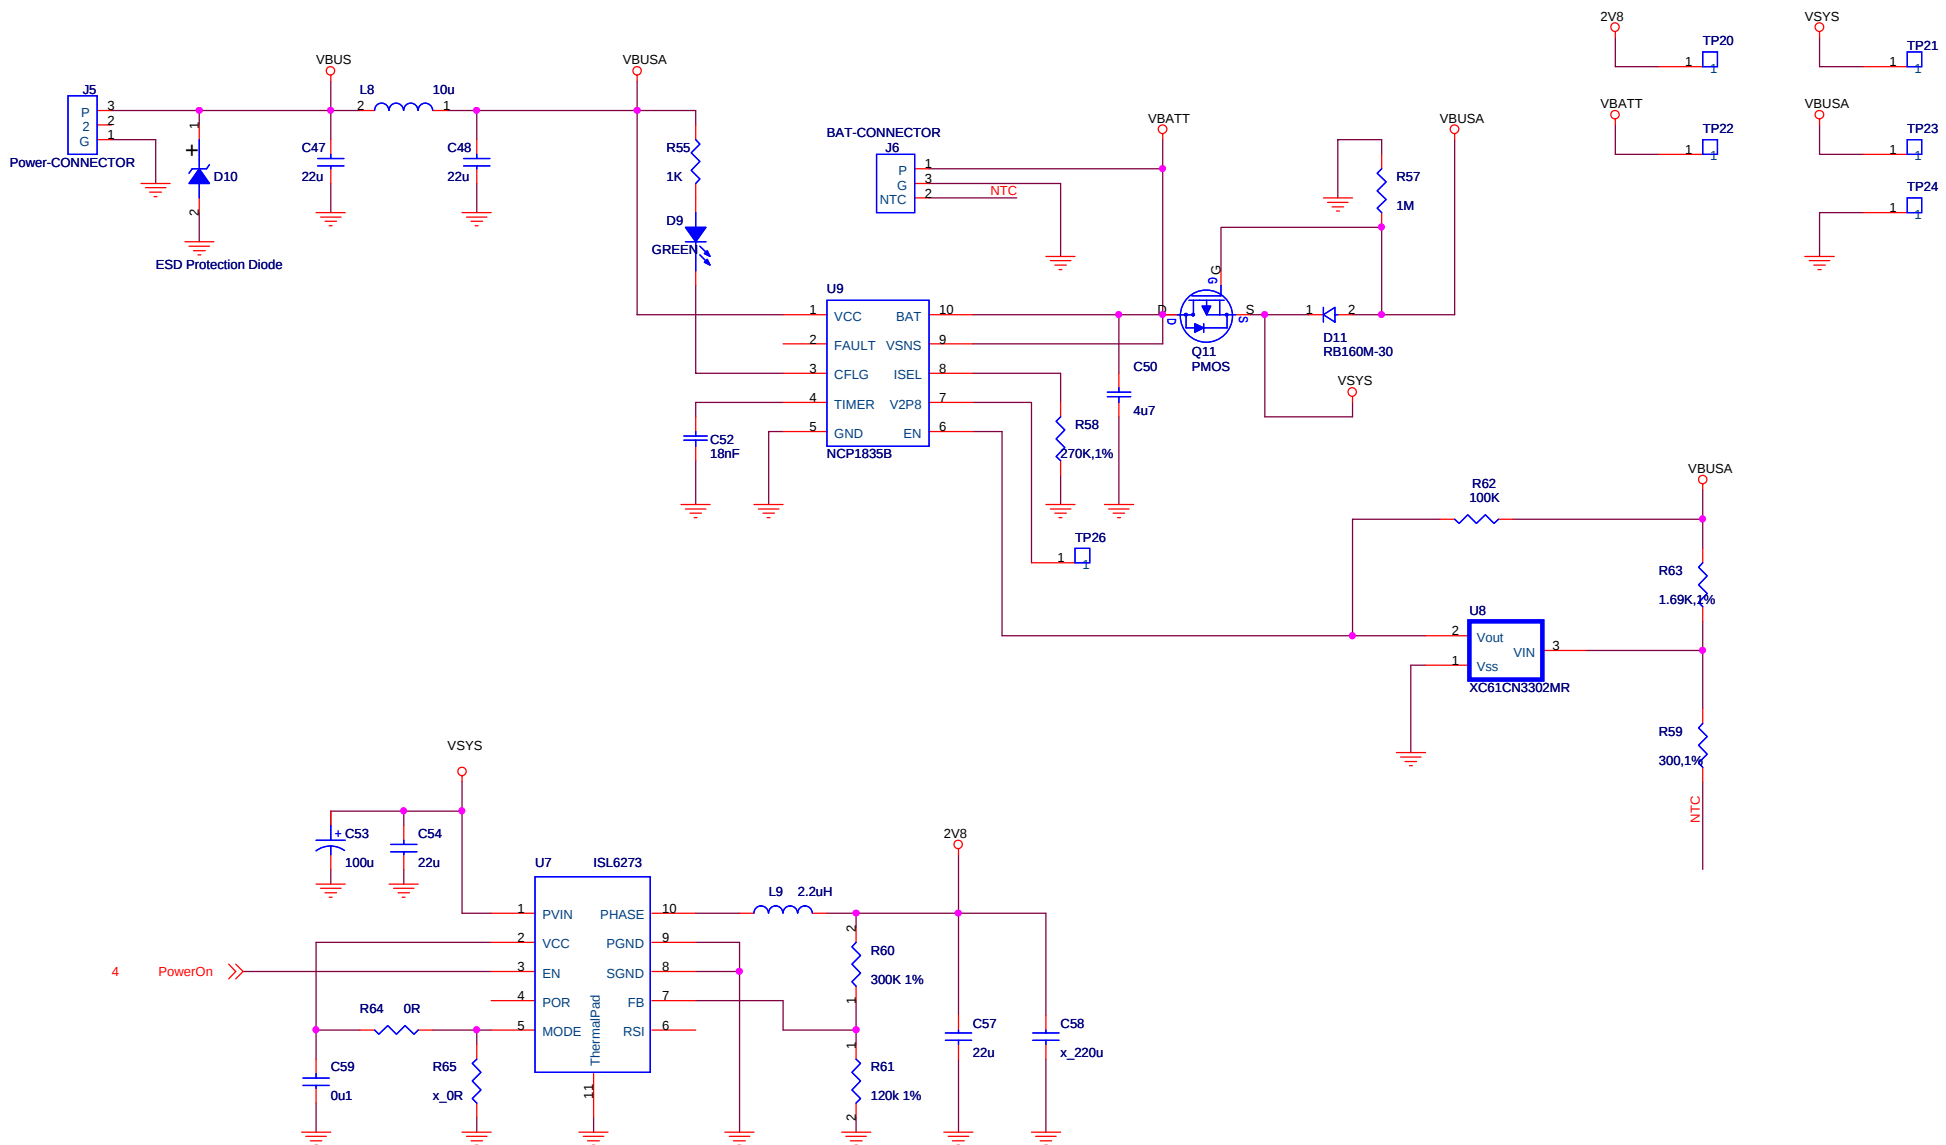

Micro-Star International Co., LTD.

Charge Circuit

Size B	Document Number	Rev 0B
Date:	Thursday, December 08, 2005	Sheet 5 of 7

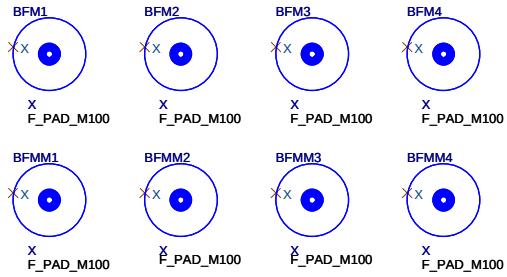

MS6868H-0A	First Version	20050729
MS6868H-0B	1.Replace LTC3405A with ISL6273 2.Add 4 pin audio connector	20050919
MS6868H-01S	1.Change L9 from 4.7uH to 2.2uH 2.Take out C58,Q4,Q10 3.Change R28,R29,R30,R39 to 0 ohm	20051207

MS6868D-00A	First version	20041214
MS6868D-00B	1. 6 single digital GND chang generally GND 2. GPIO6 chang GPIO10 3. PA_CARL pin 2 resistance not hit 4. INT pin to receive VBATT 5. Q3 chang D03-0231209-V02 6. 12M crystal 3p3 chang 12p 7. C16.18.19.21 chang 10n 8. C23 chnag 4.7u 9. R24 chnag 75K , R26 chnag 59K 10. R34 chnag 100 , R36 chnag 5K 11. 3.3V chnag 2.8V 12. To add some the ESD 13. VDD to add C35(0.1u) 14. To modify RESET cricuit 15. Power on to add R40(1M)、R41(5.1M)、C36(1u) to GND 16. To modify SW cricuit 17. To add D02-0071809-Z01 and D01-BAT54C9-M04 18. Power on o add BAT54C9	20050112
MS6868D-00B2	EMI Modify	20050201
MS6868D-100	1. 20050223 MVT; Q1 change PN; C30 and R25 modify value	20050223
MS6868D-101	R45 U5 move to 5010, remove R9	20050307
MS6868D-102	C12、C29 chang to 4.7u(0603)	20050309



Micro-Star International Co., LTD.		
Version		
Size B	Document Number	Rev 0B
Date:	Thursday, December 08, 2005	Sheet 7 of 7