LABEL AND LOCATION

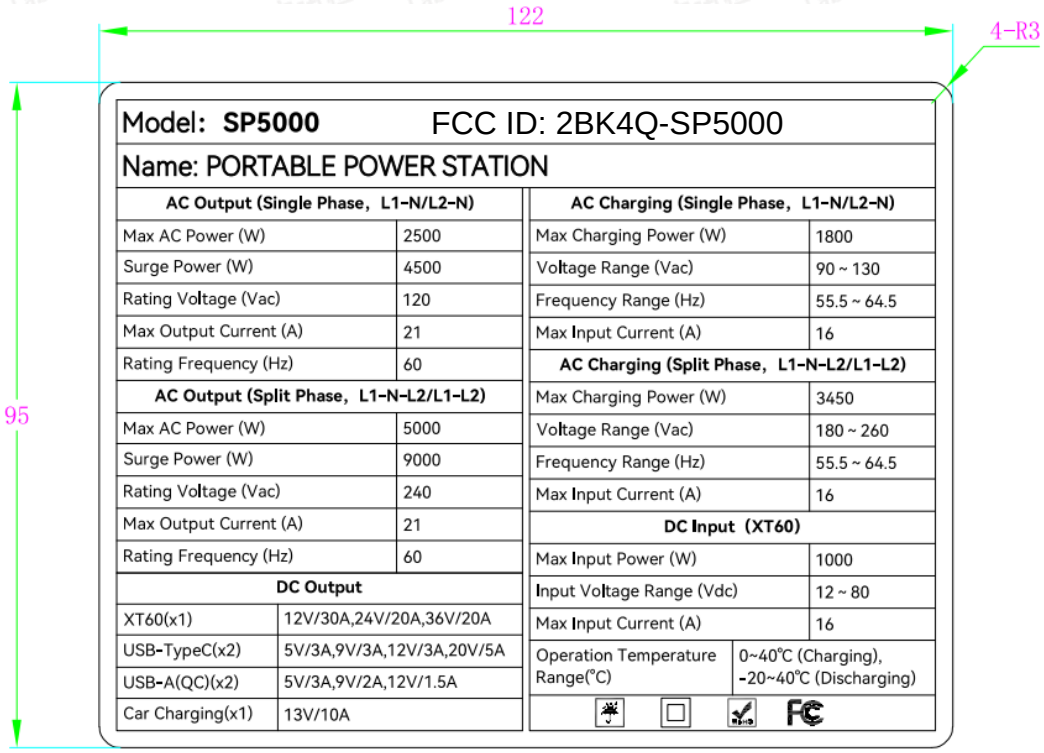

Model: **SP5000** FCC ID: 2BK4Q-SP5000

Name: PORTABLE POWER STATION

AC Output (Single Phase, L1-N/L2-N)	
Max AC Power (W)	2500
Surge Power (W)	4500
Rating Voltage (Vac)	120
Max Output Current (A)	21
Rating Frequency (Hz)	60
AC Output (Split Phase, L1-N-L2/L1-L2)	
Max AC Power (W)	5000
Surge Power (W)	9000
Rating Voltage (Vac)	240
Max Output Current (A)	21
Rating Frequency (Hz)	60
DC Output	
XT60(x1)	12V/30A,24V/20A,36V/20A
USB-TypeC(x2)	5V/3A,9V/3A,12V/3A,20V/5A
USB-A(QC)(x2)	5V/3A,9V/2A,12V/1.5A
Car Charging(x1)	13V/10A

AC Charging (Single Phase, L1-N/L2-N)	
Max Charging Power (W)	1800
Voltage Range (Vac)	90 ~ 130
Frequency Range (Hz)	55.5 ~ 64.5
Max Input Current (A)	16
AC Charging (Split Phase, L1-N-L2/L1-L2)	
Max Charging Power (W)	3450
Voltage Range (Vac)	180 ~ 260
Frequency Range (Hz)	55.5 ~ 64.5
Max Input Current (A)	16
DC Input (XT60)	
Max Input Power (W)	1000
Input Voltage Range (Vdc)	12 ~ 80
Max Input Current (A)	16
Operation Temperature Range(°C)	0~40°C (Charging), -20~40°C (Discharging)
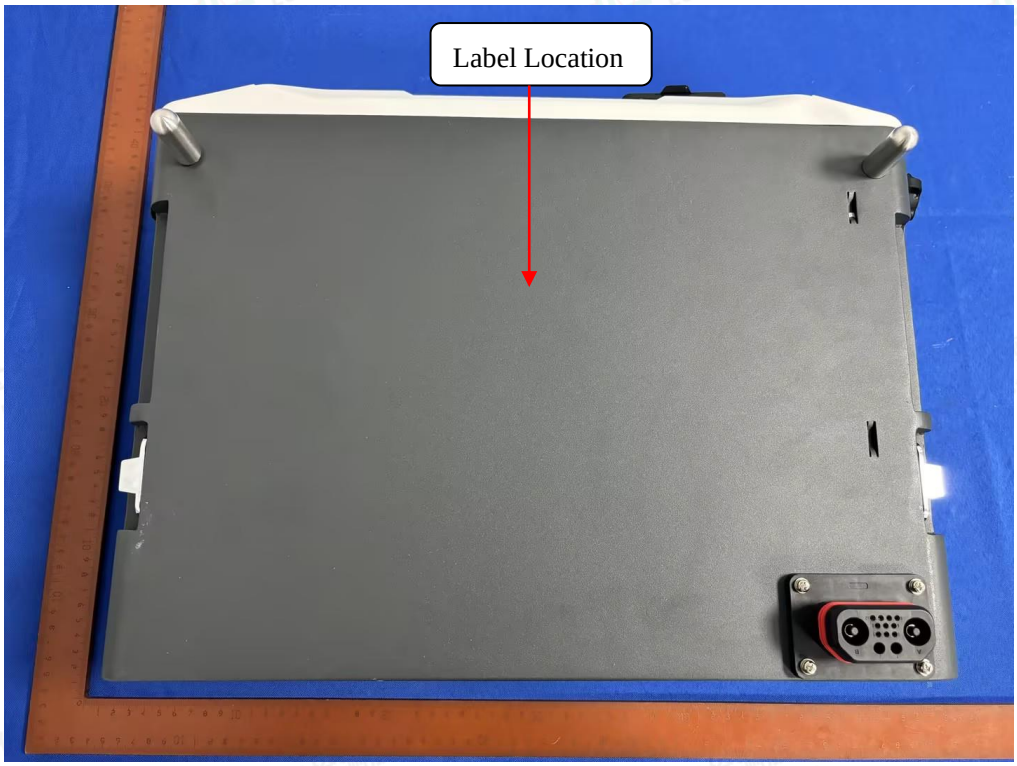
(Size: L: 122mm x W: 95mm)