

**Test Plot1#: GSM 850\_Body Back\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.905$  S/m;  $\epsilon_r = 42.507$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0686 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.035 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0705 W/kg

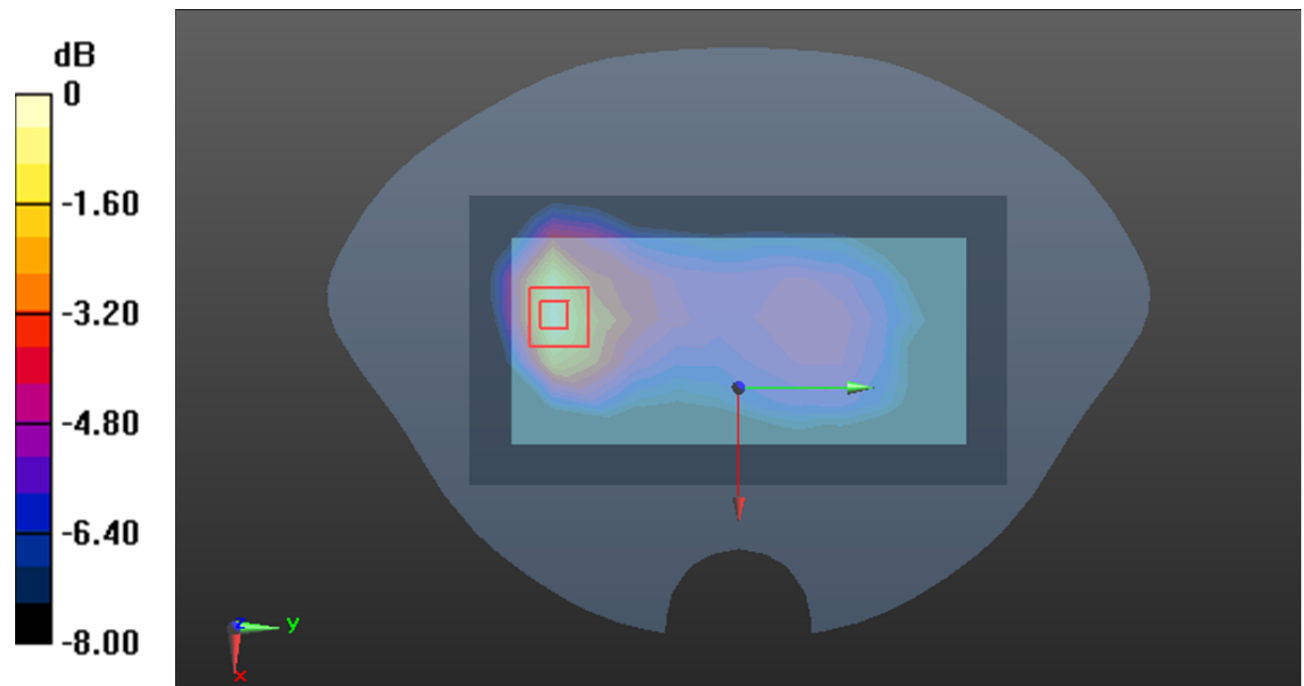

0 dB = 0.0705 W/kg = -11.52 dB dBW/kg

**Test Plot2#: GSM 850\_Head Right Cheek\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.507$ ;  $\rho=1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.273 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.58 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.422 W/kg

**SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.346 W/kg

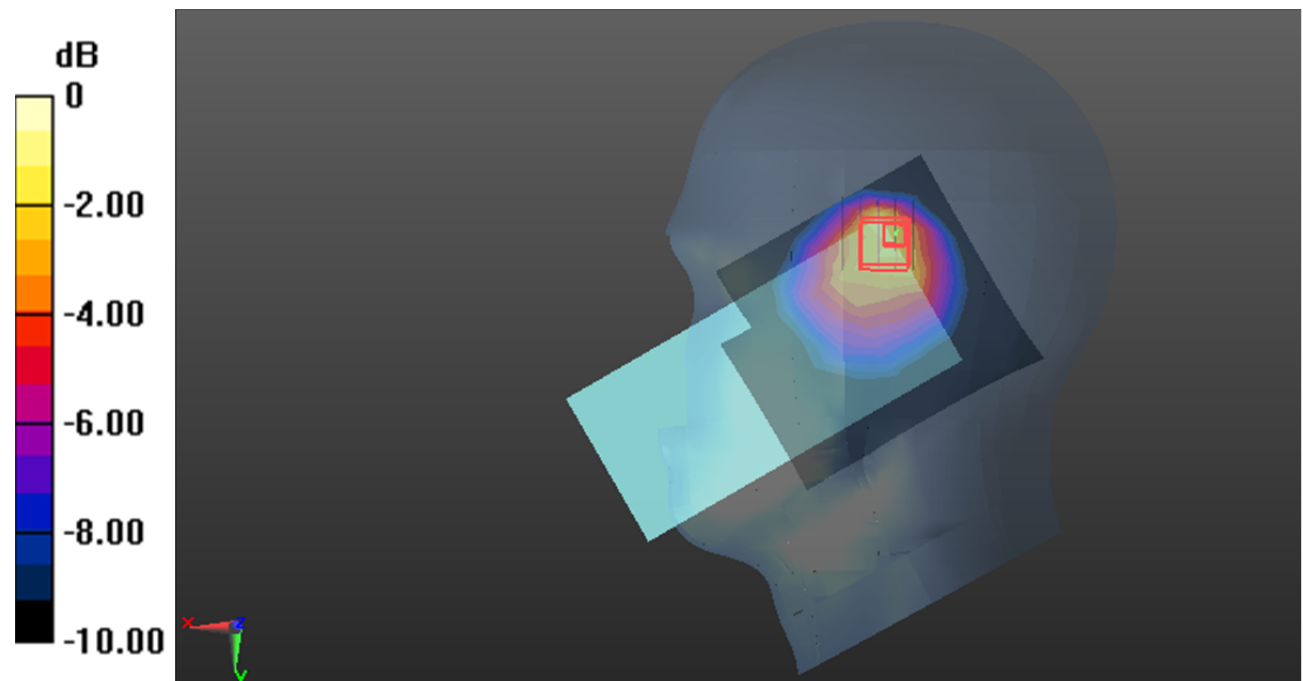

0 dB = 0.346 W/kg = -4.61 dB dBW/kg

**Test Plot3#: GSM 850\_Body Back\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.507$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.352 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.67 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.396 W/kg

**SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.169 W/kg**

Maximum value of SAR (measured) = 0.328 W/kg

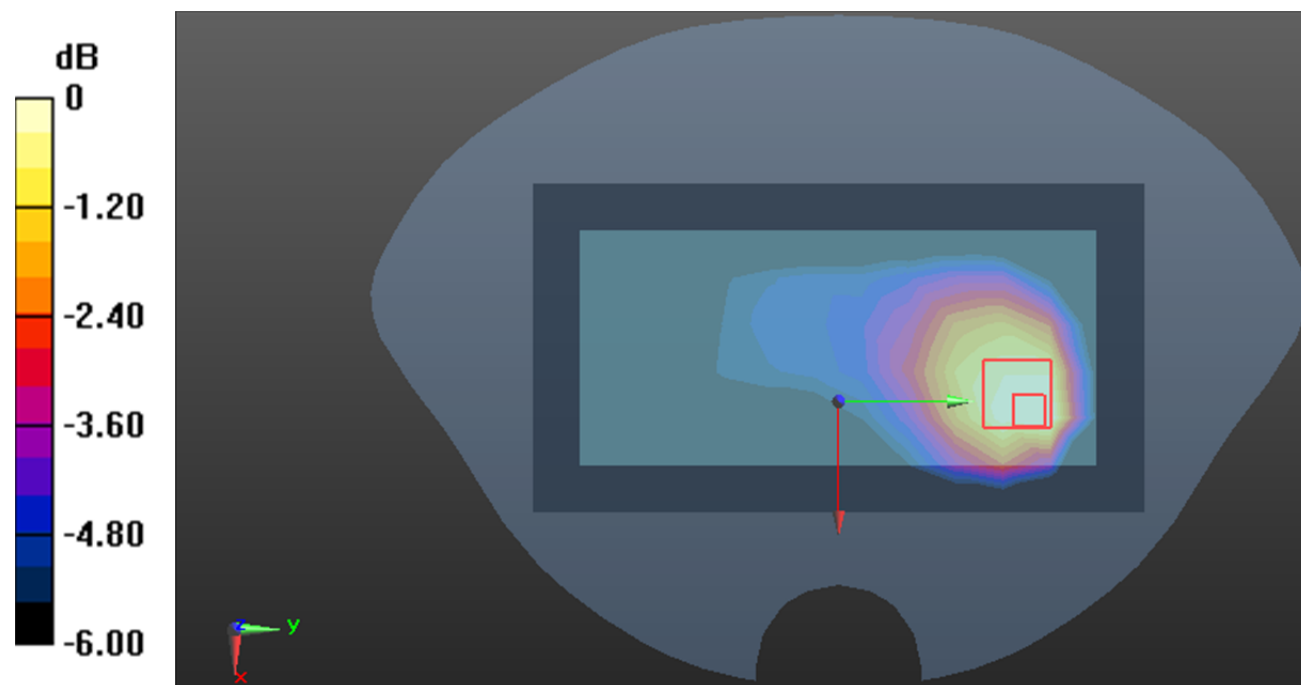

0 dB = 0.328 W/kg = -4.84 dB dBW/kg

**Test Plot4#: PCS 1900\_Body Bottom\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.394$  S/m;  $\epsilon_r = 39.668$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @ 1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.541 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.97 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.751 W/kg

**SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.244 W/kg**

Maximum value of SAR (measured) = 0.658 W/kg

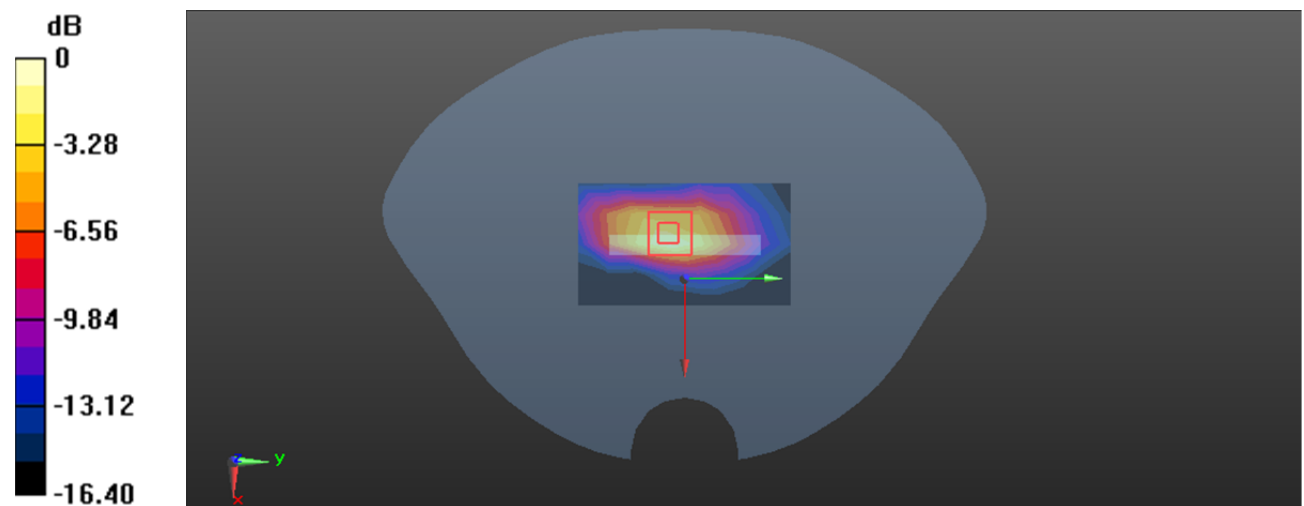

0 dB = 0.658 W/kg = -1.82 dBW/kg

**Test Plot5#: PCS 1900\_Head Right Tilt\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 1:8  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.394$  S/m;  $\epsilon_r = 39.668$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354;Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.344 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.664 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.560 W/kg

**SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.416 W/kg

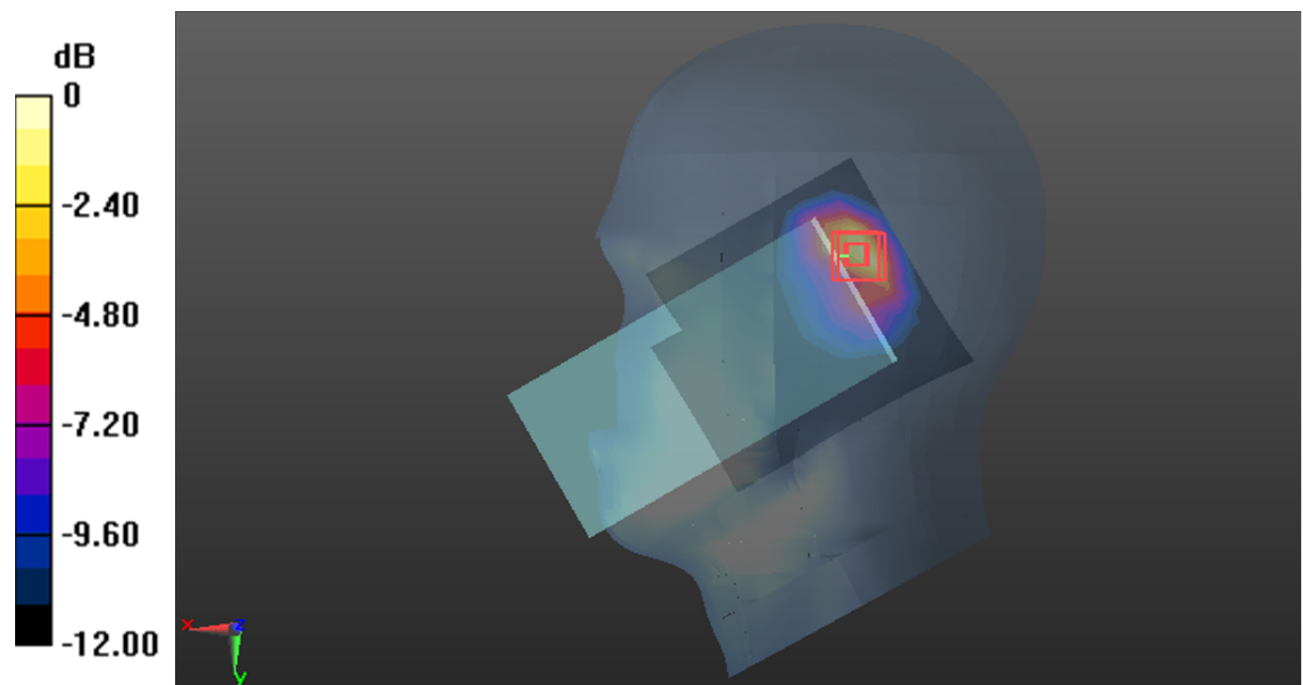

0 dB = 0.416 W/kg = -3.81 dB dBW/kg

**Test Plot6#: PCS 1900\_Body Back\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.394$  S/m;  $\epsilon_r = 39.668$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.597 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.578 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.725 W/kg

**SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 0.587 W/kg

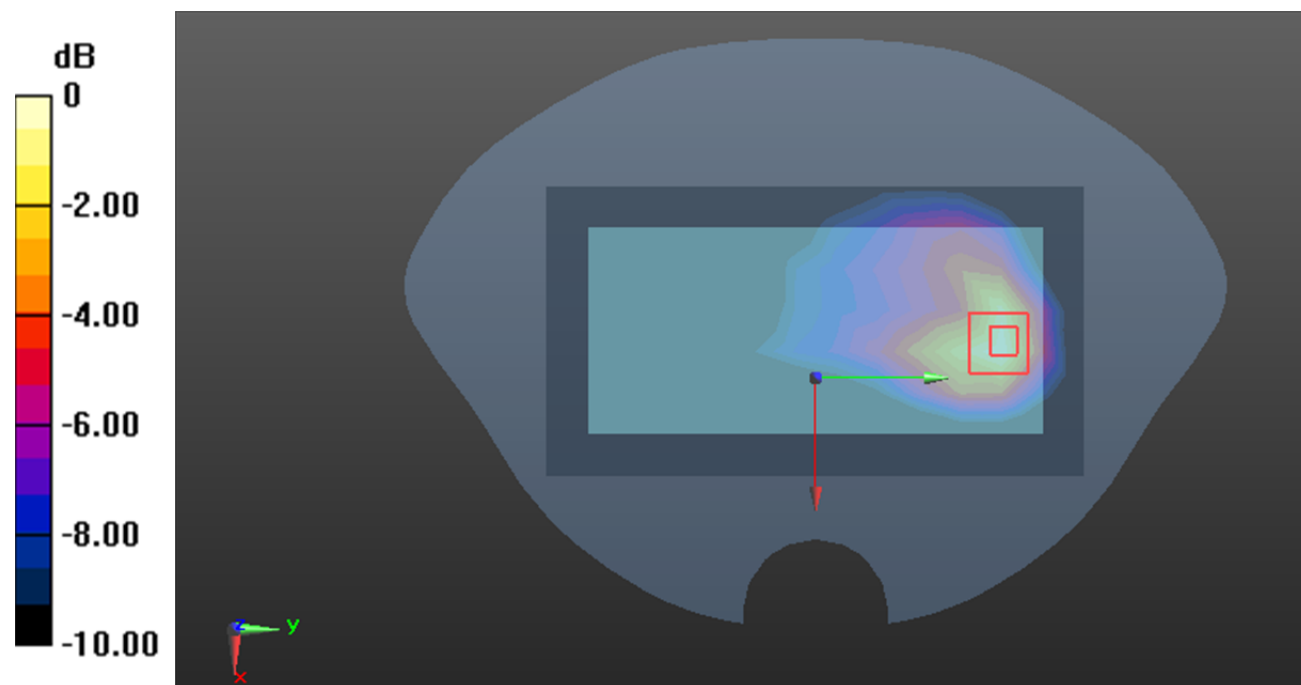

**Test Plot7#: WCDMA Band 2\_Body Bottom\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.394$  S/m;  $\epsilon_r = 39.668$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.365 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.57 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.432 W/kg

**SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.364 W/kg

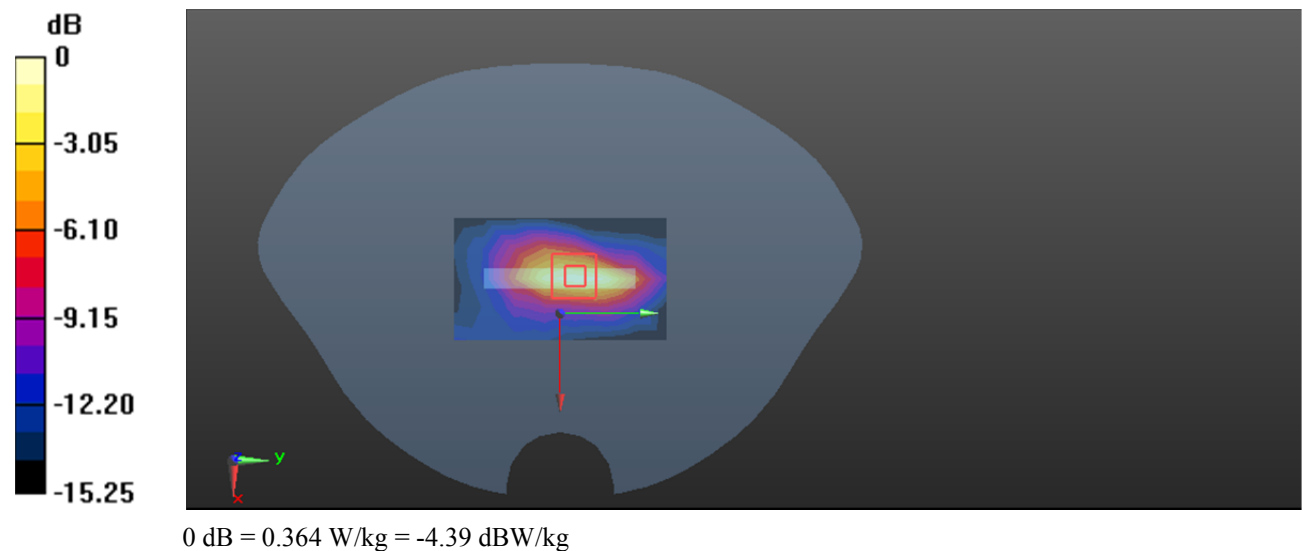

**Test Plot8#: WCDMA Band 2\_Head Right Cheek\_Middle Ant5****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.394$  S/m;  $\epsilon_r = 39.668$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.242 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.420 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.243 W/kg

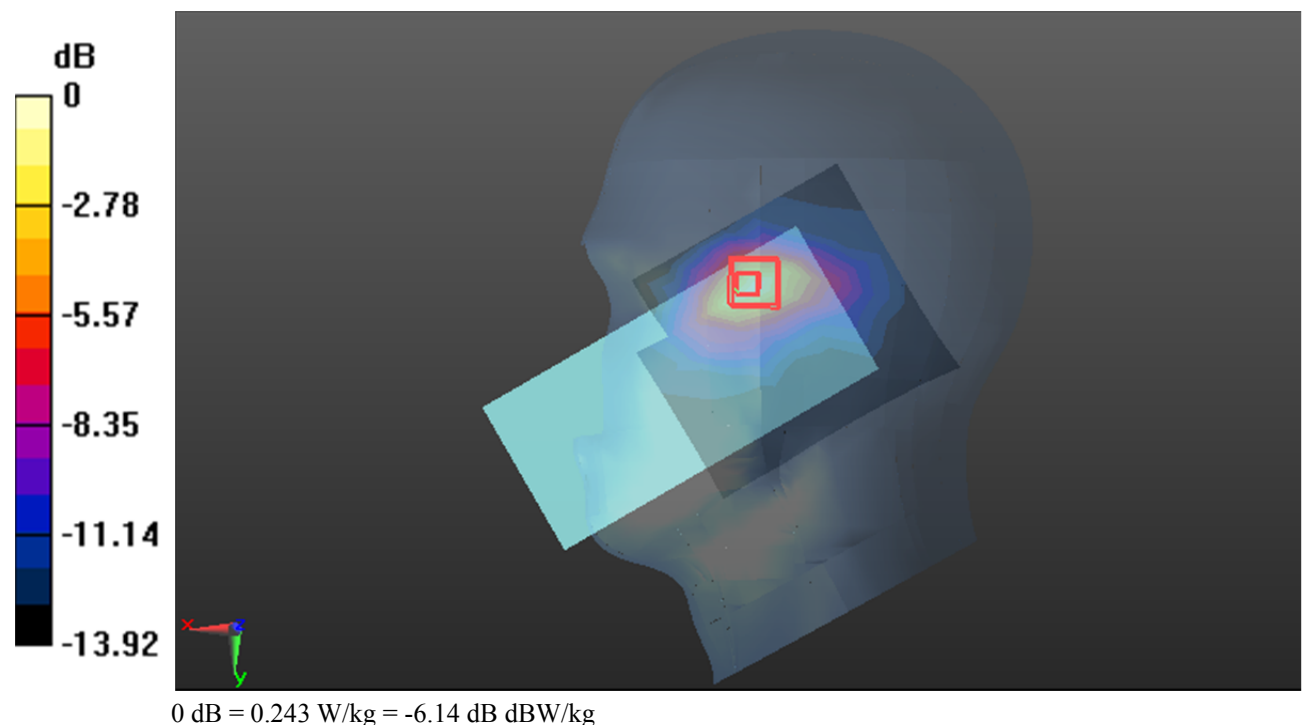



**Test Plot9#: WCDMA Band 2\_Body Back\_Middle Ant5****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.394$  S/m;  $\epsilon_r = 39.668$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0592 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.401 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.100 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0871 W/kg

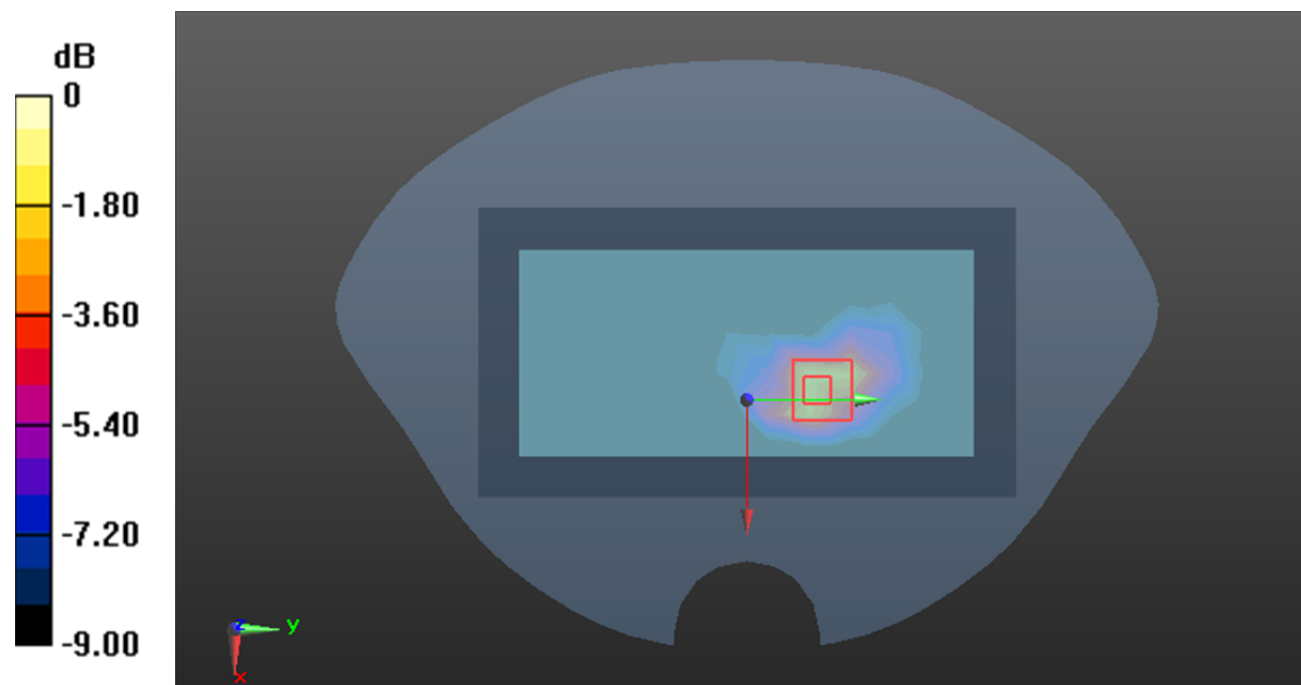

0 dB = 0.0871 W/kg = -10.60 dB dBW/kg

**Test Plot10#: WCDMA Band 4\_Body Back\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1732.6$  MHz;  $\sigma = 1.374$  S/m;  $\epsilon_r = 41.261$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0578 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.005 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0640 W/kg

**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0559 W/kg

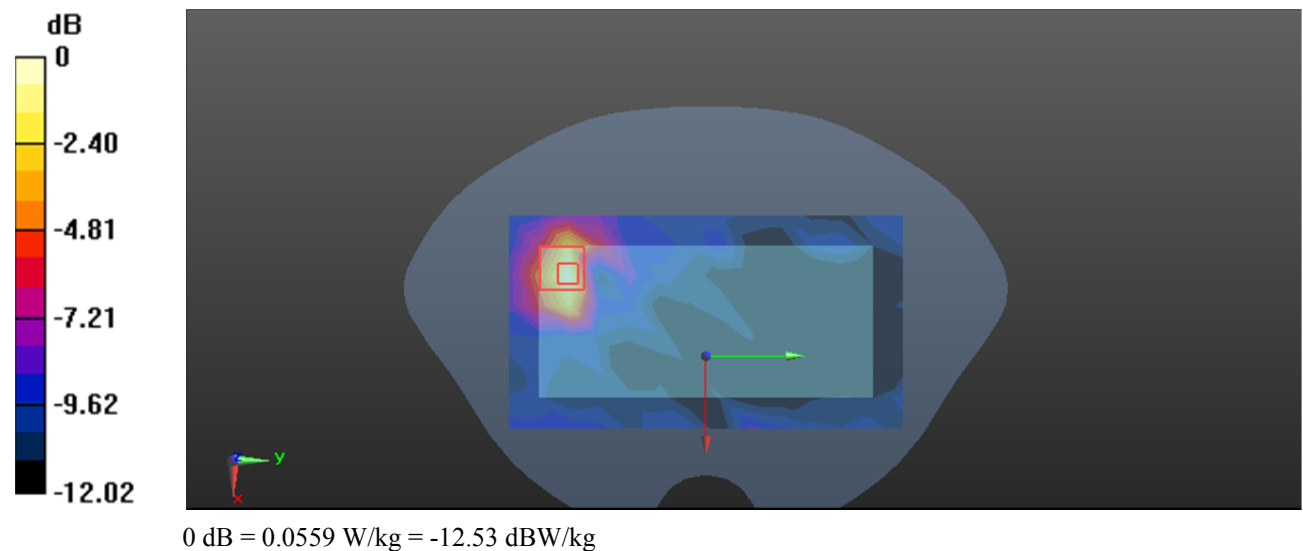

**Test Plot11#: WCDMA Band 4\_Head Right Cheek\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f=1732.6$  MHz;  $\sigma = 1.374$  S/m;  $\epsilon_r = 41.261$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.375 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.04 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.534 W/kg

**SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.163 W/kg**

Maximum value of SAR (measured) = 0.464 W/kg

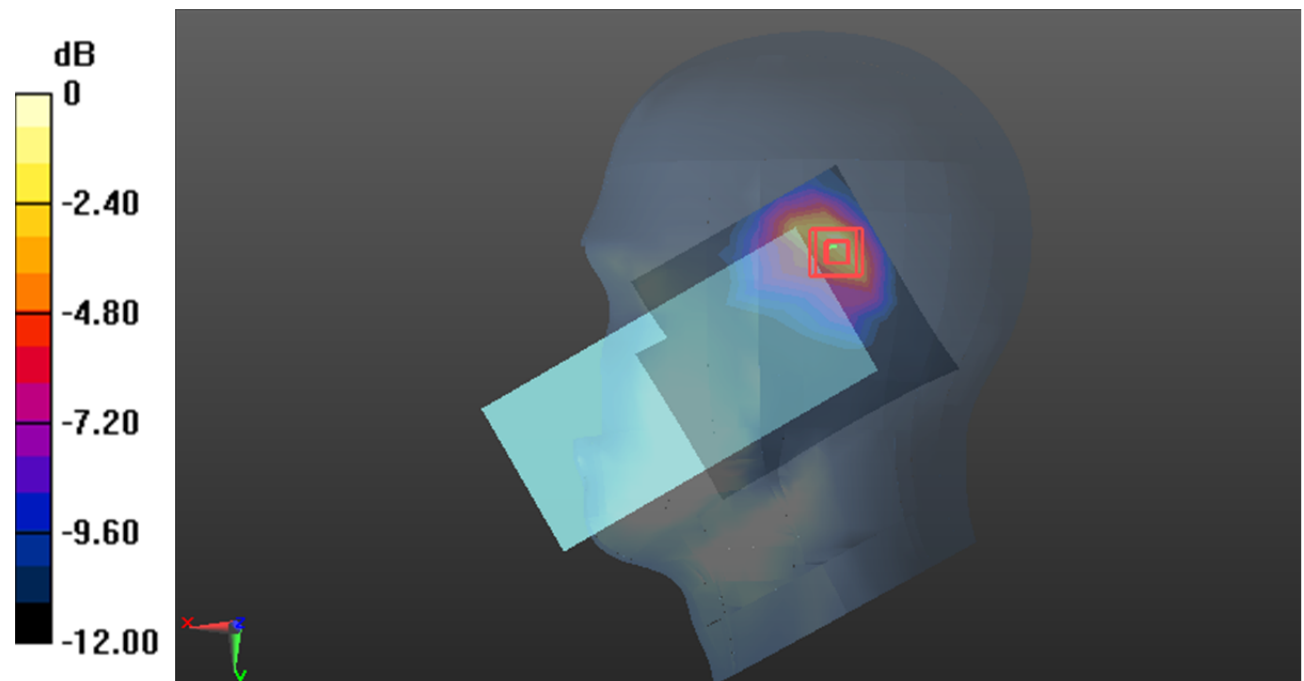

0 dB = 0.464 W/kg = -3.33 dB dBW/kg

**Test Plot12#: WCDMA Band 4\_Body Top\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f=1732.6$  MHz;  $\sigma = 1.374$  S/m;  $\epsilon_r = 41.261$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.160 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.22 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.189 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.159 W/kg

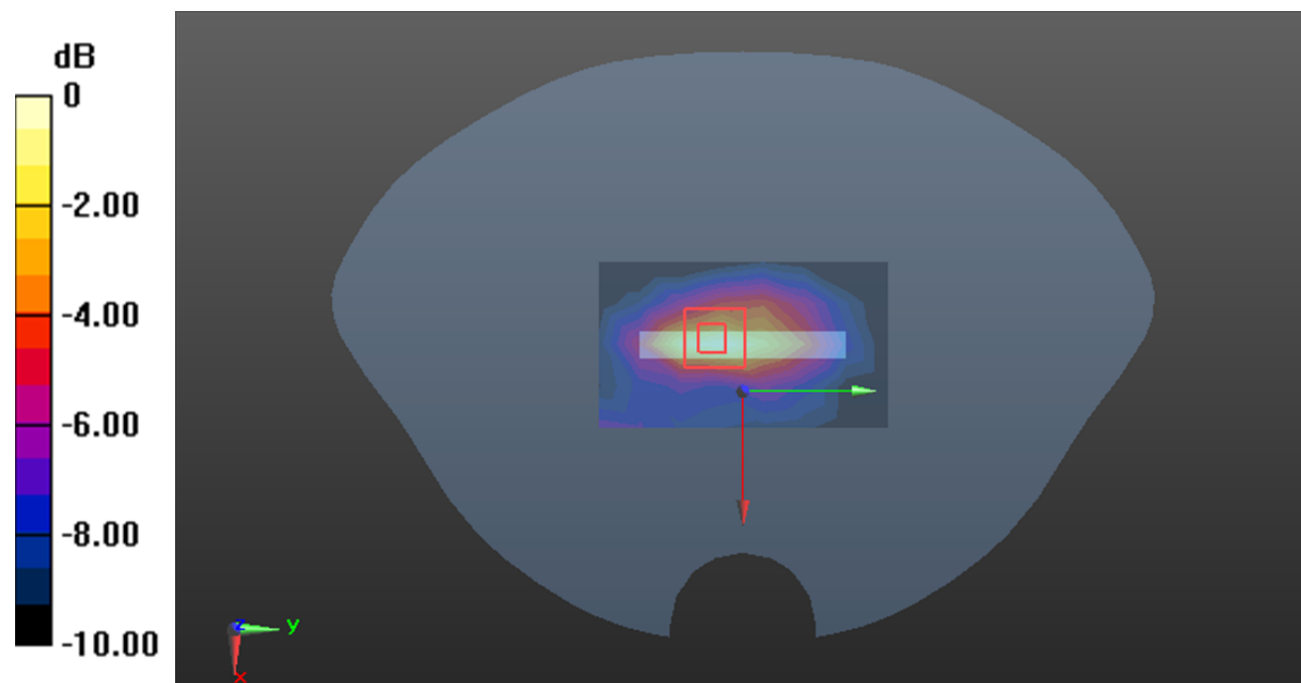

0 dB = 0.159 W/kg = -7.99 dB dBW/kg

**Test Plot13#: WCDMA Band 5\_Head Left Cheek\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=836.6$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.507$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0409 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.181 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0460 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0443 W/kg

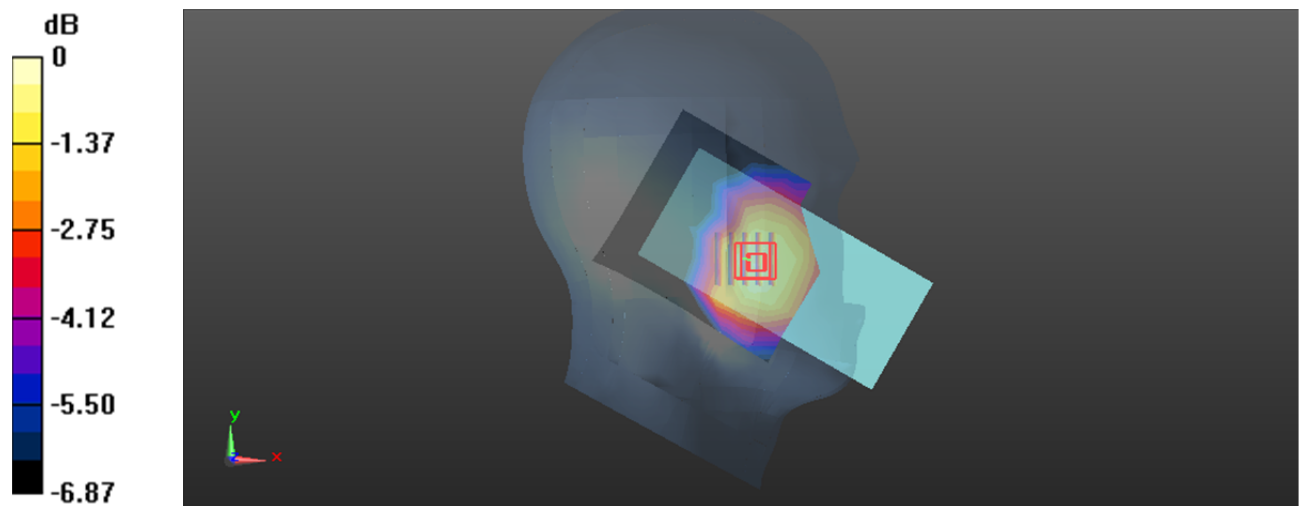

0 dB = 0.0443 W/kg = -13.54 dBW/kg

**Test Plot14#: WCDMA Band 5\_Body Back\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=836.6$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.507$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.121 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.925 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.141 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.121 W/kg

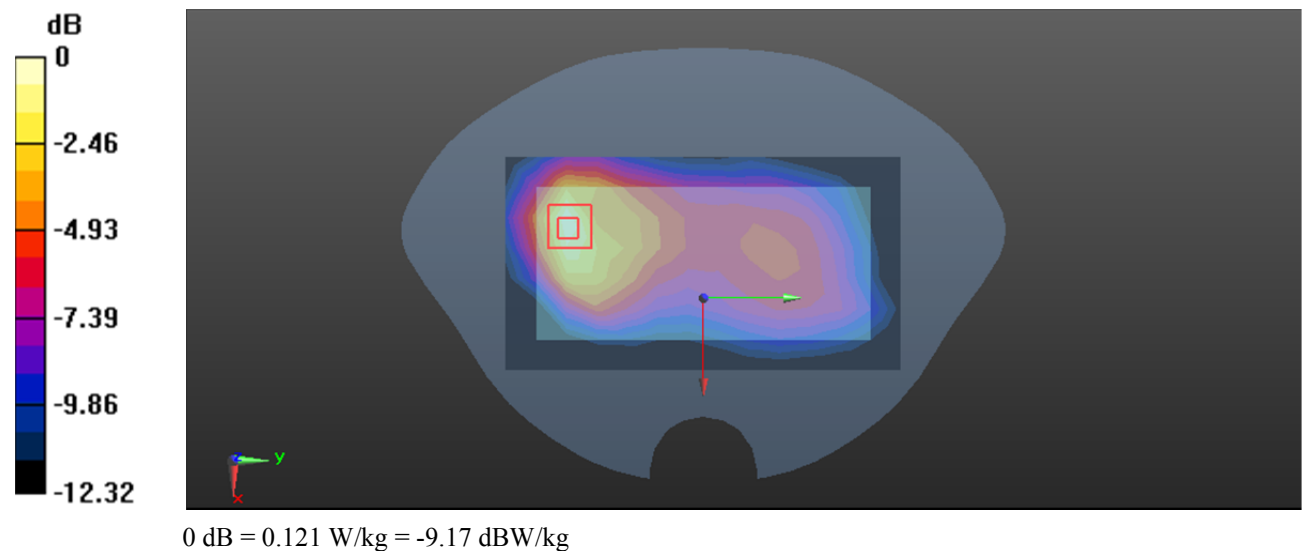

**Test Plot15#: WCDMA Band 5\_Head Right Cheek\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.507$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.945 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.20 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.473 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

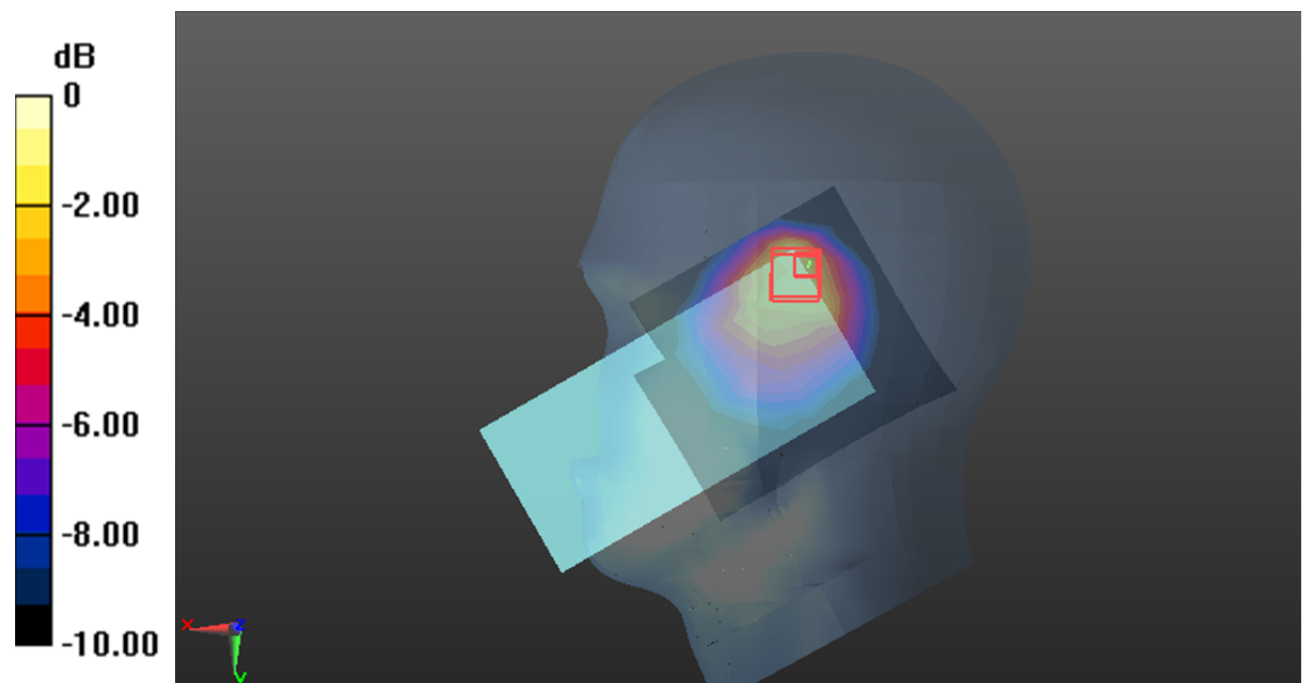

0 dB = 1.18 W/kg = 0.72 dB dBW/kg

**Test Plot16#: WCDMA Band 5\_Body Back\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.507$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.352 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.93 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.421 W/kg

**SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 0.355 W/kg

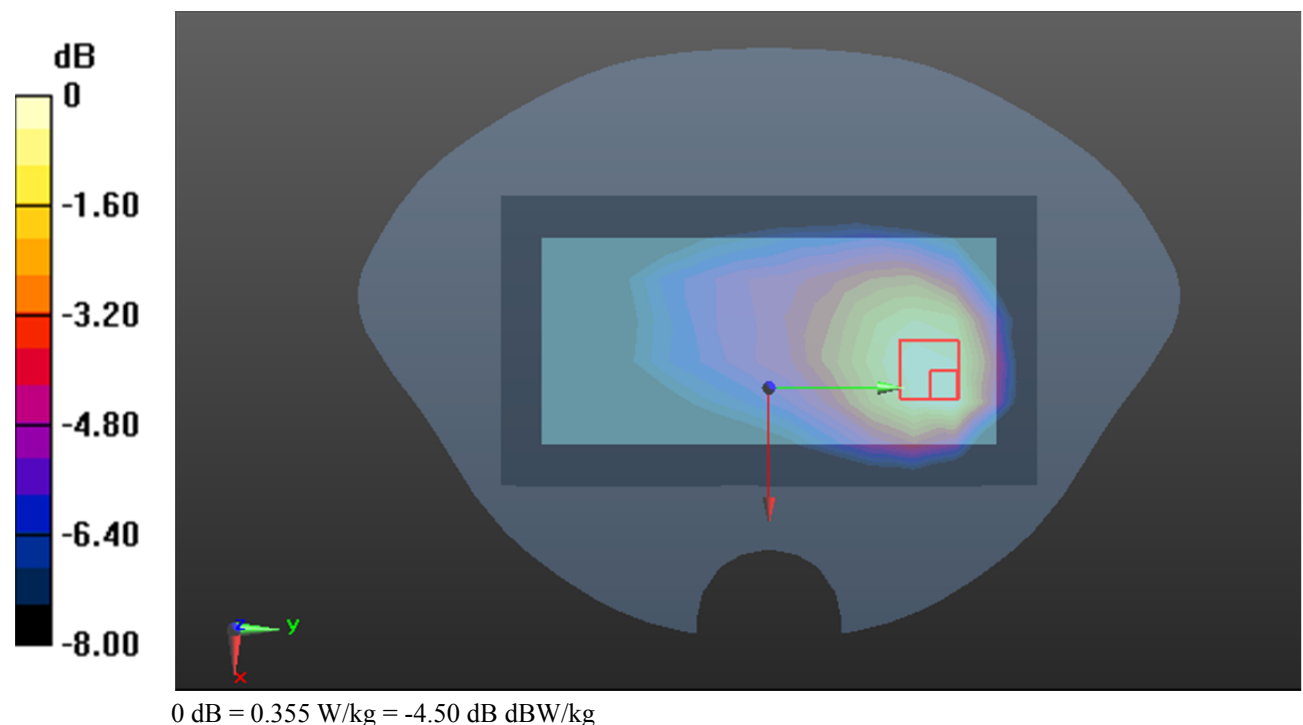



**Test Plot17#: LTE Band 2\_Body Bottom\_50%RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.397$  S/m;  $\epsilon_r = 39.401$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.574 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.78 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.500 W/kg; SAR(10 g) = 0.241 W/kg**

Maximum value of SAR (measured) = 0.830 W/kg

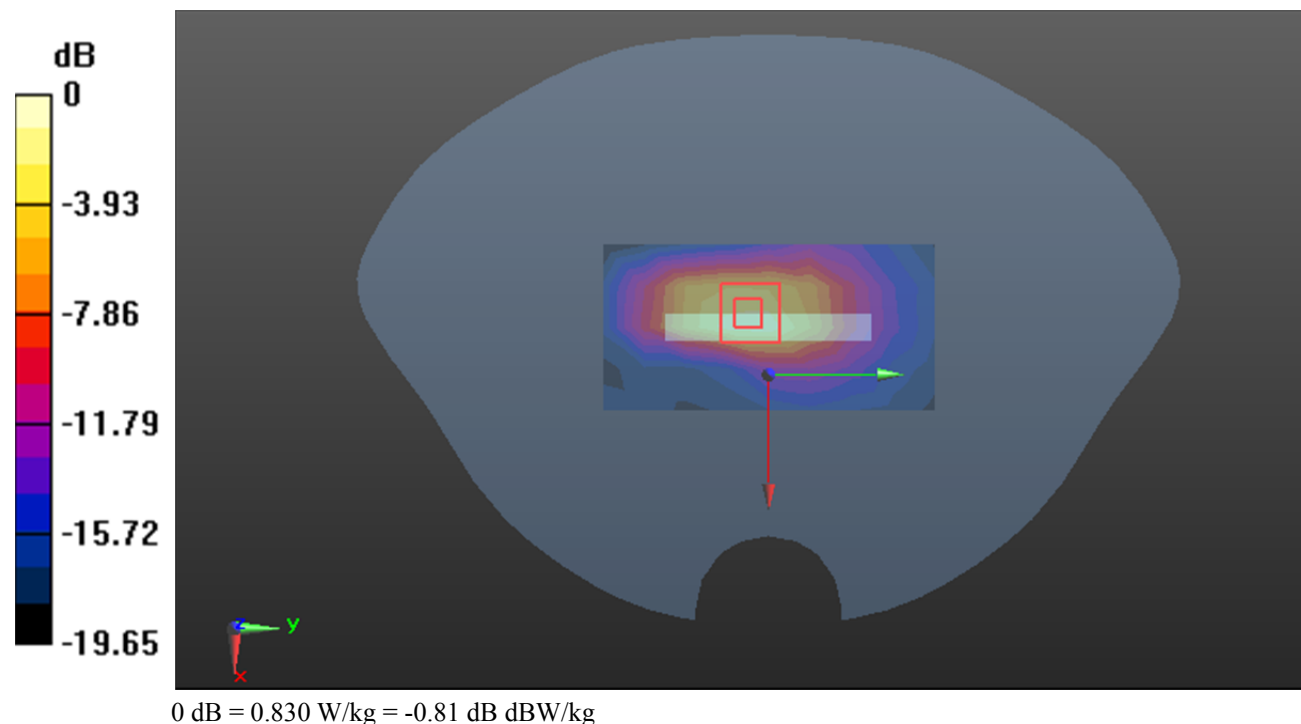

**Test Plot18#: LTE Band 2\_Head Right Cheek\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.397$  S/m;  $\epsilon_r = 39.401$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0921 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.241 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.126 W/kg

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.107 W/kg

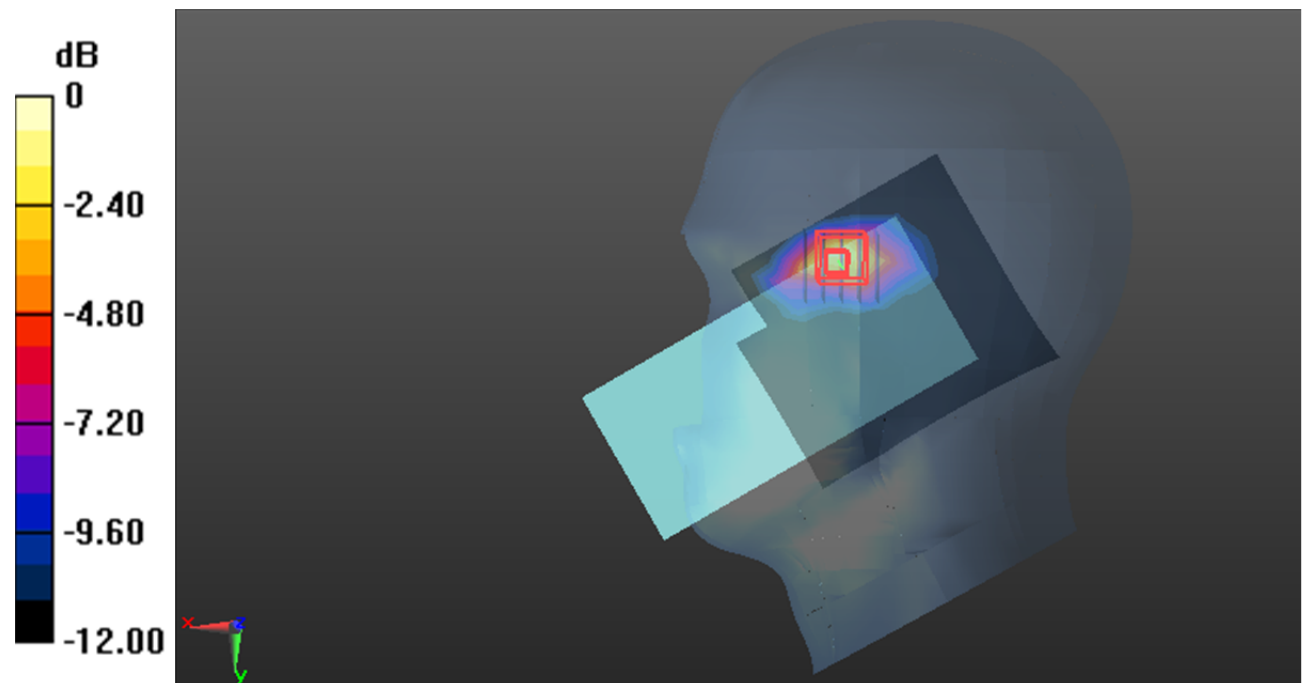

0 dB = 0.107 W/kg = -9.71 dB dBW/kg

**Test Plot19#: LTE Band 2\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.397$  S/m;  $\epsilon_r = 39.401$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0894 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.446 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0990 W/kg

**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0860 W/kg

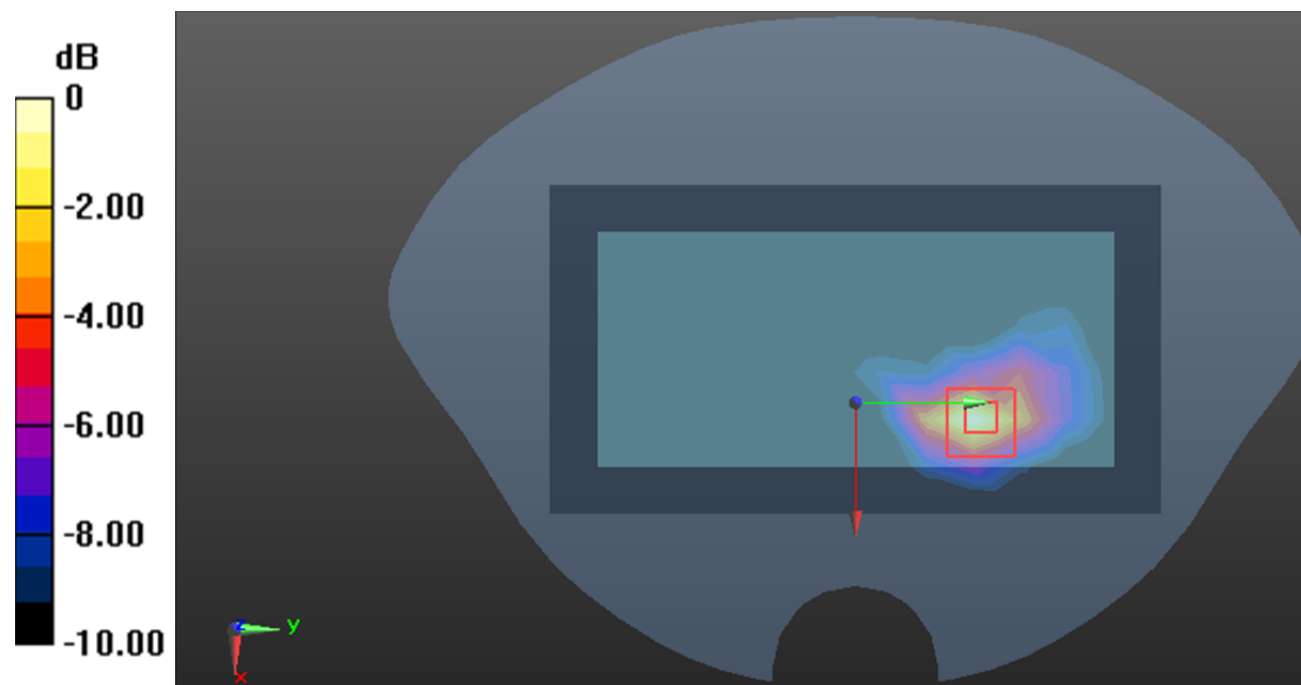

0 dB = 0.0860 W/kg = -10.66 dBW/kg

**Test Plot20#: LTE Band 5\_Head Right Cheek\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.899$  S/m;  $\epsilon_r=42.154$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0384 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.535 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0410 W/kg

**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0392 W/kg

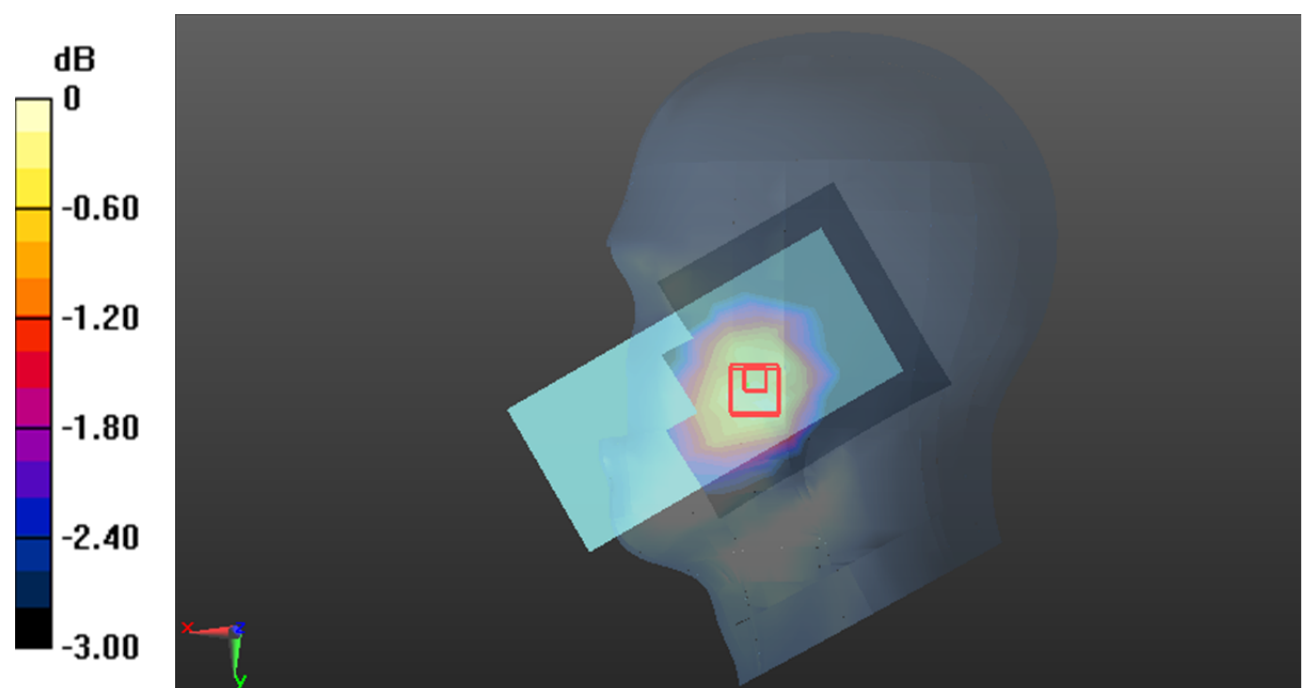

0 dB = 0.0392 W/kg = -14.07 dB dBW/kg

**Test Plot21#: LTE Band 5\_Body Back\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.899$  S/m;  $\epsilon_r=42.154$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.121 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.416 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.145 W/kg

**SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.123 W/kg

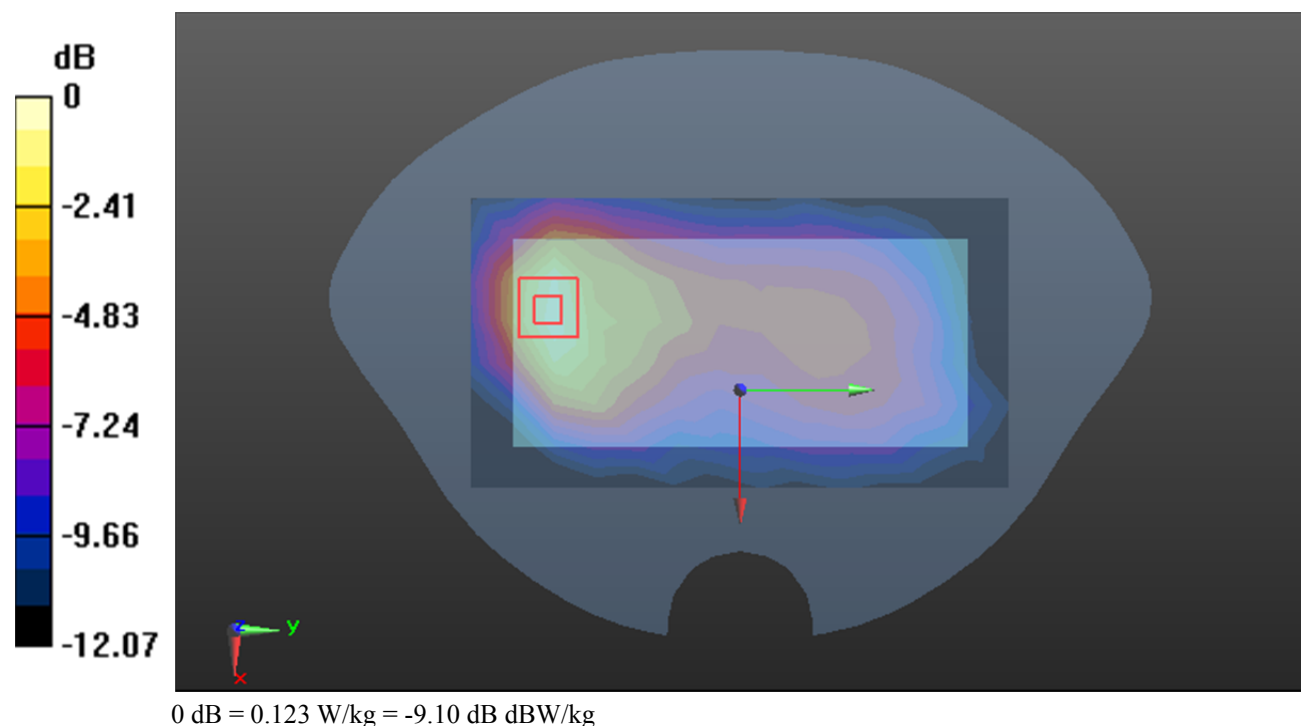

**Test Plot22#: LTE Band 5\_Head Right Cheek\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.899$  S/m;  $\epsilon_r=42.154$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.101 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.626 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg

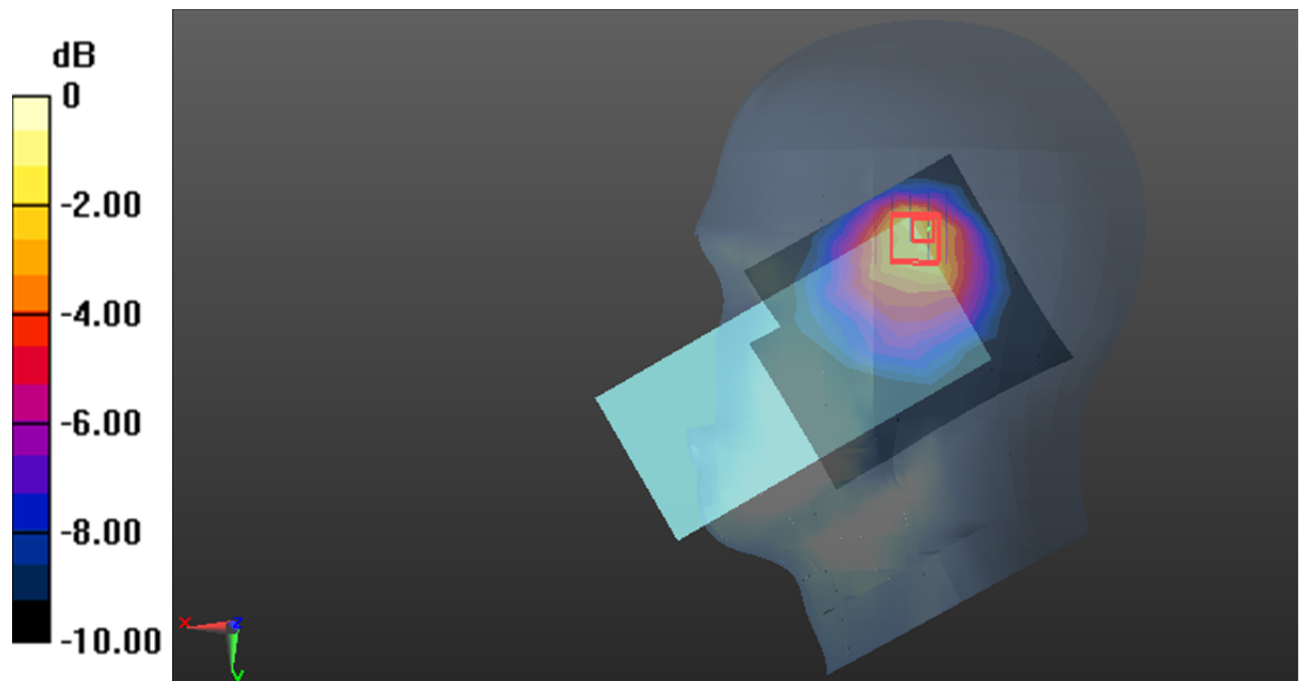

0 dB = 0.138 W/kg = -8.60 dB dBW/kg

**Test Plot23#: LTE Band 5\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.899$  S/m;  $\epsilon_r=42.154$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0882 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.507 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.102 W/kg

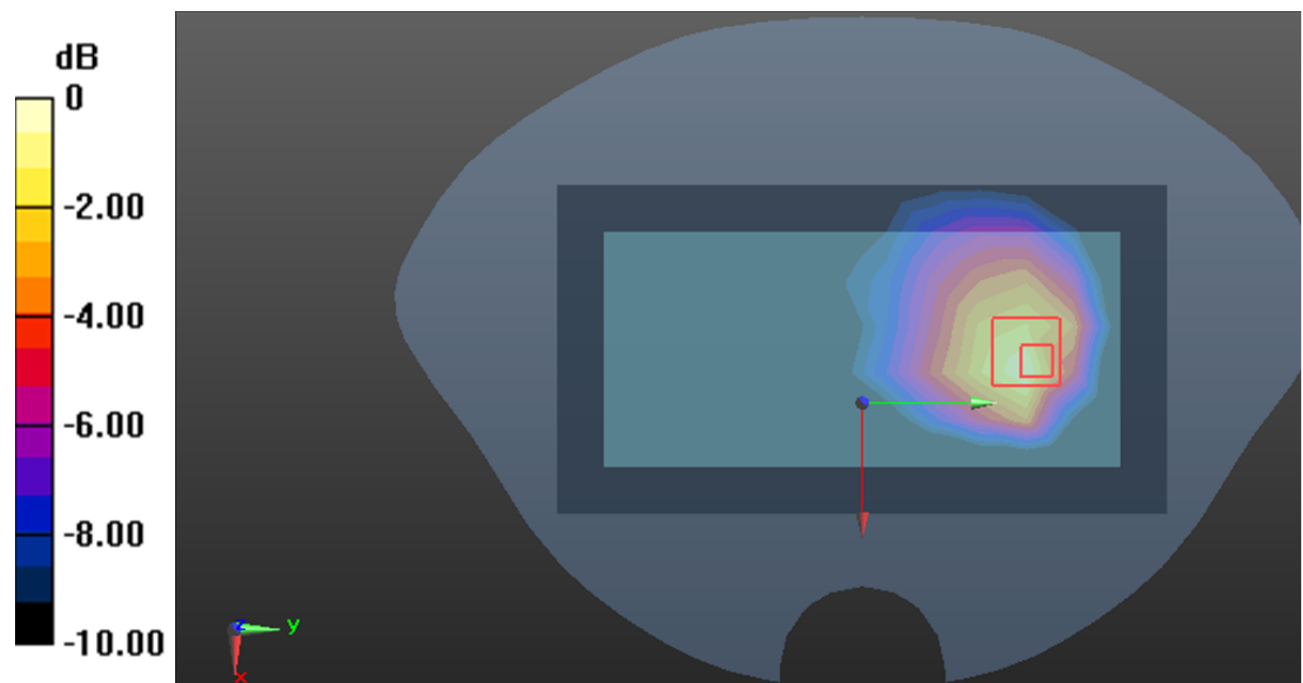

0 dB = 0.102 W/kg = -9.91 dB dBW/kg

**Test Plot24#: LTE Band 7\_Head Right Cheek\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.808$  S/m;  $\epsilon_r = 39.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0241 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.661 V/m; Power Drift = -00 dB

Peak SAR (extrapolated) = 0.0370 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0321 W/kg

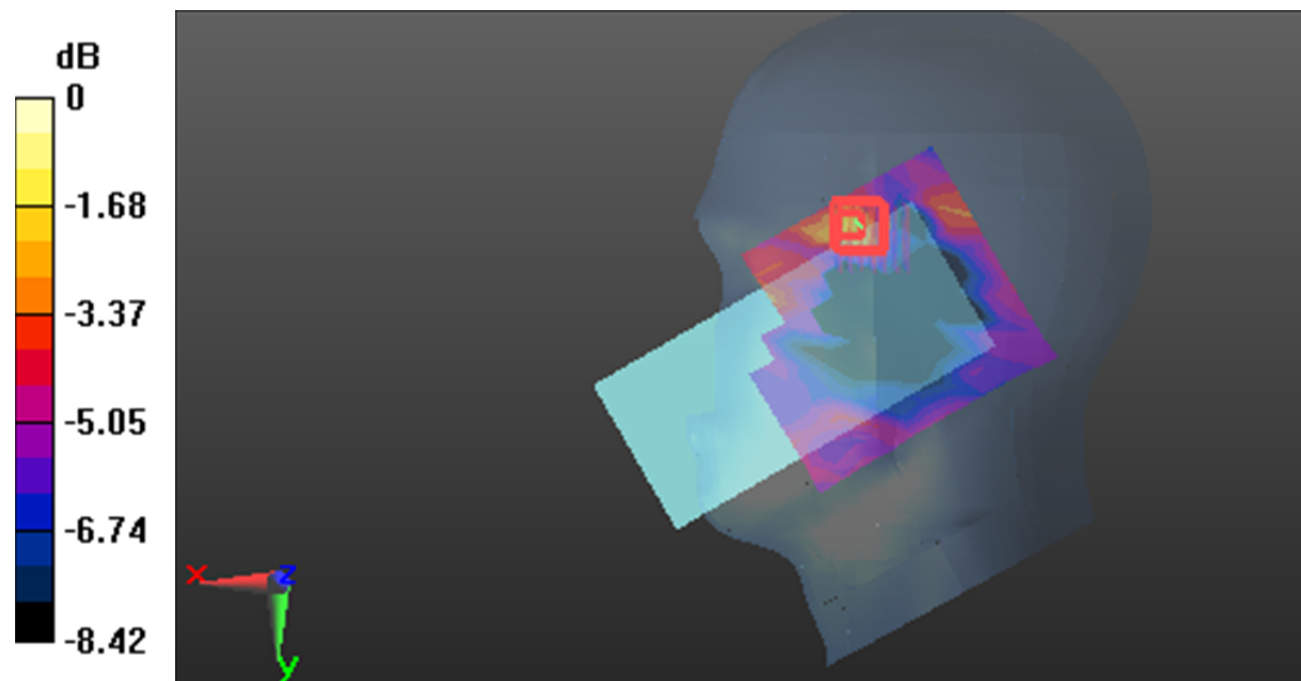

0 dB = 0.0321 W/kg = -14.93 dB dBW/kg



**Test Plot25#: LTE Band 7\_Body Back\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.808$  S/m;  $\epsilon_r = 39.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.919 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.904 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.276 W/kg**

Maximum value of SAR (measured) = 0.917 W/kg

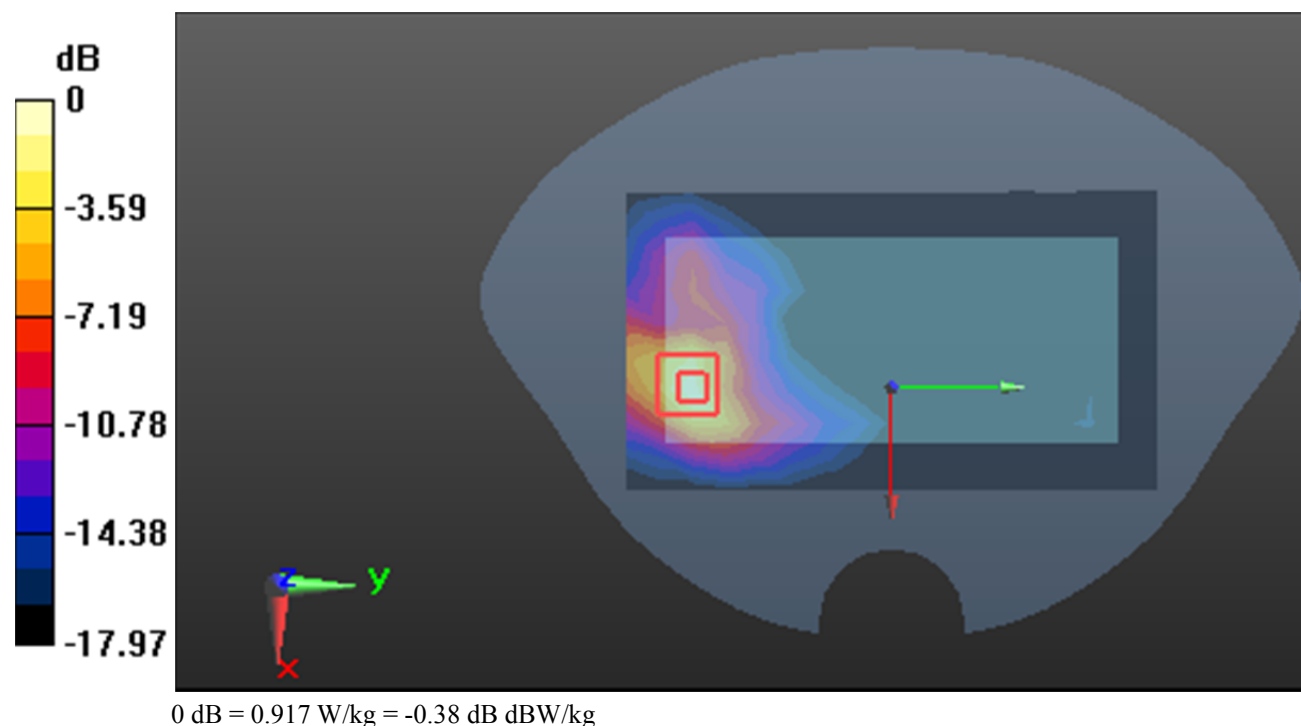

**Test Plot26#: LTE Band 7\_Head Right Cheek\_50%RB\_Middle Ant5****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.808$  S/m;  $\epsilon_r = 39.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x13x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.854 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.779 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.196 W/kg**

Maximum value of SAR (measured) = 0.884 W/kg

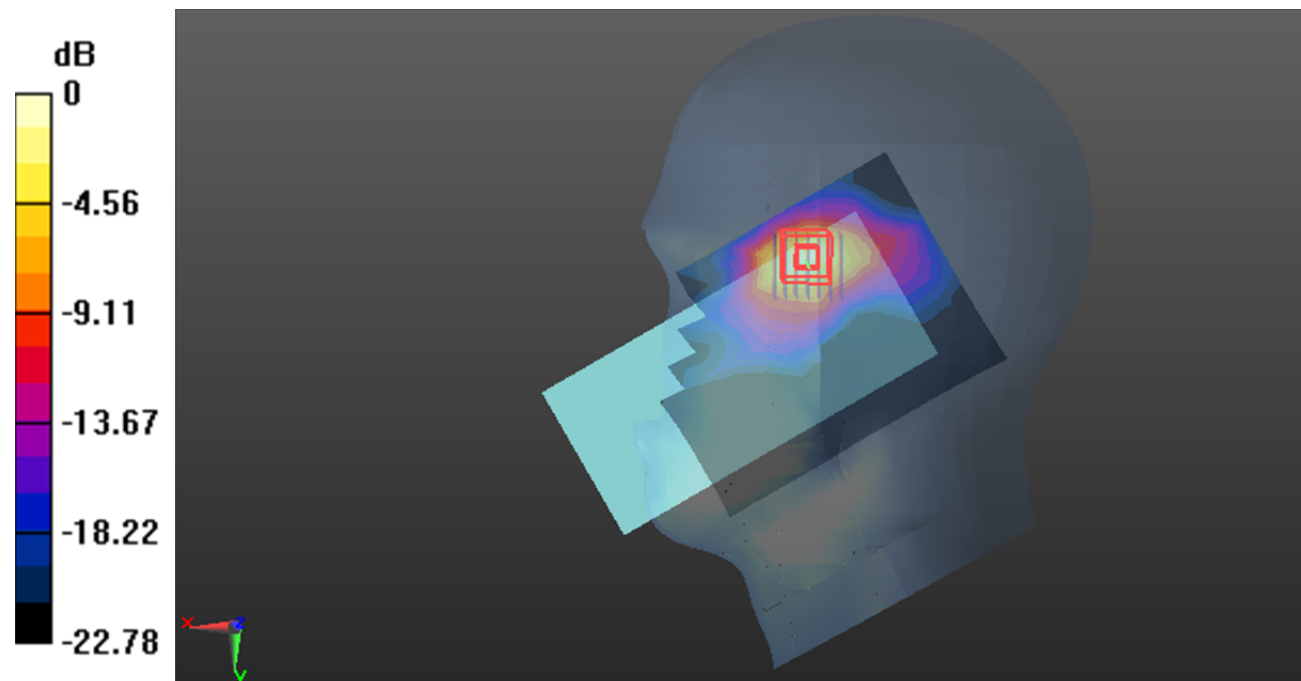

0 dB = 0.884 W/kg = -0.54 dB dBW/kg

**Test Plot27#: LTE Band 7\_Body Back\_50%RB\_Middle Ant5****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD LTE (0); Frequency: 2535 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.808$  S/m;  $\epsilon_r = 39.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354;Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):**Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.671 W/kg


**Zoom Scan (7x7x7)/Cube 0:**Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.488 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.902 W/kg

**SAR(1 g) = 0.375 W/kg; SAR(10 g) = 0.153 W/kg**

Maximum value of SAR (measured) = 0.696 W/kg

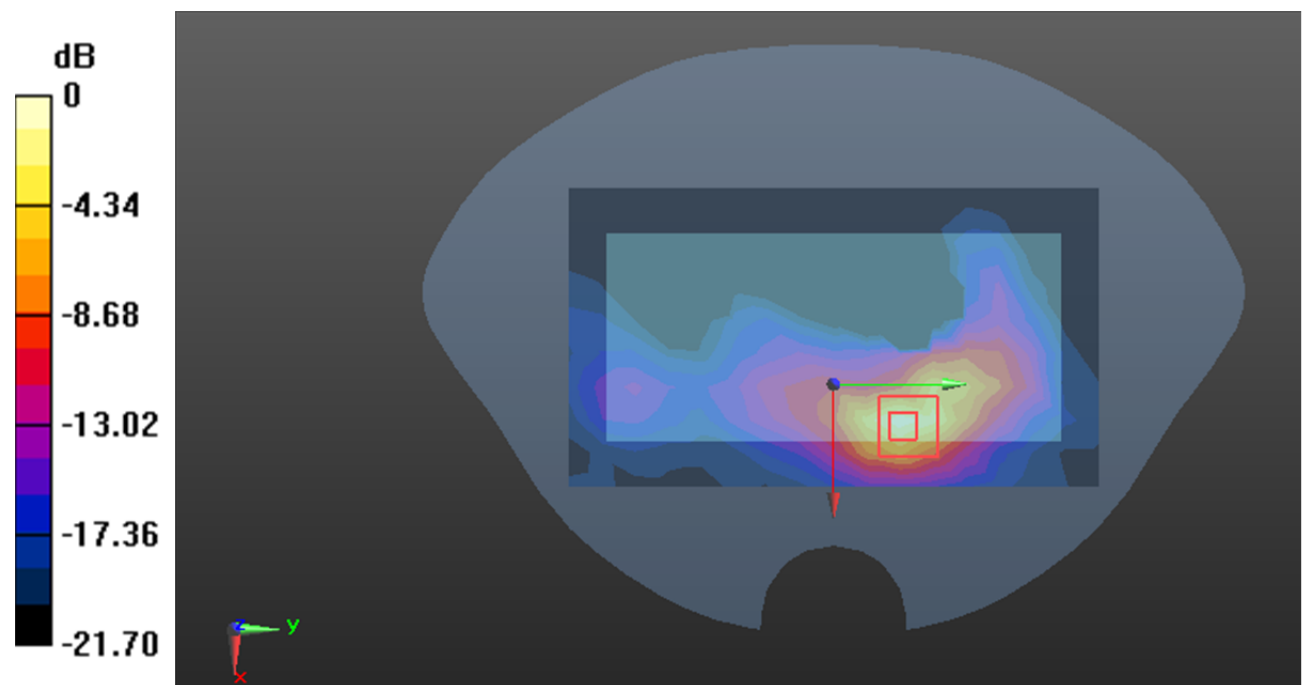

0 dB = 0.696 W/kg = -1.57 dB dBW/kg

**Test Plot28#: LTE Band 7\_Head Right Tilt\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 40.484$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.239 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.714 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.367 W/kg

**SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.089 W/kg**

Maximum value of SAR (measured) = 0.293 W/kg

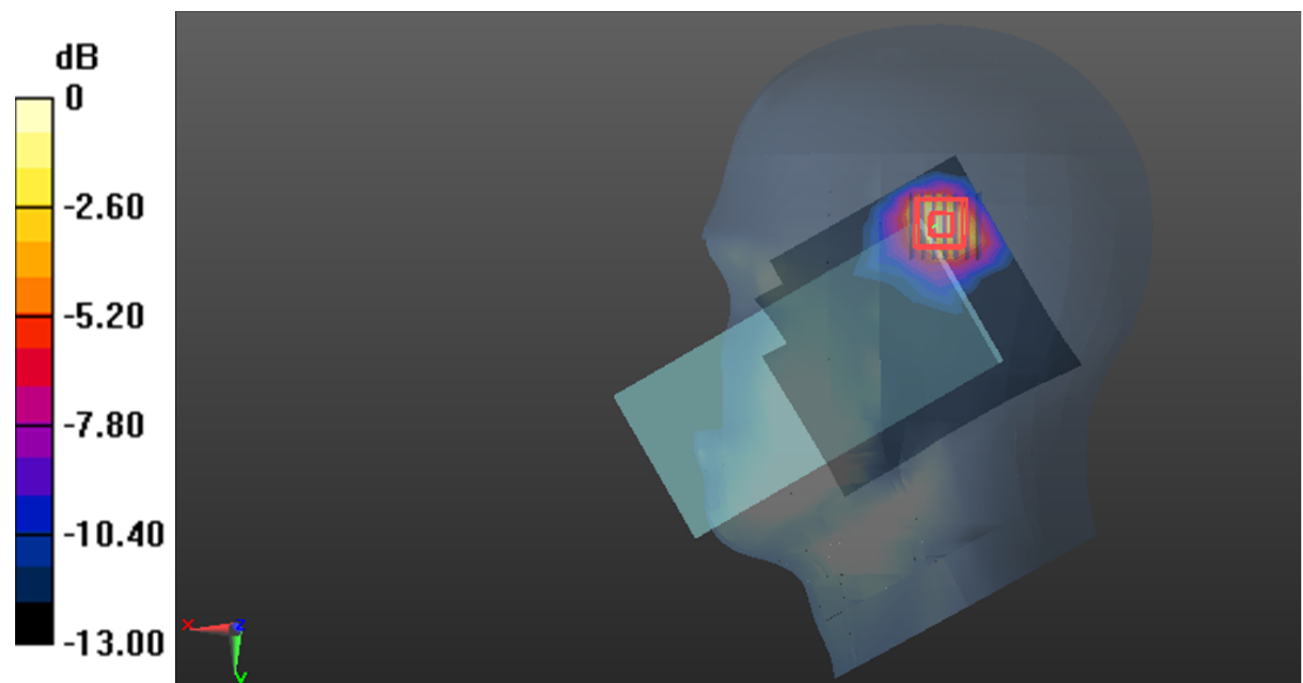

0 dB = 0.293 W/kg = -5.33 dB dBW/kg

**Test Plot29#: LTE Band 7\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.829$  S/m;  $\epsilon_r = 40.484$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.131 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.551 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.143 W/kg

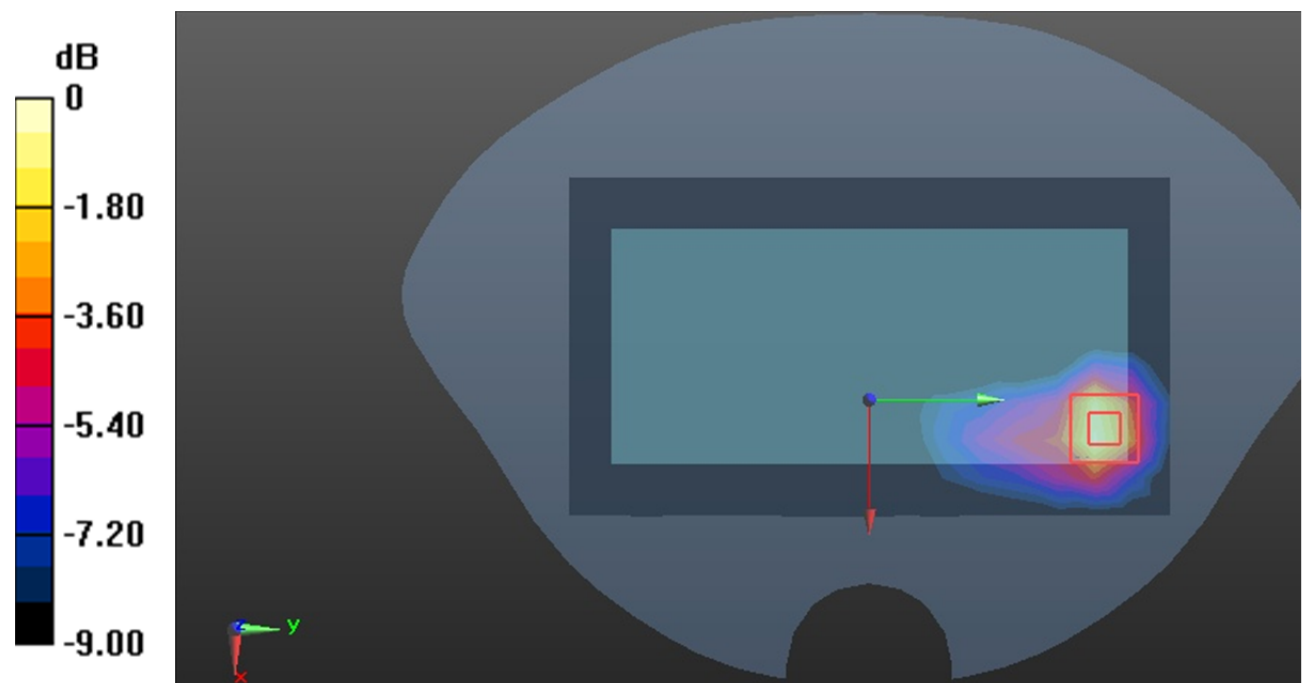

0 dB = 0.143 W/kg = -8.45 dB dBW/kg

**Test Plot30#: LTE Band 12\_Head Left Cheek\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=707.5$  MHz;  $\sigma=0.856$  S/m;  $\epsilon_r=43.495$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0269 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.081 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0323 W/kg

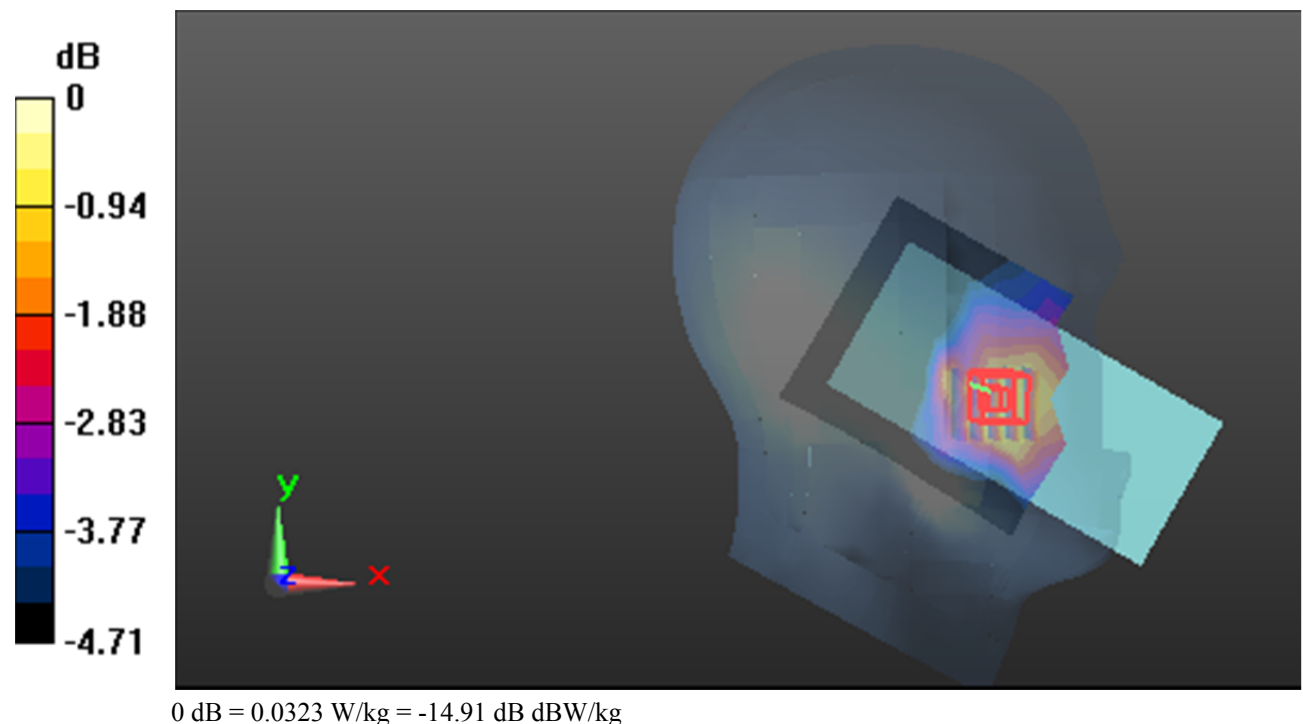

**Test Plot31#: LTE Band 12\_Body Right\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=707.5$  MHz;  $\sigma=0.856$  S/m;  $\epsilon_r=43.495$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0846 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.11 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0870 W/kg

**SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.0810 W/kg

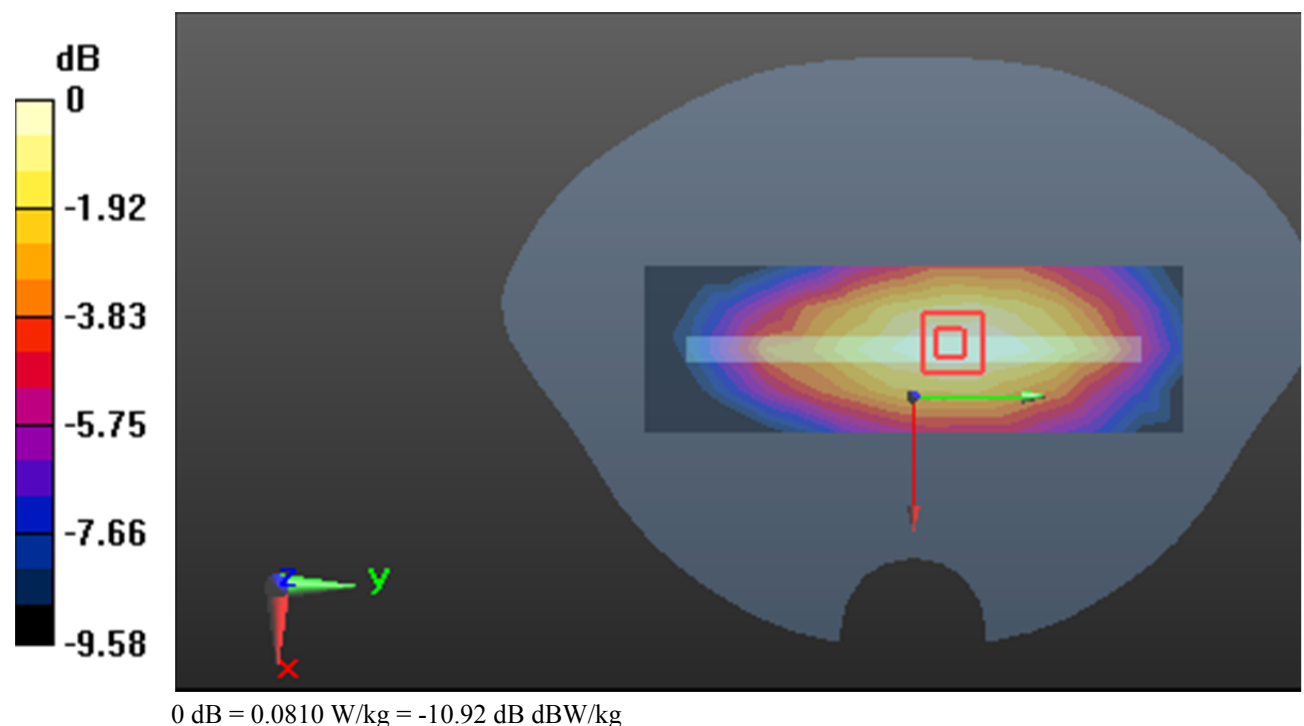

**Test Plot32#: LTE Band 12\_Head Right Cheek\_50%RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 43.495$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.111 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.817 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.052 W/kg**

Maximum value of SAR (measured) = 0.161 W/kg

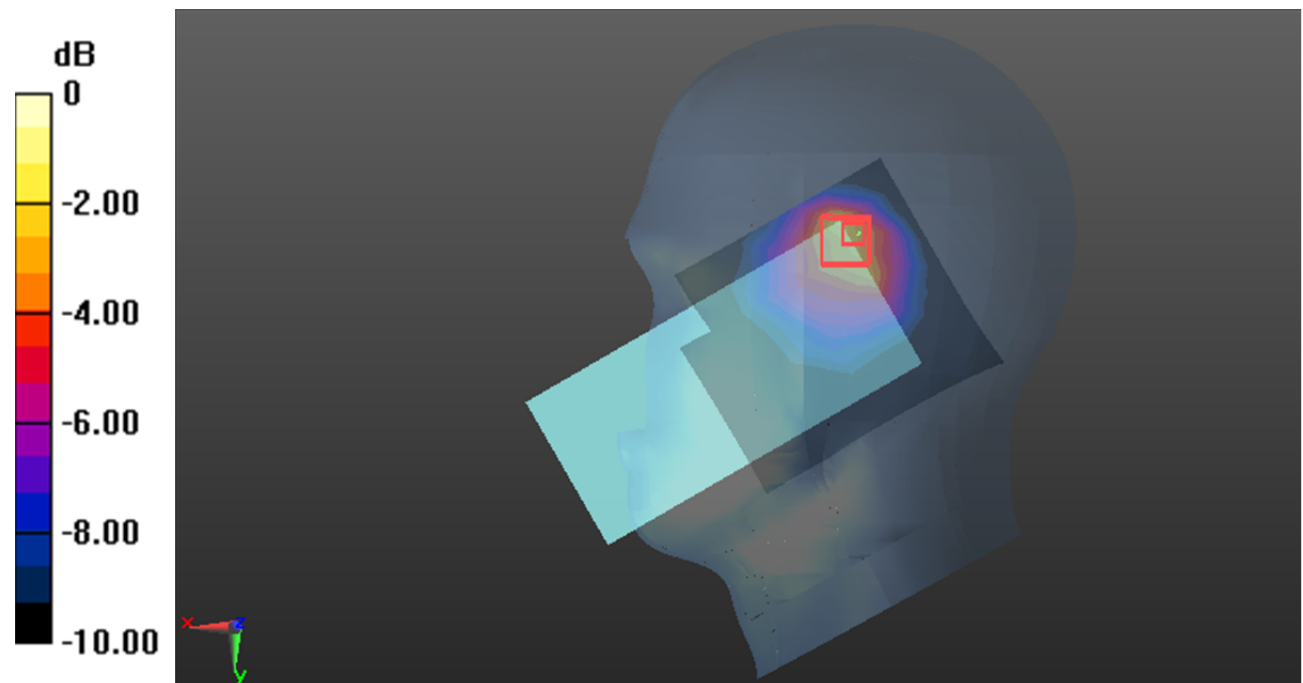

0 dB = 0.161 W/kg = -7.93 dB dBW/kg



**Test Plot33#: LTE Band 12\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 43.495$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0961 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.606 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.137 W/kg

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.103 W/kg

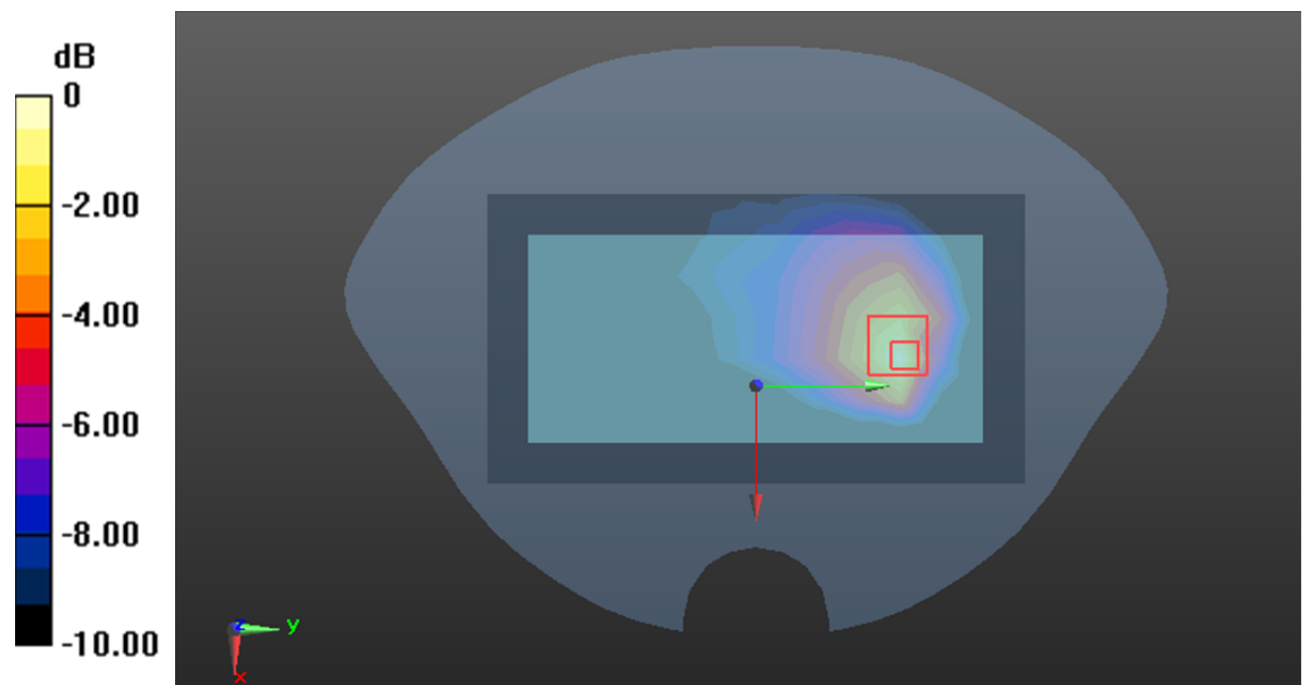

0 dB = 0.103 W/kg = -9.87 dB dBW/kg

**Test Plot34#: LTE Band 13\_Body Right\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=782$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.762$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @782 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0571 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.207 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0620 W/kg

**SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0573 W/kg

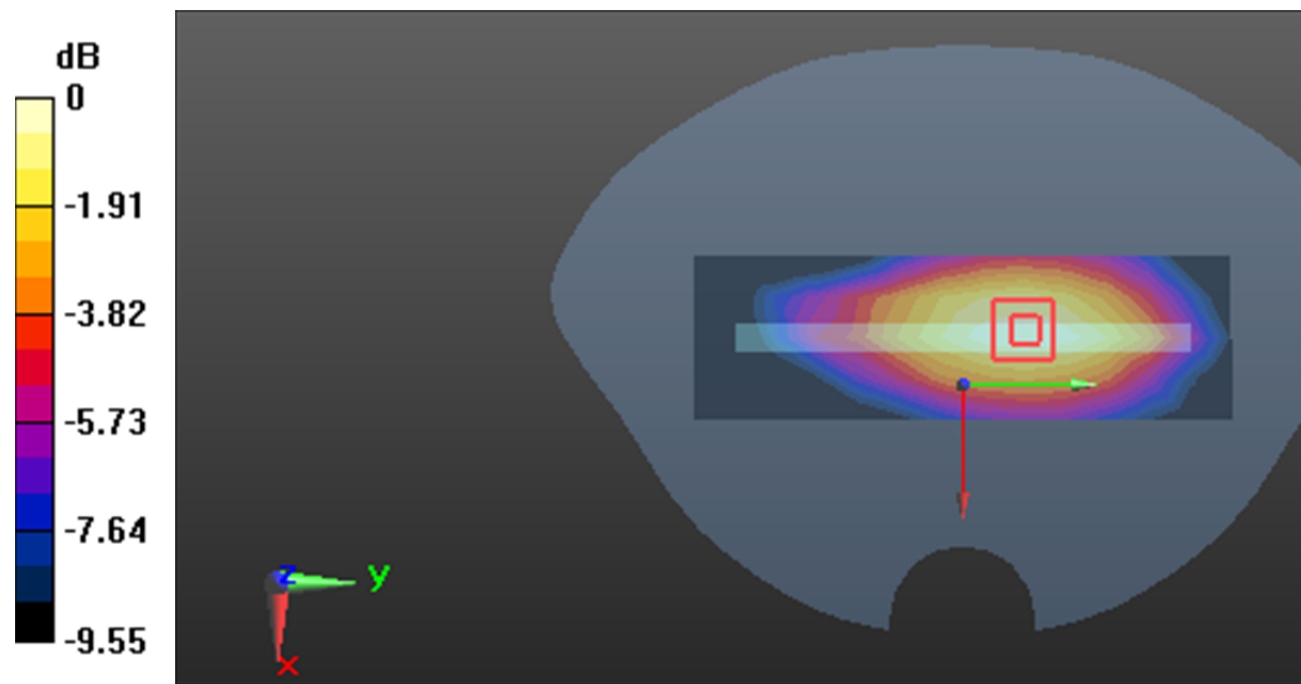

0 dB = 0.0573 W/kg = -12.42 dB dBW/kg

**Test Plot35#: LTE Band 13\_Head Right Cheek\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=782$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.762$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @782 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.655 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.55 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.972 W/kg

**SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.301 W/kg**

Maximum value of SAR (measured) = 0.797 W/kg

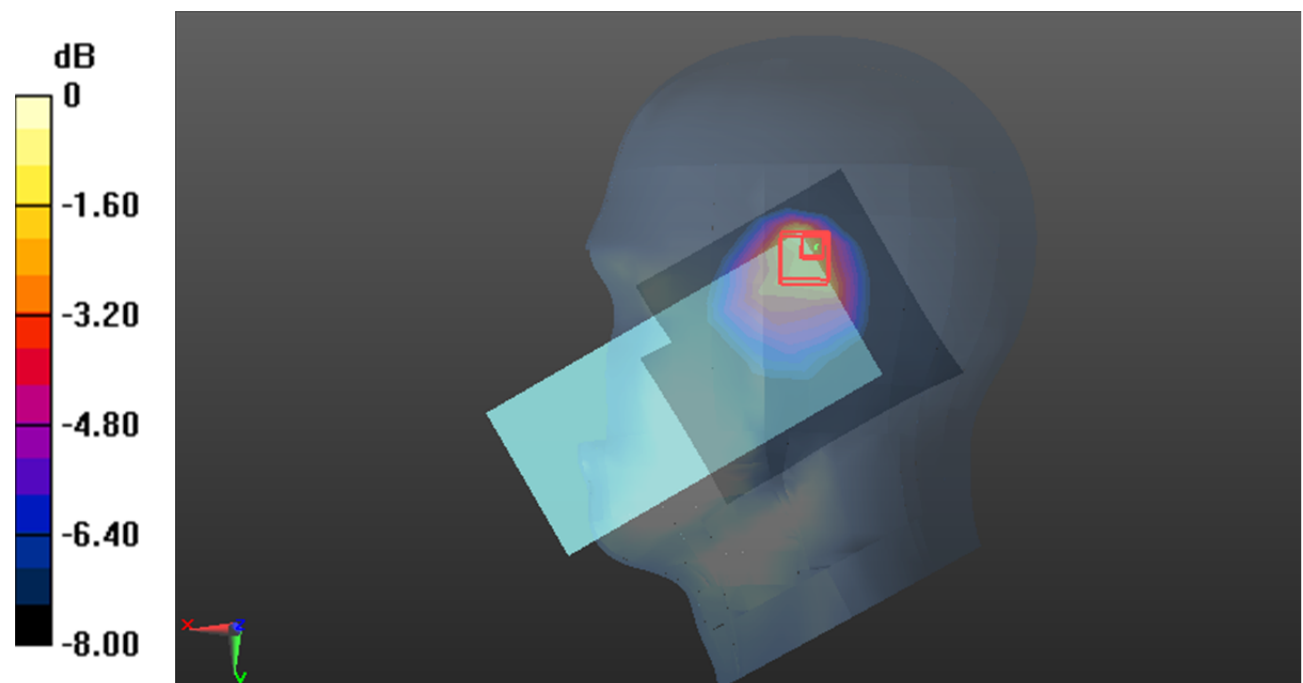

0 dB = 0.797 W/kg = -0.99 dB dBW/kg

**Test Plot36#: LTE Band 13\_Body Back\_50%RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=782$  MHz;  $\sigma=0.905$  S/m;  $\epsilon_r=42.762$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @782 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.131 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.834 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.171 W/kg

**SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.139 W/kg

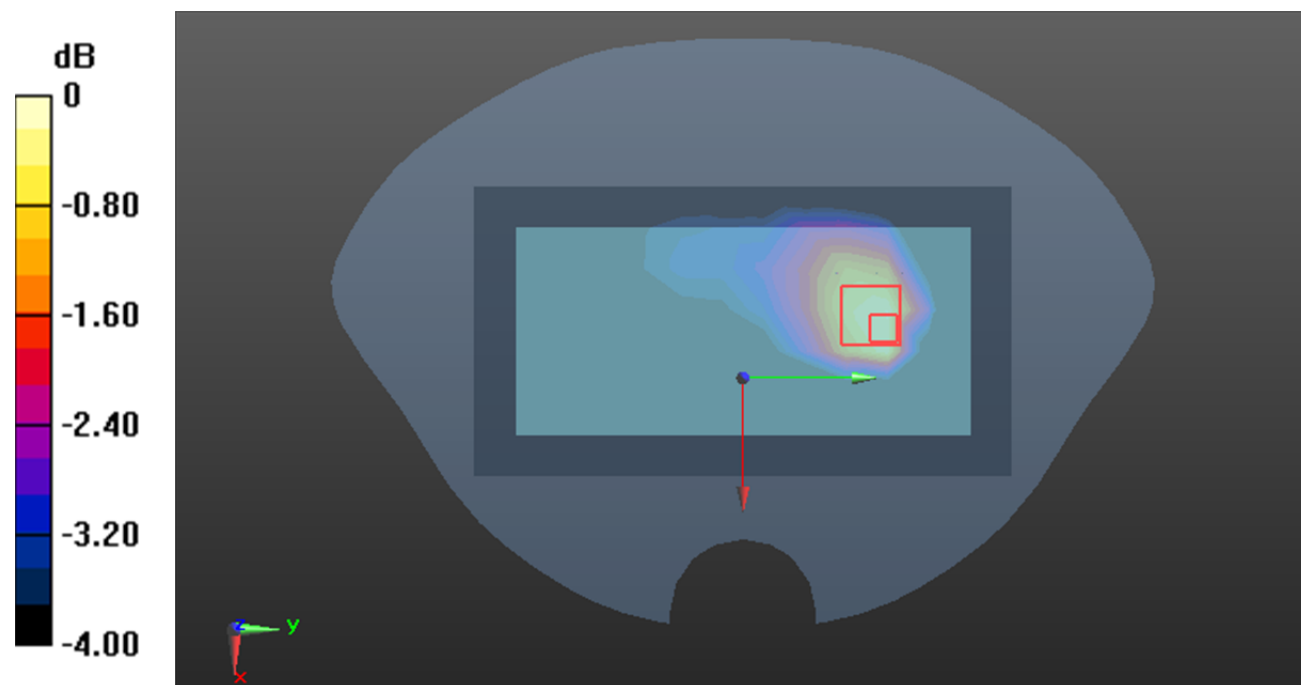

**Test Plot37#: LTE Band 41\_Head Left Cheek\_50%RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2593$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 39.713$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2593 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0162 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.300 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0330 W/kg

**SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0247 W/kg

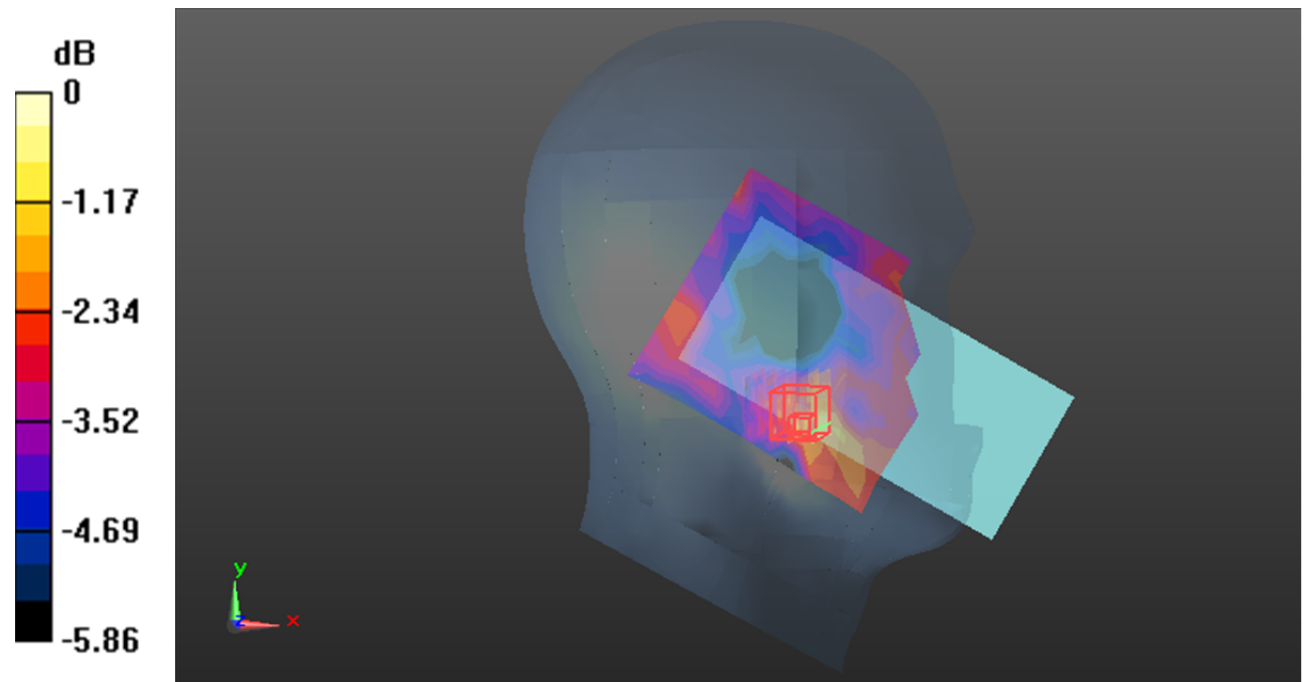

0 dB = 0.0247 W/kg = -16.07 dB dBW/kg

**Test Plot38#: LTE Band 41\_Body Back\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium parameters used:  $f=2593$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 39.713$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2593 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.366 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.935 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.476 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.400 W/kg

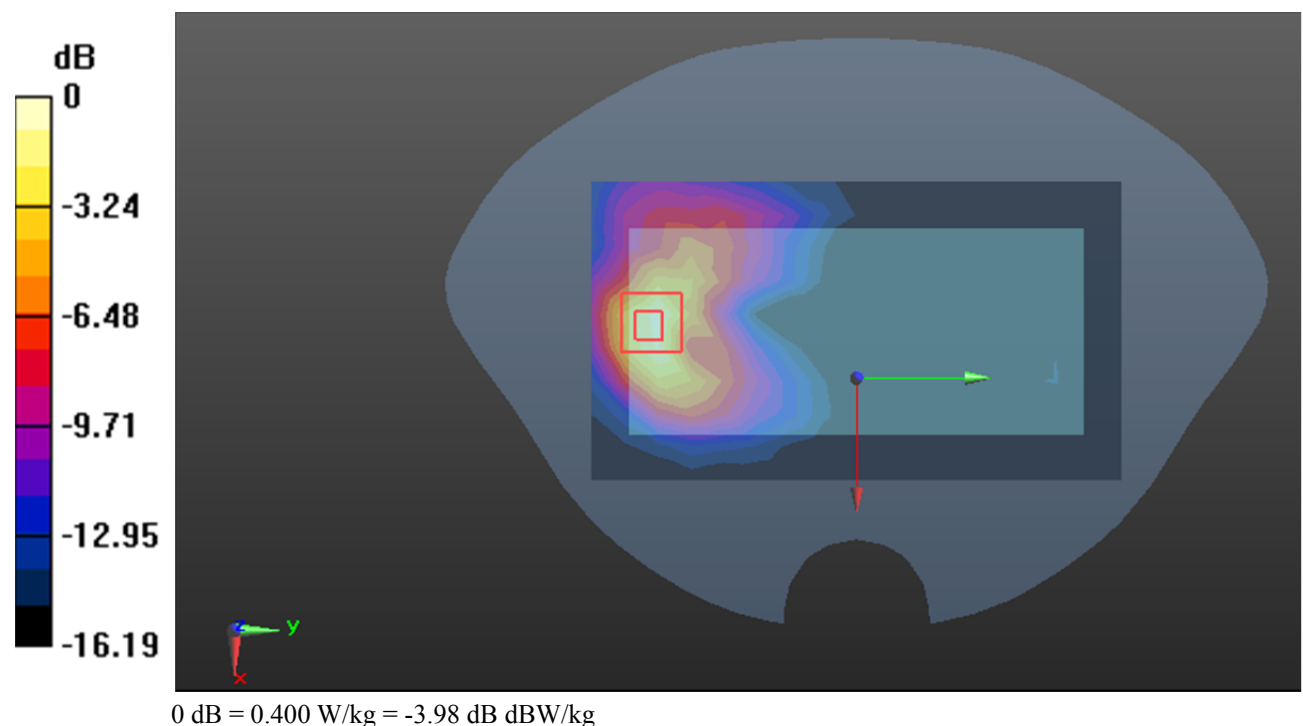

**Test Plot39#: LTE Band 41\_Head Right Cheek\_1RB\_Middle Ant5****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2593$  MHz;  $\sigma = 1.882$  S/m;  $\epsilon_r = 40.136$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2593 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.524 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.930 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.687 W/kg

**SAR(1 g) = 0.320 W/kg; SAR(10 g) = 0.146 W/kg**

Maximum value of SAR (measured) = 0.551 W/kg

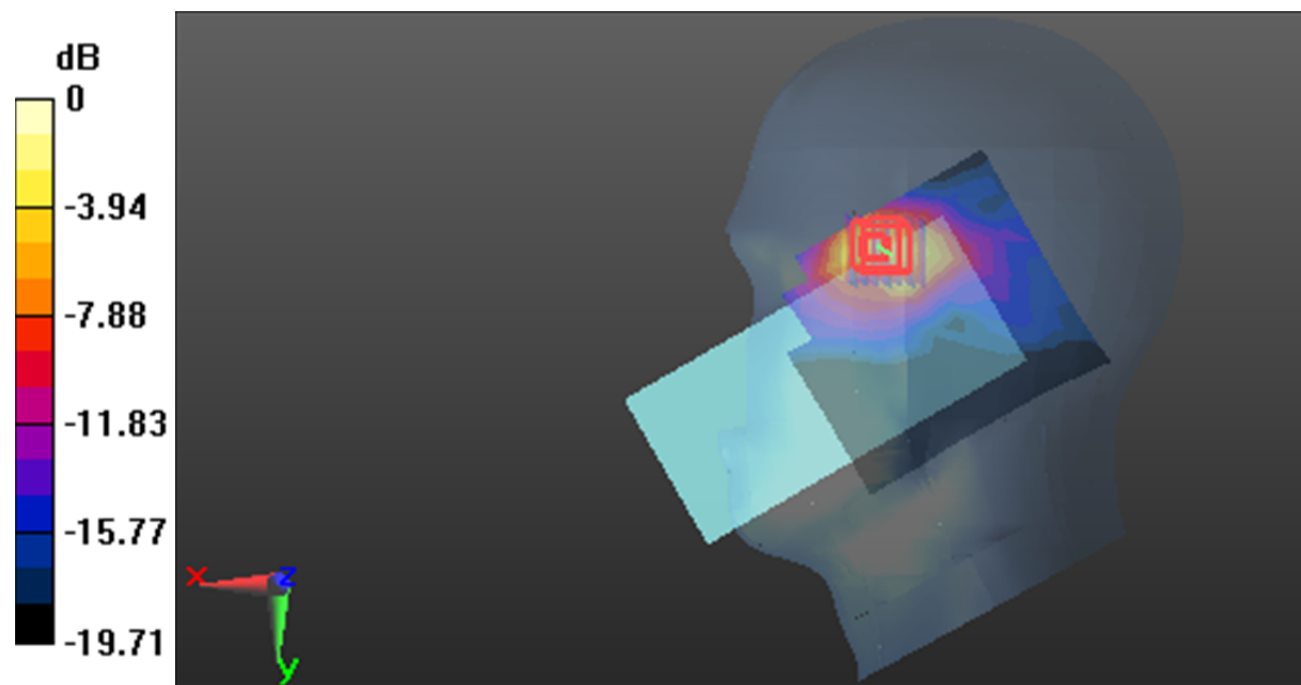

0 dB = 0.551 W/kg = -2.59 dB dBW/kg

**Test Plot40#: LTE Band 41\_Body Back\_1RB\_Middle Ant5****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2593$  MHz;  $\sigma = 1.882$  S/m;  $\epsilon_r = 40.136$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2593 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.301 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.413 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.456 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.352 W/kg

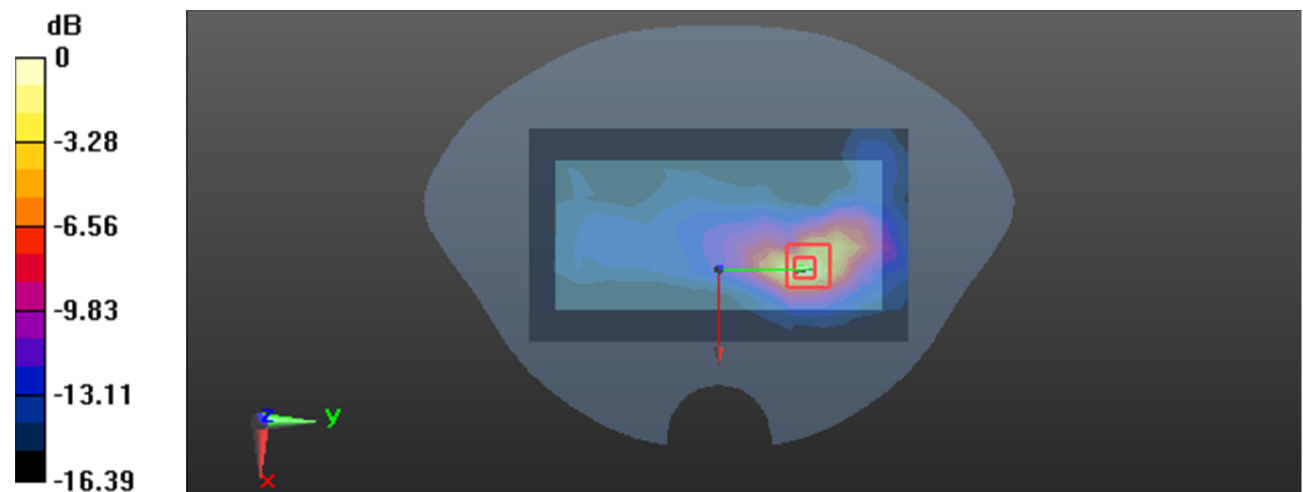



**Test Plot41#: LTE Band 41\_Head Right Tilt\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2593$  MHz;  $\sigma = 1.882$  S/m;  $\epsilon_r = 40.136$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2593 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.303 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.205 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.438 W/kg

**SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.347 W/kg

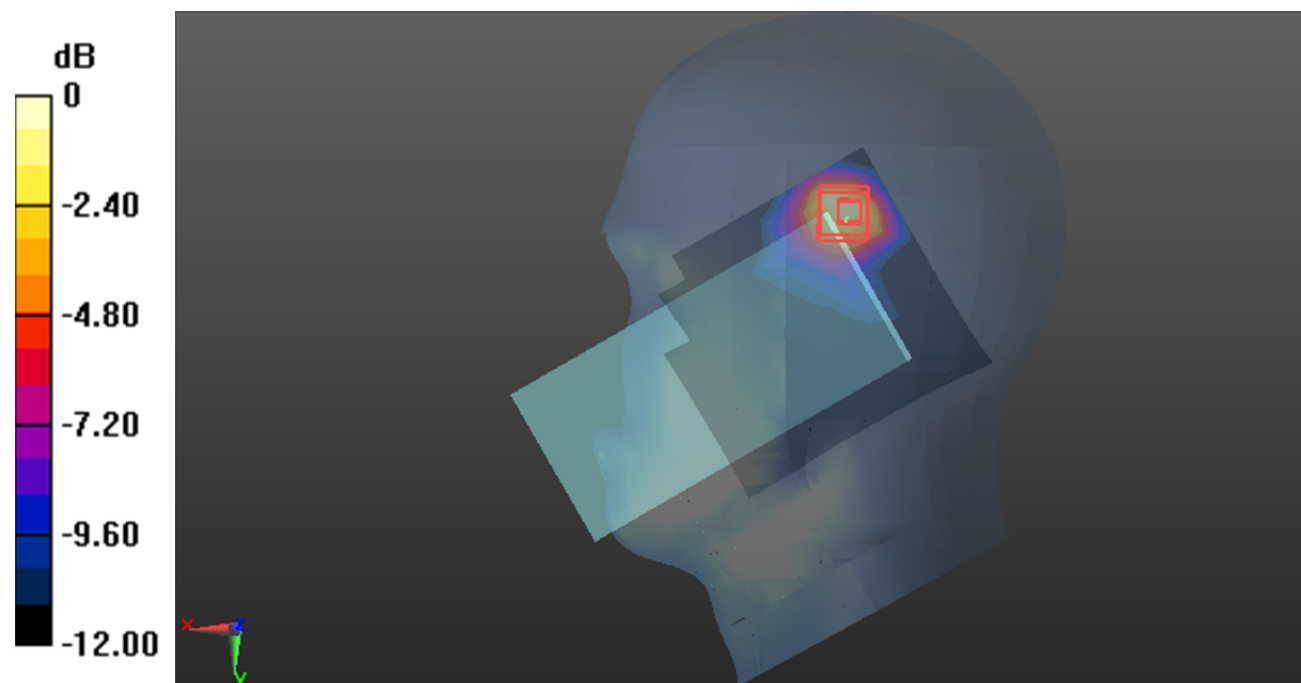

0 dB = 0.347 W/kg = -4.60 dB dBW/kg

**Test Plot42#: LTE Band 41\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8hs; Serial: 2Q06-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2593$  MHz;  $\sigma = 1.882$  S/m;  $\epsilon_r = 40.136$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2593 MHz; Calibrated: 2024/3/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.167 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.866 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.198 W/kg

**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.159 W/kg

