


|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:11 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz |                          |

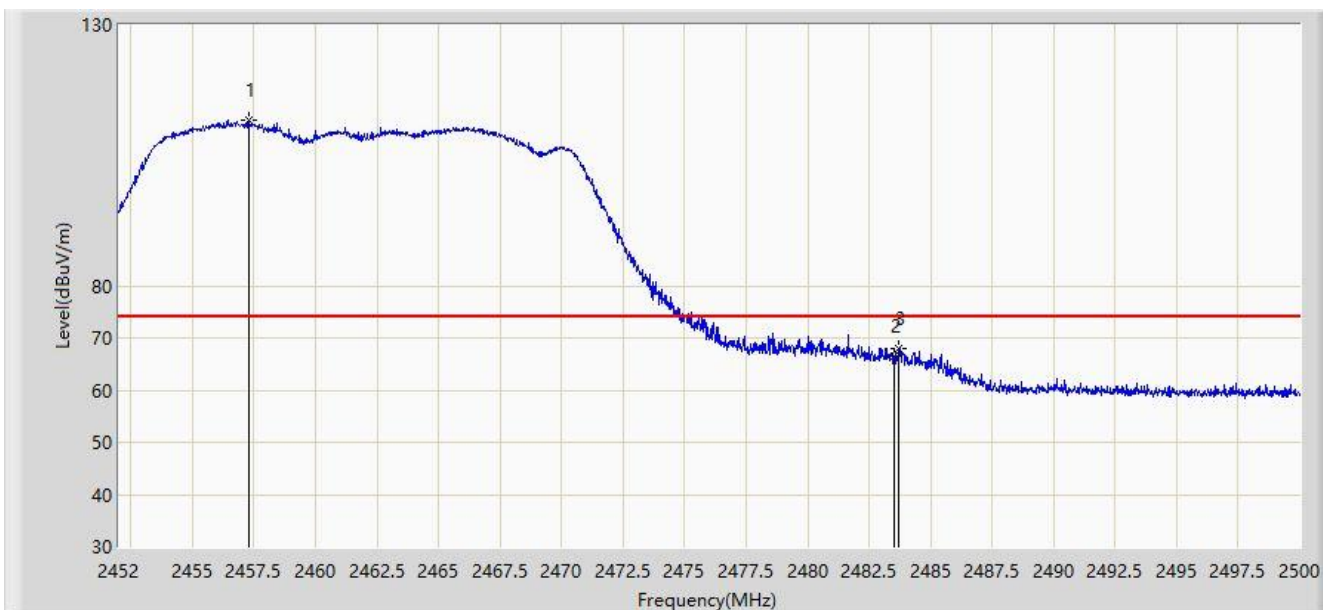


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2457.280        | 111.715                | 79.358               | N/A         | N/A            | 32.357      | PK   |
| 2  |      | 2483.500        | 66.497                 | 34.082               | -7.503      | 74.000         | 32.416      | PK   |
| 3  |      | 2483.728        | 68.070                 | 35.654               | -5.930      | 74.000         | 32.416      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:10 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz |                          |

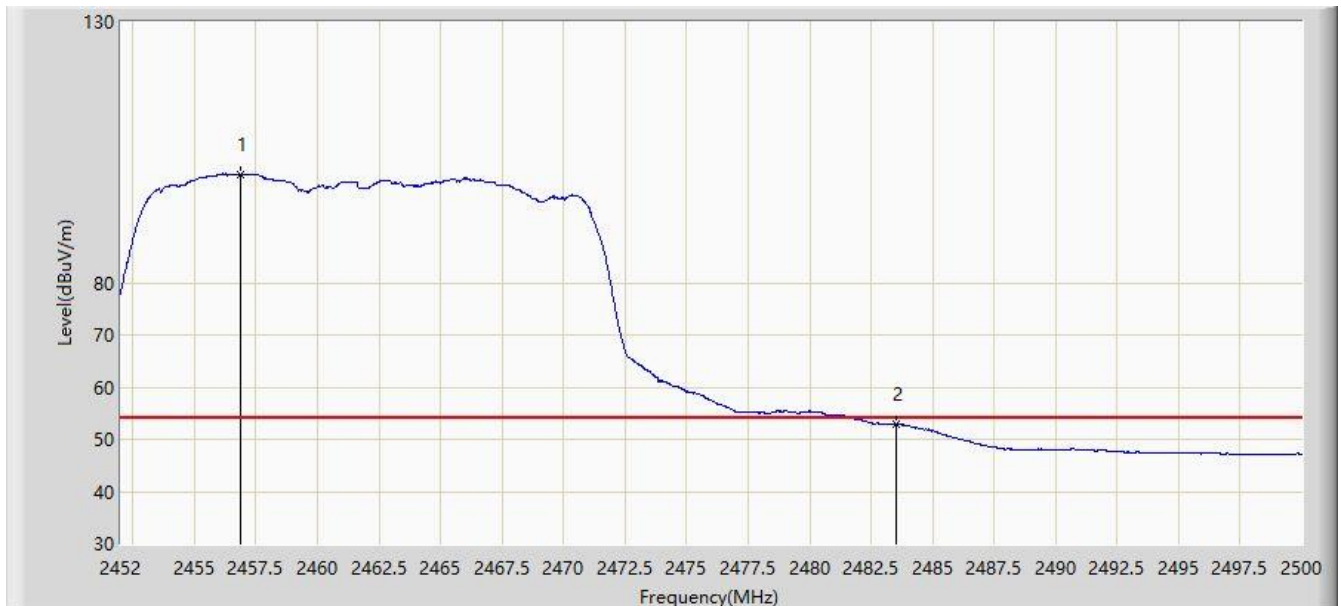


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2456.896        | 100.695                | 68.338               | N/A         | N/A            | 32.357      | AV   |
| 2  |      | 2483.500        | 52.915                 | 20.500               | -1.085      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:13 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz |                          |

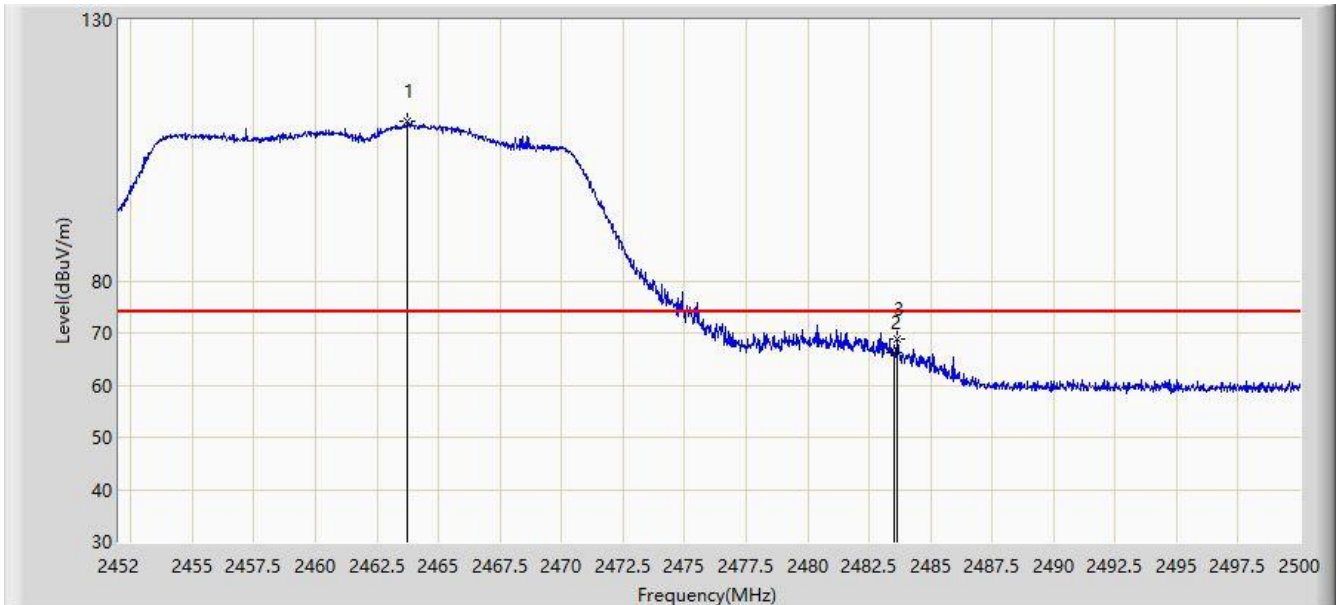


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2463.736        | 110.509                | 78.140               | N/A         | N/A            | 32.369      | PK   |
| 2  |      | 2483.500        | 66.340                 | 33.925               | -7.660      | 74.000         | 32.416      | PK   |
| 3  |      | 2483.632        | 68.733                 | 36.317               | -5.267      | 74.000         | 32.416      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:14 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz |                          |

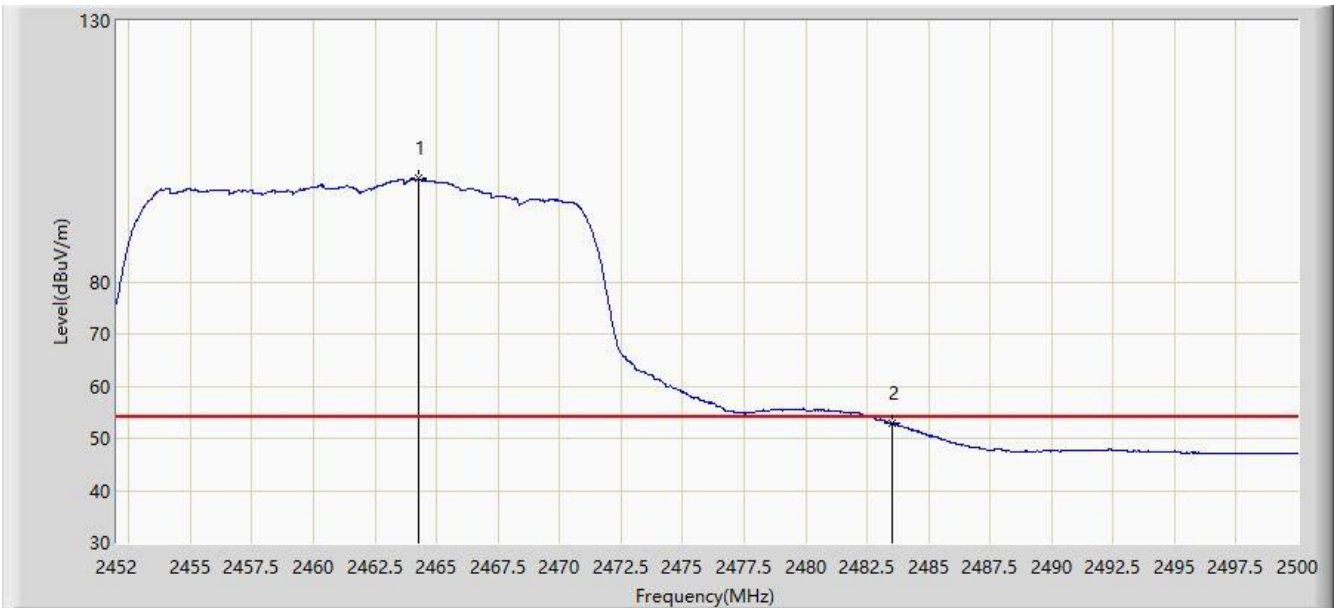


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2464.264        | 99.721                 | 67.351               | N/A         | N/A            | 32.370      | AV   |
| 2  |      | 2483.500        | 52.987                 | 20.572               | -1.013      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:22 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

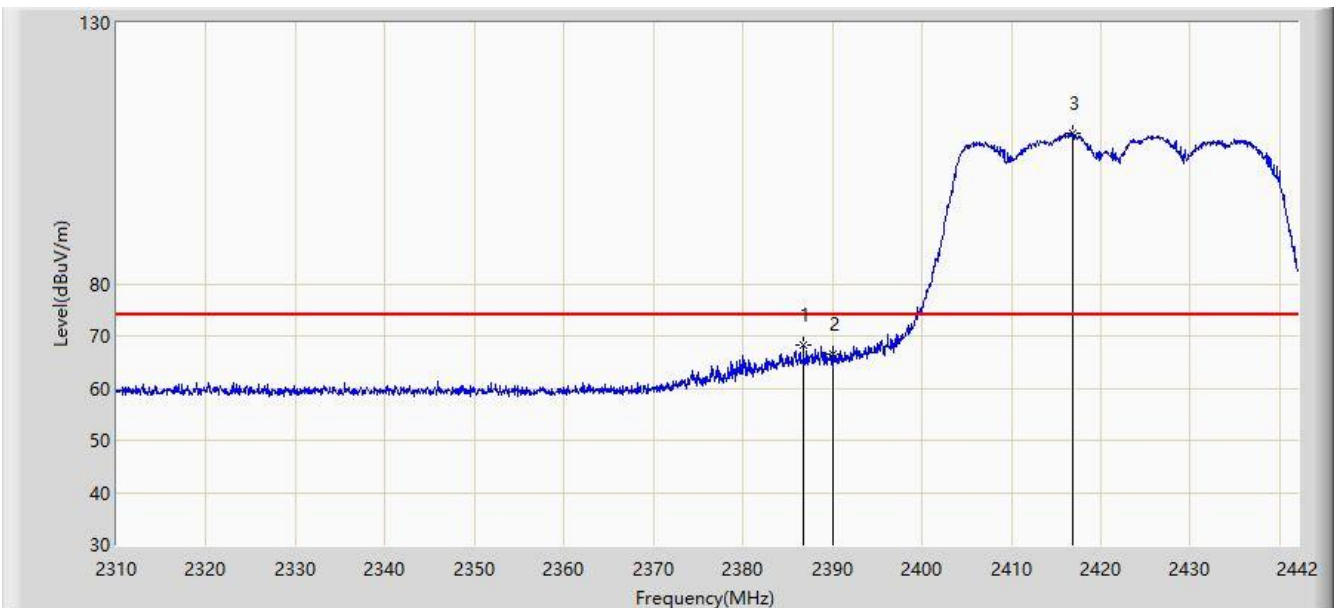


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2386.758        | 68.340                 | 35.921               | -5.660      | 74.000         | 32.418      | PK   |
| 2  |      | 2390.000        | 66.661                 | 34.248               | -7.339      | 74.000         | 32.413      | PK   |
| 3  | *    | 2416.920        | 108.731                | 76.352               | N/A         | N/A            | 32.378      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:20 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

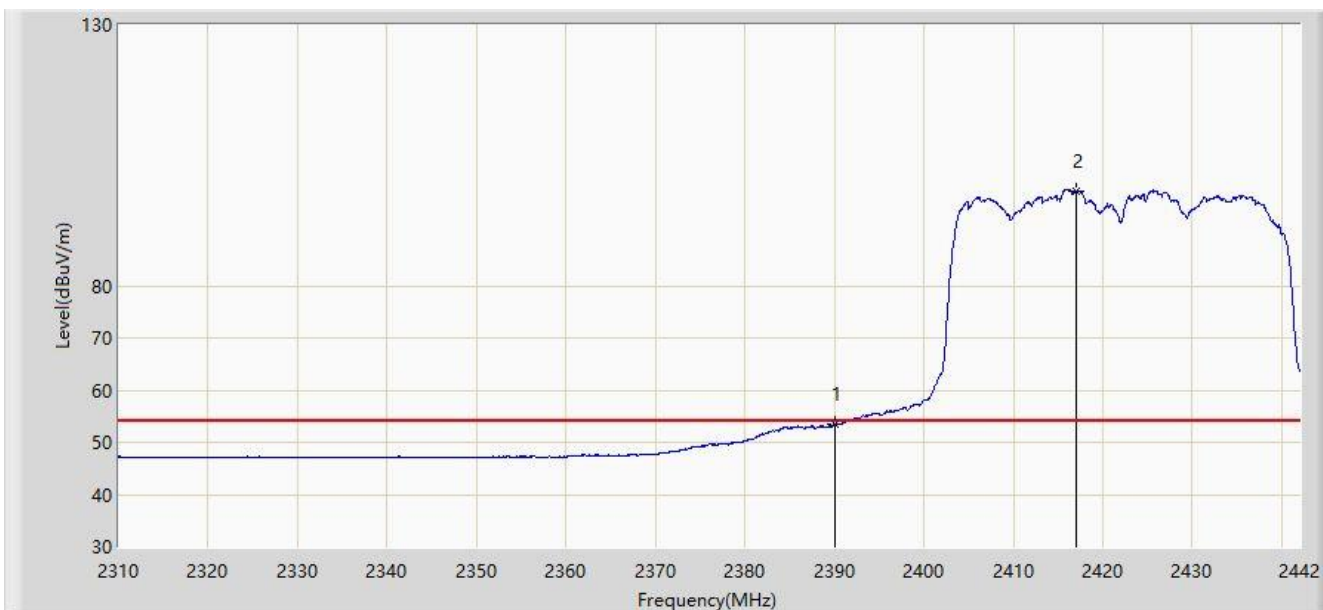


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 53.347                 | 20.934               | -0.653      | 54.000         | 32.413      | AV   |
| 2  | *    | 2417.052        | 98.234                 | 65.856               | N/A         | N/A            | 32.378      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:23 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

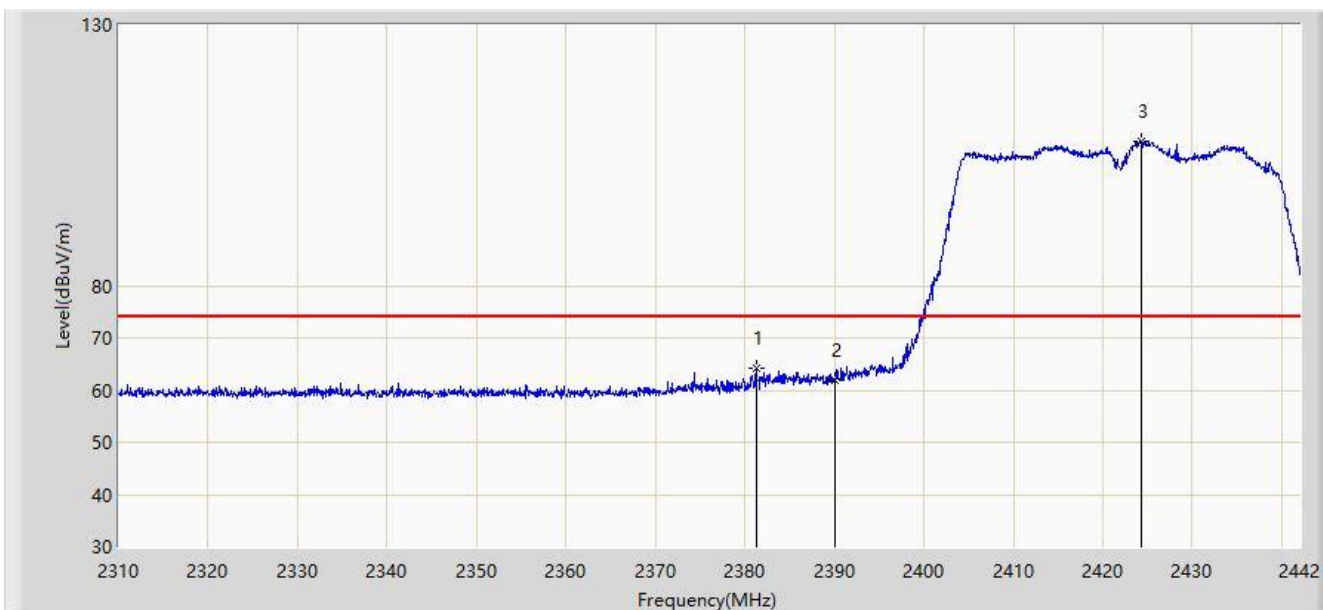


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2381.280        | 64.081                 | 31.652               | -9.919      | 74.000         | 32.428      | PK   |
| 2  |      | 2390.000        | 61.957                 | 29.544               | -12.043     | 74.000         | 32.413      | PK   |
| 3  | *    | 2424.378        | 107.790                | 75.420               | N/A         | N/A            | 32.371      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:25 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

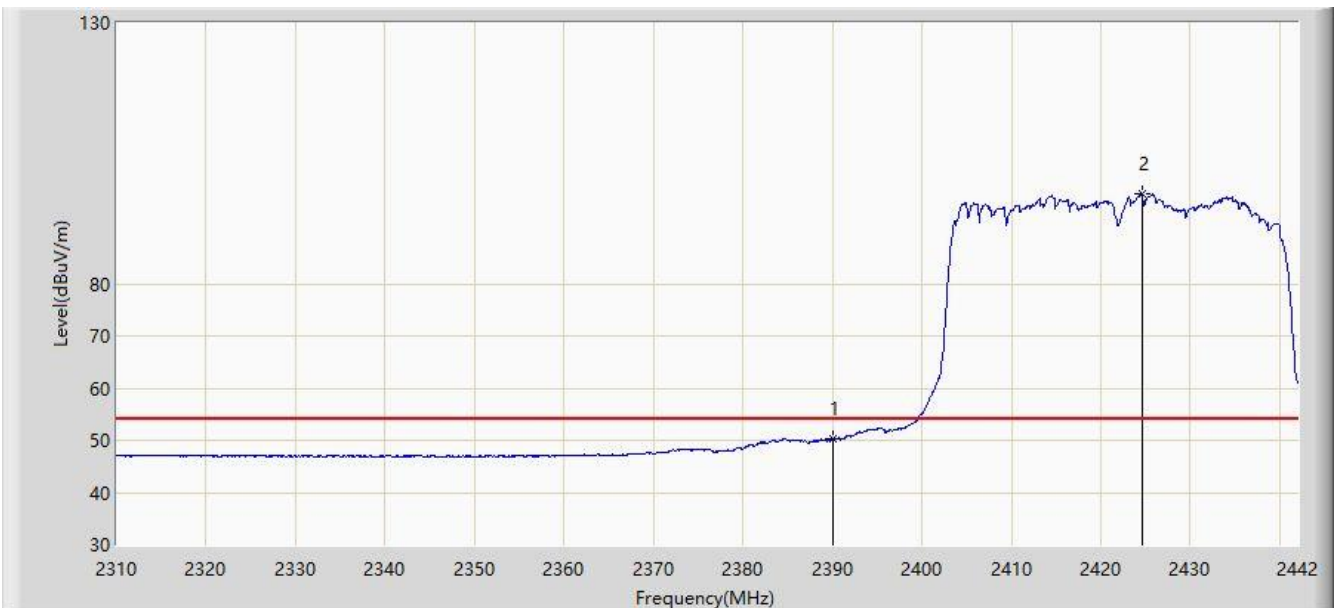


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 50.282                 | 17.869               | -3.718      | 54.000         | 32.413      | AV   |
| 2  | *    | 2424.708        | 97.379                 | 65.009               | N/A         | N/A            | 32.370      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:36 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

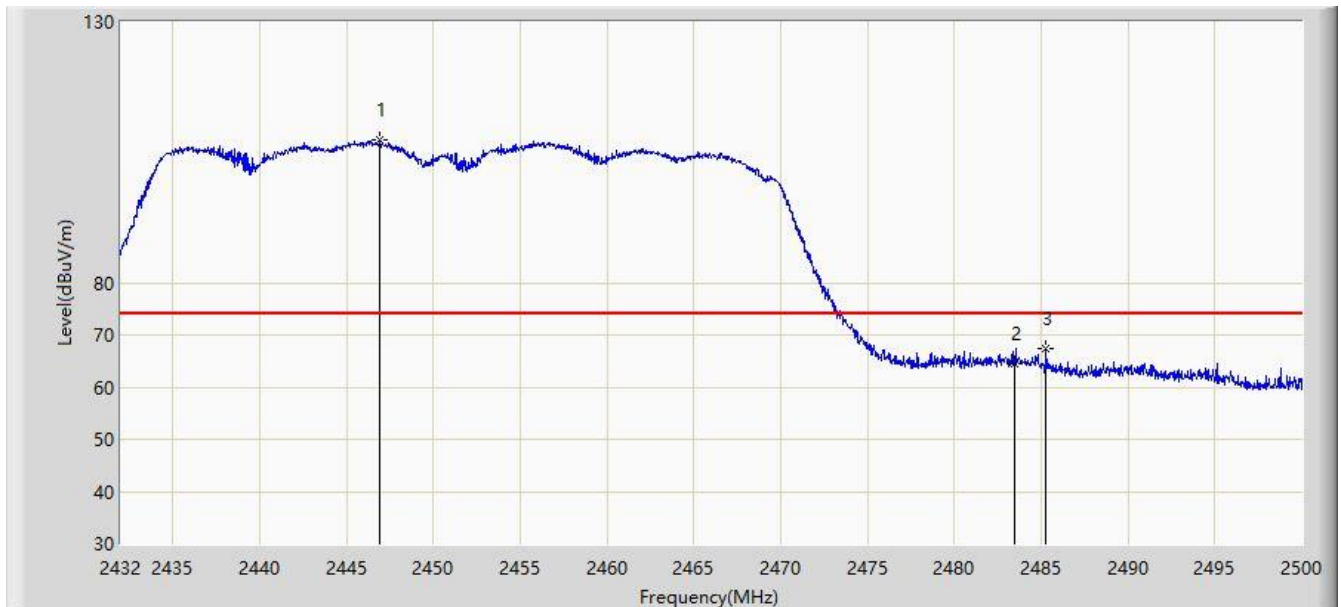


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2446.926        | 107.375                | 75.037               | N/A         | N/A            | 32.338      | PK   |
| 2  |      | 2483.500        | 64.477                 | 32.062               | -9.523      | 74.000         | 32.416      | PK   |
| 3  |      | 2485.278        | 67.338                 | 34.919               | -6.662      | 74.000         | 32.419      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:33 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

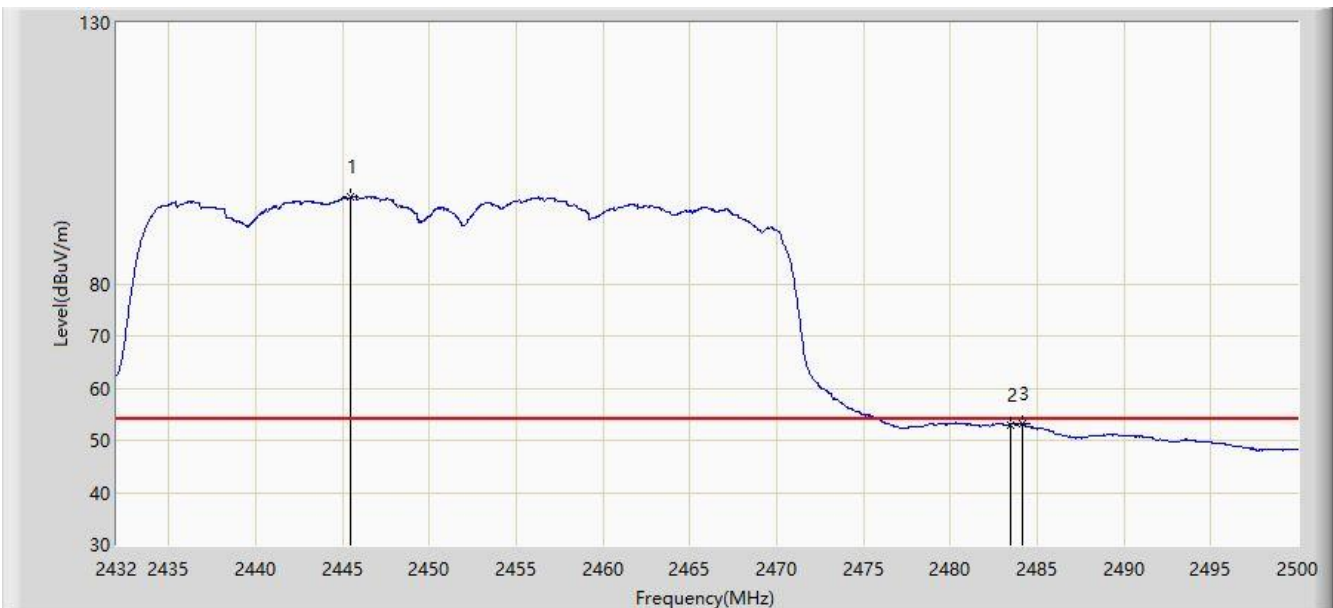


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2445.498        | 96.635                 | 64.298               | N/A         | N/A            | 32.336      | AV   |
| 2  |      | 2483.500        | 53.024                 | 20.609               | -0.976      | 54.000         | 32.416      | AV   |
| 3  |      | 2484.156        | 53.138                 | 20.721               | -0.862      | 54.000         | 32.417      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:37 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

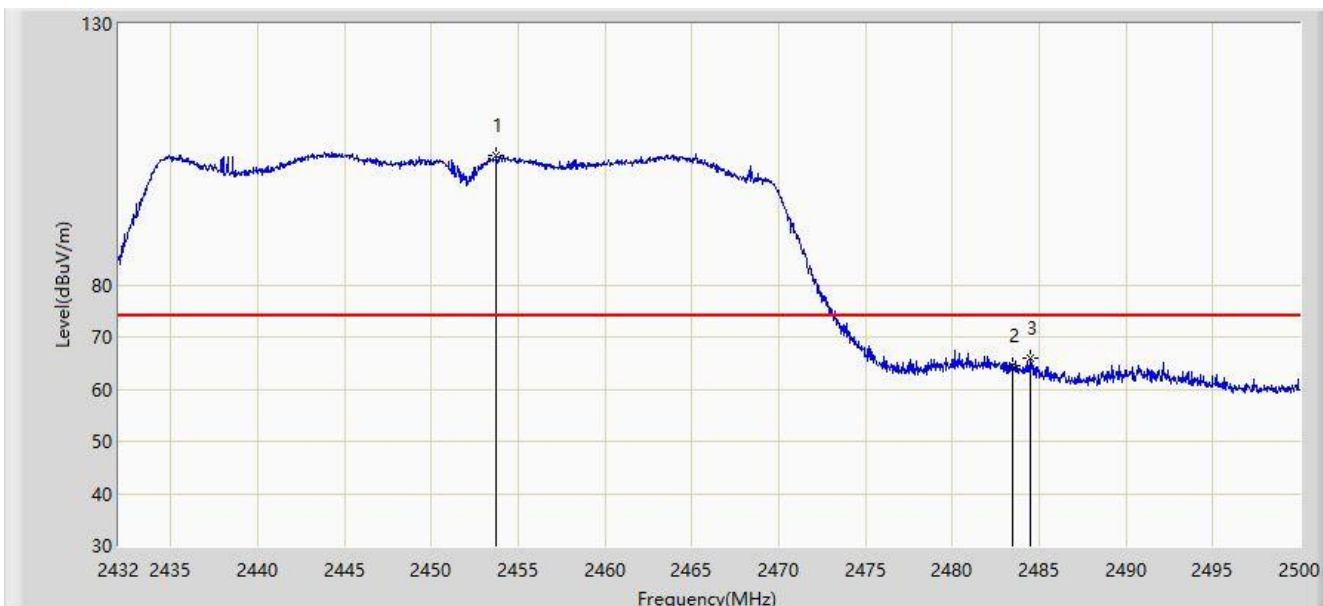


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2453.726        | 104.690                | 72.339               | N/A         | N/A            | 32.351      | PK   |
| 2  |      | 2483.500        | 64.525                 | 32.110               | -9.475      | 74.000         | 32.416      | PK   |
| 3  |      | 2484.462        | 65.991                 | 33.574               | -8.009      | 74.000         | 32.417      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/19 - 05:38 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

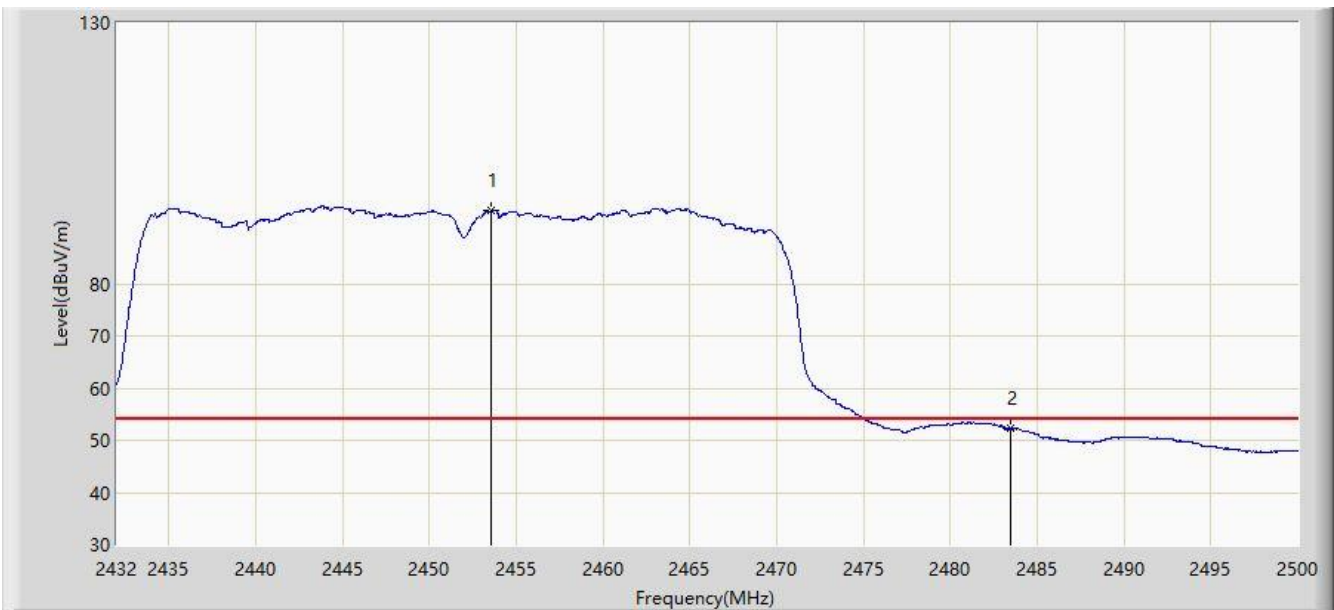


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2453.522        | 94.200                 | 61.850               | N/A         | N/A            | 32.351      | AV   |
| 2  |      | 2483.500        | 52.242                 | 19.827               | -1.758      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:00 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

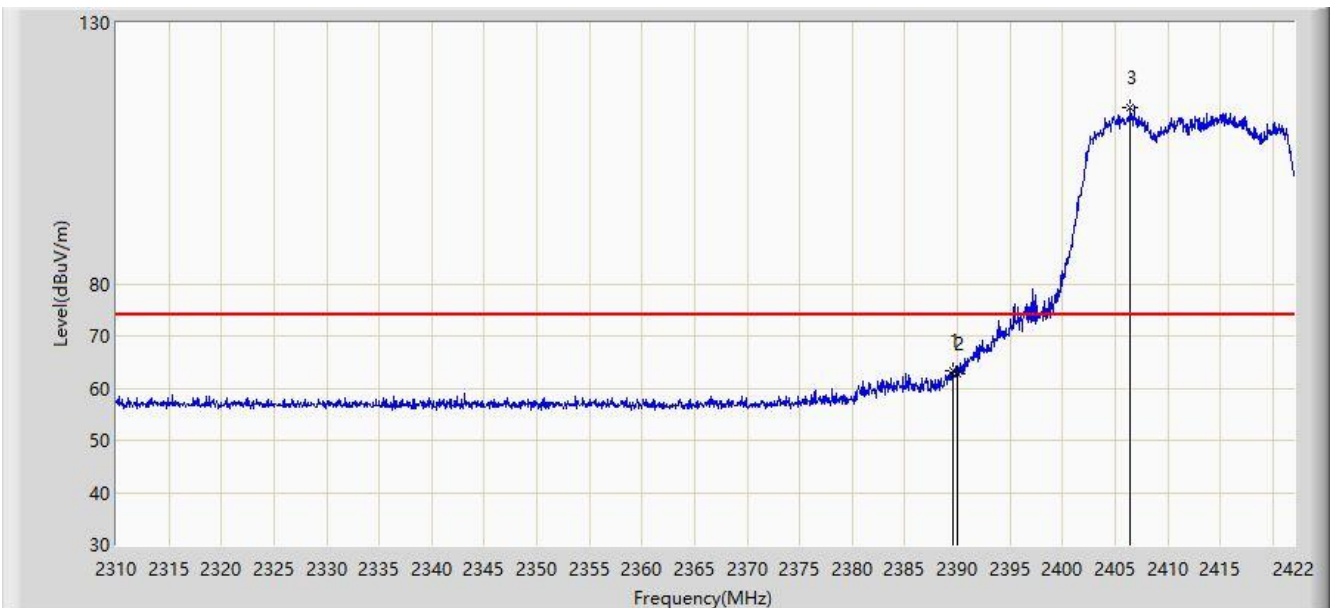


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.520        | 63.395                 | 33.535               | -10.605     | 74.000         | 29.860      | PK   |
| 2  |      |      | 2390.000        | 62.806                 | 32.947               | -11.194     | 74.000         | 29.859      | PK   |
| 3  |      | *    | 2406.488        | 113.700                | 83.883               | N/A         | N/A            | 29.817      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:02 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

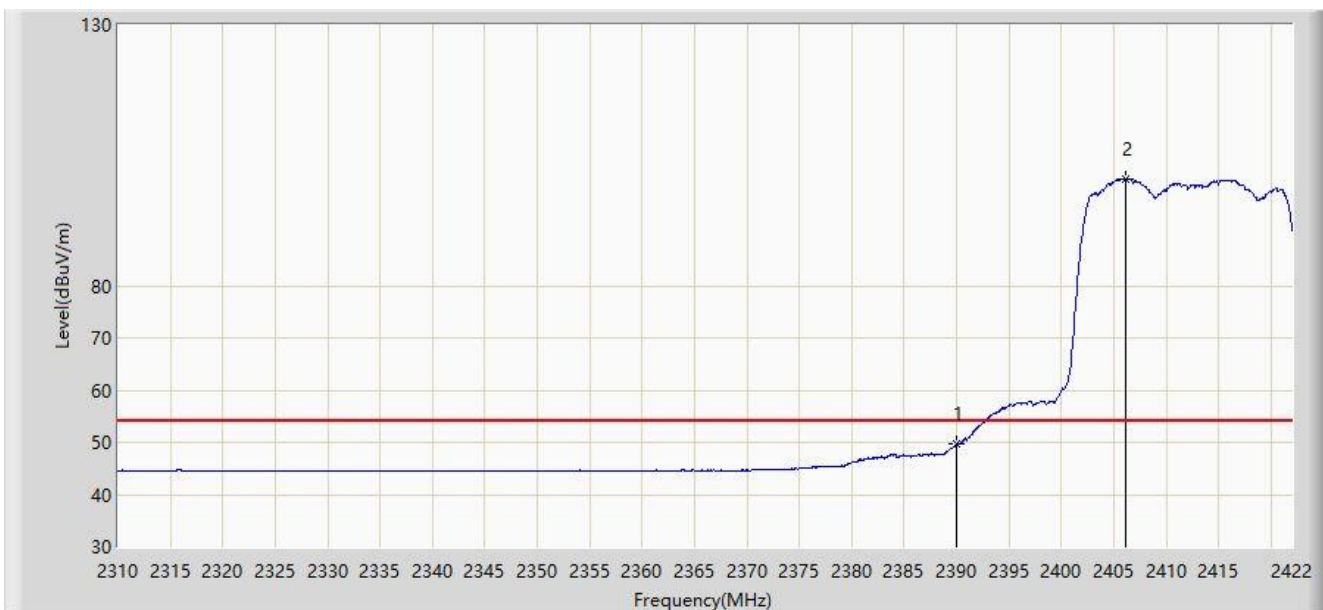


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 49.611                 | 19.752               | -4.389      | 54.000         | 29.859      | AV   |
| 2  |      | *    | 2406.096        | 100.517                | 70.699               | N/A         | N/A            | 29.818      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:04 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

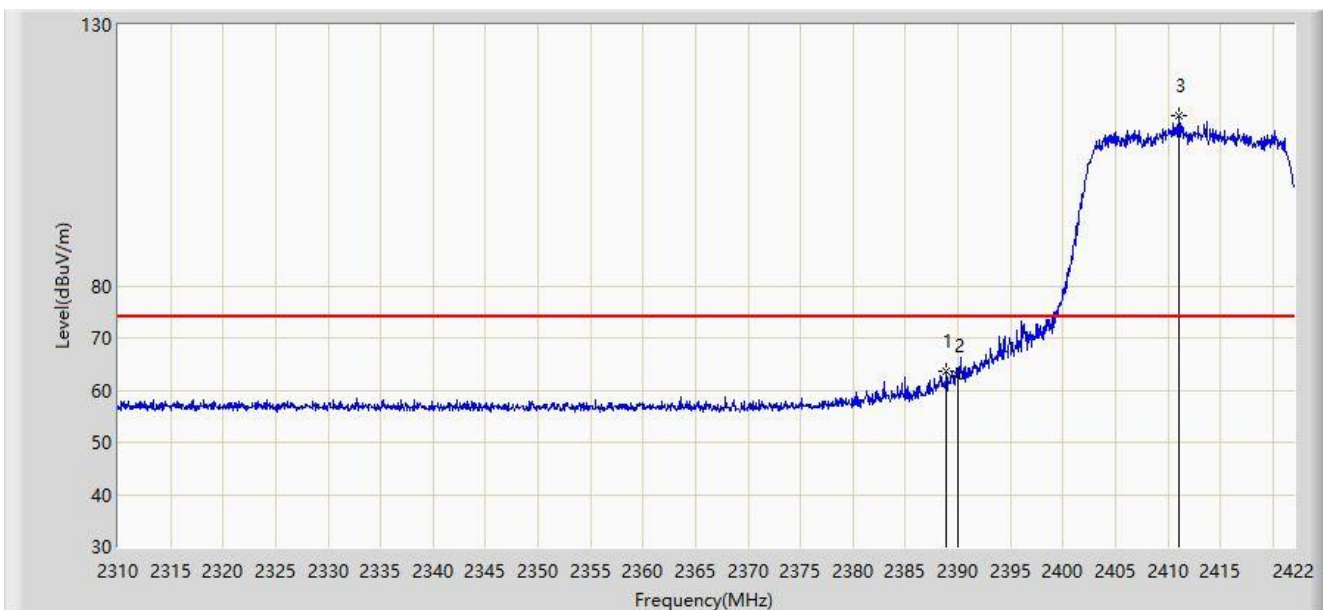


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.904        | 63.638                 | 33.776               | -10.362     | 74.000         | 29.862      | PK   |
| 2  |      |      | 2390.000        | 62.645                 | 32.786               | -11.355     | 74.000         | 29.859      | PK   |
| 3  |      | *    | 2411.080        | 112.559                | 82.753               | N/A         | N/A            | 29.806      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:04 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

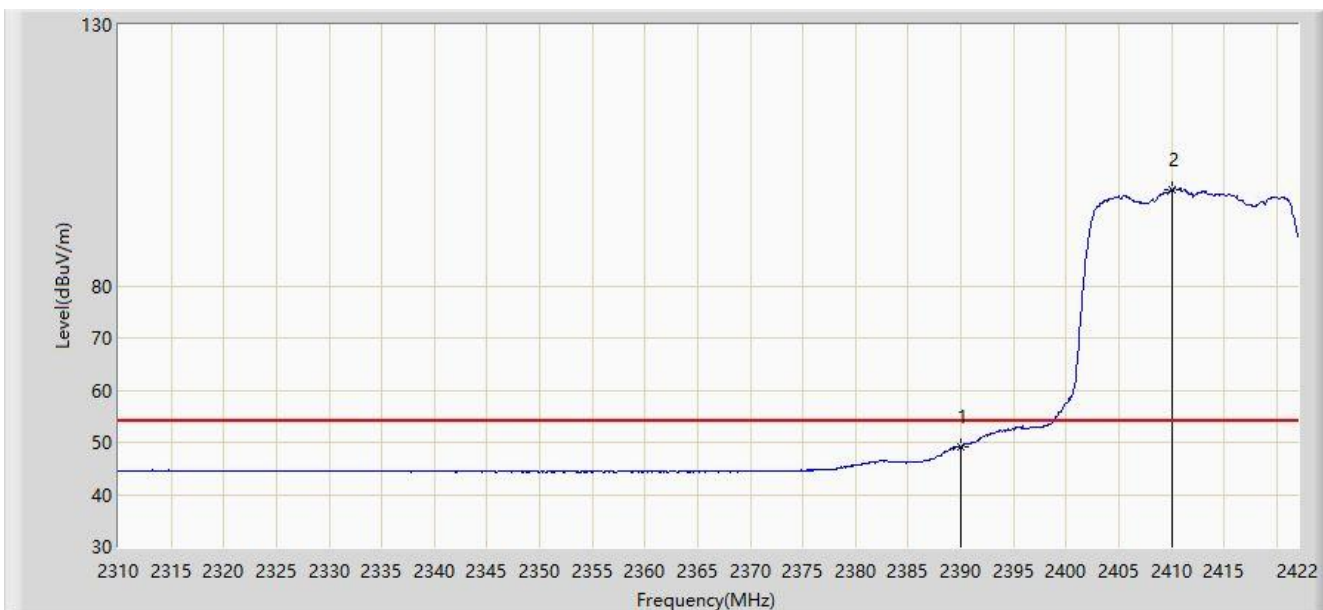


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 49.264                 | 19.405               | -4.736      | 54.000         | 29.859      | AV   |
| 2  |      | *    | 2410.128        | 98.495                 | 68.687               | N/A         | N/A            | 29.808      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:15 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

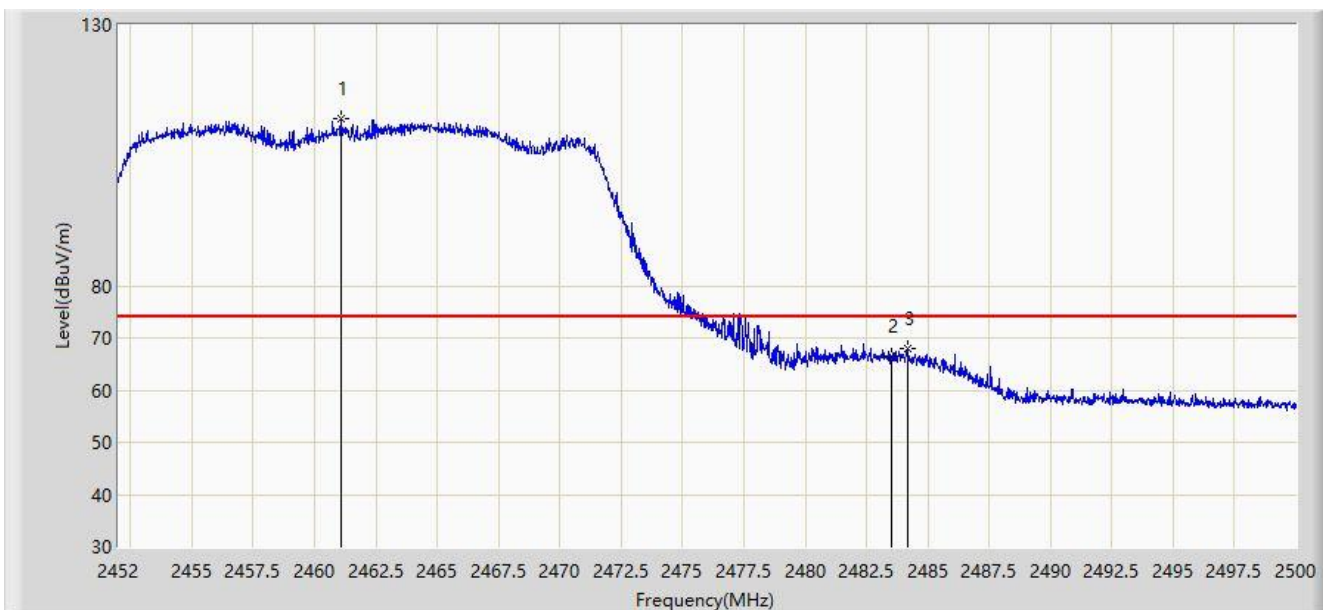


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2461.096        | 112.034                | 82.298               | N/A         | N/A            | 29.736      | PK   |
| 2  |      |      | 2483.500        | 66.586                 | 36.812               | -7.414      | 74.000         | 29.774      | PK   |
| 3  |      |      | 2484.208        | 67.984                 | 38.209               | -6.016      | 74.000         | 29.775      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:17 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

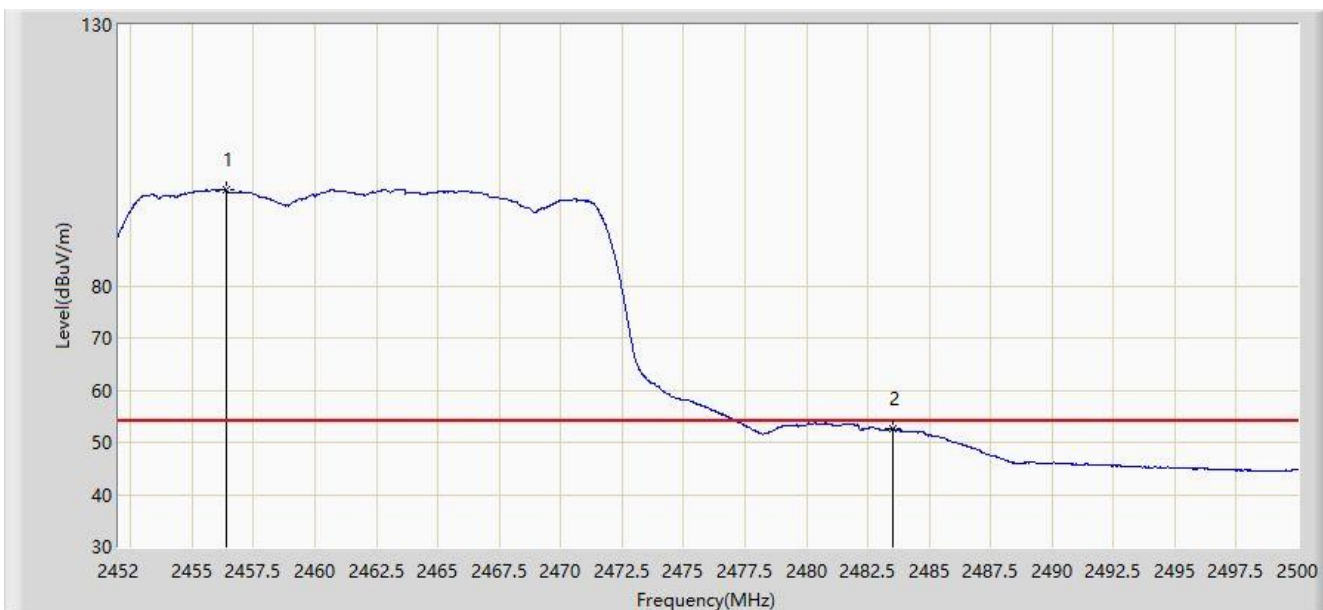


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2456.368        | 98.369                 | 68.638               | N/A         | N/A            | 29.731      | AV   |
| 2  |      |      | 2483.500        | 52.547                 | 22.773               | -1.453      | 54.000         | 29.774      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:14 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

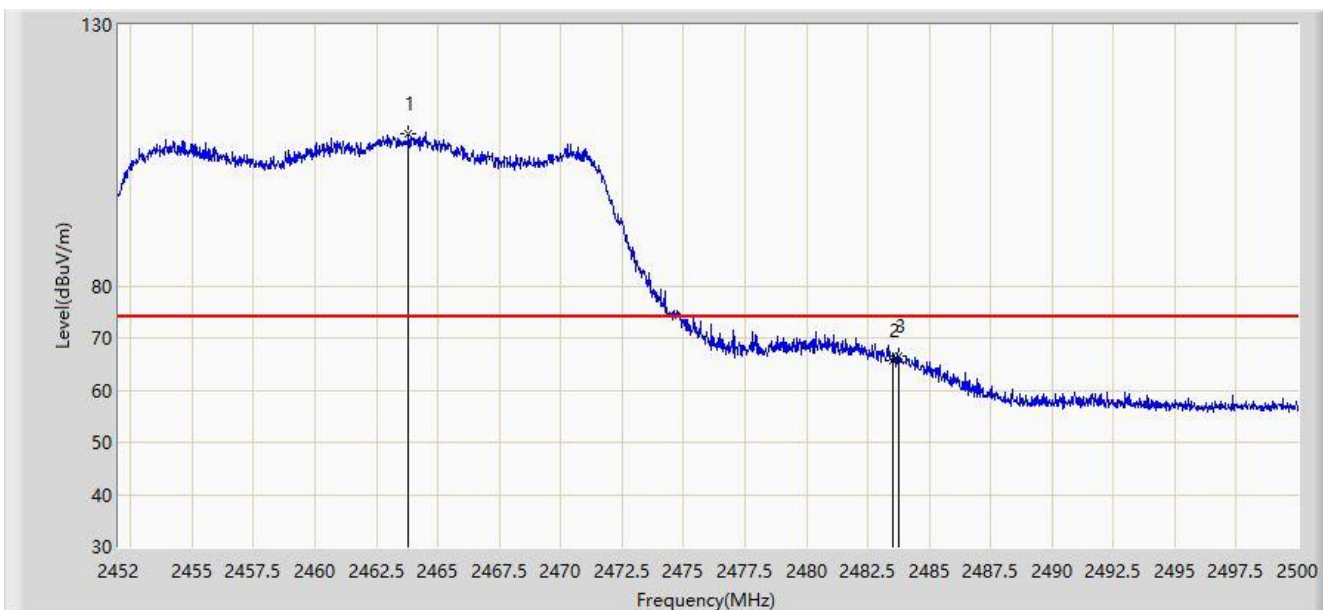


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2463.808        | 109.064                | 79.326               | N/A         | N/A            | 29.738      | PK   |
| 2  |      |      | 2483.500        | 65.795                 | 36.021               | -8.205      | 74.000         | 29.774      | PK   |
| 3  |      |      | 2483.776        | 66.585                 | 36.811               | -7.415      | 74.000         | 29.774      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 17:13 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

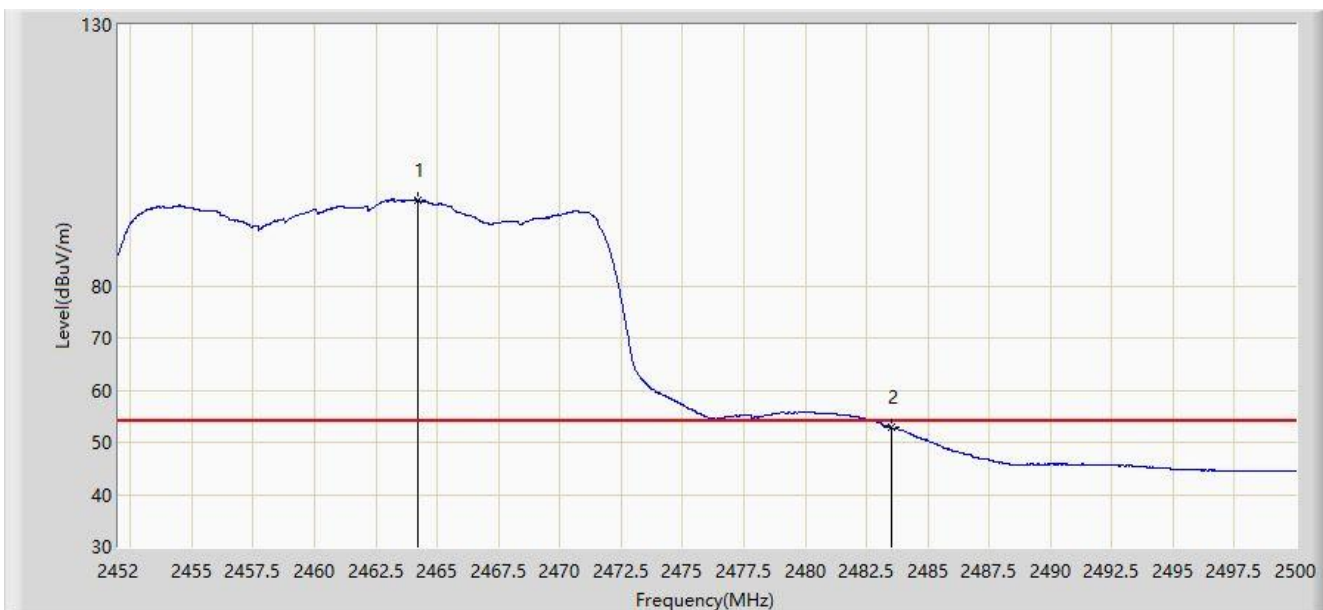


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2464.216        | 96.445                 | 66.706               | N/A         | N/A            | 29.739      | AV   |
| 2  |      |      | 2483.500        | 52.962                 | 23.188               | -1.038      | 54.000         | 29.774      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:47 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

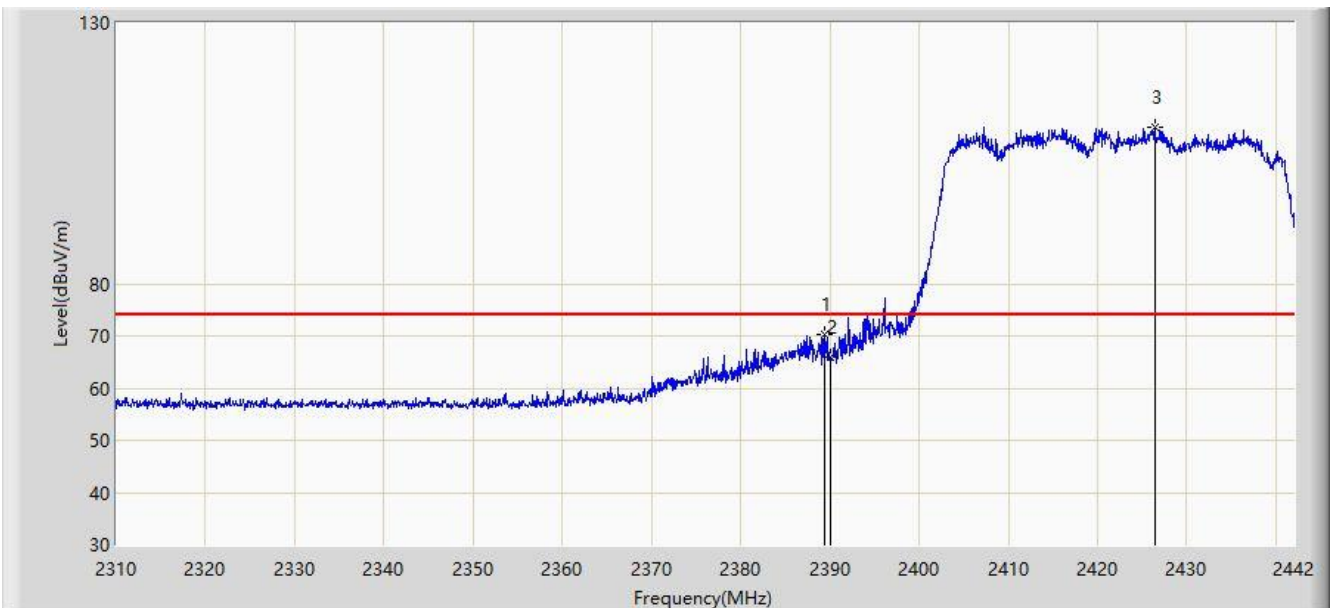


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2389.398        | 70.434                 | 40.574               | -3.566      | 74.000         | 29.860      | PK   |
| 2  |      |      | 2390.000        | 65.981                 | 36.122               | -8.019      | 74.000         | 29.859      | PK   |
| 3  |      | *    | 2426.424        | 110.142                | 80.372               | N/A         | N/A            | 29.770      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:46 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

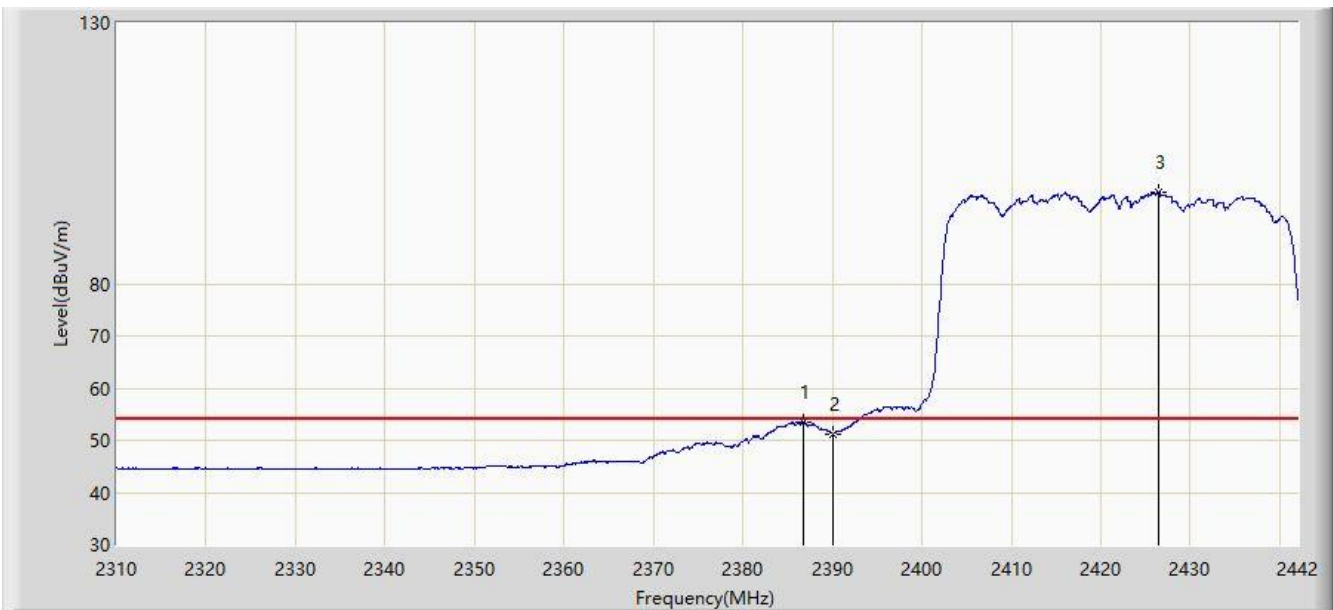


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2386.692        | 53.465                 | 23.598               | -0.535      | 54.000         | 29.867      | AV   |
| 2  |      |      | 2390.000        | 51.179                 | 21.320               | -2.821      | 54.000         | 29.859      | AV   |
| 3  |      | *    | 2426.490        | 97.574                 | 67.804               | N/A         | N/A            | 29.770      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:49 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

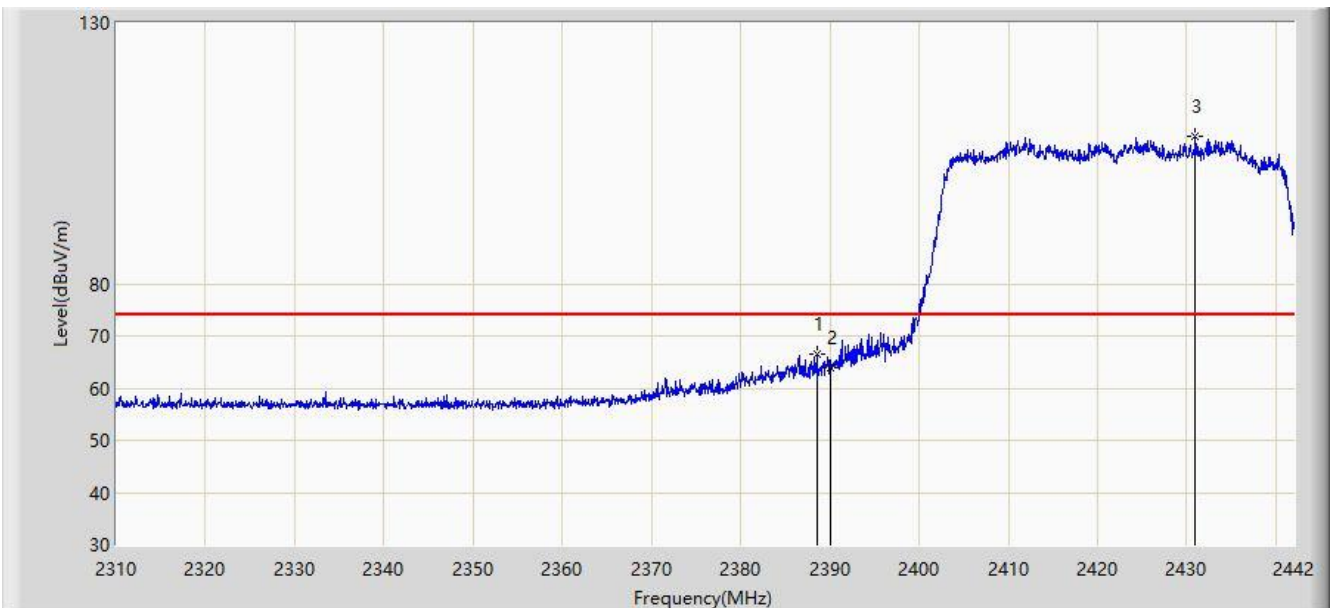


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2388.540        | 66.575                 | 36.712               | -7.425      | 74.000         | 29.863      | PK   |
| 2  |      |      | 2390.000        | 64.056                 | 34.197               | -9.944      | 74.000         | 29.859      | PK   |
| 3  |      | *    | 2430.978        | 108.134                | 78.375               | N/A         | N/A            | 29.759      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:50 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

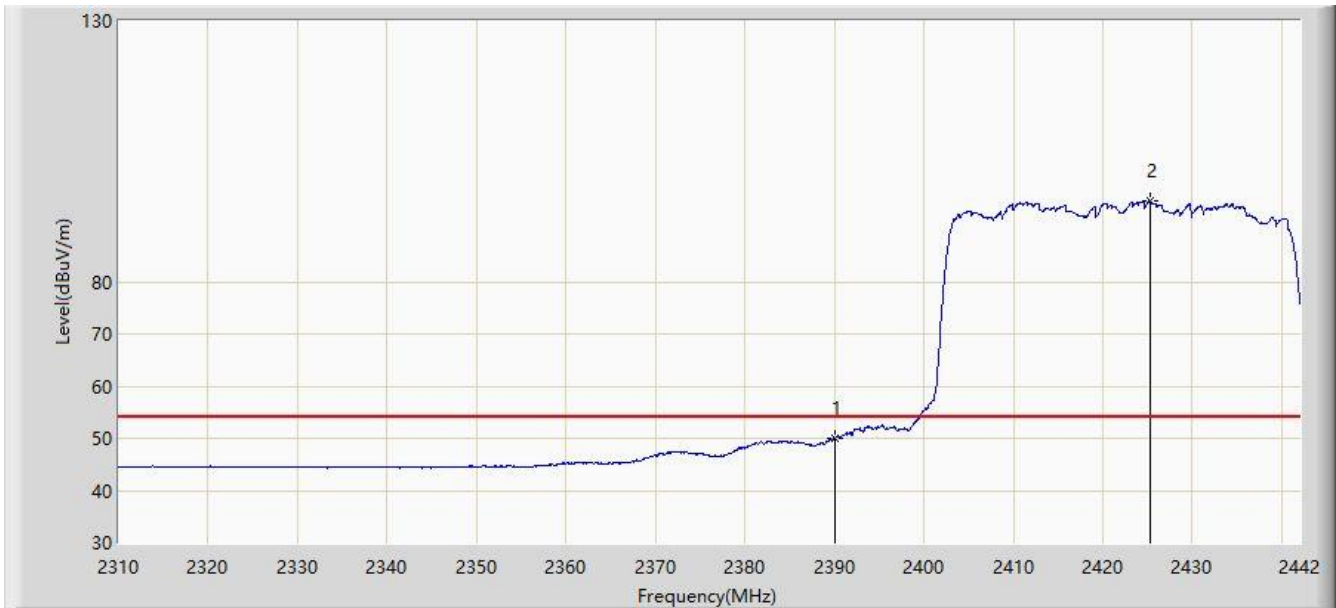


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 50.005                 | 20.146               | -3.995      | 54.000         | 29.859      | AV   |
| 2  |      | *    | 2425.302        | 95.504                 | 65.732               | N/A         | N/A            | 29.772      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:55 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

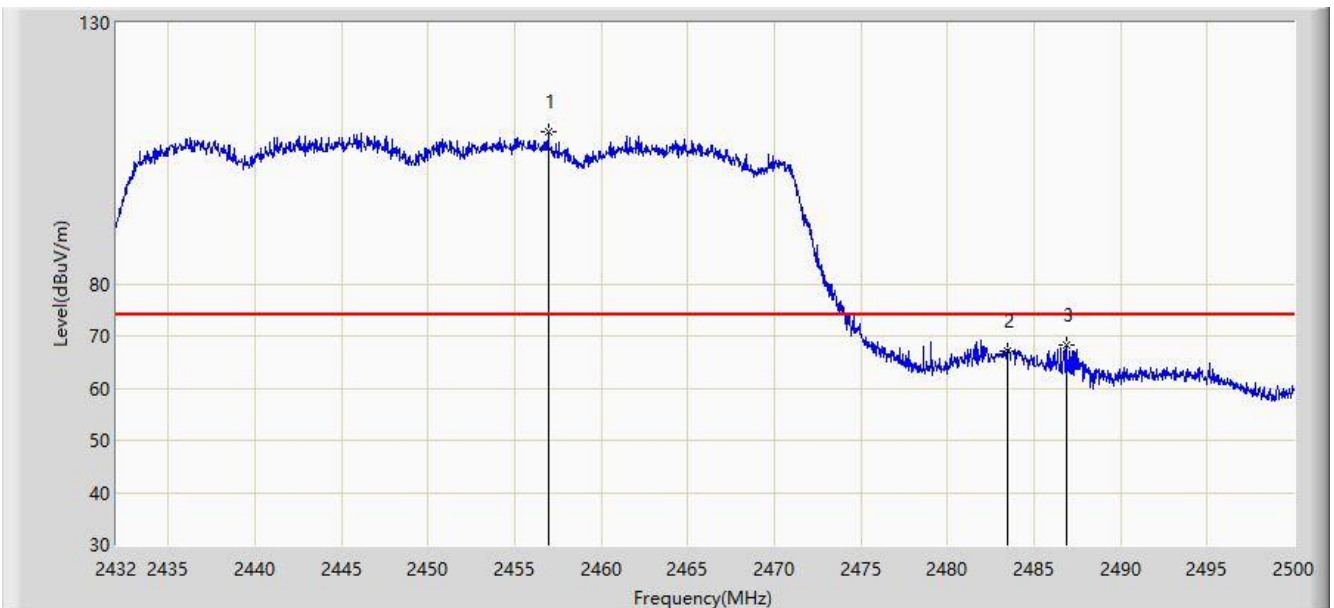


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2456.956        | 109.186                | 79.454               | N/A         | N/A            | 29.732      | PK   |
| 2  |      |      | 2483.500        | 67.165                 | 37.391               | -6.835      | 74.000         | 29.774      | PK   |
| 3  |      |      | 2486.876        | 68.198                 | 38.418               | -5.802      | 74.000         | 29.780      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:54 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

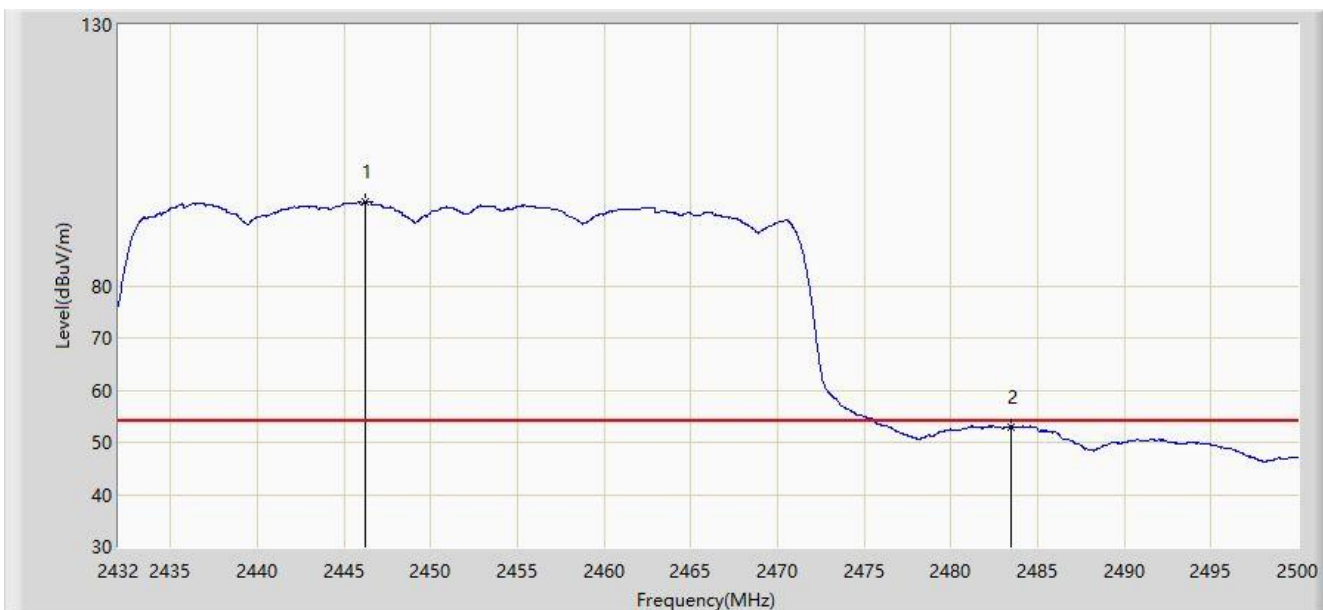


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2446.212        | 96.015                 | 66.293               | N/A         | N/A            | 29.722      | AV   |
| 2  |      |      | 2483.500        | 53.009                 | 23.235               | -0.991      | 54.000         | 29.774      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:56 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

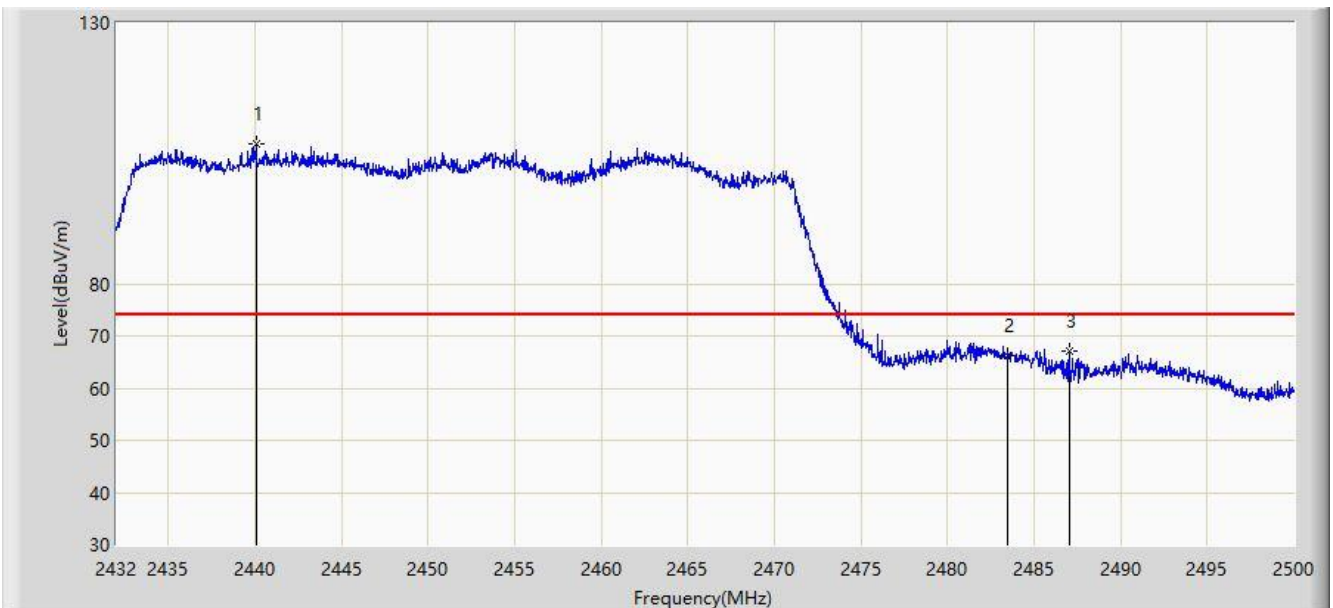


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2440.058        | 106.882                | 77.145               | N/A         | N/A            | 29.737      | PK   |
| 2  |      |      | 2483.500        | 66.362                 | 36.588               | -7.638      | 74.000         | 29.774      | PK   |
| 3  |      |      | 2487.046        | 67.175                 | 37.395               | -6.825      | 74.000         | 29.780      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC2                                               | Time: 2019/10/05 - 16:57 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

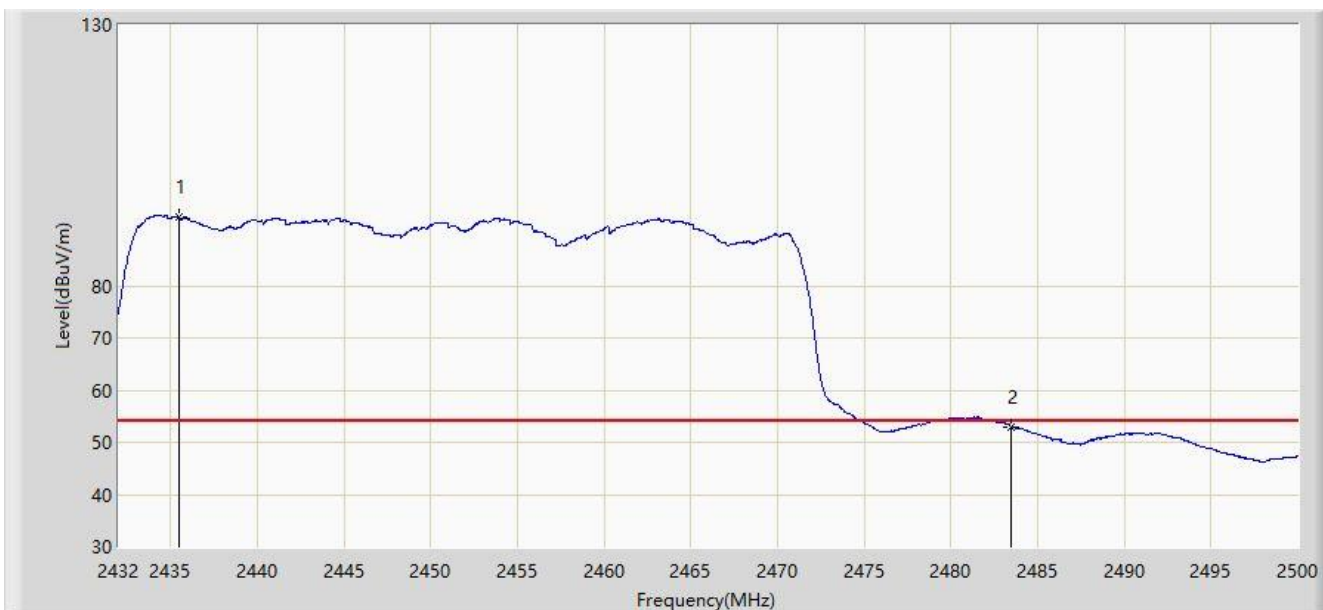


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2435.468        | 93.200                 | 63.452               | N/A         | N/A            | 29.748      | AV   |
| 2  |      |      | 2483.500        | 52.936                 | 23.162               | -1.064      | 54.000         | 29.774      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

### For Scan Antenna

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 20:54 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2412MHz |                          |

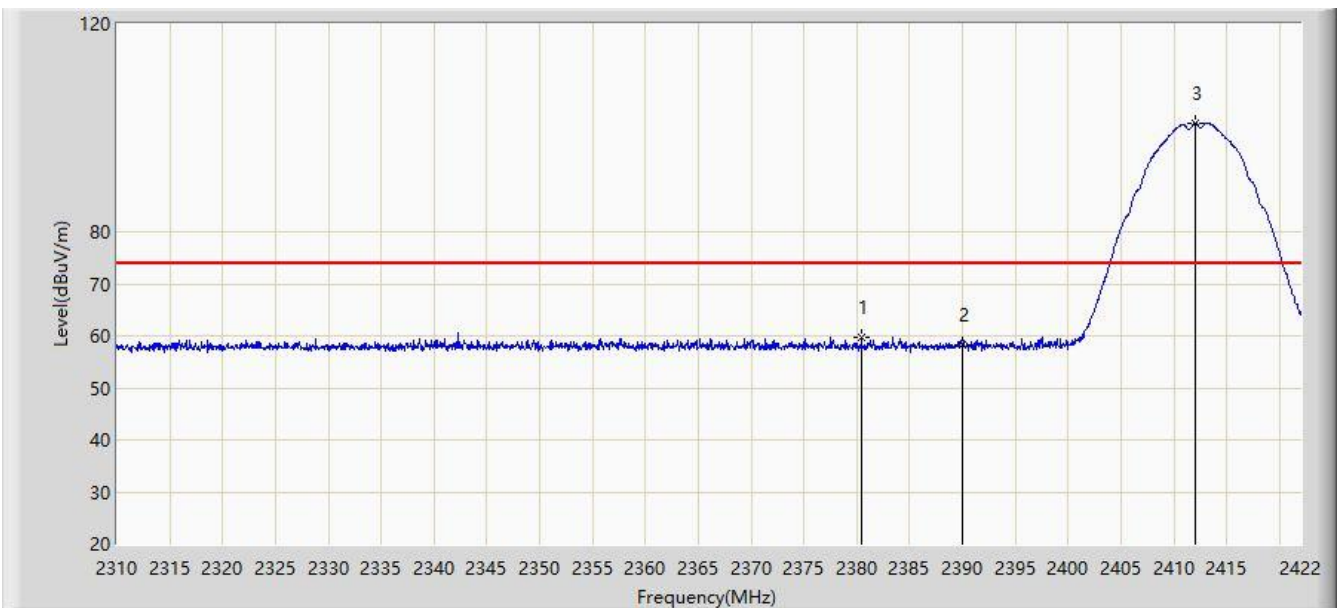


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2380.448        | 59.799                 | 27.369               | -14.201     | 74.000         | 32.431      | PK   |
| 2  |      |      | 2390.000        | 58.390                 | 25.977               | -15.610     | 74.000         | 32.413      | PK   |
| 3  |      | *    | 2412.032        | 100.905                | 68.521               | N/A         | N/A            | 32.384      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 20:56 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2412MHz |                          |

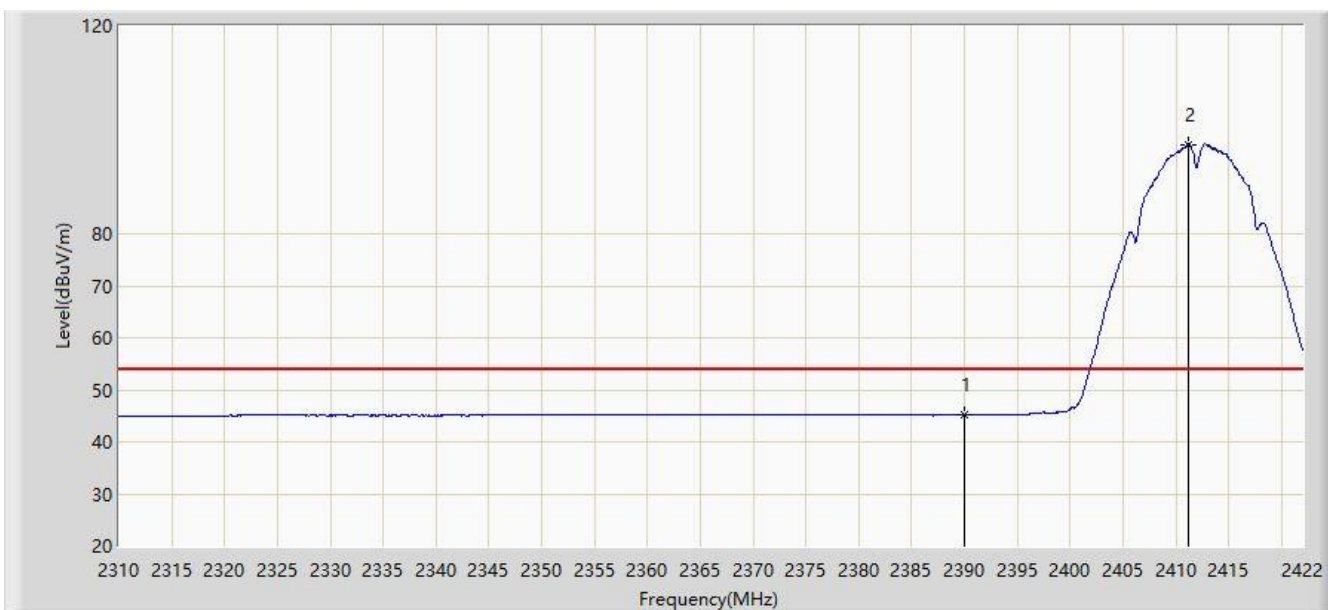


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 45.163                 | 12.750               | -8.837      | 54.000         | 32.413      | AV   |
| 2  |      | *    | 2411.136        | 97.202                 | 64.817               | N/A         | N/A            | 32.385      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 20:57 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2412MHz |                          |

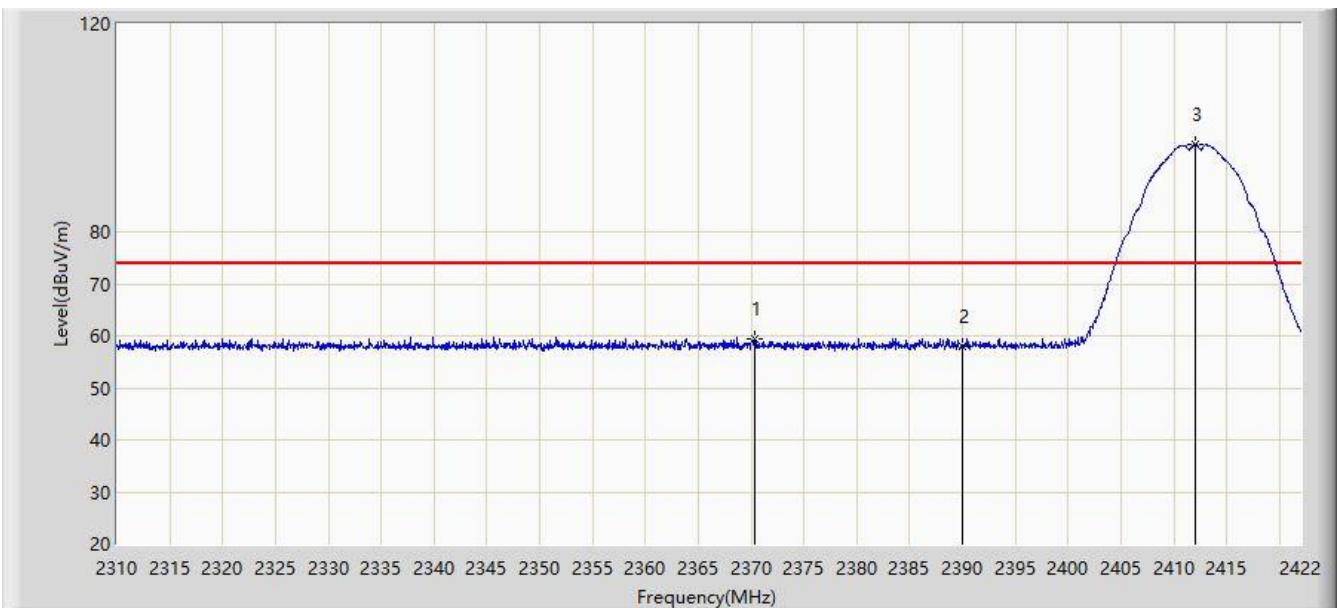


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2370.312        | 59.317                 | 26.865               | -14.683     | 74.000         | 32.452      | PK   |
| 2  |      |      | 2390.000        | 58.101                 | 25.688               | -15.899     | 74.000         | 32.413      | PK   |
| 3  |      | *    | 2411.976        | 96.863                 | 64.479               | N/A         | N/A            | 32.384      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 20:59 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2412MHz |                          |

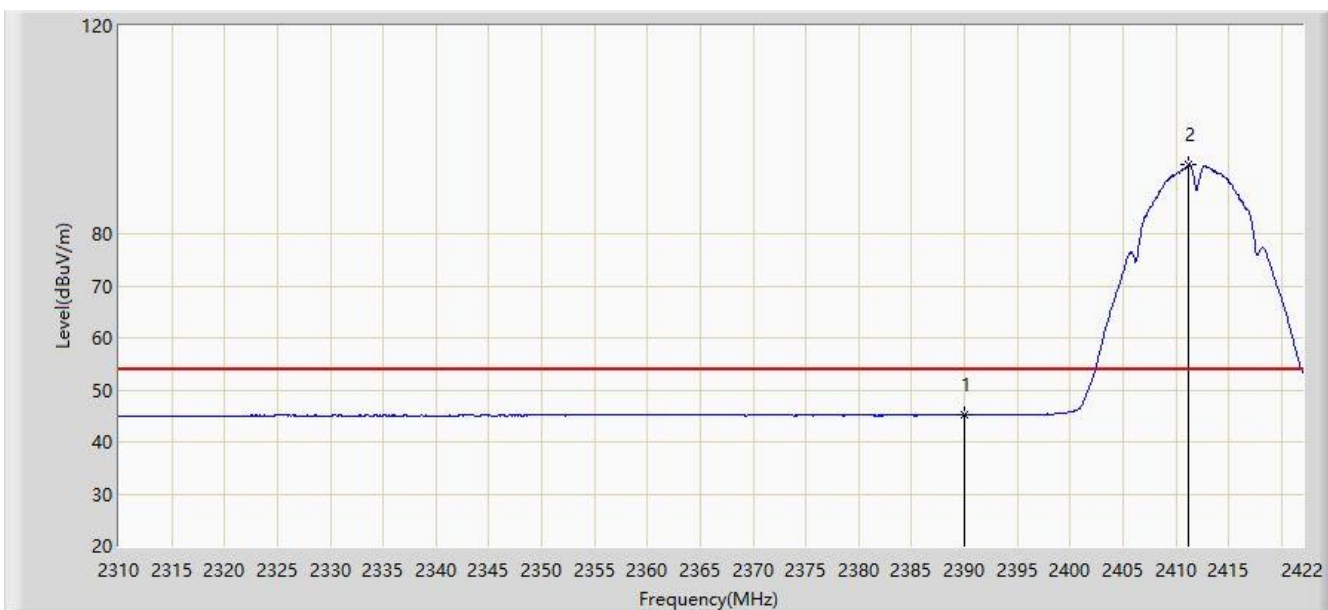


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 45.135                 | 12.722               | -8.865      | 54.000         | 32.413      | AV   |
| 2  |      | *    | 2411.136        | 93.227                 | 60.842               | N/A         | N/A            | 32.385      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:00 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2462MHz |                          |

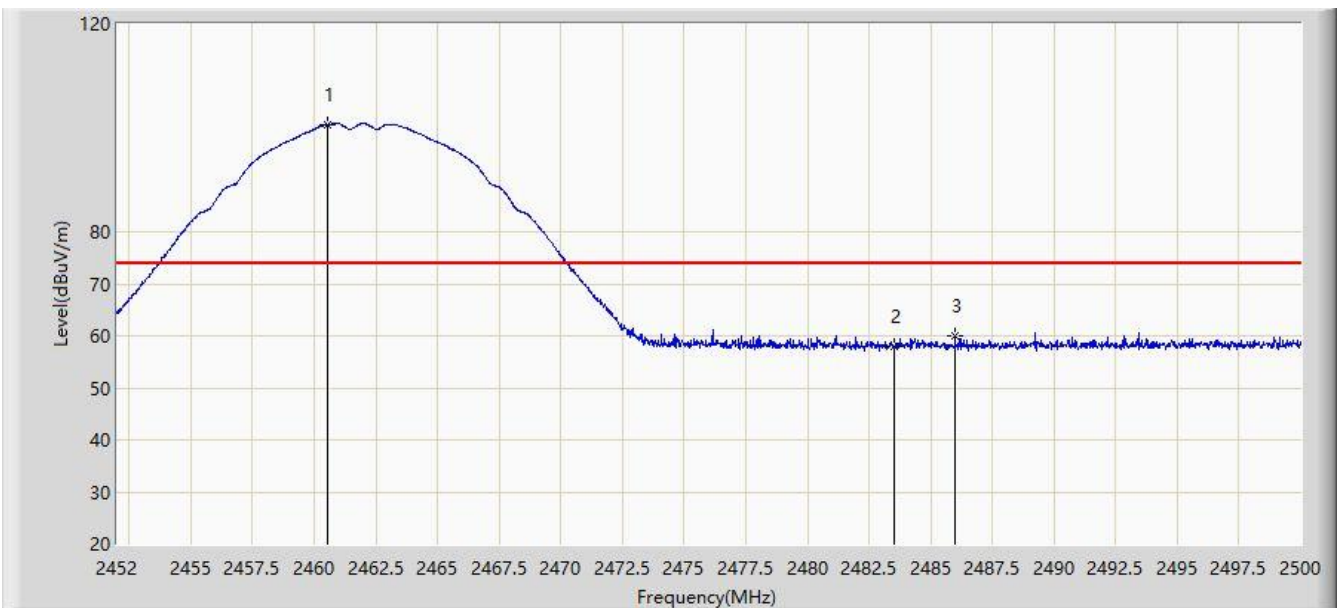

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2460.544        | 100.608                | 68.244               | N/A         | N/A            | 32.364      | PK   |
| 2  |      |      | 2483.500        | 58.094                 | 25.679               | -15.906     | 74.000         | 32.416      | PK   |
| 3  |      |      | 2485.984        | 59.869                 | 27.449               | -14.131     | 74.000         | 32.420      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:01 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2462MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2461.168        | 97.270                 | 64.905               | N/A         | N/A            | 32.365      | AV   |
| 2  |      |      | 2483.500        | 45.647                 | 13.232               | -8.353      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:02 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2462MHz |                          |

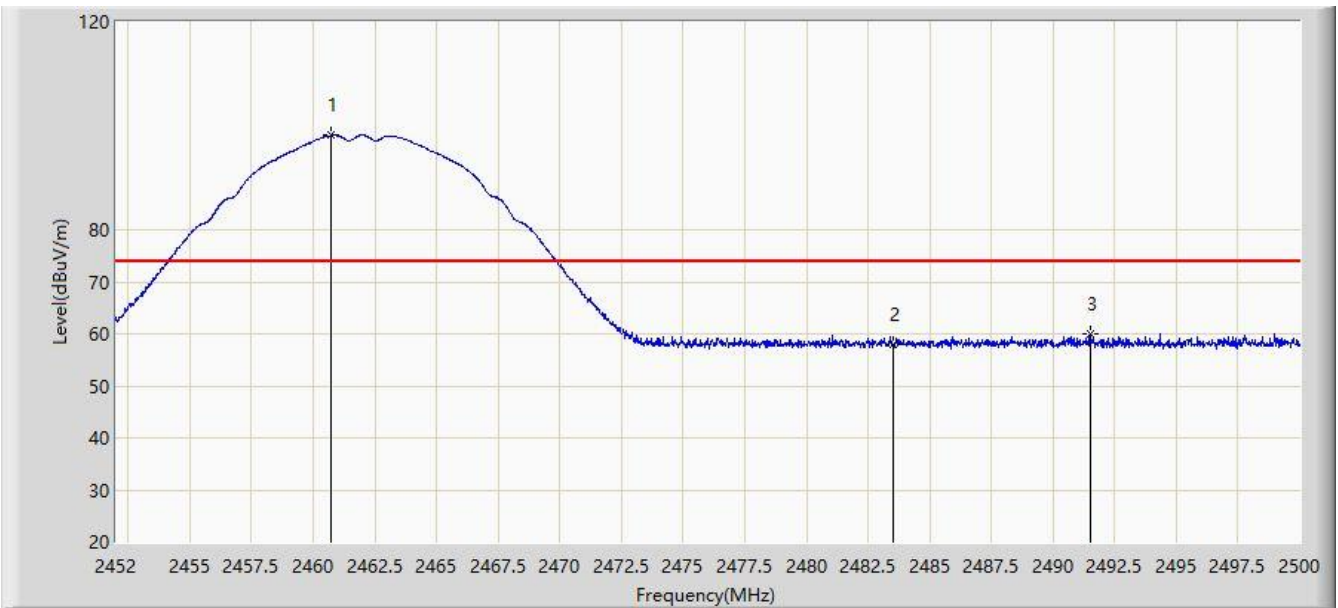

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2460.736        | 98.116                 | 65.752               | N/A         | N/A            | 32.364      | PK   |
| 2  |      |      | 2483.500        | 57.828                 | 25.413               | -16.172     | 74.000         | 32.416      | PK   |
| 3  |      |      | 2491.504        | 60.017                 | 27.586               | -13.983     | 74.000         | 32.431      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:02 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at channel 2462MHz |                          |




| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2461.168        | 94.739                 | 62.374               | N/A         | N/A            | 32.365      | AV   |
| 2  |      |      | 2483.500        | 45.618                 | 13.203               | -8.382      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:03 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2412MHz |                          |

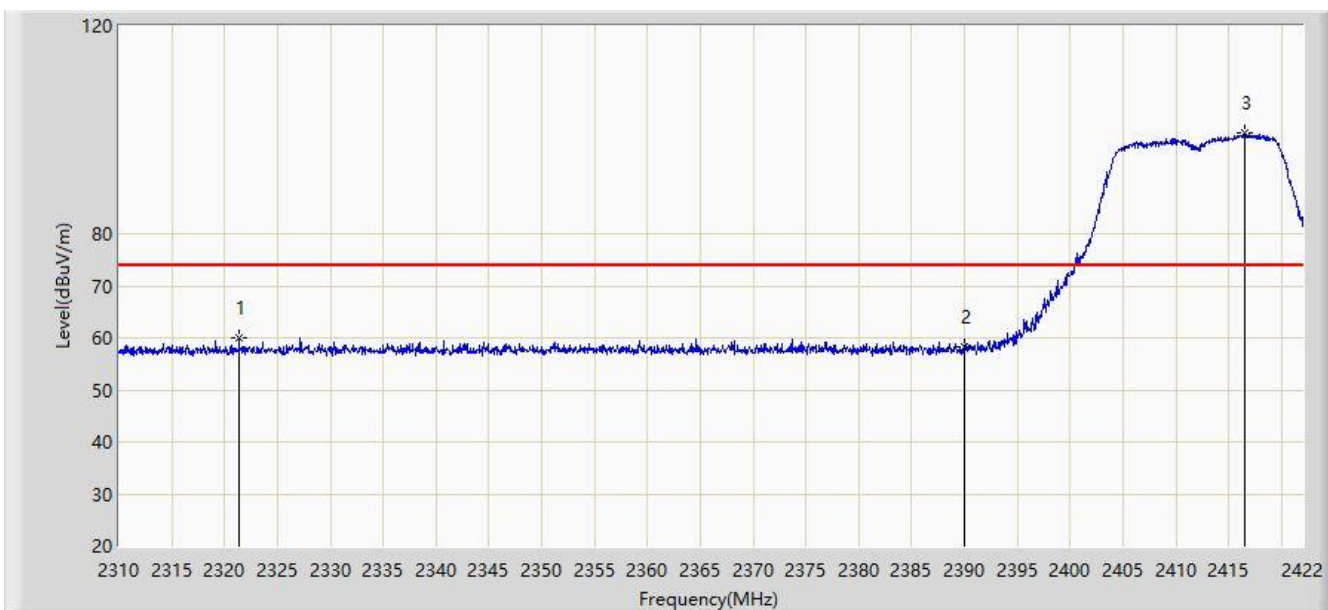


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2321.368        | 59.953                 | 27.327               | -14.047     | 74.000         | 32.626      | PK   |
| 2  |      |      | 2390.000        | 58.318                 | 25.905               | -15.682     | 74.000         | 32.413      | PK   |
| 3  |      | *    | 2416.512        | 99.300                 | 66.921               | N/A         | N/A            | 32.379      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:04 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2412MHz |                          |

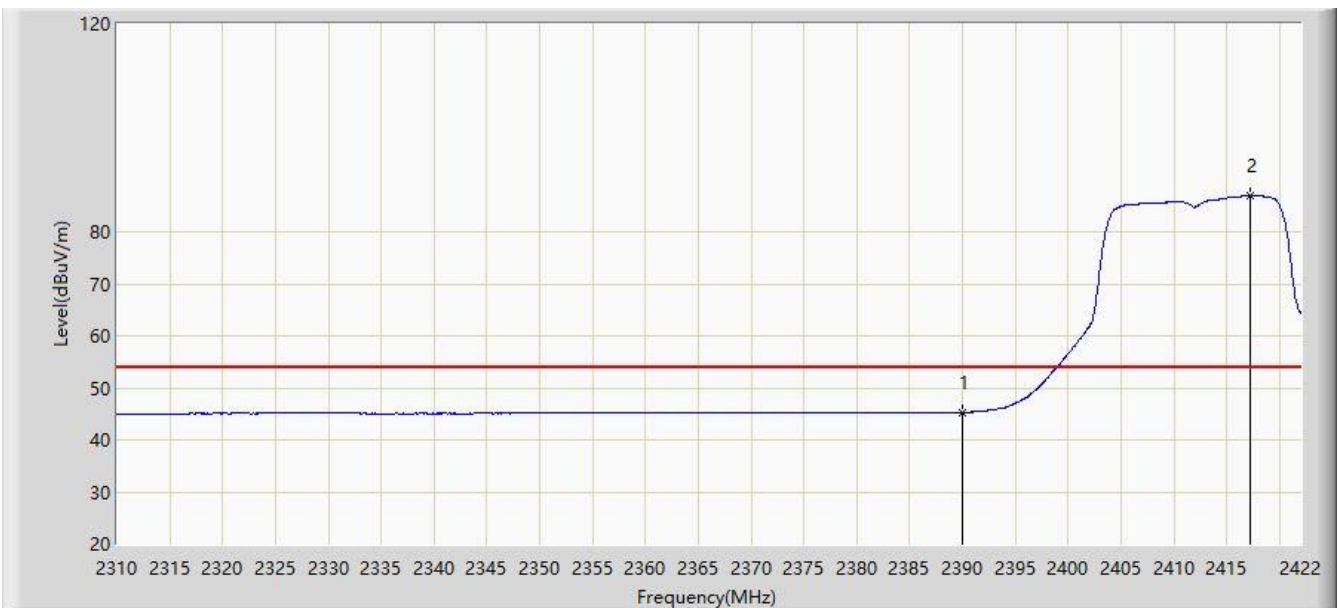


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 45.297                 | 12.884               | -8.703      | 54.000         | 32.413      | AV   |
| 2  |      | *    | 2417.240        | 86.929                 | 54.551               | N/A         | N/A            | 32.378      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:05 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2412MHz |                          |

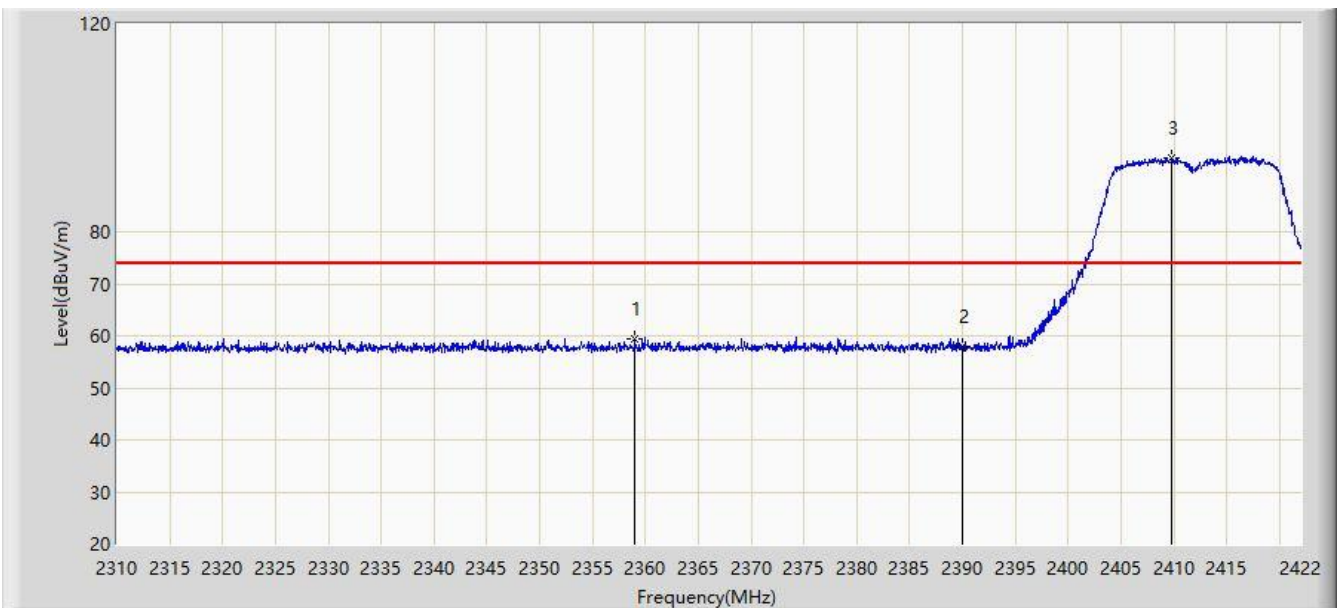


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2359.000        | 59.421                 | 26.944               | -14.579     | 74.000         | 32.477      | PK   |
| 2  |      |      | 2390.000        | 57.940                 | 25.527               | -16.060     | 74.000         | 32.413      | PK   |
| 3  |      | *    | 2409.792        | 94.246                 | 61.859               | N/A         | N/A            | 32.386      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:06 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2412MHz |                          |

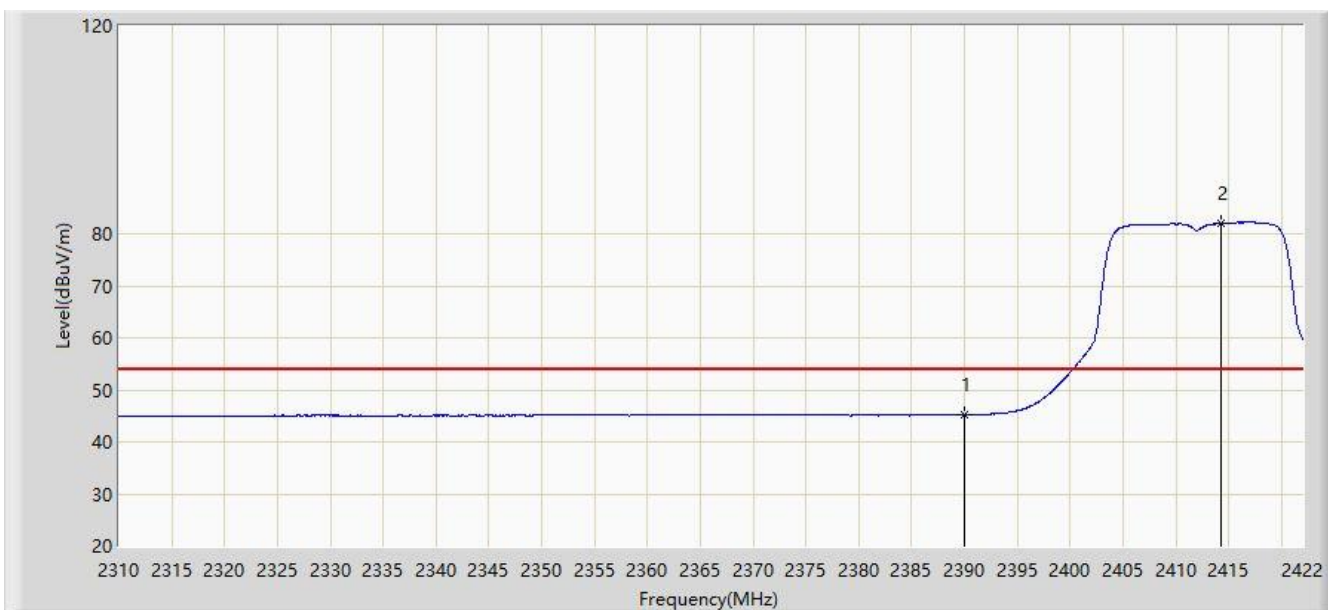


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      |      | 2390.000        | 45.181                 | 12.768               | -8.819      | 54.000         | 32.413      | AV   |
| 2  |      | *    | 2414.272        | 81.961                 | 49.579               | N/A         | N/A            | 32.382      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:06 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2462MHz |                          |

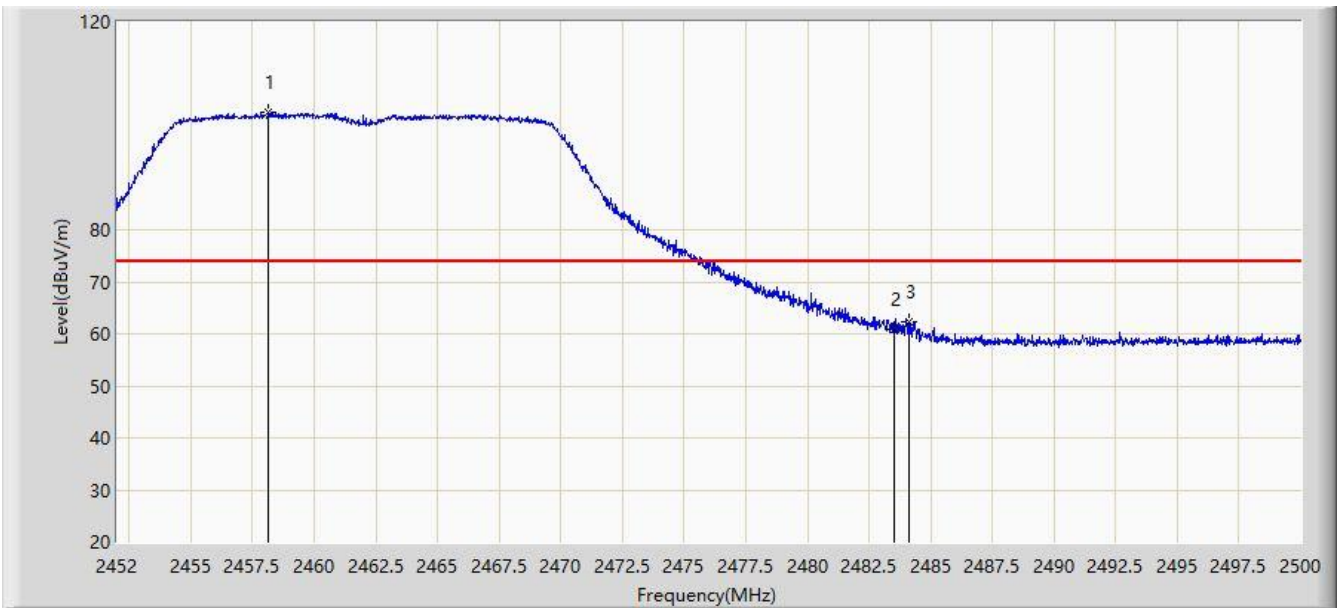


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2458.144        | 102.474                | 70.115               | N/A         | N/A            | 32.359      | PK   |
| 2  |      |      | 2483.500        | 60.894                 | 28.479               | -13.106     | 74.000         | 32.416      | PK   |
| 3  |      |      | 2484.136        | 62.452                 | 30.035               | -11.548     | 74.000         | 32.417      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:08 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2462MHz |                          |

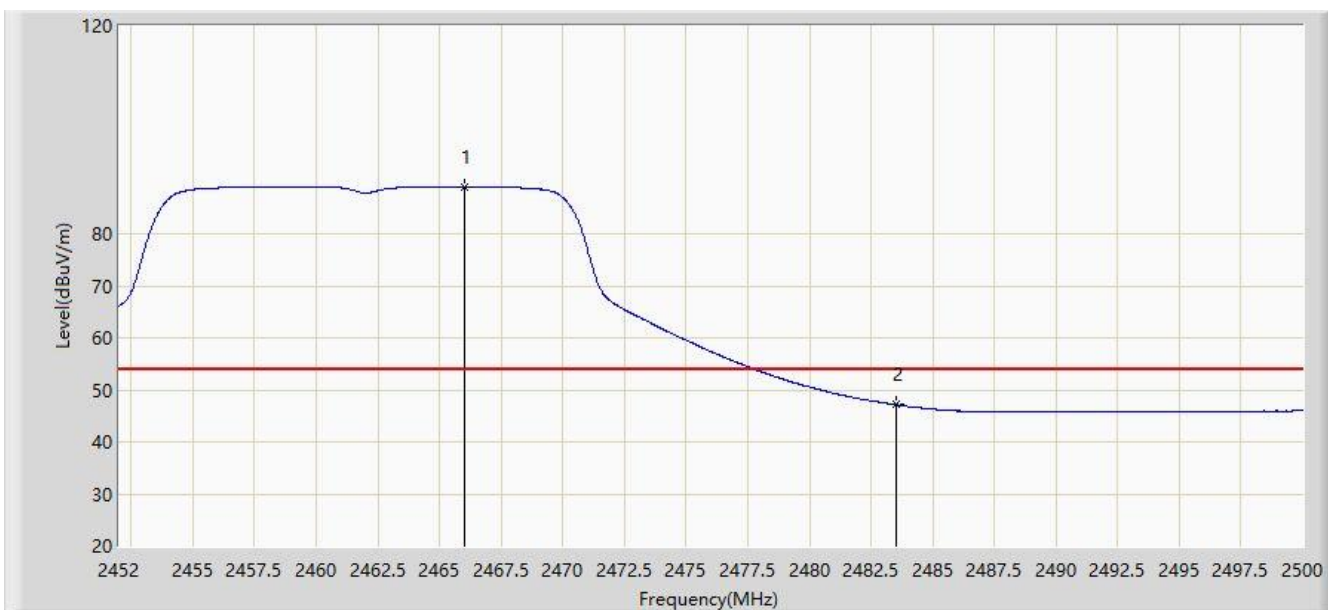


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2466.016        | 89.109                 | 56.734               | N/A         | N/A            | 32.375      | AV   |
| 2  |      |      | 2483.500        | 47.144                 | 14.729               | -6.856      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:08 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2462MHz |                          |

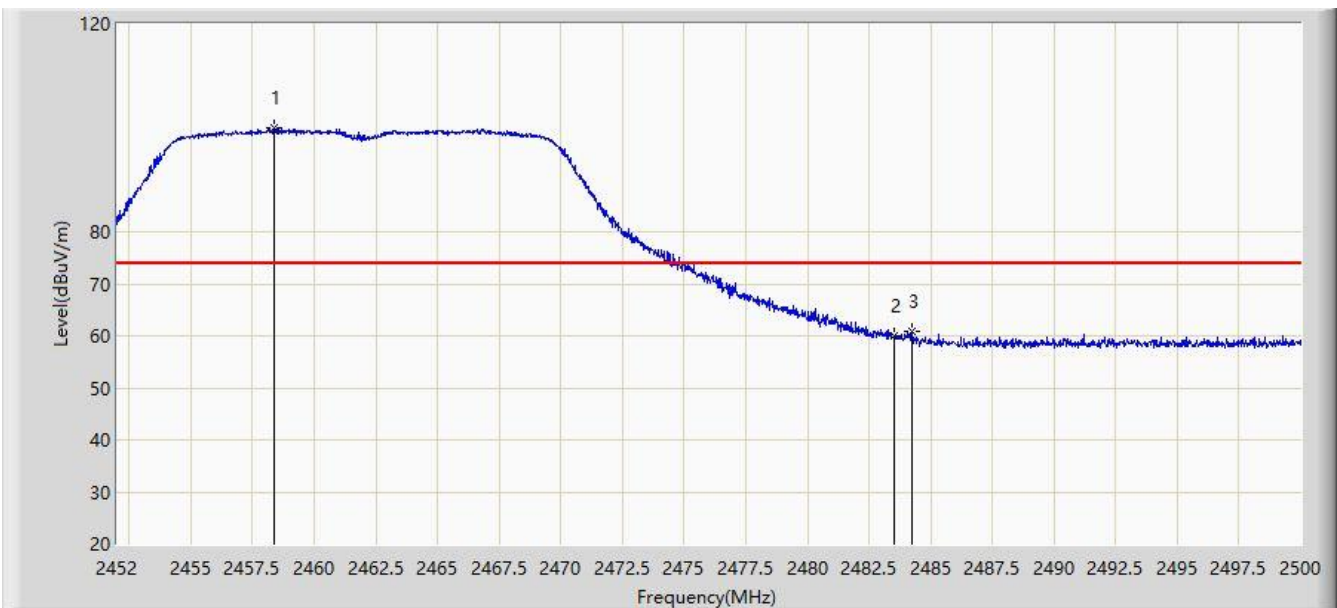


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2458.360        | 100.029                | 67.670               | N/A         | N/A            | 32.359      | PK   |
| 2  |      |      | 2483.500        | 60.071                 | 27.656               | -13.929     | 74.000         | 32.416      | PK   |
| 3  |      |      | 2484.232        | 60.827                 | 28.410               | -13.173     | 74.000         | 32.417      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/29 - 21:10 |
| Limit: FCC_Part15.209(3m)                         | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at channel 2462MHz |                          |

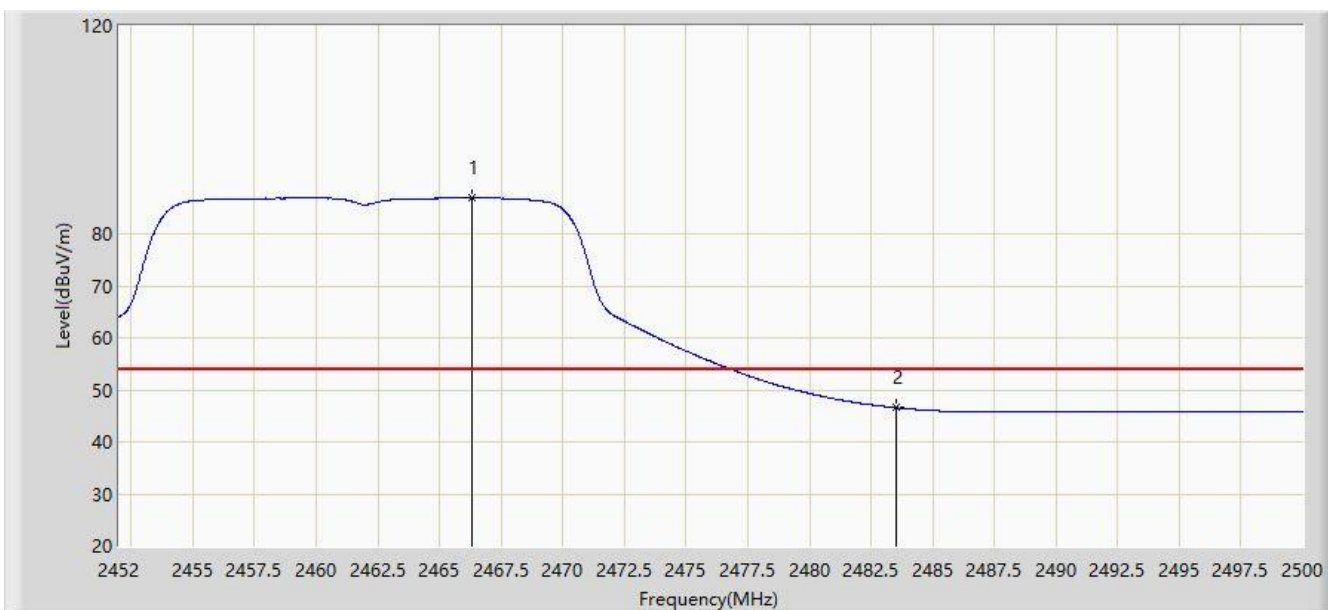


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | *    | 2466.328        | 86.926                 | 54.551               | N/A         | N/A            | 32.376      | AV   |
| 2  |      |      | 2483.500        | 46.568                 | 14.153               | -7.432      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

### For AP321e

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:20 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |

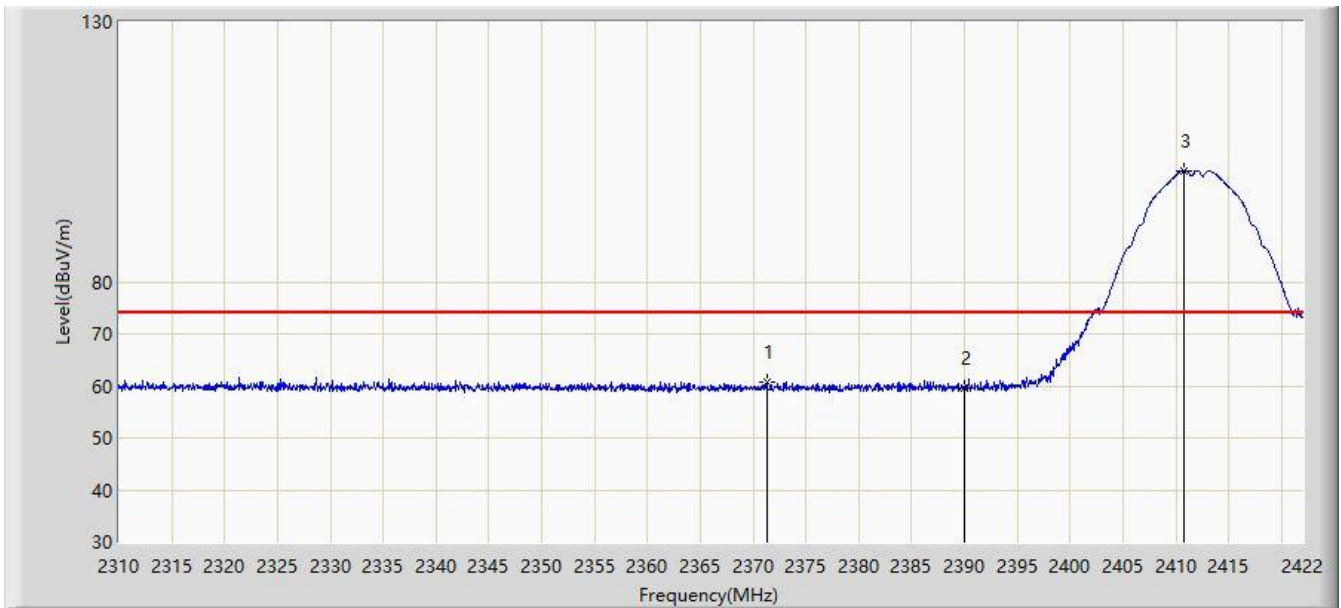


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2371.264        | 60.743                 | 28.294               | -13.257     | 74.000         | 32.449      | PK   |
| 2  |      | 2390.000        | 59.664                 | 27.251               | -14.336     | 74.000         | 32.413      | PK   |
| 3  | *    | 2410.800        | 101.413                | 69.027               | N/A         | N/A            | 32.386      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:29 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |

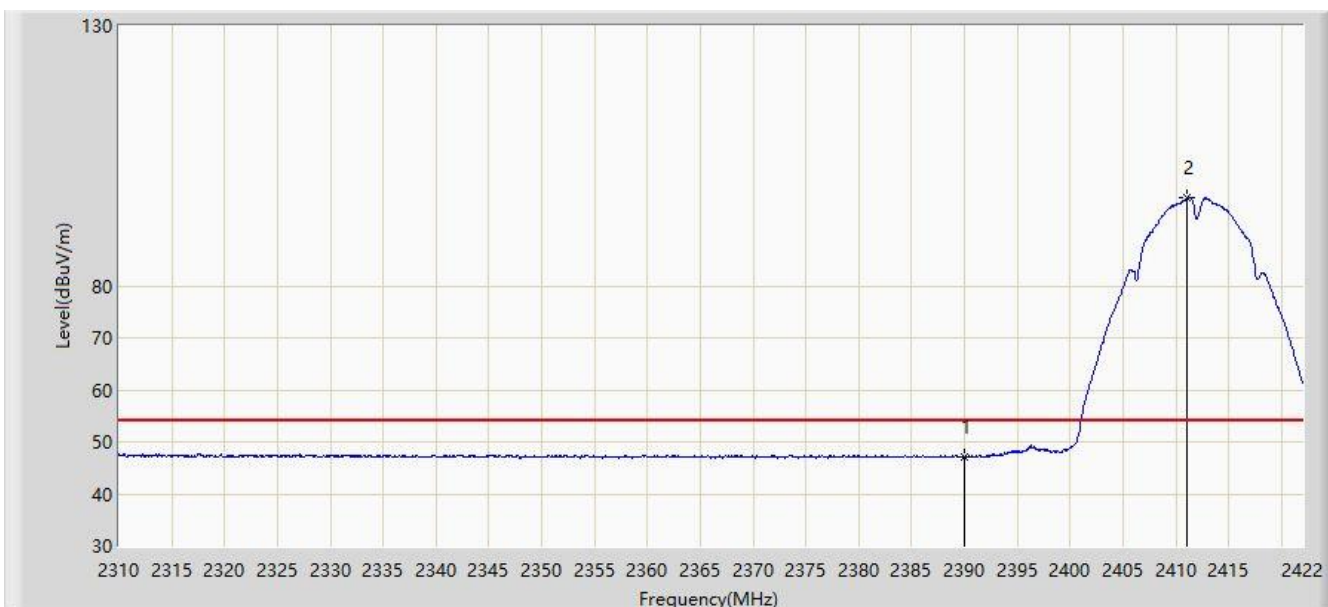


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 47.120                 | 14.707               | -6.880      | 54.000         | 32.413      | AV   |
| 2  | *    | 2411.080        | 96.991                 | 64.606               | N/A         | N/A            | 32.385      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:34 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |

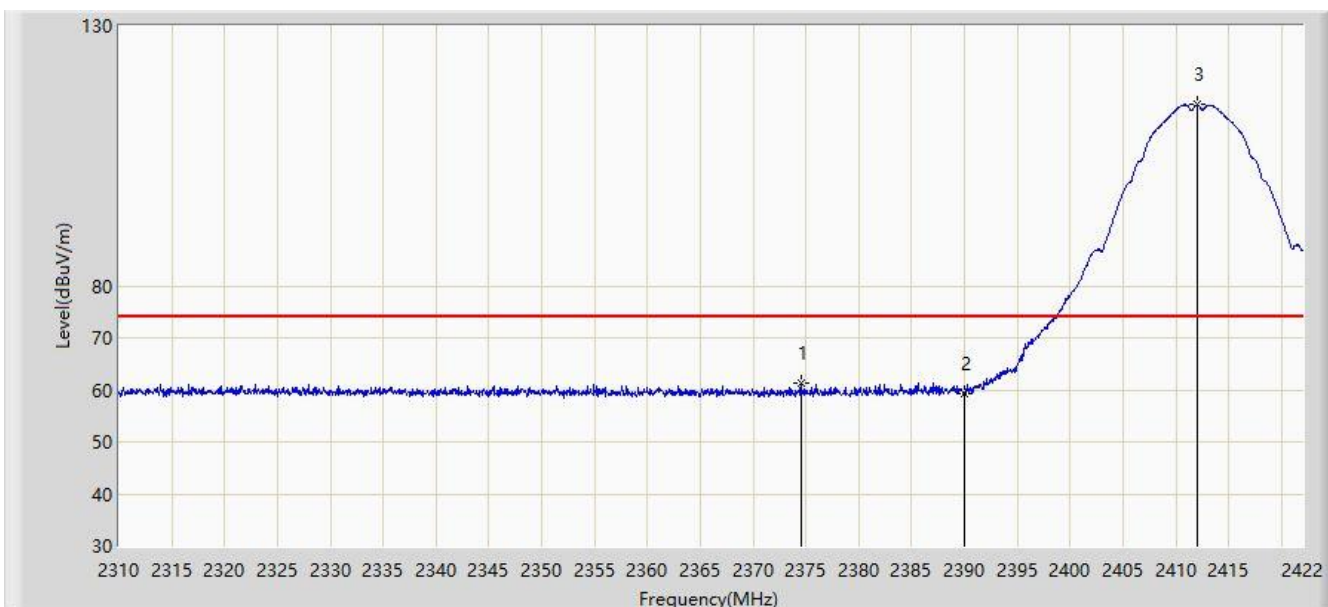


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2374.568        | 61.286                 | 28.844               | -12.714     | 74.000         | 32.442      | PK   |
| 2  |      | 2390.000        | 59.325                 | 26.912               | -14.675     | 74.000         | 32.413      | PK   |
| 3  | *    | 2412.032        | 114.807                | 82.423               | N/A         | N/A            | 32.384      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:37 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2412MHz |                          |

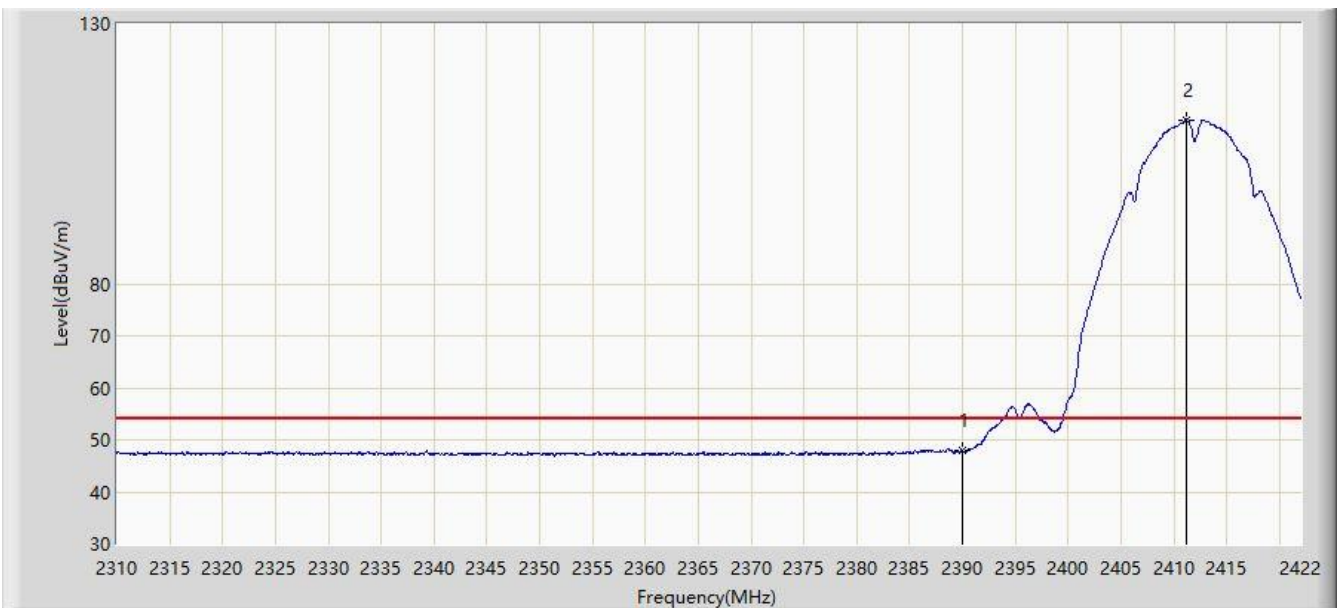


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 47.900                 | 15.487               | -6.100      | 54.000         | 32.413      | AV   |
| 2  | *    | 2411.136        | 111.555                | 79.170               | N/A         | N/A            | 32.385      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:38 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |

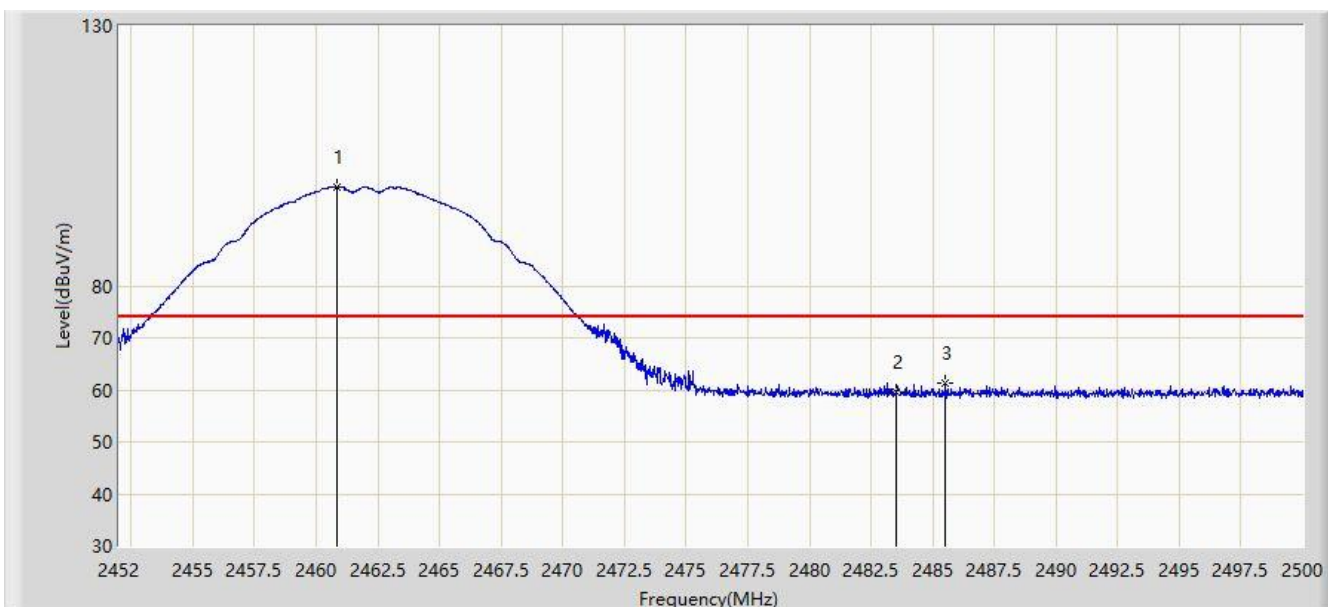


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2460.856        | 99.103                 | 66.739               | N/A         | N/A            | 32.364      | PK   |
| 2  |      | 2483.500        | 59.427                 | 27.012               | -14.573     | 74.000         | 32.416      | PK   |
| 3  |      | 2485.504        | 61.230                 | 28.811               | -12.770     | 74.000         | 32.419      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:40 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |

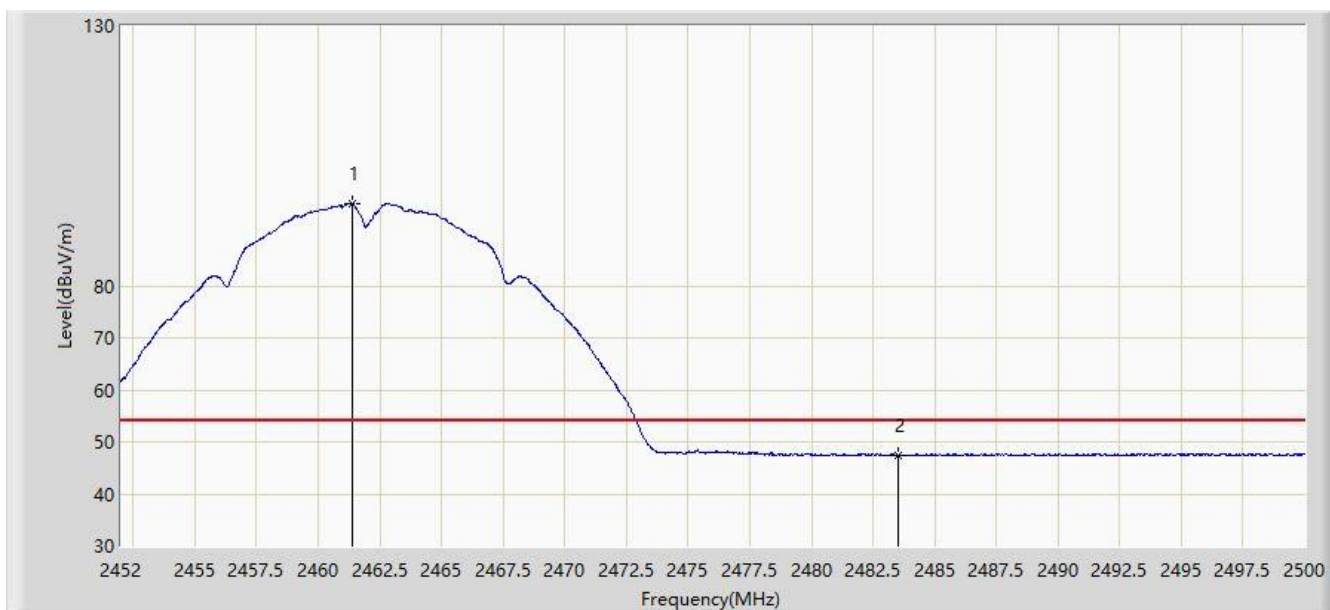


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2461.384        | 95.873                 | 63.508               | N/A         | N/A            | 32.365      | AV   |
| 2  |      | 2483.500        | 47.426                 | 15.011               | -6.574      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:41 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |

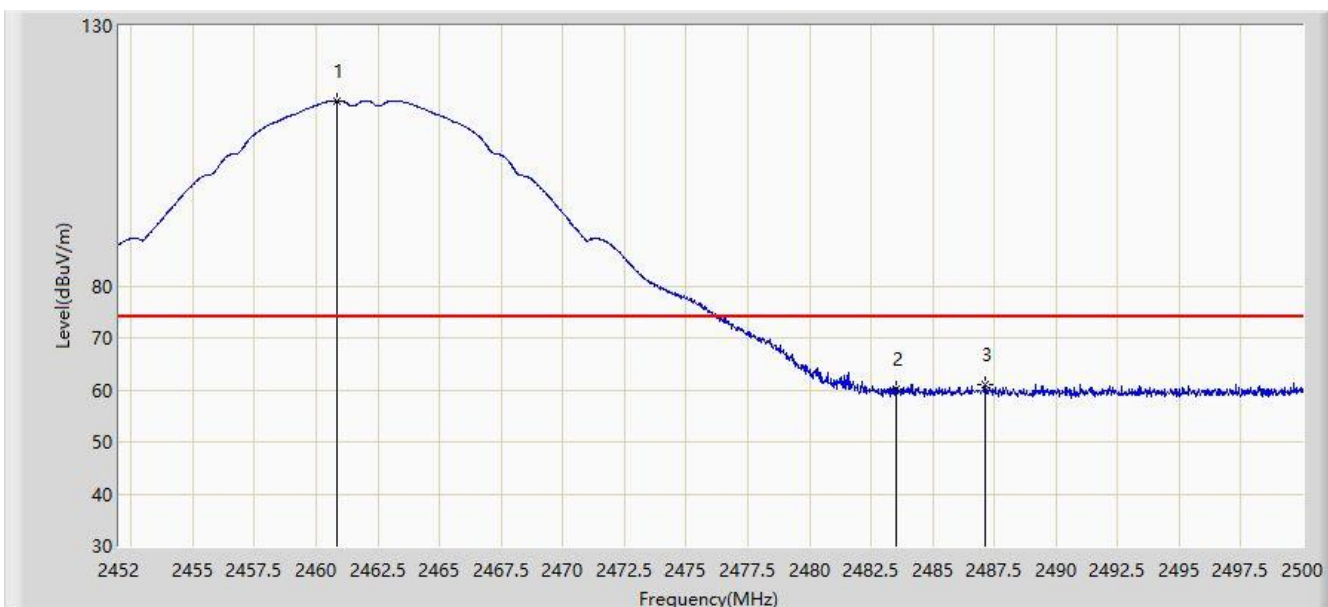

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2460.856        | 115.648                | 83.284               | N/A         | N/A            | 32.364      | PK   |
| 2  |      | 2483.500        | 60.160                 | 27.745               | -13.840     | 74.000         | 32.416      | PK   |
| 3  |      | 2487.112        | 60.910                 | 28.487               | -13.090     | 74.000         | 32.422      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:42 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11b at Channel 2462MHz |                          |




| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2461.312        | 112.514                | 80.149               | N/A         | N/A            | 32.365      | AV   |
| 2  |      | 2483.500        | 47.897                 | 15.482               | -6.103      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:54 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |

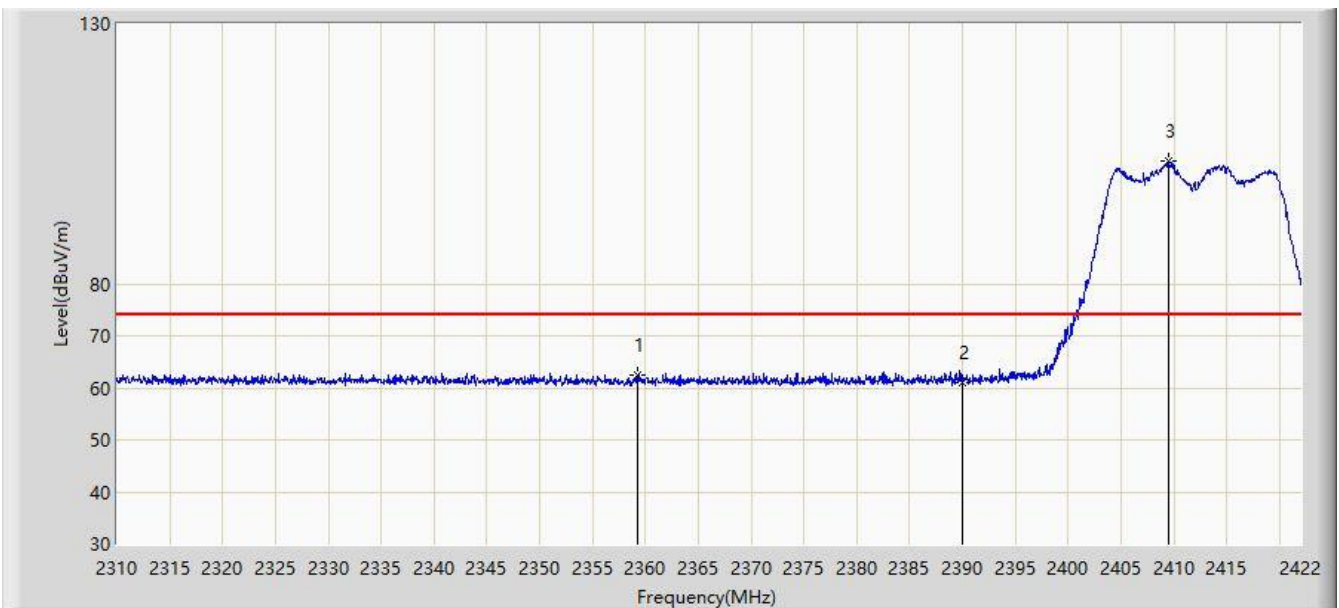


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2359.224        | 62.499                 | 30.022               | -11.501     | 74.000         | 32.477      | PK   |
| 2  |      | 2390.000        | 61.109                 | 28.696               | -12.891     | 74.000         | 32.413      | PK   |
| 3  | *    | 2409.512        | 103.569                | 71.182               | N/A         | N/A            | 32.387      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:56 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |

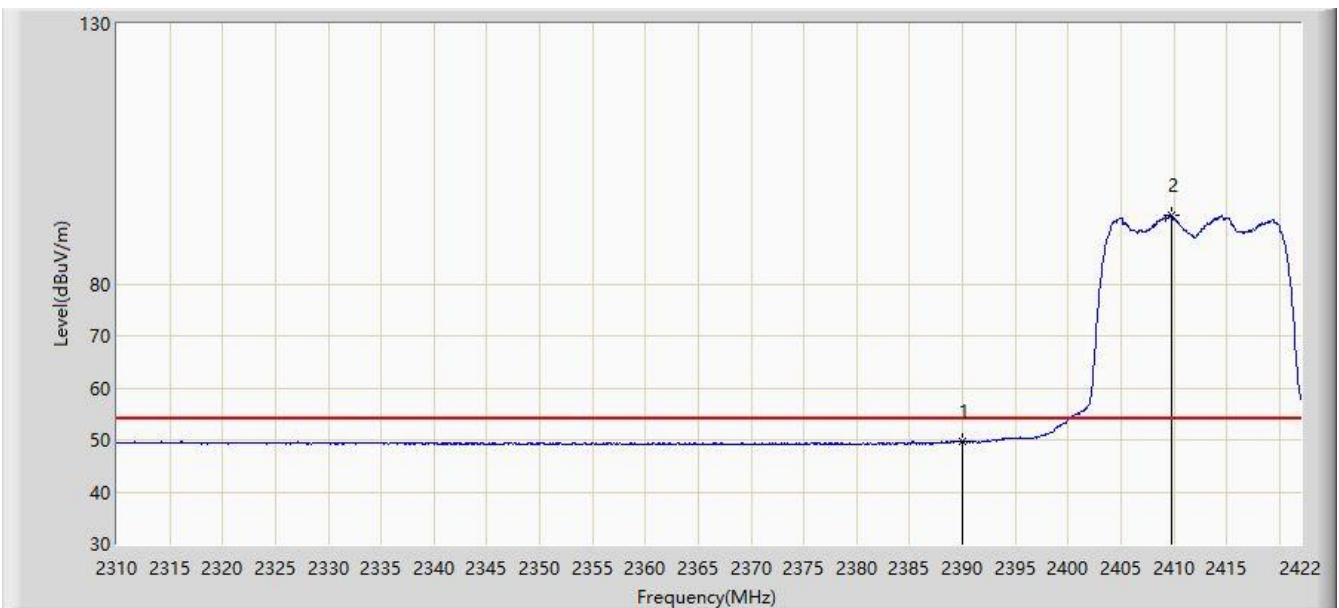

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 49.792                 | 17.379               | -4.208      | 54.000         | 32.413      | AV   |
| 2  | *    | 2409.792        | 93.240                 | 60.853               | N/A         | N/A            | 32.386      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:53 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |




| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2387.112        | 69.010                 | 36.592               | -4.990      | 74.000         | 32.418      | PK   |
| 2  |      | 2390.000        | 67.487                 | 35.074               | -6.513      | 74.000         | 32.413      | PK   |
| 3  | *    | 2417.296        | 115.084                | 82.706               | N/A         | N/A            | 32.378      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 02:49 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2412MHz |                          |

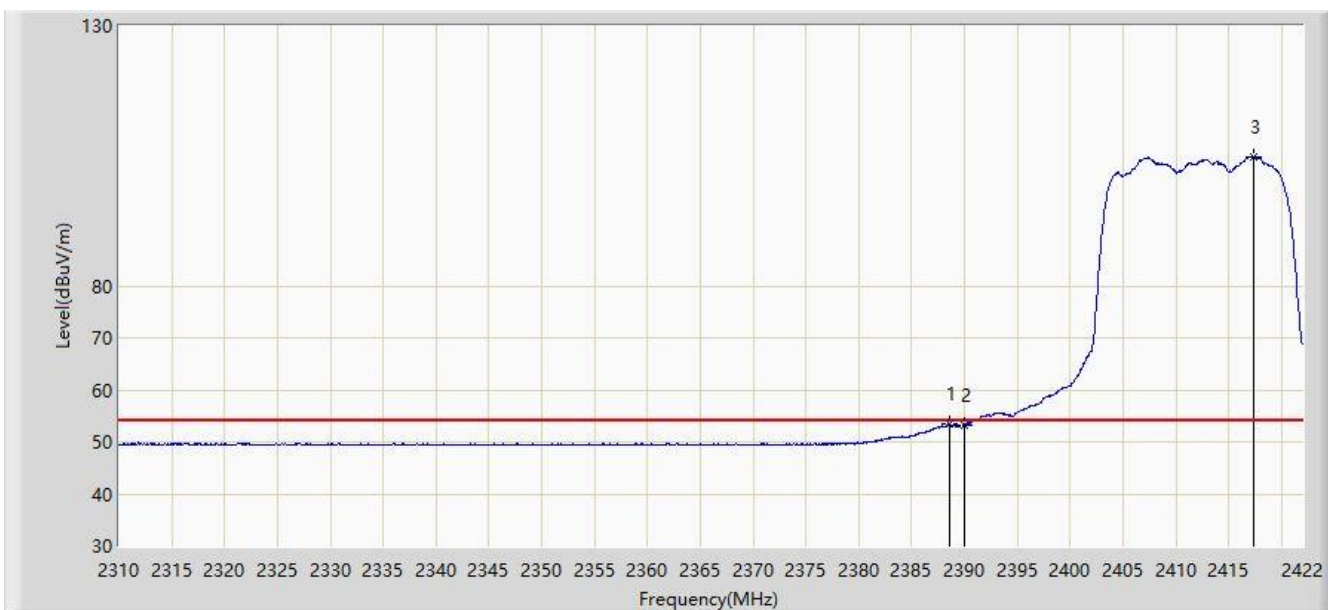


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2388.568        | 53.419                 | 21.004               | -0.581      | 54.000         | 32.416      | AV   |
| 2  |      | 2390.000        | 53.249                 | 20.836               | -0.751      | 54.000         | 32.413      | AV   |
| 3  | *    | 2417.408        | 104.797                | 72.419               | N/A         | N/A            | 32.378      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 03:07 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |

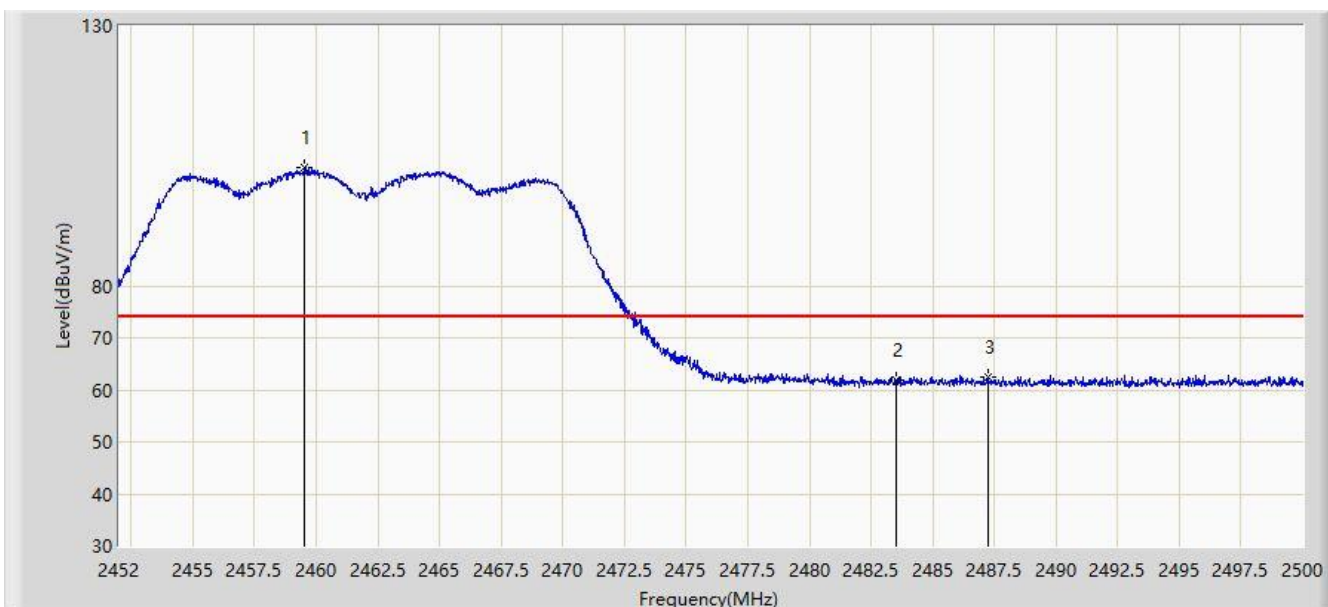


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2459.536        | 102.834                | 70.472               | N/A         | N/A            | 32.362      | PK   |
| 2  |      | 2483.500        | 61.936                 | 29.521               | -12.064     | 74.000         | 32.416      | PK   |
| 3  |      | 2487.256        | 62.570                 | 30.147               | -11.430     | 74.000         | 32.422      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 03:08 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Horizontal     |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |

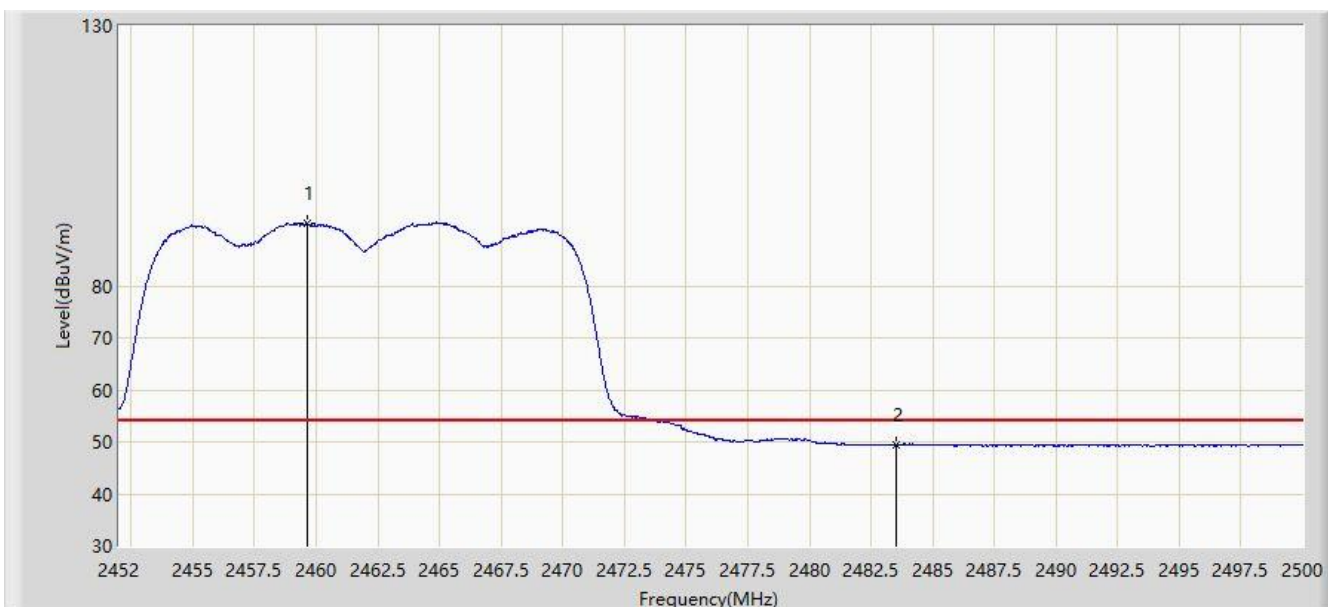


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2459.656        | 91.969                 | 59.607               | N/A         | N/A            | 32.362      | AV   |
| 2  |      | 2483.500        | 49.424                 | 17.009               | -4.576      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 03:05 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |

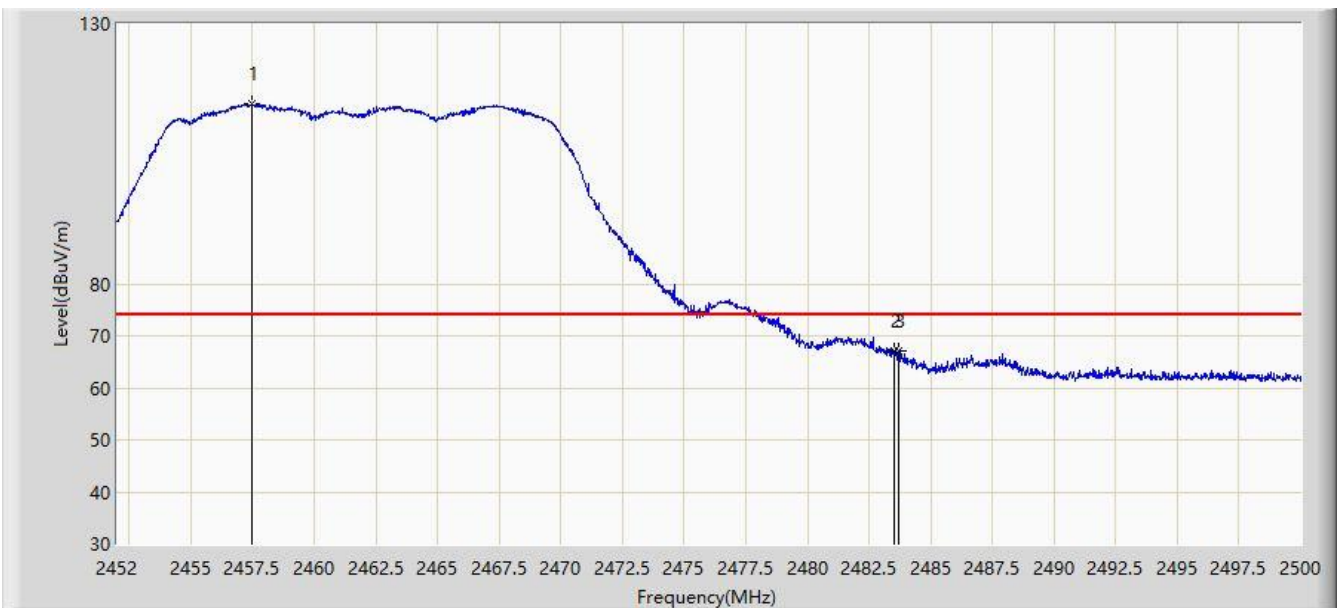


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2457.448        | 114.645                | 82.287               | N/A         | N/A            | 32.357      | PK   |
| 2  |      | 2483.500        | 66.976                 | 34.561               | -7.024      | 74.000         | 32.416      | PK   |
| 3  |      | 2483.728        | 67.238                 | 34.822               | -6.762      | 74.000         | 32.416      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Site: AC1                                         | Time: 2019/10/18 - 03:03 |
| Limit: FCC_Part15.209(3m)                         | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                          | Polarity: Vertical       |
| EUT: HAN Access Point                             | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11g at Channel 2462MHz |                          |

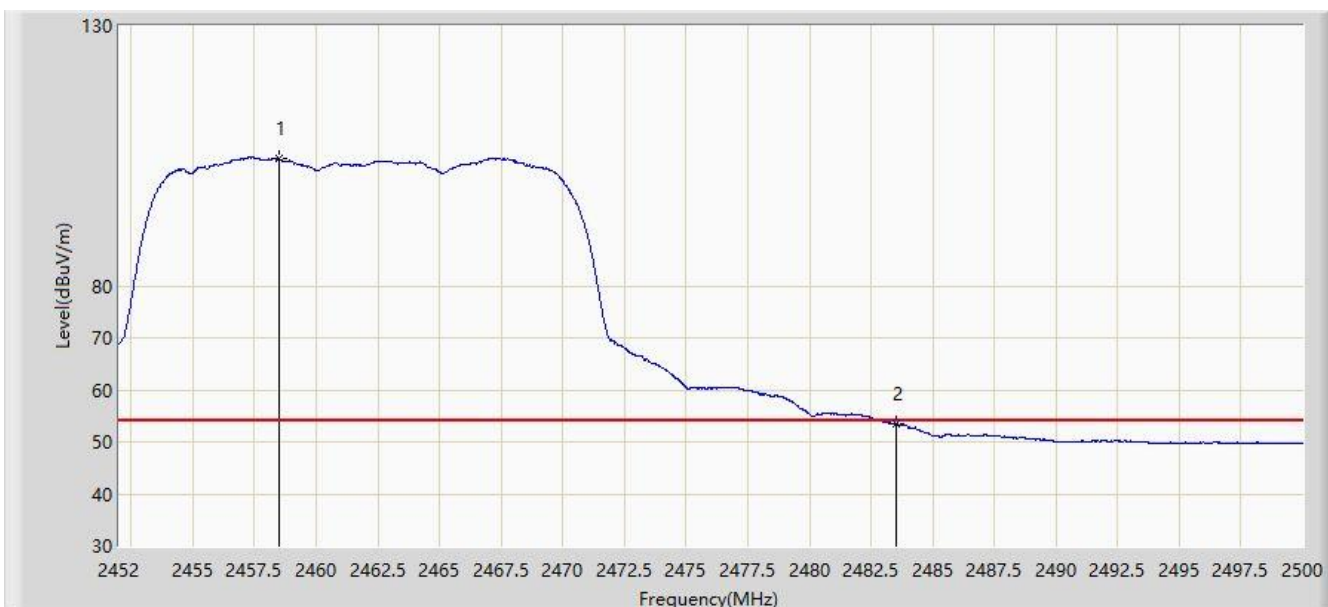


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2458.480        | 104.381                | 72.021               | N/A         | N/A            | 32.359      | AV   |
| 2  |      | 2483.500        | 53.469                 | 21.054               | -0.531      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:18 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

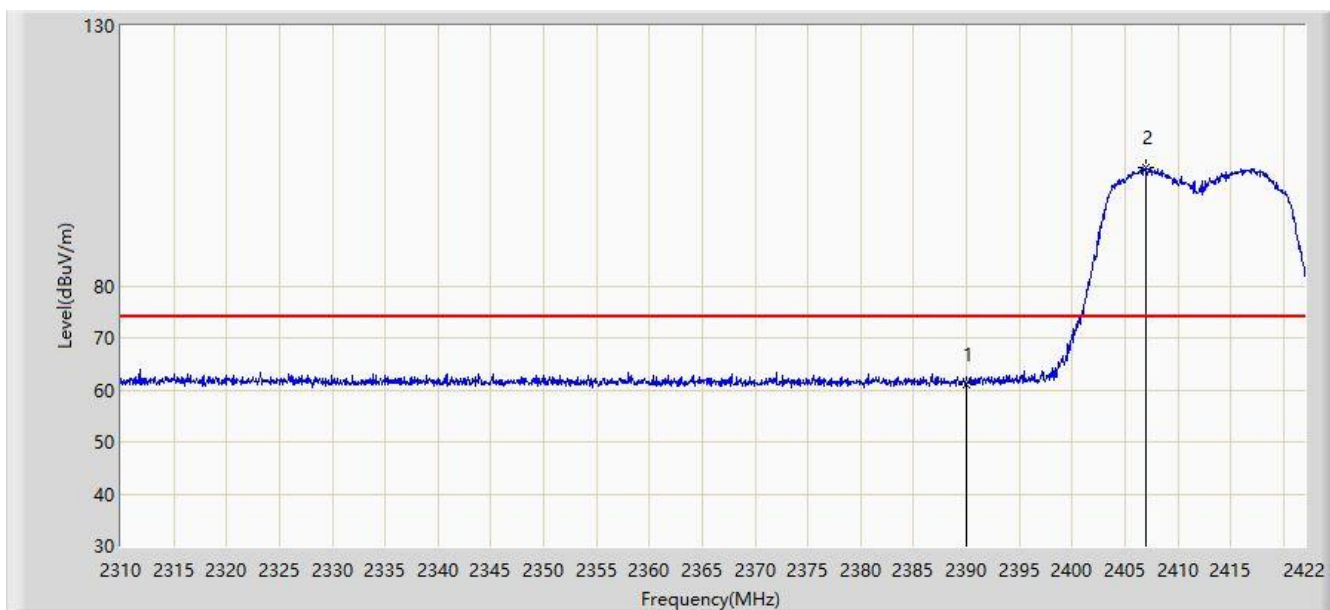


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 61.157                 | 28.744               | -12.843     | 74.000         | 32.413      | PK   |
| 2  | *    | 2406.936        | 102.847                | 70.457               | N/A         | N/A            | 32.390      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:22 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

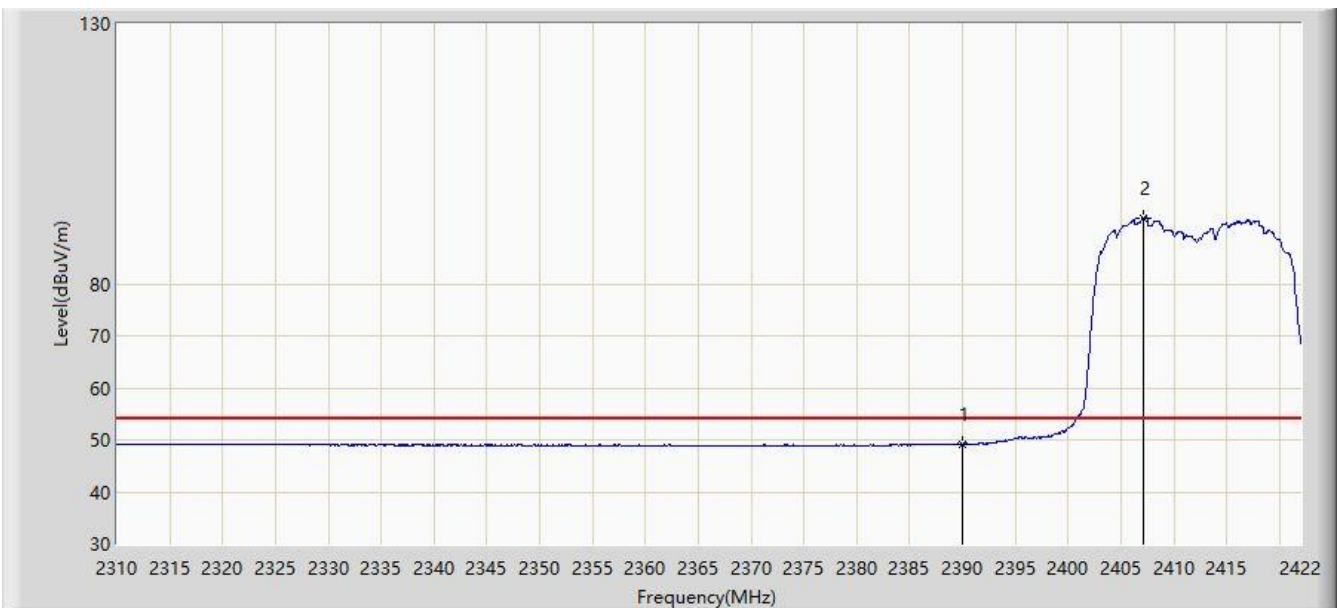


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 49.136                 | 16.723               | -4.864      | 54.000         | 32.413      | AV   |
| 2  | *    | 2407.104        | 92.643                 | 60.253               | N/A         | N/A            | 32.390      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:16 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

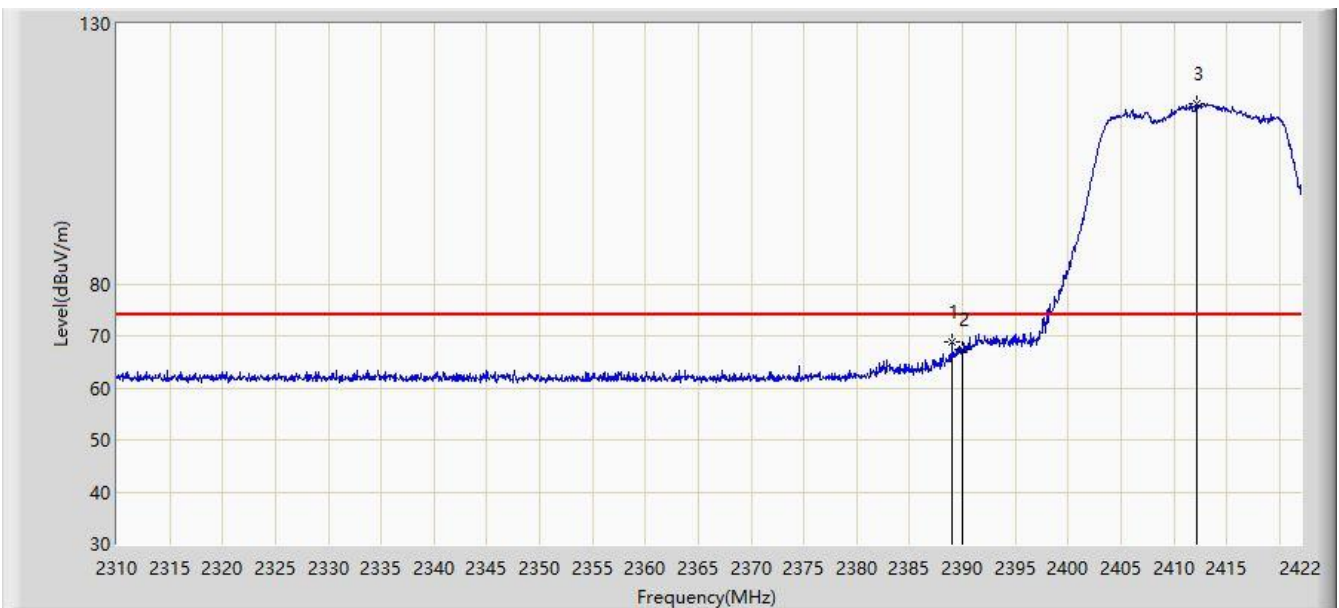


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2389.016        | 68.715                 | 36.300               | -5.285      | 74.000         | 32.414      | PK   |
| 2  |      | 2390.000        | 67.278                 | 34.865               | -6.722      | 74.000         | 32.413      | PK   |
| 3  | *    | 2412.144        | 114.637                | 82.253               | N/A         | N/A            | 32.384      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:15 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2412MHz |                          |

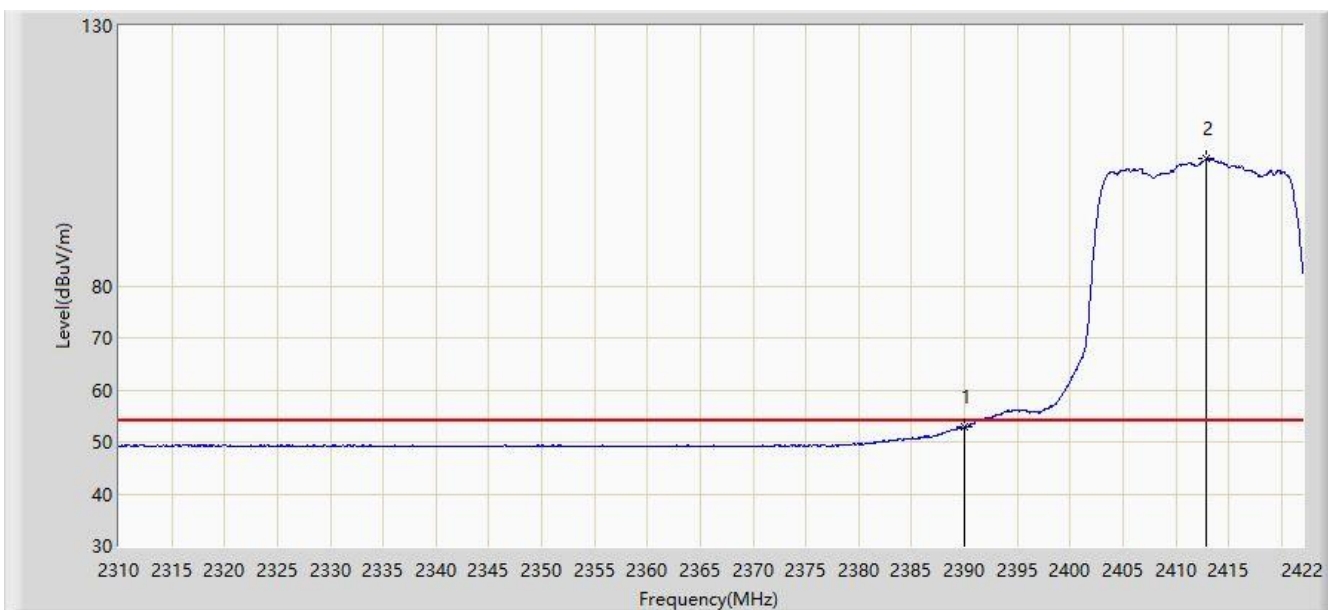


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 52.829                 | 20.416               | -1.171      | 54.000         | 32.413      | AV   |
| 2  | *    | 2412.928        | 104.407                | 72.024               | N/A         | N/A            | 32.383      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:47 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

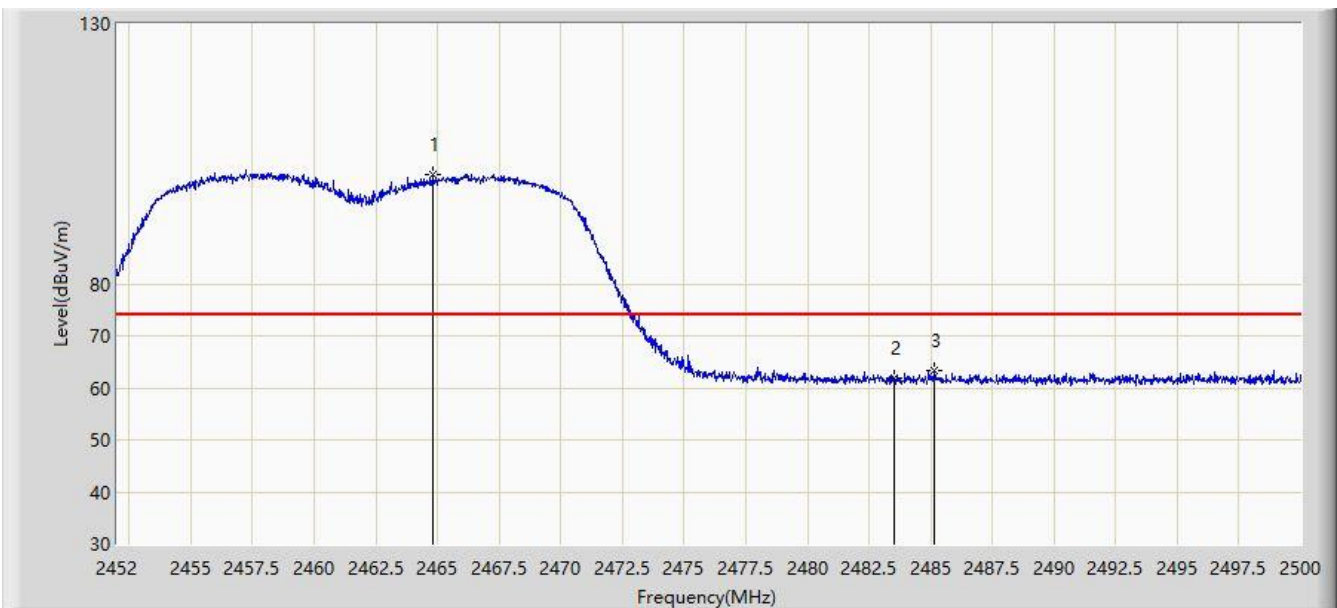


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2464.840        | 100.981                | 68.609               | N/A         | N/A            | 32.372      | PK   |
| 2  |      | 2483.500        | 61.840                 | 29.425               | -12.160     | 74.000         | 32.416      | PK   |
| 3  |      | 2485.144        | 63.318                 | 30.899               | -10.682     | 74.000         | 32.419      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:48 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

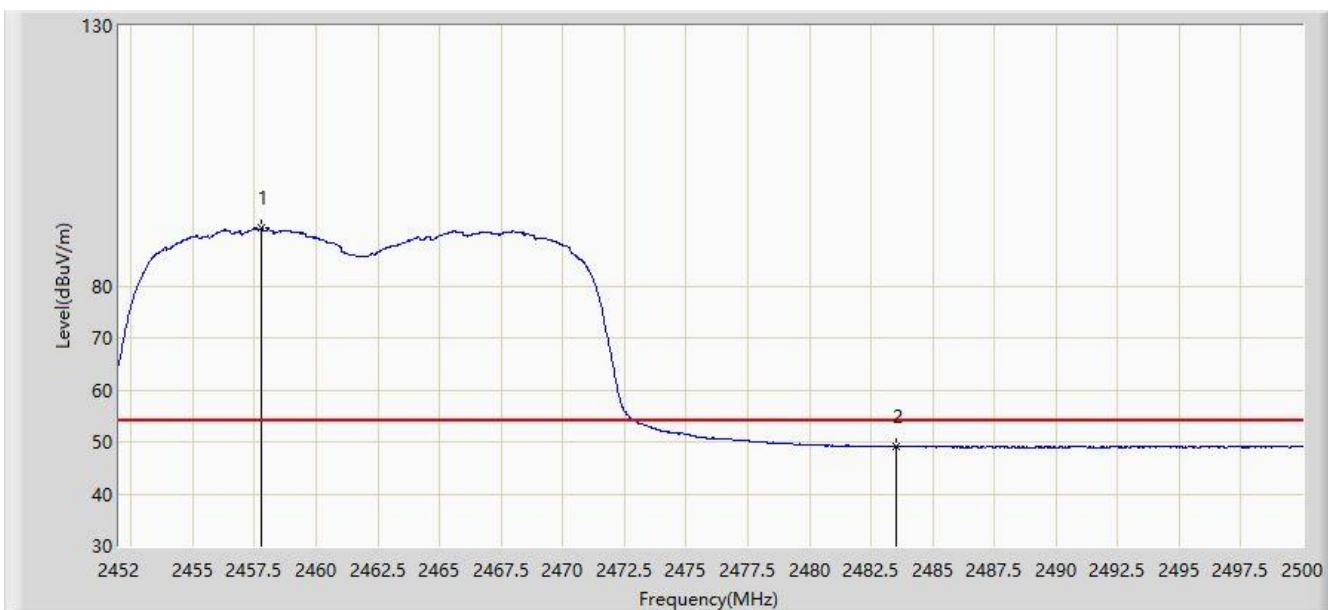


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2457.760        | 91.037                 | 58.679               | N/A         | N/A            | 32.359      | AV   |
| 2  |      | 2483.500        | 49.177                 | 16.762               | -4.823      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:45 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

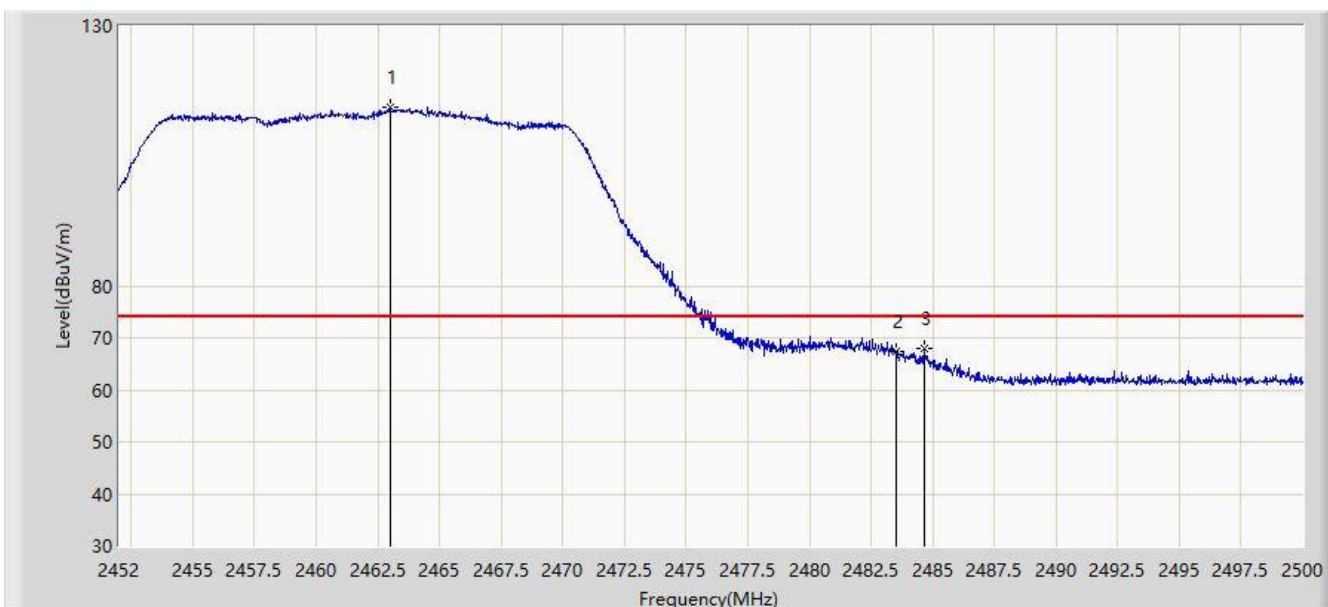


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2462.992        | 114.354                | 81.986               | N/A         | N/A            | 32.368      | PK   |
| 2  |      | 2483.500        | 67.369                 | 34.954               | -6.631      | 74.000         | 32.416      | PK   |
| 3  |      | 2484.640        | 67.839                 | 35.421               | -6.161      | 74.000         | 32.418      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:30 |
| Limit: FCC_Part15.209(3m)                              | Margin: 0                |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT20 at Channel 2462MHz |                          |

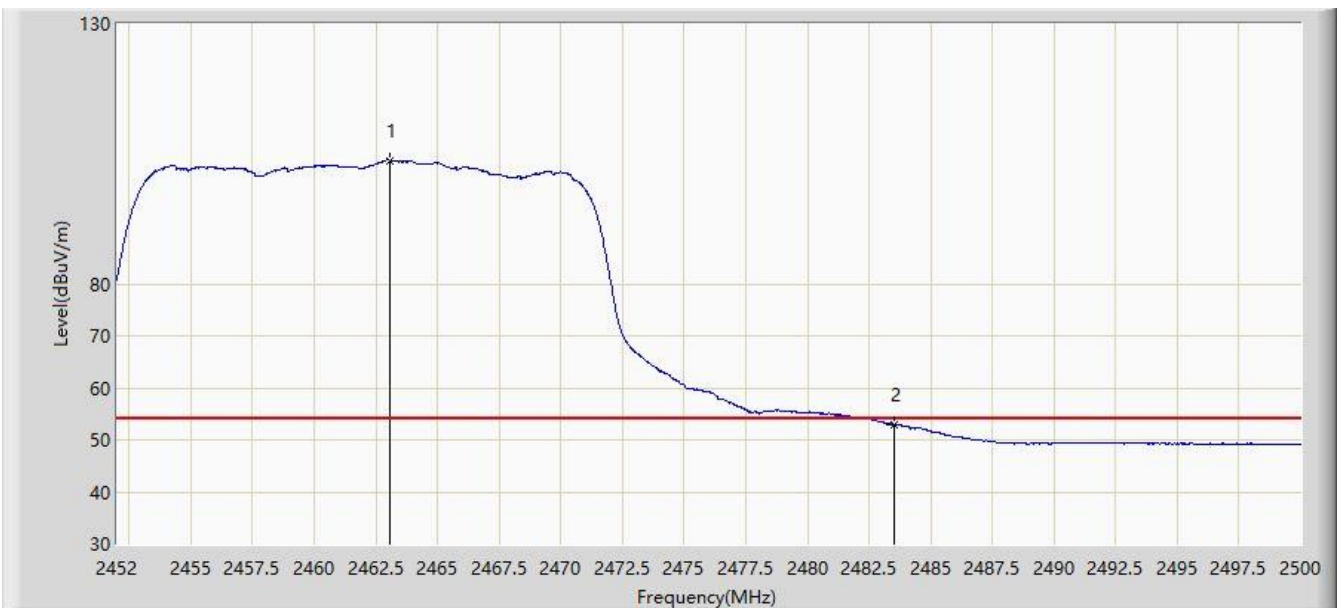


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2463.064        | 103.648                | 71.280               | N/A         | N/A            | 32.368      | AV   |
| 2  |      | 2483.500        | 53.004                 | 20.589               | -0.996      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 04:01 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz |                          |

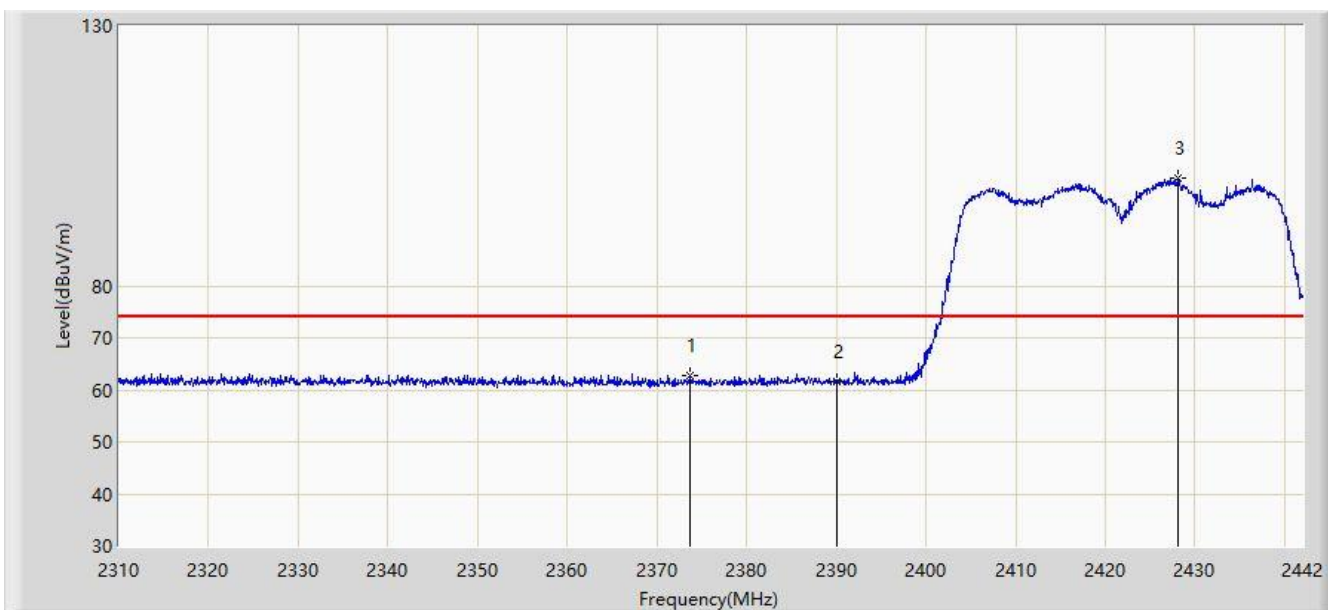


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2373.756        | 62.868                 | 30.424               | -11.132     | 74.000         | 32.444      | PK   |
| 2  |      | 2390.000        | 61.639                 | 29.226               | -12.361     | 74.000         | 32.413      | PK   |
| 3  | *    | 2428.074        | 100.858                | 68.492               | N/A         | N/A            | 32.366      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 04:02 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz |                          |

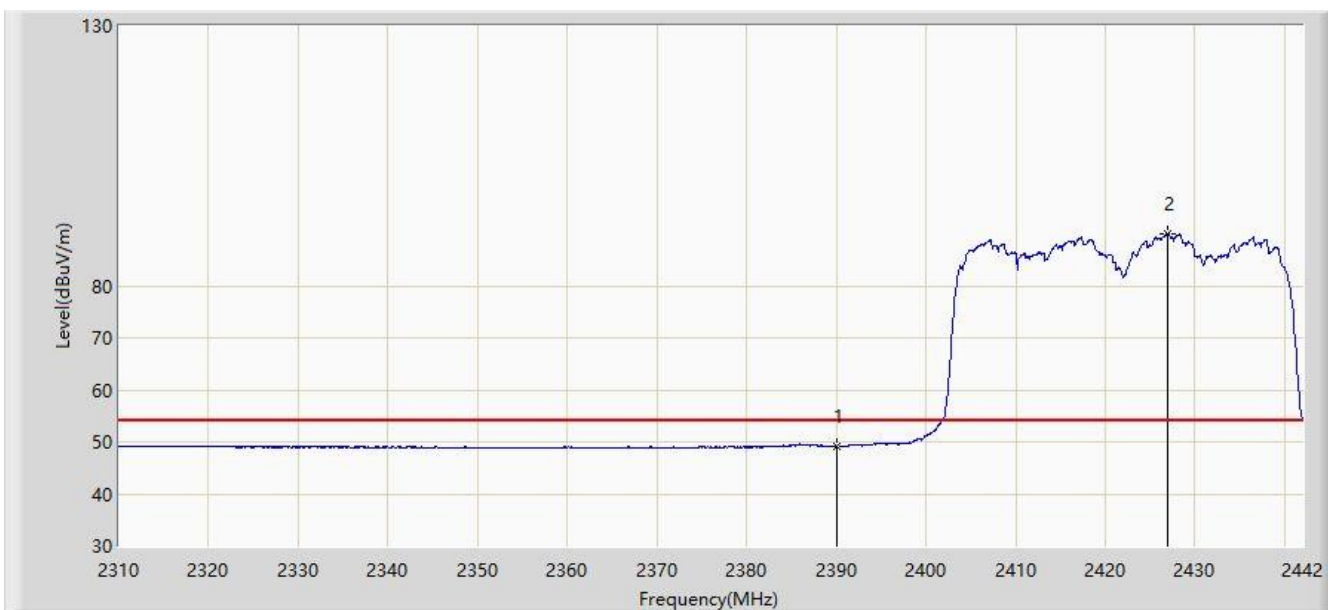


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 49.106                 | 16.693               | -4.894      | 54.000         | 32.413      | AV   |
| 2  | *    | 2427.018        | 90.142                 | 57.775               | N/A         | N/A            | 32.367      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:59 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz |                          |

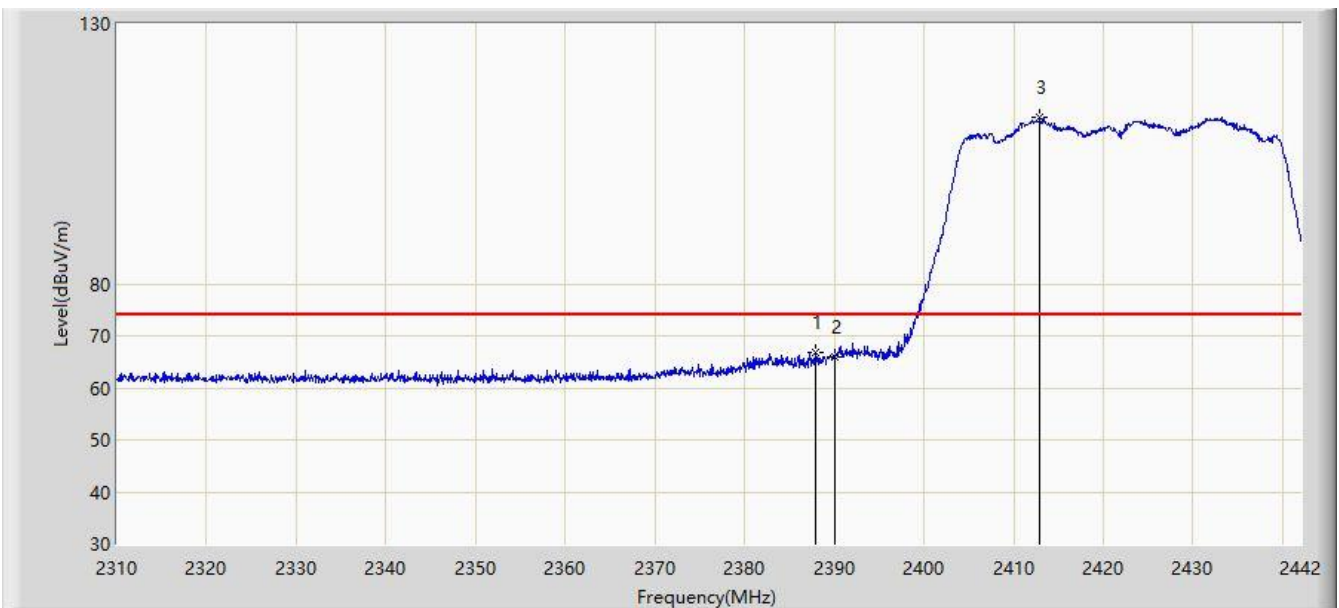


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2387.880        | 66.857                 | 34.440               | -7.143      | 74.000         | 32.416      | PK   |
| 2  |      | 2390.000        | 65.903                 | 33.490               | -8.097      | 74.000         | 32.413      | PK   |
| 3  | *    | 2412.894        | 111.894                | 79.511               | N/A         | N/A            | 32.383      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 03:58 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2422MHz |                          |

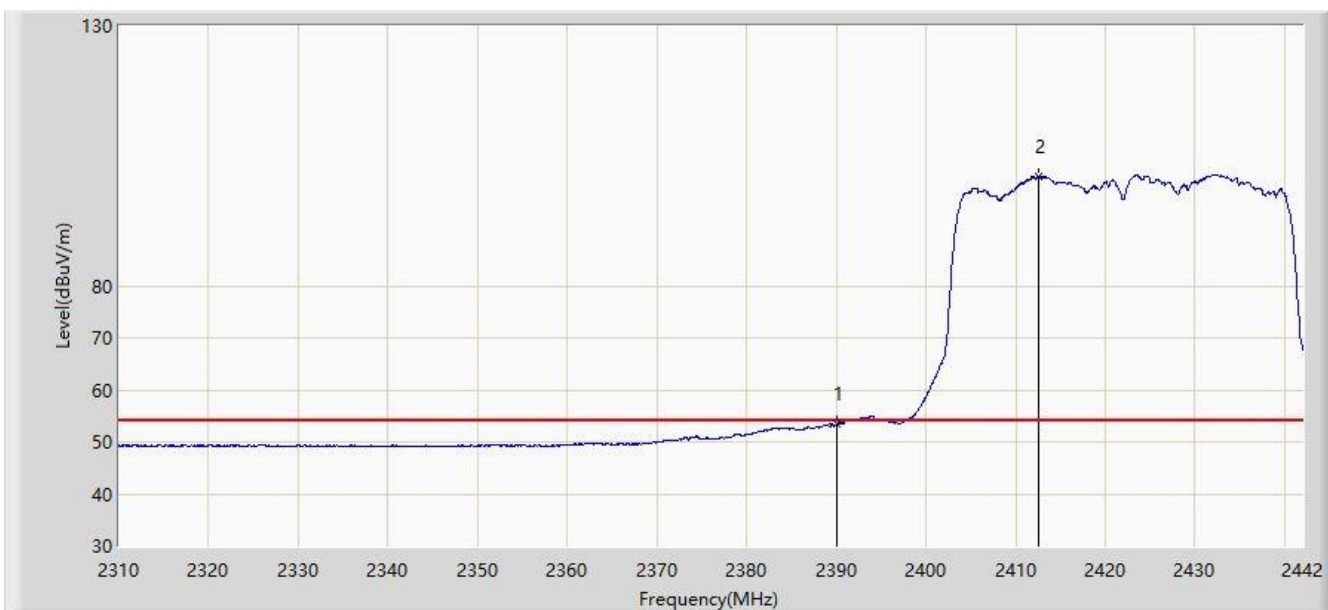


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 53.371                 | 20.958               | -0.629      | 54.000         | 32.413      | AV   |
| 2  | *    | 2412.564        | 100.965                | 68.581               | N/A         | N/A            | 32.384      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 04:55 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz |                          |

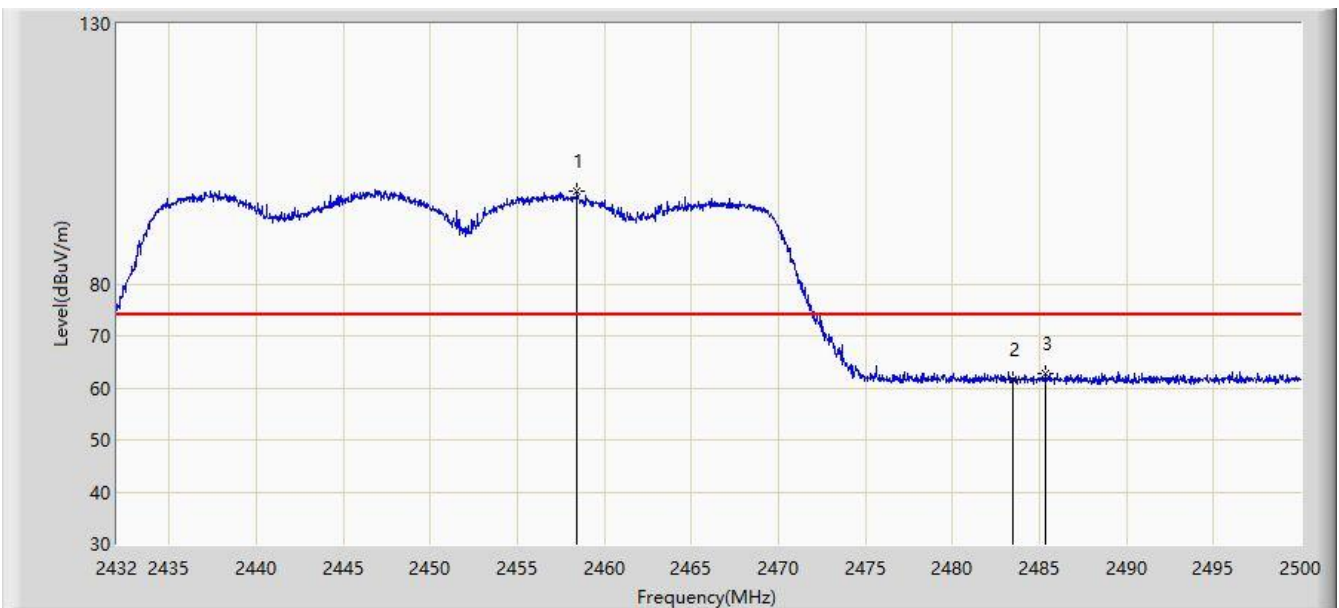


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2458.452        | 97.873                 | 65.513               | N/A         | N/A            | 32.359      | PK   |
| 2  |      | 2483.500        | 61.589                 | 29.174               | -12.411     | 74.000         | 32.416      | PK   |
| 3  |      | 2485.312        | 62.796                 | 30.377               | -11.204     | 74.000         | 32.419      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 04:56 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Horizontal     |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz |                          |

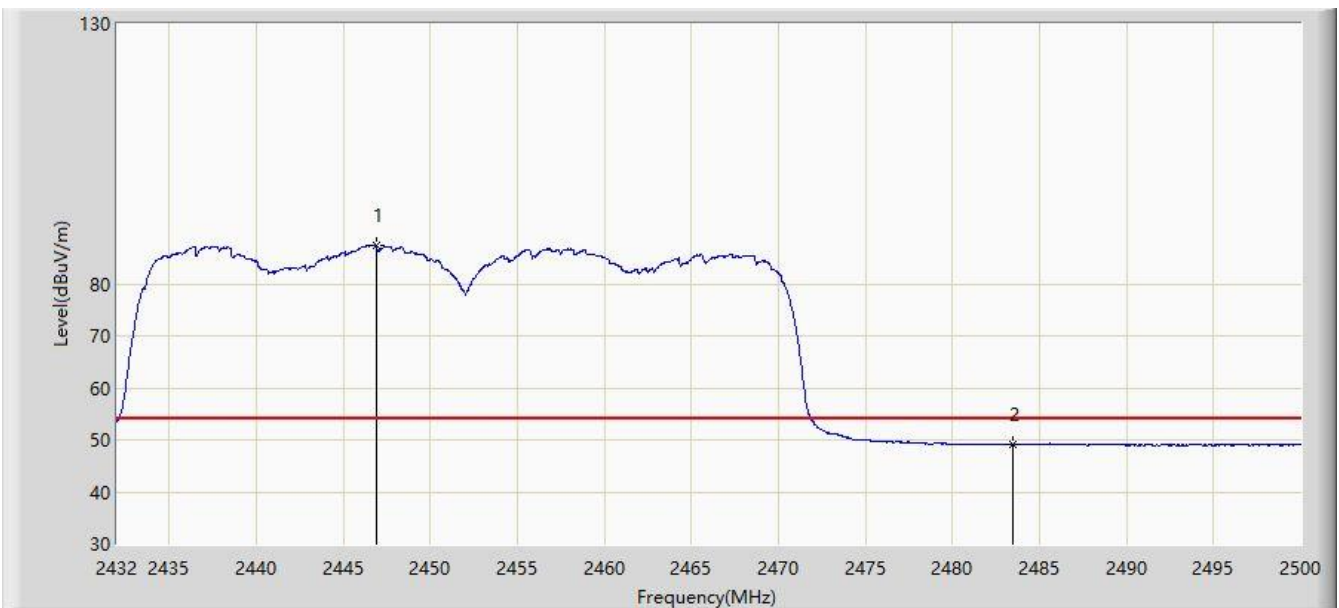


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2446.926        | 87.304                 | 54.966               | N/A         | N/A            | 32.338      | AV   |
| 2  |      | 2483.500        | 49.115                 | 16.700               | -4.885      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 04:54 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz |                          |

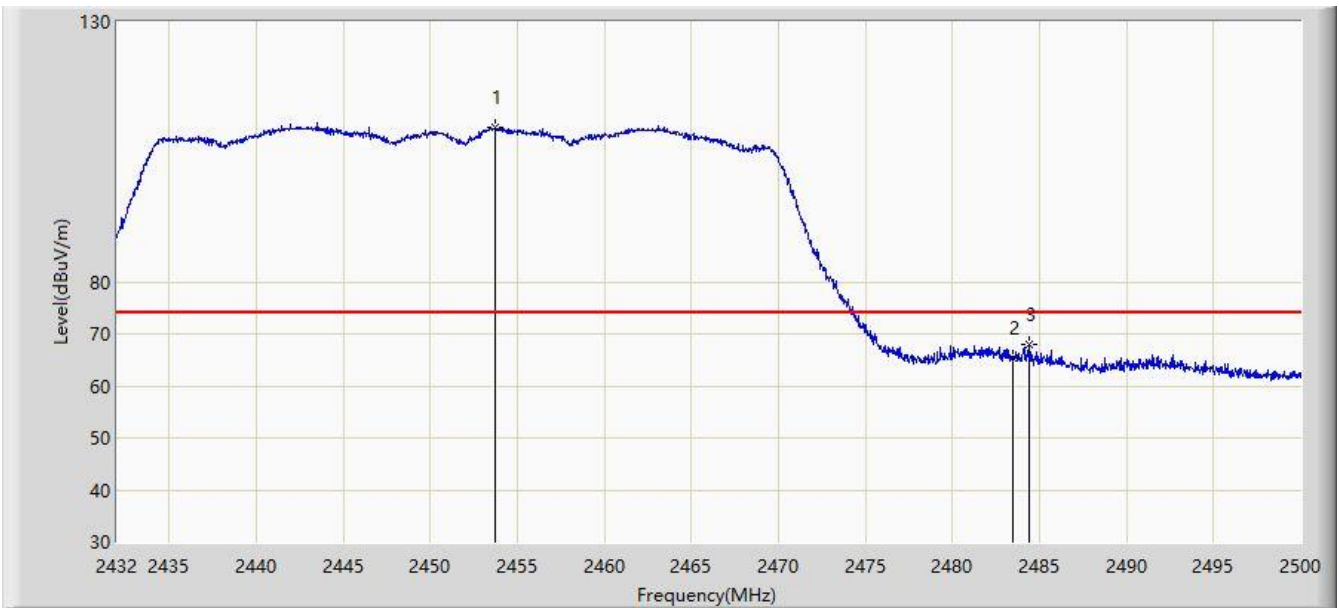


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2453.726        | 109.723                | 77.372               | N/A         | N/A            | 32.351      | PK   |
| 2  |      | 2483.500        | 65.495                 | 33.080               | -8.505      | 74.000         | 32.416      | PK   |
| 3  |      | 2484.394        | 67.936                 | 35.519               | -6.064      | 74.000         | 32.417      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                        |                          |
|--------------------------------------------------------|--------------------------|
| Site: AC1                                              | Time: 2019/10/18 - 04:52 |
| Limit: FCC_Part15.209(3m)                              | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                               | Polarity: Vertical       |
| EUT: HAN Access Point                                  | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11n-HT40 at Channel 2452MHz |                          |

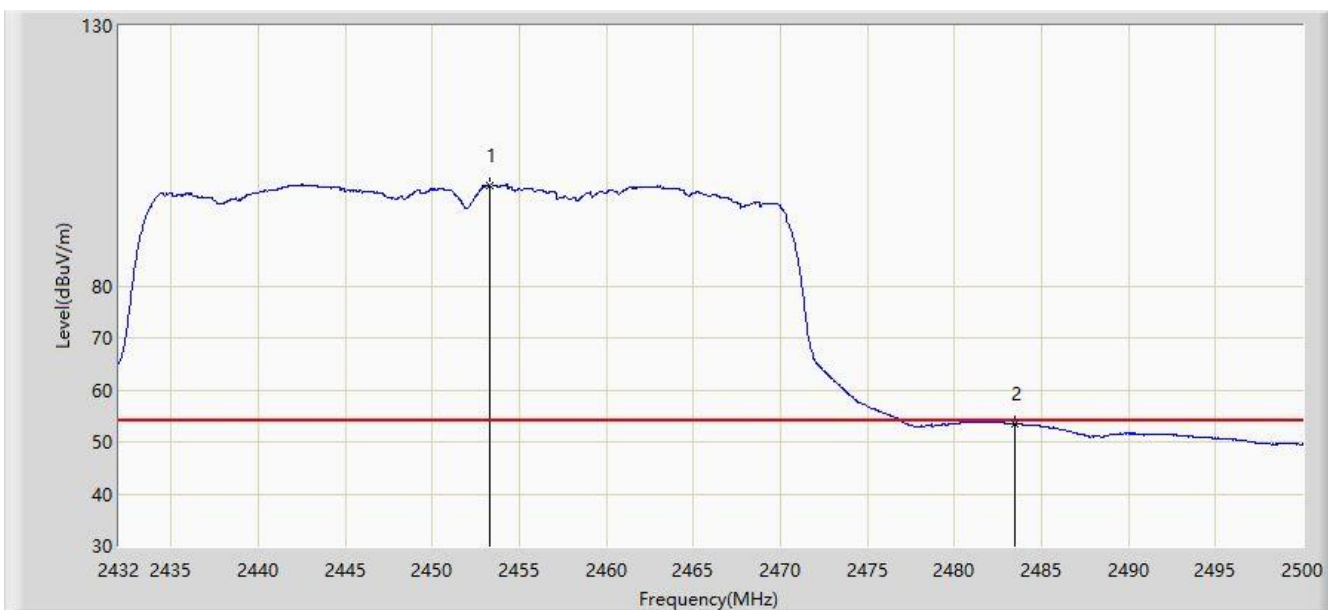


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2453.318        | 99.414                 | 67.064               | N/A         | N/A            | 32.350      | AV   |
| 2  |      | 2483.500        | 53.454                 | 21.039               | -0.546      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:05 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz |                          |

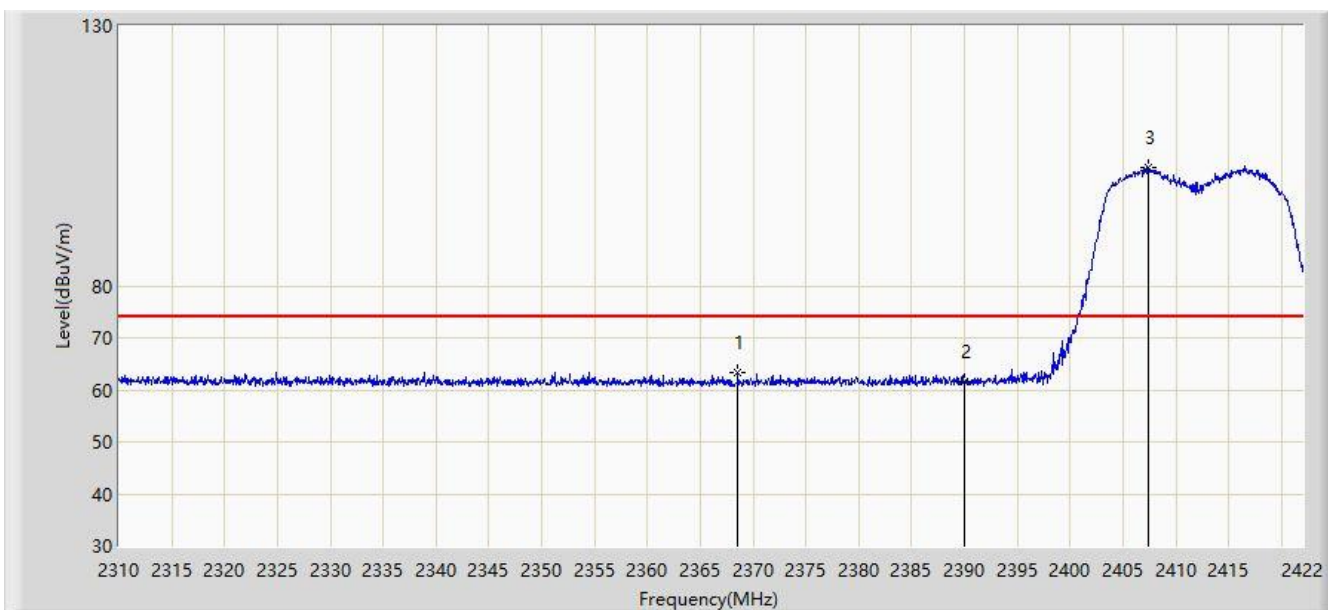


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2368.576        | 63.460                 | 31.004               | -10.540     | 74.000         | 32.455      | PK   |
| 2  |      | 2390.000        | 61.645                 | 29.232               | -12.355     | 74.000         | 32.413      | PK   |
| 3  | *    | 2407.440        | 102.671                | 70.282               | N/A         | N/A            | 32.389      | PK   |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:06 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz |                          |

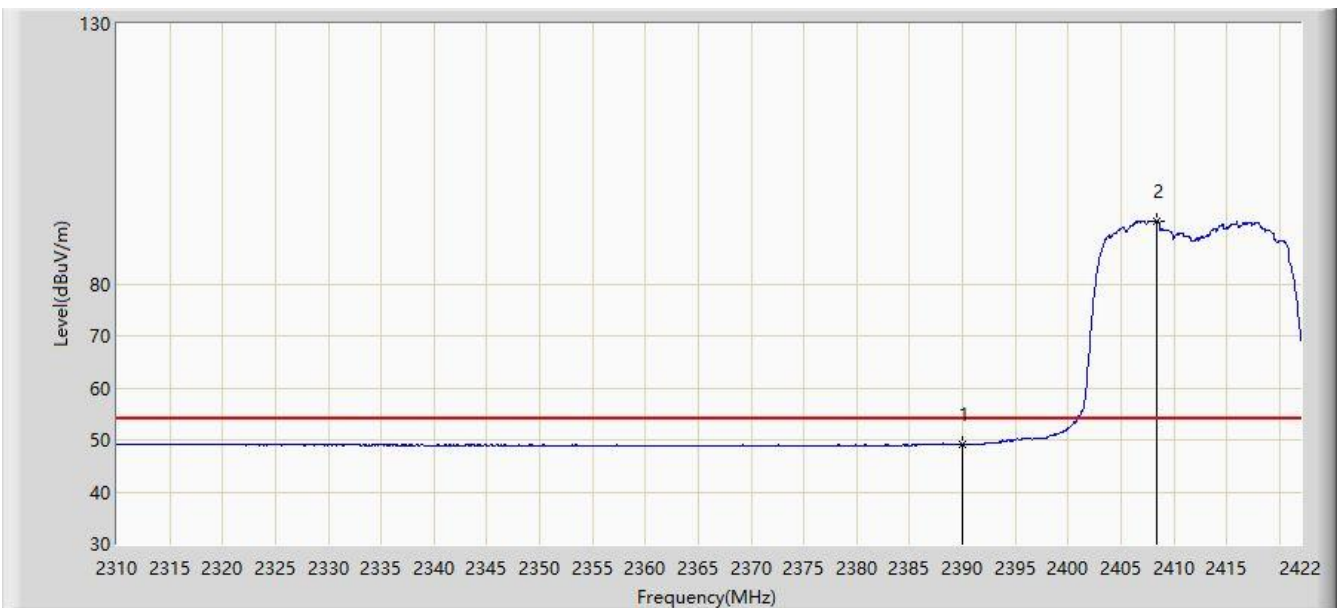


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 49.114                 | 16.701               | -4.886      | 54.000         | 32.413      | AV   |
| 2  | *    | 2408.336        | 92.096                 | 59.708               | N/A         | N/A            | 32.389      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:03 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz |                          |

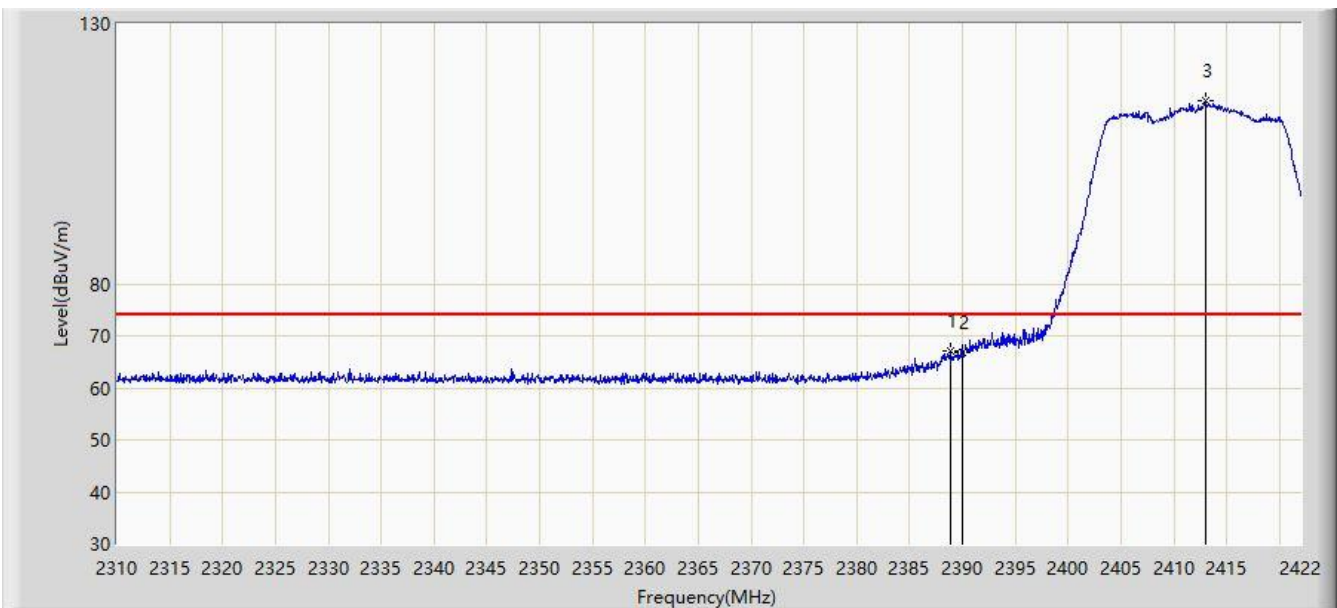


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2388.848        | 67.181                 | 34.766               | -6.819      | 74.000         | 32.415      | PK   |
| 2  |      | 2390.000        | 66.842                 | 34.429               | -7.158      | 74.000         | 32.413      | PK   |
| 3  | *    | 2412.984        | 115.299                | 82.916               | N/A         | N/A            | 32.383      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:01 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2412MHz |                          |

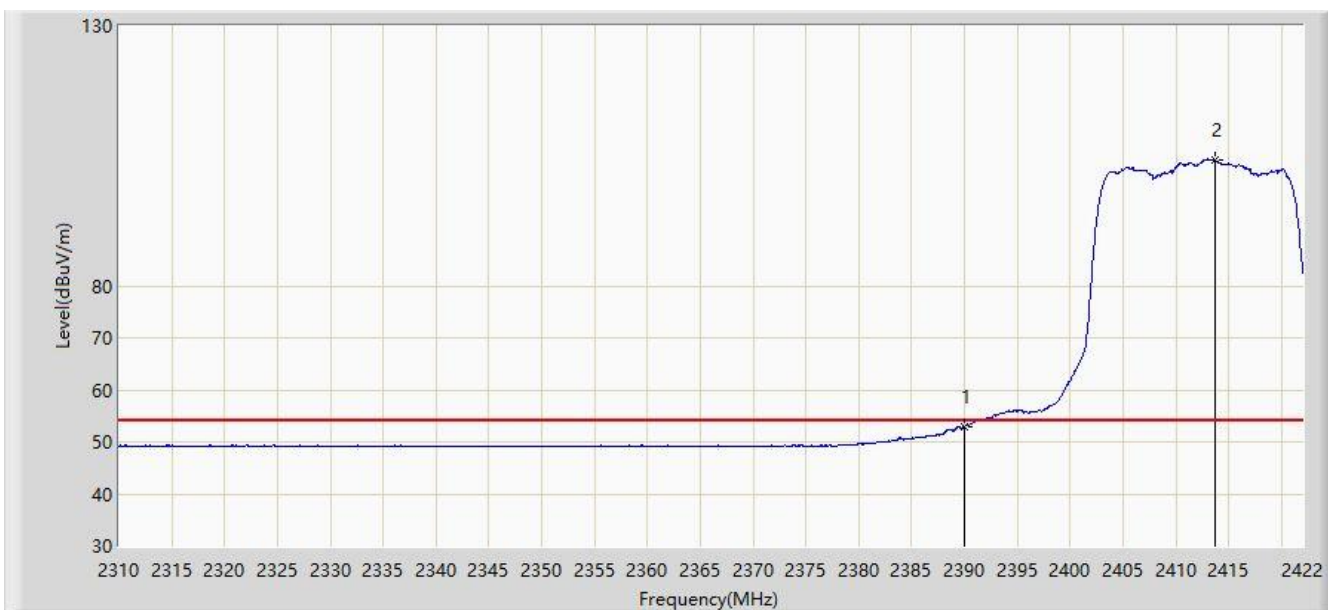


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 53.005                 | 20.592               | -0.995      | 54.000         | 32.413      | AV   |
| 2  | *    | 2413.768        | 104.089                | 71.707               | N/A         | N/A            | 32.382      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:13 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz |                          |

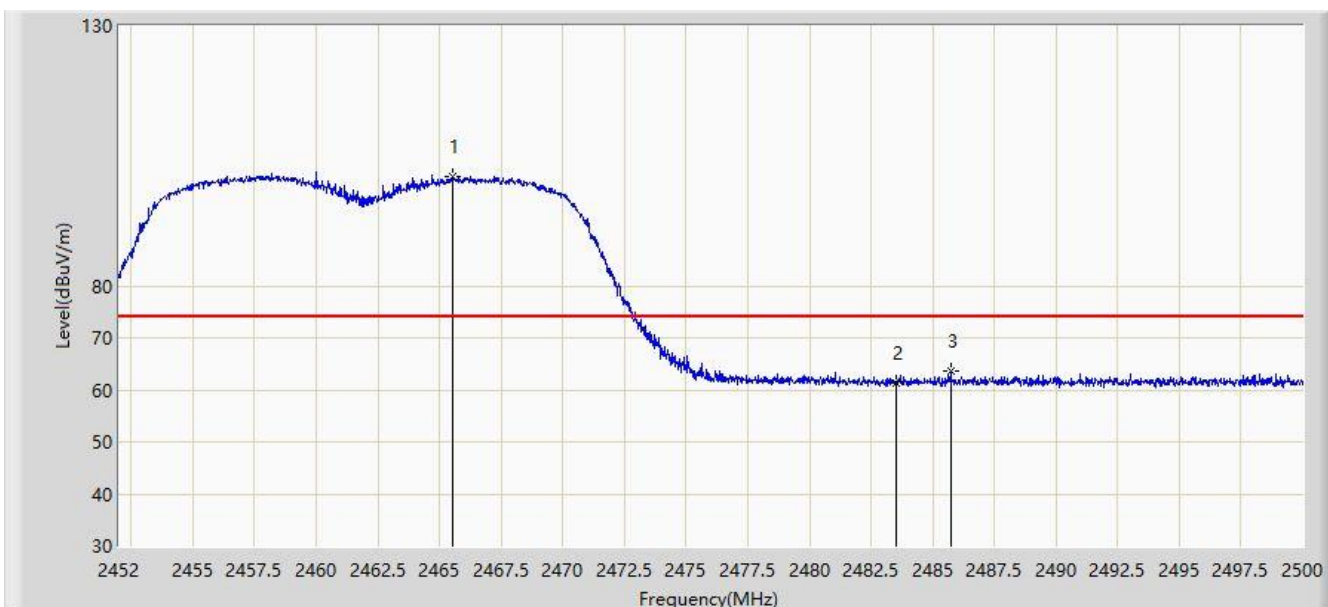


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2465.512        | 101.019                | 68.646               | N/A         | N/A            | 32.373      | PK   |
| 2  |      | 2483.500        | 61.271                 | 28.856               | -12.729     | 74.000         | 32.416      | PK   |
| 3  |      | 2485.720        | 63.564                 | 31.144               | -10.436     | 74.000         | 32.420      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:18 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

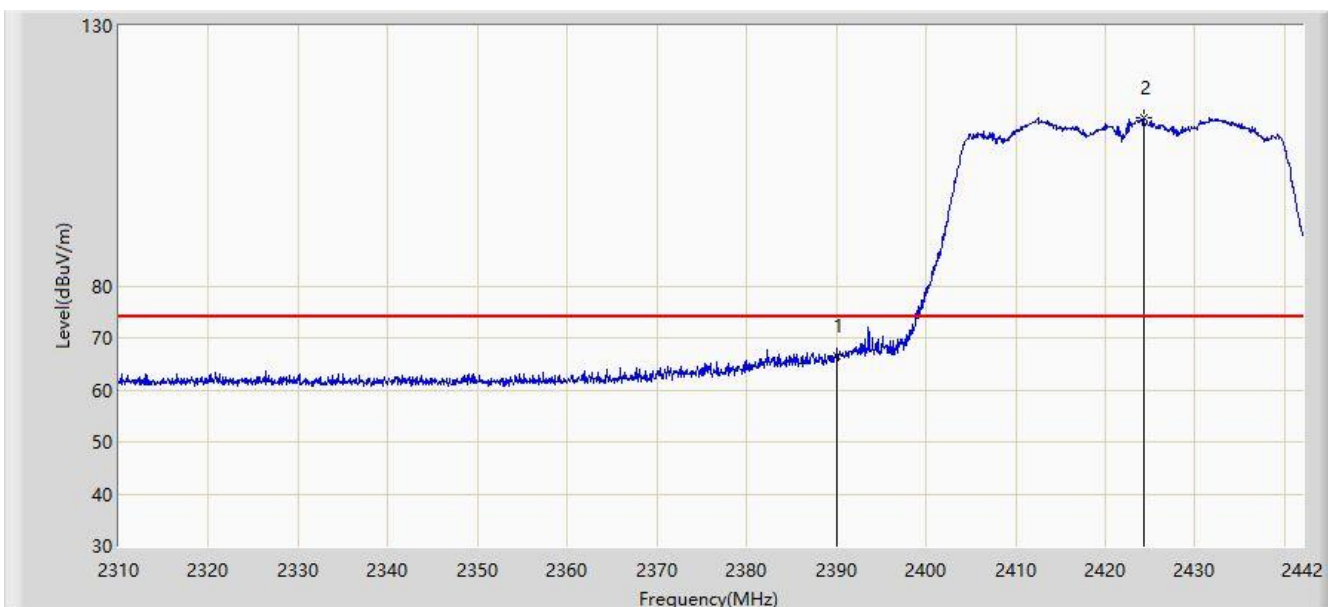


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 66.484                 | 34.071               | -7.516      | 74.000         | 32.413      | PK   |
| 2  | *    | 2424.312        | 112.214                | 79.844               | N/A         | N/A            | 32.370      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:12 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz |                          |

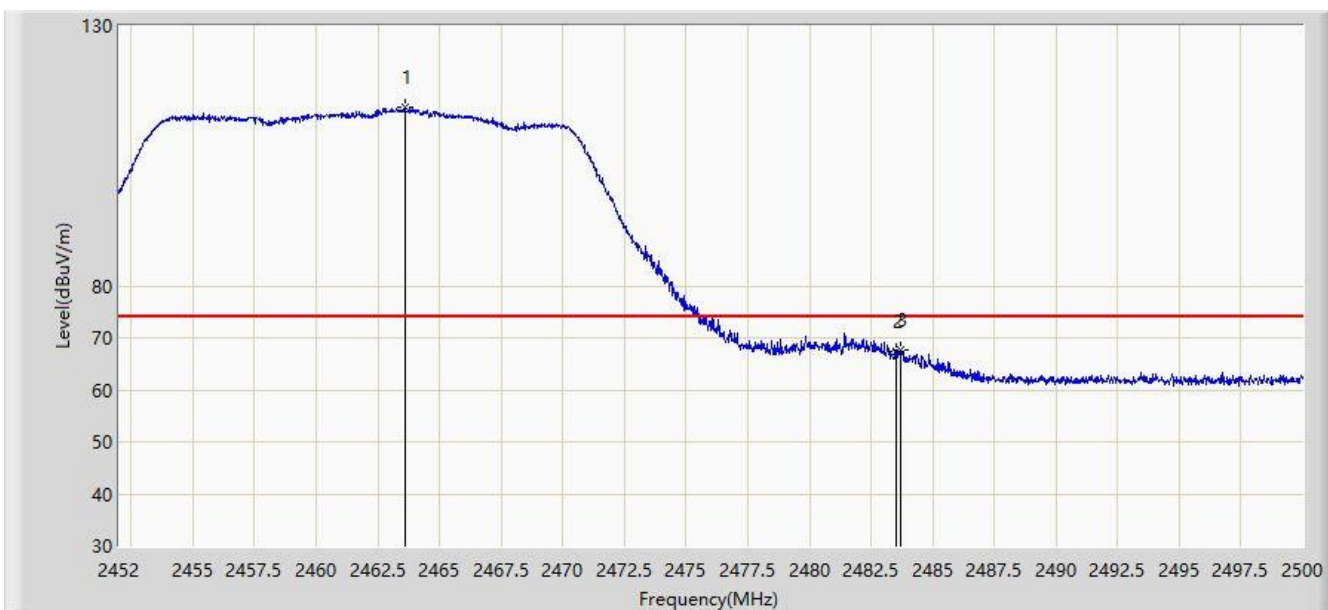


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2463.592        | 114.457                | 82.088               | N/A         | N/A            | 32.369      | PK   |
| 2  |      | 2483.500        | 67.272                 | 34.857               | -6.728      | 74.000         | 32.416      | PK   |
| 3  |      | 2483.704        | 67.604                 | 35.188               | -6.396      | 74.000         | 32.416      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:10 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT20 at Channel 2462MHz |                          |

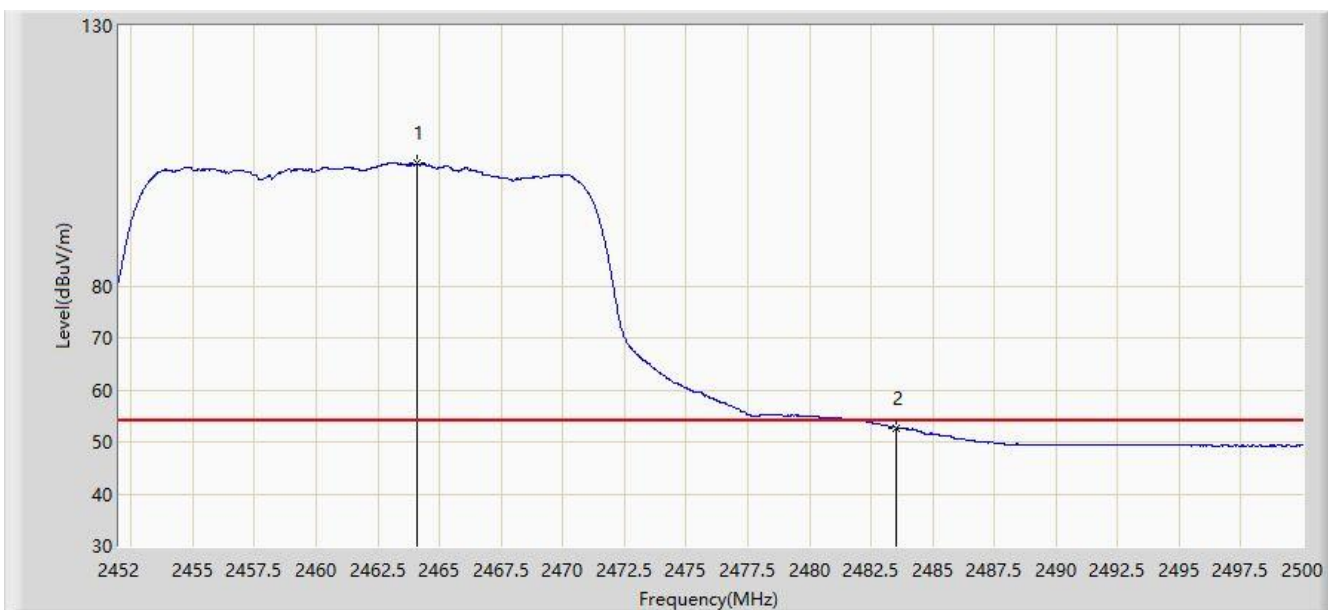


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2464.072        | 103.480                | 71.110               | N/A         | N/A            | 32.369      | AV   |
| 2  |      | 2483.500        | 52.718                 | 20.303               | -1.282      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:26 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

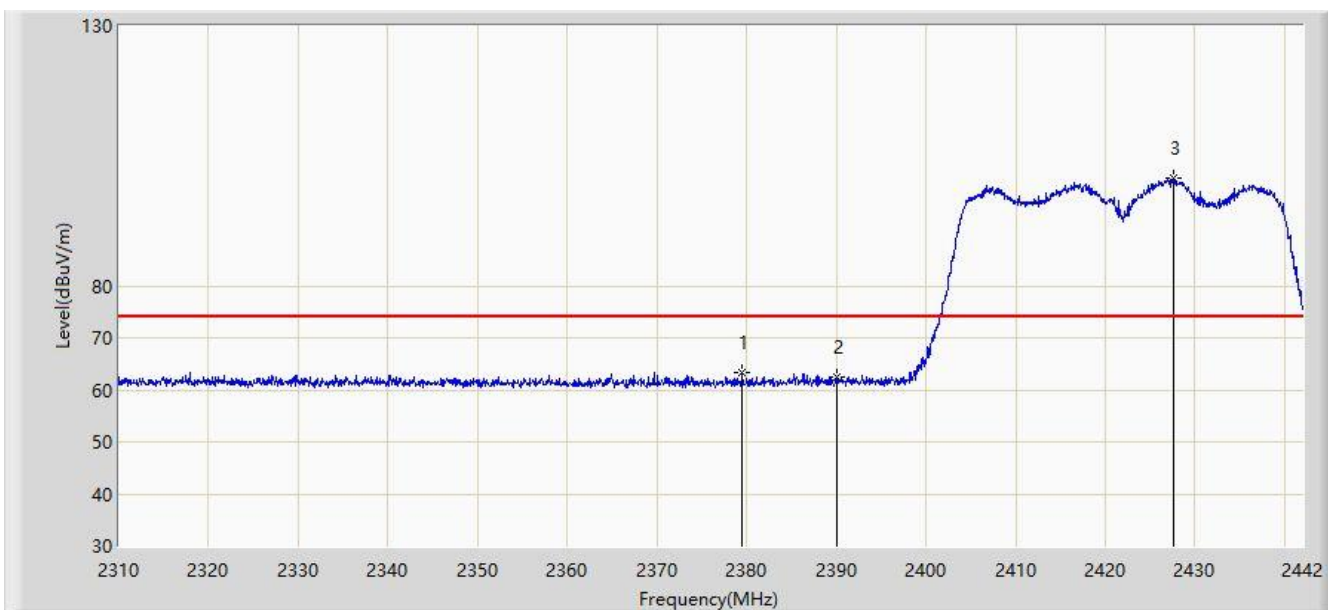


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2379.498        | 63.193                 | 30.761               | -10.807     | 74.000         | 32.432      | PK   |
| 2  |      | 2390.000        | 62.400                 | 29.987               | -11.600     | 74.000         | 32.413      | PK   |
| 3  | *    | 2427.546        | 100.645                | 68.279               | N/A         | N/A            | 32.366      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:27 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

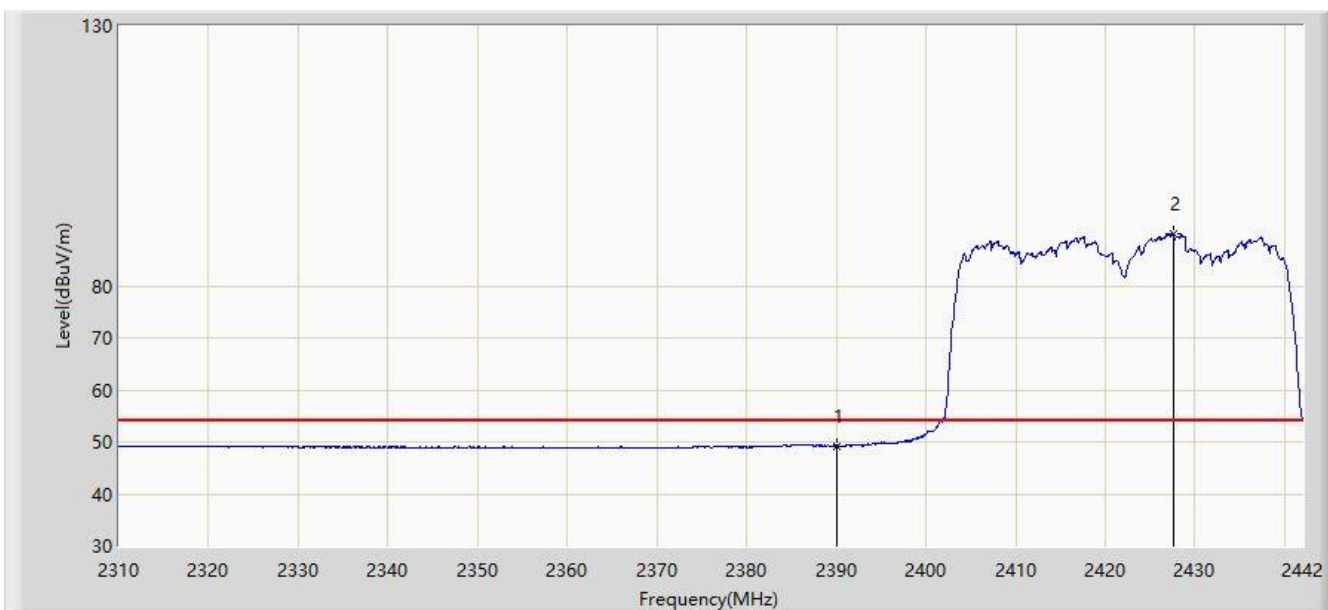


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 49.246                 | 16.833               | -4.754      | 54.000         | 32.413      | AV   |
| 2  | *    | 2427.612        | 90.095                 | 57.729               | N/A         | N/A            | 32.367      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:24 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

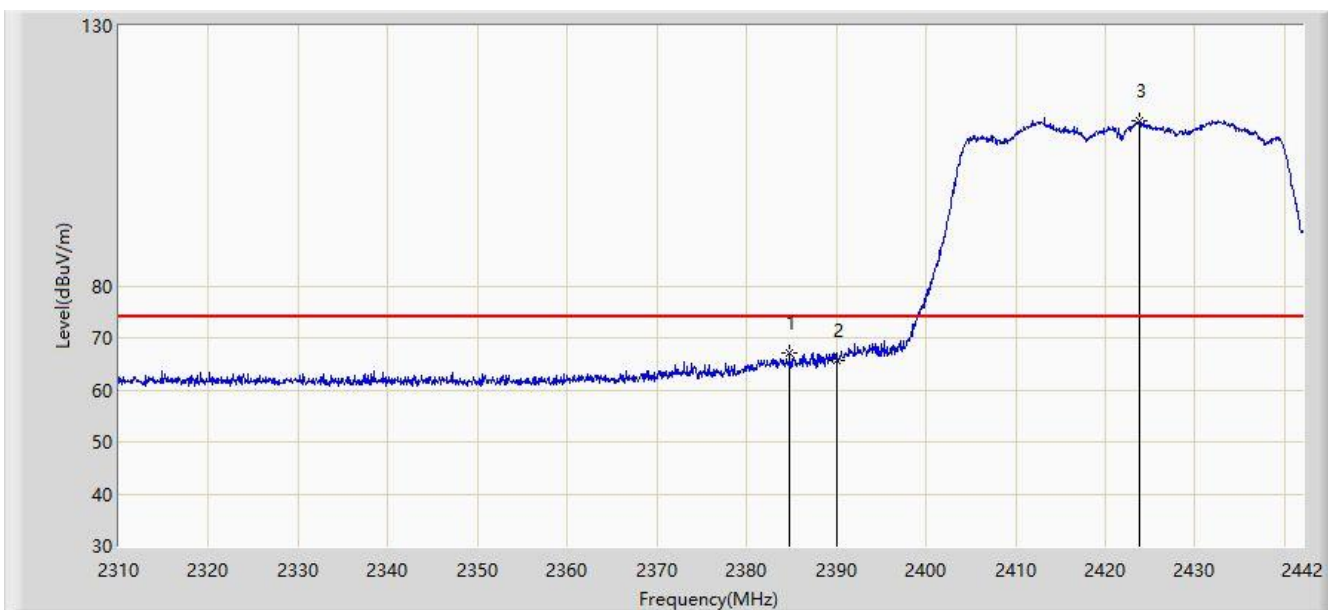


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2384.844        | 66.978                 | 34.556               | -7.022      | 74.000         | 32.422      | PK   |
| 2  |      | 2390.000        | 65.669                 | 33.256               | -8.331      | 74.000         | 32.413      | PK   |
| 3  | *    | 2423.850        | 111.845                | 79.474               | N/A         | N/A            | 32.371      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:19 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2422MHz |                          |

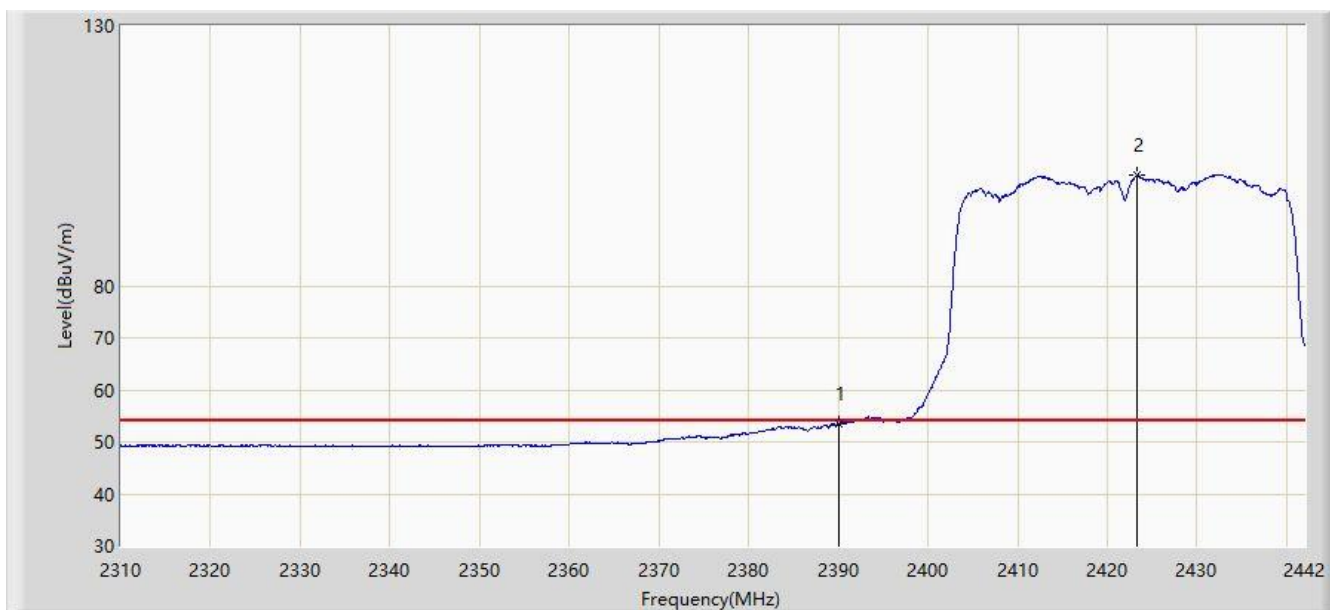


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 53.432                 | 21.019               | -0.568      | 54.000         | 32.413      | AV   |
| 2  | *    | 2423.322        | 101.276                | 68.905               | N/A         | N/A            | 32.371      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:36 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

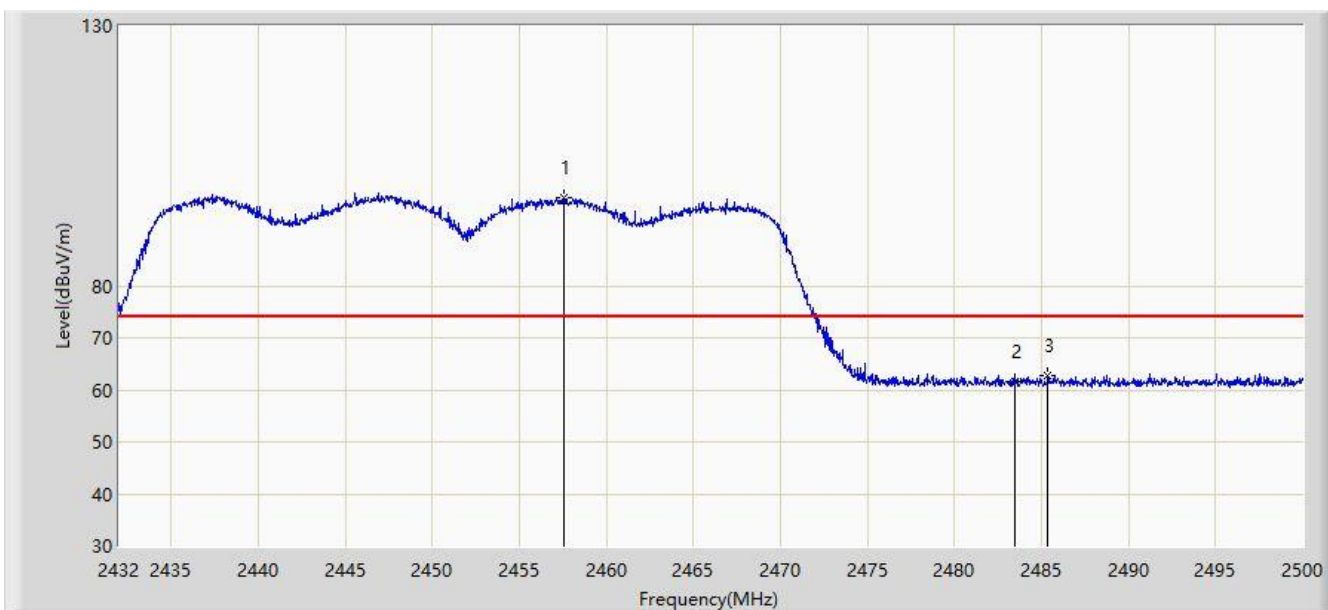


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2457.534        | 96.998                 | 64.640               | N/A         | N/A            | 32.358      | PK   |
| 2  |      | 2483.500        | 61.476                 | 29.061               | -12.524     | 74.000         | 32.416      | PK   |
| 3  |      | 2485.380        | 62.830                 | 30.411               | -11.170     | 74.000         | 32.419      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:37 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Horizontal     |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

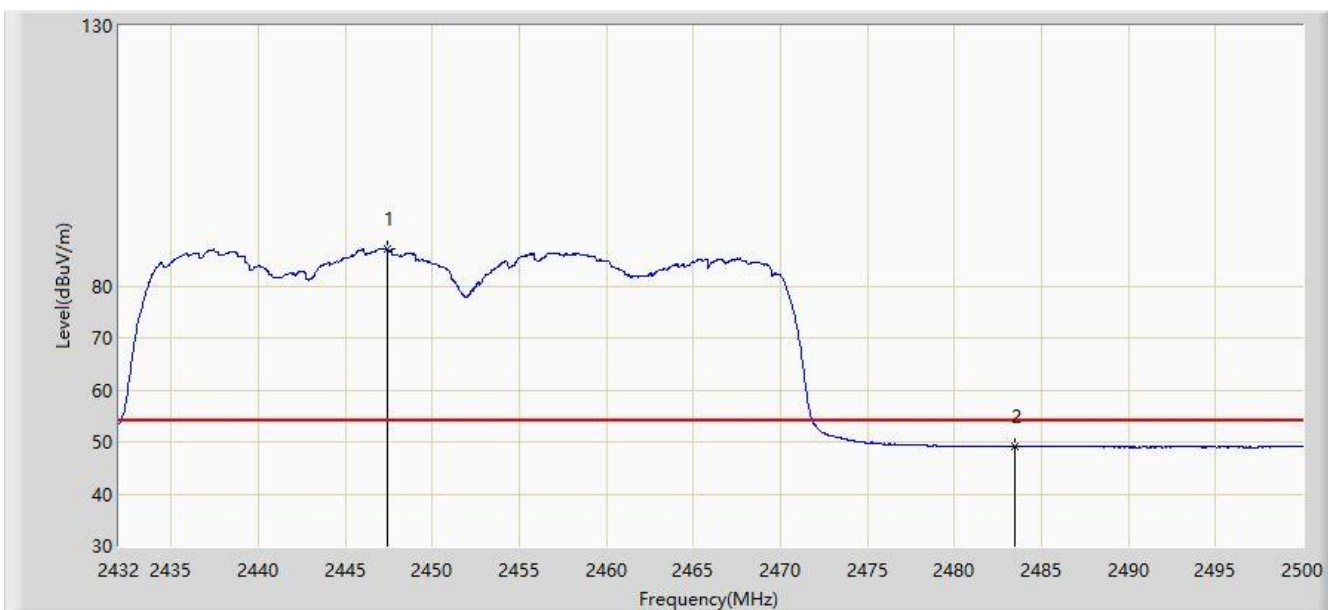


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2447.402        | 87.118                 | 54.779               | N/A         | N/A            | 32.338      | AV   |
| 2  |      | 2483.500        | 49.082                 | 16.667               | -4.918      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:34 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

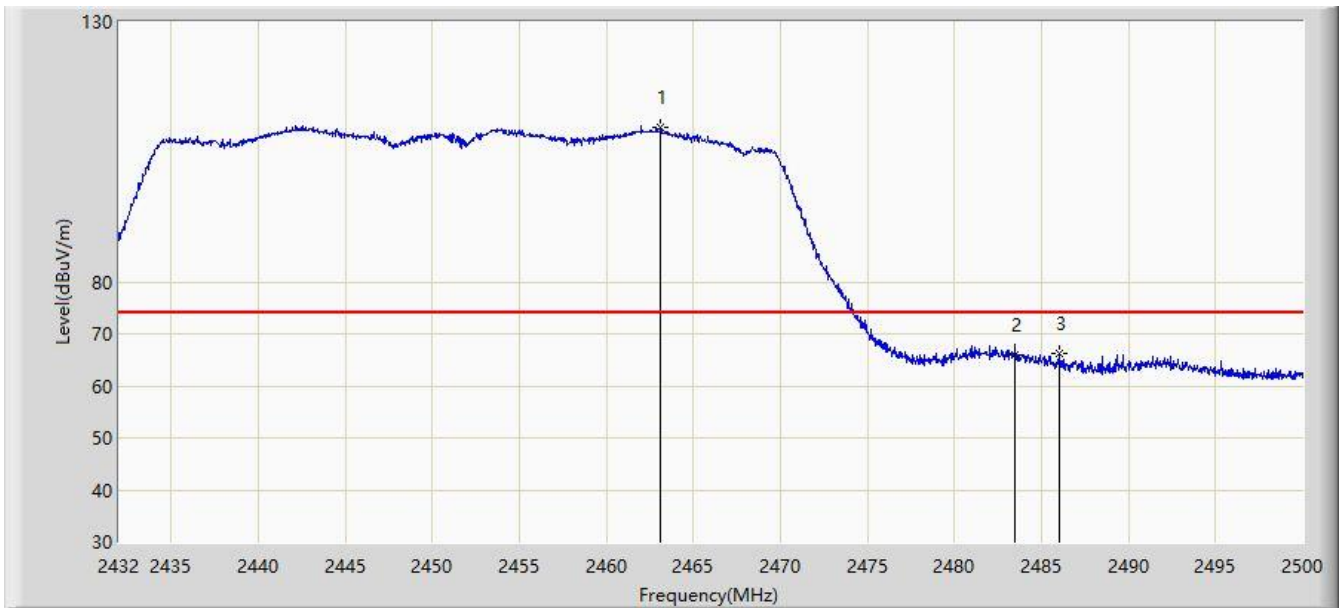


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2463.144        | 109.603                | 77.235               | N/A         | N/A            | 32.368      | PK   |
| 2  |      | 2483.500        | 65.898                 | 33.483               | -8.102      | 74.000         | 32.416      | PK   |
| 3  |      | 2485.992        | 66.345                 | 33.925               | -7.655      | 74.000         | 32.420      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                       |                          |
|-------------------------------------------------------|--------------------------|
| Site: AC1                                             | Time: 2019/10/18 - 05:33 |
| Limit: FCC_Part15.209(3m)                             | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                              | Polarity: Vertical       |
| EUT: HAN Access Point                                 | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11VHT40 at Channel 2452MHz |                          |

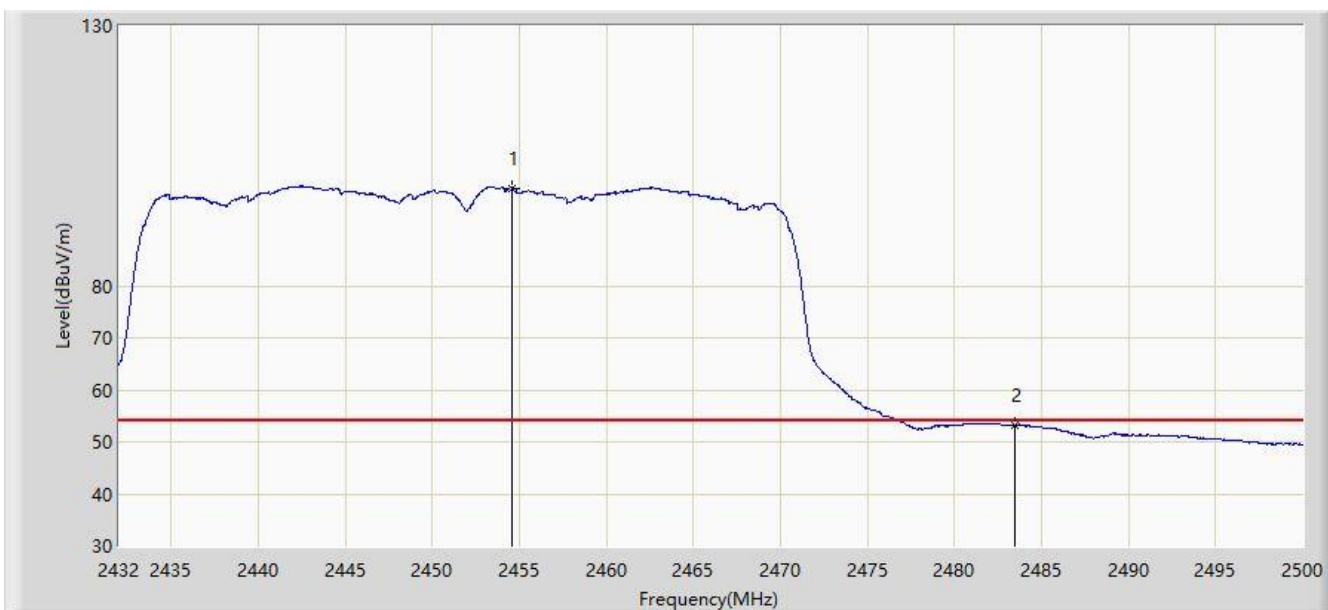


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2454.610        | 98.837                 | 66.485               | N/A         | N/A            | 32.353      | AV   |
| 2  |      | 2483.500        | 53.152                 | 20.737               | -0.848      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:06 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

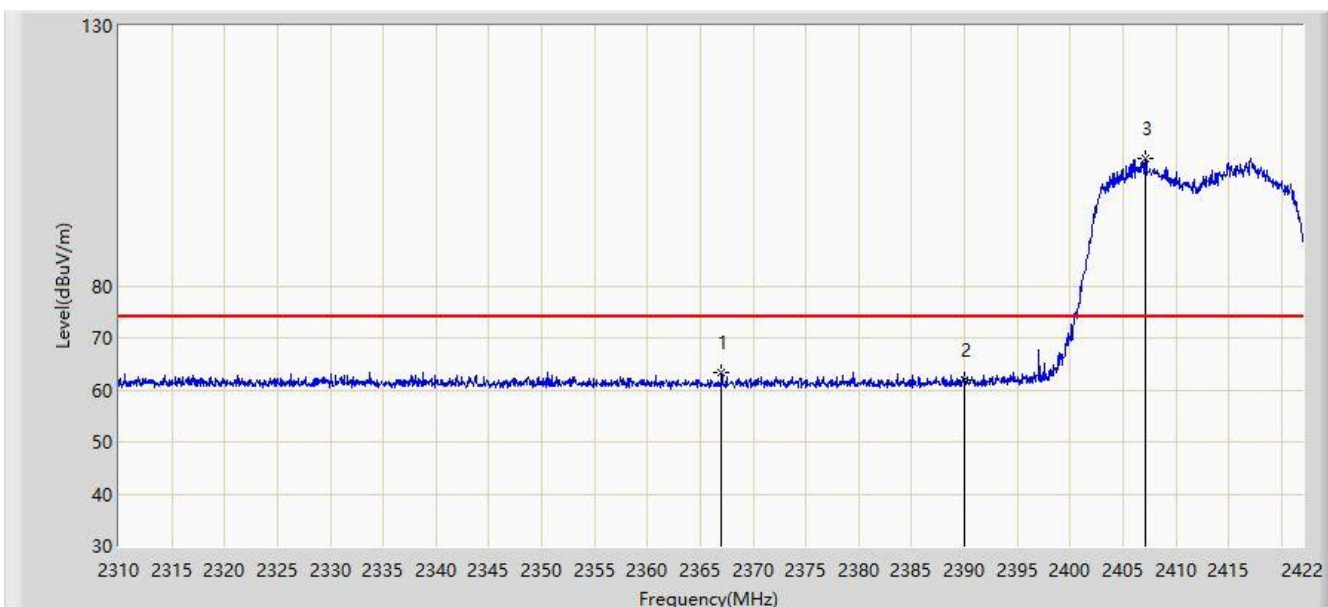


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2367.008        | 63.305                 | 30.846               | -10.695     | 74.000         | 32.459      | PK   |
| 2  |      | 2390.000        | 61.771                 | 29.358               | -12.229     | 74.000         | 32.413      | PK   |
| 3  | *    | 2407.160        | 104.425                | 72.035               | N/A         | N/A            | 32.390      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:07 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

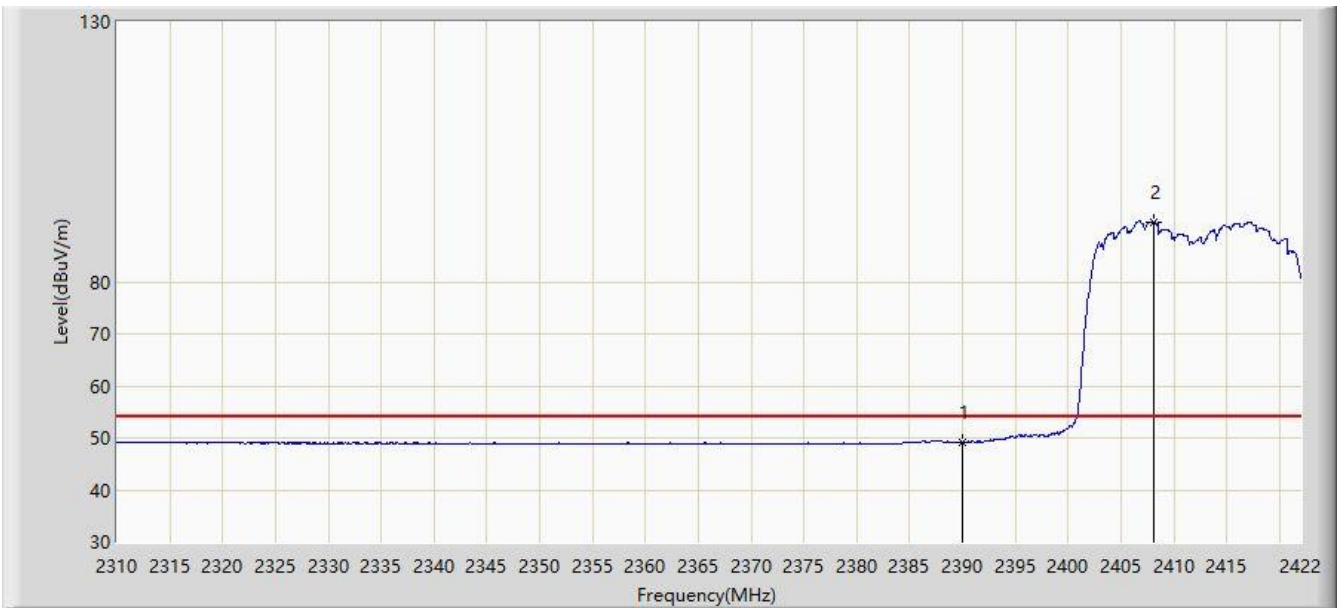


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 49.045                 | 16.632               | -4.955      | 54.000         | 32.413      | AV   |
| 2  | *    | 2408.168        | 91.376                 | 58.987               | N/A         | N/A            | 32.388      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:05 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

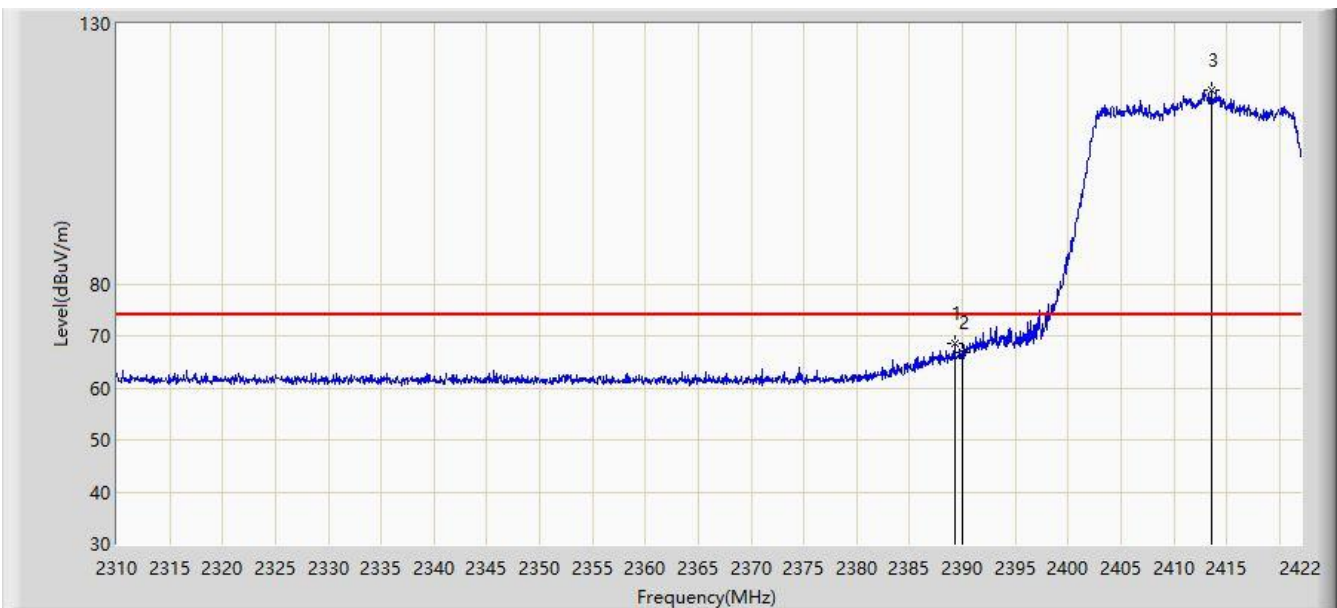


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2389.240        | 68.491                 | 36.077               | -5.509      | 74.000         | 32.414      | PK   |
| 2  |      | 2390.000        | 66.749                 | 34.336               | -7.251      | 74.000         | 32.413      | PK   |
| 3  | *    | 2413.544        | 117.174                | 84.792               | N/A         | N/A            | 32.382      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:03 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2412MHz |                          |

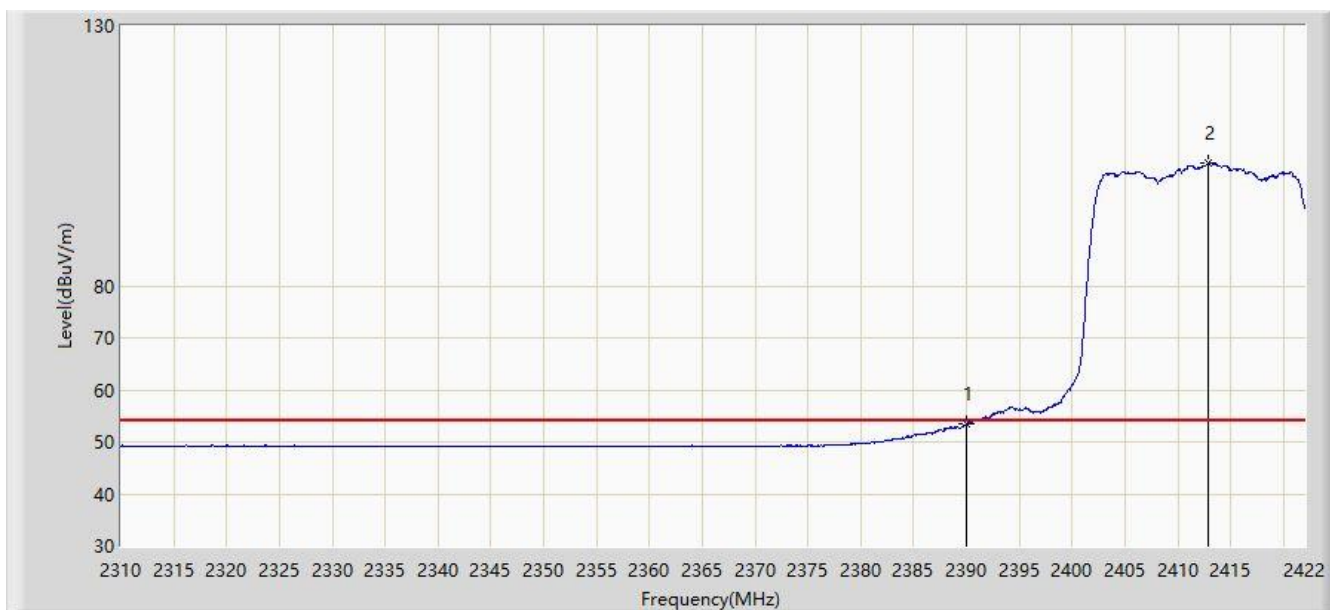


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 53.356                 | 20.943               | -0.644      | 54.000         | 32.413      | AV   |
| 2  | *    | 2412.872        | 103.552                | 71.169               | N/A         | N/A            | 32.383      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:13 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

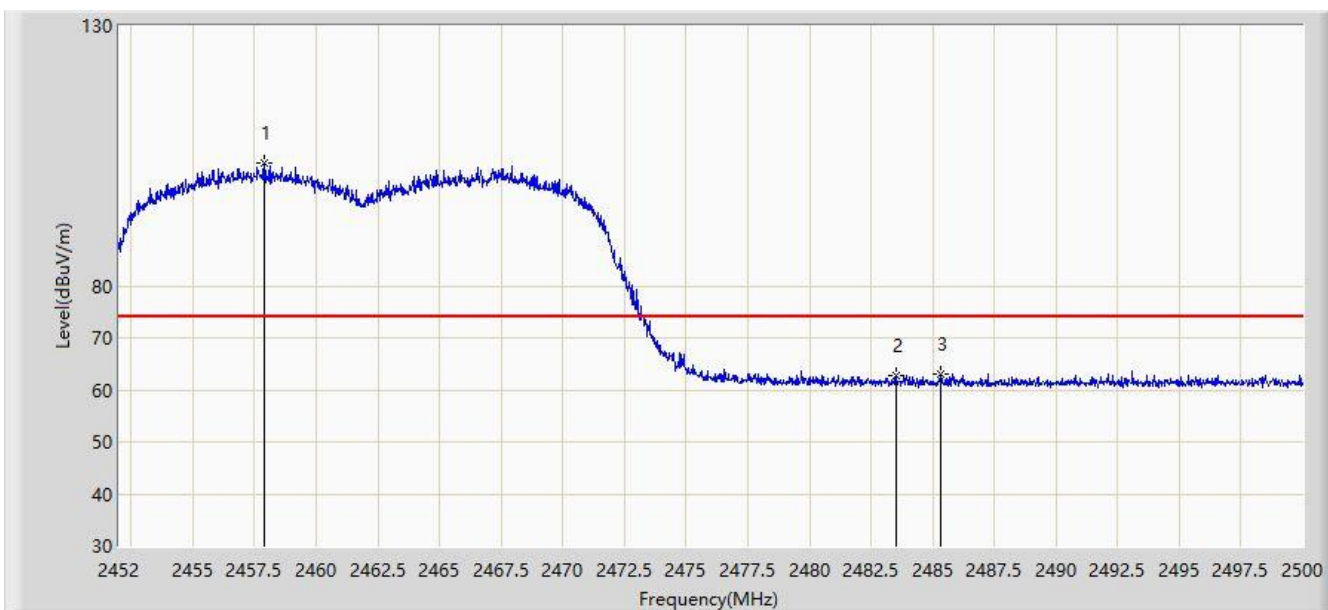


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2457.904        | 103.587                | 71.228               | N/A         | N/A            | 32.359      | PK   |
| 2  |      | 2483.500        | 62.641                 | 30.226               | -11.359     | 74.000         | 32.416      | PK   |
| 3  |      | 2485.312        | 63.006                 | 30.587               | -10.994     | 74.000         | 32.419      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:14 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

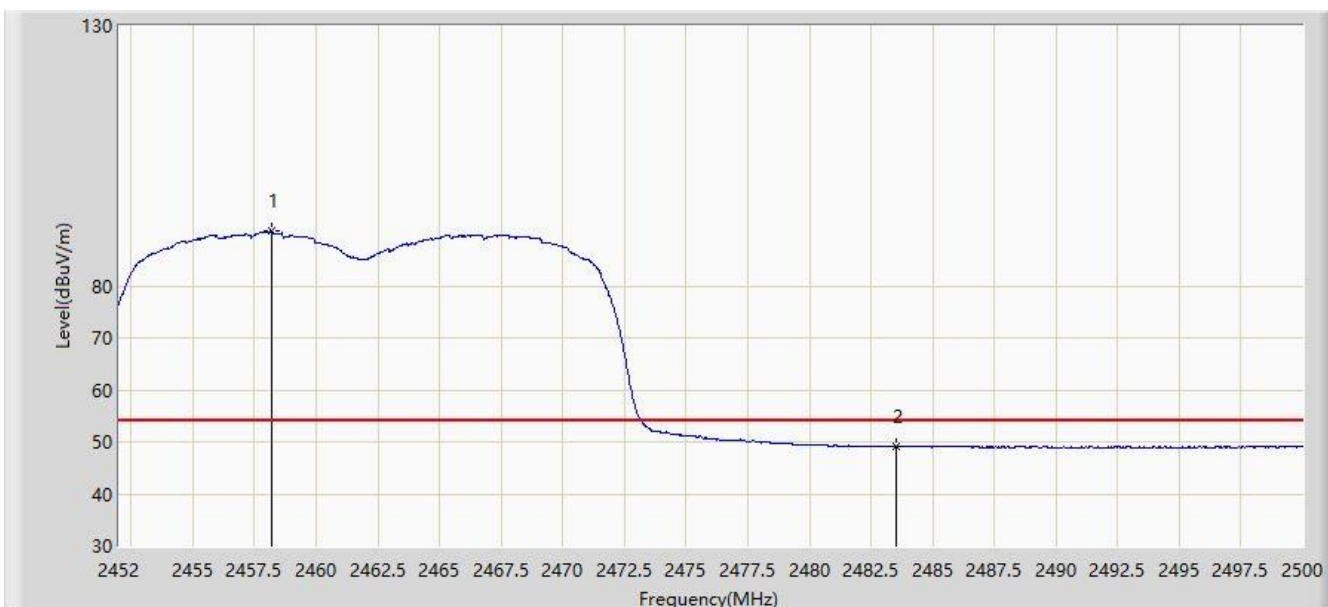


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2458.168        | 90.474                 | 58.115               | N/A         | N/A            | 32.359      | AV   |
| 2  |      | 2483.500        | 49.075                 | 16.660               | -4.925      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:11 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

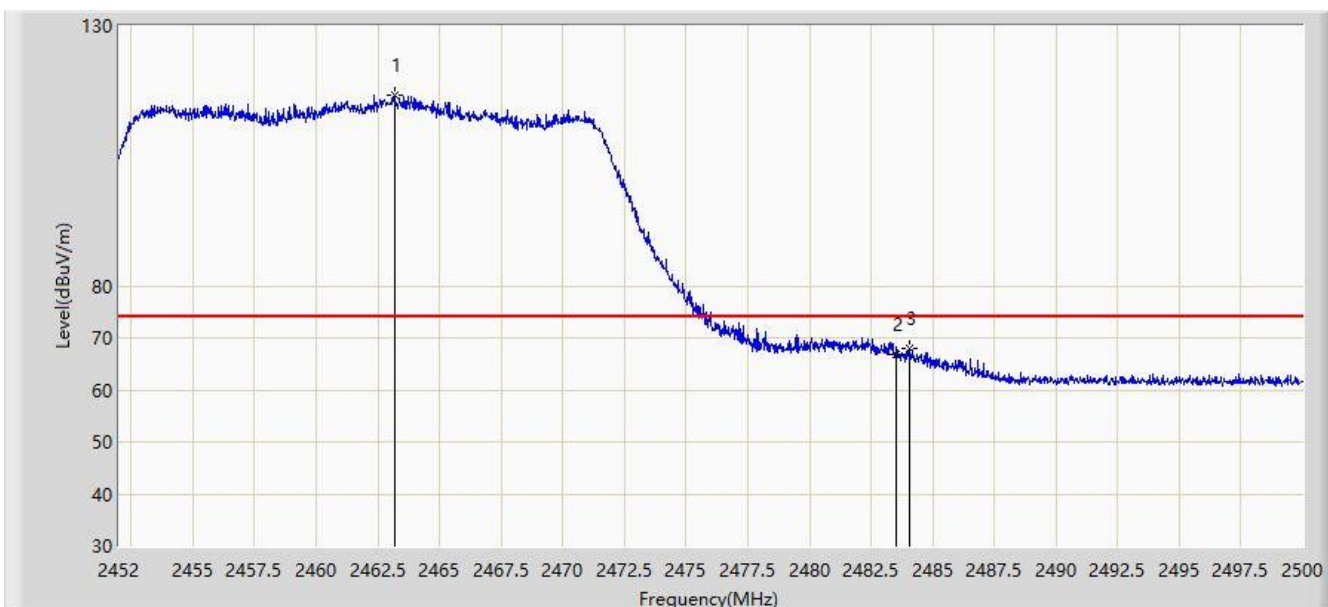


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2463.160        | 116.694                | 84.326               | N/A         | N/A            | 32.368      | PK   |
| 2  |      | 2483.500        | 66.800                 | 34.385               | -7.200      | 74.000         | 32.416      | PK   |
| 3  |      | 2484.064        | 68.006                 | 35.589               | -5.994      | 74.000         | 32.417      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:10 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz |                          |

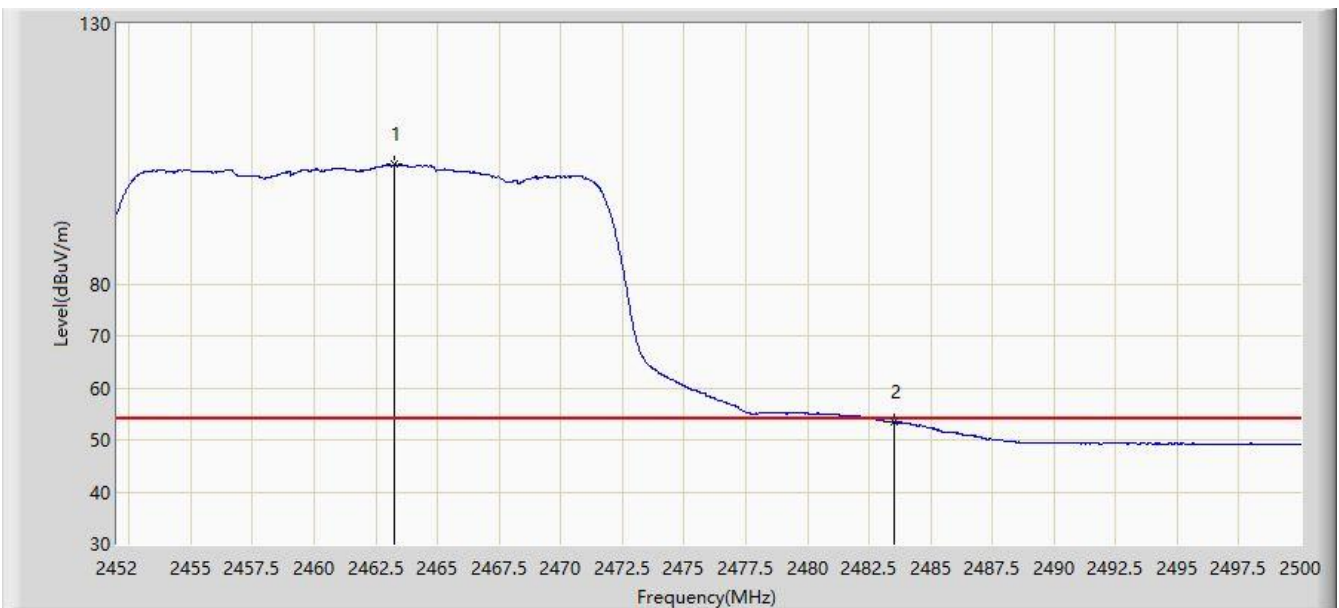


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2463.256        | 102.928                | 70.560               | N/A         | N/A            | 32.369      | AV   |
| 2  |      | 2483.500        | 53.537                 | 21.122               | -0.463      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:19 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

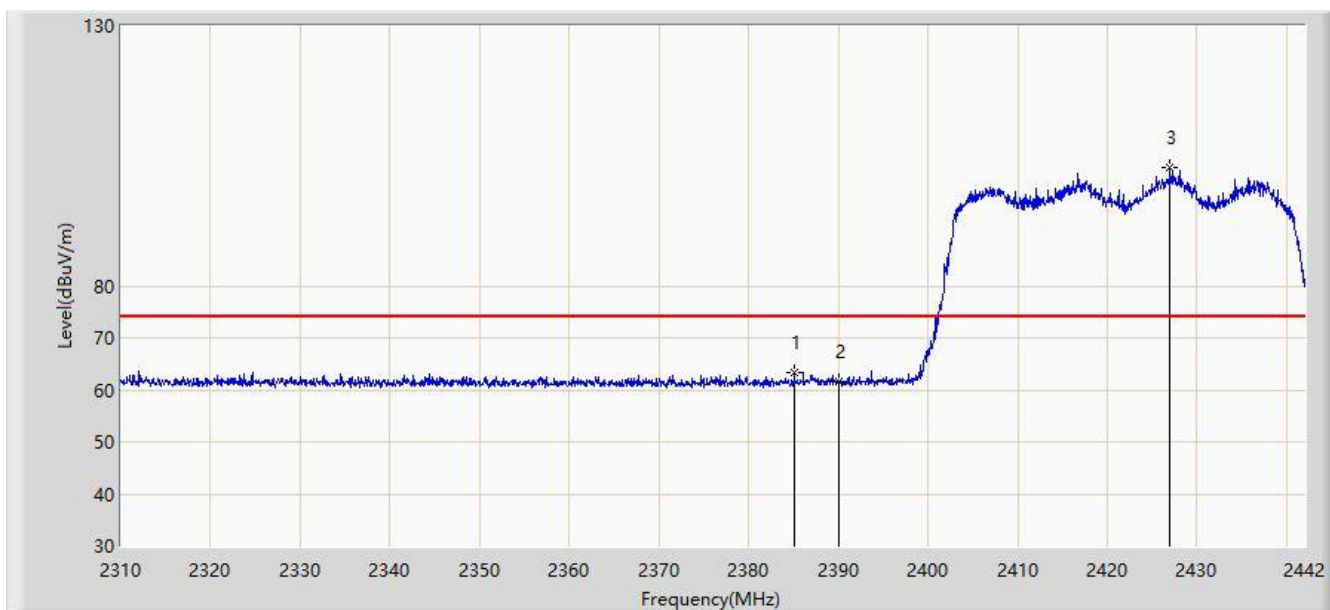


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2385.108        | 63.395                 | 30.973               | -10.605     | 74.000         | 32.422      | PK   |
| 2  |      | 2390.000        | 61.535                 | 29.122               | -12.465     | 74.000         | 32.413      | PK   |
| 3  | *    | 2426.952        | 102.717                | 70.350               | N/A         | N/A            | 32.367      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:20 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

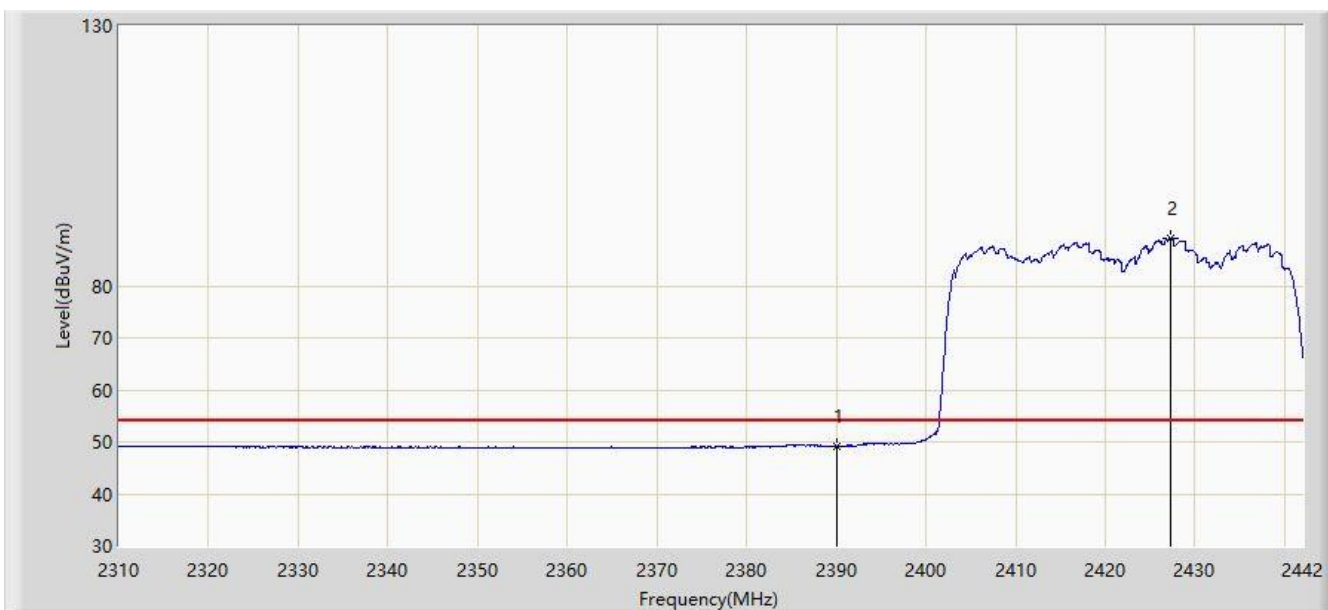


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 49.116                 | 16.703               | -4.884      | 54.000         | 32.413      | AV   |
| 2  | *    | 2427.216        | 89.197                 | 56.830               | N/A         | N/A            | 32.367      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:18 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

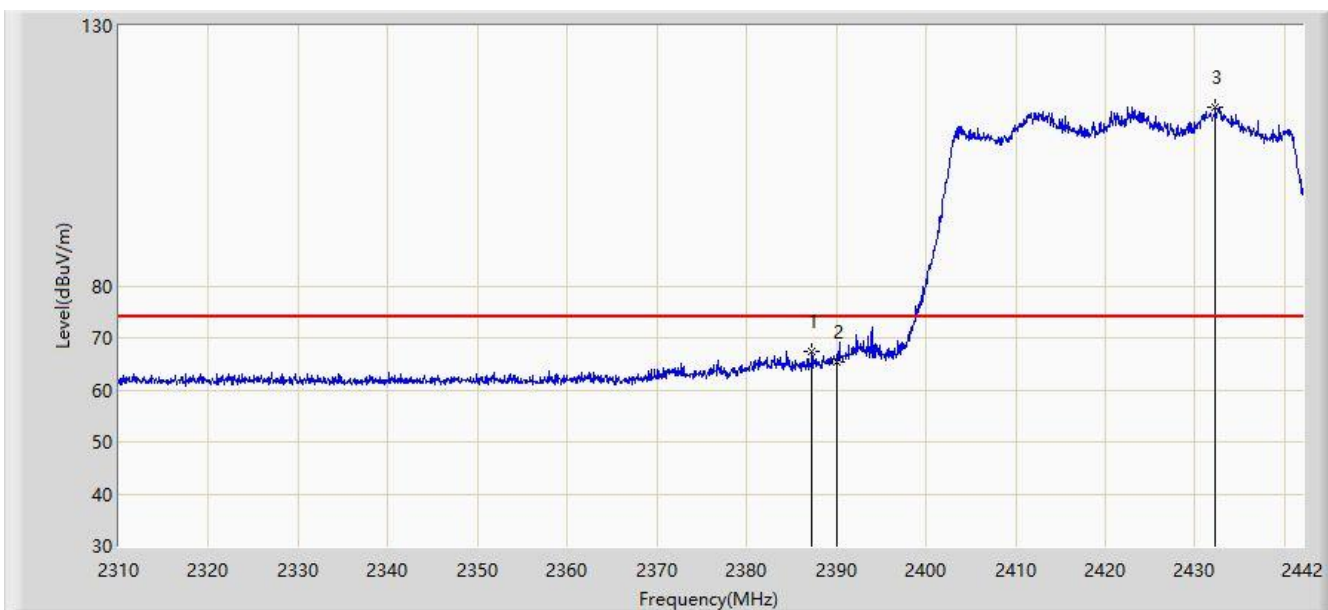


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2387.286        | 67.431                 | 35.013               | -6.569      | 74.000         | 32.418      | PK   |
| 2  |      | 2390.000        | 65.420                 | 33.007               | -8.580      | 74.000         | 32.413      | PK   |
| 3  | *    | 2432.298        | 114.404                | 82.045               | N/A         | N/A            | 32.359      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:17 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz |                          |

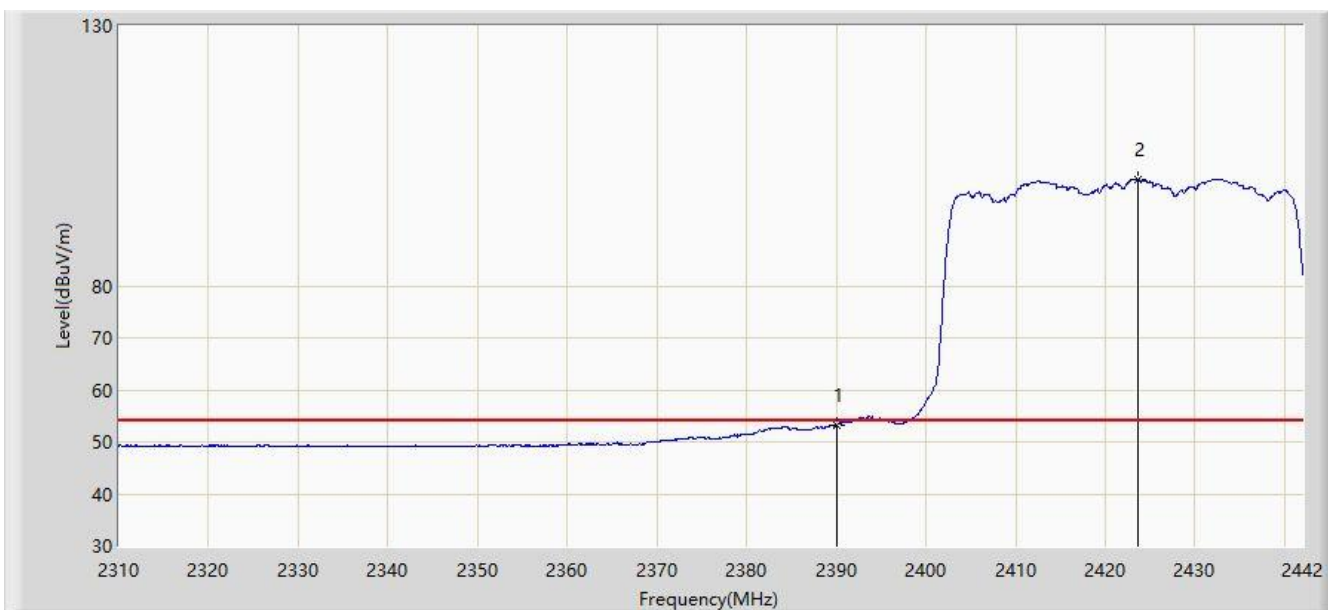


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  |      | 2390.000        | 53.215                 | 20.802               | -0.785      | 54.000         | 32.413      | AV   |
| 2  | *    | 2423.652        | 100.543                | 68.172               | N/A         | N/A            | 32.371      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:29 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

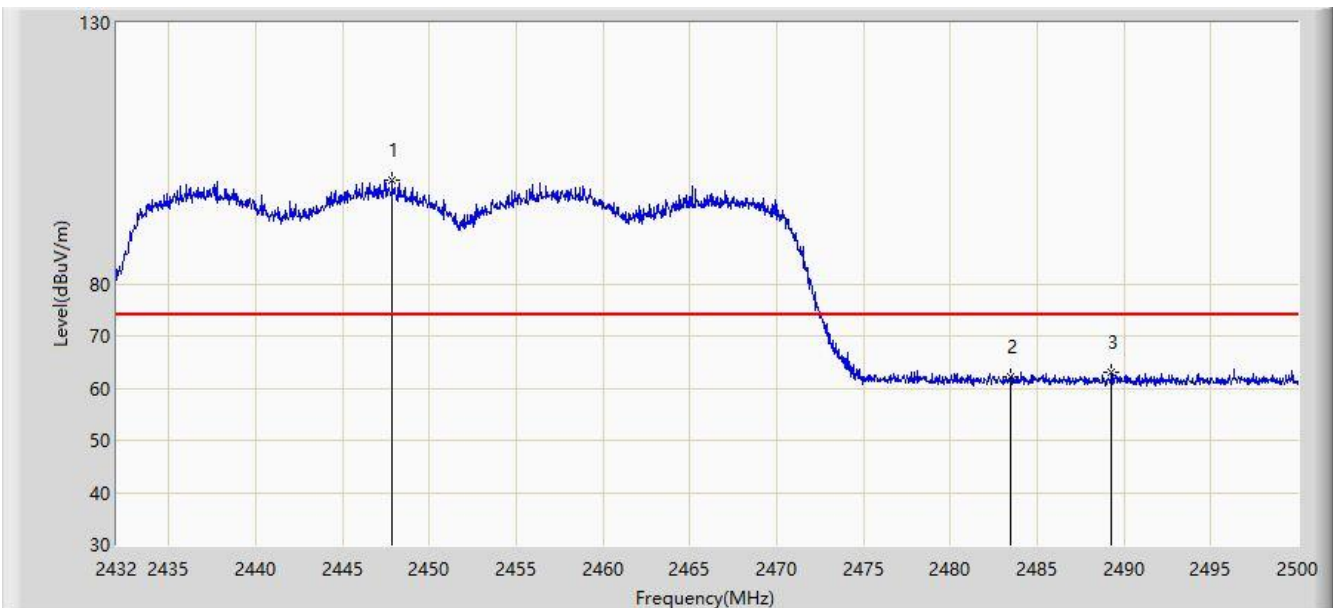


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2447.844        | 99.990                 | 67.651               | N/A         | N/A            | 32.340      | PK   |
| 2  |      | 2483.500        | 62.158                 | 29.743               | -11.842     | 74.000         | 32.416      | PK   |
| 3  |      | 2489.256        | 62.986                 | 30.559               | -11.014     | 74.000         | 32.427      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:30 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Horizontal     |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

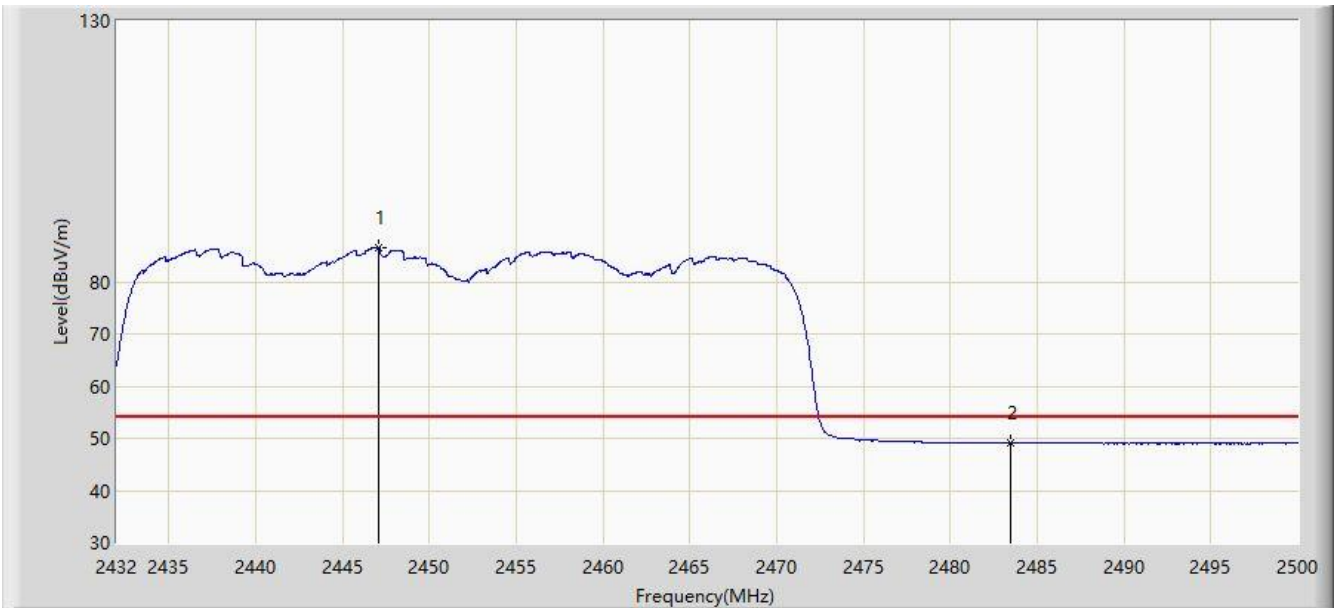


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2447.096        | 86.620                 | 54.282               | N/A         | N/A            | 32.338      | AV   |
| 2  |      | 2483.500        | 49.071                 | 16.656               | -4.929      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:27 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

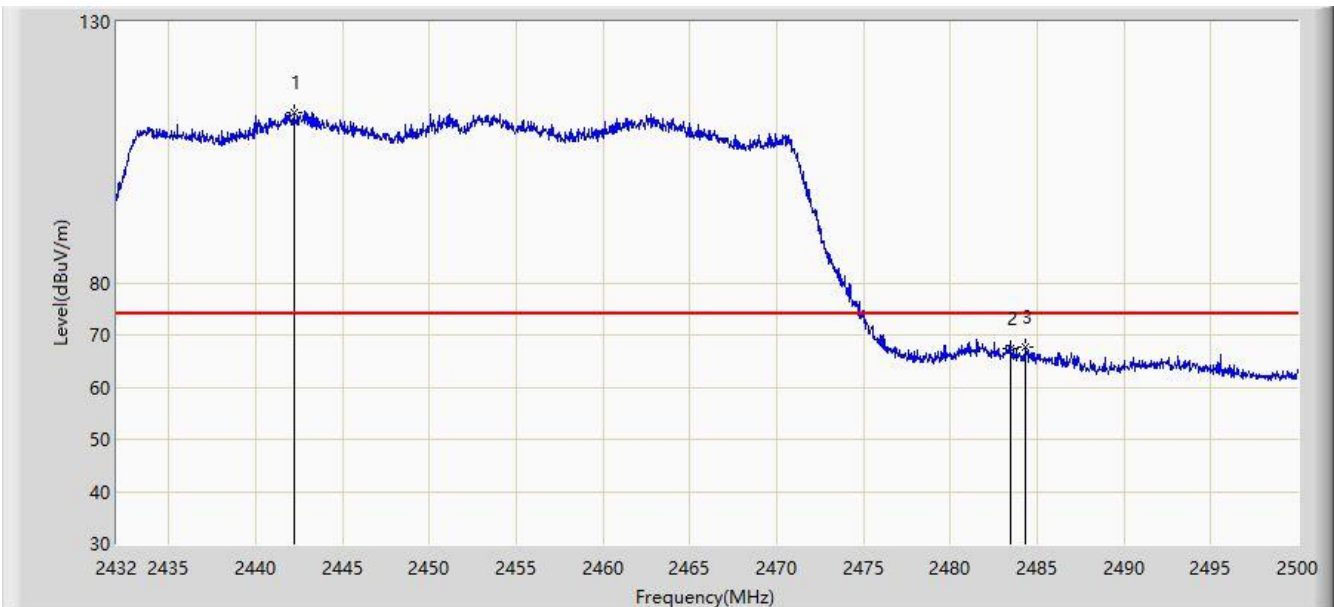


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2442.234        | 112.589                | 80.247               | N/A         | N/A            | 32.342      | PK   |
| 2  |      | 2483.500        | 67.393                 | 34.978               | -6.607      | 74.000         | 32.416      | PK   |
| 3  |      | 2484.292        | 67.599                 | 35.182               | -6.401      | 74.000         | 32.417      | PK   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

|                                                         |                          |
|---------------------------------------------------------|--------------------------|
| Site: AC1                                               | Time: 2019/10/18 - 07:25 |
| Limit: FCC_Part15.209(3m)                               | Engineer: Bacon Dong     |
| Probe: BBHA9120D_1-18GHz                                | Polarity: Vertical       |
| EUT: HAN Access Point                                   | Power: AC 120V/60Hz      |
| Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz |                          |

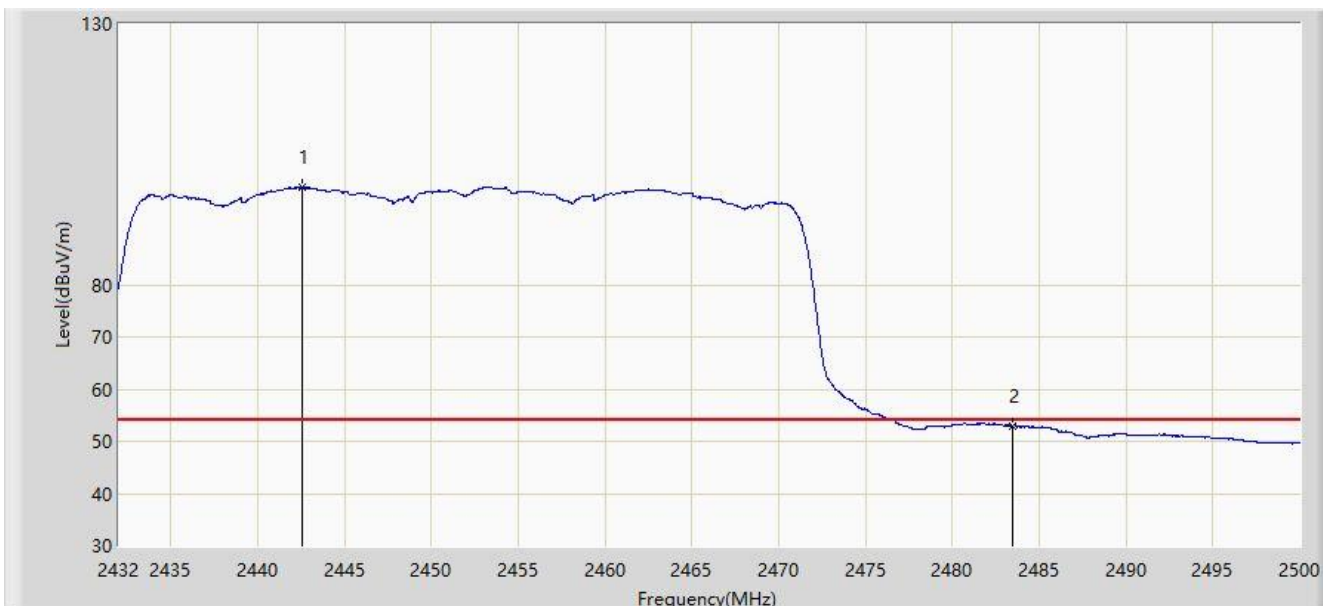

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-------------|----------------|-------------|------|
| 1  | *    | 2442.540        | 98.568                 | 66.226               | N/A         | N/A            | 32.342      | AV   |
| 2  |      | 2483.500        | 52.987                 | 20.572               | -1.013      | 54.000         | 32.416      | AV   |

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits |           |           |
|-----------------------------------------------|-----------|-----------|
| Frequency (MHz)                               | QP (dBuV) | AV (dBuV) |
| 0.15 ~ 0.50                                   | 66 ~ 56   | 56 ~ 46   |
| 0.50 ~ 5.0                                    | 56        | 46        |
| 5.0 ~ 30                                      | 60        | 50        |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

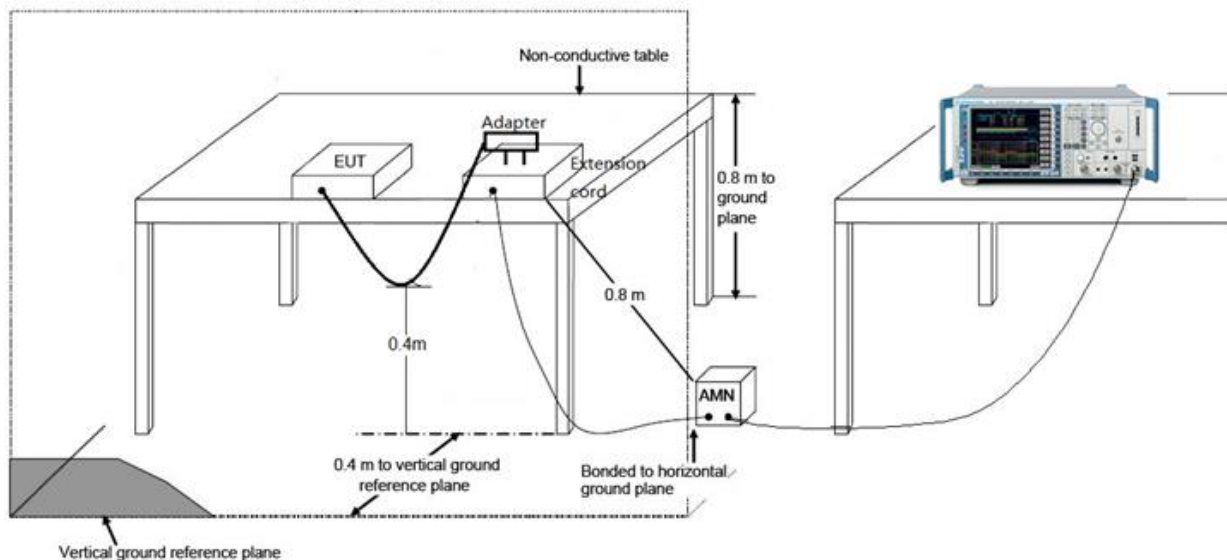

### 7.8.3.Test Result

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: SR2                                                | Time: 2019/12/17 - 09:52 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Liz Yuan       |
| Probe: ENV216_101683_Filter On                           | Polarity: Line           |
| EUT: HAN Access Point                                    | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11b at channel 2412MHz |                          |

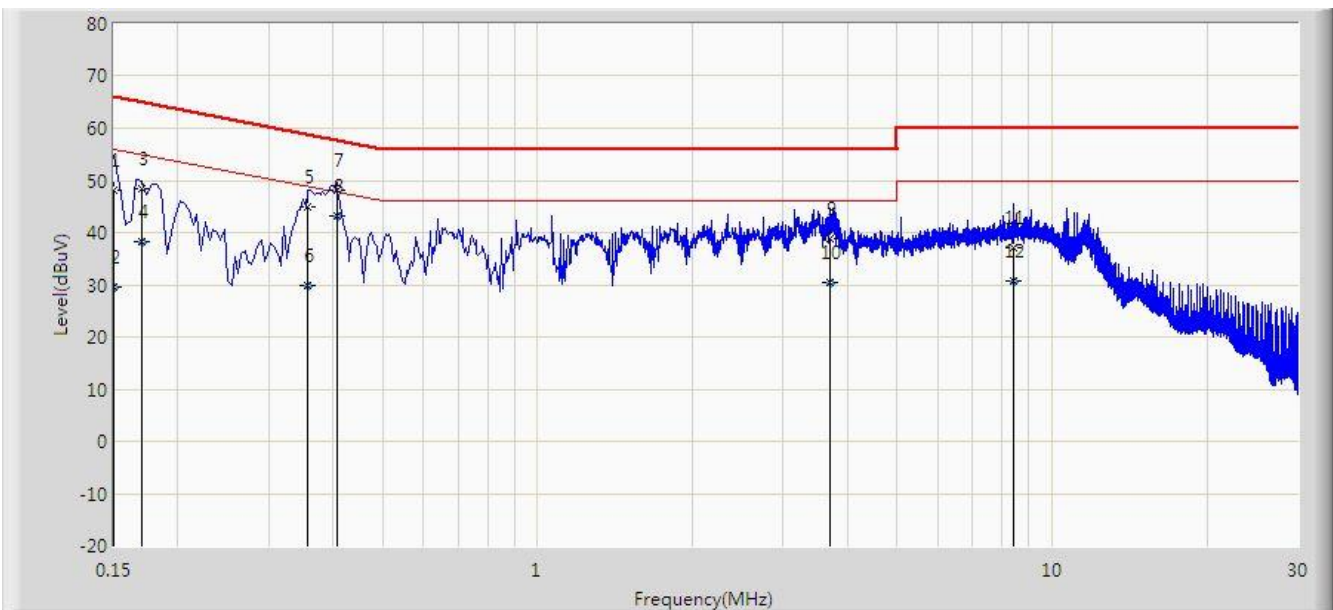


| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.150           | 48.169               | 37.001               | -17.831     | 66.000       | 11.168      | QP   |
| 2  |      |      | 0.150           | 29.512               | 18.344               | -26.488     | 56.000       | 11.168      | AV   |
| 3  |      |      | 0.170           | 48.351               | 38.273               | -16.610     | 64.960       | 10.078      | QP   |
| 4  |      |      | 0.170           | 38.306               | 28.229               | -16.654     | 54.960       | 10.078      | AV   |
| 5  |      |      | 0.358           | 44.946               | 34.895               | -13.829     | 58.775       | 10.051      | QP   |
| 6  |      |      | 0.358           | 29.858               | 19.807               | -18.917     | 48.775       | 10.051      | AV   |
| 7  |      |      | 0.407           | 48.091               | 38.000               | -9.618      | 57.709       | 10.091      | QP   |
| 8  |      | *    | 0.407           | 43.291               | 33.200               | -4.418      | 47.709       | 10.091      | AV   |
| 9  |      |      | 3.710           | 38.798               | 28.853               | -17.202     | 56.000       | 9.946       | QP   |
| 10 |      |      | 3.710           | 30.297               | 20.351               | -15.703     | 46.000       | 9.946       | AV   |
| 11 |      |      | 8.394           | 37.138               | 26.968               | -22.862     | 60.000       | 10.170      | QP   |
| 12 |      |      | 8.394           | 30.690               | 20.520               | -19.310     | 50.000       | 10.170      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

|                                                          |                          |
|----------------------------------------------------------|--------------------------|
| Site: SR2                                                | Time: 2019/12/17 - 10:03 |
| Limit: FCC_Part15.207_CE_AC Power                        | Engineer: Liz Yuan       |
| Probe: ENV216_101683_Filter On                           | Polarity: Neutral        |
| EUT: HAN Access Point                                    | Power: AC 120V/60Hz      |
| <b>Test Mode:</b> Transmit by 802.11b at channel 2412MHz |                          |

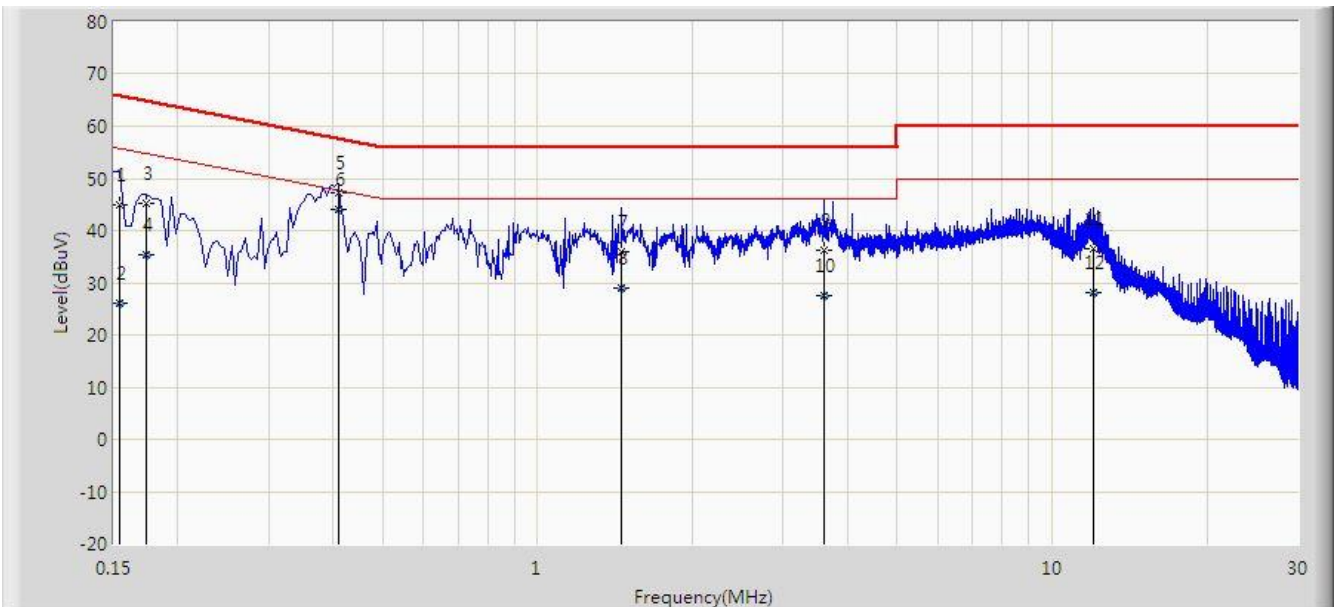

| No | Flag | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Margin (dB) | Limit (dBuV) | Factor (dB) | Type |
|----|------|------|-----------------|----------------------|----------------------|-------------|--------------|-------------|------|
| 1  |      |      | 0.154           | 44.836               | 34.120               | -20.946     | 65.781       | 10.716      | QP   |
| 2  |      |      | 0.154           | 26.150               | 15.434               | -29.632     | 55.781       | 10.716      | AV   |
| 3  |      |      | 0.174           | 45.287               | 35.230               | -19.481     | 64.767       | 10.057      | QP   |
| 4  |      |      | 0.174           | 35.444               | 25.387               | -19.324     | 54.767       | 10.057      | AV   |
| 5  |      |      | 0.410           | 47.338               | 37.219               | -10.310     | 57.648       | 10.119      | QP   |
| 6  |      | *    | 0.410           | 43.916               | 33.796               | -3.733      | 47.648       | 10.119      | AV   |
| 7  |      |      | 1.454           | 36.035               | 26.143               | -19.965     | 56.000       | 9.892       | QP   |
| 8  |      |      | 1.454           | 28.846               | 18.954               | -17.154     | 46.000       | 9.892       | AV   |
| 9  |      |      | 3.602           | 36.304               | 26.380               | -19.696     | 56.000       | 9.924       | QP   |
| 10 |      |      | 3.602           | 27.602               | 17.678               | -18.398     | 46.000       | 9.924       | AV   |
| 11 |      |      | 12.002          | 36.552               | 26.441               | -23.448     | 60.000       | 10.111      | QP   |
| 12 |      |      | 12.002          | 28.125               | 18.014               | -21.875     | 50.000       | 10.111      | AV   |

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the unit is compliance with Part 15C of the FCC rules.

---

The End

## **Appendix A – Test Setup Photograph**

Refer to “1909RSU036-UT” file.

## **Appendix B – EUT Photograph**

Refer to “1909RSU036-UE” file.