

Instructions for CS3BT

Three Button Entry Transmitter




The three button transmitter is used for the remote control of two GTO gate openers or one GTO gate opener and two garage door openers. A GTO Universal Receiver (RB709U-NB) is required for use with non-GTO garage door openers.

You can have as many transmitters as you want for family and guests to open your gate. The DIP switches in all the transmitters for a particular gate opener must be set the same.

Cloning/Learning a DIP switch code:


1. Press and hold button 1 and button 3 at the same time for about 5 seconds.
2. The LED will turn on, then release the buttons.
3. Press and release the button that you want to learn a DIP switch transmitter to just ONCE.
4. Hold the DIP switch transmitter with the front/top facing the clip side of the Smart Transmitter.
5. Press the button on the DIP switch transmitter
6. The LED on the Smart Transmitter will blink twice when it has successfully learned the code.

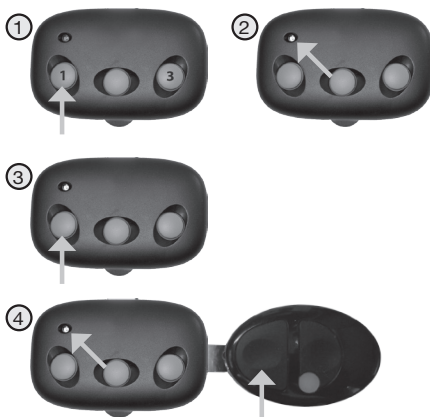

The button you programmed will now transmit the DIP switch code as indicated by the LED being solid on when the button is pressed.

Creating a DIP switch code:

1. Press and hold button 1 and button 3 at the same time for about 5 seconds.
2. The LED will turn on, then release the buttons.
3. Quickly press 2 times the button you wish to create a DIP switch code for.
4. The LED will then blink twice showing successful creation of a DIP switch code.

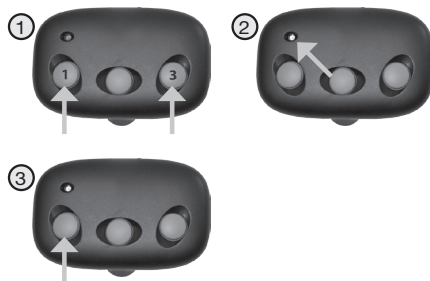

The button you programmed will now transmit the DIP switch code as indicated by the LED being solid on when the button is pressed.

Instructions for CS3BT

Three Button Entry Transmitter




The three button transmitter is used for the remote control of two GTO gate openers or one GTO gate opener and two garage door openers. A GTO Universal Receiver (RB709U-NB) is required for use with non-GTO garage door openers.

You can have as many transmitters as you want for family and guests to open your gate. The DIP switches in all the transmitters for a particular gate opener must be set the same.

Deleting a DIP switch code:

1. Press and hold button 1 and button 3 at the same time for about 5 seconds.
2. The LED will turn on, then release the buttons.
3. Press and hold for 5 seconds.
4. The LED will blink twice indicating the DIP switch code was successfully removed.

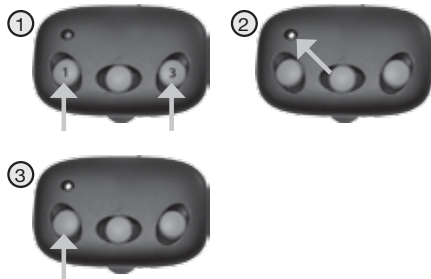

This button will now transmit the GDO serial number packet as indicated by the LED blinking when the button is pressed.

FCC REGULATION: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ONE YEAR LIMITED WARRANTY

Your GTO® Accessory is warranted by the manufacturer against defects in materials and manufacturer workmanship for a period of one (1) year from date of purchase, provided the recommended installation procedures have been followed.

GTO® sells its products through authorized retail and on-line channels to ensure that consumers obtain quality pre-sale and after sale support and service. The warranty on GTO® products is NOT VALID if the products have been purchased from an unauthorized, on-line E-tailer (e.g., E-bay®) sellers who are not authorized GTO® resellers, or if a product's serial number has been altered, removed, or replaced in any way. To verify that you are buying from an authorized, on-line GTO® e-tailer, visit www.gtoinc.com, or call 1-800-543-GATE.

In the case of product failure due to defective material or manufacturer workmanship within the one (1) year warranty period, the opener will be repaired or replaced (at the manufacturer's option) at no charge to the customer, if returned freight prepaid to Gates That Open, LLC, 3121 Hartsfield Road, Tallahassee, Florida, USA 32303. IMPORTANT: Call (850) 575-4144 or Fax (850) 575-8950 for a Return Goods Authorization (RGA) number before returning items to the factory. Products shipped to the factory without an RGA number will not be accepted. Replacement or repaired parts are covered by this warranty for the remainder of the one (1) year warranty period or six (6) months, whichever is greater. GTO® will pay shipping costs (equal to United Parcel Service ground rate) for return to owner of item(s) repaired under warranty.

The manufacturer will not be responsible for any changes or damages incurred in the removal of the defective parts for repair, or the reinstallation of these parts after repair. Use of any components that are not GTO® specified (e.g., battery or transformer) will void the warranty. This warranty shall be considered void if damage to the product(s) was due to improper installation or use, use of non-GTO® specified or approved components or replacement parts, connection to an improper power source, or if damage was caused by lightning, electrical power surge, wind, fire, flood, insects, or other natural agents.

This warranty gives you specific legal rights, and you may also have other rights which may vary from state to state. This warranty is in lieu of all other warranties, either expressed or implied.

After the one (1) year warranty period expires, GTO® (or one of its authorized service centers) will perform necessary repairs for a nominal fee. Call GTO® at (800) 543-1236 or (850) 575-4144 for more information.

If you have any questions or concerns, please contact our Technical Service Department • M-F 8am to 7pm (EST) at 1-800-543-1236 or 850-575-4144

GTO • 3121 Hartsfield Road • Tallahassee, FL 32303 • Telephone (850) 575-0176 • Fax (850) 575-8912 • www.gtoaccess.com