



NOKIA MOBILE PHONES

6000 Connection Drive
Irving, TX 75039
972-894-5000
972-894-4988

April 3, 2003

Federal Communications Commission,
Authorization & Evaluation Division,
7435 Oakland Mills Road
Columbia, MD. 21046

Attention: Equipment Authorization Branch

We hereby certify that the transceiver FCC ID: GMLRH-40 complies with
ANSI/IEEE C95.1-1992 Standard for Safety Levels with Respect to Human
Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

Compliance was determined by testing appropriate parameters according to
standard.

NOKIA MOBILE PHONES

A handwritten signature in black ink, appearing to read "Mike Al-Mefleh", is written over a horizontal line.

Mike Al-Mefleh
Product Program Manager, Dallas

Certification Information (SAR)

THIS MODEL PHONE MEETS THE GOVERNMENT'S REQUIREMENTS FOR EXPOSURE TO RADIO WAVES.

Your wireless phone is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health.

The exposure standard for wireless mobile phones employs a unit of measurement known as the Specific Absorption Rate, or SAR. The SAR limit set by the FCC is 1.6W/kg.* Tests for SAR are conducted using standard operating positions accepted by the FCC with the phone transmitting at its highest certified power level in all tested frequency bands. Although the SAR is determined at the highest certified power level, the actual SAR level of the phone while operating can be well below the maximum value. This is because the phone is designed to operate at multiple power levels so as to use only the power required to reach the network. In general, the closer you are to a wireless base station antenna, the lower the power output. Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government-adopted requirement for safe exposure. The tests are performed in positions and locations (for example, at the ear and worn on the body) as required by the FCC for each model. The highest SAR value for this model phone as reported to the FCC:

When tested for use at the ear -

FCCID # GMLRH-40 is 1.23 W/kg

FCCID # GMLRH-39 is 1.08 W/kg

When worn on the body, as described in this user guide:

FCCID # GMLRH-40 is 1.18W/kg

FCCID # GMLRH-39 is 0.96 W/kg

(Body-worn measurements differ among phone models, depending upon available accessories and FCC requirements).

While there may be differences between the SAR levels of various phones and at various positions, they all meet the government requirement.

Reference information

The FCC has granted an Equipment Authorization for this model phone with all reported SAR levels evaluated as in compliance with the FCC RF exposure guidelines. SAR information on this model phone is on file with the FCC and can be found under the Display Grant section of <http://www.fcc.gov/oet/fccid> after searching on FCC ID GMLRH-40 and GMLRH-39.

For body worn operation, this phone has been tested and meets the FCC RF exposure guidelines for use with an accessory that contains no metal and that positions the handset a minimum of 5/8 inch (1.5 cm) from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. If you do not use a body-worn accessory and are not holding the phone at the ear, position the handset a minimum of 5/8 inch (1.5 cm) from your body when the phone is switched on.

*In the United States and Canada, the SAR limit for mobile phones used by the public is 1.6 watts/kilogram (W/kg) averaged over one gram of tissue. The standard incorporates a substantial margin of safety to give additional protection for the public and to account for any variations in measurements. SAR values may vary depending on national reporting requirements and the network band. For SAR information in other regions please look under product information at www.nokia.com/us.

SAR Compliance Test Report

Test report no.:	02-RF-0173.002	Date of report:	21 March, 2003
Number of pages:	70	Contact person:	Nerina Walton
		Responsible test engineer:	Nerina Walton

Testing laboratory:	Test & Certification Center (TCC) Dallas Nokia Mobile Phones, Inc 6021 Connection Drive Irving TX 75039, USA Tel. +1 972 894 5000 Fax. +1 972 894 4988	Client:	Nokia Mobile Phones, Inc 6021 Connection Drive Irving TX 75039, USA Tel. +1 972 894 5000 Fax. +1 972 894 4988
---------------------	--	---------	--

Tested devices:	GMLRH-40, Model 2220, (BOM 1) BMC-3, BLC-2 (1000 mAh), BLC-2 (950 mAh), HDE-2
-----------------	--

Supplement reports:	-
---------------------	---

Testing has been carried out in accordance with:	IEEE Std 1528-200X, Draft CBD 1.0 – April 4, 2002 Draft Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques FCC Supplement C Edition, 01-01 Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
--	---


Documentation:	The documentation of the testing performed on the tested devices is archived for 15 years at Test & Certification Center (TCC) Dallas
----------------	---

Test results:	<p>The tested device complies with the requirements in respect of all parameters subject to the test.</p> <p>The test results and statements relate only to the items tested. The test report shall not be reproduced except in full, without written approval of the laboratory.</p>
---------------	---


Date and signatures:

21 March, 2003

For the contents:

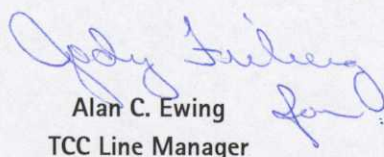

Alan C. Ewing
TCC Line Manager



Nerina Walton
Test Engineer

CONTENTS

1. QUALITY SYSTEM	3
2. SUMMARY FOR SAR TEST REPORT	4
2.1 MAXIMUM RESULTS FOUND DURING SAR EVALUATION	4
3. DESCRIPTION OF TESTED DEVICE	5
3.1 PICTURE OF PHONE	5
3.2 DESCRIPTION OF THE ANTENNA	5
3.3 BATTERY OPTIONS	5
3.4 BODY WORN OPERATION	6
4. TEST CONDITIONS	6
4.1 AMBIENT CONDITIONS	6
4.2 RF CHARACTERISTICS OF THE TEST SITE	6
4.3 TEST SIGNAL, FREQUENCIES, AND OUTPUT POWER	6
5. DESCRIPTION OF THE TEST EQUIPMENT	7
5.1 SYSTEM ACCURACY VERIFICATION	8
5.2 TISSUE SIMULANTS	9
5.3 PHANTOMS	11
5.4 ISOTROPIC E-FIELD PROBE ET3DV6	11
6. DESCRIPTION OF THE TEST PROCEDURE	12
6.1 TEST POSITIONS	12
6.2 SCAN PROCEDURES	14
6.3 SAR AVERAGING METHODS	14
7. MEASUREMENT UNCERTAINTY	15
7.1 DESCRIPTION OF INDIVIDUAL MEASUREMENT UNCERTAINTY	15
8. RESULTS	16
8.1 HEAD CONFIGURATION	16
8.2 BODY WORN CONFIGURATION	17

APPENDIX A: SCOPE OF ACCREDITATION FOR A2LA

APPENDIX B: VALIDATION TEST PRINTOUTS

APPENDIX C: SAR DISTRIBUTION PRINTOUTS

APPENDIX D: CALIBRATION CERTIFICATE (S)



1. QUALITY SYSTEM

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). Appendix D of this report contains the scope of accreditation for A2LA. TCC – Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661.

2. SUMMARY FOR SAR TEST REPORT

Date of test	20 February – 07 March 2003
Contact person	Nerina Walton
Test plan referred to	-
FCC ID	GMLRH-40
Type, SN, HW and SW numbers of tested device	Type: RH-40, ESN: 07201962418, HW: PROTO, SW: 1.02
Accessories used in testing	BMC-3 Battery, BLC-2 (1000 mAh) Battery, BLC-2 (950 mAh) Battery, HDE-2 Headset
Notes	-
Document code	02-RF-0173.002
Responsible test engineer	N. Walton
Measurement performed by	Elizabeth Parish / James Love

2.1 Maximum Results Found during SAR Evaluation

The equipment is deemed to fulfill the requirements if the measured values are less than or equal to the limit.

2.1.1 Head Configuration

Mode	Ch / f (MHz)	Power (dBm)	Position	Limit (mW/g)	Measured (mW/g)	Result
AMPS	799 / 848.97	24.35	Right Touch Position	1.6	1.19	PASSED
TDMA 800	384 / 836.52	27.22	Right Touch Position	1.6	0.70	PASSED

2.1.2 Body Worn Configuration

Mode	Ch / f (MHz)	Power (dBm)	Position	Limit (mW/g)	Measured (mW/g)	Result
AMPS	991 / 824.04	24.65	Flat – Back of Phone with 15mm Measurement Distance	1.6	1.18	PASSED
TDMA 800	384 / 836.52	27.22	Flat – Back of Phone with 15mm Measurement Distance	1.6	0.69	PASSED

2.1.3 Measurement Uncertainty

Combined Standard Uncertainty	± 13.6%
Expanded Standard Uncertainty (k=2)	± 27.1%

3. DESCRIPTION OF TESTED DEVICE

Device category	Portable device	
Exposure environment	Uncontrolled exposure	
Unit type	Prototype unit	
Case type	Fixed case	
Mode of Operation	AMPS	TDMA 800
Maximum Device Rating	Power Class III	Power Class III
Modulation Mode	Frequency Modulation	Quadrature Phase Shift Keying
Duty Cycle	1	1/3
Transmitter Frequency Range (MHz)	824.04 – 848.97	824.04 – 848.97

3.1 Picture of Phone

The tested device, GMLRH-40 is shown below: -



3.2 Description of the Antenna

Type	Internal integrated antenna
Location	Inside the back cover, near the top of the device

3.3 Battery Options

There are three battery options available for the tested device, a BMC-3, BLC-2(1000mAh), and a BLC-2(950mAh). The BMC-3 battery is rechargeable Ni-MH and both BLC-2 batteries are rechargeable Li-ion.

3.4 Body Worn Operation

Body SAR was evaluated with a separation distance of 15mm and with the HDE-2 headset connected.

4. TEST CONDITIONS

4.1 Ambient Conditions

Ambient temperature (°C)	22±2
Tissue simulating liquid temperature (°C)	20±2
Humidity (%)	43

4.2 RF characteristics of the test site

Tests were performed in a fully enclosed RF shielded environment.

4.3 Test Signal, Frequencies, and Output Power

The device was controlled by using a radio tester. Communication between the device and the tester was established by air link.

Measurements were performed on the lowest, middle and highest channels of the operating band.

The phone was set to maximum power level during all tests and at the beginning of each test the battery was fully charged.

The DASY3 system measures power drift during SAR testing by comparing e-field in the same location at the beginning and at the end of measurement. These records were used to monitor stability of power output.



5. DESCRIPTION OF THE TEST EQUIPMENT

The measurements were performed with an automated near-field scanning system, DASY3, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

Test Equipment	Model	NMP #	Serial Number	Due Date
DASY3, Data Acquisition	DAE V1	2292	389	07/03
E-field Probe	ET3DV6	2954	1504	07/03
Dipole Validation Kit	D900V2	3670	025	10/03
Dipole Validation Kit	D835V2	3453	455	07/03

E-field probe and dipole validation kit calibration records are presented in Appendix D.

Additional equipment (required for validation).

Test Equipment	Model	NMP #	Serial Number	Due Date
Signal Generator	HP 8648C	0409	3836A04346	06/03
Amplifier	AR 5S1G4	0188	25583	-
Coupler	AR DC7144	2057	25304	-
Power Meter	Boonton 4232A	2996	64701	05/03
Power Sensor	Boonton 51015	2997	32187	05/03
Power Sensor	Boonton 51015	2998	32188	05/03
Thermometer	Omega CL27	3391	T-228448	06/03
Network Analyzer	HP 8720D	0455	US38431353	06/03
Dielectric Probe Kit	Agilent 85070C	3089	US99360172	-

The calibration interval on all items listed above can be obtained from the Engineering Services Group within NMP, Product Creation – Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC – Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

5.1 System Accuracy Verification

The manufacturer calibrates the probes annually. Dielectric parameters of the simulating liquids are measured using an Agilent 85070C dielectric probe kit and an HP 8720D network analyzer.

SAR measurements of the tested device were performed within 24 hours of system accuracy verification, which was done using the dipole validation kit.

The dipole antenna's, which are manufactured by Schmid & Partner Engineering AG, are matched to be used near a flat phantom filled with tissue simulating solution. Length of the 835 MHz dipole is 161mm with an overall height of 330mm; length of the 900MHz dipole is 149mm with an overall height of 300mm. A specific distance holder is used in the positioning to ensure correct spacing between the phantom and the dipole.

A power level of 250 mW was supplied to the dipole antenna placed under the flat section of the SAM phantom. Validation results are in the table below and a print out of the validation tests are presented in Appendix B. All the measured parameters were within specification.

5.1.1 Head Tissue

Tissue	f (MHz)	Description (Date Measured)	SAR (W/kg), 1g	Dielectric Parameters		Temp (°C)
				ϵ_r	σ (S/m)	
Head	900	20-Feb-03	10.7	40.1	1.01	20.5
		21-Feb-03	11.8	39.7	0.99	20.3
		24-Feb-03	10.6	39.6	1.00	20.5
		26-Feb-03	12.4	39.5	1.02	20.3
		05-Mar-03	11.8	41.0	0.99	20.6
		06-Mar-03	11.7	39.5	0.97	20.2
		07-Mar-03	11.9	40.2	0.98	20.0
		Reference Result	11.4	41.5	0.97	N/A

5.1.2 Muscle Tissue

Tissue	f (MHz)	Description (Date Measured)	SAR (W/kg), 1g	Dielectric Parameters		Temp (°C)
				ϵ_r	σ (S/m)	
Muscle	835	27-Feb-03	10.4	55.9	0.93	20.2
		04-Mar-03	11.0	55.8	0.95	20.6
		05-Mar-03	10.4	55.6	0.94	20.4
		Reference Result	10.1	55.3	0.95	N/A

5.2 Tissue Simulants

All dielectric parameters of tissue simulants were measured within 24 hours of SAR measurements. The depth of the tissue simulant in the ear reference point of the phantom was $15\text{cm} \pm 5\text{mm}$ during all tests. Volume for each tissue simulant was 27 litres.

5.2.1 Head Tissue Simulant

The composition of the brain tissue simulating liquid for 835 MHz is: -

51.07%	De-Ionized Water
47.31%	Sugar
1.15%	Salt
0.23%	HEC
0.24%	Bactericide

f (MHz)	Description (Date Measured)	Dielectric Parameters		Temp (°C)
		ϵ_r	σ (S/m)	
836.52	20-Feb-03	40.9	0.95	20.5
	21-Feb-03	40.4	0.94	20.3
	24-Feb-03	40.4	0.94	20.5
	26-Feb-03	40.3	0.96	20.3
	05-Mar-03	41.8	0.93	20.6
	06-Mar-03	40.3	0.91	20.2
	07-Mar-03	41.0	0.92	20.0
	Recommended Values	41.5	0.90	N/A

Recommended values are adopted from OET Bulletin 65 (97-01) Supplement C (01-01).

5.2.2 Muscle Tissue Simulant

The composition of the muscle tissue simulating liquid for 835 MHz is: -

65.45%	De-Ionized Water
34.31%	Sugar
0.62%	Salt
0.10%	Bactericide

f (MHz)	Description (Date Measured)	Dielectric Parameters		Temp (°C)
		ϵ_r	σ (S/m)	
836.52	27-Feb-03	55.9	0.93	20.2
	04-Mar-03	55.8	0.95	20.6
	05-Mar-03	55.6	0.94	20.4
	Recommended Values	55.2	0.97	N/A

Recommended values are adopted from OET Bulletin 65 (97-01) Supplement C (01-01).

5.3 Phantoms

"SAM v4.0" phantom", manufactured by SPEAG, was used during the measurement. It has a fiberglass shell integrated into a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. Reference markings



on the phantom allow the complete set-up of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

The thickness of phantom shell is 2 mm except for the ear, where an integrated ear spacer provides a 6 mm spacing from the tissue boundary.

Manufacturer reports tolerance in shell thickness to be ± 0.1 mm.

5.4 Isotropic E-Field Probe ET3DV6

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycol ether)
Calibration	Calibration certificate in Appendix D
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms



6. DESCRIPTION OF THE TEST PROCEDURE

6.1 Test Positions

The device was placed into a holder using a special positioning tool, which aligns the bottom of the device with the holder and ensures that holder contacts only to the sides of the device. After positioning is done, the tool is removed. This method provides standard positioning and separation, and also ensures free space for antenna.

Device holder was provided by SPEAG together with the DASY3.



6.1.1 Against Phantom Head

Measurements were made on both the "left hand" and "right hand" side of the phantom.

The device was positioned against phantom according to OET Bulletin 65 (97-01) Supplement C (01-01). Definitions of terms used in aligning the device to a head phantom are available in IEEE Std 1528-200X "Draft Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques"


6.1.1.1 Initial Ear Position

The device was initially positioned with the earpiece region pressed against the ear spacer of a head phantom parallel to the "Neck-Front" line defined along the base of the ear spacer that contains the "ear reference point". The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane".

6.1.1.2 Touch Position

"Initial ear position" alignments are maintained and the device is brought toward the mouth of the head phantom by pivoting along the "Neck-Front" line until any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom or when any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.


The following picture shows the tested device in the right touch position:

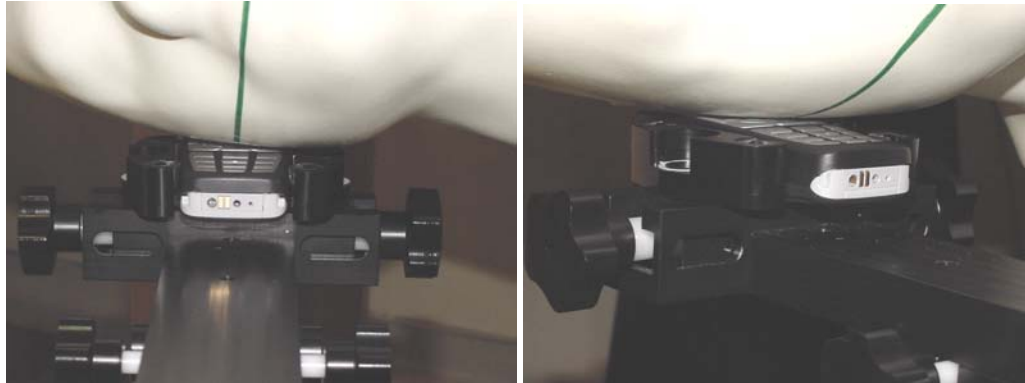

6.1.1.3 Tilt Position

In the "Touch Position", if the earpiece of the device is not in full contact with the phantom's ear spacer and the peak SAR location for the "touch position" is located at the ear spacer region or corresponds to the earpiece region of the handset, the device is returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer. Otherwise, the device is moved away from the cheek perpendicular to the line passes through both "ear reference points" for approximate 2-3 cm. While it is in this position, the device is tilted away from the mouth with respect to the "test device reference point" by 15°. After the tilt, it is then moved back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process is repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously.


The following picture shows the tested device in the right tilt position:

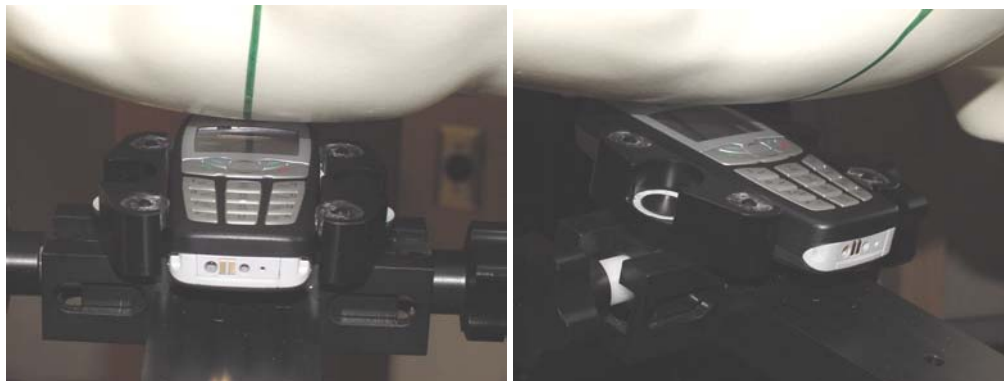

6.1.2 Body Worn Configuration

Body SAR measurements were performed with the antenna facing towards the flat part of the phantom with a separation distance of 15mm and with the HDE-2 headset connected.

The following picture shows the tested device in the body test position: -

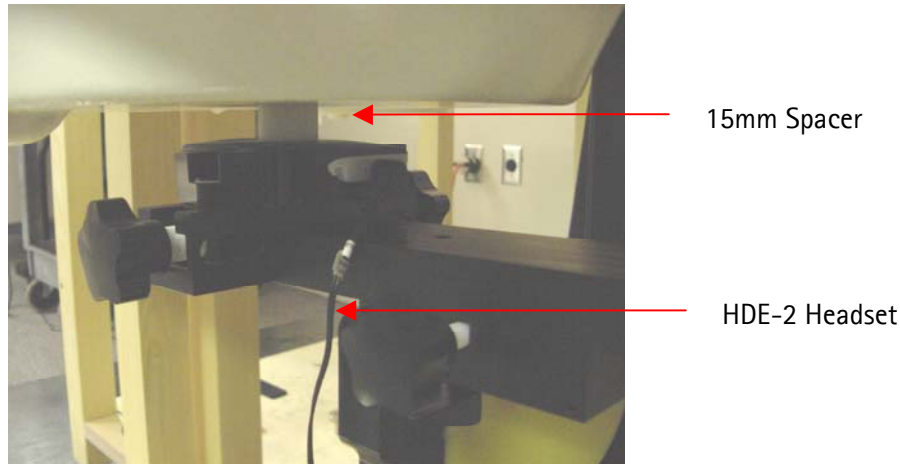

Note: the 15mm spacer was removed before the SAR measurement.

6.2 Scan Procedures

First coarse scans are used for quick determination of the field distribution. Next a cube scan, 5x5x7 points; spacing between each point 8x8x5 mm, is performed around the highest E-field value to determine the averaged SAR-distribution over 1g.

6.3 SAR Averaging Methods

The maximum SAR value is averaged over its volume using interpolation and extrapolation.

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot" -condition [W. Gander, Computermathematik, p. 141-150] (x, y and z -directions) [Numerical Recipes in C, Second Edition, p 123].

The extrapolation is based on least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 30 mm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1mm from one another.

7. MEASUREMENT UNCERTAINTY

7.1 Description of Individual Measurement Uncertainty

7.1.1 Assessment Uncertainty

Uncertainty description	Uncert. value %	Probability distribution	Div.	c_i	Stand. uncert (1g) %	v_i or v_{eff}
Measurement System						
Probe calibration	± 4.4	normal	1	1	± 4.4	∞
Axial isotropy of the probe	± 4.7	rectangular	$\sqrt{3}$	$(1-c_p)^{1/2}$	± 1.9	∞
Sph. Isotropy of the probe	± 9.6	rectangular	$\sqrt{3}$	$(c_p)^{1/2}$	± 3.9	∞
Spatial resolution	± 0.0	rectangular	$\sqrt{3}$	1	± 0.0	∞
Boundary effects	± 5.5	rectangular	$\sqrt{3}$	1	± 3.2	∞
Probe linearity	± 4.7	rectangular	$\sqrt{3}$	1	± 2.7	∞
Detection limit	± 1.0	rectangular	$\sqrt{3}$	1	± 0.6	∞
Readout electronics	± 1.0	normal	1	1	± 1.0	∞
Response time	± 0.8	rectangular	$\sqrt{3}$	1	± 0.5	∞
Integration time	± 1.4	rectangular	$\sqrt{3}$	1	± 0.8	∞
RF ambient conditions	± 3.0	rectangular	$\sqrt{3}$	1	± 1.7	∞
Mech. constrains of robot	± 0.4	rectangular	$\sqrt{3}$	1	± 0.2	∞
Probe positioning	± 2.9	rectangular	$\sqrt{3}$	1	± 1.7	∞
Extrap. and integration	± 3.9	rectangular	$\sqrt{3}$	1	± 2.3	∞
Test Sample Related						
Device positioning	± 6.0	normal	0.89	1	± 6.7	12
Device holder uncertainty	± 5.0	normal	0.84	1	± 5.9	8
Power drift	± 5.0	rectangular	$\sqrt{3}$	1	± 2.9	∞
Phantom and Setup						
Phantom uncertainty	± 4.0	rectangular	$\sqrt{3}$	1	± 2.3	∞
Liquid conductivity (target)	± 5.0	rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid conductivity (meas.)	± 10.0	rectangular	$\sqrt{3}$	0.6	± 3.5	∞
Liquid permittivity (target)	± 5.0	rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Liquid permittivity (meas.)	± 5.0	rectangular	$\sqrt{3}$	0.6	± 1.7	∞
Combined Standard Uncertainty					± 13.6	
Expanded Standard Uncertainty (k=2)					± 27.1	

8. RESULTS

Corresponding SAR distribution print outs of maximum results in every operating mode and position are shown in Appendix C; z-axis plots of the maximum measurement results in head and body worn configurations are also included. The SAR distributions are substantially similar or equivalent to the plots submitted, regardless of used channel in each mode and position unless otherwise presented.

8.1 Head Configuration

Testing was initially performed on the mid-channel - if the measured SAR value was 0.80mW/g or higher, then testing was also performed on the low and high channels.

BMC-3 Battery

Mode	Channel/ f (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Touch	Tilt	Touch	Tilt
AMPS	991 / 824.04	24.65	0.88	0.67	0.96	0.72
	384 / 836.52	24.60	1.05	0.81	1.17	0.75
	799 / 848.97	24.35	1.06	0.84	1.17	0.77

Mode	Channel/ f (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Touch	Tilt	Touch	Tilt
TDMA 800	991 / 824.04	27.20	-	-	-	-
	384 / 836.52	27.22	0.60	0.47	0.69	0.48
	799 / 848.97	26.84	-	-	-	-

Battery Check with BLC-2 (1000 mAh)

Mode	Channel/ f (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Touch	Tilt	Touch	Tilt
AMPS	991 / 824.04	24.65	0.80	0.58	0.95	0.60
	384 / 836.52	24.60	1.12	0.86	1.14	0.79
	799 / 848.97	24.35	1.10	0.90	1.19	0.79

Mode	Channel/ f (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Touch	Tilt	Touch	Tilt
TDMA 800	384 / 836.52	27.22	0.63	0.46	0.70	0.50

Battery Check with BLC-2 (950 mAh)

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Touch	Tilt	Touch	Tilt
AMPS	991 / 824.04	24.65	0.82	0.59	0.96	0.63
	384 / 836.52	24.60	1.10	0.76	1.16	0.77
	799 / 848.97	24.35	1.12	0.82	1.16	0.79

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)			
			Left-hand		Right-hand	
			Touch	Tilt	Touch	Tilt
TDMA 800	384 / 836.52	27.22	0.65	0.42	0.64	0.45

8.2 Body Worn Configuration

Body SAR measurements were performed with the HDE-2 headset connected.

BMC-3 Battery

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)
			HDE-2
AMPS	991 / 824.04	24.65	1.18
	384 / 836.52	24.60	0.90
	799 / 848.97	24.35	0.92

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)
			HDE-2
TDMA 800	991 / 824.04	27.20	-
	384 / 836.52	27.22	0.61
	799 / 848.97	26.84	-

Battery Check with BLC-2 (1000 mAh)

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)
			HDE-2
AMPS	991 / 824.04	24.65	0.78
	384 / 836.52	24.60	0.99
	799 / 848.97	24.35	0.89

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)
			HDE-2
TDMA 800	991 / 824.04	27.20	-
	384 / 836.52	27.22	0.60
	799 / 848.97	26.84	-

Battery Check with BLC-2 (950 mAh)


Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)
			HDE-2
AMPS	991 / 824.04	24.65	-
	384 / 836.52	24.60	0.68
	799 / 848.97	24.35	-

Mode	Channel/ <i>f</i> (MHz)	Power (dBm)	SAR, averaged over 1g (mW/g)
			HDE-2
TDMA 800	991 / 824.04	27.20	-
	384 / 836.52	27.22	0.69
	799 / 848.97	26.84	-

APPENDIX A: SCOPE OF ACCREDITATION FOR A2LA

TCC-Dallas is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below:



 American Association for Laboratory Accreditation

SCOPE OF ACCREDITATION TO ISO/IEC 17025:1999

NOKIA MOBILE PHONES
TEST & CERTIFICATION CENTER - DALLAS
6021 Connection Drive
Irving, TX 75039
Alan Ewing Phone: 972 894 4744

ELECTRICAL

Valid to: November 30, 2003 Certificate Number: 1819-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following Electromagnetic Compatibility (EMC), Specific Absorption Rate (SAR), and tests on wireless communications devices:

Tests	Test Method
Emissions	
Conducted and Radiated	CFR 47 Part 2, 15, 22, 24 CISPR 22; EN 55022 ICES-003; RSS-128, 132 and 133 3GPP TS 51.010-1 Section 12.2 ETSI EN 301 489-1; EN 301 489-7 (using ANSI C63.4 and RSS-212)
Specific Absorption Rate	IEEE 1528 EN 50360; EN 50361 CFR 47 Parts 2 and 24 OET Bulletin 65 and Supplement C RSS-102
Immunity	
Vehicular Immunity	ISO 7637-1; ETSI EN 301 489-1; EN 301 489-7
Electrostatic Discharge (ESD)	EN 61000-4-2; ETSI EN 301 489-1; EN 301 489-7
RF Radiated	EN 61000-4-3; ETSI EN 301 489-1; EN 301 489-7
Electrical Fast Transient/Burst	EN 61000-4-4; ETSI EN 301 489-1; EN 301 489-7
Surge	EN 61000-4-5; ETSI EN 301 489-1; EN 301 489-7
Conducted	EN 61000-4-6; ETSI EN 301 489-1; EN 301 489-7
Voltage Dips, Short Interruptions and Voltage Variations	EN 61000-4-11; ETSI EN 301 489-1; EN 301 489-7

(A2LA Cert. No. 1819.01) Revised 09/18/02 Page 1 of 2
5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

Tests	Test Method
Wireless	
GSM (850/900/1800/1900 MHz)	3GPP TS 51.010-1, -2, -3 3GPP TS 11.10-4 ETSI EN 301 489-1
TDMA	CTIA TDMA/AMPS Test Plan (excluding Sections 7.3.3 & 7.3.4) TIA/EIA-136-270

(A2LA Cert. No. 1819.01) Revised 09/18/02 Page 2 of 2

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined to be in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, such data would not be covered by this laboratory's A2LA accreditation

APPENDIX B: VALIDATION TEST PRINTOUTS

Dipole 900 MHz, Head Validation

SAM 1 (Cellular - Brain Tissue)

Frequency: 900 MHz; Crest factor: 1.0

Validation 900MHz - Brain Tissue: $\sigma = 1.01$ mho/m $\epsilon_r = 40.1$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.37 mW/g ± 0.07 dB, SAR (1g): 2.67 mW/g ± 0.07 dB, SAR (10g): 1.65 mW/g ± 0.06 dB, (Worst-case extrapolation)

Penetration depth: 10.9 (9.9, 12.4) [mm]

Powerdrift: -0.03 dB

Liquid Temperature (°C): 20.5

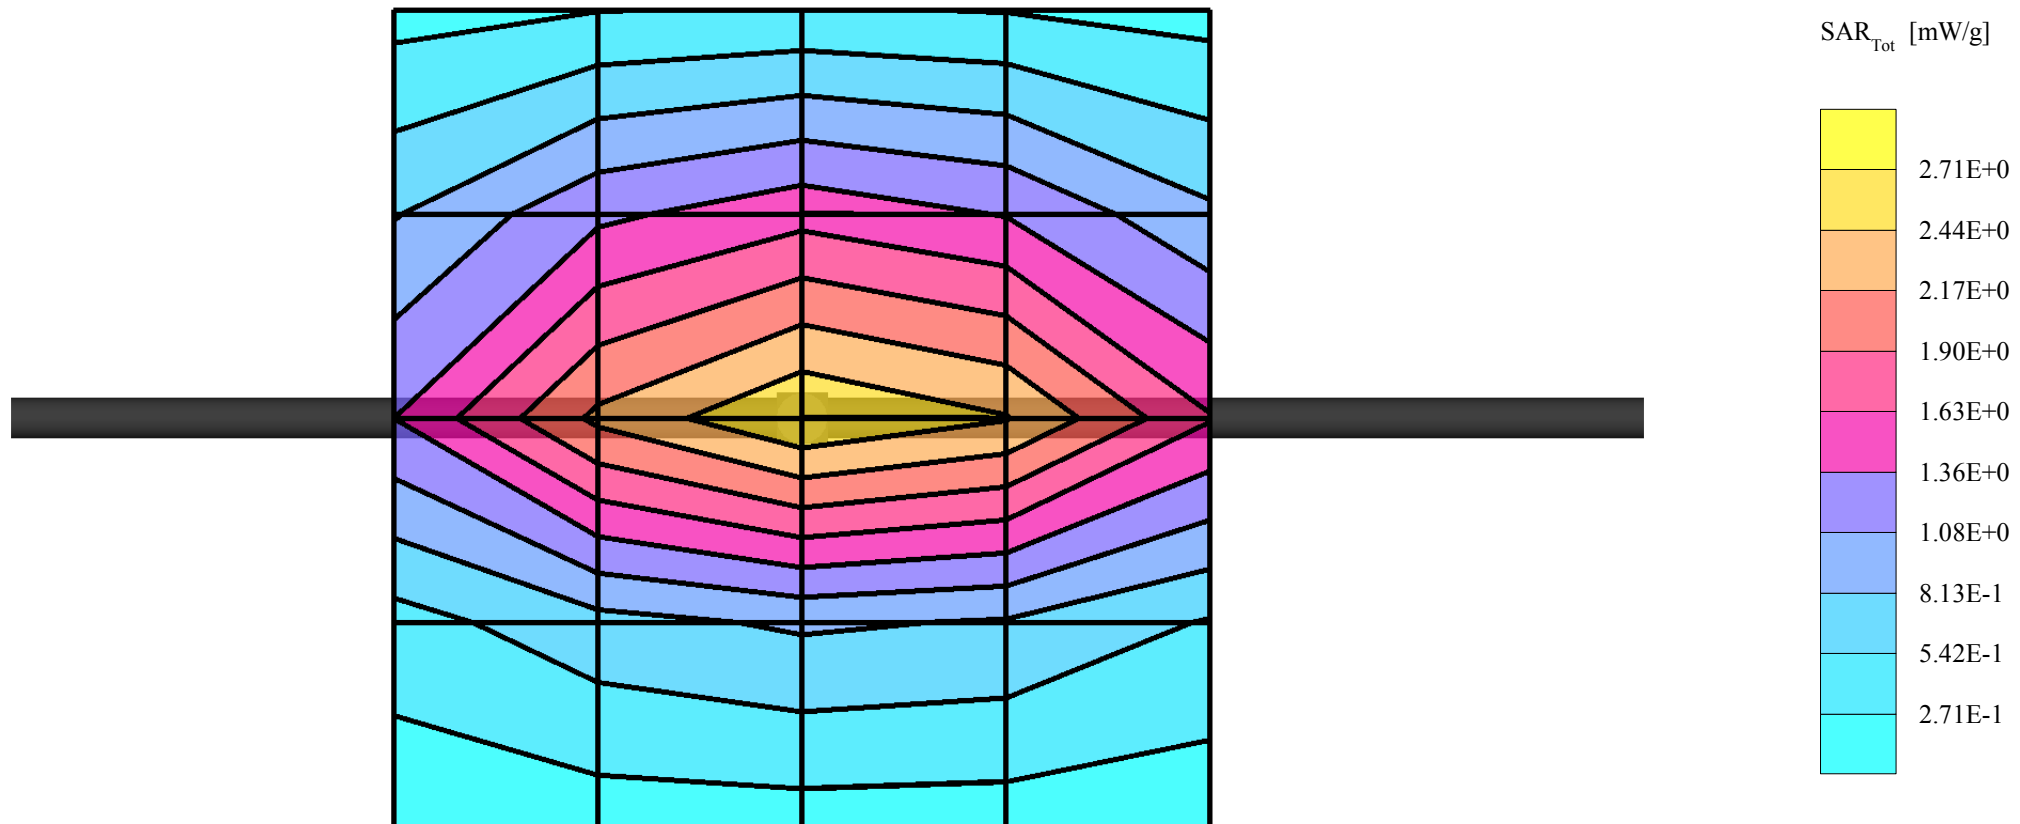

Dipole 900 MHz, Head Validation

SAM 1 (Cellular - Brain Tissue)

Frequency: 900 MHz; Crest factor: 1.0

Validation 900MHz - Brain Tissue: $\sigma = 0.99$ mho/m $\epsilon_r = 39.7$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.85 mW/g ± 0.06 dB, SAR (1g): 2.96 mW/g ± 0.06 dB, SAR (10g): 1.84 mW/g ± 0.06 dB, (Worst-case extrapolation)

Penetration depth: 10.9 (9.9, 12.3) [mm]

Powerdrift: -0.05 dB

Liquid Temperature (°C): 20.3

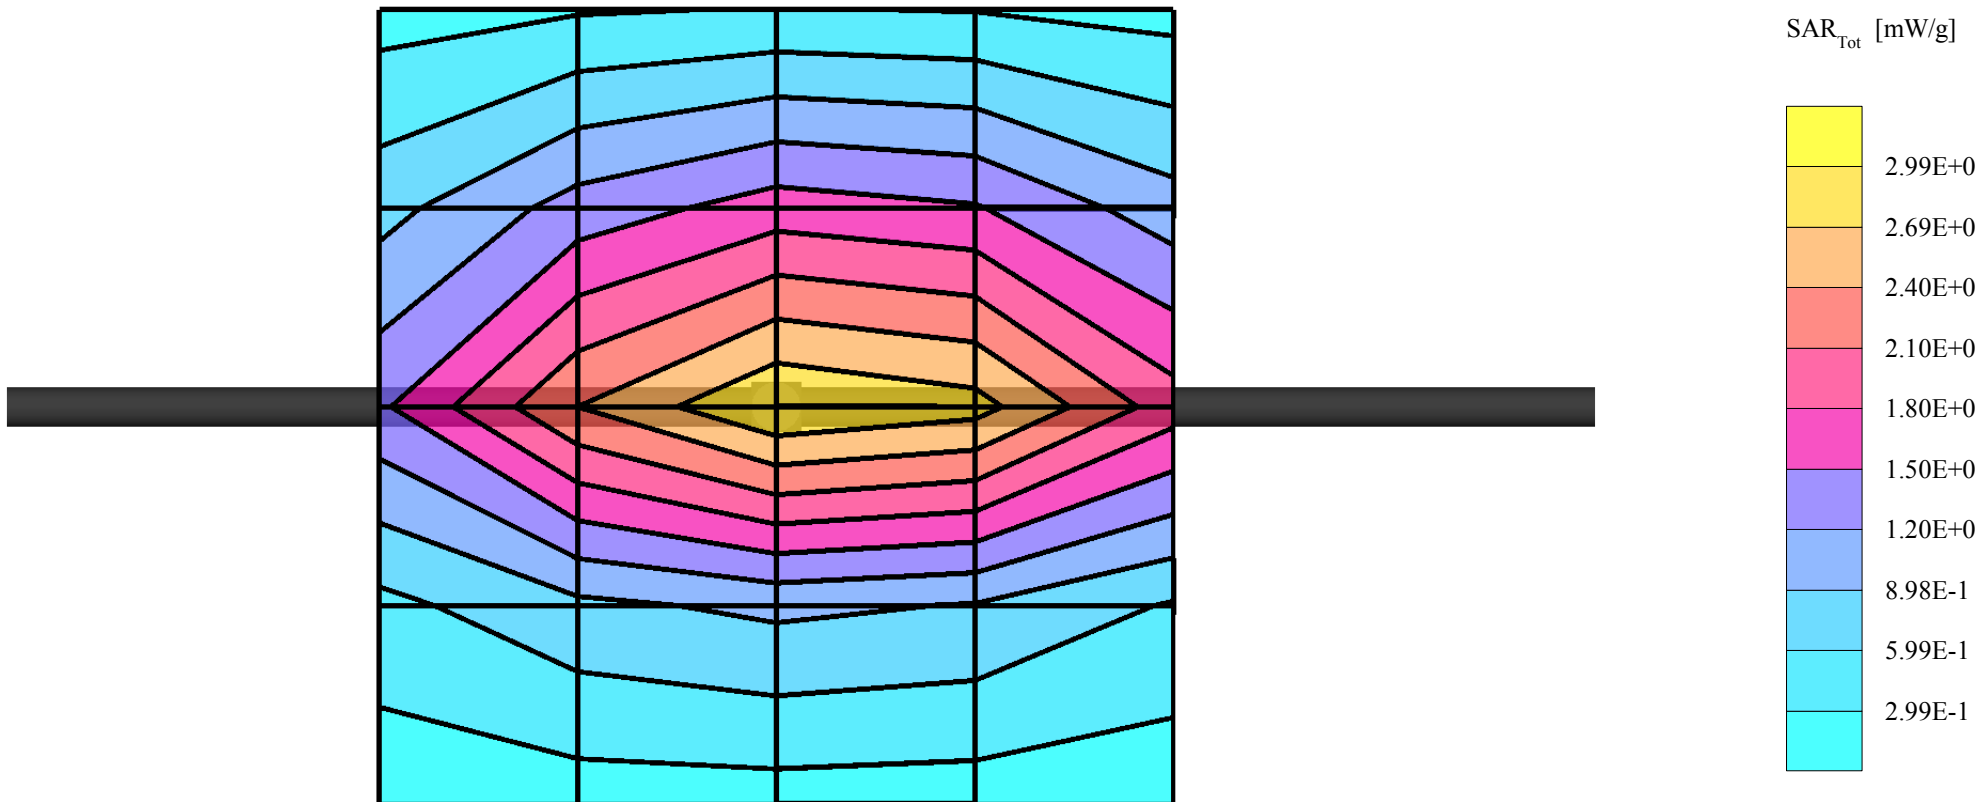

Dipole 900 MHz, Head Validation

SAM 1 (Cellular - Brain Tissue)

Frequency: 900 MHz; Crest factor: 1.0

Validation 900MHz - Brain Tissue: $\sigma = 1.00$ mho/m $\epsilon_r = 39.6$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.32 mW/g ± 0.07 dB, SAR (1g): 2.65 mW/g ± 0.06 dB, SAR (10g): 1.65 mW/g ± 0.06 dB, (Worst-case extrapolation)

Penetration depth: 11.0 (10.0, 12.4) [mm]

Powerdrift: -0.04 dB

Liquid Temperature (°C): 20.5

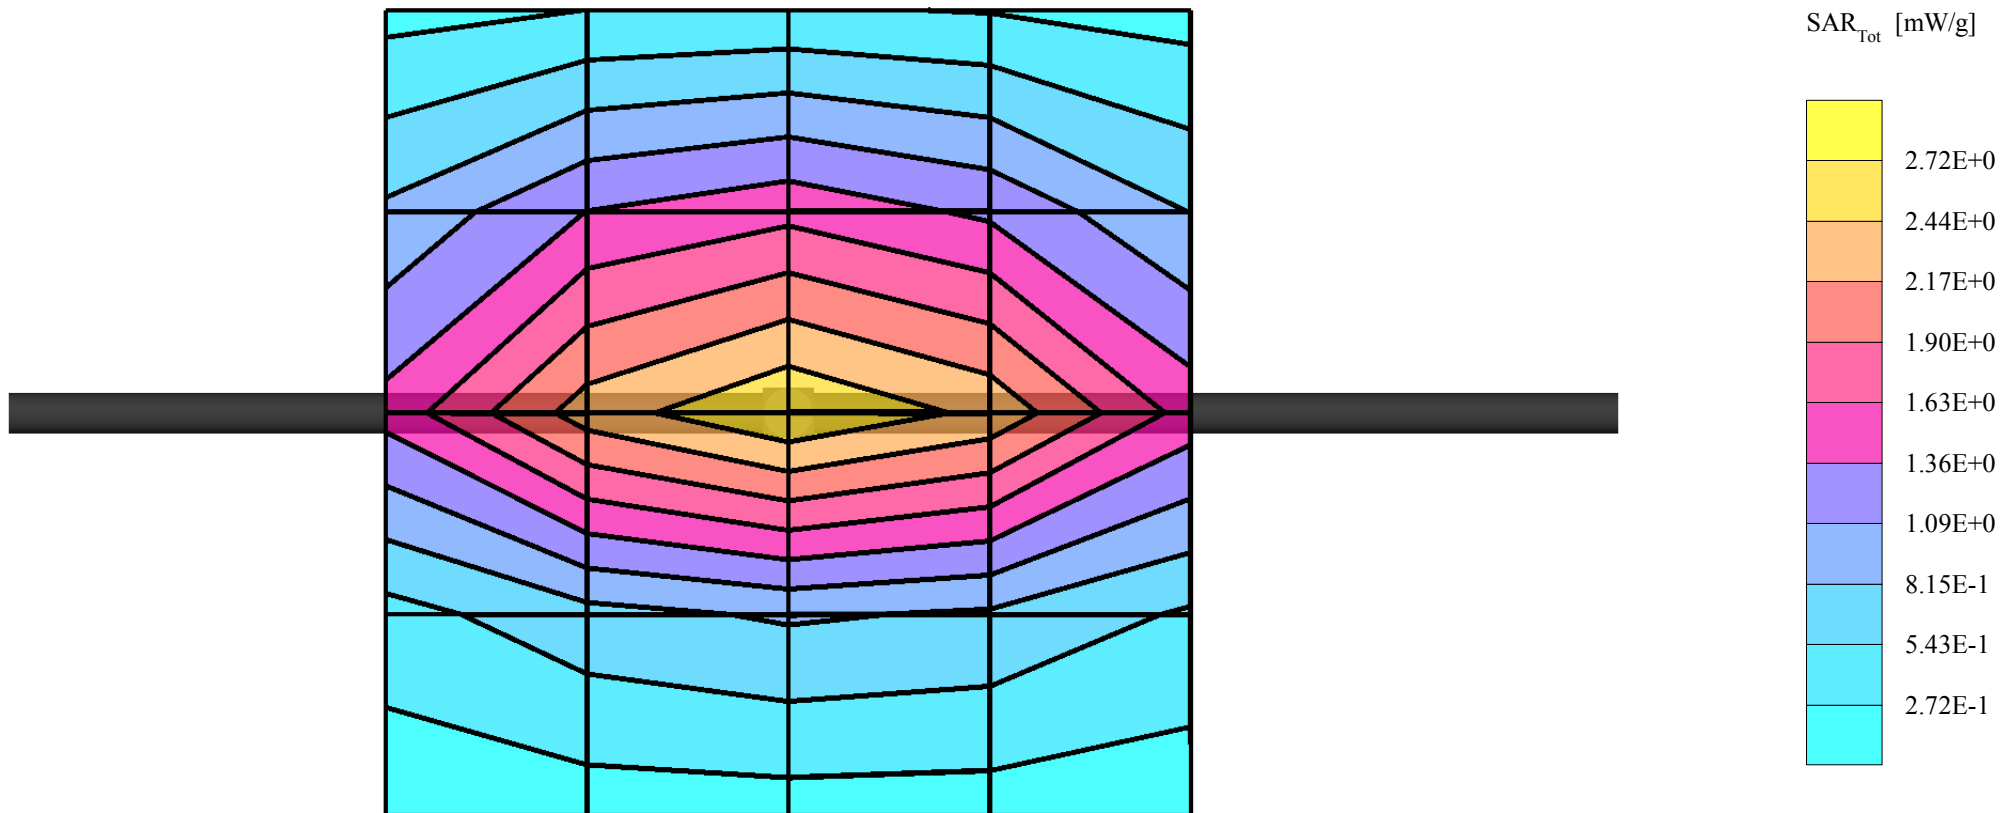

Dipole 900 MHz, Head Validation

SAM 1 (Cellular - Brain Tissue)

Frequency: 900 MHz; Crest factor: 1.0

Validation 900MHz - Brain Tissue: $\sigma = 1.02$ mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 5.09 mW/g ± 0.08 dB, SAR (1g): 3.11 mW/g ± 0.07 dB, SAR (10g): 1.94 mW/g ± 0.07 dB, (Worst-case extrapolation)

Penetration depth: 11.0 (9.9, 12.5) [mm]

Powerdrift: -0.12 dB

Liquid Temperature (°C): 20.3

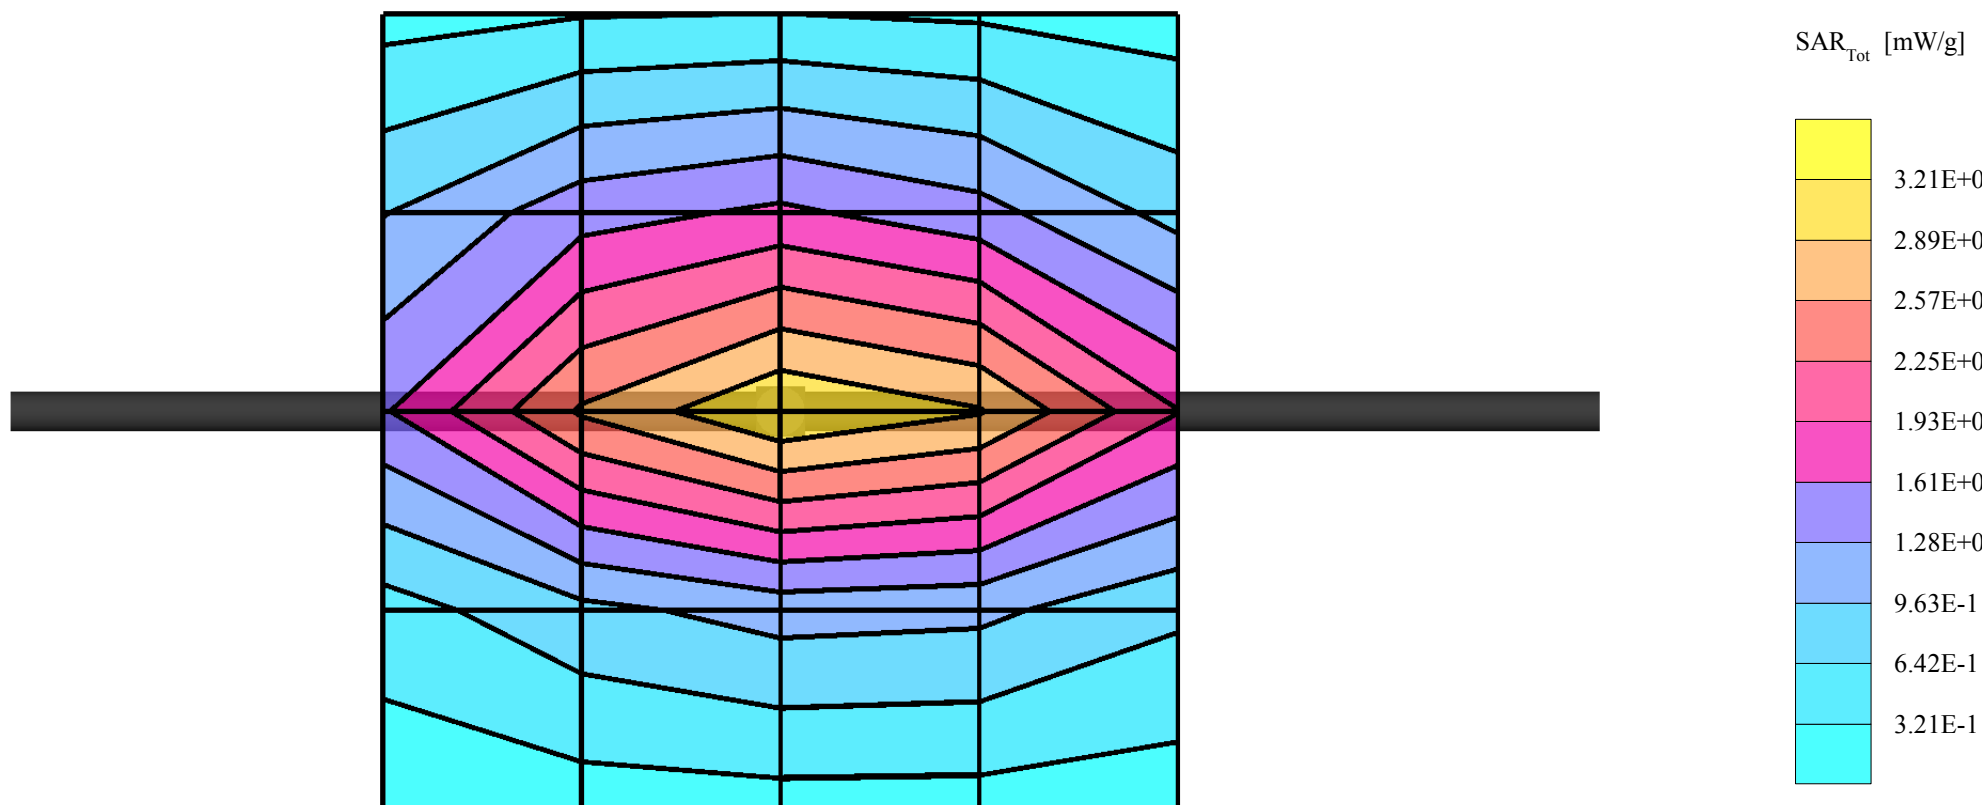

Dipole 900 MHz, Head Validation

SAM 1 (Cellular - Brain Tissue)

Frequency: 900 MHz; Crest factor: 1.0

Validation 900MHz - Brain Tissue: $\sigma = 0.99$ mho/m $\epsilon_r = 41.0$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.80 mW/g ± 0.05 dB, SAR (1g): 2.96 mW/g ± 0.06 dB, SAR (10g): 1.85 mW/g ± 0.06 dB, (Worst-case extrapolation)

Penetration depth: 11.2 (10.1, 12.7) [mm]

Powerdrift: -0.17 dB

Liquid Temperature (°C): 20.6

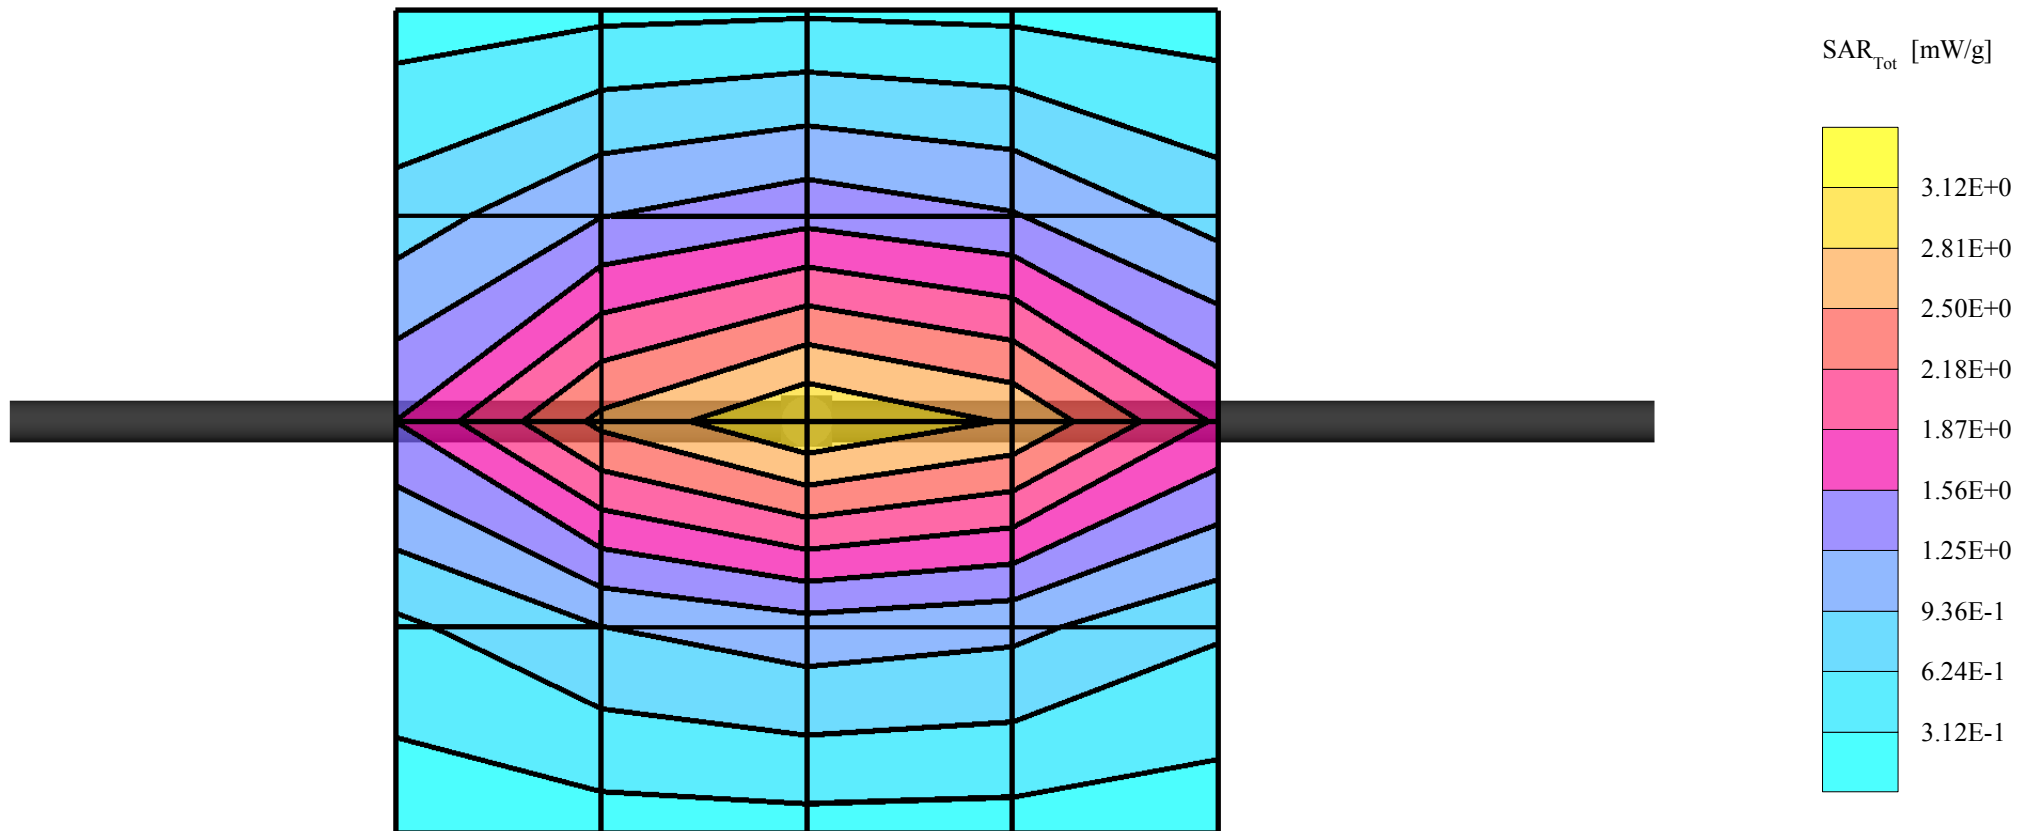

Dipole 900 MHz, Head Validation

SAM 1 (Cellular - Brain Tissue)

Frequency: 900 MHz; Crest factor: 1.0

Validation 900MHz - Brain Tissue: $\sigma = 0.97$ mho/m $\epsilon_r = 39.5$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.73 mW/g ± 0.07 dB, SAR (1g): 2.93 mW/g ± 0.07 dB, SAR (10g): 1.83 mW/g ± 0.06 dB, (Worst-case extrapolation)

Penetration depth: 11.2 (10.2, 12.7) [mm]

Powerdrift: -0.19 dB

Liquid Temperature (°C): 20.2

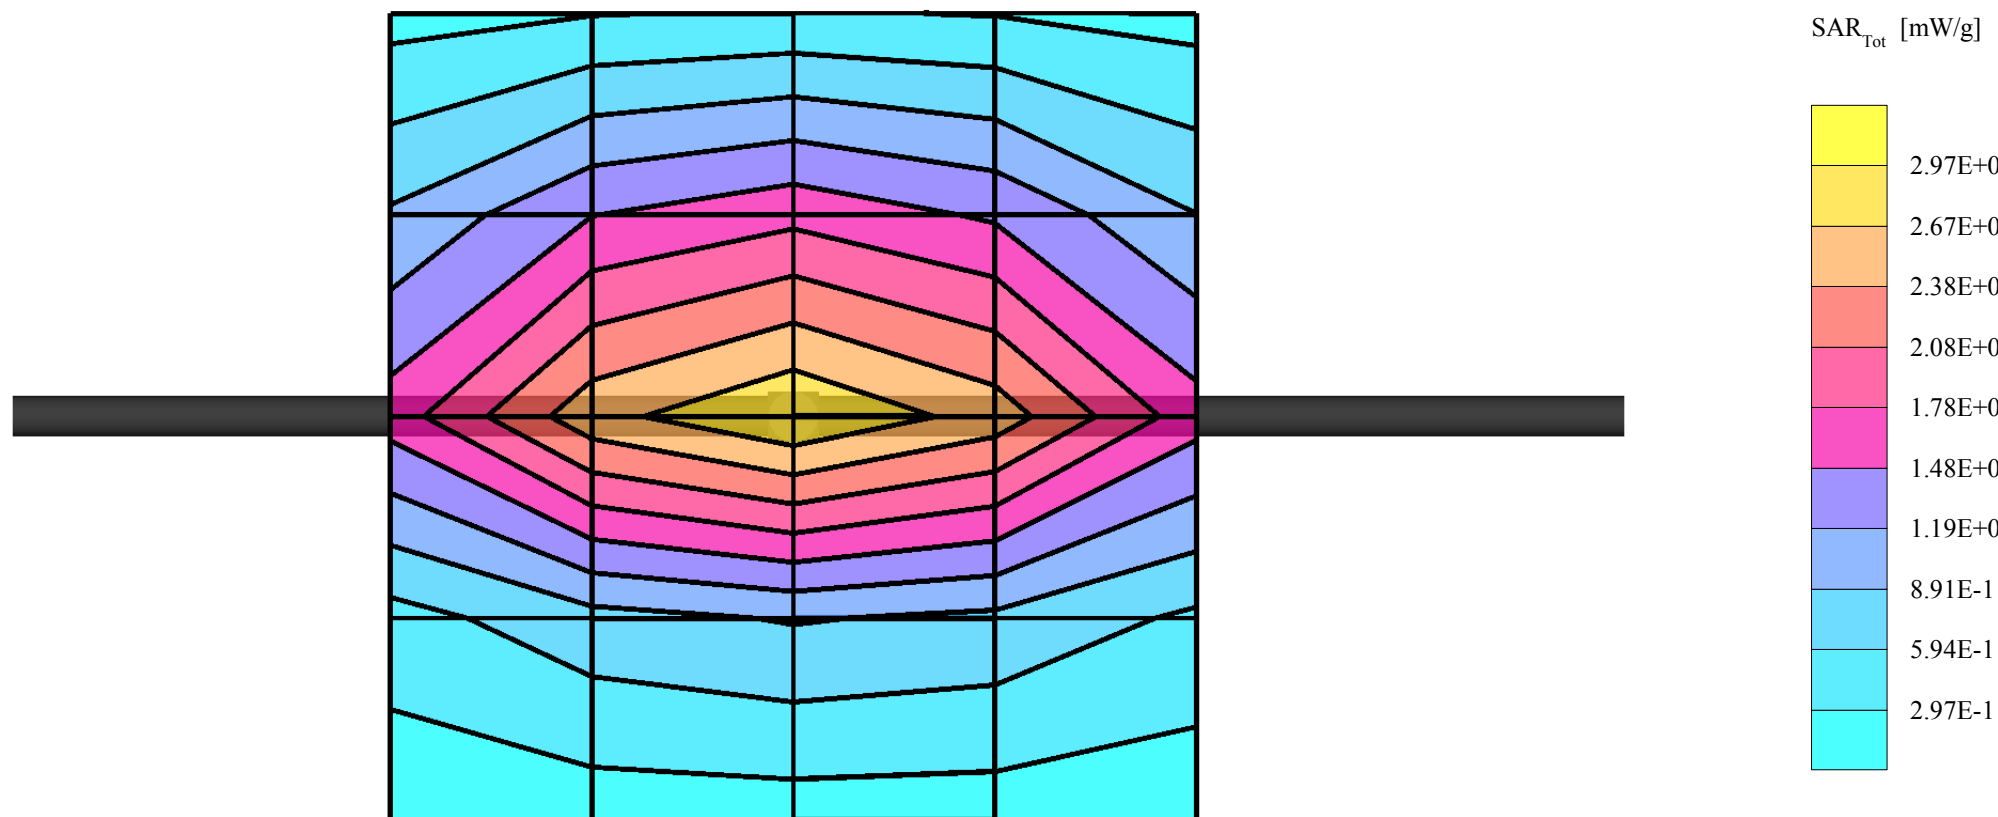

Dipole 900 MHz, Head Validation

SAM 1 (Cellular - Brain Tissue)

Frequency: 900 MHz; Crest factor: 1.0

Validation 900MHz - Brain Tissue: $\sigma = 0.98$ mho/m $\epsilon_r = 40.2$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.83 mW/g ± 0.06 dB, SAR (1g): 2.97 mW/g ± 0.05 dB, SAR (10g): 1.86 mW/g ± 0.05 dB, (Worst-case extrapolation)

Penetration depth: 11.2 (10.1, 12.7) [mm]

Powerdrift: -0.15 dB

Liquid Temperature (°C): 20.0

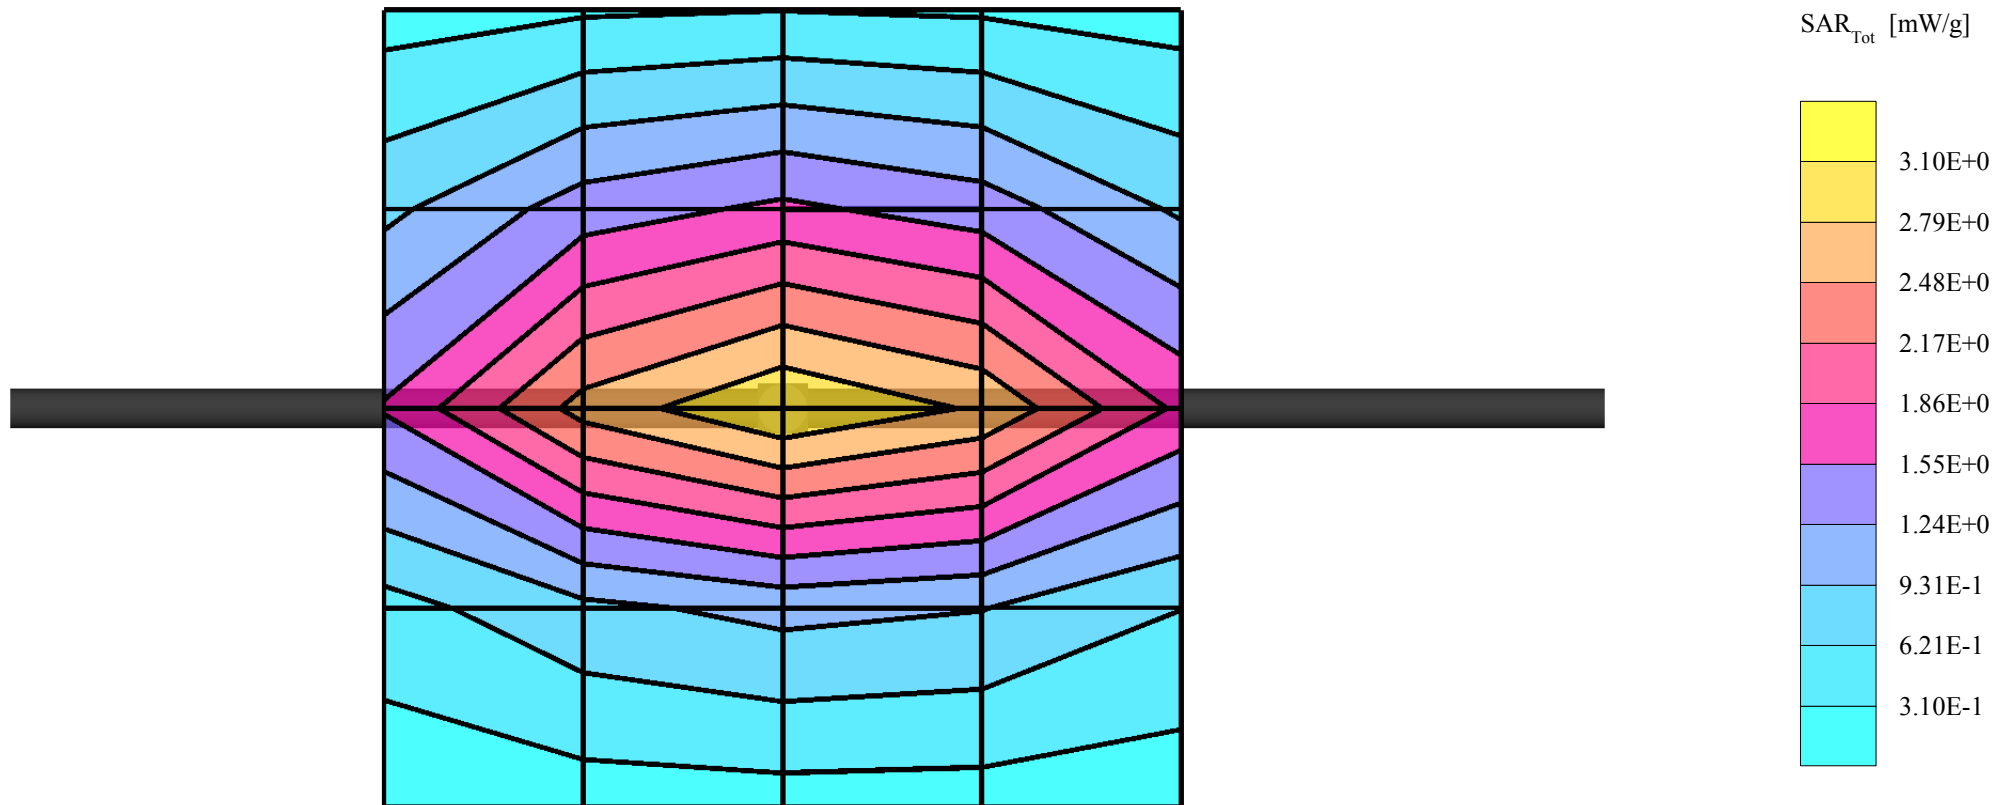

Dipole 835 MHz, Body Validation

SAM 2 (Cellular - Muscle Tissue)

Frequency: 835 MHz; Crest factor: 1.0

Validation 835MHz - Muscle Tissue: $\sigma = 0.93$ mho/m $\epsilon_r = 55.9$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.04 mW/g ± 0.05 dB, SAR (1g): 2.61 mW/g ± 0.05 dB, SAR (10g): 1.70 mW/g ± 0.05 dB, (Worst-case extrapolation)

Penetration depth: 12.9 (11.4, 14.8) [mm]

Powerdrift: -0.12 dB

Liquid Temperature (°C): 20.2

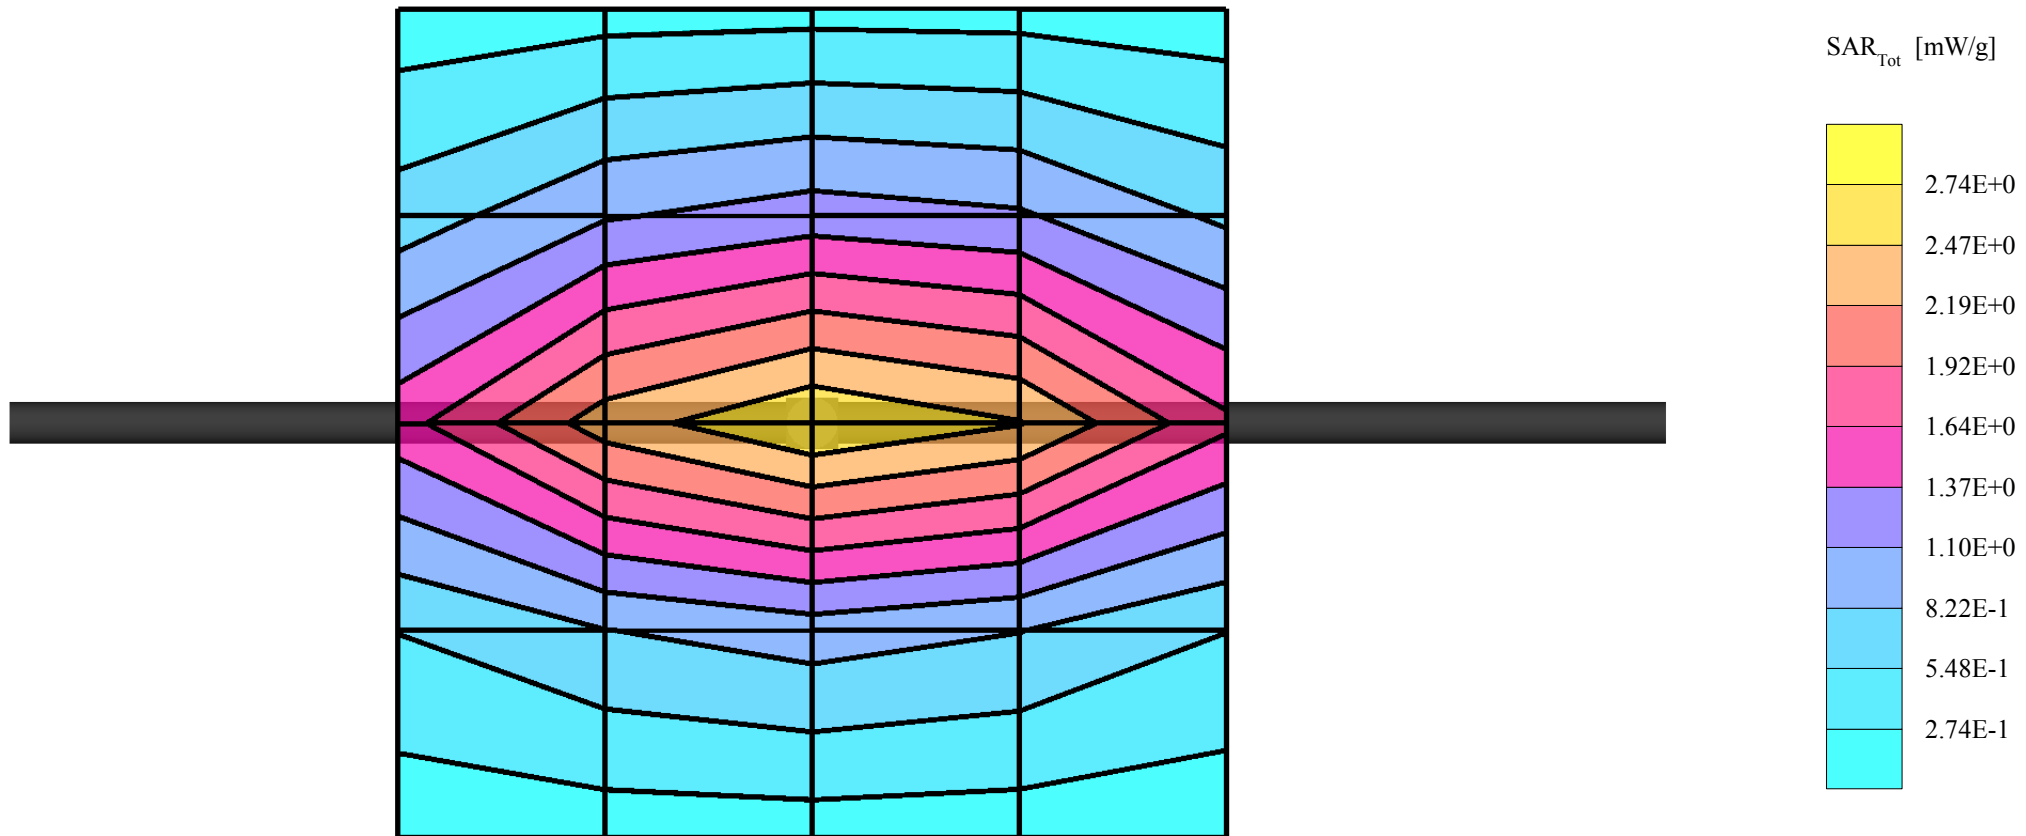

Dipole 835 MHz, Body Validation

SAM 2 (Cellular - Muscle Tissue)

Frequency: 835 MHz; Crest factor: 1.0

Validation 835MHz - Muscle Tissue: $\sigma = 0.95$ mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.30 mW/g ± 0.04 dB, SAR (1g): 2.76 mW/g ± 0.05 dB, SAR (10g): 1.79 mW/g ± 0.05 dB, (Worst-case extrapolation)

Penetration depth: 12.8 (11.3, 14.6) [mm]

Powerdrift: -0.01 dB

Liquid Temperature (°C): 20.6

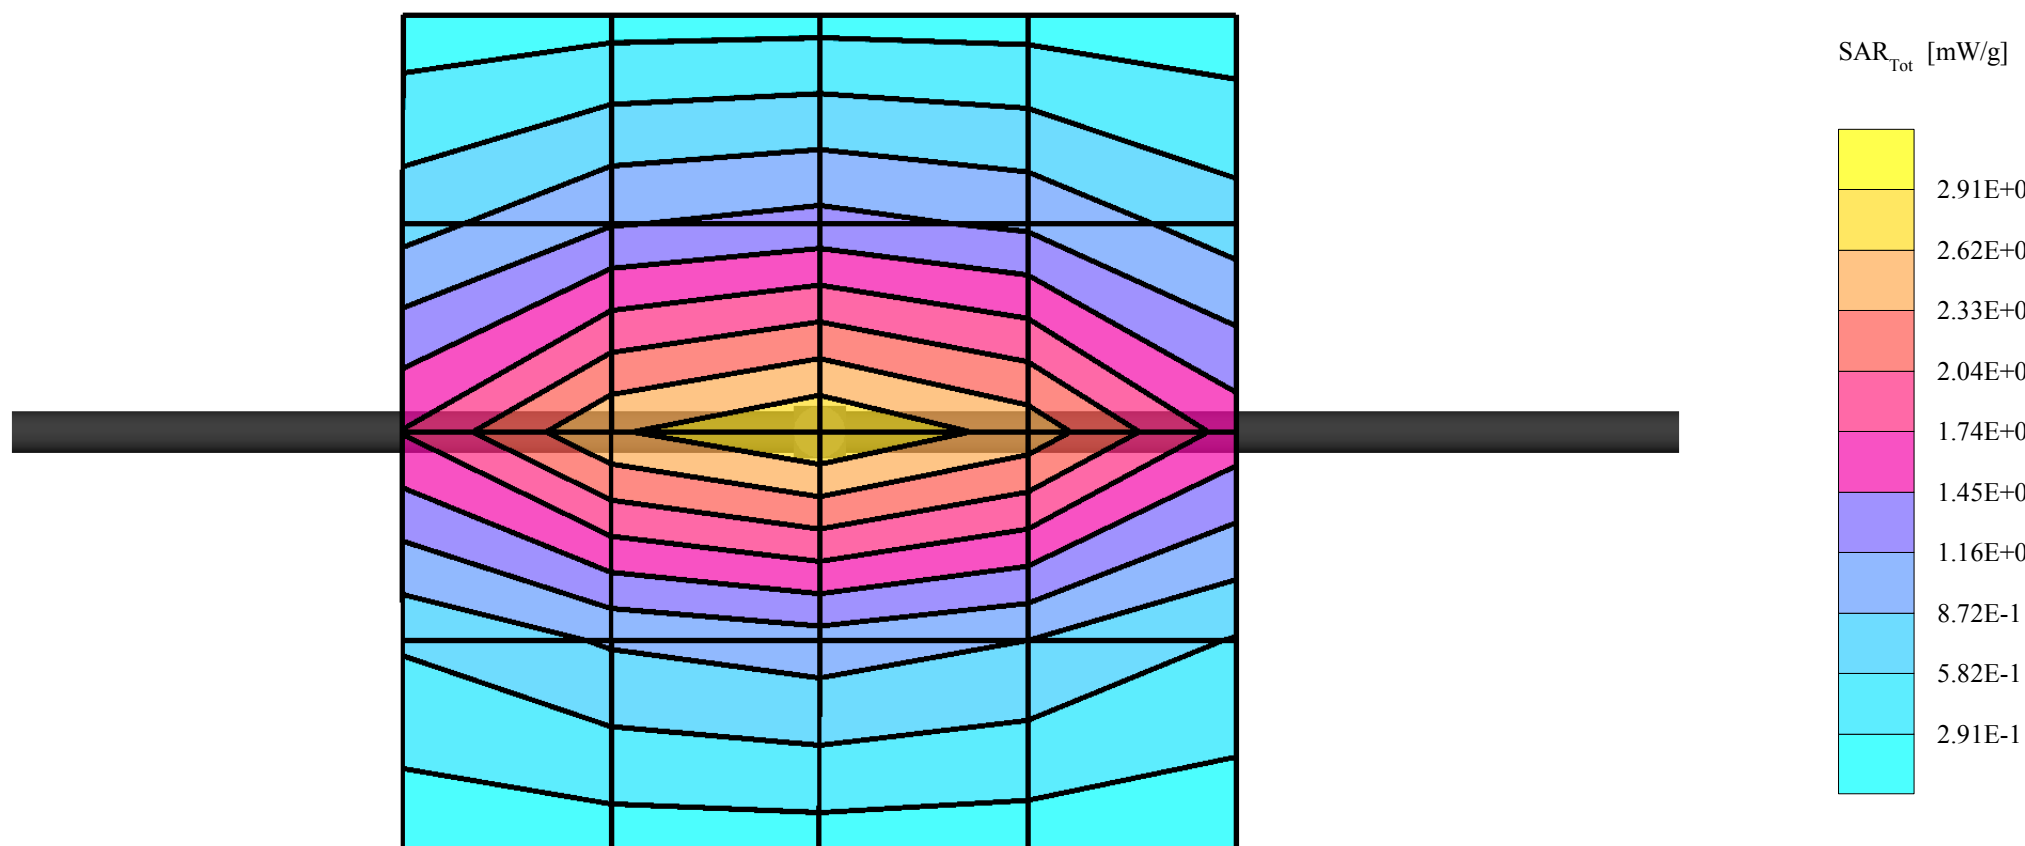

Dipole 835 MHz, Body Validation

SAM 2 (Cellular - Muscle Tissue)

Frequency: 835 MHz; Crest factor: 1.0

Validation 835MHz - Muscle Tissue: $\sigma = 0.94$ mho/m $\epsilon_r = 55.6$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): Peak: 4.08 mW/g ± 0.06 dB, SAR (1g): 2.61 mW/g ± 0.06 dB, SAR (10g): 1.70 mW/g ± 0.06 dB, (Worst-case extrapolation)

Penetration depth: 12.7 (11.3, 14.6) [mm]

Powerdrift: -0.02 dB

Liquid Temperature (°C): 20.4

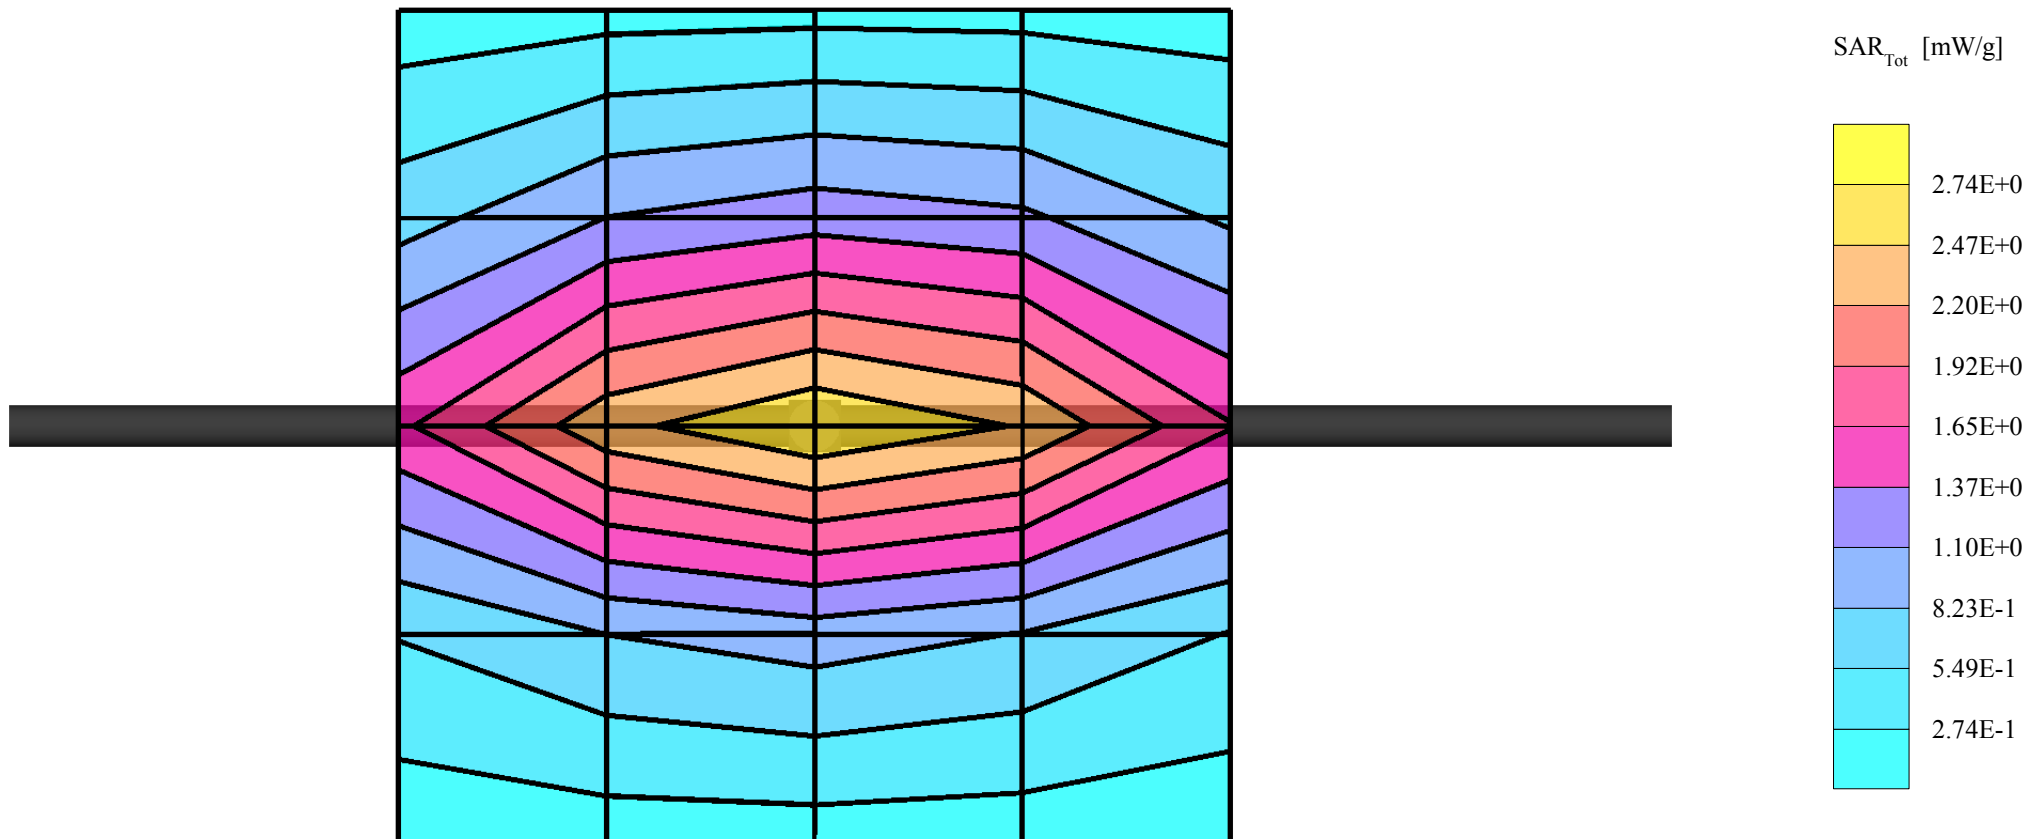

APPENDIX C: SAR DISTRIBUTION PRINTOUTS

GMLRH-40, AMPS, Channel 384, Left Touch Position with BLC-2 (1000 mAh)

SAM 1 (Cellular - Brain Tissue) Phantom

Frequency: 837 MHz; Crest factor: 1.0

Cellular Band - Brain Tissue: $\sigma = 0.95$ mho/m $\epsilon_r = 40.9$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cubes (2): SAR (1g): 1.12 mW/g ± 0.16 dB, SAR (10g): 0.765 mW/g ± 0.13 dB, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.41 dB

Liquid Temperature (°C): 20.5

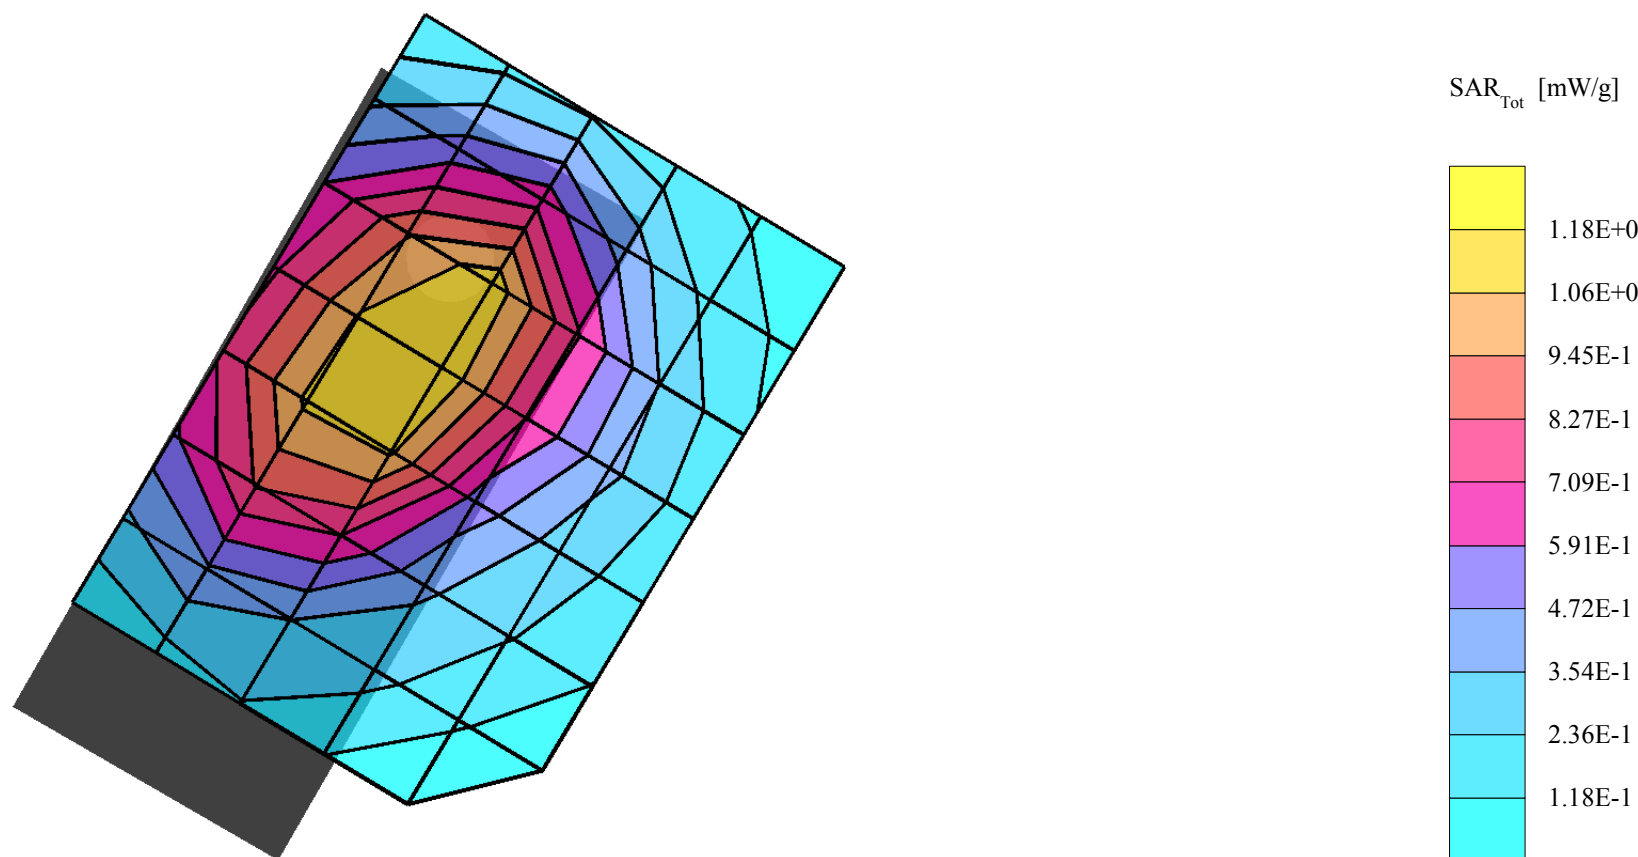

GMLRH-40, AMPS, Channel 799, Left Tilt Position with BLC-2 (1000 mAh)

SAM 1 (Cellular - Brain Tissue) Phantom

Frequency: 849 MHz; Crest factor: 1.0

Cellular Band - Brain Tissue: $\sigma = 0.95$ mho/m $\epsilon_r = 40.9$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 0.902 mW/g, SAR (10g): 0.576 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: 0.02 dB

Liquid Temperature (°C): 20.5

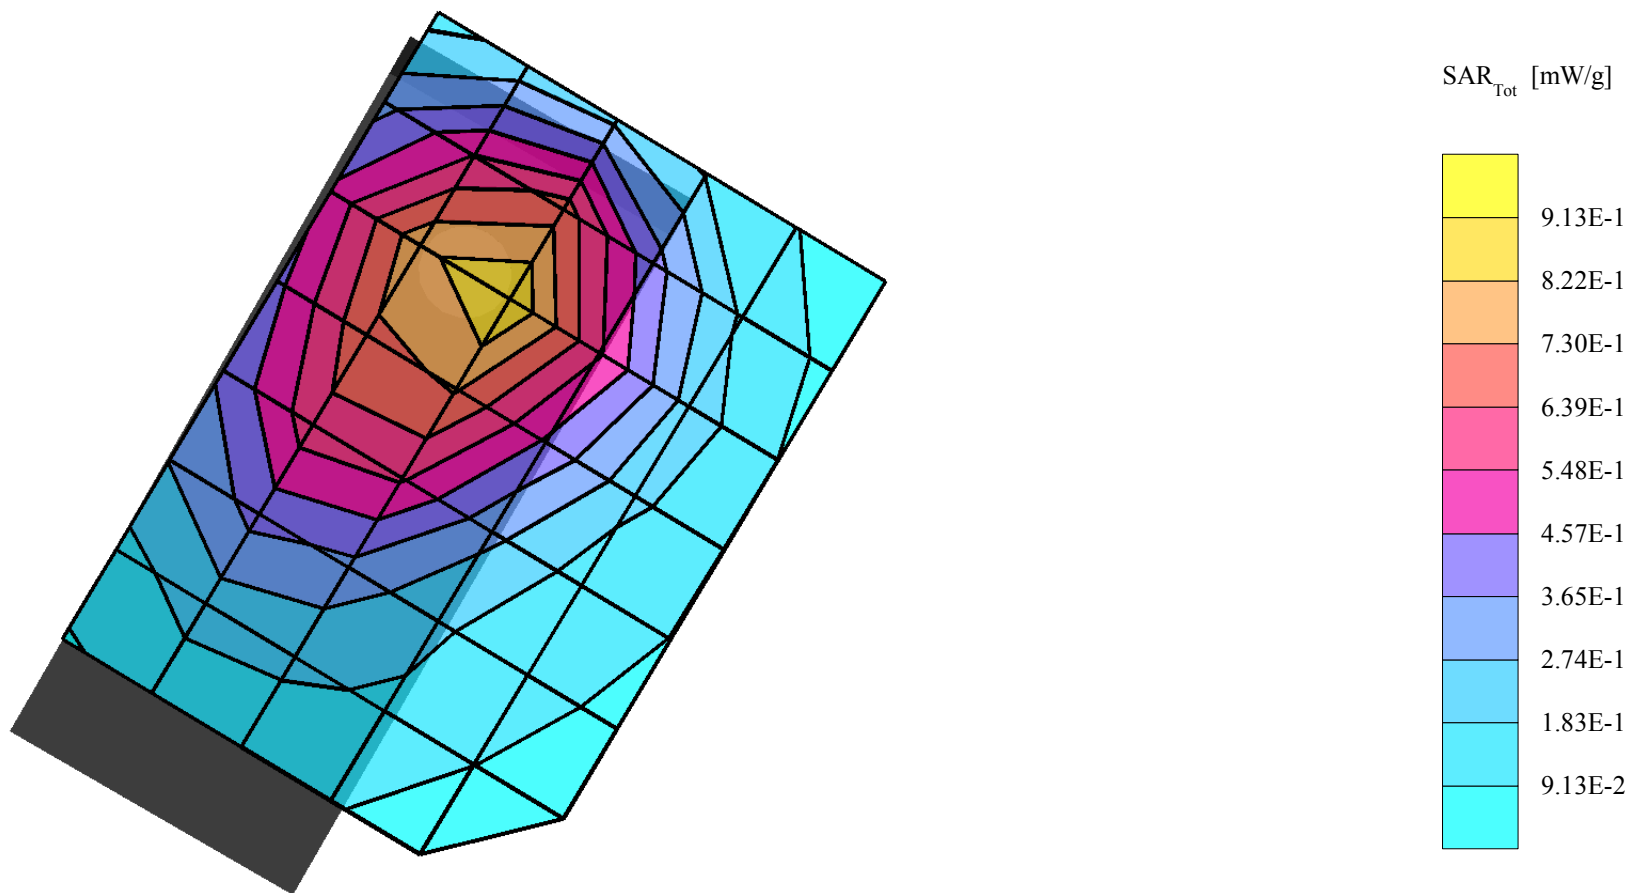

GMLRH-40, AMPS, Channel 799, Right Touch Position with BLC-2 (1000 mAh)

SAM 1 (Cellular - Brain Tissue) Phantom

Frequency: 849 MHz; Crest factor: 1.0

Cellular Band - Brain Tissue: $\sigma = 0.94$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 1.19 mW/g, SAR (10g): 0.829 mW/g, (Worst-case extrapolation)

Coarse: Dx = 19.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.05 dB

Liquid Temperature (°C): 20.5

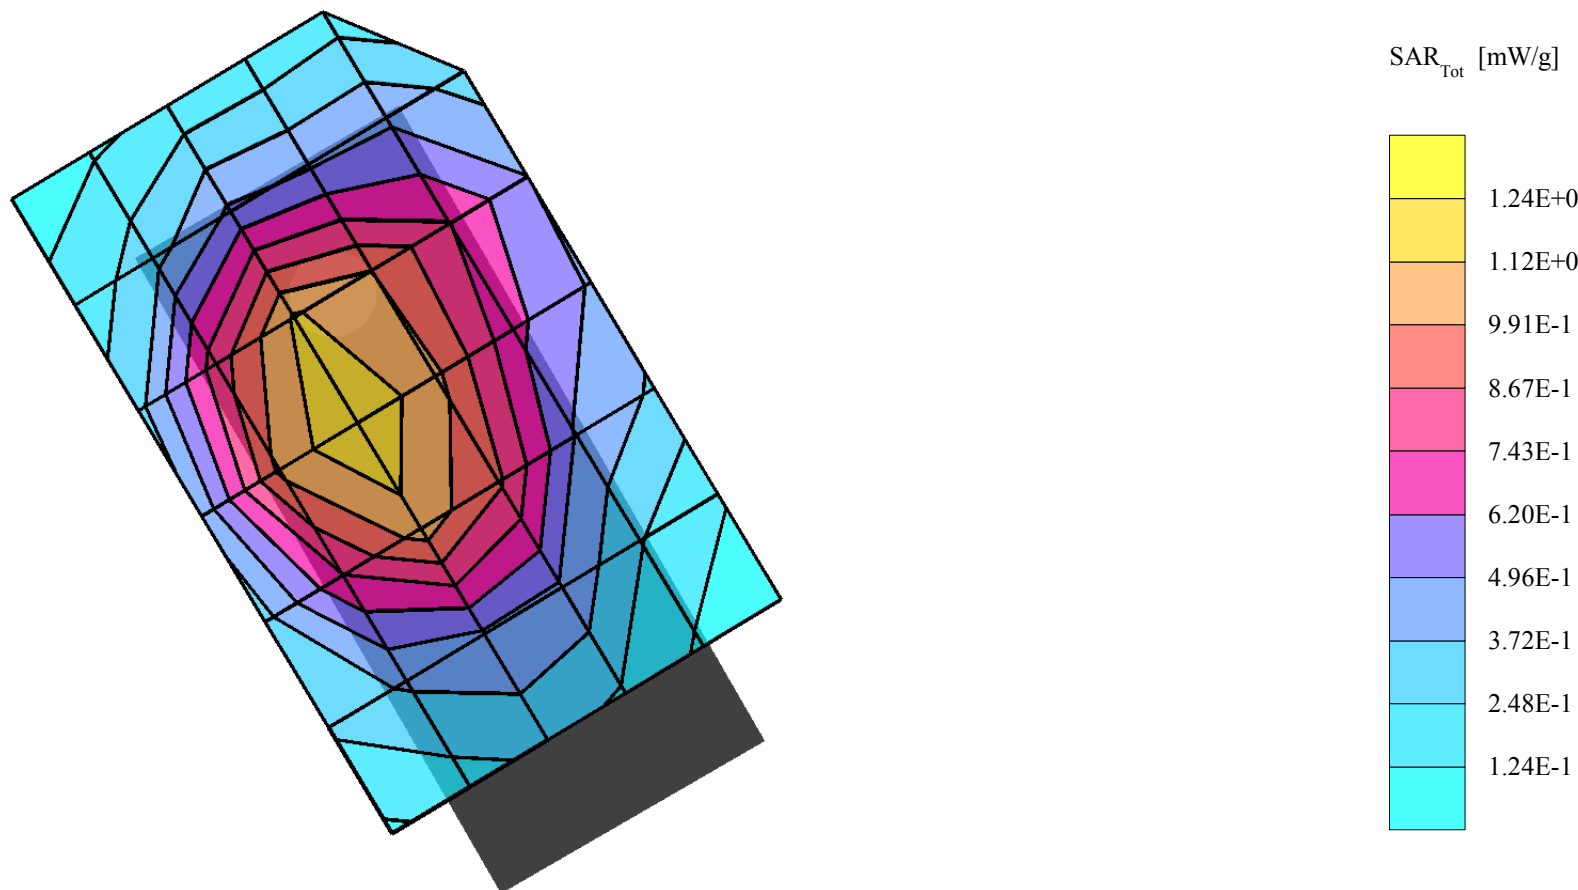

GMLRH-40, AMPS, Channel 799, Right Tilt Position with BLC-2 (1000 mAh)

SAM 1 (Cellular - Brain Tissue) Phantom

Frequency: 849 MHz; Crest factor: 1.0

Cellular Band - Brain Tissue: $\sigma = 0.94$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 0.789 mW/g, SAR (10g): 0.521 mW/g, (Worst-case extrapolation)

Coarse: Dx = 19.0, Dy = 14.0, Dz = 10.0

Powerdrift: 0.15 dB

Liquid Temperature (°C): 20.5

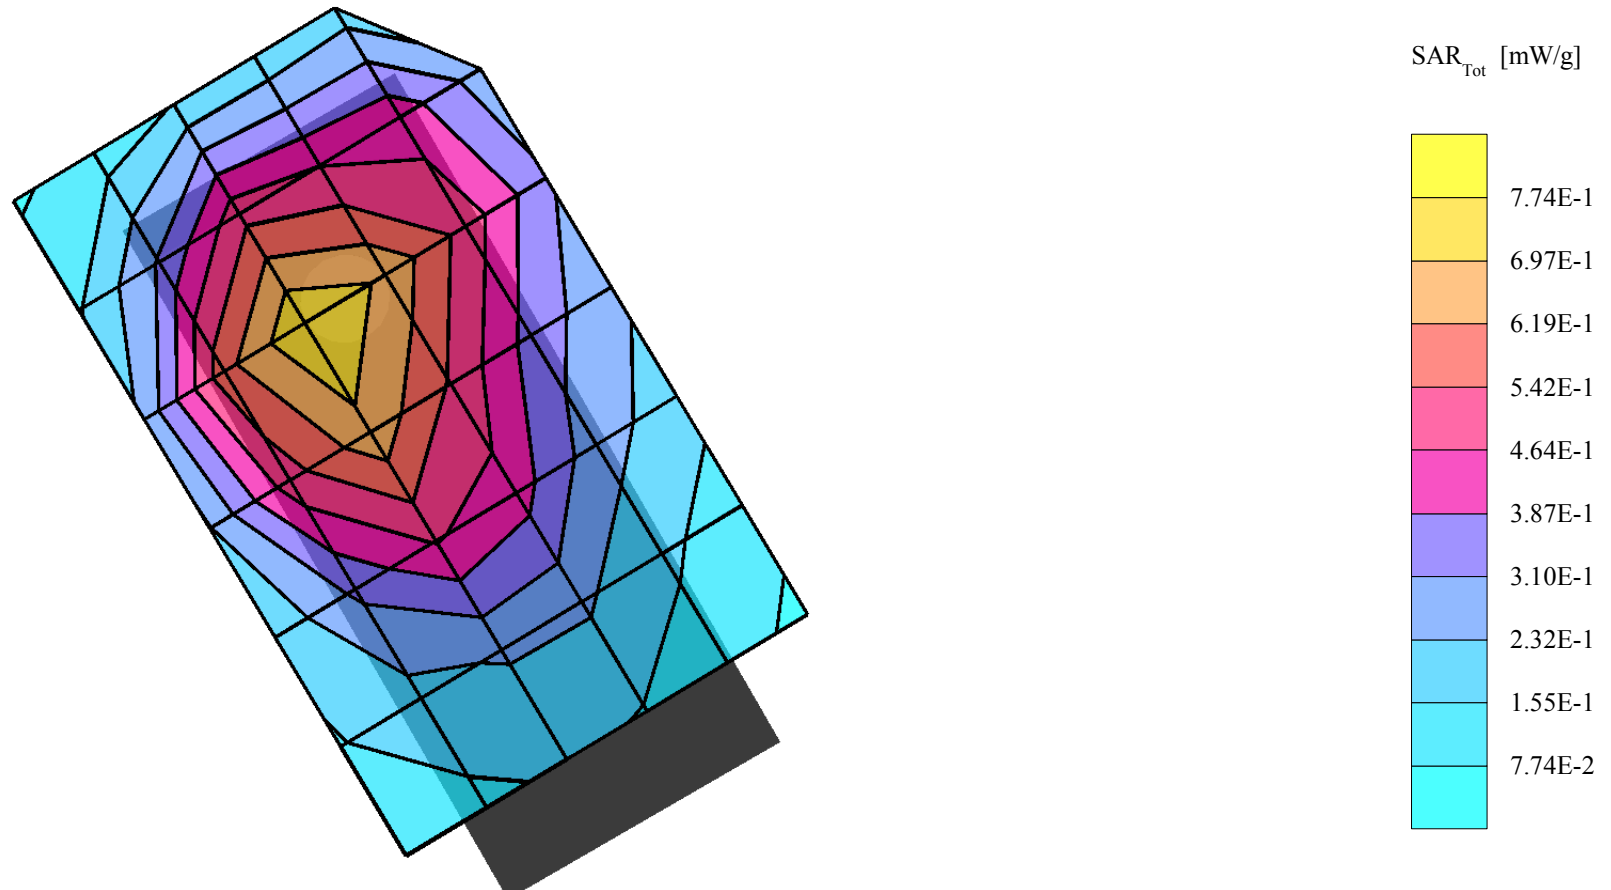

GMLRH-40, AMPS, Channel 991, Flat Position - Back of Phone with 15mm Spacer, HDE-2 and BMC-3

SAM 2 (Cellular - Muscle Tissue) Phantom

Frequency: 824 MHz; Crest factor: 1.0

Cellular Band - Muscle Tissue: $\sigma = 0.93$ mho/m $\epsilon_r = 55.9$ $\rho = 1.00$ g/cm³


Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 1.18 mW/g, SAR (10g): 0.818 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 12.0

Powerdrift: 0.01 dB

Liquid Temperature (°C): 20.2

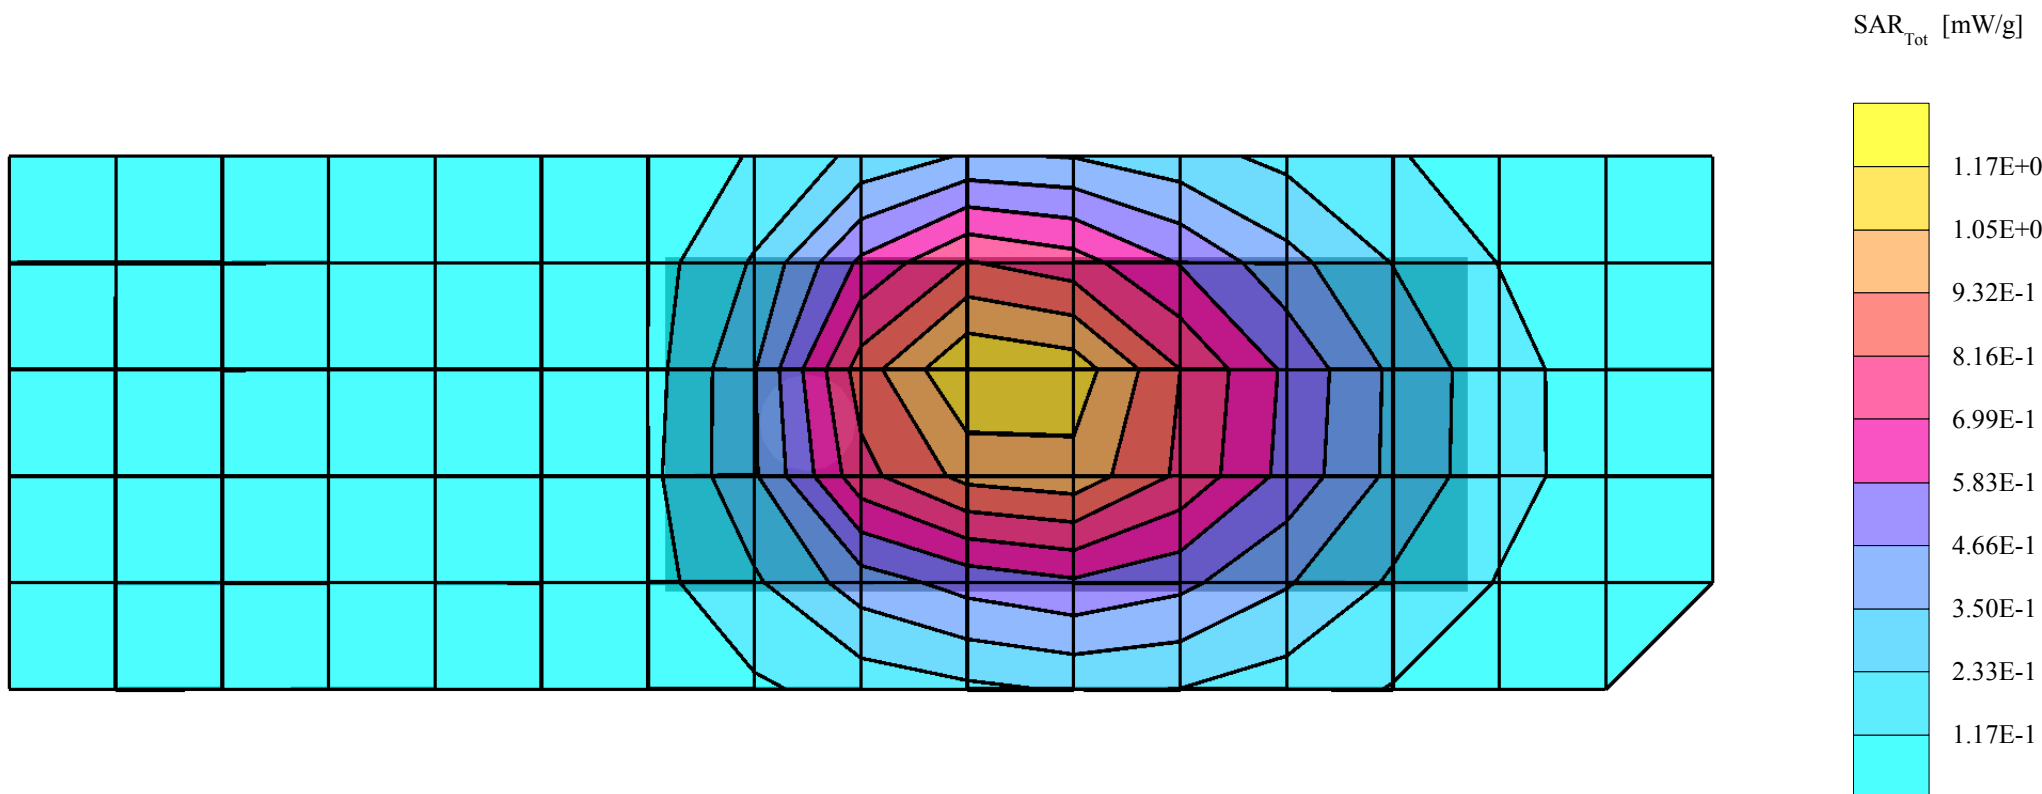

GMLRH-40, AMPS, Channel 799, Right Touch Position with BLC-2 (1000 mAh)

SAM 1 (Cellular - Brain Tissue) Phantom

Frequency: 849 MHz; Crest factor: 1.0


Cellular Band - Brain Tissue: $\sigma = 0.94$ mho/m $\epsilon_r = 40.4$ $\rho = 1.00$ g/cm³

Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 1.19 mW/g, SAR (10g): 0.829 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

Liquid Temperature (°C): 20.3

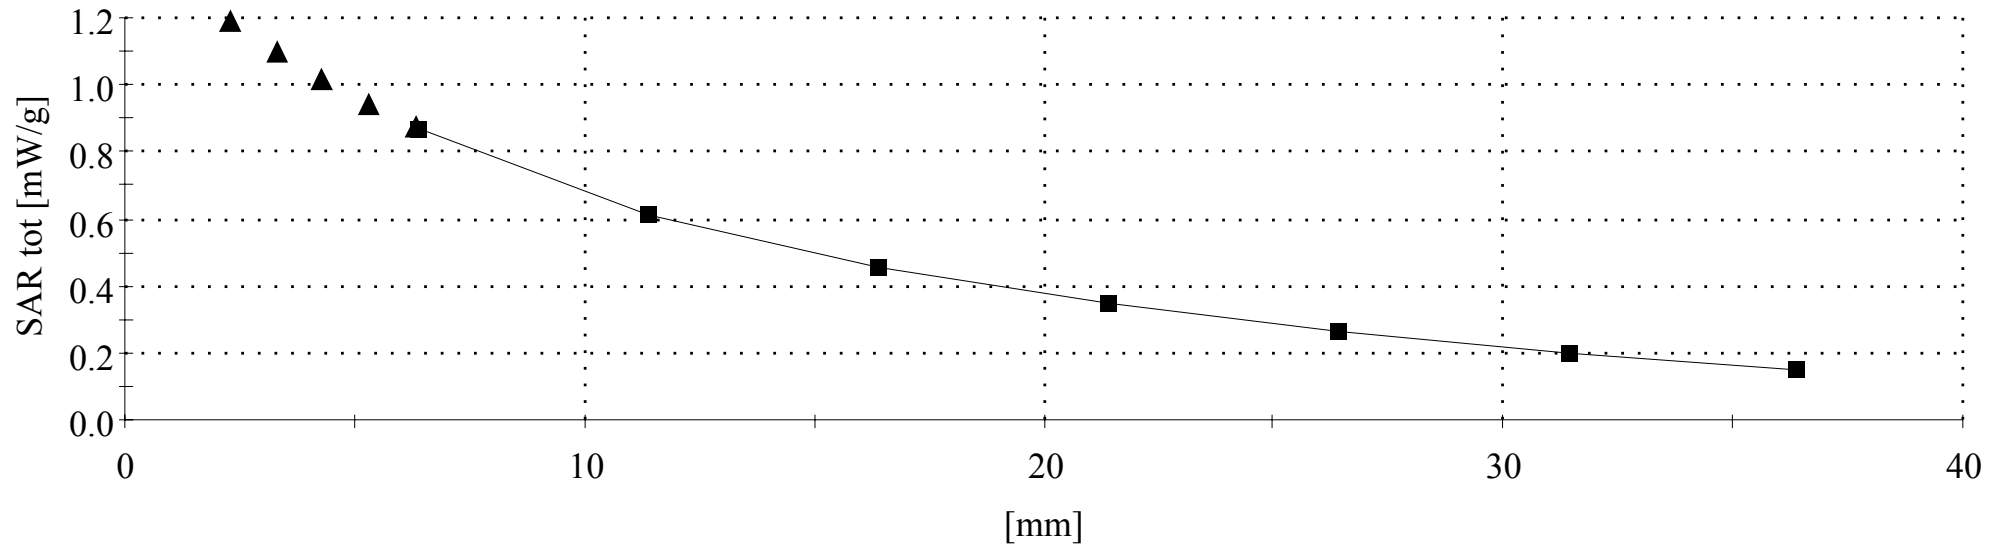

GMLRH-40, TDMA 800, Channel 384, Right Touch Position with BLC-2 (1000 mAh)

SAM 1 (Cellular - Brain Tissue) Phantom

Frequency: 837 MHz; Crest factor: 3.0


Cellular Band - Brain Tissue: $\sigma = 0.93$ mho/m $\epsilon_r = 41.8$ $\rho = 0.96$ g/cm³

Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 0.703 mW/g, SAR (10g): 0.499 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

Liquid Temperature (°C): 20.6

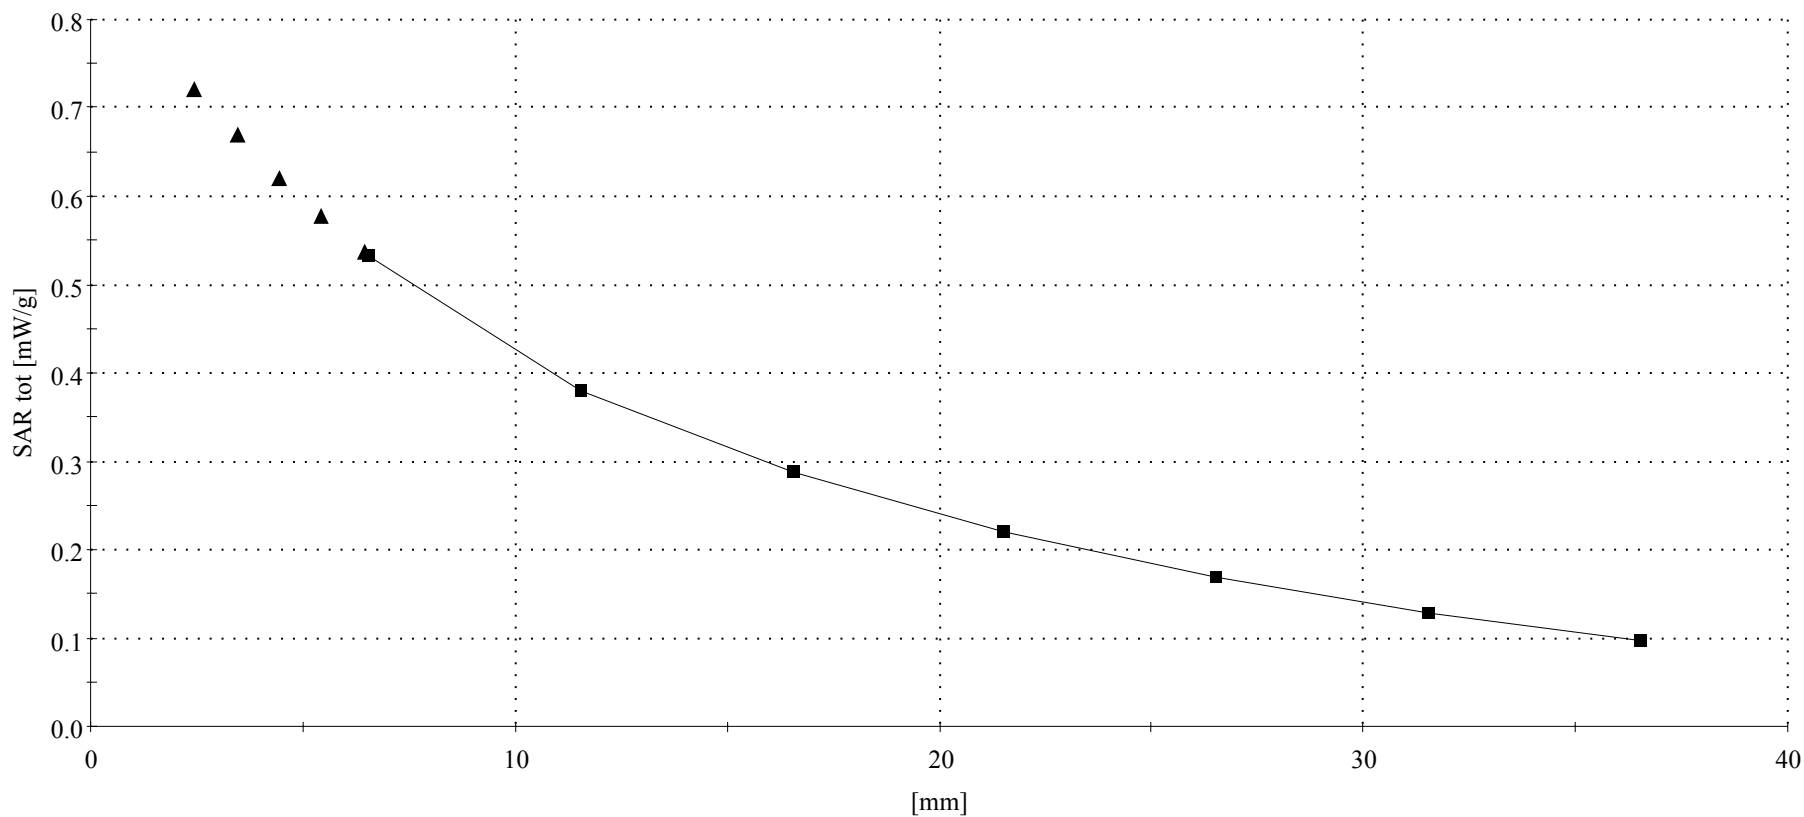

GMLRH-40, AMPS, Channel 991, Flat Position - Back of Phone with 15mm Spacer, HDE-2 and BMC-3

SAM 2 (Cellular - Muscle Tissue) Phantom

Frequency: 824 MHz; Crest factor: 1.0


Cellular Band - Muscle Tissue: $\sigma = 0.93$ mho/m $\epsilon_r = 55.9$ $\rho = 1.00$ g/cm³

Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 1.18 mW/g, SAR (10g): 0.818 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

Liquid Temperature (°C): 20.2

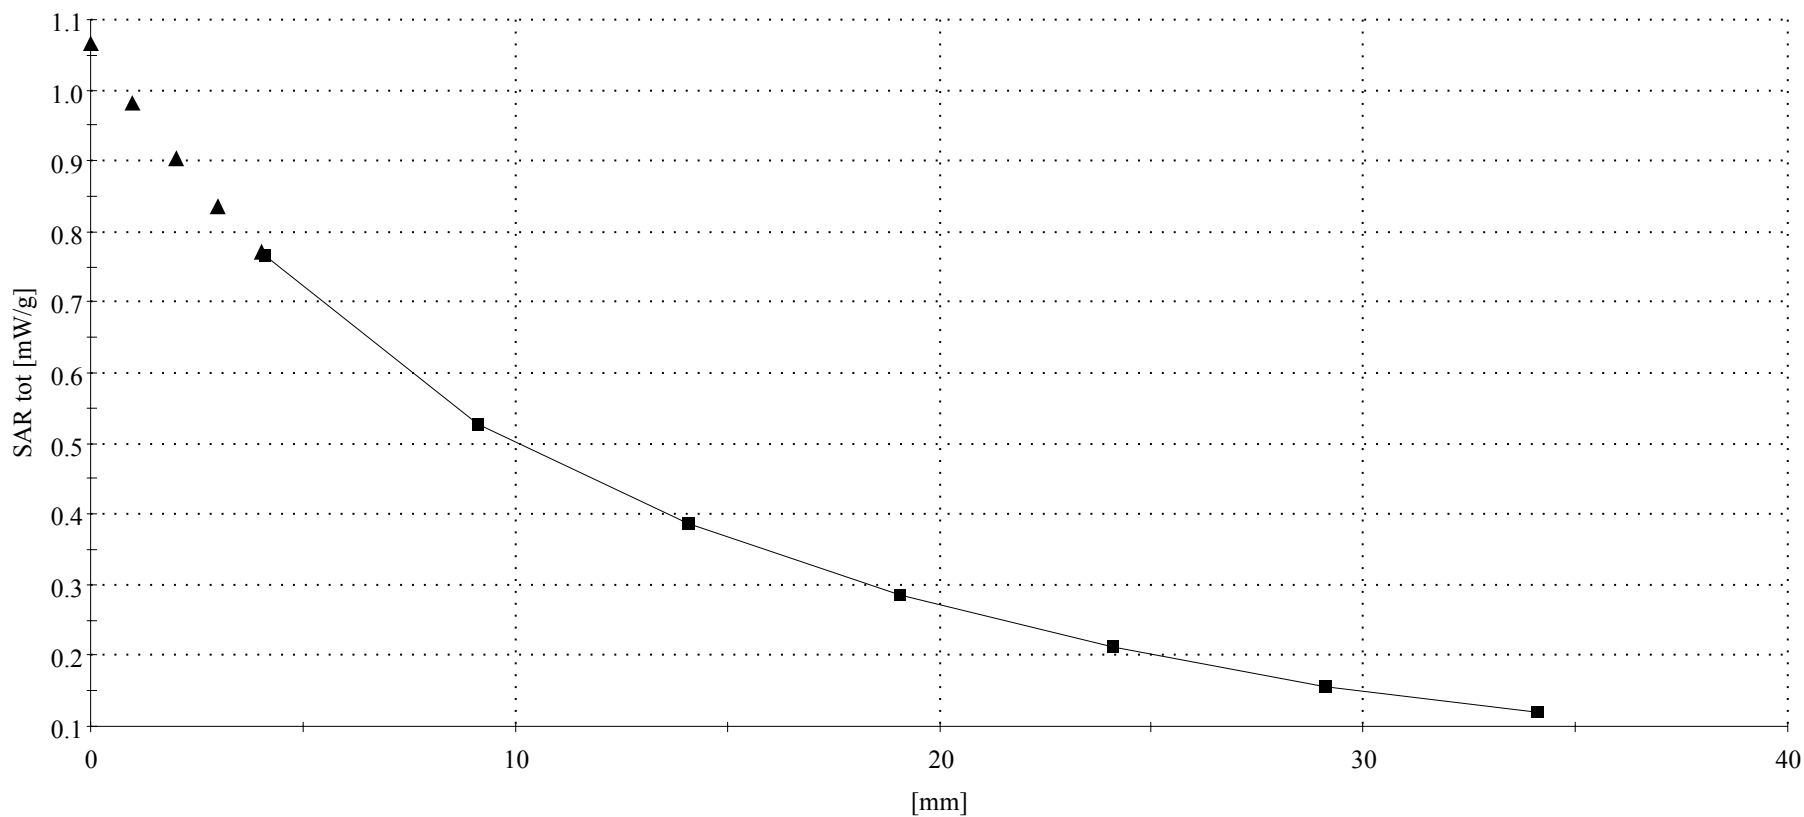

GMLRH-40, TDMA 800, Channel 384, Flat Position - Back of Phone with 15mm spacer, HDE-2 and BLC-2 (950 mAh)

SAM 2 (Cellular - Muscle Tissue) Phantom

Frequency: 837 MHz; Crest factor: 3.0


Cellular Band - Muscle Tissue: $\sigma = 0.95$ mho/m $\epsilon_r = 55.8$ $\rho = 1.00$ g/cm³

Probe: ET3DV6 - SN1504; ConvF(6.50,6.50,6.50)

Cube 5x5x7: SAR (1g): 0.688 mW/g, SAR (10g): 0.477 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

Liquid Temperature (°C): 20.6

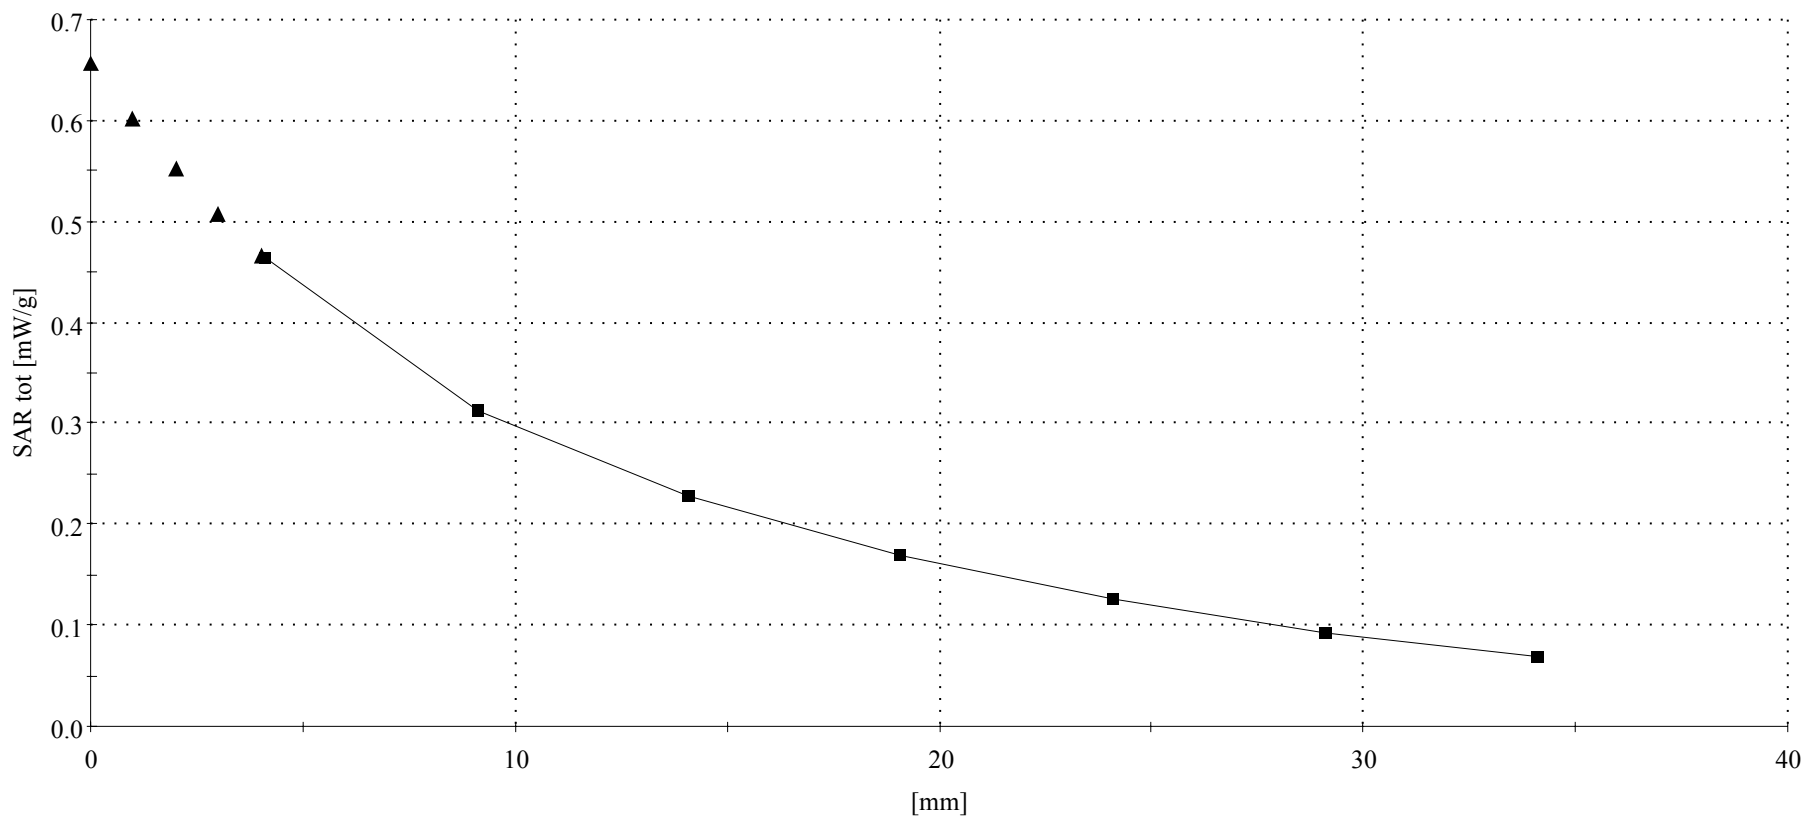

APPENDIX D: CALIBRATION CERTIFICATES

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

Dosimetric E-Field Probe

Type:

ET3DV6

Serial Number:

1504

Place of Calibration:

Zurich

Date of Calibration:

July 26, 2002

Calibration Interval:

12 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

U. Vella

Approved by:

Philip Kutz

Probe ET3DV6

SN:1504

Manufactured:	October 24, 1999
Last calibration:	January 10, 2002
Recalibrated:	July 26, 2002

Calibrated for System DASY3

DASY3 - Parameters of Probe: ET3DV6 SN:1504

Sensitivity in Free Space

NormX	2.02 $\mu\text{V}/(\text{V}/\text{m})^2$
NormY	1.78 $\mu\text{V}/(\text{V}/\text{m})^2$
NormZ	1.73 $\mu\text{V}/(\text{V}/\text{m})^2$

Diode Compression

DCP X	95	mV
DCP Y	95	mV
DCP Z	95	mV

Sensitivity in Tissue Simulating Liquid

Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\% \text{ mho/m}$
Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
ConvF X	6.5 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	6.5 $\pm 9.5\%$ (k=2)	Alpha	0.39
ConvF Z	6.5 $\pm 9.5\%$ (k=2)	Depth	2.42
Head	1880 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
ConvF X	5.4 $\pm 9.5\%$ (k=2)	Boundary effect:	
ConvF Y	5.4 $\pm 9.5\%$ (k=2)	Alpha	0.53
ConvF Z	5.4 $\pm 9.5\%$ (k=2)	Depth	2.44





Boundary Effect



Head	835 MHz	Typical SAR gradient: 5 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%]	Without Correction Algorithm	9.6	5.3
SAR _{be} [%]	With Correction Algorithm	0.3	0.5
Head	1880 MHz	Typical SAR gradient: 10 % per mm	
Probe Tip to Boundary		1 mm	2 mm
SAR _{be} [%]	Without Correction Algorithm	13.0	8.5
SAR _{be} [%]	With Correction Algorithm	0.2	0.2

Sensor Offset


Probe Tip to Sensor Center	2.7	mm
Optical Surface Detection	1.4 \pm 0.2	mm

Receiving Pattern (ϕ), $\theta = 0^\circ$

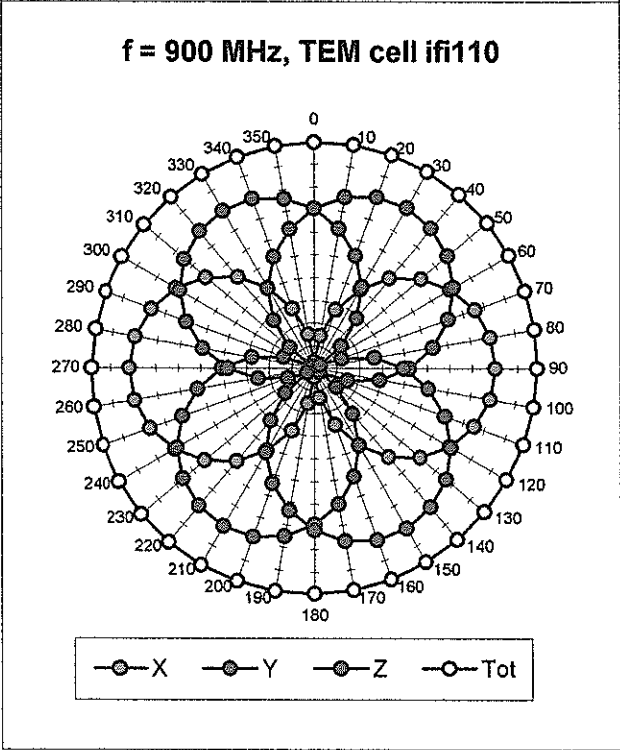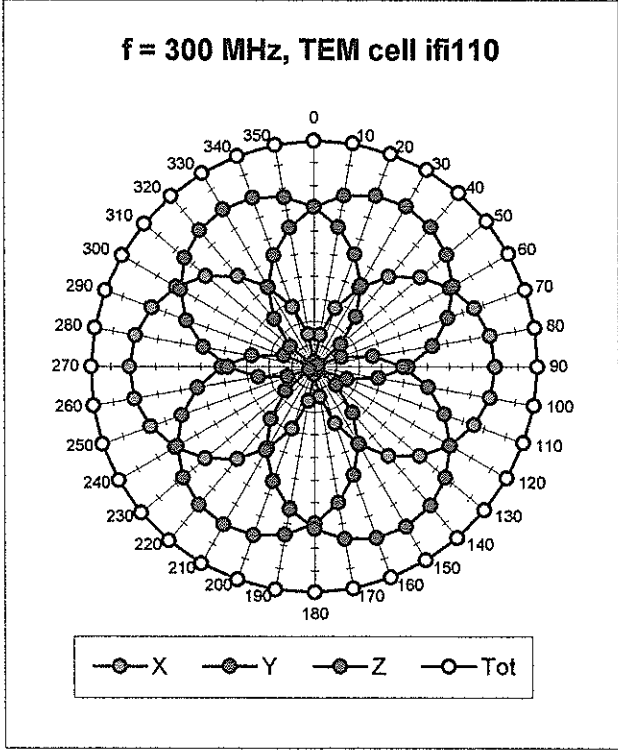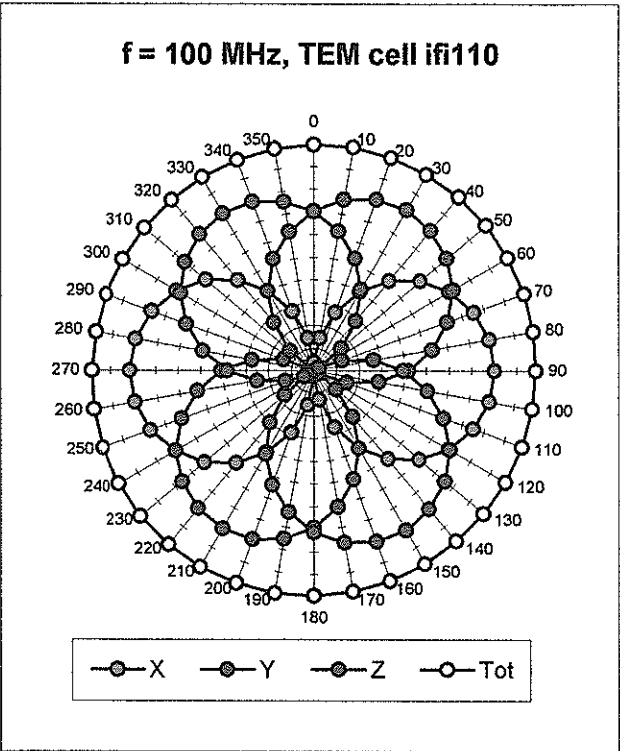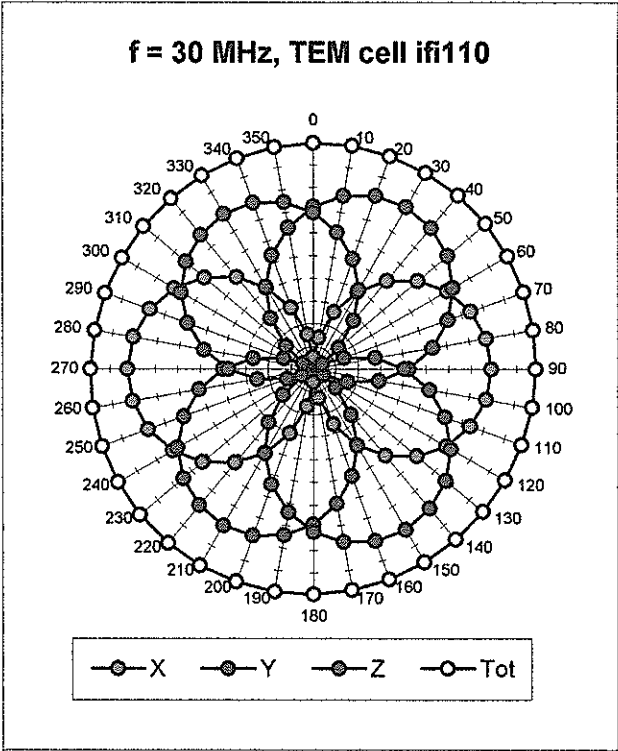

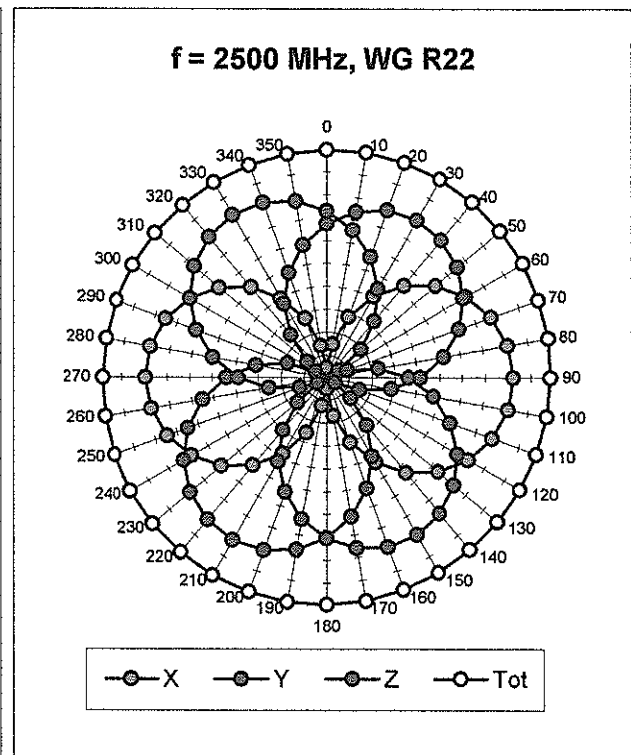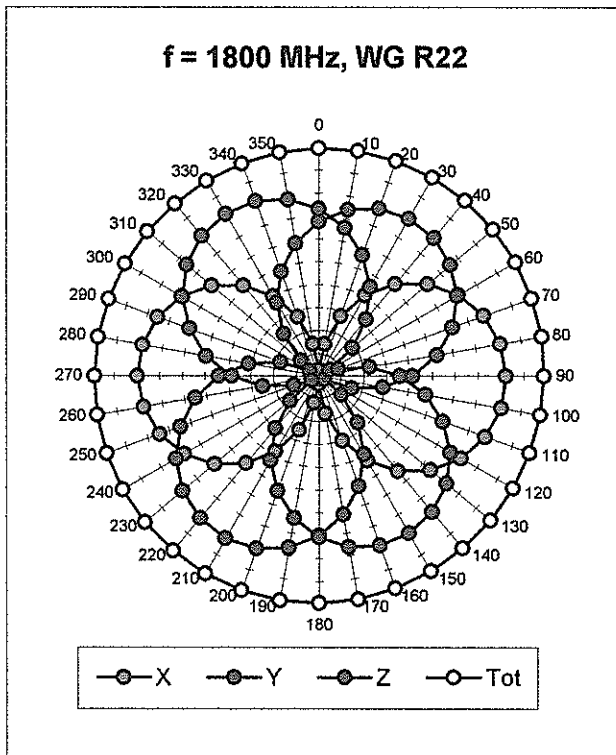


Isotropy Error (ϕ), $\theta = 0^\circ$


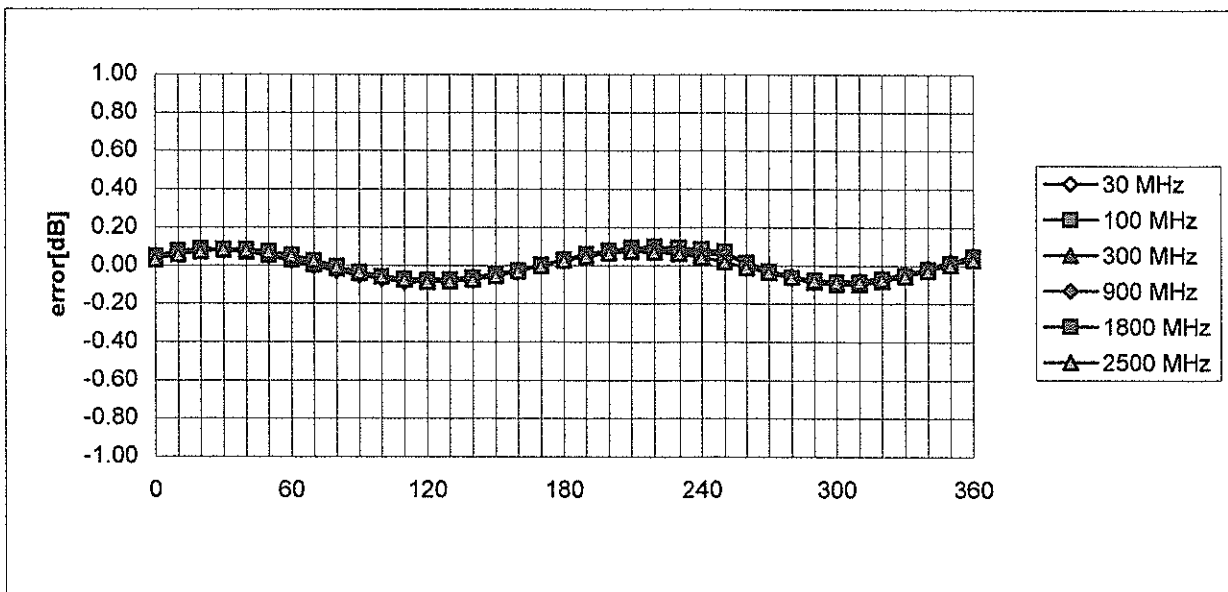


Frequency Response of E-Field



(TEM-Cell:ifi110, Waveguide R22)

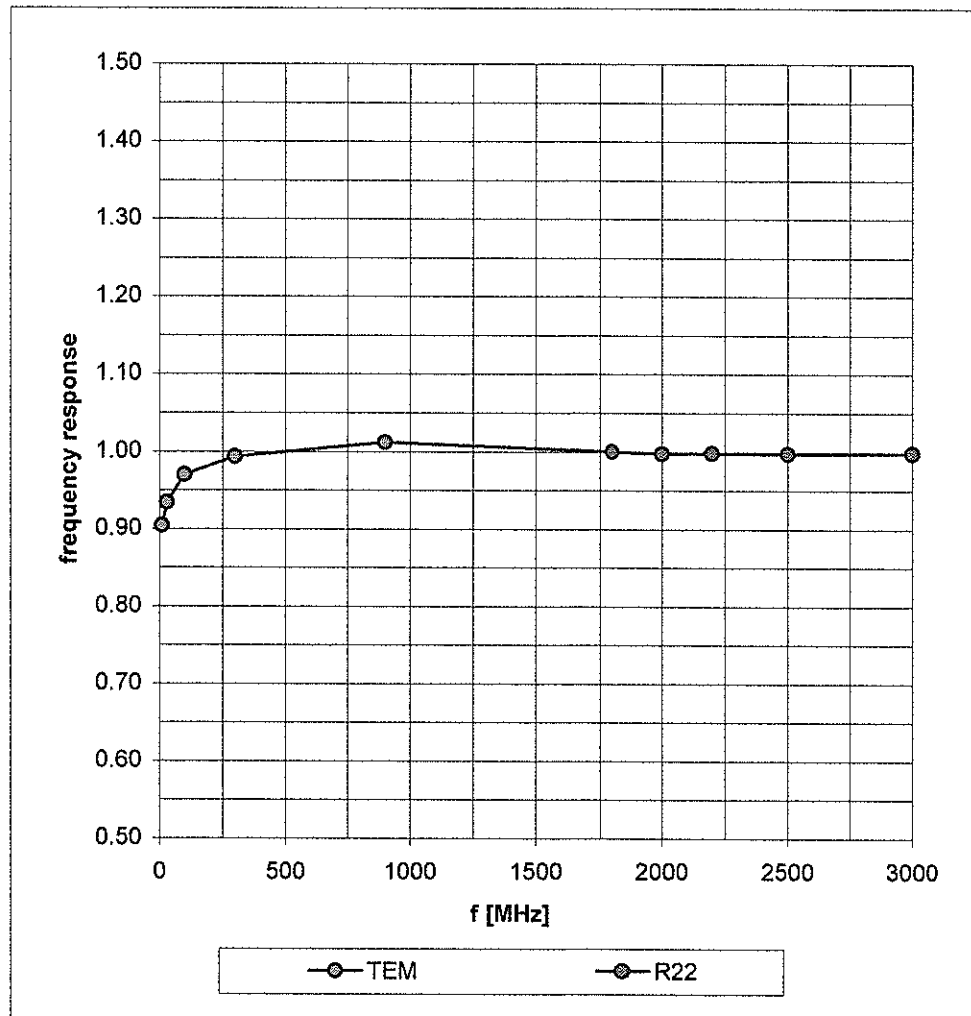

Dynamic Range $f(\text{SAR}_{\text{brain}})$ (Waveguide R22)

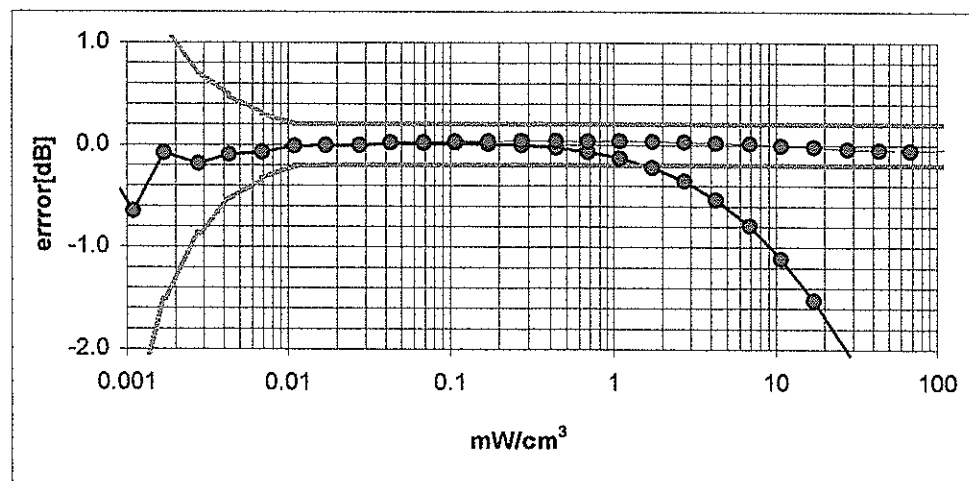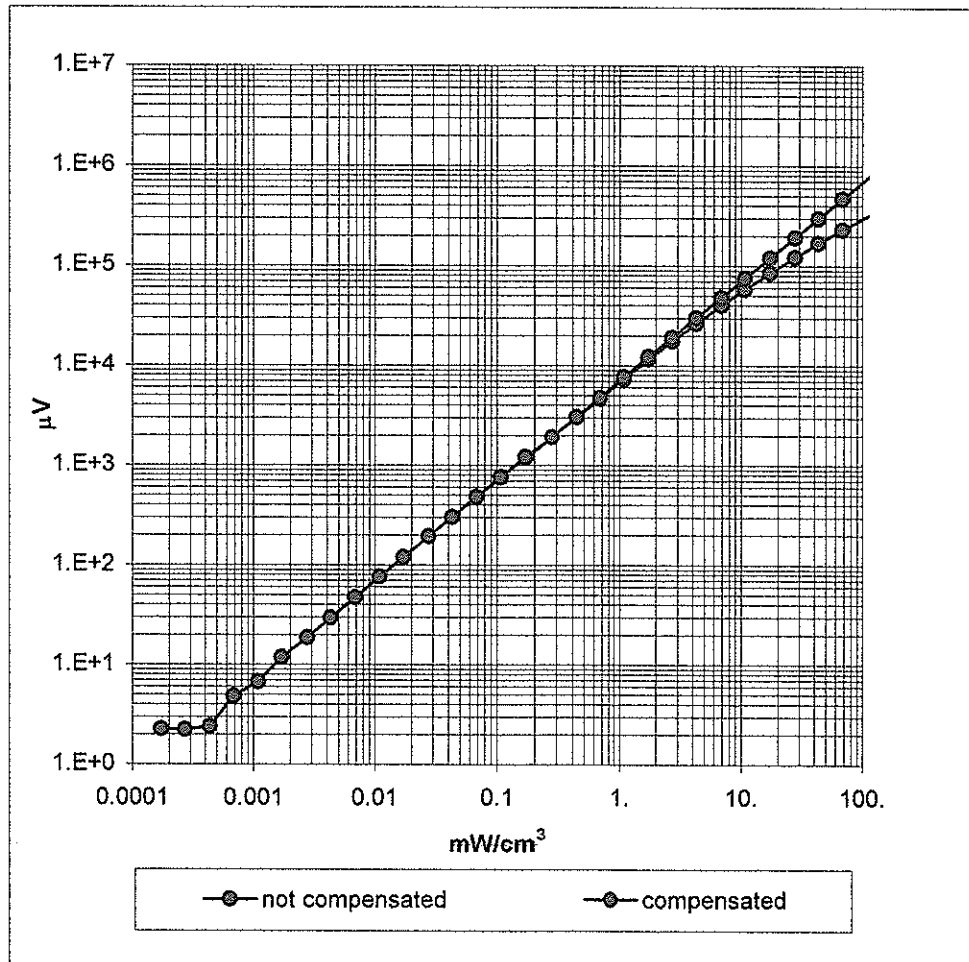


Conversion Factor Assessment

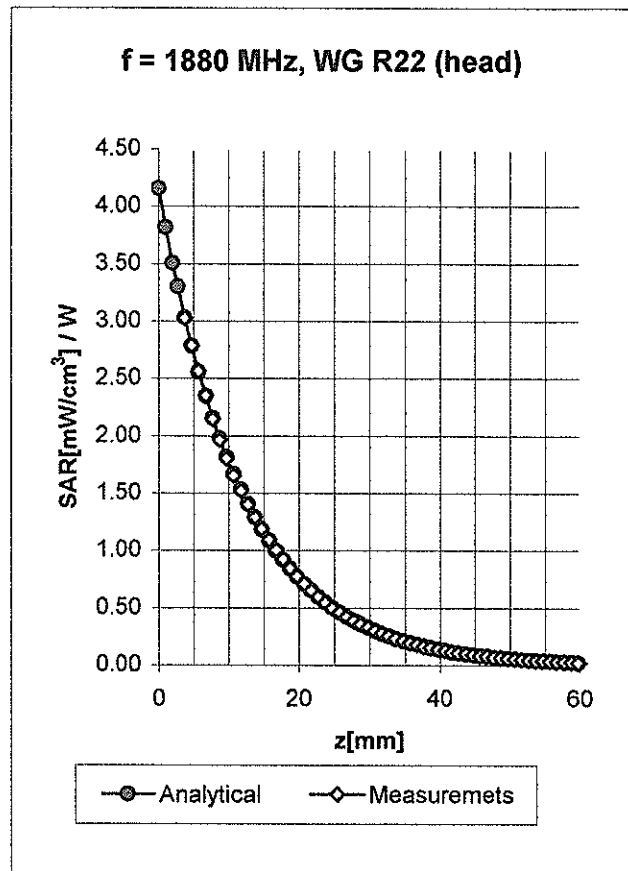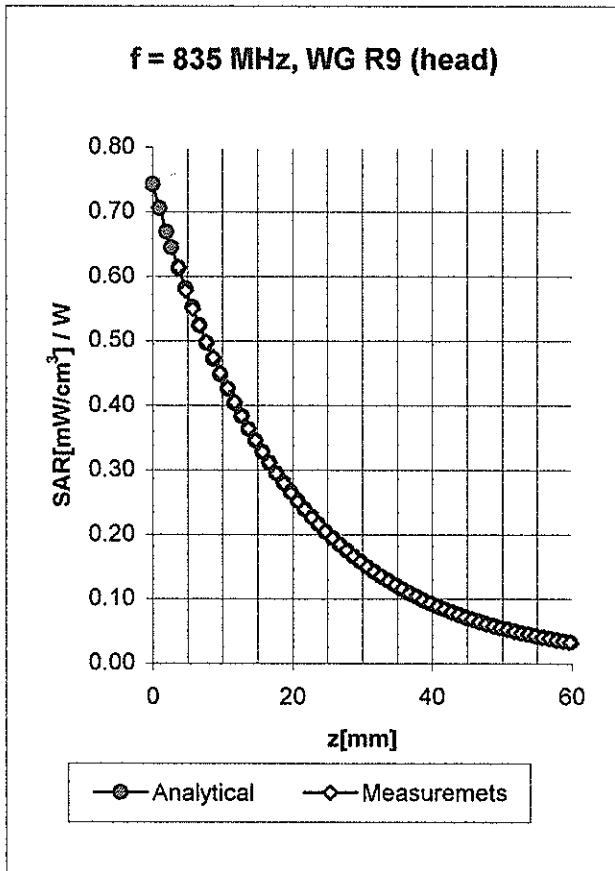

Head	835 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.90 \pm 5\% \text{ mho/m}$
Head	900 MHz	$\epsilon_r = 41.5 \pm 5\%$	$\sigma = 0.97 \pm 5\% \text{ mho/m}$
	ConvF X	6.5 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	6.5 $\pm 9.5\%$ (k=2)	Alpha 0.39
	ConvF Z	6.5 $\pm 9.5\%$ (k=2)	Depth 2.42
Head	1880 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
Head	1800 MHz	$\epsilon_r = 40.0 \pm 5\%$	$\sigma = 1.40 \pm 5\% \text{ mho/m}$
	ConvF X	5.4 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	5.4 $\pm 9.5\%$ (k=2)	Alpha 0.53
	ConvF Z	5.4 $\pm 9.5\%$ (k=2)	Depth 2.44


Conversion Factor Assessment

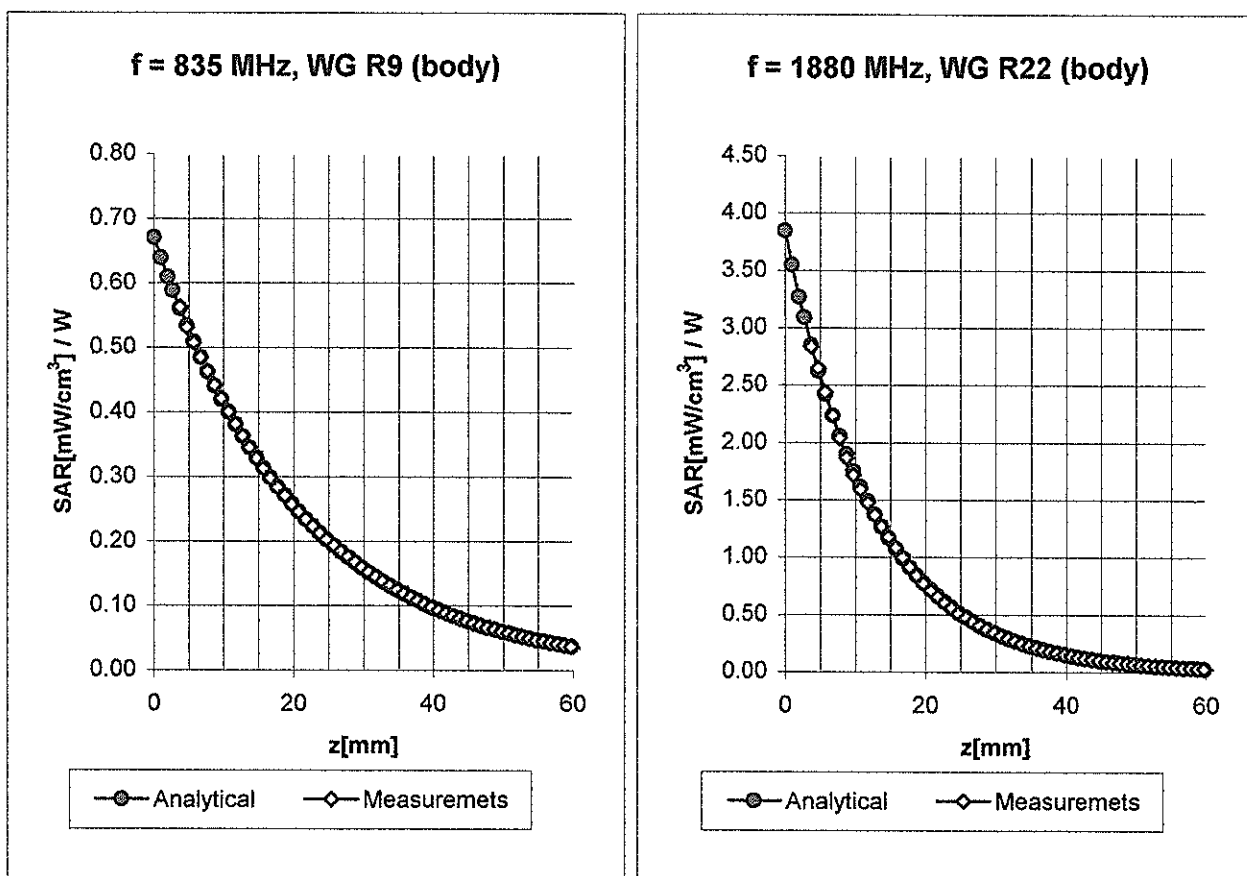

Body	835 MHz	$\epsilon_r = 55.2 \pm 5\%$	$\sigma = 0.97 \pm 5\%$ mho/m
Body	900 MHz	$\epsilon_r = 55.0 \pm 5\%$	$\sigma = 1.05 \pm 5\%$ mho/m
	ConvF X	6.5 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	6.5 $\pm 9.5\%$ (k=2)	Alpha 0.42
	ConvF Z	6.5 $\pm 9.5\%$ (k=2)	Depth 2.38
Body	1880 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\%$ mho/m
Body	1800 MHz	$\epsilon_r = 53.3 \pm 5\%$	$\sigma = 1.52 \pm 5\%$ mho/m
	ConvF X	5.0 $\pm 9.5\%$ (k=2)	Boundary effect:
	ConvF Y	5.0 $\pm 9.5\%$ (k=2)	Alpha 0.74
	ConvF Z	5.0 $\pm 9.5\%$ (k=2)	Depth 2.06

Deviation from Isotropy in HSL

Error (θ, ϕ), $f = 900$ MHz

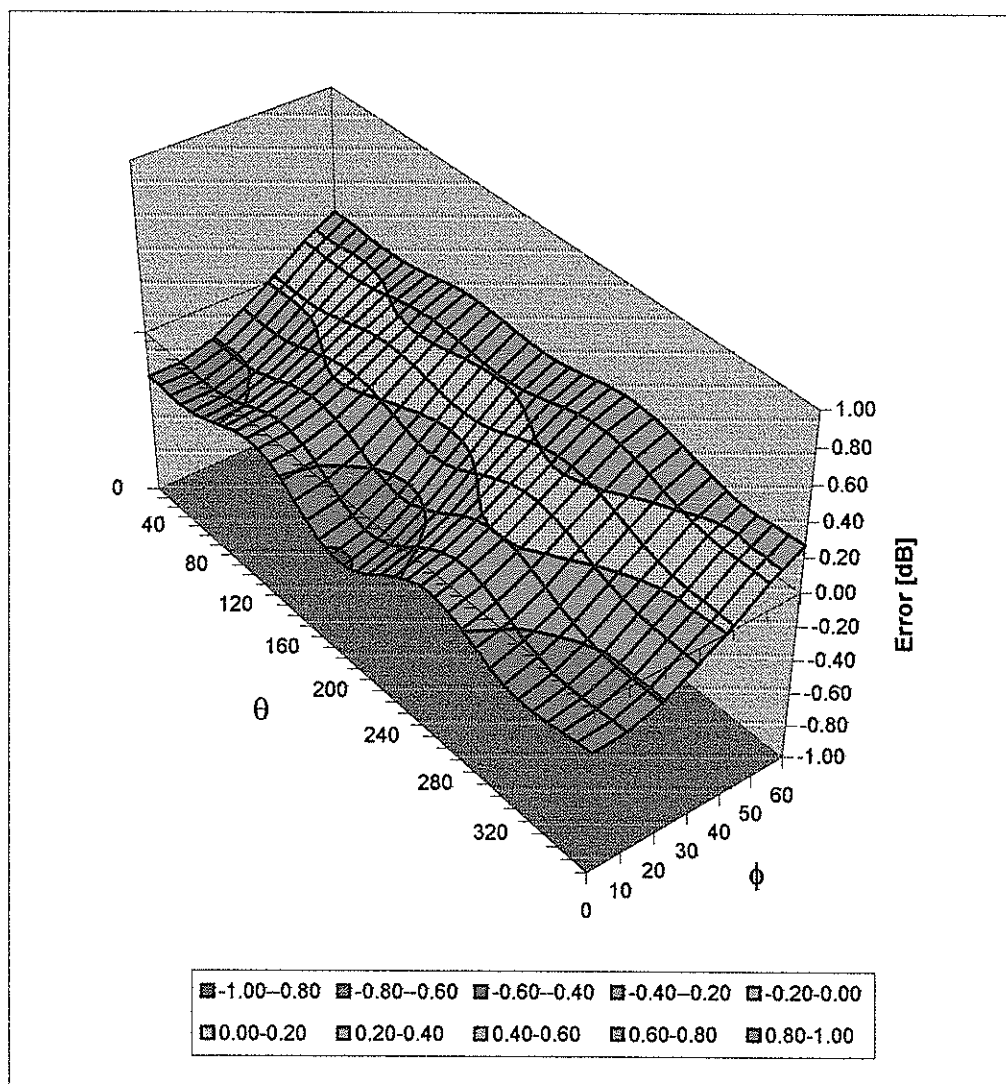

Calibration Certificate

835 MHz System Validation Dipole

Type:

D835V2

Serial Number:

455

Place of Calibration:

Zurich

Date of Calibration:

July 16, 2002

Calibration Interval:

24 months

Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:

N. Vetter

Approved by:

Alconio Klatza

DASY

Dipole Validation Kit

Type: D835V2

Serial: 455

Manufactured: January 31, 2002
Calibrated: July 16, 2002

1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with head simulating solution of the following electrical parameters at 835 MHz:

Relative Dielectricity	42.5	$\pm 5\%$
Conductivity	0.90 mho/m	$\pm 5\%$

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.6 at 835 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was $250\text{mW} \pm 3\%$. The results are normalized to 1W input power.

2.1. SAR Measurement with DASY3 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the worst-case extrapolation are:

averaged over 1 cm^3 (1 g) of tissue: **9.84 mW/g**

averaged over 10 cm^3 (10 g) of tissue: **6.32 mW/g**

2.2 SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 1. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm^3 (1 g) of tissue: **9.20 mW/g**

averaged over 10 cm^3 (10 g) of tissue: **6.08 mW/g**

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	1.375 ns	(one direction)
Transmission factor:	0.992	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 835 MHz:	$\text{Re}\{Z\} = 49.6 \Omega$
---------------------------------	--------------------------------

$\text{Im}\{Z\} = -1.8 \Omega$

Return Loss at 835 MHz	-34.7 dB
------------------------	-----------------

4. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with body simulating solution of the following electrical parameters at 835 MHz:

Relative Dielectricity	55.3	$\pm 5\%$
Conductivity	0.95 mho/m	$\pm 5\%$

The DASY3 System (Software version 3.1d) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.2 at 835 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 20mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

5.1. SAR Measurement with DASY3 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the worst-case extrapolation are:

averaged over 1 cm³ (1 g) of tissue: **10.1 mW/g**

averaged over 10 cm³ (10 g) of tissue: **6.60 mW/g**

5.2 SAR Measurement with DASY4 System

Standard SAR-measurements were performed according to the measurement conditions described in section 4. The results (see figure supplied) have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values measured with the dosimetric probe ET3DV6 SN:1507 and applying the advanced extrapolation are:

averaged over 1 cm³ (1 g) of tissue: **9.24 mW/g**

averaged over 10 cm³ (10 g) of tissue: **6.20 mW/g**

6. Dipole Impedance and Return Loss

The dipole was positioned at the flat phantom sections according to section 4 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 835 MHz: $\text{Re}\{Z\} = 45.6 \Omega$

$\text{Im}\{Z\} = -4.3 \Omega$

Return Loss at 835 MHz **-23.7 dB**

4. Handling

Do not apply excessive force to the dipole arms, because they might bend. Bending of the dipole arms stresses the soldered connections near the feedpoint leading to a damage of the dipole.

5. Design



The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

6. Power Test

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.



Validation Dipole D835V2 SN455, d = 15 mm

Frequency: 835 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(6.60,6.60,6.60) at 835 MHz; IEEE1528 835 MHz: $\sigma = 0.90 \text{ mho/m}$, $\epsilon_r = 42.5$, $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: 3.84 mW/g \pm 0.02 dB, SAR (1g): 2.46 mW/g \pm 0.02 dB, SAR (10g): 1.58 mW/g \pm 0.01 dB, (Worst-case extrapolation)
Penetration depth: 12.1 (11.1, 13.5) [mm]
Powerdrift: 0.00 dB

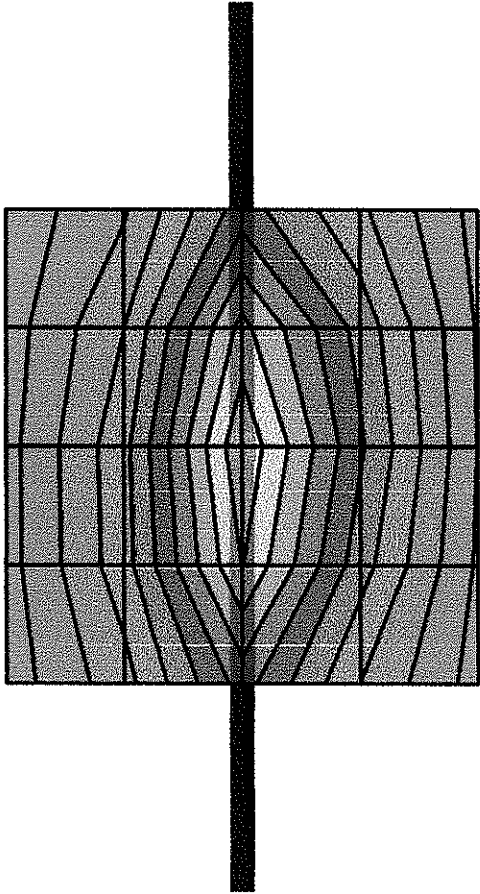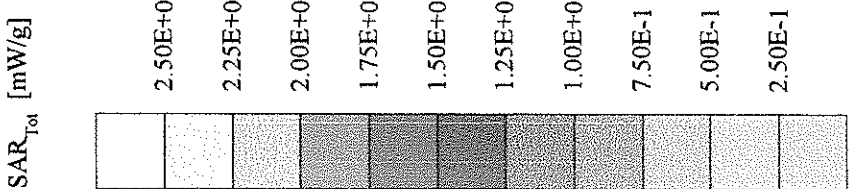

Validation Dipole D835V2 SN455, d = 15 mm

Frequency: 835 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(6.60,6.60) at 835 MHz; IEEE1528 835 MHz: $\sigma = 0.90 \text{ mho/m}$ $\epsilon_r = 42.5$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: 3.40 mW/g $\pm 0.02 \text{ dB}$, SAR (1g): 2.30 mW/g $\pm 0.02 \text{ dB}$, SAR (10g): 1.52 mW/g $\pm 0.01 \text{ dB}$, (Advanced extrapolation)
Penetration depth: 13.1 (12.8, 13.6) [mm]
Powerdrift: 0.00 dB

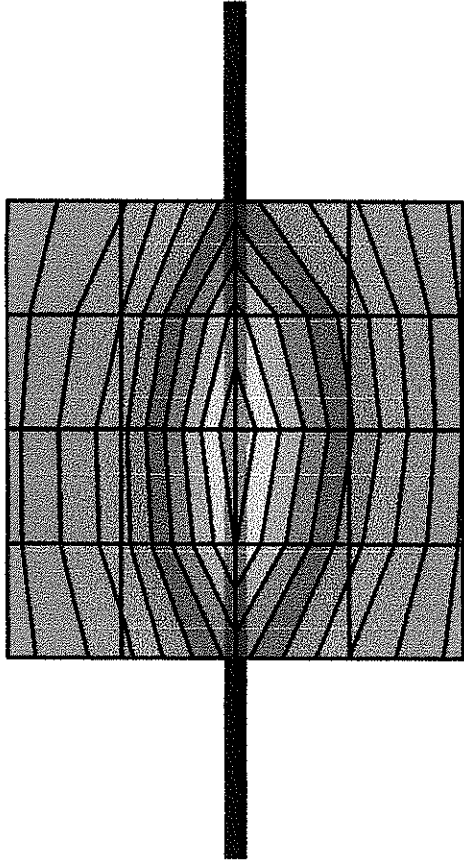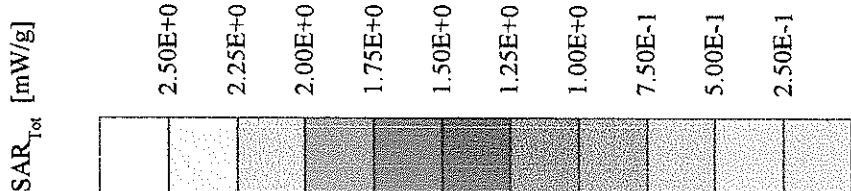

Del


PRM

Cor

Avg

16

↑

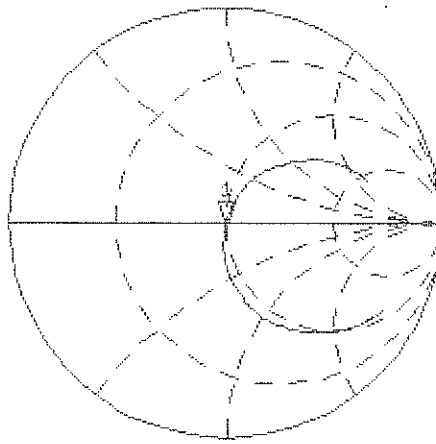


CH2 S11 LOG 5 dB/REF 0 dB 1:-34.736 dB 835.000 000 MHz

PRM

Cor

↑


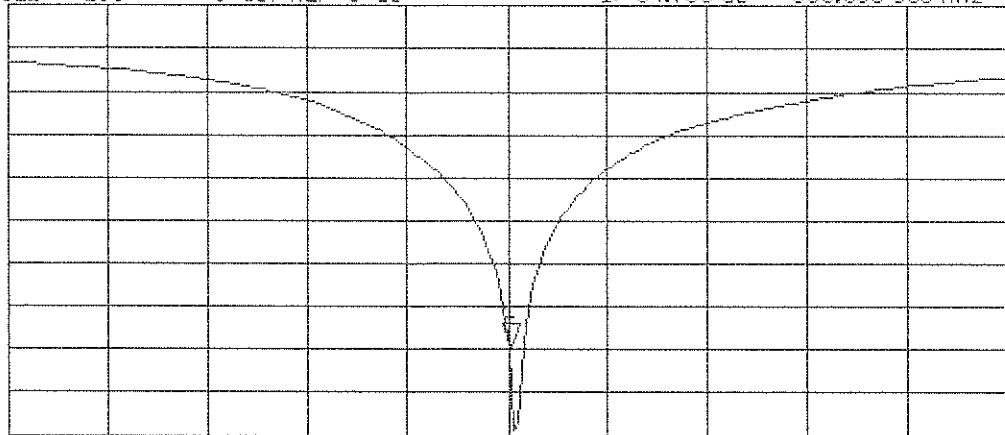


START 535.000 000 MHz

STOP 1 035.000 000 MHz



Validation Dipole D835V2 SN455, d = 15 mm

Frequency: 835 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(6.20,6.20) at 835 MHz; IEEE1528 835 MHz: $\sigma = 0.95$ mho/m $\epsilon_r = 55.3$ $\rho = 1.00$ g/cm³
Cubes (2): Peak: 3.91 mW/g ± 0.01 dB, SAR (1g): 2.53 mW/g ± 0.01 dB, SAR (10g): 1.65 mW/g ± 0.01 dB, (Worst-case extrapolation)
Penetration depth: 12.7 (11.6, 14.2) [mm]
Powerdrift: 0.01 dB

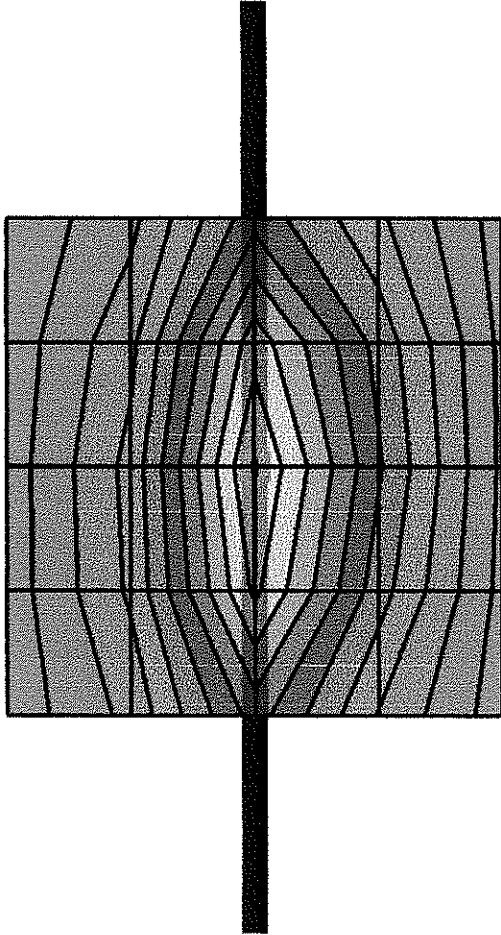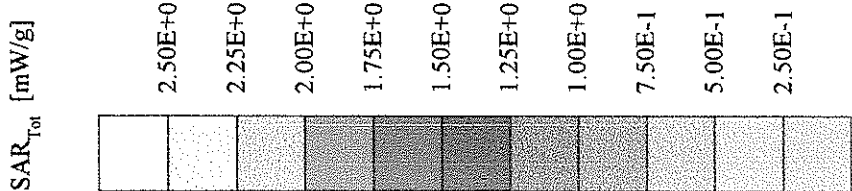

Validation Dipole D835V2 SN455, d = 15 mm


Frequency: 835 MHz; Antenna Input Power: 250 [mW]
SAM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(6.20,6.20,6.20) at 835 MHz; IEEE1528 835 MHz: $\sigma = 0.95 \text{ mho/m}$ $\epsilon_r = 55.3$ $\rho = 1.00 \text{ g/cm}^3$
Cubes (2): Peak: 3.30 mW/g $\pm 0.01 \text{ dB}$, SAR (1g): 2.31 mW/g $\pm 0.01 \text{ dB}$, SAR (10g): 1.55 mW/g $\pm 0.01 \text{ dB}$, (Advanced extrapolation)
Penetration depth: 14.3 (14.2, 14.5) [mm]
Powerdrift: 0.01 dB

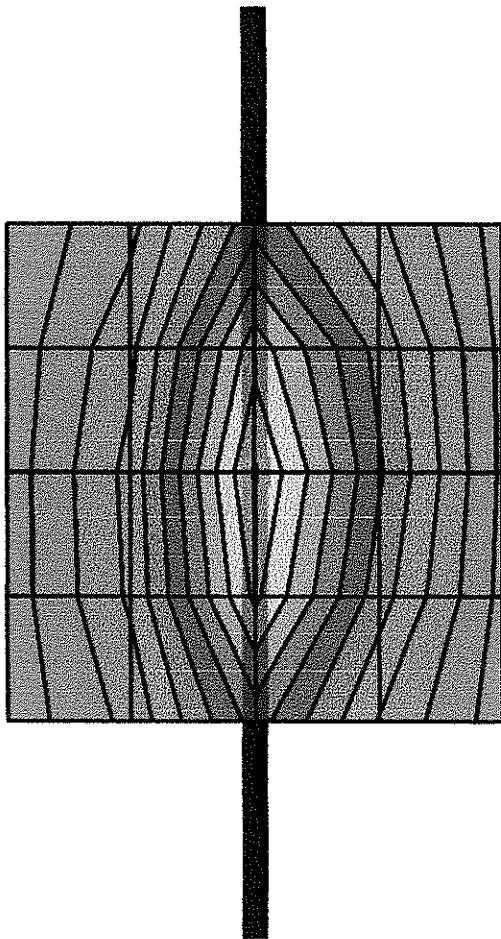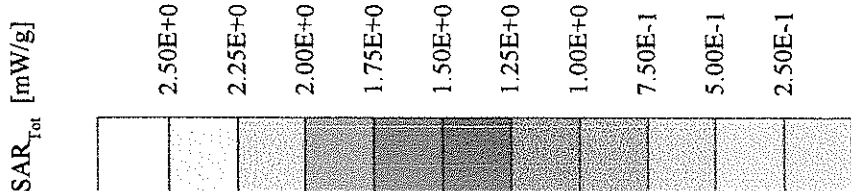

Del

PRm
Cor
Avg
16


↑

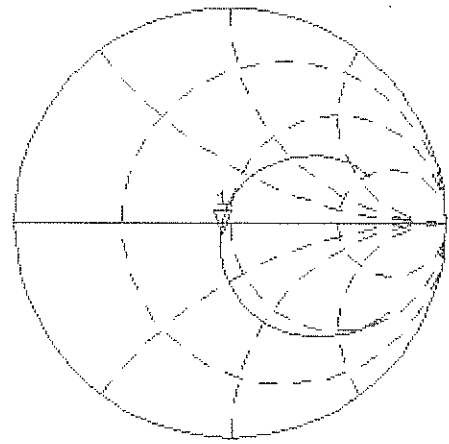

CH2 S11 LOG 5 dB/REF 0 dB 1:-23.713 dB 835.000 000 MHz

PRm
Cor

↑

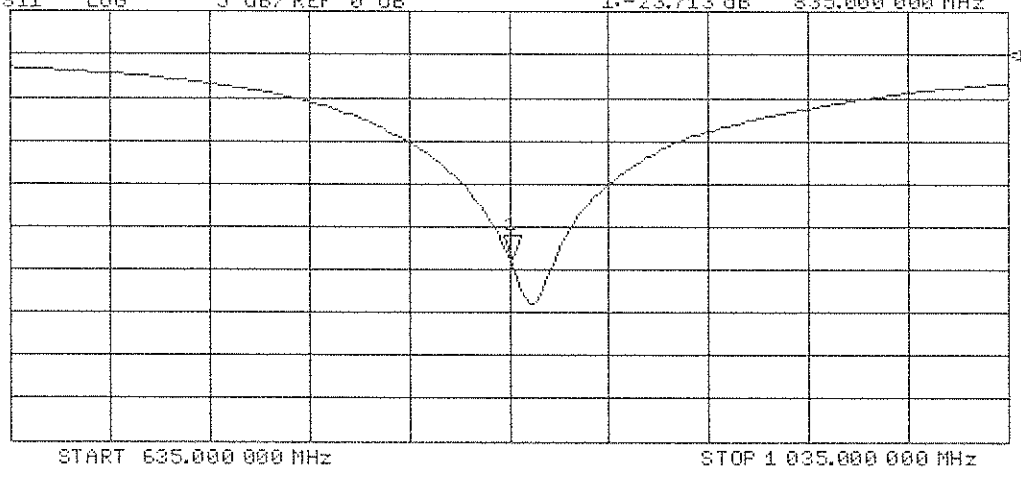

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Calibration Certificate

900 MHz System Validation Dipole

Type:

D900V2

Serial Number:

025

Place of Calibration:

Zurich

Date of Calibration:

October 23, 2001


Calibration Interval:

24 months


Schmid & Partner Engineering AG hereby certifies, that this device has been calibrated on the date indicated above. The calibration was performed in accordance with specifications and procedures of Schmid & Partner Engineering AG.

Wherever applicable, the standards used in the calibration process are traceable to international standards. In all other cases the standards of the Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zurich, Switzerland have been applied.

Calibrated by:



Approved by:

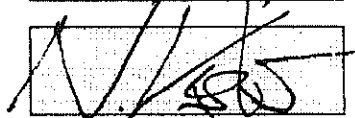

DASY

Dipole Validation Kit

Type: D900V2

Serial: 025

Manufactured: November 12, 1997
Calibrated: October 23, 2001

1. Measurement Conditions

The measurements were performed in the flat section of the new generic twin phantom filled with head simulating solution of the following electrical parameters at 900 MHz:

Relative Dielectricity	41.5	$\pm 5\%$
Conductivity	0.97 mho/m	$\pm 5\%$

The DASY3 System (Software version 3.1c) with a dosimetric E-field probe ET3DV6 (SN:1507, Conversion factor 6.27 at 900 MHz) was used for the measurements.

The dipole was mounted on the small tripod so that the dipole feedpoint was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15mm from dipole center to the solution surface. The included distance holder was used during measurements for accurate distance positioning.

The coarse grid with a grid spacing of 15mm was aligned with the dipole. The 5x5x7 fine cube was chosen for cube integration. Probe isotropy errors were cancelled by measuring the SAR with normal and 90° turned probe orientations and averaging.

The dipole input power (forward power) was 250mW $\pm 3\%$. The results are normalized to 1W input power.

2. SAR Measurement

Standard SAR-measurements were performed with the phantom according to the measurement conditions described in section 1. The results have been normalized to a dipole input power of 1W (forward power). The resulting averaged SAR-values are:

averaged over 1 cm³ (1 g) of tissue: **11.36 mW/g**

averaged over 10 cm³ (10 g) of tissue: **7.20 mW/g**

Note: If the liquid parameters for validation are slightly different from the ones used for initial calibration, the SAR-values will be different as well.

3. Dipole Impedance and Return Loss

The impedance was measured at the SMA-connector with a network analyzer and numerically transformed to the dipole feedpoint. The transformation parameters from the SMA-connector to the dipole feedpoint are:

Electrical delay:	1.401 ns	(one direction)
Transmission factor:	0.993	(voltage transmission, one direction)

The dipole was positioned at the flat phantom sections according to section 1 and the distance holder was in place during impedance measurements.

Feedpoint impedance at 900 MHz:	$\text{Re}\{Z\} = 49.2 \, \Omega$
---------------------------------	-----------------------------------

$\text{Im}\{Z\} = -3.6 \, \Omega$

Return Loss at 900 MHz	-28.7 dB
------------------------	-----------------

4. Handling



The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

Do not apply excessive force to the dipole arms, because they might bend. If the dipole arms have to be bent back, take care to release stress to the soldered connections near the feedpoint; they might come off.

After prolonged use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

/alidation Dipole D900V2 SN:025, d = 15 mm

Frequency: 900 MHz; Antenna Input Power: 250 [mW]
AM Phantom; Flat Section; Grid Spacing: Dx = 20.0, Dy = 20.0, Dz = 10.0
Probe: ET3DV6 - SN1507; ConvF(6.27,6.27,6.27) at 900 MHz; IEEE1528 900 MHz; $\sigma = 0.97$ mho/m $\epsilon_r = 41.5$ $\rho = 1.00$ g/cm³
Tubes (2): Peak: 4.59 mW/g ± 0.00 dB, SAR (1g): 2.84 mW/g ± 0.00 dB, SAR (10g): 1.80 mW/g ± 0.00 dB, (Worst-case extrapolation)
Penetration depth: 11.5 (10.3, 13.2) [mm]
Overdrift: 0.03 dB

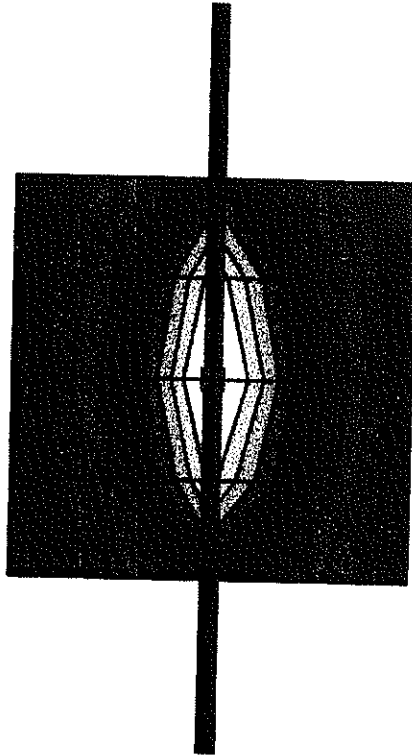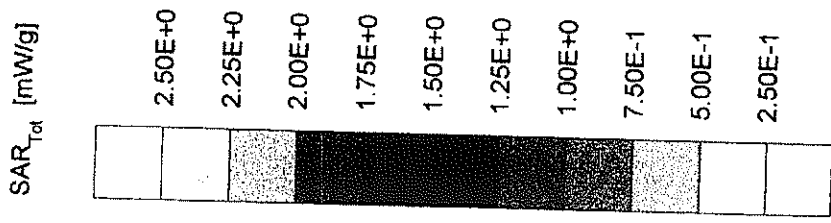

CH1 S11 1 U FS

23 Oct 2001 11:33:53

1: 49.238 Ω -3.6133 Ω 48.341 pF

900.000 000 MHz

De1


PRM

Cor

Avg

16

↑

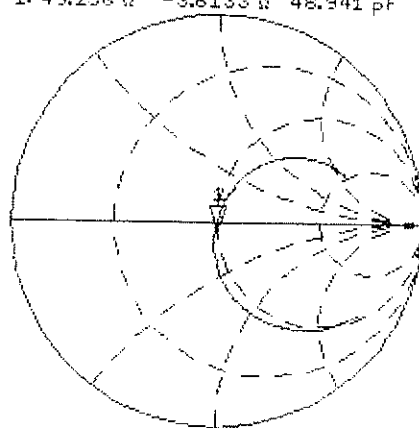

CH2 S11 LOG

5 dB/REF 0 dB


1:-28.663 dB

900.000 000 MHz

PRM

Cor

↑

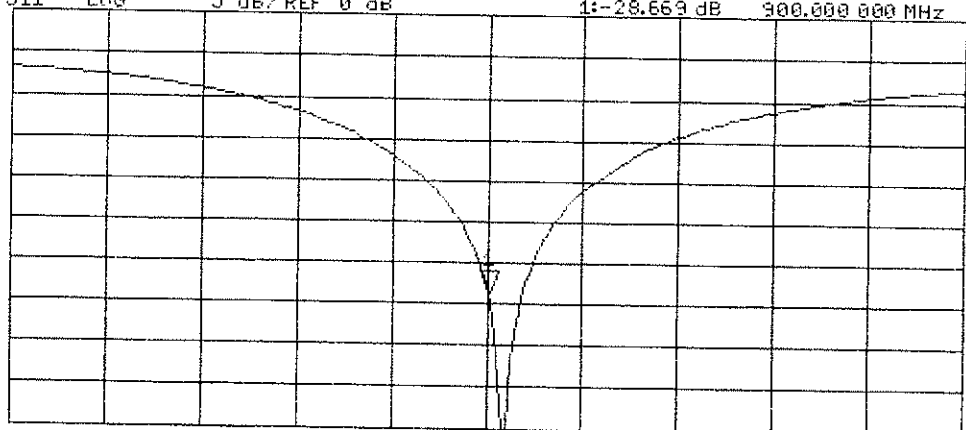

START 700.000 000 MHz

STOP 1 1100.000 000 MHz