

NAME: EWUNOBO    OBJECT: 1301-SVB\_154\_405    DATE: 12-Feb-03 10:22:20

ALL DATA AND INFORMATION CONTAINED IN OR DISCLOSED BY THIS DOCUMENT IS  
CONFIDENTIAL AND PROPRIETARY INFORMATION OF ERICSSON WIRELESS COMMUNICATIONS INC.  
AND ALL RIGHTS THEREIN ARE EXPRESSLY RESERVED. BY ACCEPTING THIS MATERIAL  
THE RECIPIENT AGREES THAT THIS MATERIAL AND THE INFORMATION CONTAINED  
THEREIN IS HELD IN CONFIDENCE AND IN TRUST AND WILL NOT BE USED, COPIED,  
REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER  
TO OTHERS WITHOUT THE EXPRESS WRITTEN PERMISSION OF ERICSSON WIRELESS  
COMMUNICATIONS INC. THIS TECHNOLOGY IS CONTROLLED BY THE UNITED STATES  
GOVERNMENT. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

DWG NO.		1301-SVB 154 405 Uen		SH	REV		
				1	A		
REVISIONS							
REV	DESCRIPTION					DATE	APPROVED
A	SEE CR 102970 N.BOURGET 02/11/03					SIG ON	FILE

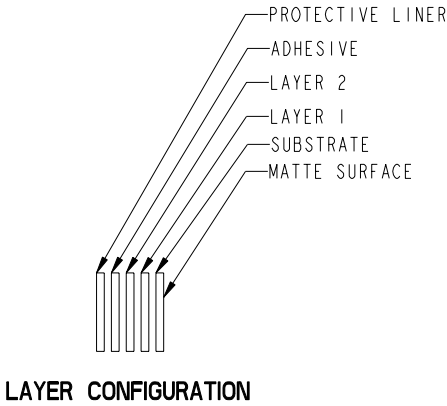
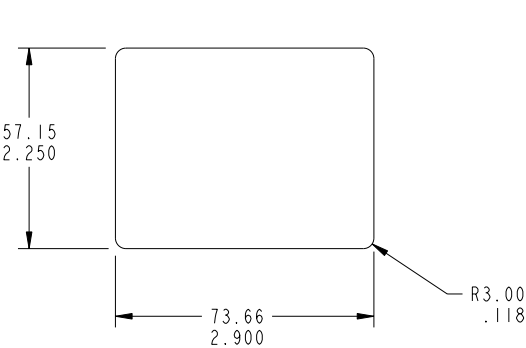


TABLE 1				
LABEL SLASH NO.	ARTWORK FILE	ARTWORK REVISION	ARTWORK LAYER NO.	COLOR
/1	190 89-SVB 154 405	A	1	BLACK FED-STD-595 NO.27038 SEMI-GLOSS
			2	WHITE FED-STD-595 NO.27925 SEMI-GLOSS

12. DURABILITY TEST TO COMPLY WITH UL 1950 STANDARD THIRD EDITION, PARAGRAPH 1.7.15.

11. PART TO BE MANUFACTURED IN ACCORDANCE WITH UL 969 STANDARD.

10. TEMPERATURE RATING: LABEL MATERIAL, ADHESIVE AND INK MUST BE SUITABLE FOR CONTINUOUS USE FROM -40°C (-40°F) TO +70°C (+158°F).

9. ARTWORK WAS CREATED IN CORELDRAW 9.0. DEVIATION FROM SPECIFIED FONT(S) NOT PERMITTED WITHOUT PRIOR APPROVAL BY EWU.

8. FOR ARTWORK USE ELECTRONIC DATA 190 89-SVB 154 405 AND APPROPRIATE SLASH NUMBER AND REVISION PER TABLE 1.

7. BAG AND TAG ITEM IN ACCORDANCE WITH EWU PRODUCT IDENTIFICATION MARKING SPECIFICATION GS80-31042-1, MARKING CODE 101, CONTENT/FORMAT OPTION 1.
6. USE COLORS SPECIFIED IN TABLE 1. COLOR SAMPLES TO BE VISUALLY INSPECTED AND APPROVED BY EWU PRIOR TO MANUFACTURE.

5. MATERIAL:  
a. SUBSTRATE: 0.25/.010 THK POLYCARBONATE UL94-V0 SHEET. VELVET MATTE, GE-LEXAN FR65-112.  
3M LAMINATING ADHESIVE #468MP. NO SUBSTITUTIONS PERMITTED WITHOUT PRIOR APPROVAL BY EWU.

4. WORKMANSHIP SHALL BE IN ACCORDANCE WITH ERICSSON WIRELESS COMMUNICATIONS INC. (EWU) MECHANICAL WORKMANSHIP STANDARD 80-10767-1.

3. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

2. MILLIMETERS (MM) ARE THE CONTROLLING DIMENSIONS ON THIS DRAWING. INCH DIMENSIONS ARE FOR REFERENCE ONLY.

1. INTERPRET DRAWING PER MIL-STD-100.
- NOTES: UNLESS OTHERWISE SPECIFIED

MM  
INCHES

THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED  
DIMENSION UNITS APPLY  
AFTER SURFACE TREATMENT

TOLERANCES

MM	LINEAR	INCHES	ANGULAR
X	± 2.5	.X	± .1
X.X	± 0.76	.XX	± .03
X.XX	± 0.25	.XXX	± .010

CAD TOOL

Pro/ENGINEER 2001

DRW FILE: 1301-SVB\_154\_405 A.0+

PART FILE: SVB\_154\_405 A.0+

MM

HOLE DIAMETERS

INCHES

0.34	- 6.35	+0.13	-0.03	.013	- .250	+0.05	-0.01
6.37	- 12.70	+0.15	-0.03	.251	- .500	+0.06	-0.01
12.72	- 25.40	+0.25	-0.03	.501	- 1.000	+0.10	-0.01

CONTRACT NO.

NONE

DATE

02/11/03

DRW

N. BOURGET

CHK

REDD

SIG

ON FILE

ENG

P.E.

MFG

Q.A.

C.M.

ERICSSON PROPRIETARY

COPYRIGHT (C) 2003 ERICSSON WIRELESS COMMUNICATIONS INC (EWU). ALL RIGHTS RESERVED.

ERICSSON

TITLE

LABEL, RBS 1130, REGULATORY

SIZE

DRAWING NO

D

1301-SVB 154 405 Uen

REV

A

SCALE

1/1

SHEET

1

OF

1