


Element Materials Technology

(formerly PCTEST) 18855 Adams Court, Morgan Hill, CA 95037 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.element.com



PART 27 MEASUREMENT REPORT

Applicant Name:

Apple Inc. One Apple Park Way Cupertino, CA 95014 United States Date of Testing: 7/1/2024 - 12/25/2024 Test Report Issue Date: 1/17/2025 Test Site/Location: Element Materials Technology, Morgan Hill, CA, USA Test Report Serial No.: 1C2410210073-11-R1.BCG

FCC ID:BCGA3267Applicant Name:Apple Inc.

Application Type: Model: EUT Type: FCC Classification: FCC Rule Part: Test Procedure(s): Certification A3267, A3270 Tablet Device PCS Licensed Transmitter (PCB) 27 ANSI C63.26-2015, TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1C2410210073-11-R1.BCG) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose accordingly

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez Executive Vice President



FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 1 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 1 01 205
			1/2 2 00/07/2022




TABLE OF CONTENTS

1.0	INTRO	DDUCTION	7
	1.1	Scope	7
	1.2	Element Materials Technology Test Location	7
	1.3	Test Facility / Accreditations	7
2.0	PRO	DUCT INFORMATION	8
	2.1	Equipment Description	8
	2.2	Device Capabilities	8
	2.3	Antenna Description	9
	2.4	Test Support Equipment	9
	2.5	Test Configuration	9
	2.6	Software and Firmware	
	2.7	EMI Suppression Device(s)/Modifications	9
3.0	DESC	RIPTION OF TESTS	.10
	3.1	Evaluation Procedure	. 10
	3.2	Radiated Spurious Emissions	. 10
4.0	MEAS		.11
5.0	TEST	EQUIPMENT CALIBRATION DATA	.12
6.0	SAMF	PLE CALCULATIONS	.13
7.0	TEST	RESULTS	.14
	7.1	Summary	. 14
	7.2	Occupied Bandwidth	. 16
	7.3	Spurious and Harmonic Emissions at Antenna Terminal	.73
	7.4	Band Edge Emissions at Antenna Terminal	. 85
	7.5	Peak-Average Ratio	175
	7.6	Radiated Power (EIRP)	232
	7.7	Radiated Spurious Emissions Measurements	249
	7.8	Frequency Stability / Temperature Variation	262
8.0	CON	CLUSION2	265

FCC ID: BCGA3267	element	element PART 27 MEASUREMENT REPORT	
Test Report S/N:	Test Dates:	EUT Type:	Page 2 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	1/2024 - 12/25/2024 Tablet Device	
			V2.2 09/07/2023





PART 27 MEASUREMENT REPORT



						EIRP		_
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	Max. Power [W]	Max. Power [dBm]	Emission Designato
		Π/2 BPSK	3455.0 - 3545.0	8.670	4.12	0.813	29.10	8M67G7W
		QPSK	3455.0 - 3545.0	8.971	5.57	0.811	29.09	8M97G7W
	10 MHz	16QAM	3455.0 - 3545.0	8.968	6.25	0.638	28.05	8M97D7V
		64QAM	3455.0 - 3545.0	8.984	6.52	0.514	27.11	8M98D7V
		256QAM	3455.0 - 3545.0	8.956	6.84	0.263	24.20	8M96D7V
		Π/2 BPSK	3457.5 - 3542.5	12.838	4.09	0.813	29.10	12M8G7V
		QPSK	3457.5 - 3542.5	13.569	5.48	0.802	29.04	13M6G7V
	15 MHz	16QAM	3457.5 - 3542.5	13.647	6.30	0.646	28.10	13M6D7V
		64QAM	3457.5 - 3542.5	13.560	6.62	0.506	27.04	13M6D7V
		256QAM	3457.5 - 3542.5	13.657	6.55	0.262	24.19	13M7D7V
		TT/2 BPSK	3460.0 - 3540.0	17.878	4.05	0.805	29.06	17M9G7V
		QPSK	3460.0 - 3540.0	18.290	5.44	0.813	29.10	18M3G7V
	20 MHz	16QAM	3460.0 - 3540.0	18.236	6.21	0.649	28.12	18M2D7V
		64QAM	3460.0 - 3540.0	18.288	6.65	0.515	27.12	18M3D7V
		256QAM	3460.0 - 3540.0	18.281	6.56	0.264	24.21	18M3D7V
		T/2 BPSK	3465.0 - 3535.0	27.020	4.14	0.811	29.09	27M0G7
	00141	QPSK	3465.0 - 3535.0	27.923	5.55	0.813	29.10	27M9G7V
	30MHz	16QAM	3465.0 - 3535.0	27.938	6.36	0.631	28.00	27M9D7V
		64QAM	3465.0 - 3535.0	27.978 27.967	6.57	0.506	27.04	28M0D7V
		256QAM	3465.0 - 3535.0		6.80	0.256	24.08	28M0D7
	40 MHz	T/2 BPSK	3470.0 - 3530.0	35.776	4.10	0.813	29.10	35M8G7V
		QPSK 460 AM	3470.0 - 3530.0	37.813	5.50	0.813	29.10	37M8G7V
		16QAM 64QAM	3470.0 - 3530.0 3470.0 - 3530.0	37.974 37.894	6.29 6.57	0.647	28.11 27.13	38M0D7
		256QAM					24.12	37M9D7V
			3470.0 - 3530.0 3475.0 - 3525.0	37.913 45.891	6.60 3.91	0.258 0.794	29.00	37M9D7\ 45M9G7\
	50 MHz	π/2 BPSK QPSK	3475.0 - 3525.0	47.574	5.32	0.794	29.00	47M6G7
NR Band n77 (PC2)		16QAM	3475.0 - 3525.0	47.520	6.08	0.630	27.99	47M5D7V
(3450 - 3550MHz)		64QAM	3475.0 - 3525.0	47.570	6.47	0.505	27.03	47M6D7V
		256QAM	3475.0 - 3525.0	47.511	6.55	0.262	24.18	47M5D7\
		T/2 BPSK	3480.0 - 3520.0	58.074	4.00	0.813	29.10	58M1G7V
		QPSK	3480.0 - 3520.0	58.034	5.36	0.804	29.05	58M0G7V
	60 MHz	16QAM	3480.0 - 3520.0	57.824	6.19	0.634	28.02	57M8D7\
	00 1011 12	64QAM	3480.0 - 3520.0	57.860	6.55	0.514	27.11	57M9D7V
		256QAM	3480.0 - 3520.0	57.906	6.68	0.264	24.21	57M9D7V
		π/2 BPSK	3485.0 - 3515.0	64.414	4.39	0.204	29.09	64M4G7\
		QPSK	3485.0 - 3515.0	67.643	5.66	0.813	29.10	67M6G7V
	70 MHz	16QAM	3485.0 - 3515.0	67.559	6.41	0.640	28.06	67M6D7V
		64QAM	3485.0 - 3515.0	67.682	6.53	0.498	26.97	67M7D7V
		256QAM	3485.0 - 3515.0	67.558	6.73	0.262	24.19	67M6D7V
		π/2 BPSK	3490.0 - 3510.0	77.269	4.04	0.778	28.91	77M3G7V
		QPSK	3490.0 - 3510.0	77.665	5.38	0.813	29.10	77M7G7V
	80 MHz	16QAM	3490.0 - 3510.0	77.744	6.22	0.647	28.11	77M7D7V
		64QAM	3490.0 - 3510.0	77.576	6.48	0.514	27.11	77M6D7V
		256QAM	3490.0 - 3510.0	77.527	6.71	0.261	24.16	77M5D7V
		T/2 BPSK	3495.0 - 3505.0	86.897	4.10	0.798	29.02	86M9G7V
		QPSK	3495.0 - 3505.0	87.685	5.43	0.813	29.10	87M7G7V
	90 MHz	16QAM	3495.0 - 3505.0	87.786	6.23	0.647	28.11	87M8D7V
		64QAM	3495.0 - 3505.0	87.666	6.54	0.506	27.04	87M7D7V
		256QAM	3495.0 - 3505.0	87.705	6.66	0.264	24.22	87M7D7V
		π/2 BPSK	3500	96.715	4.09	0.813	29.10	96M7G7V
		QPSK	3500	97.548	5.45	0.798	29.02	97M5G7V
	100 MHz	16QAM	3500	97.720	6.35	0.638	28.05	97M7D7V
		64QAM	3500	97.566	6.57	0.513	27.10	97M6D7V
		256QAM	3500	97.554	6.67	0.259	24.14	97M6D7V

EUT Overview

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 3 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 5 01 205
	•		V2.2 09/07/2023



	EIRP							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	Max. Power [W]	Max. Power [dBm]	Emission Designator
		π/2 BPSK	3455.0 - 3545.0	8.670	4.12	0.632	28.01	8M67G7W
		QPSK	3455.0 - 3545.0	8.971	5.57	0.661	28.20	8M97G7W
	10 MHz	16QAM	3455.0 - 3545.0	8.968	6.25	0.527	27.22	8M97D7W
		64QAM	3455.0 - 3545.0	8.984	6.52	0.422	26.25	8M98D7W
		256QAM	3455.0 - 3545.0	8.956	6.84	0.216	23.34	8M96D7W
		π/2 BPSK	3457.5 - 3542.5	12.838	4.09	0.661	28.20	12M8G7W
		QPSK	3457.5 - 3542.5	13.569	5.48	0.647	28.11	13M6G7W
	15 MHz	16QAM	3457.5 - 3542.5	13.647	6.30	0.524	27.19	13M6D7W
		64QAM	3457.5 - 3542.5	13.560	6.62	0.417	26.20	13M6D7W
		256QAM	3457.5 - 3542.5	13.657	6.55	0.210	23.23	13M7D7W
		π/2 BPSK	3460.0 - 3540.0	17.878	4.05	0.659	28.19	17M9G7W
		QPSK	3460.0 - 3540.0	18.290	5.44	0.661	28.20	18M3G7W
	20 MHz	16QAM	3460.0 - 3540.0	18.236	6.21	0.522	27.18	18M2D7W
		64QAM	3460.0 - 3540.0	18.288	6.65	0.417	26.20	18M3D7W
		256QAM	3460.0 - 3540.0	18.281	6.56	0.210	23.22	18M3D7W
		π/2 BPSK	3465.0 - 3535.0	27.020	4.14	0.658	28.18	27M0G7W
		QPSK	3465.0 - 3535.0	27.923	5.55	0.661	28.20	27M9G7W
	30MHz	16QAM	3465.0 - 3535.0	27.938	6.36	0.524	27.19	27M9D7W
		64QAM	3465.0 - 3535.0	27.978	6.57	0.410	26.13	28M0D7W
		256QAM	3465.0 - 3535.0	27.967	6.80	0.207	23.15	28M0D7W
		Π/2 BPSK	3470.0 - 3530.0	35.776	4.10	0.661	28.20	35M8G7W
		QPSK	3470.0 - 3530.0	37.813	5.50	0.661	28.20	37M8G7W
	40 MHz	16QAM	3470.0 - 3530.0	37.974	6.29	0.527	27.22	38M0D7W
		64QAM	3470.0 - 3530.0	37.894	6.57	0.420	26.23	37M9D7W
		256QAM	3470.0 - 3530.0	37.913	6.60	0.212	23.27	37M9D7W
	50 MHz	TT/2 BPSK	3475.0 - 3525.0	45.891	3.91	0.661	28.20	45M9G7W
NR Band n77 (PC3)		QPSK	3475.0 - 3525.0	47.574	5.32	0.661	28.20	47M6G7W
(3450 - 3550MHz)		16QAM	3475.0 - 3525.0	47.520	6.08	0.527	27.22	47M5D7W
		64QAM	3475.0 - 3525.0	47.570	6.47	0.417	26.20	47M6D7W
		256QAM	3475.0 - 3525.0	47.511	6.55	0.212	23.26	47M5D7W
		TT/2 BPSK	<u>3480.0 - 3520.0</u>	58.074	4.00	0.659	28.19	58M1G7W
	60 MHz	QPSK 16QAM	3480.0 - 3520.0	58.034 57.824	5.36	0.661 0.514	28.20 27.11	58M0G7W 57M8D7W
		64QAM	3480.0 - 3520.0 3480.0 - 3520.0	57.860	6.19 6.55	0.514	26.18	57M9D7W
		256QAM	3480.0 - 3520.0	57.906	6.68	0.415	23.28	57M9D7W
		T/2 BPSK	3485.0 - 3515.0	64.414	4.39	0.658	28.18	64M4G7W
		QPSK	3485.0 - 3515.0	67.643	5.66	0.661	28.20	67M6G7W
	70 MHz	16QAM	3485.0 - 3515.0	67.559	6.41	0.527	27.22	67M6D7W
	, C /VII /2	64QAM	3485.0 - 3515.0	67.682	6.53	0.414	26.17	67M7D7W
		256QAM	3485.0 - 3515.0	67.558	6.73	0.214	23.31	67M6D7W
		π/2 BPSK	3490.0 - 3510.0	77.269	4.04	0.644	28.09	77M3G7W
		QPSK	3490.0 - 3510.0	77.665	5.38	0.661	28.20	77M7G7W
	80 MHz	16QAM	3490.0 - 3510.0	77.744	6.22	0.524	27.19	77M7D7W
	00 //ii i/	64QAM	3490.0 - 3510.0	77.576	6.48	0.405	26.07	77M6D7W
		256QAM	3490.0 - 3510.0	77.527	6.71	0.214	23.31	77M5D7W
		π/2 BPSK	3495.0 - 3505.0	86.897	4.10	0.661	28.20	86M9G7W
		QPSK	3495.0 - 3505.0	87.685	5.43	0.659	28.19	87M7G7W
	90 MHz	16QAM	3495.0 - 3505.0	87.786	6.23	0.515	27.12	87M8D7W
		64QAM	3495.0 - 3505.0	87.666	6.54	0.413	26.16	87M7D7W
		256QAM	3495.0 - 3505.0	87.705	6.66	0.213	23.29	87M7D7W
		π/2 BPSK	3500	96.715	4.09	0.649	28.12	96M7G7W
		QPSK	3500	97.548	5.45	0.661	28.20	97M5G7W
	100 MHz	16QAM	3500	97.720	6.35	0.506	27.04	97M7D7W
		64QAM	3500	97.566	6.57	0.418	26.21	97M6D7W
		256QAM	3500	97.554	6.67	0.214	23.30	97M6D7W
			FUT Over					

EUT Overview

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 4 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 4 01 205
			V2 2 09/07/2023



				EIRP		RP		
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	Max. Power [W]	Max. Power [dBm]	Emission Designator
		π/2 BPSK	3705.0 - 3975.0	8.610	4.12	0.891	29.50	8M61G7W
		QPSK	3705.0 - 3975.0	8.647	5.42	0.885	29.47	8M65G7W
	10 MHz	16QAM	3705.0 - 3975.0	8.625	6.15	0.705	28.48	8M63D7W
		64QAM	3705.0 - 3975.0	8.600	6.67	0.558	27.47	8M60D7W
		256QAM	3705.0 - 3975.0	8.580	6.69	0.355	25.50	8M58D7W
		π/2 BPSK	3707.5 - 3972.5	12.845	4.02	0.883	29.46	12M8G7W
		QPSK	3707.5 - 3972.5	13.652	5.33	0.891	29.50	13M7G7W
	15 MHz	16QAM	3707.5 - 3972.5	13.609	6.24	0.713	28.53	13M6D7W
		64QAM	3707.5 - 3972.5	13.580	6.42	0.548	27.39	13M6D7W
		256QAM	3707.5 - 3972.5	13.638	6.77	0.355	25.50	13M6D7W
		π/2 BPSK	3710.0 - 3970.0	17.972	3.86	0.891	29.50	18M0G7W
		QPSK	3710.0 - 3970.0	18.263	5.21	0.883	29.46	18M3G7W
	20 MHz	16QAM	3710.0 - 3970.0	18.351	6.18	0.706	28.49	18M4D7W
		64QAM	3710.0 - 3970.0	18.278	6.34	0.558	27.47	18M3D7W
		256QAM	3710.0 - 3970.0	18.223	6.47	0.355	25.50	18M2D7W
		Π/2 BPSK	3715.0 - 3965.0	26.790	4.20	0.881	29.45	26M8G7W
		QPSK	3715.0 - 3965.0	27.933	5.16	0.891	29.50	27M9G7W
	30MHz	16QAM	3715.0 - 3965.0	28.017	6.16	0.710	28.51	28M0D7W
		64QAM	3715.0 - 3965.0	27.888	6.34	0.565	27.52	27M9D7W
		256QAM	3715.0 - 3965.0	27.929	6.57	0.355	25.50	27M9D7W
		π/2 BPSK	3720.0 - 3960.0	35.823	3.99	0.891	29.50	35M8G7W
		QPSK	3720.0 - 3960.0	37.916	5.30	0.877	29.43	37M9G7W
	40 MHz	16QAM	3720.0 - 3960.0	37.887	6.11	0.697	28.43	37M9D7W
		64QAM	3720.0 - 3960.0	38.058	6.41	0.562	27.50	38M1D7W
		256QAM	3720.0 - 3960.0	37.855	6.34	0.355	25.50	37M9D7W
		Π/2 BPSK	3725.0 - 3955.0	45.620	4.17	0.881	29.45	45M6G7W
	50 MHz	QPSK	3725.0 - 3955.0	47.585	5.02	0.891	29.50	47M6G7W
NR Band n77 (PC2)		16QAM	3725.0 - 3955.0	47.535	6.08	0.716	28.55	47M5D7W
(3700 - 3980MHz)		64QAM	3725.0 - 3955.0	47.606	6.37	0.569	27.55	47M6D7W
		256QAM	3725.0 - 3955.0	47.685	6.48	0.355	25.50	47M7D7W
		Π/2 BPSK	3730.0 - 3950.0	57.966	4.50	0.877	29.43	58M0G7W
		QPSK	3730.0 - 3950.0	57.843	4.88	0.891	29.50	57M8G7W
	60 MHz	16QAM	3730.0 - 3950.0	58.125	6.05	0.708	28.50	58M1D7W
		64QAM	3730.0 - 3950.0	57.880	6.34	0.558	27.47	57M9D7W
		256QAM	3730.0 - 3950.0	58.043	6.33	0.355	25.50	58M0D7W
		Π/2 BPSK	3735.0 - 3945.0	64.475	4.84	0.891	29.50	64M5G7W
		QPSK	3735.0 - 3945.0	67.577	4.94	0.889	29.49	67M6G7W
	70 MHz	16QAM	3735.0 - 3945.0	67.593	5.99	0.711	28.52	67M6D7W
		64QAM	3735.0 - 3945.0	67.713	6.33	0.568	27.54	67M7D7W
		256QAM	3735.0 - 3945.0	67.566	6.33	0.355	25.50	67M6D7W
		Π/2 BPSK	3740.0 - 3940.0	77.403	4.56	0.889	29.49	77M4G7W
		QPSK	3740.0 - 3940.0	77.617	4.70	0.891	29.50	77M6G7W
	80 MHz	16QAM	3740.0 - 3940.0	77.838	6.02	0.708	28.50	77M8D7W
		64QAM	3740.0 - 3940.0	77.814	6.31	0.561	27.49	77M8D7W
		256QAM	3740.0 - 3940.0	77.794	6.34	0.355	25.50	77M8D7W
		Π/2 BPSK	3745.0 - 3935.0	87.059	3.87	0.875	29.42	87M1G7W
		QPSK	3745.0 - 3935.0	87.745	4.78	0.891	29.50	87M7G7W
	90 MHz	16QAM	3745.0 - 3935.0	87.720	6.17	0.705	28.48	87M7D7W
		64QAM	3745.0 - 3935.0	87.833	6.46	0.561	27.49	87M8D7W
		256QAM	3745.0 - 3935.0	87.765	6.39	0.355	25.50	87M8D7W
		π/2 BPSK	3750.0 - 3930.0	96.938	4.40	0.891	29.50	96M9G7W
		QPSK	3750.0 - 3930.0	97.686	5.02	0.891	29.50	97M7G7W
	100 MHz	16QAM	3750.0 - 3930.0	97.879	6.36	0.705	28.48	97M9D7W
		64QAM	3750.0 - 3930.0	97.887	6.68	0.551	27.41	97M9D7W
		256QAM	3750.0 - 3930.0	97.684	6.62	0.355	25.50	97M7D7W
	1		FUT Over			0.000		

EUT Overview

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 5 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 5 01 205
		-	V2 2 09/07/2023



				EIRP				
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	OBW [MHz]	PAR at 0.1% [dB]	Max. Power [W]	Max. Power [dBm]	Emission Designator
		π/2 BPSK	3705.0 - 3975.0	8.610	4.12	0.724	28.60	8M61G7W
		QPSK	3705.0 - 3975.0	8.647	5.42	0.721	28.58	8M65G7W
	10 MHz	16QAM	3705.0 - 3975.0	8.625	6.15	0.571	27.57	8M63D7W
		64QAM	3705.0 - 3975.0	8.600	6.67	0.456	26.59	8M60D7W
		256QAM	3705.0 - 3975.0	8.580	6.69	0.235	23.71	8M58D7W
		π/2 BPSK	3707.5 - 3972.5	12.845	4.02	0.724	28.60	12M8G7W
		QPSK	3707.5 - 3972.5	13.652	5.33	0.711	28.52	13M7G7W
	15 MHz	16QAM	3707.5 - 3972.5	13.609	6.24	0.564	27.51	13M6D7W
		64QAM	3707.5 - 3972.5	13.580	6.42	0.447	26.50	13M6D7W
		256QAM	3707.5 - 3972.5	13.638	6.77	0.229	23.60	13M6D7W
		π/2 BPSK	3710.0 - 3970.0	17.972	3.86	0.714	28.54	18M0G7W
		QPSK	3710.0 - 3970.0	18.263	5.21	0.724	28.60	18M3G7W
	20 MHz	16QAM	3710.0 - 3970.0	18.351	6.18	0.569	27.55	18M4D7W
		64QAM	3710.0 - 3970.0	18.278	6.34	0.456	26.59	18M3D7W
		256QAM	3710.0 - 3970.0	18.223	6.47	0.234	23.70	18M2D7W
		Π/2 BPSK	3715.0 - 3965.0	26.790	4.20	0.724	28.60	26M8G7W
		QPSK	3715.0 - 3965.0	27.933	5.16	0.710	28.51	27M9G7W
	30MHz	16QAM	3715.0 - 3965.0	28.017	6.16	0.569	27.55	28M0D7W
		64QAM	3715.0 - 3965.0	27.888	6.34	0.457	26.60	27M9D7W
		256QAM	3715.0 - 3965.0	27.929	6.57	0.232	23.66	27M9D7W
		π/2 BPSK	3720.0 - 3960.0	35.823	3.99	0.724	28.60	35M8G7W
		QPSK	3720.0 - 3960.0	37.916	5.30	0.723	28.59	37M9G7W
	40 MHz	16QAM	3720.0 - 3960.0	37.887	6.11	0.574	27.59	37M9D7W
		64QAM	3720.0 - 3960.0	38.058	6.41	0.455	26.58	38M1D7W
		256QAM	3720.0 - 3960.0	37.855	6.34	0.231	23.64	37M9D7W
		π/2 BPSK	3725.0 - 3955.0	45.620	4.17	0.721	28.58	45M6G7W
NR Band n77 (PC3)	50 MHz	QPSK	3725.0 - 3955.0	47.585	5.02	0.724	28.60	47M6G7W
(3700 - 3980MHz)		16QAM	3725.0 - 3955.0	47.535	6.08	0.586	27.68	47M5D7W
(3700 - 390010112)		64QAM	3725.0 - 3955.0	47.606	6.37	0.450	26.53	47M6D7W
		256QAM	3725.0 - 3955.0	47.685	6.48	0.239	23.79	47M7D7W
		π/2 BPSK	3730.0 - 3950.0	57.966	4.50	0.724	28.60	58M0G7W
		QPSK	3730.0 - 3950.0	57.843	4.88	0.724	28.60	57M8G7W
	60 MHz	16QAM	3730.0 - 3950.0	58.125	6.05	0.579	27.63	58M1D7W
		64QAM	3730.0 - 3950.0	57.880	6.34	0.459	26.62	57M9D7W
		256QAM	3730.0 - 3950.0	58.043	6.33	0.234	23.70	58M0D7W
		Π/2 BPSK	3735.0 - 3945.0	64.475	4.84	0.724	28.60	64M5G7W
		QPSK	3735.0 - 3945.0	67.577	4.94	0.723	28.59	67M6G7W
	70 MHz	16QAM	3735.0 - 3945.0	67.593	5.99	0.571	27.57	67M6D7W
		64QAM	3735.0 - 3945.0	67.713	6.33	0.457	26.60	67M7D7W
		256QAM	3735.0 - 3945.0	67.566	6.33	0.233	23.68	67M6D7W
		Π/2 BPSK	3740.0 - 3940.0	77.403	4.56	0.724	28.60	77M4G7W
		QPSK	3740.0 - 3940.0	77.617	4.70	0.723	28.59	77M6G7W
	80 MHz	16QAM	3740.0 - 3940.0	77.838	6.02	0.570	27.56	77M8D7W
		64QAM	3740.0 - 3940.0	77.814	6.31	0.457	26.60	77M8D7W
		256QAM	3740.0 - 3940.0	77.794	6.34	0.232	23.65	77M8D7W
		Π/2 BPSK	3745.0 - 3935.0	87.059	3.87	0.724	28.60	87M1G7W
		QPSK	3745.0 - 3935.0	87.745	4.78	0.705	28.48	87M7G7W
	90 MHz	16QAM	3745.0 - 3935.0	87.720	6.17	0.593	27.73	87M7D7W
		64QAM	3745.0 - 3935.0	87.833	6.46	0.469	26.71	87M8D7W
		256QAM	3745.0 - 3935.0	87.765	6.39	0.243	23.85	87M8D7W
		Π/2 BPSK	3750.0 - 3930.0	96.938	4.40	0.679	28.32	96M9G7W
		QPSK	3750.0 - 3930.0	97.686	5.02	0.724	28.60	97M7G7W
	100 MHz	16QAM	3750.0 - 3930.0	97.879	6.36	0.546	27.37	97M9D7W
		64QAM	3750.0 - 3930.0	97.887	6.68	0.447	26.50	97M9D7W
		256QAM	3750.0 - 3930.0	97.684	6.62	0.233	23.68	97M7D7W
	•		FUT Over					

EUT Overview

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 6 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 6 01 205
			V2 2 09/07/2023



1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Materials Technology Test Location

These measurement tests were conducted at the Element Materials Technology facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element Materials Technology

- Element Materials Technology is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Materials Technology TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Materials Technology facility is a registered (22831) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Agreements (MRAs).

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 7 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Page 7 of 265
	·		V2.2 09/07/2023



2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Tablet Device FCC ID:BCGA3267**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: WJR90Q30N3, LYHQ6QQTKY, D4WG6WKFL6, DLXH5R0001N0000RMD, DLXH5R0001E0000RMD

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, 802.11a/ax WIFI 6E, 802.15.4, Bluetooth (1x, EDR, LE1M, LE2M, HDR4, HDR8), NB UNII (1x, HDR4, HDR8), WPT

This device supports BT Beamforming

This device supports simultaneous transmission operations, which allows for multiple transmitters to transmit simultaneously on the same antenna. The table below shows all configurations possible.

	Simultaneous	Bluetooth 2.4GHz	Thread	WLAN	NB UNII	WIFI 5GHz	WIFI 6GHz		LTE / FR1 NR	
Antenna	Tx Config	BDR, EDR, HDR4/8, LE1/2M	802.15.4	802.11 b/g/n/ax	BDR, HDR4/8	802.11 a/n/ac/ax	802.11 a/ax	LB	MB/HB	Ultra High Band
Ant 3a	Config 1	✓	×	×	×	✓	×	×	✓	×
Ant 3a	Config 2	×	✓	×	×	✓	×	×	✓	×
Ant 3a	Config 3	×	×	✓	✓	×	×	×	✓	×
Ant 3a	Config 4	✓	×	×	×	×	✓	×	✓	×
Ant 3a	Config 5	×	✓	×	×	×	✓	×	✓	×
Ant 3a	Config 6	✓	×	×	×	✓	×	×	×	×
Ant 3a	Config 7	×	✓	×	×	✓	×	×	×	×
Ant 3a	Config 8	×	×	✓	✓	×	×	×	×	×
Ant 3a	Config 9	✓	×	×	×	×	✓	×	×	×
Ant 3a	Config 10	×	✓	×	×	×	✓	×	×	×
Ant 1a	Config 11	✓	×	×	×	×	×	×	×	✓
Ant 1a	Config 12	×	√	×	×	×	×	×	×	√
Ant 1a	Config 13	×	×	✓	×	×	×	×	×	✓
Ant 1b	Config 14	×	×	×	×	×	✓	×	×	√
Ant 1b	Config 15	×	×	×	×	√	×	×	×	√
Ant 1b	Config 16	×	×	×	✓	×	×	×	×	✓

Table 2-1. Simultaneous Transmission Configurations

 \checkmark = Support; * = Not Support

Note:

All the above simultaneous transmission configurations have been tested and the worst case configuration was found to be Config 1 and reported in RF Bluetooth, RF UNII OFDM, and RF FCC Part 27b test reports.

Specific 2.4GHz Wi-Fi antenna that can only transmit simultaneously with 2.4GHz Bluetooth antenna is listed in the SAR test report. For BT (2.4GHz), in both connected and disconnected modes, and Wi-Fi (2.4GHz) - Wi-Fi max power will not exceed minimum of (13.5dBm, SAR max cap, Reg max cap) power. Bluetooth can simultaneously transmit with IEEE 802.11a/n/ac/ax 5/6 GHz on separate antenna.

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 8 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 6 01 205
L		·	V2.2 09/07/2023



2.3 Antenna Description

The following antenna gains provided by the manufacturer were used for testing.

Band		Antenna	Gain [dBi]	
Danu	Antenna 3b	Antenna 2a	Antenna 4	Antenna 1a
NR Band n77 (Sub 1)	2.5	2.0	-2.0	-1.2
NR Band n77 (Sub 2)	2.9	2.3	-1.0	-2.4

Table 2-2. Highest Antenna Gain

2.4 Test Support Equipment

Apple MacBook Pro w/AC/DC Adapter Apple USB-C Cable	Model: Model:	A2141 A2166	S/N: S/N:	C02H604EQ05D C4H042705ZNPM0WA6
				C4H042705ZNPM0WA6
Apple USB-C Cable	Model [.]	c		
Apple USB-C Cable	Model	c .		
	mouch.	Spartan	S/N:	GXK1336018XKTR024
USB-C Cable	Model:	A246C	S/N:	DWH80115BK826GV19
w/ AC Adapter	Model:	A2305	S/N:	C4H95160004PF4F4V
Apple Pencil	Model:	B532	S/N:	KJ26TCFXJW
DC Power Supply	Model:	KPS3010D	S/N:	N/A
	USB-C Cable w/ AC Adapter Apple Pencil	USB-C Cable Model: w/ AC Adapter Model: Apple Pencil Model: DC Power Supply Model:	USB-C Cable Model: A246C w/ AC Adapter Model: A2305 Apple Pencil Model: B532	USB-C Cable Model: A246C S/N: w/ AC Adapter Model: A2305 S/N: Apple Pencil Model: B532 S/N: DC Power Supply Model: KPS3010D S/N:

Table 2-3. Test Support Equipment

2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.26 2015, TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration. The emissions below 1GHz and above 18GHz were tested with the highest transmitting power and the worst case channel.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

2.6 Software and Firmware

The test was conducted with firmware version 22D20 installed on the EUT.

2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 9 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Faye 3 01 200
			\/2 2 00/07/2023



3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the documents titled "American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services" (ANSI C63.26-2015 and TIA-603-E-2016) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure......None

3.2 Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated spurious emissions measurements and calculations, conversion method is used per the formulas in KDB 971168 Section 5.8.4. Field Strength (EIRP) is calculated using the following formulas:

 $E_{[dB\mu V/m]} = Measured amplitude level_{[dBm]} + 107 + Cable Loss_{[dB]} + Antenna Factor_{[dB/m]} And$

 $EIRP_{[dBm]} = E_{[dB\mu V/m]} + 20logD - 104.8$; where D is the measurement distance in meters.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014.

Per KDB 414788 D01 v01r01, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was used while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

Radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015 and TIA-603-E-2016.

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 10 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 10 01 205
			1/2 2 00/07/2023



4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	2.07
Radiated Disturbance (<30MHz)	4.12
Radiated Disturbance (30MHz-1GHz)	4.85
Radiated Disturbance (1-18GHz)	5.08
Radiated Disturbance (>18GHz)	5.22

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 11 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 11 01 205
			V/2 2 09/07/2023



5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	3/14/2024	Annual	3/14/2025	T058701-01
ESPEC	SU-241	Tabletop Temperature Chamber	10/24/2024	Annual	10/24/2025	92009574
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	4/9/2024	Annual	4/9/2025	00218555
Fairview Microwave/MCL	FMCA1975-36/BW-K10-2W44+	30MHz-40GHz RF Cable/Attenuator *	6/10/2024	Annual	6/10/2025	-
Fairview Microwave	M2CP1122-10	RF Directional Coupler *	6/10/2024	Annual	6/10/2025	1946
Keysight Technology	N9040B	UXA Signal Analyzer	5/28/2024	Annual	5/28/2025	MY57212015
Rohde & Schwarz	FSW67	Signal and Spectrum Analyzer (2Hz-67GHz)	7/5/2024	Annual	7/5/2025	101366
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	3/1/2024	Annual	3/1/2025	102143
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	5/29/2024	Annual	5/29/2025	101619
Rohde & Schwarz	ESW44	EMI Test Receiver	5/1/2024	Annual	5/1/2025	101867
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	7/3/2024	Annual	7/3/2025	102356
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	12/27/2023	Annual	12/27/2024	164715
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	10/21/2024	Annual	10/21/2025	187423
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	6/10/2024	Annual	6/10/2025	100057
Rohde & Schwarz	HFH2-Z2	Loop Antenna	6/21/2024	Annual	6/21/2025	100519
Rohde & Schwarz	ENV216	Two-Line V-Network	4/24/2024	Annual	4/24/2025	101364
Schwarzbeck	VULB 9162	Bilog Antenna (30MHz - 6GHz)	4/29/2024	Annual	4/29/2025	00304

Table 5-1. Test Equipment

Notes:

- 1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- 2. * denotes passive equipment that have been internally verified/calibrated.

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 12 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 12 01 205
			V2.2 09/07/2023



6.0 SAMPLE CALCULATIONS

Emission Designator

π/2 BPSK / QPSK Modulation

Emission Designator = 8M62G7W BW = 8.62 MHz G = Phase Modulation 7 = Quantized/Digital Info W = Combination of Any

QAM Modulation

Emission Designator = 8M45D7W BW = 8.45 MHz D = Amplitude/Angle Modulated 7 = Quantized/Digital Info W = Combination of Any

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm -(-24.80) = 50.3 dBc.

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Dogo 12 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Page 13 of 265
		-	V2 2 09/07/2023



7.0 TEST RESULTS

7.1 Summary

Company Name:	Apple Inc.
FCC ID:	BCGA3267
FCC Classification:	PCS Licensed Transmitter (PCB)
Mode(s):	NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
	Occupied Bandwidth	2.1049	N/A	N/A	Section 7.2
	Conducted Band Edge / Spurious Emissions (NR Band n77 - 3450-3550MHz)	2.1051, 27.53(n)(2)	-13 dBm at Band Edge and for all out-of-	PASS	Sections 7.3, 7.4
	Conducted Band Edge / Spurious Emissions (NR Band n77 - 3700-3980MHz)	2.1051, 27.53(l)(2)	band emissions	PASS	Sections 7.3, 7.4
	Peak-Average Ratio (NR Band n77 - 3450-3550MHz)	27.50(k)(4)	< 13 dB	PASS	Sections 7.5
CONDUCTED	Peak-Average Ratio (NR Band n77 - 3700-3980MHz)	27.50(j)(4)		PASS	Sections 7.5
CONDUCTED	Transmitter Conducted Output Power	2.1046	N/A	N/A	See RF Exposure Report
	Equivalent lsotropic Radiated Power (NR Band n77 - 3450-3550MHz)	27.50(k)(3)	< 1 Watts max. EIRP	PASS	Section 7.6
	Equivalent lsotropic Radiated Power (NR Band n77 - 3700-3980MHz)	27.50(j)(3)	< 1 Watts max. Elkp	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block	PASS	Section 7.8
BADIATED	Radiated Spurious Emissions (NR Band n77 - 3450-3550MHz)	2.1051, 27.53(n)(2)	12 dDm for all out of bond aminsions	PASS	Section 7.7
RADIATED	Radiated Spurious Emissions (NR Band n77 - 3700-3980MHz)	2.1051, 27.53(l)(2)	 -13 dBm for all out-of-band emissions 	PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 14 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 14 01 205
			V2.2 09/07/2023



Notes:

- 1. All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2. The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3. All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4. All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized was Element EMC Software Tool EMC Software Tool v1.1.

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 15 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 15 01 205
			V2 2 09/07/2023



7.2 Occupied Bandwidth §2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section. All ports were tested and only the worst case data were reported.

Test Procedure Used

KDB 971168 D01 v03r01 - Section 4.2

Test Settings

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW \geq 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within 1 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

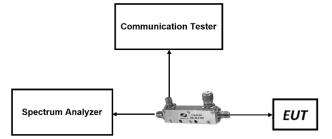


Figure 7-1. LTE Test Instrument & Measurement Setup



Figure 7-2. FR1 Test Instrument & Measurement Setup

Test Notes

None.


FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 16 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 10 01 205
	·	•	V2 2 09/07/2023



NR Band n77 DoD-Band




Plot 7-1. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 10MHz DFT-s-OFDM π/2 BPSK - Full RB)

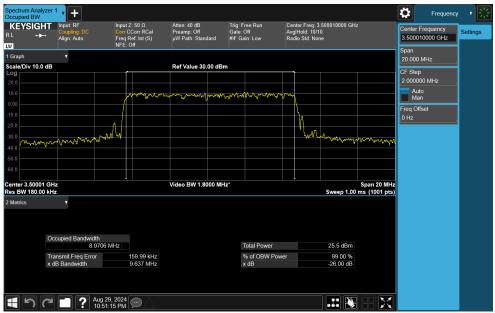

Plot 7-2. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 10MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 17 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 17 01 205
			V2.2 09/07/2023



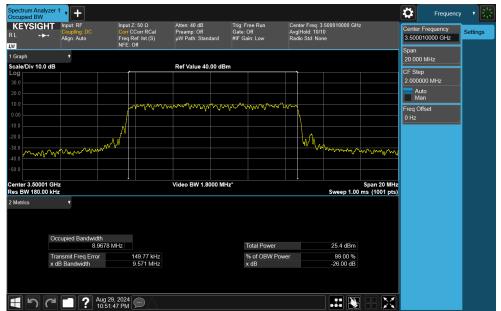


Plot 7-3. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 10MHz CP-OFDM 16-QAM - Full RB)



Plot 7-4. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 10MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 18 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage to 01 200
			V2.2 09/07/2023



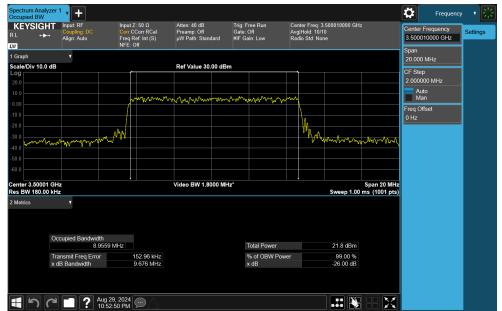


Plot 7-5. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 10MHz CP-OFDM 256-QAM - Full RB)




Plot 7-6. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 15MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 19 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 19 01 200
			V2.2 09/07/2023



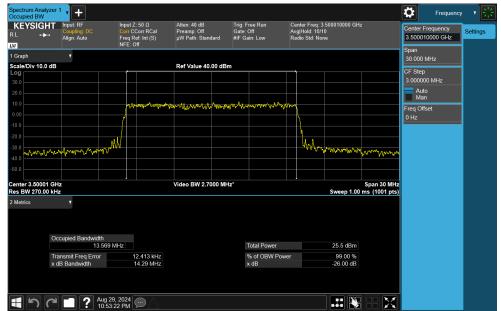

Plot 7-7. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 15MHz CP-OFDM QPSK - Full RB)

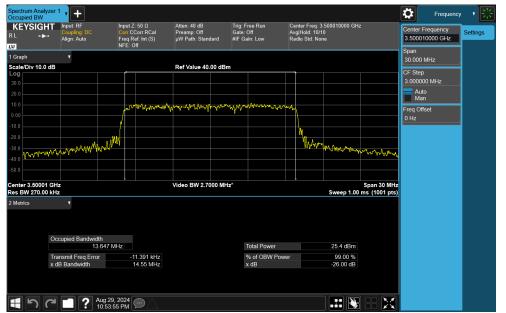


Plot 7-8. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 15MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 20 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 20 01 200
	·	·	V2.2 09/07/2023






Plot 7-9. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 15MHz CP-OFDM 64-QAM - Full RB)

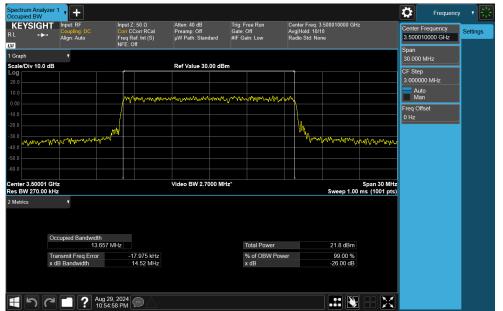


Plot 7-10. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 15MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 21 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 21 01 205
			V2.2 09/07/2023



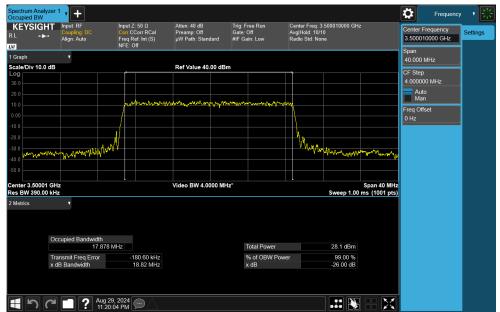


Plot 7-11. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 20MHz DFT-s-OFDM π/2 BPSK - Full RB)

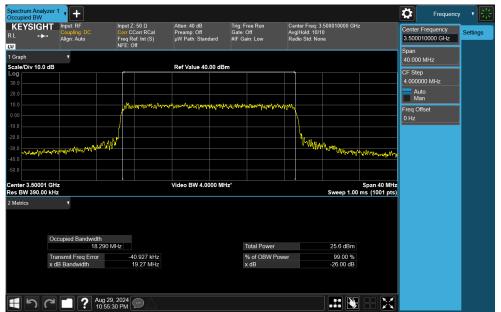


Plot 7-12. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 20MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 22 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 22 01 205
<u></u>			V2.2 09/07/2023



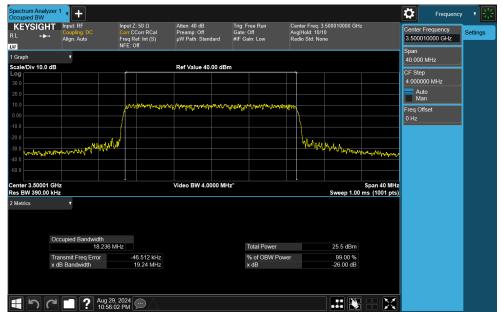


Plot 7-13. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 20MHz CP-OFDM 16-QAM - Full RB)

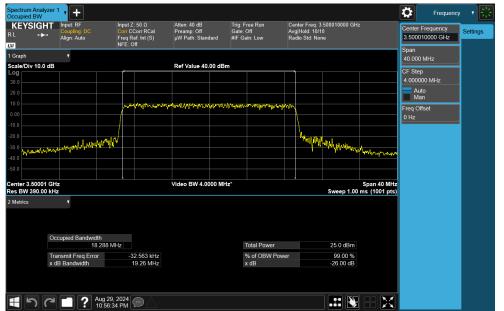


Plot 7-14. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 20MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 23 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Page 23 01 205
	·		V2.2 09/07/2023



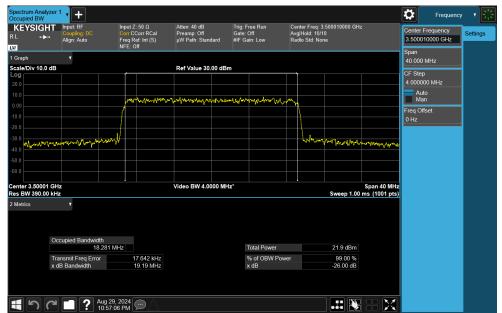


Plot 7-15. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 20MHz CP-OFDM 256-QAM - Full RB)

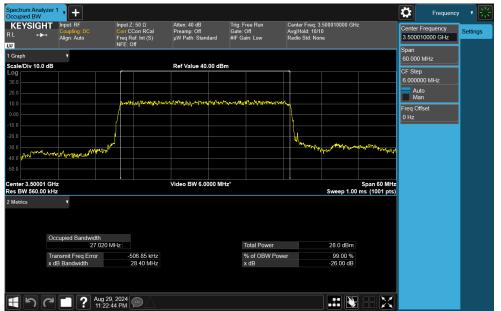


Plot 7-16. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 30MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 24 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 24 01 205
			V2.2 09/07/2023



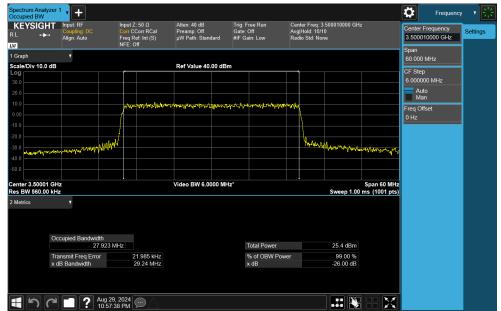


Plot 7-17. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 30MHz CP-OFDM QPSK - Full RB)

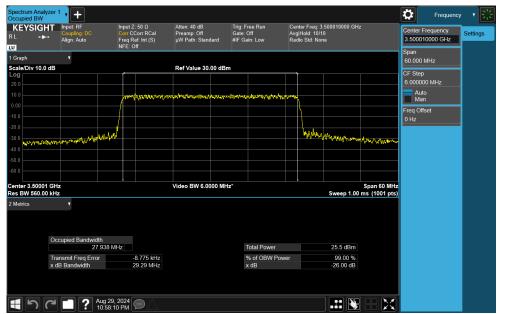

Plot 7-18. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 30MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 25 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Page 25 01 205
	·		V2.2 09/07/2023



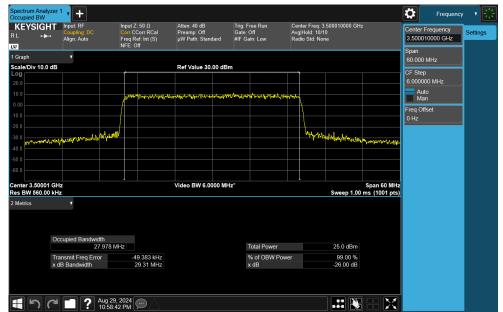


Plot 7-19. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 30MHz CP-OFDM 64-QAM - Full RB)




Plot 7-20. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 30MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 26 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 26 01 265
			V2.2 09/07/2023



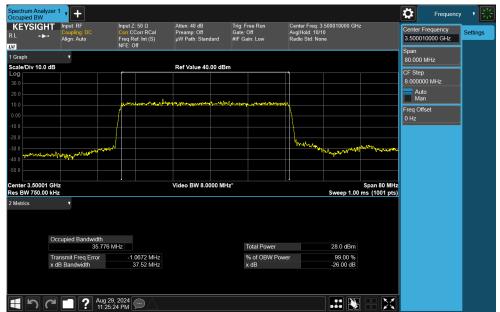


Plot 7-21. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 40MHz DFT-s-OFDM π/2 BPSK - Full RB)

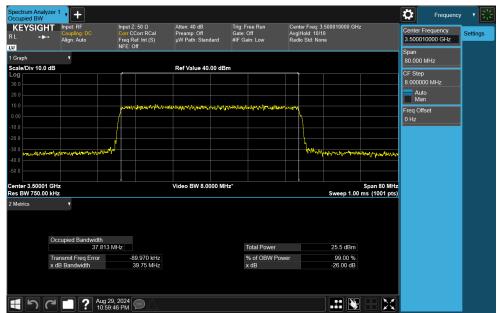


Plot 7-22. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 40MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 27 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 27 01 205
			V2.2 09/07/2023



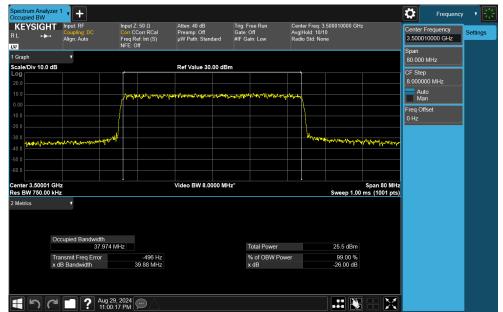


Plot 7-23. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 40MHz CP-OFDM 16-QAM - Full RB)

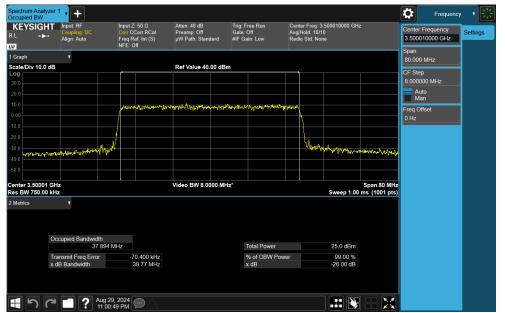


Plot 7-24. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 40MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 28 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 20 01 205
	·		V2.2 09/07/2023



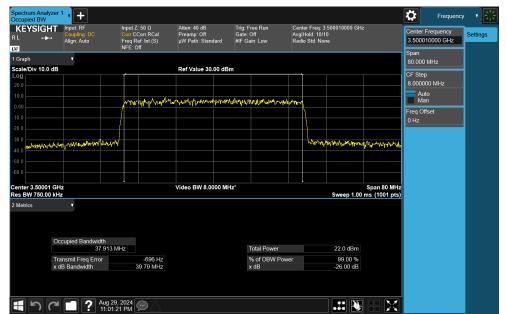


Plot 7-25. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 40MHz CP-OFDM 256-QAM - Full RB)

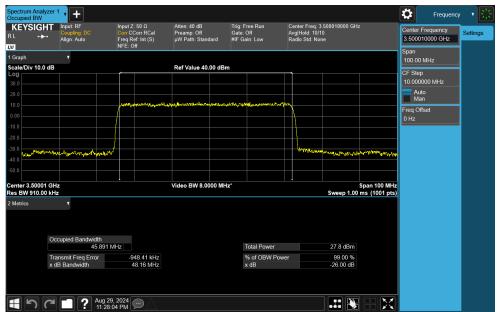

Plot 7-26. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 50MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 29 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 29 01 205
			V2.2 09/07/2023



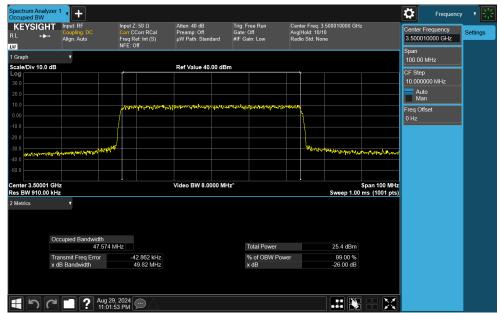

Plot 7-27. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 50MHz CP-OFDM QPSK - Full RB)




Plot 7-28. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 50MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 30 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 30 01 205
	·	·	V2.2 09/07/2023






Plot 7-29. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 50MHz CP-OFDM 64-QAM - Full RB)

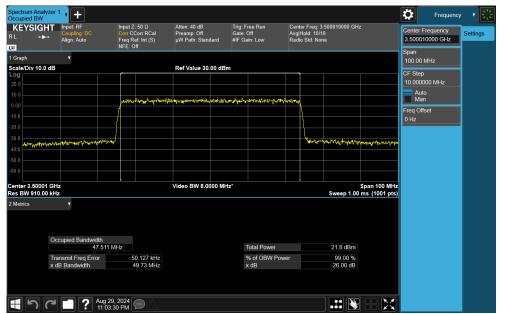

Plot 7-30. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 50MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 31 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage ST 01 205
			V2.2 09/07/2023



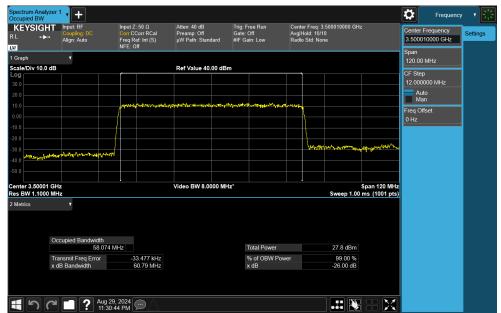


Plot 7-31. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 60MHz DFT-s-OFDM π/2 BPSK - Full RB)




Plot 7-32. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 60MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 32 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 32 01 203
			V2.2 09/07/2023



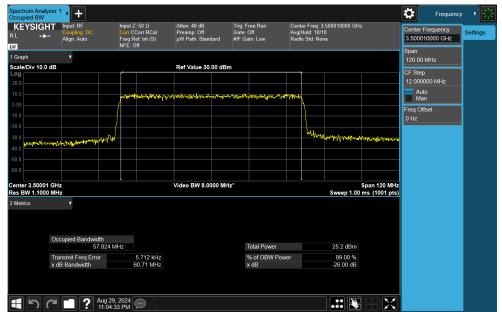


Plot 7-33. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 60MHz CP-OFDM 16-QAM - Full RB)

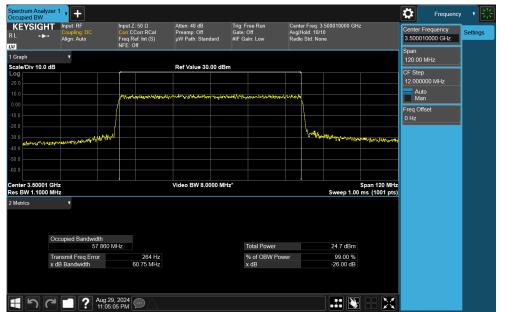


Plot 7-34. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 60MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 33 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 33 01 205
	·		V2.2 09/07/2023



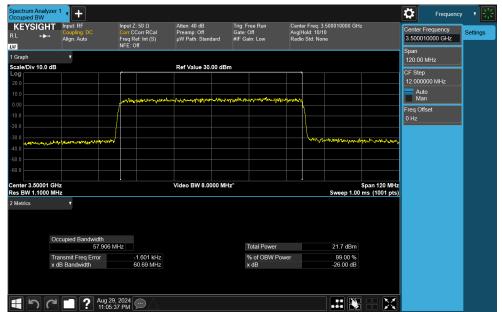


Plot 7-35. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 60MHz CP-OFDM 256-QAM - Full RB)

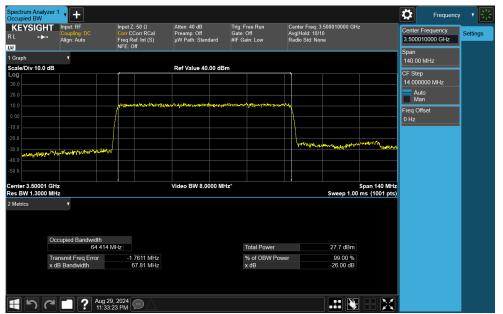

Plot 7-36. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 70MHz DFT-s-OFDM $\pi/2$ BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 34 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 34 01 203
	·		V2.2 09/07/2023



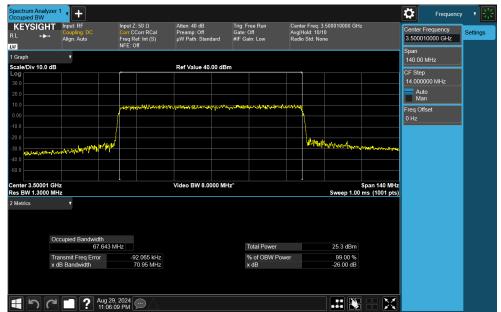

Plot 7-37. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 70MHz CP-OFDM QPSK - Full RB)



Plot 7-38. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 70MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 35 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 35 01 205
	·	·	V2.2 09/07/2023





Plot 7-39. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 70MHz CP-OFDM 64-QAM - Full RB)

KEYSIGH L +	Input: RF Coupling: DC Align: Auto	Input Z: 50 Ω Corr CCorr RCal Freq Ref: Int (S) NFE: Off	Atten: 40 dB Preamp: Off μW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Avgl	er Freq: 3 Hold: 10/1 o Std: Nor		2	Center F 3.50001	requency 0000 GHz	Settings
/ Graph	•								Span 140.00 M	ИНz	
ale/Div 10.0 d	В		Ref Value 30.00 dE	3m					CF Step		
og									14.0000		
0.0									Auto		
.00		medulowalanting	mannerproperties	www.www.apaper.japite.he.	handervon				Man		
						۱			Freq Offs 0 Hz	set	
						\			UHZ		
30.0	www.					holynett	the outer and	Wertweet marks of the			
0.0	abed we have a state of a second							a she with root			
enter 3.50001 (3Hz		Video BW 8.0000 M	Hz*				Span 140 MHz			
es BW 1.3000 I								ms (1001 pts)			
Metrics	Cccupied Bandwidth										
	67.55	3 MHz		Total Power			21.7 dBm				
	Transmit Freg Error	-78.282 kHz 70.86 MHz		% of OBW F x dB	ower		99.00 % -26.00 dB				
							-20.00 uD				
	x dB Bandwidth	10.00 10112									


Plot 7-40. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 70MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 36 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	
V2.2 09/07/202			






Plot 7-41. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 80MHz DFT-s-OFDM π/2 BPSK - Full RB)

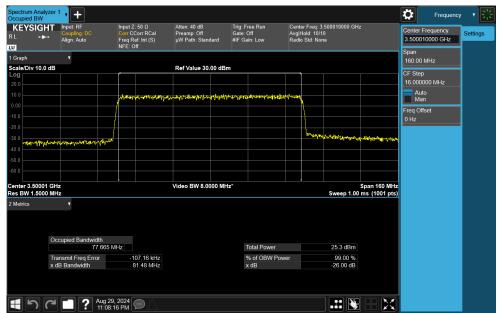

Plot 7-42. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 80MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 37 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	2/25/2024 Tablet Device	
			V2.2 09/07/2023



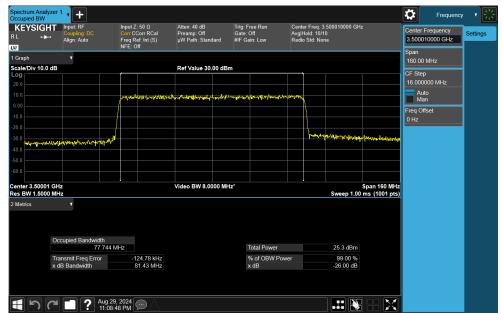


Plot 7-43. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 80MHz CP-OFDM 16-QAM - Full RB)

KEYSIGH	Coupling: DC	Input Ζ: 50 Ω <mark>Corr</mark> CCorr RCal Freq Ref: Int (S)	Atten: 40 dB Preamp: Off μW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Avg F	er Freq: 3 Iold: 10/1 Std: Nor	500010000 GH: 0 1e	:	Center Fr 3.500010	equency 0000 GHz	Settings
a Graph	•	NFE: Off							Span		
cale/Div 10.0 c			Ref Value 30.00 dE	3m					160.00 N	IHz	
og									CF Step 16.00000		
20.0									16.00000		
10.0		partitional and	and the second states and the second s	angtang sangang manakan sa sa	e ver vera	h			Man		
0.00						۲.			Freq Offs	et	
-20.0									0 Hz		
-30.0		J.				hyper	mananaproper				
-40.0	and a second constrained and and and and and and and and and an	<u> </u>						a fast of charles			
-50.0											
-60.0											
Center 3.50001 Res BW 1.5000			Video BW 8.0000 M	Hz*				Span 160 MHz ms (1001 pts)			
	•										
	Occupied Bandwidth										
	77.57	6 MHz		Total Power			24.7 dBm				
	77.57 Transmit Freq Error	-157.00 kHz		% of OBW Pe	wer		99.00 %				
	77.57				ower						


Plot 7-44. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 80MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 38 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	2/25/2024 Tablet Device	
	·	·	V2.2 09/07/2023



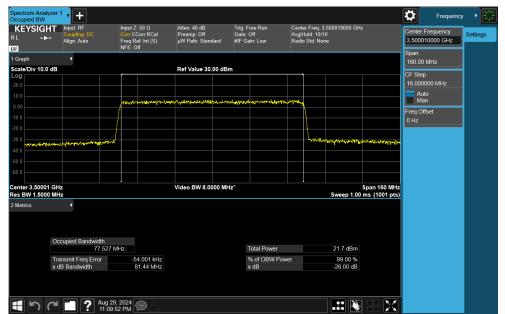

Plot 7-45. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 80MHz CP-OFDM 256-QAM - Full RB)

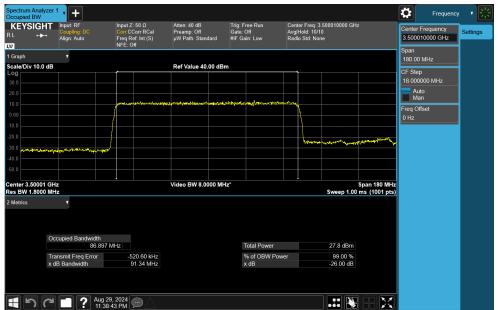

Plot 7-46. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 90MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 39 of 265	
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 39 01 205	
			V2.2 09/07/2023	





Plot 7-47. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 90MHz CP-OFDM QPSK - Full RB)

KEYSIGI └ ↔	Coupling: DC	Input Z: 50 Ω Corr CCorr RCal Freg Ref: Int (S)	Atten: 40 dB Preamp: Off µW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Avg F	er Freq: 3 told: 10/1 Std: Nor		:	Center Fr 3.500010	equency 0000 GHz	Settings
1		NFE: Off							Span		
Graph	•								3pan 180.00 N	IHz	
ale/Div 10.0	dB		Ref Value 30.00 dB	m					CF Step		
9									18.00000	0 MHz	
.0									Auto		
10		and a start and a start and and	and the second secon	and a star of the second s	April 10 and a start				Man		
.0									Freq Offs	et	1
.0						1			0 Hz		
						Jung games	and the second second	and tasked on the standards			
.0 emderm	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~										
nter 3.50001			Video BW 8.0000 M	Hz*				Span 180 MHz			
s BW 1.8000							Sweep 1.00	ms (1001 pts)			
letrics	•										
	Occupied Bandwidth			Total Power			25.3 dBm				
	87.786										
	87.786 Transmit Freq Error	-85.341 kHz		% of OBW F	ower		99.00 %				
	87.786				ower		99.00 % -26.00 dB				
	87.786 Transmit Freq Error	-85.341 kHz		% of OBW F	ower						

Plot 7-48. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 90MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 40 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	- 12/25/2024 Tablet Device	
		•	V2.2 09/07/2023






Plot 7-49. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 90MHz CP-OFDM 64-QAM - Full RB)

KEYSIGHT	Input: RF Coupling: DC Align: Auto	Input Z: 50 Ω Corr CCorr RCal Freq Ref: Int (S) NFE: Off	Atten: 40 dB Preamp: Off μW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Avgl	er Freq: 3 Hold: 10/1 o Std: Noi			3.50001	requency 0000 GHz	Settings
Graph				I					Span 180.00 I	MHz	
cale/Div 10.0 dl	В		Ref Value 30.00 d	Bm					CF Step		
									18.0000	00 MHz	
		a substituted and and the	๛๚๛๛๛๛๛๛๚๛๛๚	and a local and a state of the state of the	and more the				Auto Mar		
						1			Freq Offs	set	
20.0									0 Hz		
						hen		and an and the second second			
40.0	and a construction of the second of the	~						ALCO MILLOUS PARA			
enter 3.50001 G			Video BW 8.0000 I	MHz*				Span 180 MHz			
tes BW 1.8000 M							Sweep 1.00	ms (1001 pts)			
	T			Total Power			21.7 dBm				
C	Occupied Bandwidth 87.70	5 MHz					99.00 %				
1	87.70 Transmit Freq Error	-184.54 kHz		% of OBW F	ower						
1	87.70			% of OBW F x dB	ower		-26.00 dB				
1	87.70 Transmit Freq Error	-184.54 kHz			ower						

Plot 7-50. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 90MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 41 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 41 01 205
	·		V2.2 09/07/2023



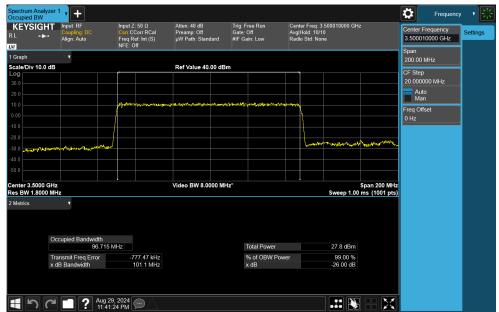


Plot 7-51. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 100MHz DFT-s-OFDM π/2 BPSK - Full RB)

KEYSIGHT	Input: RF Coupling: DC Align: Auto	Input Z: 50 Ω Corr CCorr RCal Freq Ref: Int (S) NFE: Off	Atten: 40 dB Preamp: Off μW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Center F Avg Holo Radio SI	ireq: 3.500010000 GH d: 10/10 d: None		Center Frequency 3.500010000 GHz	Settings
Graph								Span 200.00 MHz	
ale/Div 10.0 dB	8		Ref Value 30.00 dB	lm				CF Step	
								20.000000 MHz	
		and the state of t	wand water and second		Protest and			Auto Man	
								Freq Offset	
.0								0 Hz	
						(variante all stanless	mounduration		
0 Hoursen prover from the	- An life of the of the other states of the	<u> </u>							
nter 3.5000 GH	17		Video BW 8.0000 M	Hz*			Span 200 MHz		
s BW 1.8000 N						Sweep 1.0	0 ms (1001 pts)		
letrics	۲								
				Total Power		25.2 dBm]		
C	Occupied Bandwidth 97.54	8 MHz					1		
Т	97.54 Fransmit Freq Error	-88.972 kHz		% of OBW F	ower	99.00 %			
Т	97.54			% of OBW F x dB	ower	99.00 % -26.00 dB			
Т	97.54 Fransmit Freq Error	-88.972 kHz			ower				

Plot 7-52. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 100MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 42 of 265	
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 42 01 205	
			V2.2 09/07/2023	



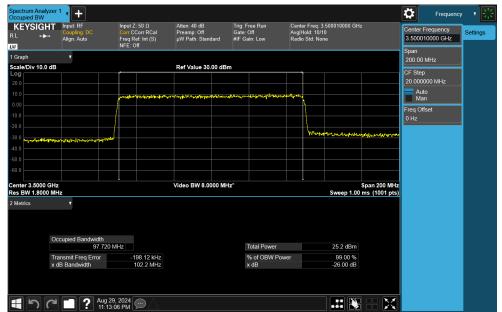

Plot 7-53. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 100MHz CP-OFDM 16-QAM - Full RB)

KEYSIGH ⊥ -►- ₪	Coupling: DC	Input Z: 50 Ω Corr CCorr RCal Freq Ref: Int (S) NFE: Off	Atten: 40 dB Preamp: Off μW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Avgl	er Freq: 3 Hold: 10/1 o Std: No			Center Fre 3.5000100 Span		Settings
Graph	¥								Span 200.00 MH	⊣z	
ale/Div 10.0 c	B		Ref Value 30.00 dB	3m					CF Step		
									20.00000) MHz	
			way		- -				Auto Man		
						1			Freq Offsel	t	
						1			0 Hz		
						Whylow	lana mana mana mana mana mana mana mana	Louis & hotes-whe			
0.0	auronau preservante al angeligen	*									
0.0											
50.0											
enter 3.5000 G es BW 1.8000			Video BW 8.0000 M	Hz*				Span 200 MHz ms (1001 pts)			
Metrics	T										
	Occupied Bandwidth	5 MHz		Total Power			24.8 dBm				
	97,566			% of OBW P	ower		99.00 %				
		-50.992 kHz					00.00.10				
	97.566	-50.992 kHz 102.3 MHz		x dB			-26.00 dB				
	97.566 Transmit Freq Error			x dB			-26.00 dB				

Plot 7-54. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 100MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 43 of 265	
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 43 01 205	
	·		V2.2 09/07/2023	






Plot 7-55. Occupied Bandwidth Plot (NR Band n77 DoD-Band - 100MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 44 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	7/1/2024 - 12/25/2024 Tablet Device	
			\/2 2 09/07/2023



NR Band n77 C-Band

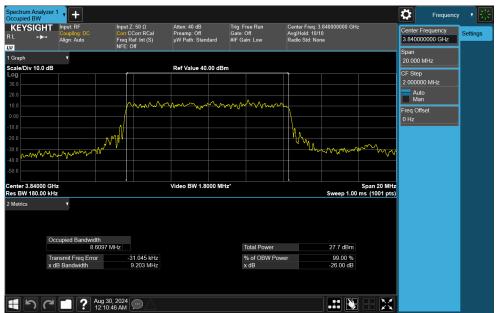


Plot 7-56. Occupied Bandwidth Plot (NR Band n77 C-Band - 10MHz DFT-s-OFDM π/2 BPSK - Full RB)




Plot 7-57. Occupied Bandwidth Plot (NR Band n77 C-Band - 10MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 45 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 45 01 205
			V2.2 09/07/2023



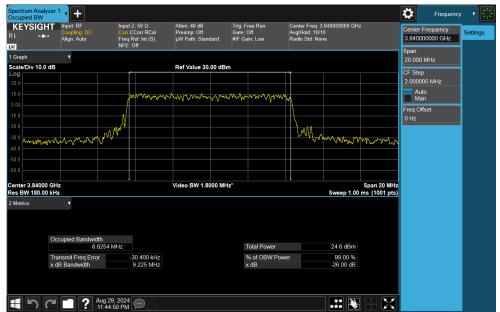

Plot 7-58. Occupied Bandwidth Plot (NR Band n77 C-Band - 10MHz CP-OFDM 16-QAM - Full RB)

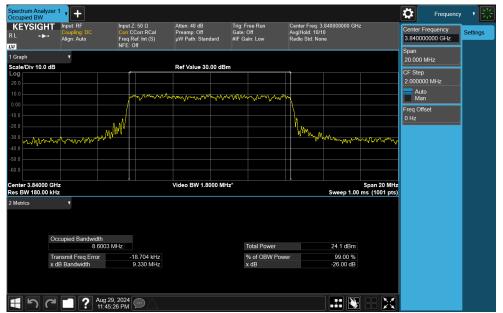


Plot 7-59. Occupied Bandwidth Plot (NR Band n77 C-Band - 10MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 46 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 40 01 205
	·		V2.2 09/07/2023





Plot 7-60. Occupied Bandwidth Plot (NR Band n77 C-Band - 10MHz CP-OFDM 256-QAM - Full RB)

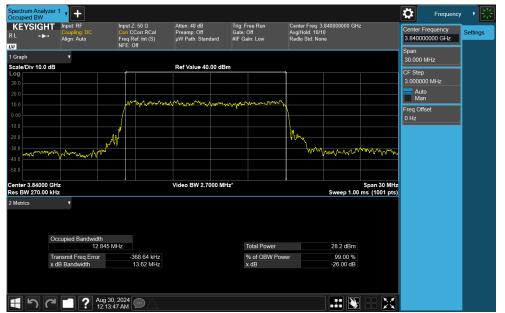


Plot 7-61. Occupied Bandwidth Plot (NR Band n77 C-Band - 15MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 47 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 47 01 205
	·		V2.2 09/07/2023






Plot 7-62. Occupied Bandwidth Plot (NR Band n77 C-Band - 15MHz CP-OFDM QPSK - Full RB)

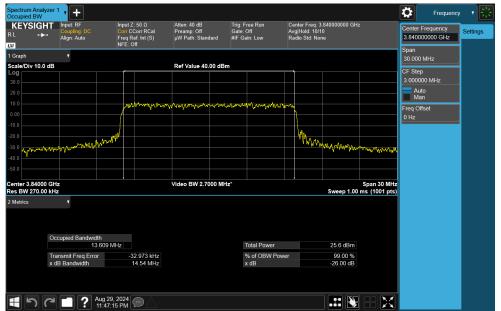


Plot 7-63. Occupied Bandwidth Plot (NR Band n77 C-Band - 15MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 48 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Faye 40 01 200
			V2.2 09/07/2023



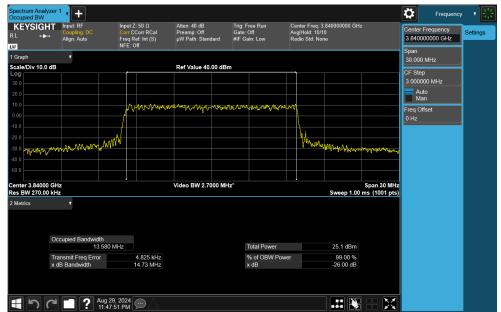


Plot 7-64. Occupied Bandwidth Plot (NR Band n77 C-Band - 15MHz CP-OFDM 64-QAM - Full RB)

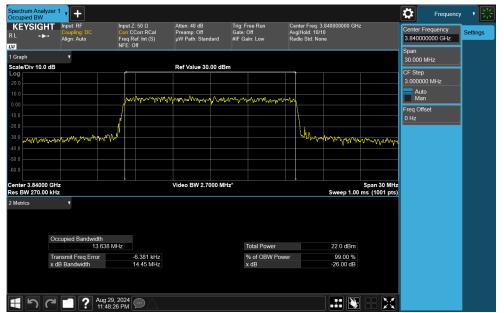


Plot 7-65. Occupied Bandwidth Plot (NR Band n77 C-Band - 15MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 49 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 49 01 203
	·	·	V2.2 09/07/2023



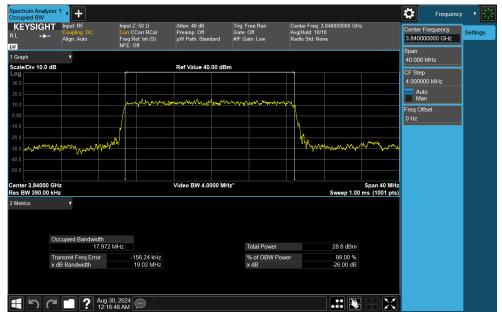


Plot 7-66. Occupied Bandwidth Plot (NR Band n77 C-Band - 20MHz DFT-s-OFDM π/2 BPSK - Full RB)

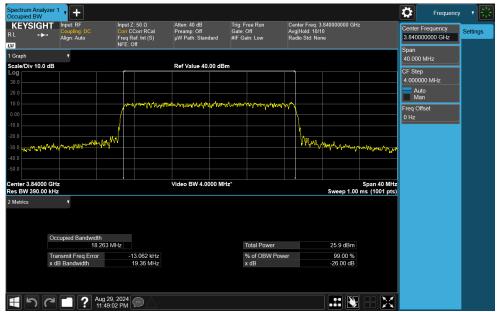

Plot 7-67. Occupied Bandwidth Plot (NR Band n77 C-Band - 20MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 50 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 50 01 205
			V2.2 09/07/2023



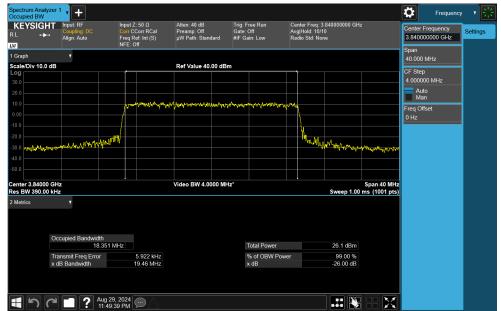


Plot 7-68. Occupied Bandwidth Plot (NR Band n77 C-Band - 20MHz CP-OFDM 16-QAM - Full RB)




Plot 7-69. Occupied Bandwidth Plot (NR Band n77 C-Band - 20MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 51 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 51 01 205
			V2.2 09/07/2023



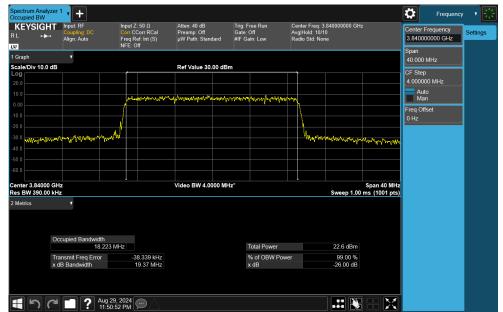


Plot 7-70. Occupied Bandwidth Plot (NR Band n77 C-Band - 20MHz CP-OFDM 256-QAM - Full RB)

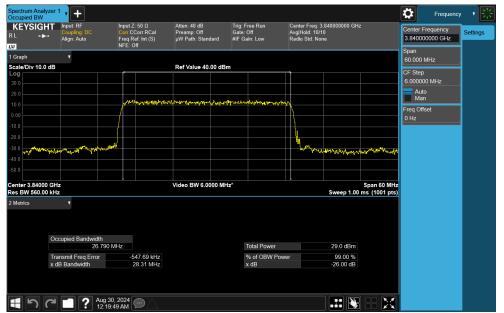


Plot 7-71. Occupied Bandwidth Plot (NR Band n77 C-Band - 30MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 52 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 52 01 205
	·		V2.2 09/07/2023



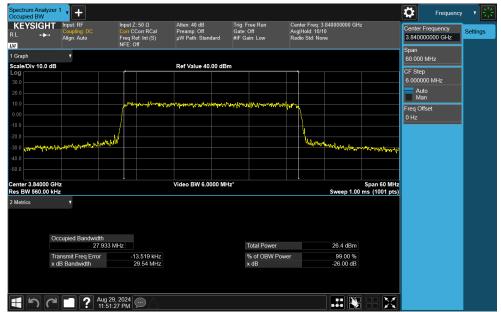


Plot 7-72. Occupied Bandwidth Plot (NR Band n77 C-Band - 30MHz CP-OFDM QPSK - Full RB)

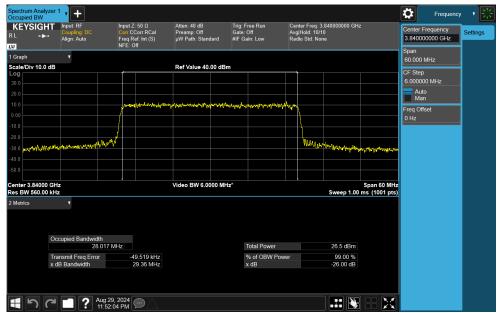

Plot 7-73. Occupied Bandwidth Plot (NR Band n77 C-Band - 30MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 53 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 55 01 205
			V2.2 09/07/2023



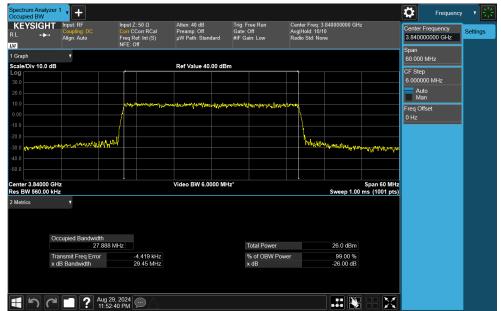


Plot 7-74. Occupied Bandwidth Plot (NR Band n77 C-Band - 30MHz CP-OFDM 64-QAM - Full RB)

KEYSIGH ⊥ +≻- ₪	Coupling: DC	Input Ζ: 50 Ω Corr CCorr RCal Freq Ref: Int (S) NFE: Off	Atten: 40 dB Preamp: Off μW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Avg	iter Freq: 3 Hold: 10/1 dio Std: Nor			Center Fred 3.8400000		Settings
Graph	V								Span .60.000 MH	z ,	
cale/Div 10.0	dB		Ref Value 30.00 d	Bm					CF Step		
									6.000000 N	/Hz	
		popular south of the second	moun margare	-	www				Auto Man		
0.00									Freq Offset		
20.0						l.			0 Hz		
30.0	howard have marked	gymm ^d				hursy	han water bei sary	Annana			
50.0											
enter 3.84000 es BW 560.00			Video BW 6.0000 M	/Hz*			Swoop 1 00	Span 60 MHz ms (1001 pts)			
Metrics	Y										
	Occupied Bandwidth 27.9	29 MHz		Total Power			22.9 dBm				
	Transmit Freq Error	-12.286 kHz		% of OBW Pe	wer		99.00 %				
	x dB Bandwidth	29.34 MHz		x dB			-26.00 dB				


Plot 7-75. Occupied Bandwidth Plot (NR Band n77 C-Band - 30MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 54 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 54 01 265
	·	·	V2.2 09/07/2023



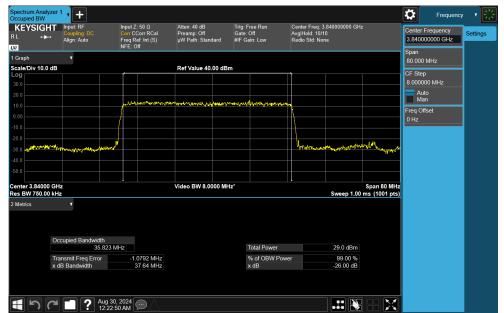

Plot 7-76. Occupied Bandwidth Plot (NR Band n77 C-Band - 40MHz DFT-s-OFDM π/2 BPSK - Full RB)

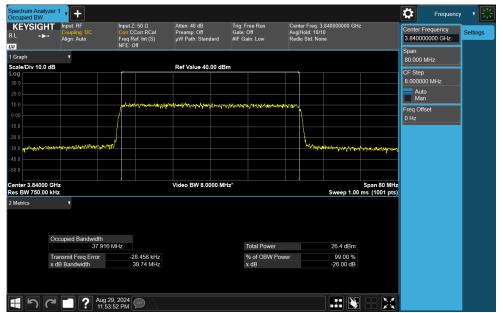


Plot 7-77. Occupied Bandwidth Plot (NR Band n77 C-Band - 40MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 55 of 265
1C2410210073-11-R1.BCG	210073-11-R1.BCG 7/1/2024 - 12/25/2024 Tablet Device		Fage 55 01 205
	·		V2.2 09/07/2023






Plot 7-78. Occupied Bandwidth Plot (NR Band n77 C-Band - 40MHz CP-OFDM 16-QAM - Full RB)

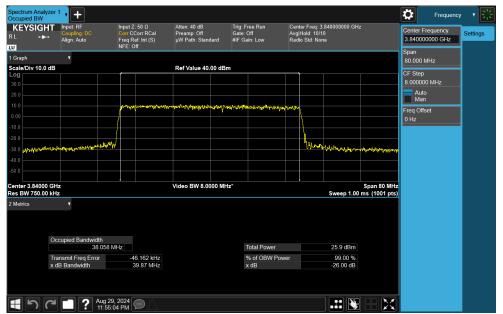


Plot 7-79. Occupied Bandwidth Plot (NR Band n77 C-Band - 40MHz CP-OFDM 64-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager
Test Report S/N:	Test Dates:	EUT Type:	Page 56 of 265
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024 Tablet Device		Fage 56 01 265
	·		V2.2 09/07/2023



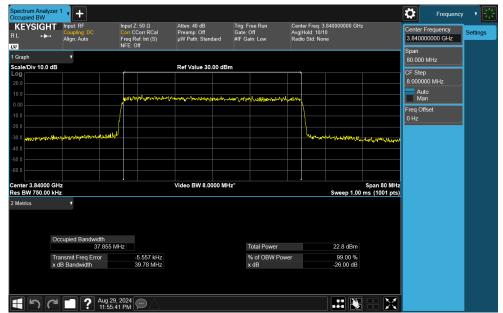


Plot 7-80. Occupied Bandwidth Plot (NR Band n77 C-Band - 40MHz CP-OFDM 256-QAM - Full RB)

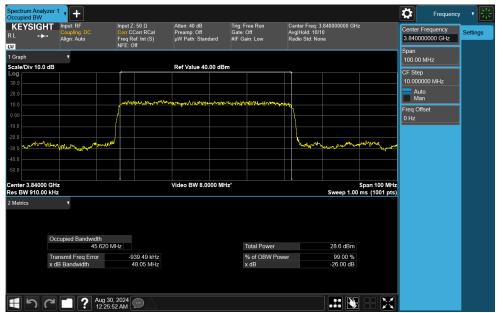


Plot 7-81. Occupied Bandwidth Plot (NR Band n77 C-Band - 50MHz DFT-s-OFDM π/2 BPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 57 of 265	
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 57 01 205	
	·		V2.2 09/07/2023	



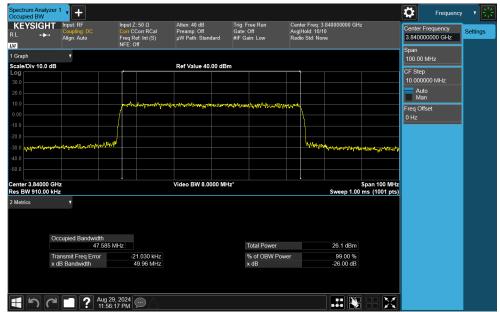


Plot 7-82. Occupied Bandwidth Plot (NR Band n77 C-Band - 50MHz CP-OFDM QPSK - Full RB)

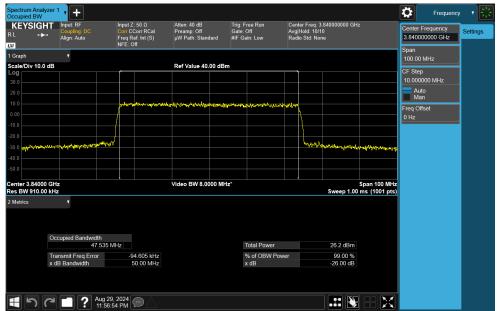

Plot 7-83. Occupied Bandwidth Plot (NR Band n77 C-Band - 50MHz CP-OFDM 16-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 58 of 265	
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 56 01 205	
	·		V2.2 09/07/2023	



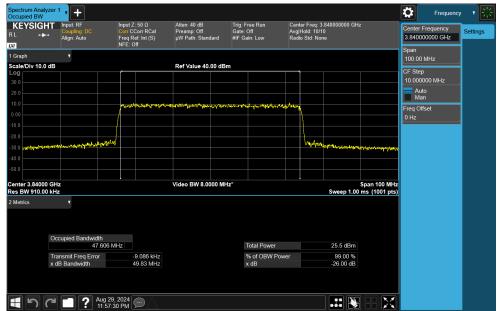


Plot 7-84. Occupied Bandwidth Plot (NR Band n77 C-Band - 50MHz CP-OFDM 64-QAM - Full RB)

KEYSIGH ⊥ ↔ ₪	Coupling: DC	Input Z: 50 Ω Corr CCorr RCal Freq Ref: Int (S) NFE: Off	Atten: 40 dB Preamp: Off μW Path: Standard	Trig: Free Run Gate: Off #IF Gain: Low	Avg H	er Freq: 3. Iold: 10/1 Std: Non		z	Center Frequer 3.840000000 C Span	
Graph	•								Span 100.00 MHz	
cale/Div 10.0	dB		Ref Value 30.00 d	Bm					CF Step	
									10.000000 MH	z
		JAN MANA MANA	an and the second s	*****	monter				Auto Man	
		- f				1			Freq Offset	
0.0									0 Hz	
80.0	quyonooffastayatayaanadastabayaa	hw				how	angthe days day, day	and free for the second		
0.0										
enter 3.84000	GH-		Video BW 8.0000 M	MH+*				Span 100 MHz		
es BW 910.00			VIGEO DIV 0.0000 I	1112				ms (1001 pts)		
Metrics	Occupied Bandwidth									
	47.685			Total Power			22.6 dBm			
	Transmit Freq Error x dB Bandwidth	8.183 kHz 49.94 MHz		% of OBW F x dB	ower		99.00 % -26.00 dB			

Plot 7-85. Occupied Bandwidth Plot (NR Band n77 C-Band - 50MHz CP-OFDM 256-QAM - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 59 of 265	
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 59 01 205	
	·		V2.2 09/07/2023	



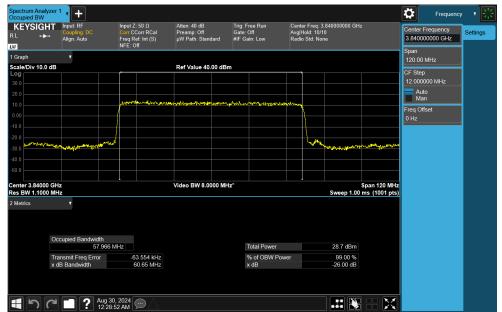

Plot 7-86. Occupied Bandwidth Plot (NR Band n77 C-Band - 60MHz DFT-s-OFDM π/2 BPSK - Full RB)

KEYSIGH ⊥ +≯- ₪		Input Ζ: 50 Ω Corr CCorr RCal Freq Ref: Int (S) NFE: Off	Atten: 40 dB Preamp: Off μW Path: Stand	G	rig: Free Run iate: Off IF Gain: Low	Avgl	er Freq: 3 Hold: 10/1 o Std: Nor			Center Frequency 3.840000000 GHz	Settings
Graph	¥									Span 120.00 MHz	
cale/Div 10.0	dB		Ref Value 30.0	00 dBm						CF Step	1
										12.000000 MHz	
		and the second second	new management	e to plant the	สงปฏรมอากประสงบาร์สุนประ	nt option	ι			Auto Man	
							1			Freq Offset	
0.0		1								0 Hz	
0.0	wight be dealer to a she wanted	ý 🛛					harding	and standard states of	the second states and the second		
0.0											
0.0											
0.0											
enter 3.84000 es BW 1.1000			Video BW 8.00	00 MHz^					Span 120 MHz ms (1001 pts)		
Metrics	Occupied Bandwidth										
	57.843	MHz			Total Power			26.0 dBm			
	Transmit Freq Error x dB Bandwidth	-25.745 kHz 60.71 MHz			% of OBW Po x dB	wer		99.00 % -26.00 dB			

Plot 7-87. Occupied Bandwidth Plot (NR Band n77 C-Band - 60MHz CP-OFDM QPSK - Full RB)

FCC ID: BCGA3267	element	PART 27 MEASUREMENT REPORT	Approved by: Technical Manager	
Test Report S/N:	Test Dates:	EUT Type:	Page 60 of 265	
1C2410210073-11-R1.BCG	7/1/2024 - 12/25/2024	Tablet Device	Fage 60 01 205	
	·		V2.2 09/07/2023	