



REPORT No.: SZ24060062W01

TEST REPORT

APPLICANT : Soundmax Electronics Limited

PRODUCT NAME : MONITOR WITH RECEIVER

MODEL NAME : DMX5710S, DMX50S,
DMX500S, DMX723WS,
DMX80AXS, DMX6523S, KW-
M695BW, KW-M690BW

BRAND NAME : KENWOOD, JVC

FCC ID : 2AB7S-YL5077K00

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2024-06-07

TEST DATE : 2024-07-02 to 2024-08-05

ISSUE DATE : 2024-08-26



Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	11
2.4. Test Configuration of EUT	12
2.5. Test Conditions	12
2.6. Test Setup Layout Diagram	12
3. Test Results	15
3.1. Antenna Requirement	15
3.2. Hopping Mechanism	16
3.3. Number of Hopping Frequency	17
3.4. Duty Cycle of Test Signal	18
3.5. Maximum Peak Conducted Output Power	19
3.6. Maximum Average Conducted Output Power	20
3.7. 20 dB Bandwidth	21
3.8. Carried Frequency Separation	22
3.9. Time of Occupancy (Dwell time)	23
3.10. Conducted Spurious Emissions and Band Edge	24
3.11. Conducted Emission	25
3.12. Restricted Frequency Bands	26
3.13. Radiated Emission	27



Annex A Test Data and Result 29

Change History		
Version	Date	Reason for change
1.0	2024-08-26	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	15.247(a) 15.247(h)	Hopping Mechanism	N/A	N/A	PASS	No deviation
3	15.247(a)	Number of Hopping Frequency	Jul. 06, 2024	Li Zikai	PASS	No deviation
4	ANSI C63.10	Duty Cycle	Jul. 06, 2024	Li Zikai	PASS	No deviation
5	15.247(b)	Maximum Peak Conducted Output Power	Jul. 06, 2024	Li Zikai	PASS	No deviation
6	15.247(b)	Maximum Average Conducted Output Power	Jul. 06, 2024	Li Zikai	PASS	No deviation
7	15.247(a)	20dB Bandwidth	Jul. 06, 2024	Li Zikai	PASS	No deviation
8	15.247(a)	Carrier Frequency Separation	Jul. 06, 2024	Li Zikai	PASS	No deviation
9	15.247(a)	Time of Occupancy (Dwell time)	Jul. 06, 2024	Li Zikai	PASS	No deviation
10	15.247(d)	Conducted Spurious Emission	Jul. 06, 2024	Li Zikai	PASS	No deviation
11	15.207	Conducted Emission	N/A	N/A	N/A ^{Note1}	N/A
12	15.247(d)	Restricted Frequency Bands	Aug. 05, 2024	Yang Lian	PASS	No deviation
13	15.209,	Radiated	Aug. 05, 2024	Yang Lian	PASS	No deviation



	15.247(d)	Emission				
--	-----------	----------	--	--	--	--

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013, KDB 558074 D01 v05r02 and DA 00-075.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2024.02.19	2025.02.18
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2024.05.30	2025.05.29
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2024.07.02	2025.07.01

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
TS+ -[JS36-RSE]	Tonscend	V3.0.0.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2024.05.30	2025.05.29
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2024.06.03	2025.06.02
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2024.06.22	2025.06.21
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2024.06.22	2025.06.21
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2024.05.30	2025.05.29
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2024.05.30	2025.05.29
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	N/A	N/A
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	N/A	N/A
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	N/A	N/A
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Number of Hopping Frequency	±5%	Confidence levels of 95%
Peak Output Power	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Carrier Frequency Separation	±5%	Confidence levels of 95%
Time of Occupancy (Dwell time)	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Soundmax Electronics Limited
Applicant Address	17/F EU YANG SANG TOWER, 11-15 CHATHAM ROAD, T.S.T, KOWLOON, Hong Kong, China
Manufacturer	Soundmax Electronics Limited
Manufacturer Address	17/F EU YANG SANG TOWER, 11-15 CHATHAM ROAD, T.S.T, KOWLOON, Hong Kong, China

2.2. Information of EUT

Product Name:	MONITOR WITH RECEIVER
Sample No.:	1#
Hardware Version:	V1.0
Software Version:	V1.0
Equipment Type:	Bluetooth classic
Bluetooth Version:	5.0
Modulation Type:	FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps)
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-4.44dBi



Note 1: According to the certificate holder, they declared that the models DMX5710S, DMX50S, DMX500S, DMX723WS, DMX80AXS, DMX6523S, KW-M695BW and KW-M690BW o have the same hardware and software, the differences are as bellowing, all RF parameters remain the same.

Model	Brand	Display Size	Description
KW-M695BW	JVC	6.8"	- Base Model
KW-M690BW	JVC	6.8"	Compared with base model: - No SiriusXM
DMX5710S	KENWOOD	6.8"	Compared with base model: - Different Brand
DMX50S	KENWOOD	6.8"	Compared with base model: - Different Brand
DMX500S	KENWOOD	6.8"	Compared with base model: - Different Brand - No SiriusXM
DMX6523S	KENWOOD	6.8"	Compared with base model: - No SiriusXM
DMX723WS	KENWOOD	6.8"	Compared with base model: - Different Brand - Different size of front panel - Touch keys on two sides (left & right) - No SiriusXM
DMX80AXS	KENWOOD	9"	Compared with base model: - Different Brand - Different display size and panel size - Touch keys on two sides (left & right) - No SiriusXM

The main measuring model is DMX5710S, only the results for DMX5710S were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


Test mode is used to control the EUT under the maximum power level during test.

2.5. Test Conditions


Temperature (°C)	15–35
Relative Humidity (%)	30–60
Atmospheric Pressure (kPa)	86–106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

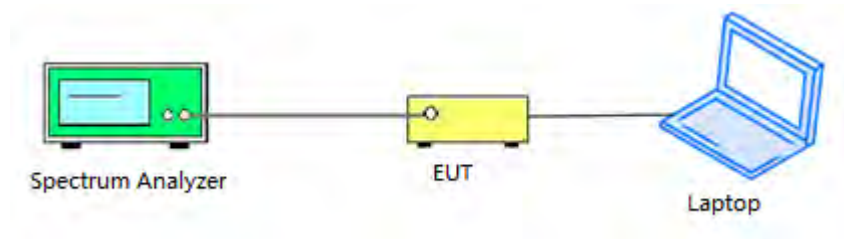


2.6.2. Conducted Emission Measurement

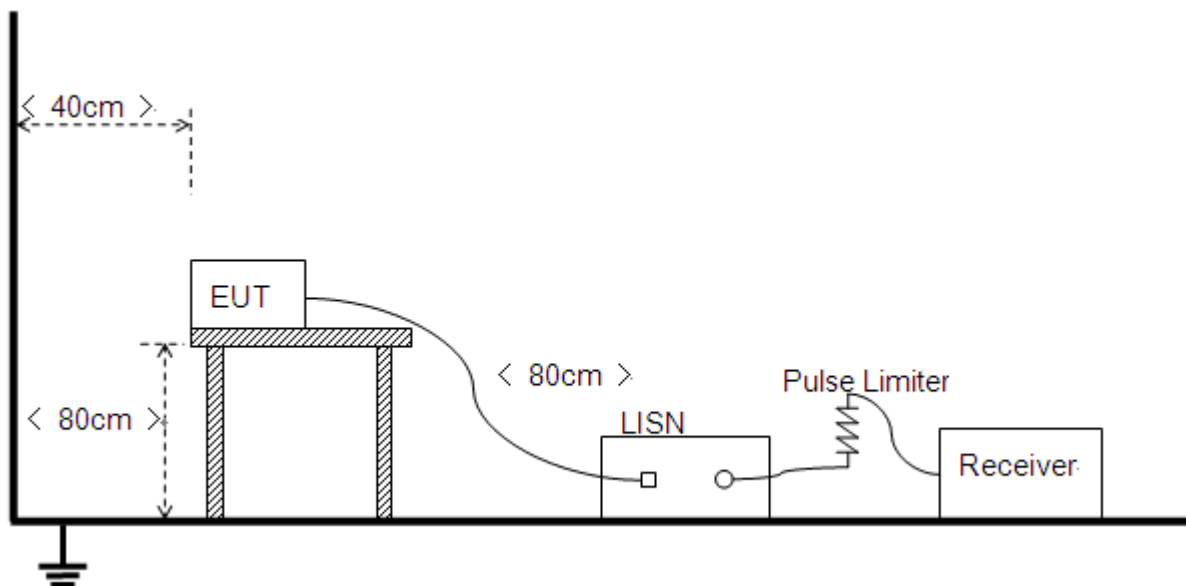


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

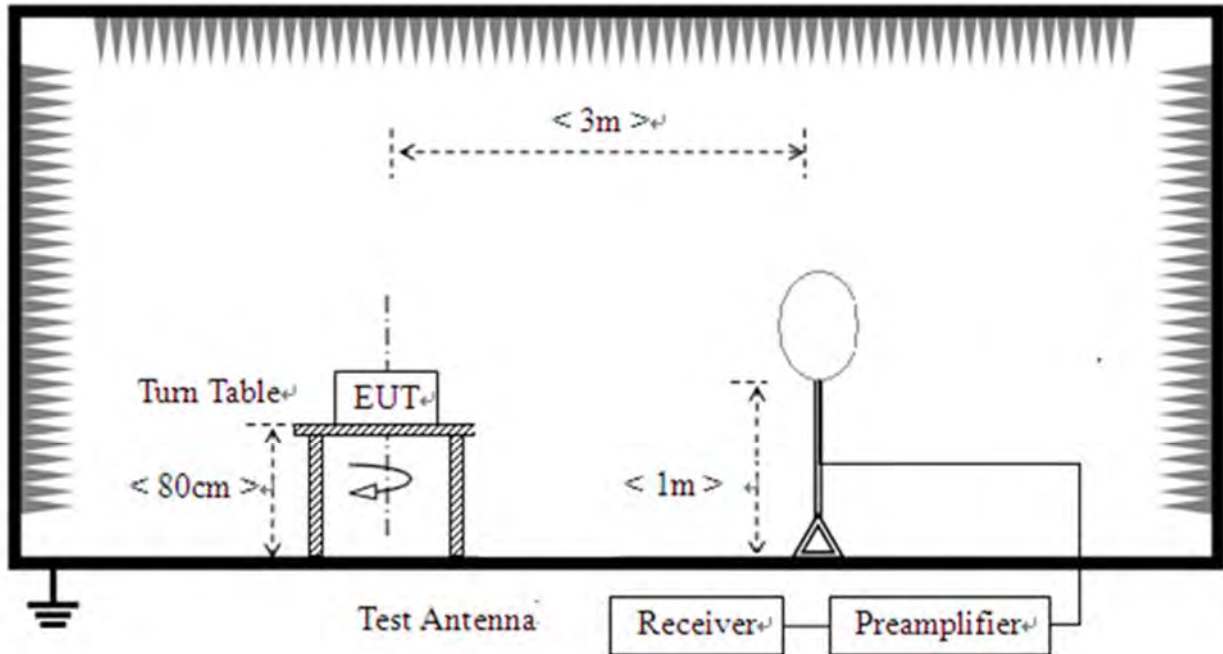

2) For radiated emissions from 30MHz to 1GHz

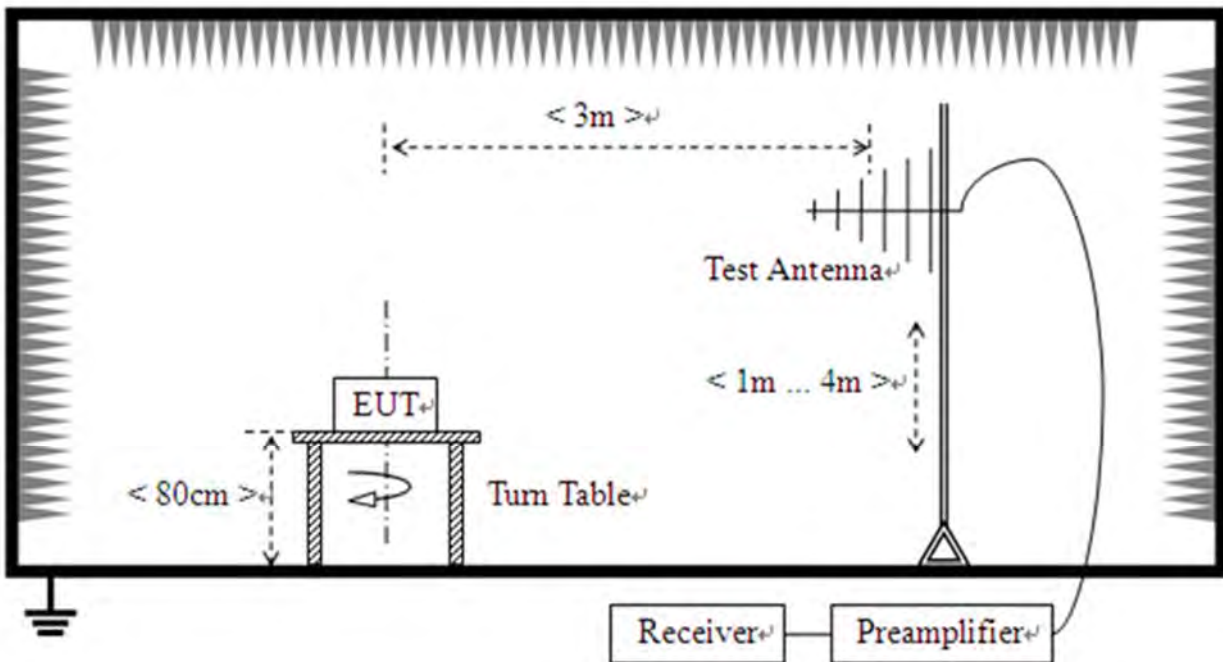

3) For radiated emissions above 1GHz

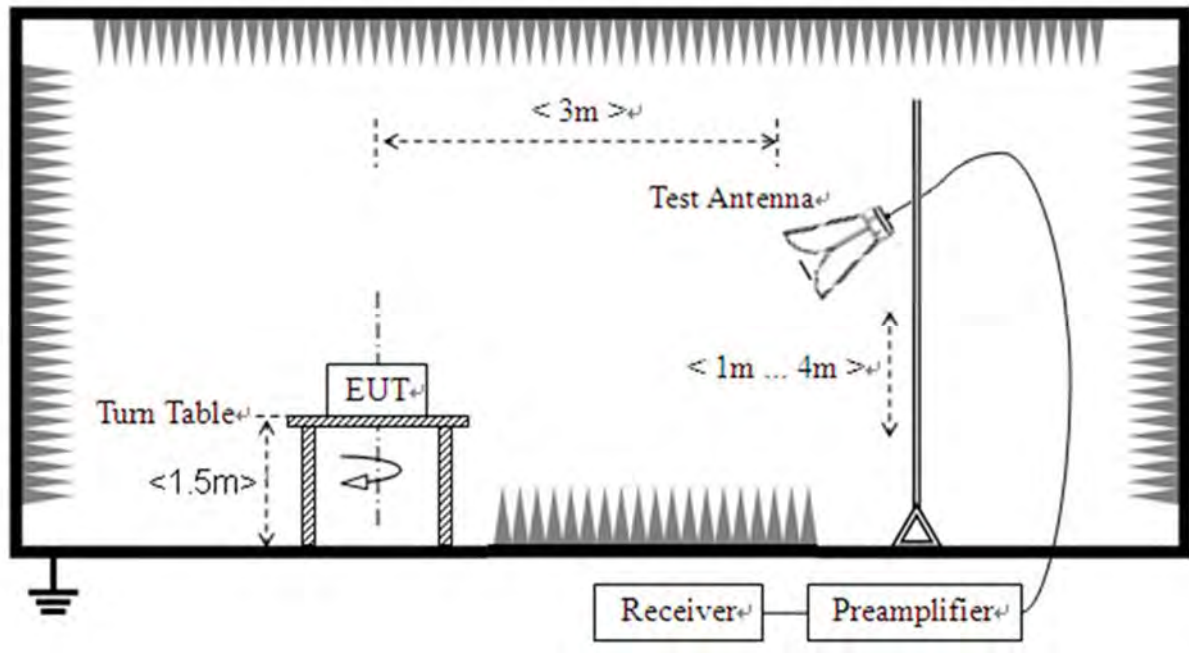



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Antenna location	Antenna Type	Coupling Method
☒ Internal ☐ External	☐ FPC Antenna ☐ Spring Antenna ☐ Ceramic Antenna ☐ Integrated Antenna ☐ Dipole Antenna ☒ PCB Antenna ☐ PIFA Antenna	☐ I-PEX Connector ☐ SMA Connector ☐ RP-SMA Connector ☐ Metal Shrapnel ☒ Layout



3.2. Hopping Mechanism

3.2.1. Requirement

According to FCC section 15.247(a)(1), a frequency hopping spread spectrum system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

According to FCC section 15.247(h), the incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3.2.2. Test Result

The hopping mechanism of the EUT is in compliance with the document "**Bluetooth core specification v5.1**".



3.3. Number of Hopping Frequency

3.3.1. Requirement

According to FCC section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

3.3.2. Test Procedures

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.1 in this report.

3.4. Duty Cycle of Test Signal

3.4.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.4.2. Test Result

Refer to Annex A.2 in this report.



3.5. Maximum Peak Conducted Output Power

3.5.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.5.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.3 in this report.



3.6. Maximum Average Conducted Output Power

3.6.1. Requirement

According to FCC section 15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

3.6.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.4 in this report.



3.7.20 dB Bandwidth

3.7.1.Requirement

According to FCC section 15.247(a)(1), the 20 dB bandwidth is known as the 99% emission bandwidth, or 20 dB bandwidth ($10 \cdot \log 1\% = 20 \text{ dB}$) taking the total RF output power.

3.7.1.Test Procedures

Use the following spectrum analyzer settings:

Span = between 2 to 5 times the OBW, centered on the test channel

RBW= 1% to 5% of the OBW

VBW $\geq 3 \times$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

3.7.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.3.Test Result

Refer to Annex A.5 in this report.



3.8. Carried Frequency Separation

3.8.1. Requirement

According to FCC section 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

3.8.2. Test Procedures

The EUT must have its hopping function enabled. According to DA 00-705, use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

3.8.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.8.4. Test Result

Refer to Annex A.6 in this report.



3.9. Time of Occupancy (Dwell time)

3.9.1. Requirement

According to FCC section 15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.9.2. Test Procedures

Normal Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (1600 / 2 / 79) \times 31.6$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (1600 / 4 / 79) \times 31.6$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (1600 / 6 / 79) \times 31.6$ Millisecond

AFH Mode:

DH1: Dwell time equal to Pulse time (ms) $\times (800 / 2 / 20) \times (0.4 \times 20)$ Millisecond
DH3: Dwell time equal to Pulse time (ms) $\times (800 / 4 / 20) \times (0.4 \times 20)$ Millisecond
DH5: Dwell time equal to Pulse Time (ms) $\times (800 / 6 / 20) \times (0.4 \times 20)$ Millisecond.

3.9.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.9.4. Test Result

Refer to Annex A.7 in this report.



3.10. Conducted Spurious Emissions and Band Edge

3.10.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.10.2.Test Procedures

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

3.10.3.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.10.4.Test Result

Refer to Annex A.8 and A.9 in this report.

3.11. Conducted Emission

3.11.1.Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.11.2.Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.11.3.Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.11.4.Test Result

This test case does not apply this kind of EUT.

3.12. Restricted Frequency Bands

3.12.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.12.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.12.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.12.4.Test Result

Refer to Annex A.10 in this report.

3.13. Radiated Emission

3.13.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.13.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.13.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.13.4.Test Result

Refer to Annex A.11 in this report.



Annex A Test Data and Result


A.1. Number of Hopping Frequency

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass




Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

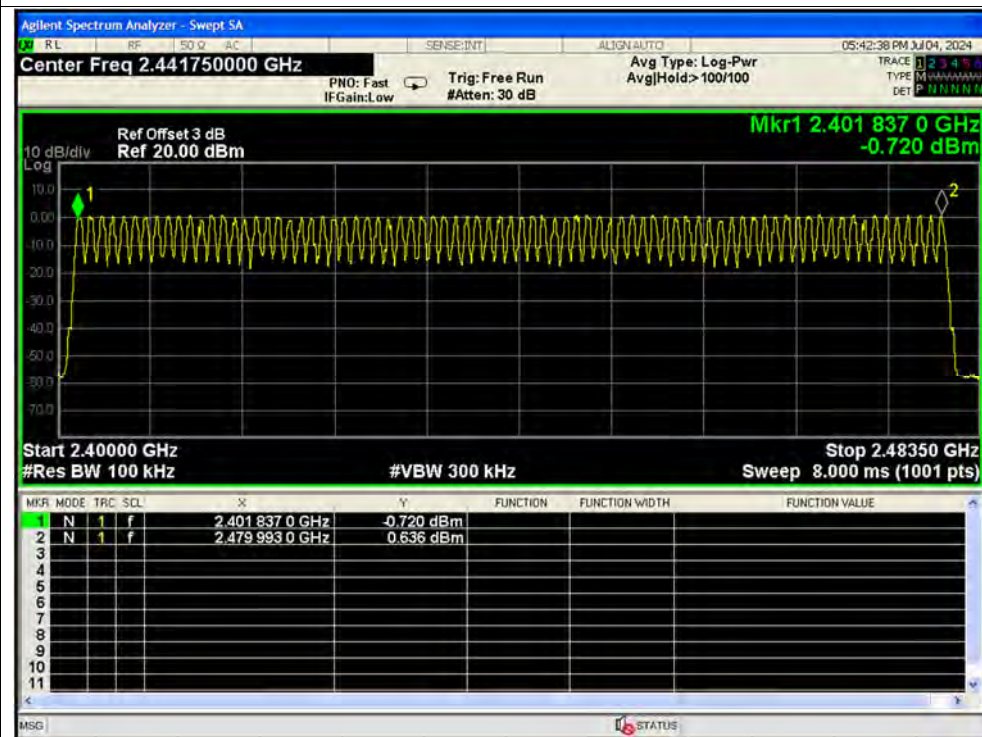


Hopping No. NVNT 2-DH5 2402MHz Ant1

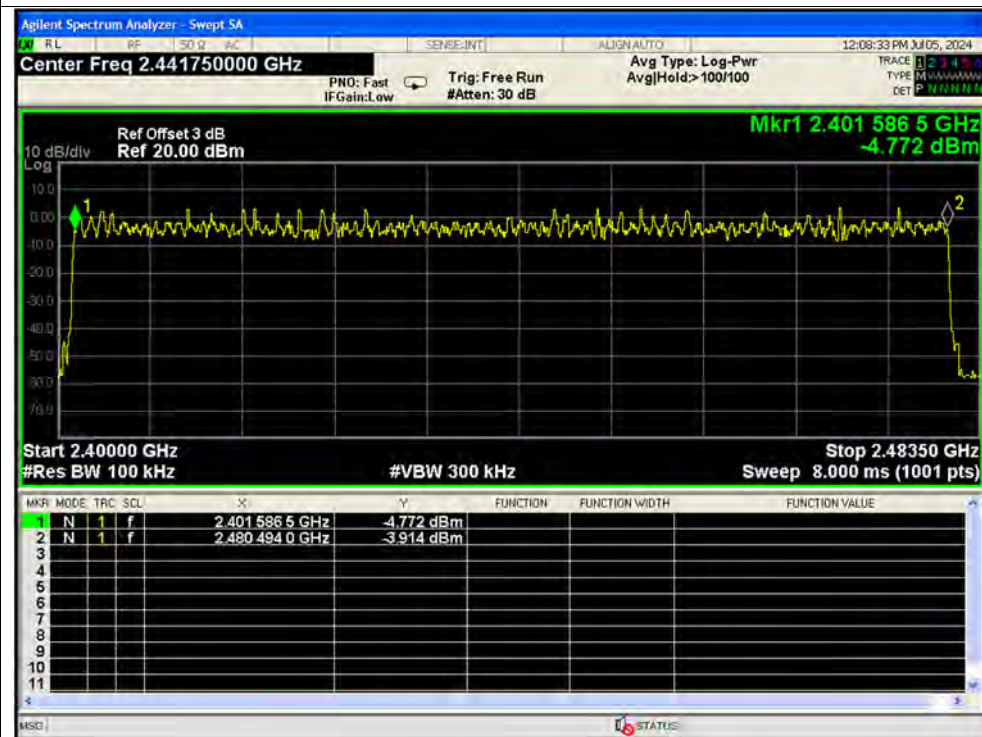



Hopping No. NVNT 3-DH5 2402MHz Ant1

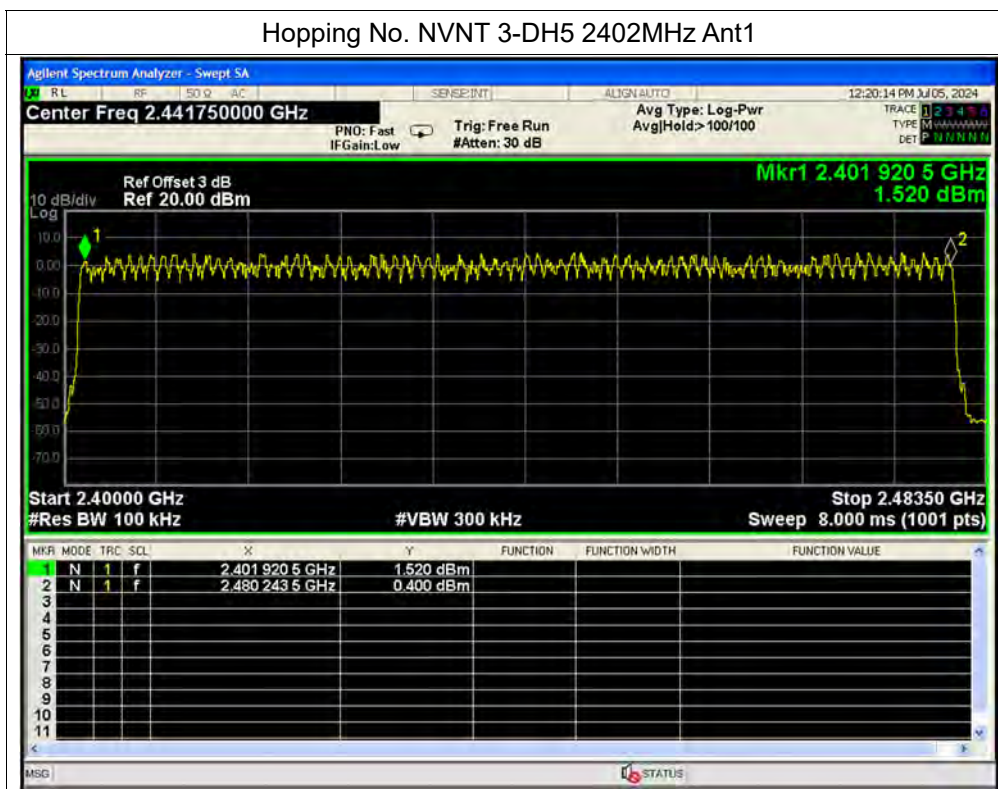


**A.2. Duty Cycle of Test Signal**


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	Ant1	76.18	1.18	0.35
NVNT	1-DH5	2441	Ant1	76.18	1.18	0.35
NVNT	1-DH5	2480	Ant1	76.18	1.18	0.35
NVNT	2-DH5	2402	Ant1	76.21	1.18	0.35
NVNT	2-DH5	2441	Ant1	76.18	1.18	0.35
NVNT	2-DH5	2480	Ant1	76.21	1.18	0.35
NVNT	3-DH5	2402	Ant1	76.22	1.18	0.35
NVNT	3-DH5	2441	Ant1	76.22	1.18	0.35
NVNT	3-DH5	2480	Ant1	76.22	1.18	0.35

Test Graphs


Duty Cycle NVNT 1-DH5 2402MHz Ant1

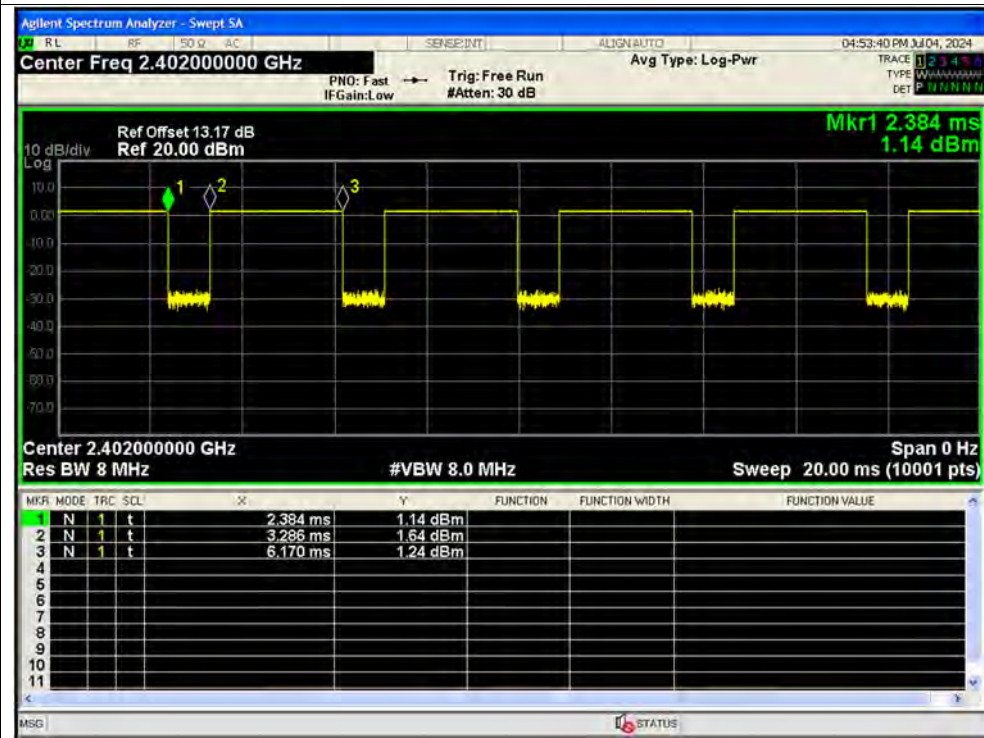


Duty Cycle NVNT 1-DH5 2441MHz Ant1

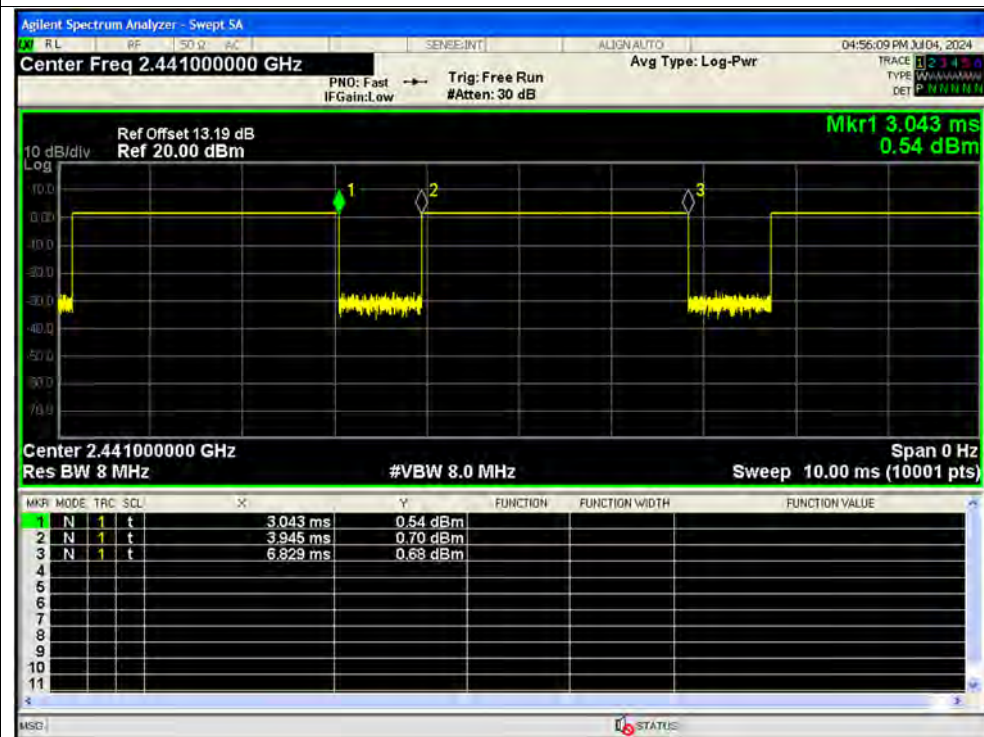

Duty Cycle NVNT 1-DH5 2480MHz Ant1

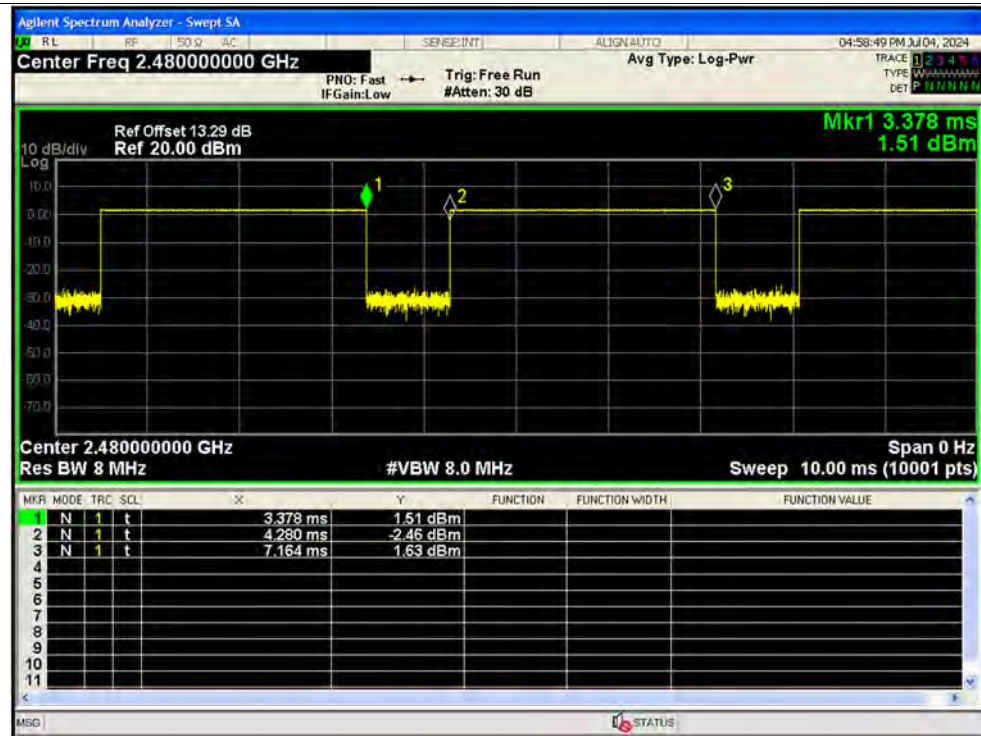


Duty Cycle NVNT 2-DH5 2402MHz Ant1

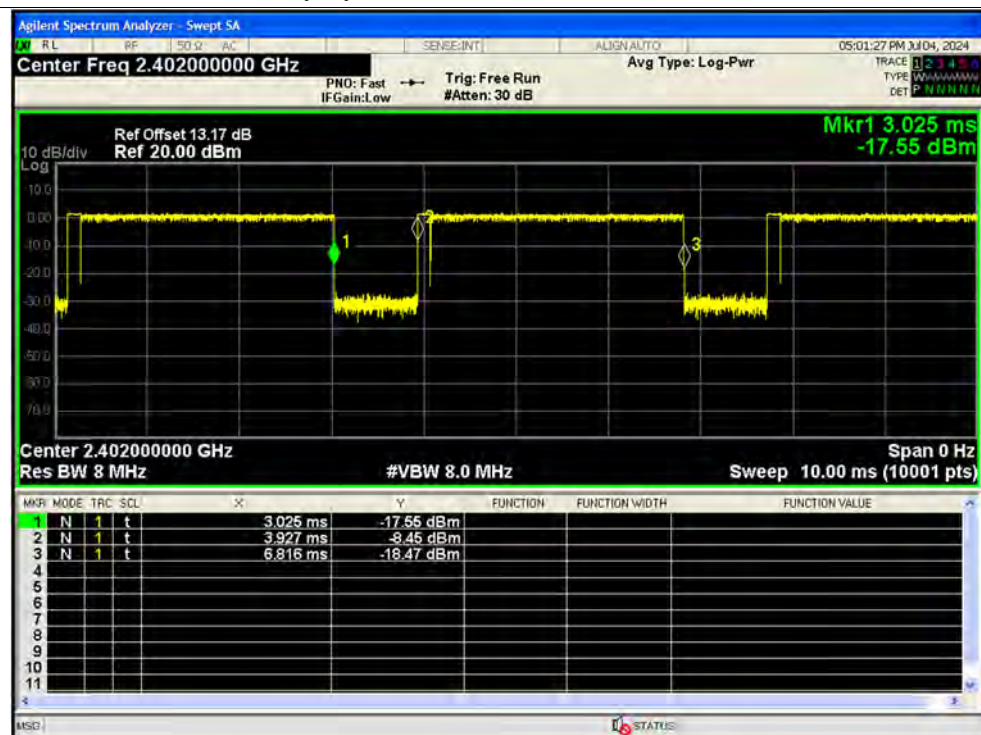




Duty Cycle NVNT 2-DH5 2441MHz Ant1

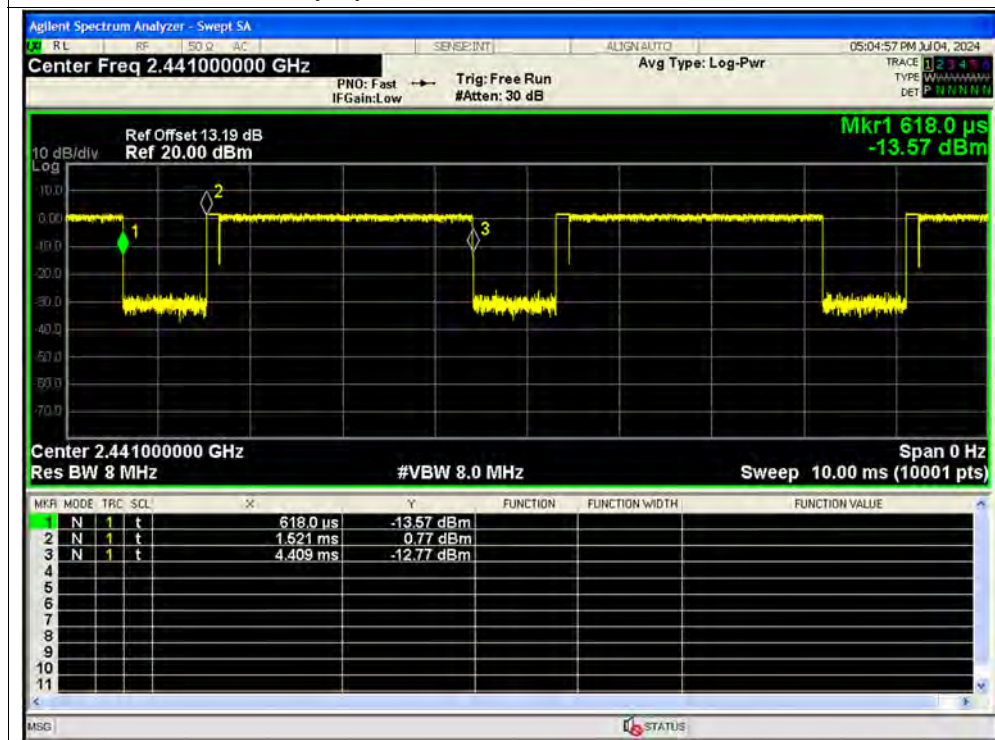

Duty Cycle NVNT 2-DH5 2480MHz Ant1

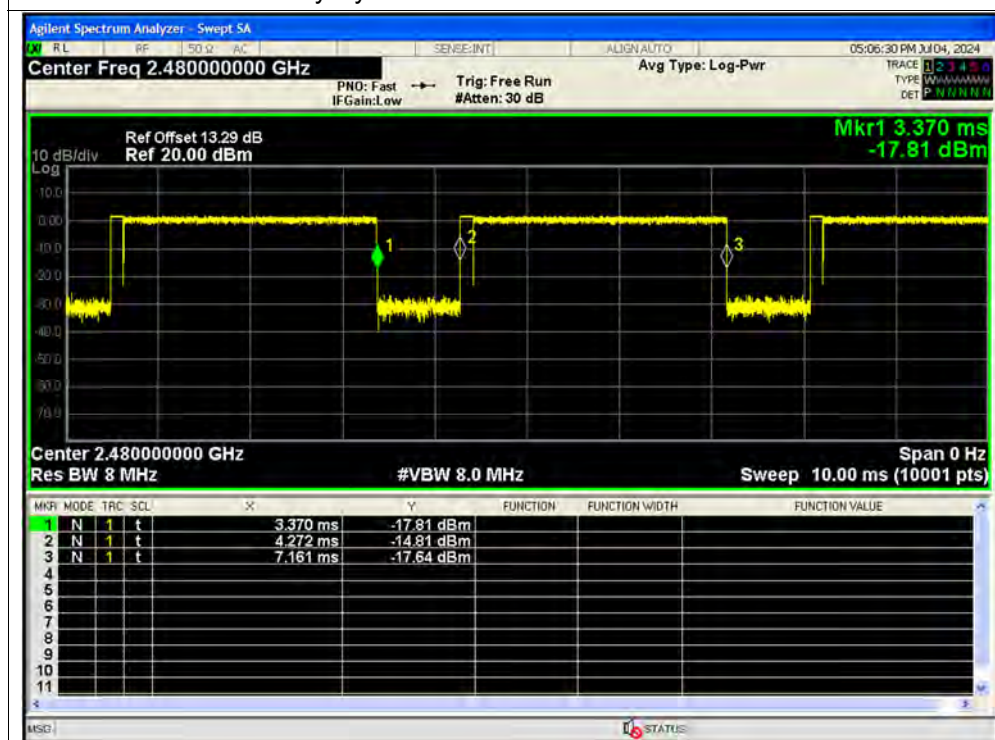

Duty Cycle NVNT 3-DH5 2402MHz Ant1




Duty Cycle NVNT 3-DH5 2441MHz Ant1





Duty Cycle NVNT 3-DH5 2480MHz Ant1

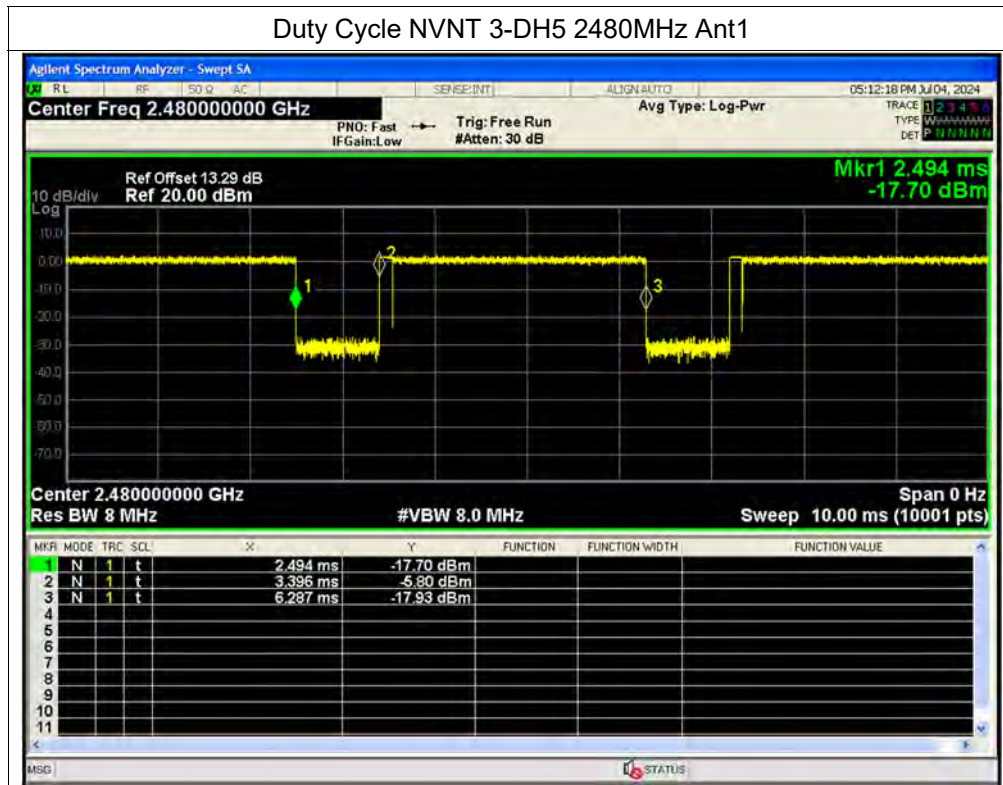

**A.3. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	1.69	0	1.69	0.00148	30	Pass
NVNT	1-DH5	2441	Ant1	1.82	0	1.82	0.00152	30	Pass
NVNT	1-DH5	2480	Ant1	1.82	0	1.82	0.00152	30	Pass
NVNT	2-DH5	2402	Ant1	1.59	0	1.59	0.00144	30	Pass
NVNT	2-DH5	2441	Ant1	1.81	0	1.81	0.00152	30	Pass
NVNT	2-DH5	2480	Ant1	1.7	0	1.7	0.00148	30	Pass
NVNT	3-DH5	2402	Ant1	2.02	0	2.02	0.00159	30	Pass
NVNT	3-DH5	2441	Ant1	2.16	0	2.16	0.00164	30	Pass
NVNT	3-DH5	2480	Ant1	2.08	0	2.08	0.00161	30	Pass

Test Graphs

Peak Power NVNT 1-DH5 2402MHz Ant1



Peak Power NVNT 1-DH5 2441MHz Ant1



Peak Power NVNT 1-DH5 2480MHz Ant1



Peak Power NVNT 2-DH5 2402MHz Ant1



Peak Power NVNT 2-DH5 2441MHz Ant1



Peak Power NVNT 2-DH5 2480MHz Ant1



Peak Power NVNT 3-DH5 2402MHz Ant1



Peak Power NVNT 3-DH5 2441MHz Ant1





Peak Power NVNT 3-DH5 2480MHz Ant1



**A.4. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	0.09	1.18	1.27	0.00134	30	Pass
NVNT	1-DH5	2441	Ant1	-0.21	1.18	0.97	0.00125	30	Pass
NVNT	1-DH5	2480	Ant1	0.3	1.18	1.48	0.00141	30	Pass
NVNT	2-DH5	2402	Ant1	-2.59	1.18	-1.41	0.00072	30	Pass
NVNT	2-DH5	2441	Ant1	-2.63	1.18	-1.45	0.00072	30	Pass
NVNT	2-DH5	2480	Ant1	-2.23	1.18	-1.05	0.00079	30	Pass
NVNT	3-DH5	2402	Ant1	-3.42	1.18	-2.24	0.0006	30	Pass
NVNT	3-DH5	2441	Ant1	-2.28	1.18	-1.1	0.00078	30	Pass
NVNT	3-DH5	2480	Ant1	-2.19	1.18	-1.01	0.00079	30	Pass



Test Graphs

Average Power NVNT 1-DH5 2402MHz Ant1




Average Power NVNT 1-DH5 2441MHz Ant1




Average Power NVNT 1-DH5 2480MHz Ant1




Average Power NVNT 2-DH5 2402MHz Ant1

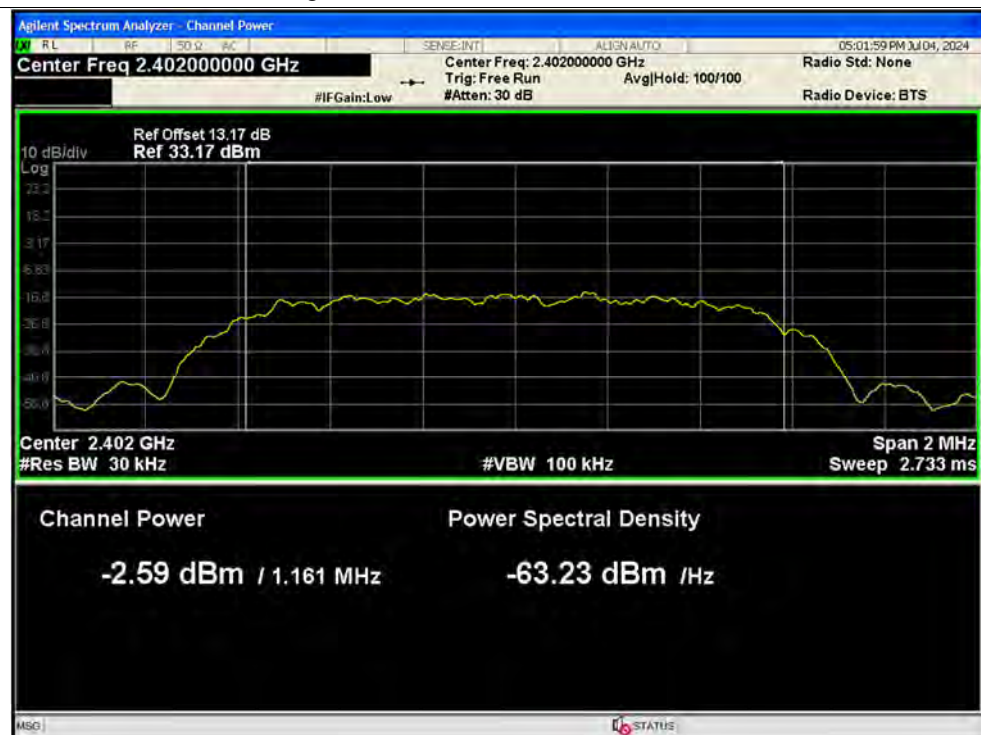


Average Power NVNT 2-DH5 2441MHz Ant1

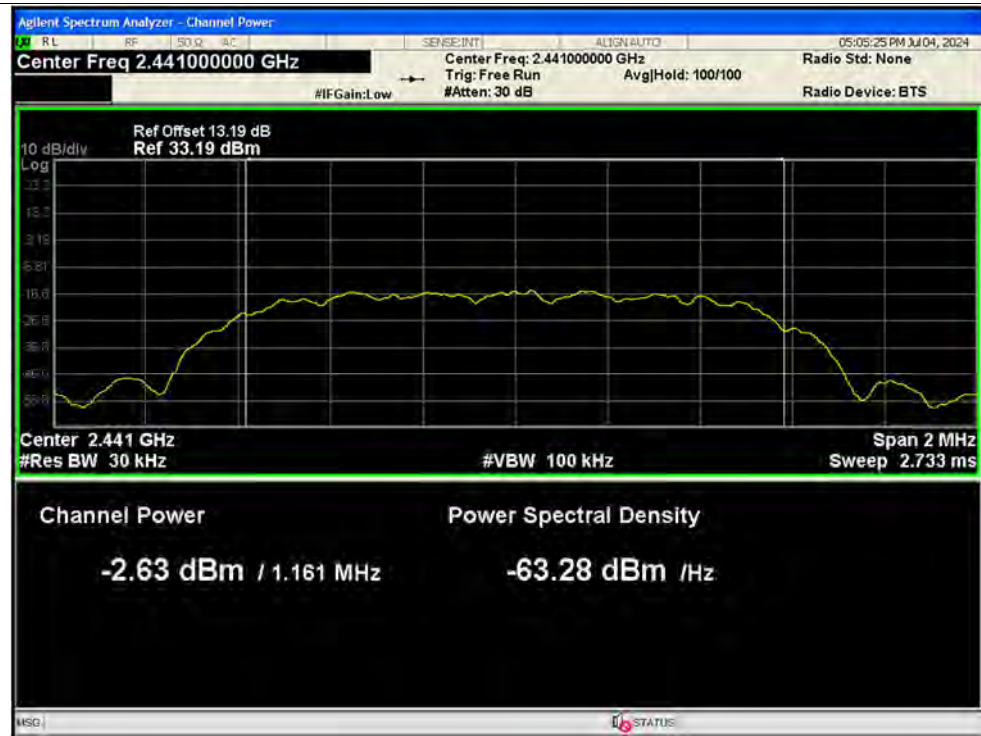


Average Power NVNT 2-DH5 2480MHz Ant1

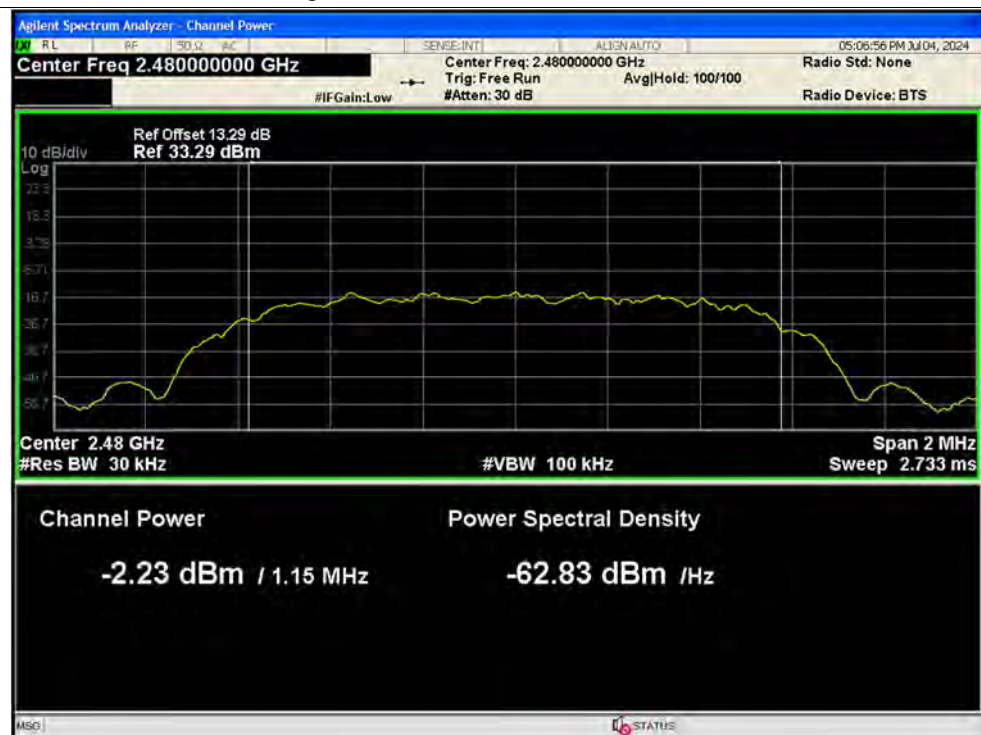

Average Power NVNT 3-DH5 2402MHz Ant1

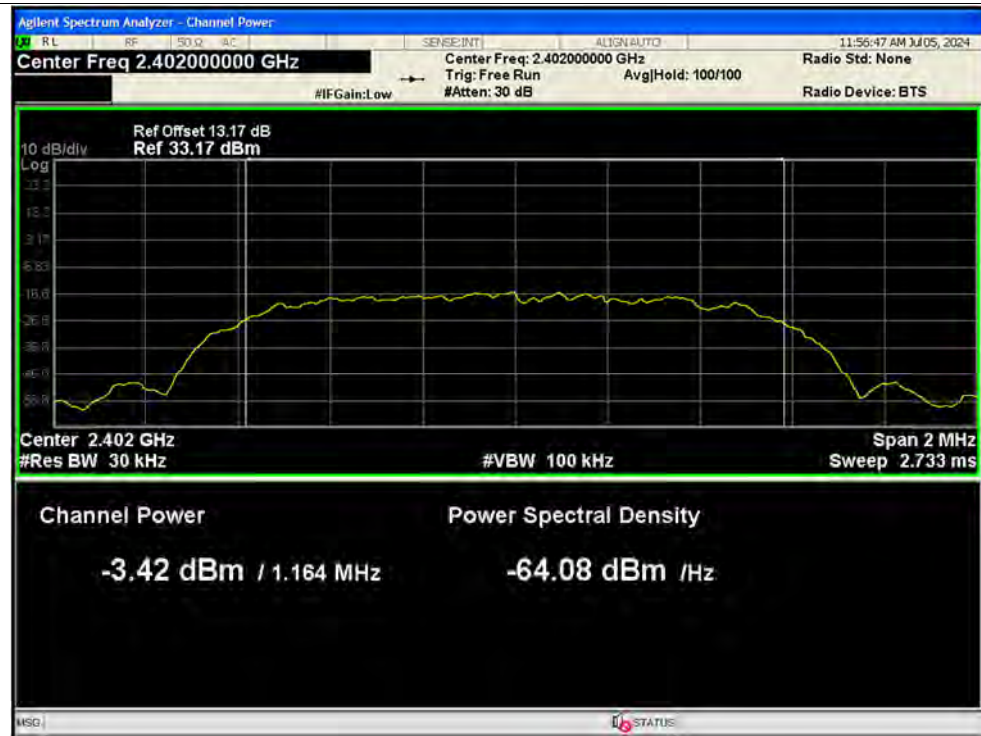


Average Power NVNT 3-DH5 2441MHz Ant1

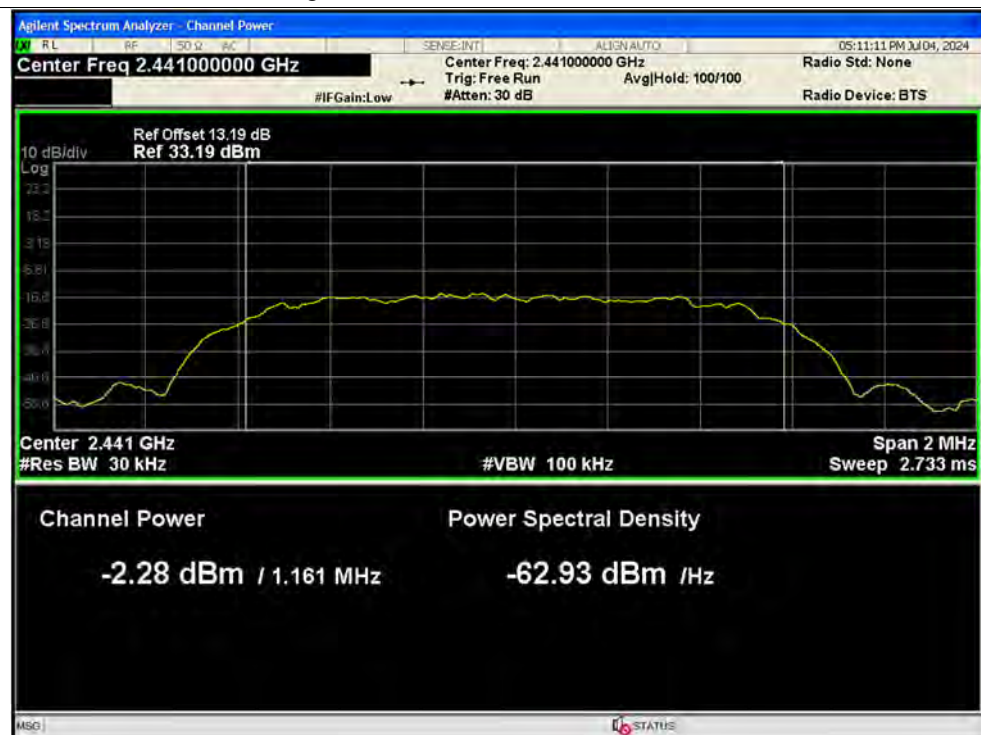



Average Power NVNT 3-DH5 2480MHz Ant1

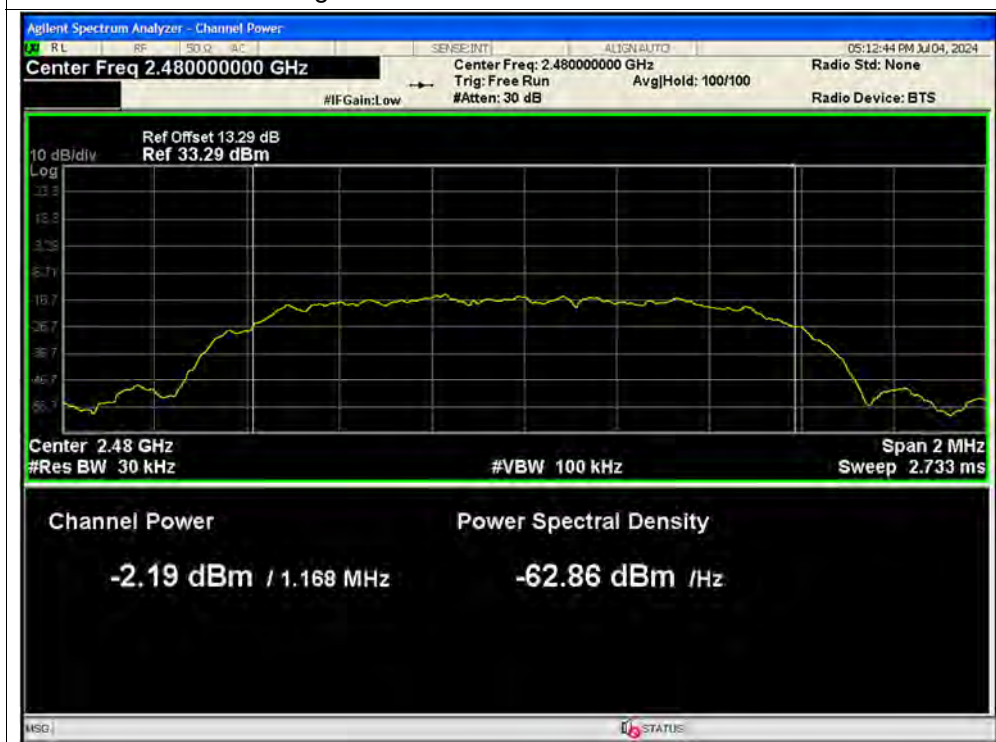

**A.5. 20 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)
NVNT	1-DH5	2402	Ant1	0.95
NVNT	1-DH5	2441	Ant1	0.955
NVNT	1-DH5	2480	Ant1	0.958
NVNT	2-DH5	2402	Ant1	1.225
NVNT	2-DH5	2441	Ant1	1.22
NVNT	2-DH5	2480	Ant1	1.278
NVNT	3-DH5	2402	Ant1	1.286
NVNT	3-DH5	2441	Ant1	1.281
NVNT	3-DH5	2480	Ant1	1.286

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1




-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1






-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

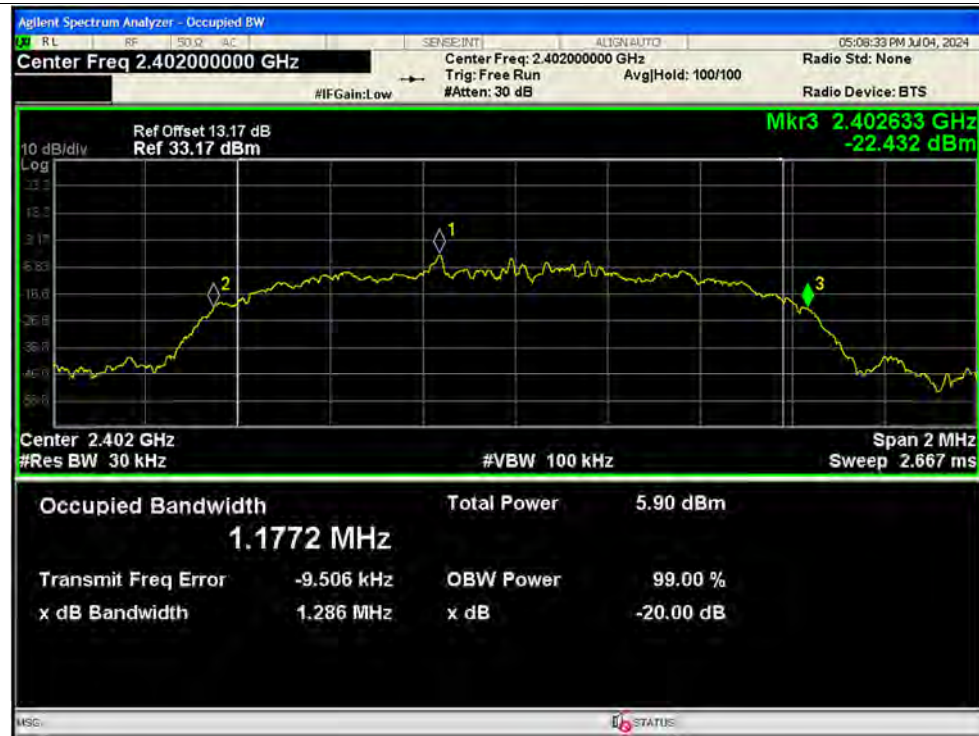


-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

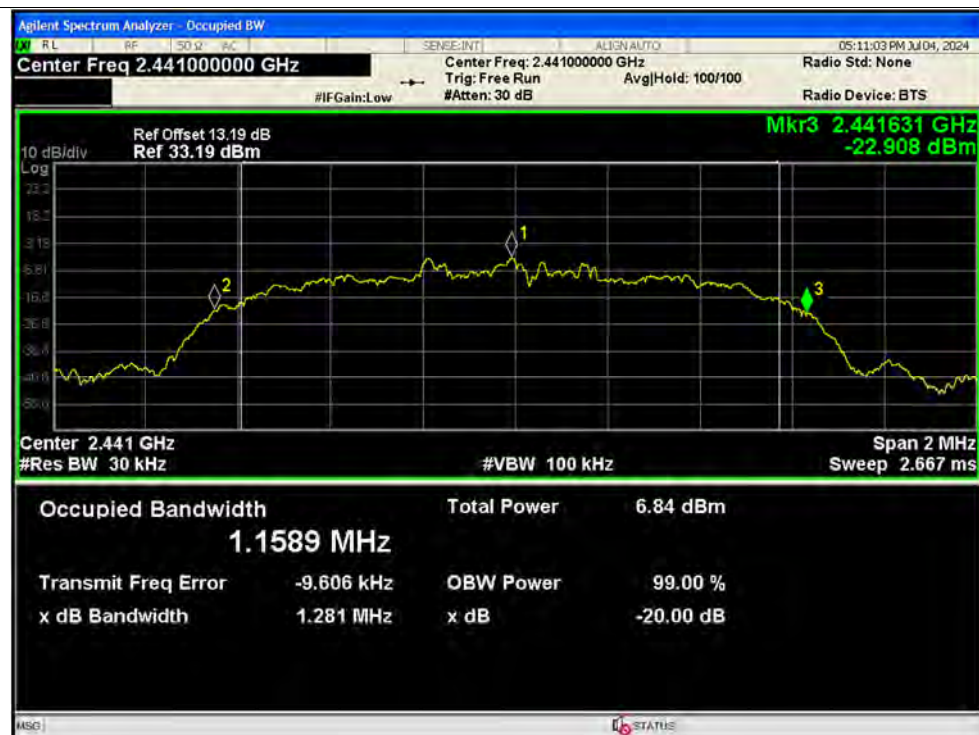




-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

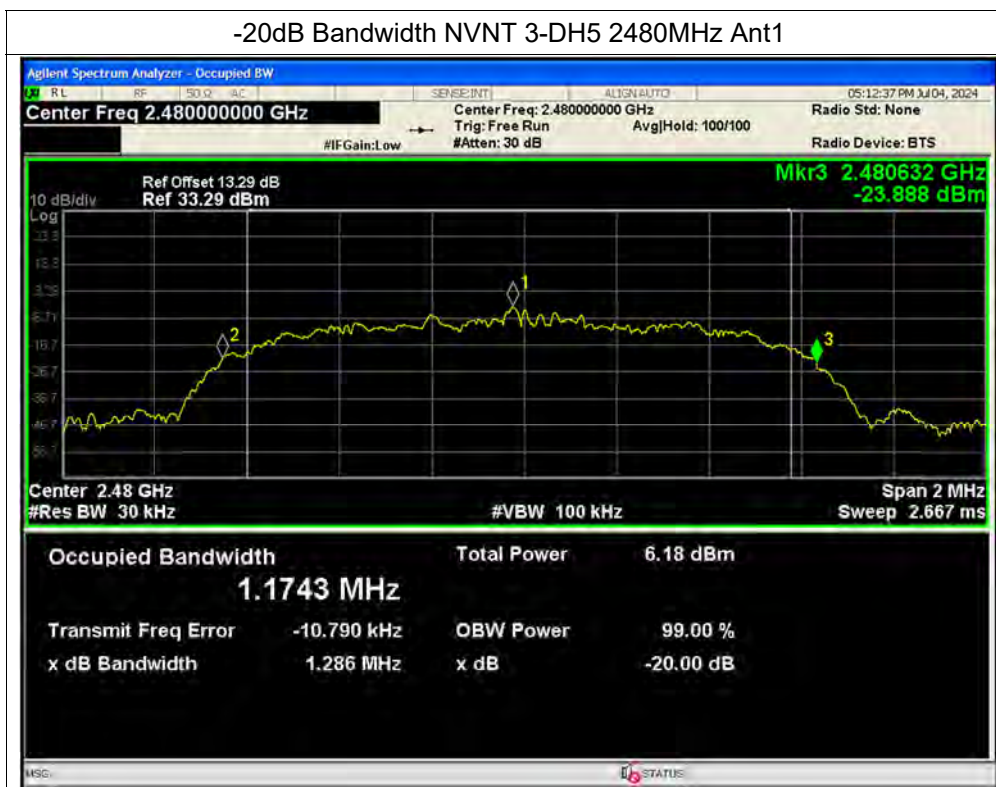




A.6. Carried Frequency Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.95	2403.038	1.088	0.633	Pass
NVNT	2-DH5	Ant1	2401.822	2402.864	1.042	0.817	Pass
NVNT	3-DH5	Ant1	2401.676	2402.806	1.13	0.857	Pass

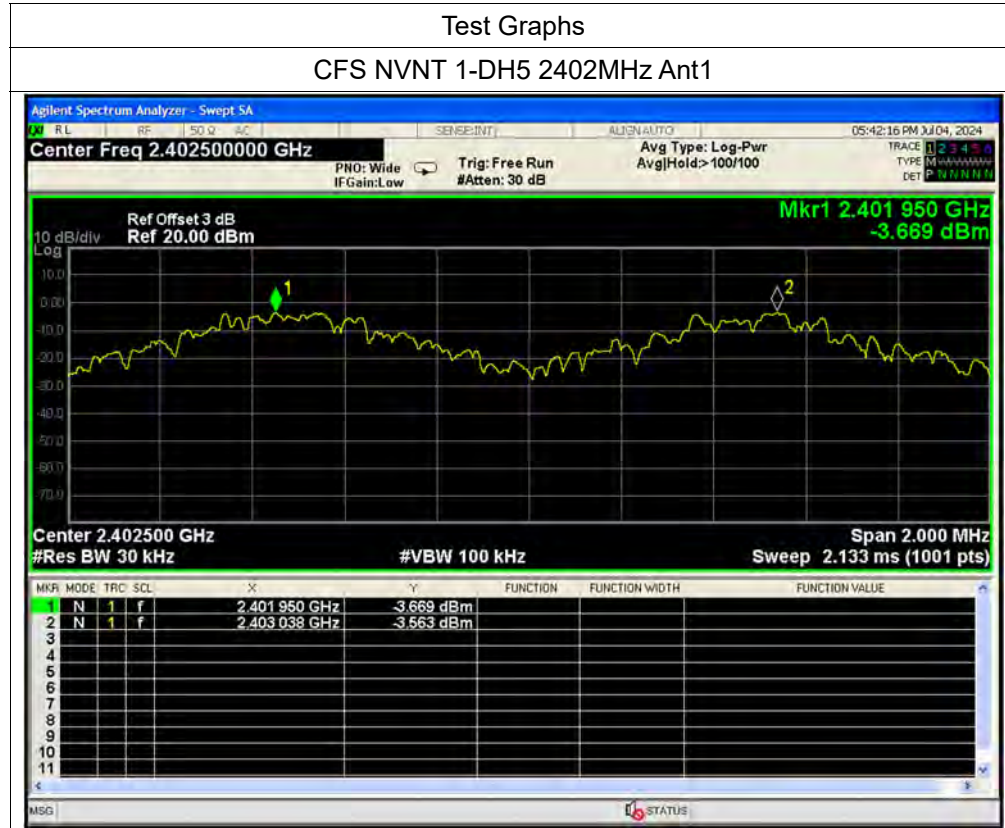




CFS NVNT 2-DH5 2402MHz Ant1

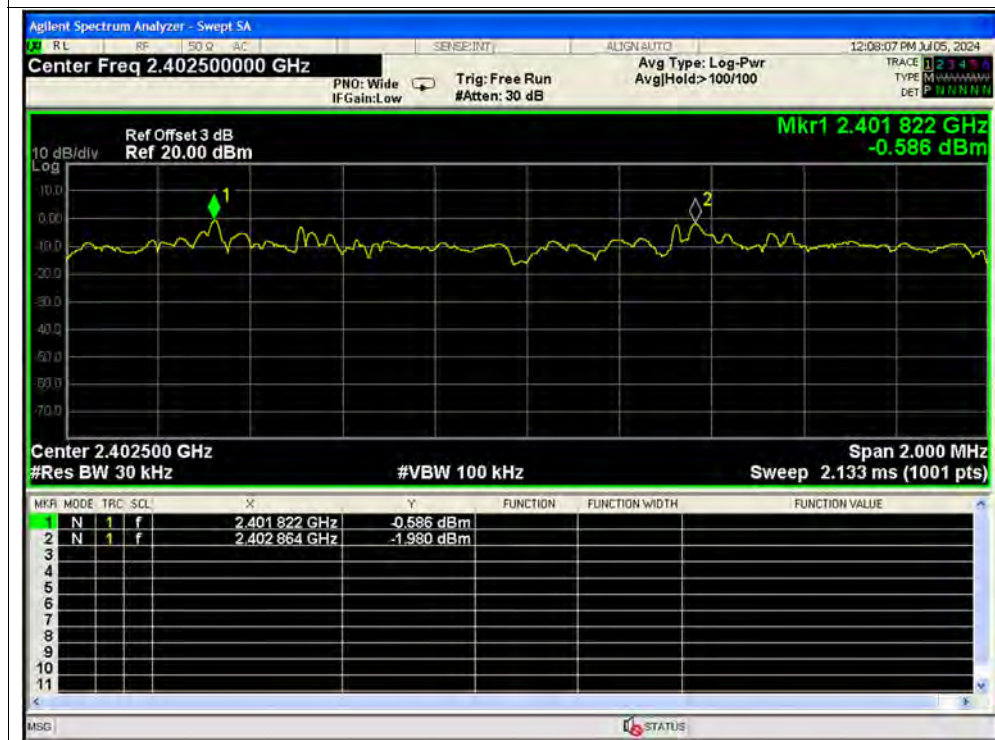

CFS NVNT 3-DH5 2402MHz Ant1

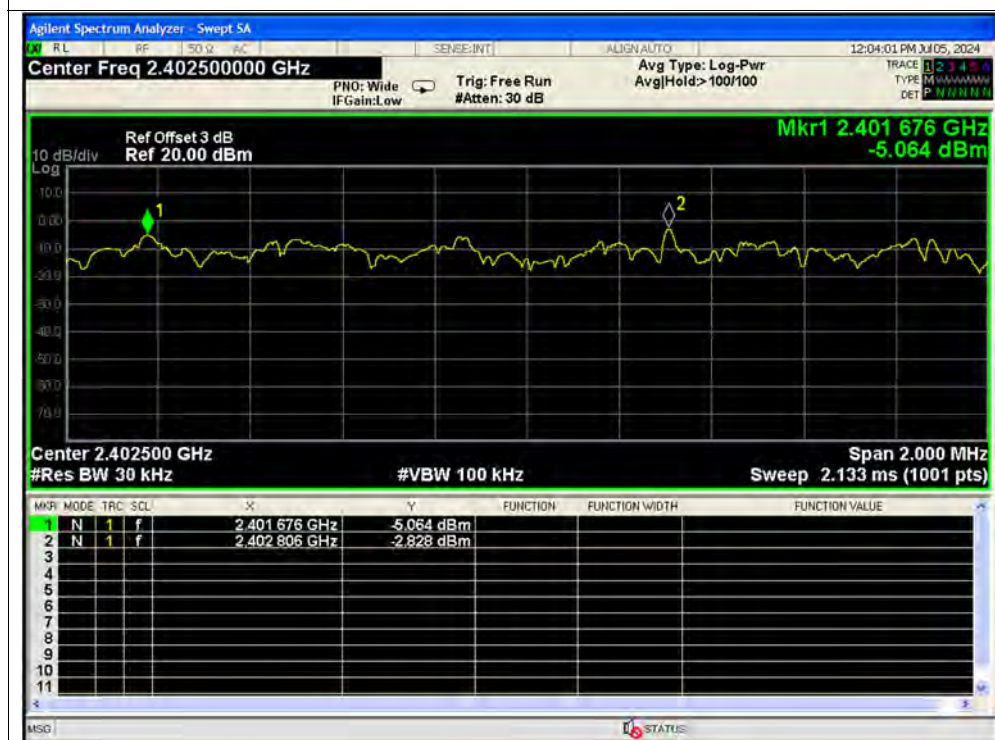


**A.7. Time of Occupancy (Dwell time)**


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2402	Ant1	0.383	122.177	319	31600	400	Pass
NVNT	1-DH3	2402	Ant1	1.638	268.632	164	31600	400	Pass
NVNT	1-DH5	2402	Ant1	2.887	314.683	109	31600	400	Pass
NVNT	2-DH1	2402	Ant1	0.392	125.048	319	31600	400	Pass
NVNT	2-DH3	2402	Ant1	1.643	266.166	162	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.891	280.427	97	31600	400	Pass
NVNT	3-DH1	2402	Ant1	0.391	122.774	314	31600	400	Pass
NVNT	3-DH3	2402	Ant1	1.642	247.942	151	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.893	312.444	108	31600	400	Pass

Test Graphs

Dwell NVNT 1-DH1 2402MHz Ant1 One Burst

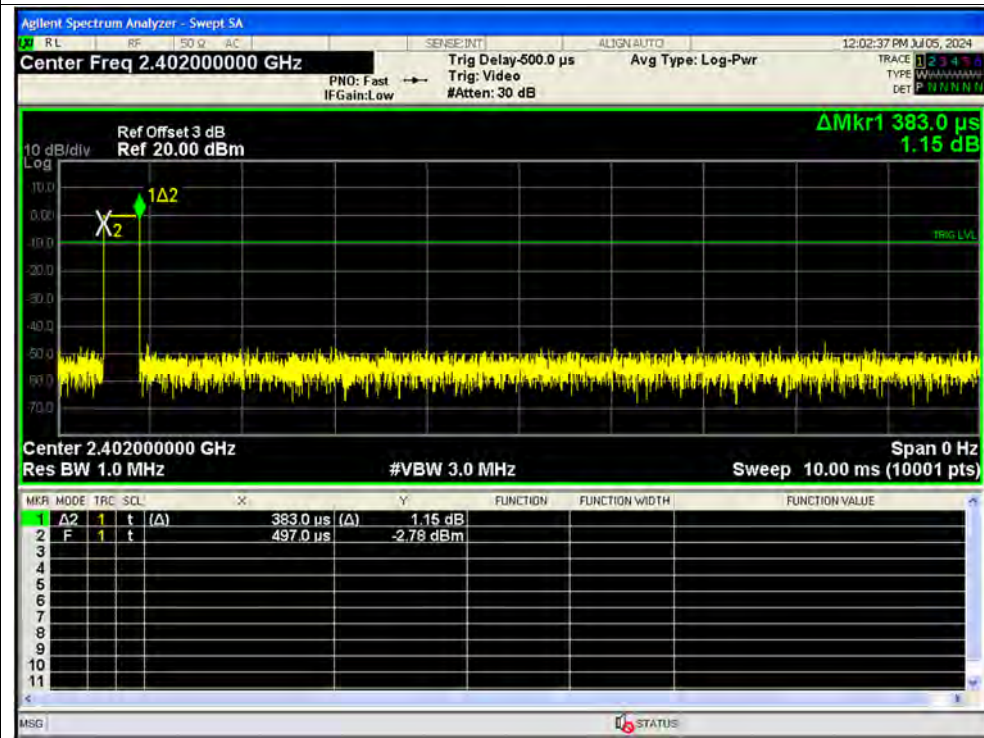


Dwell NVNT 1-DH1 2402MHz Ant1 Accumulated

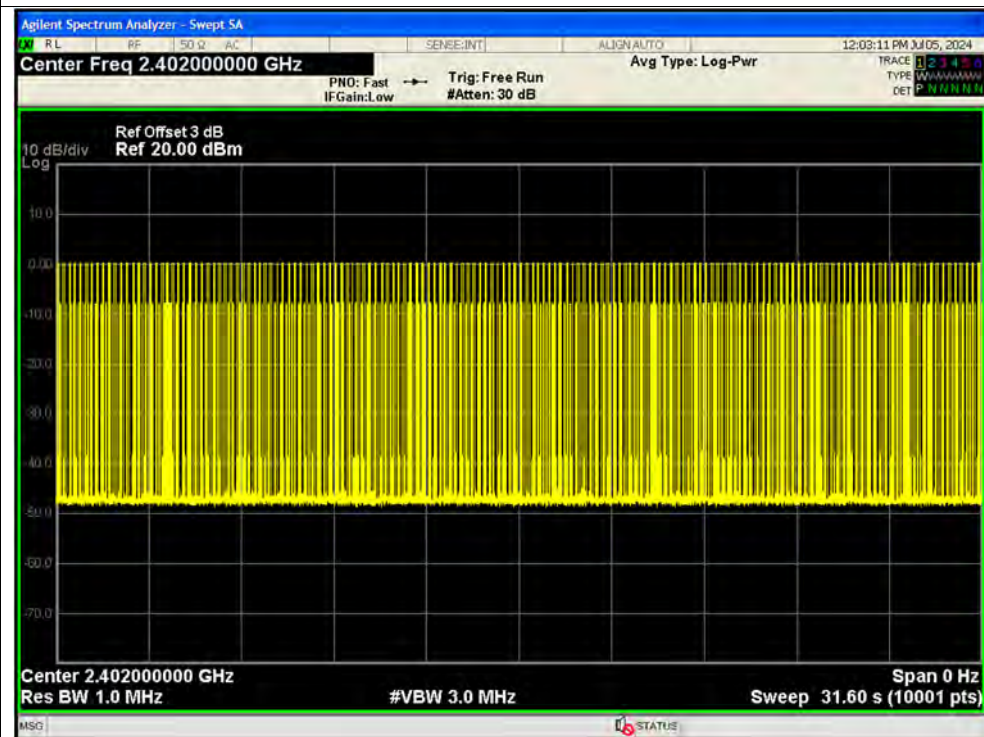




Dwell NVNT 1-DH3 2402MHz Ant1 One Burst

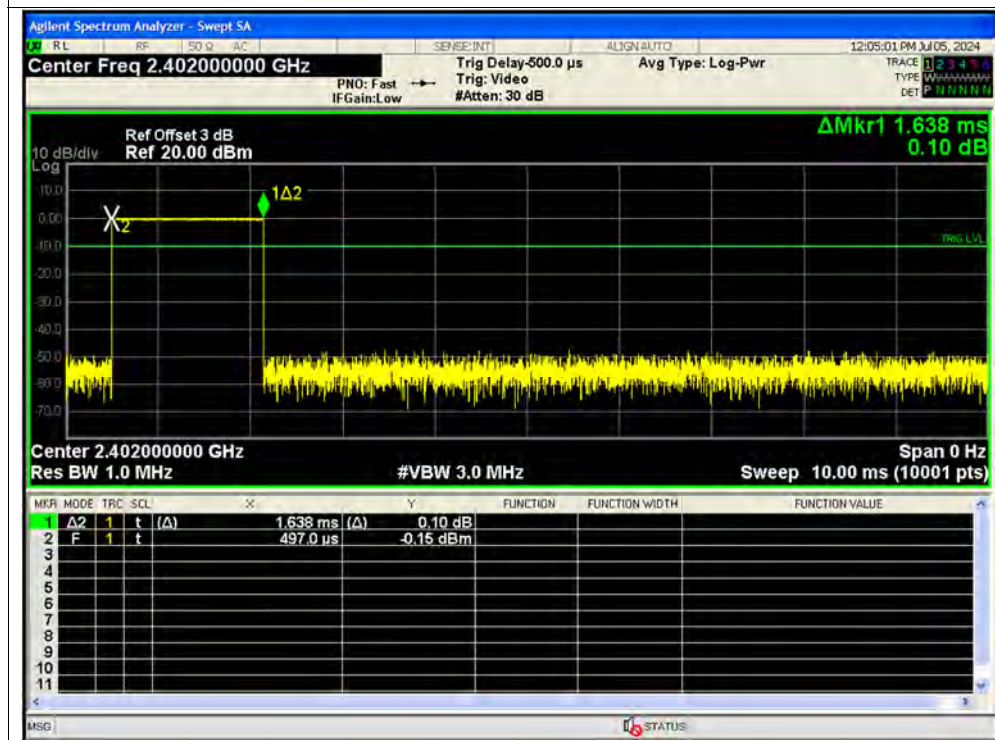


Dwell NVNT 1-DH3 2402MHz Ant1 Accumulated

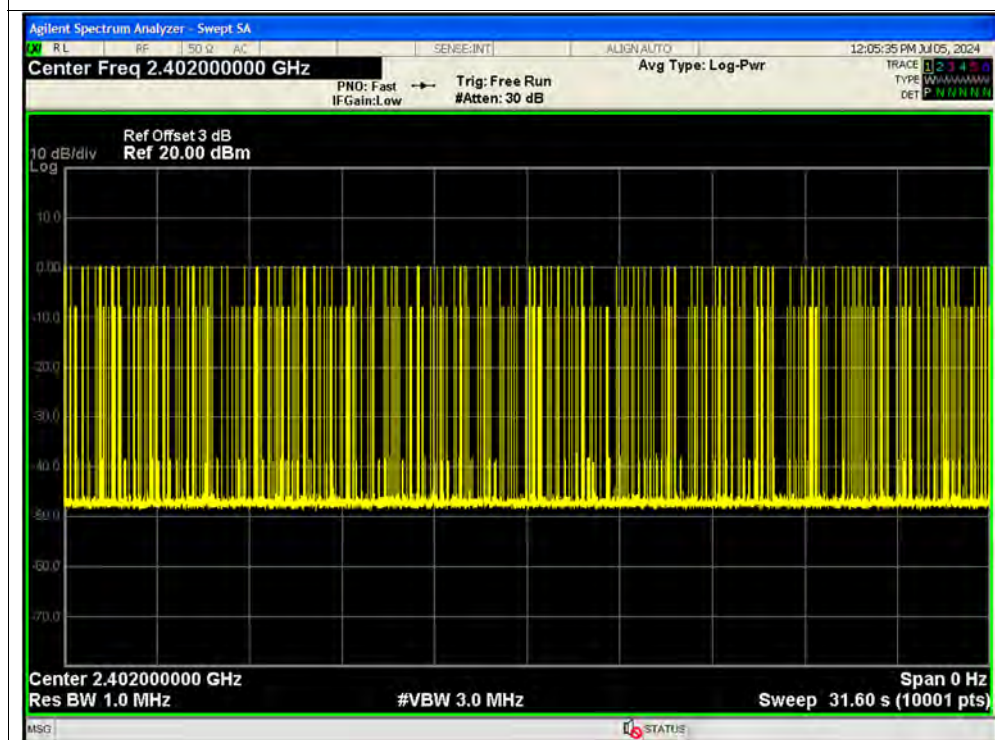



Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

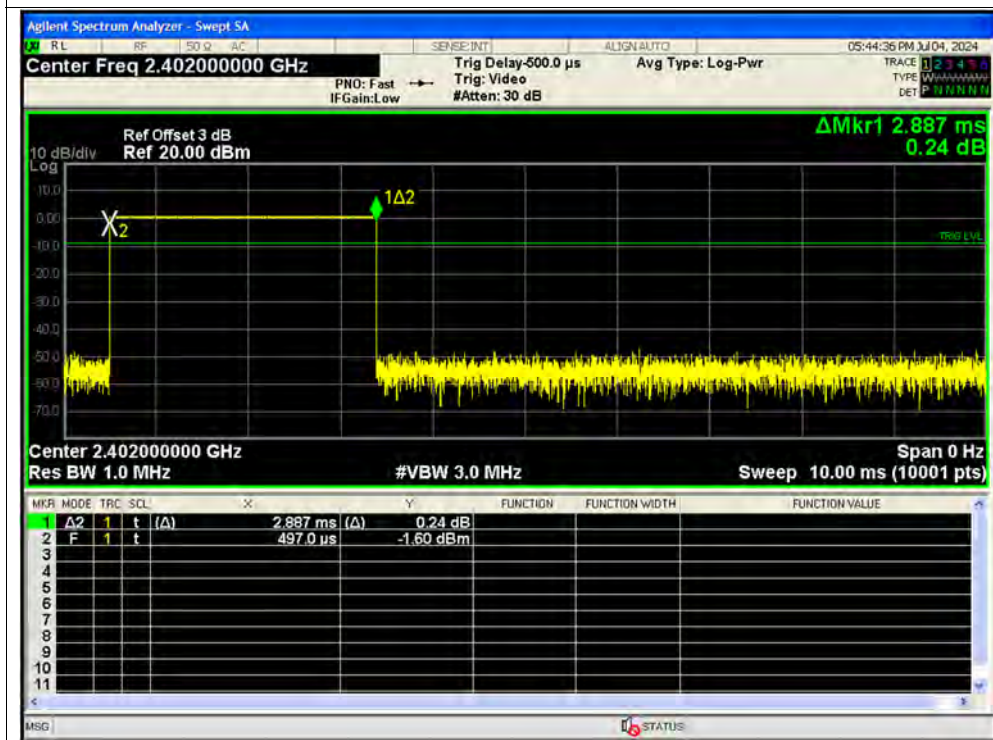


Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated






Dwell NVNT 2-DH1 2402MHz Ant1 One Burst

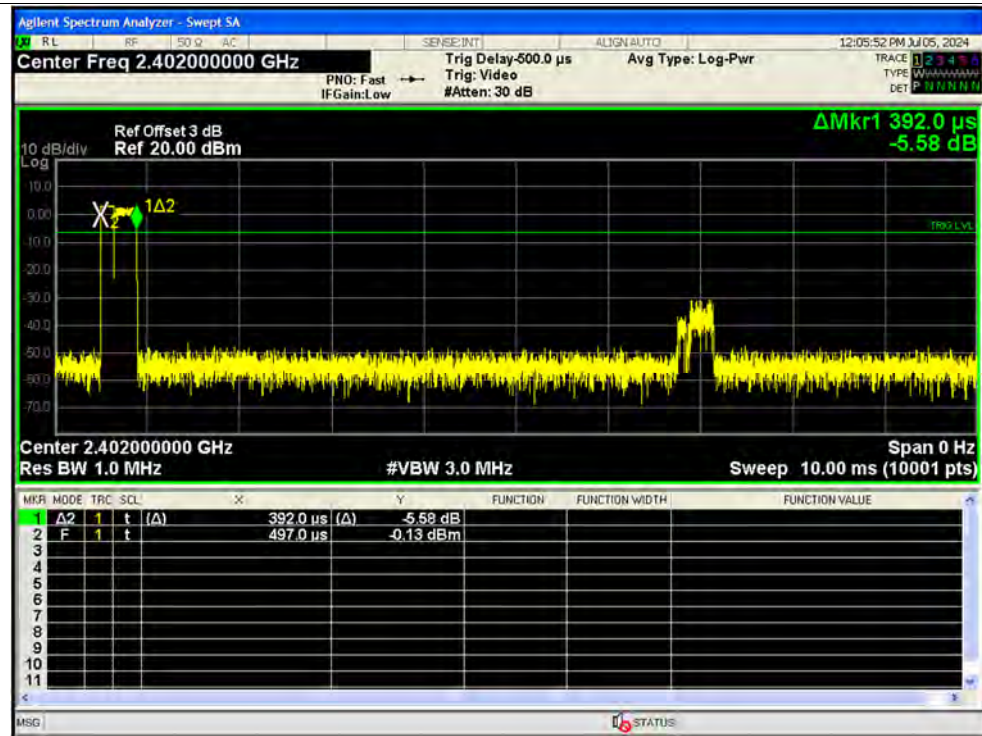


Dwell NVNT 2-DH1 2402MHz Ant1 Accumulated

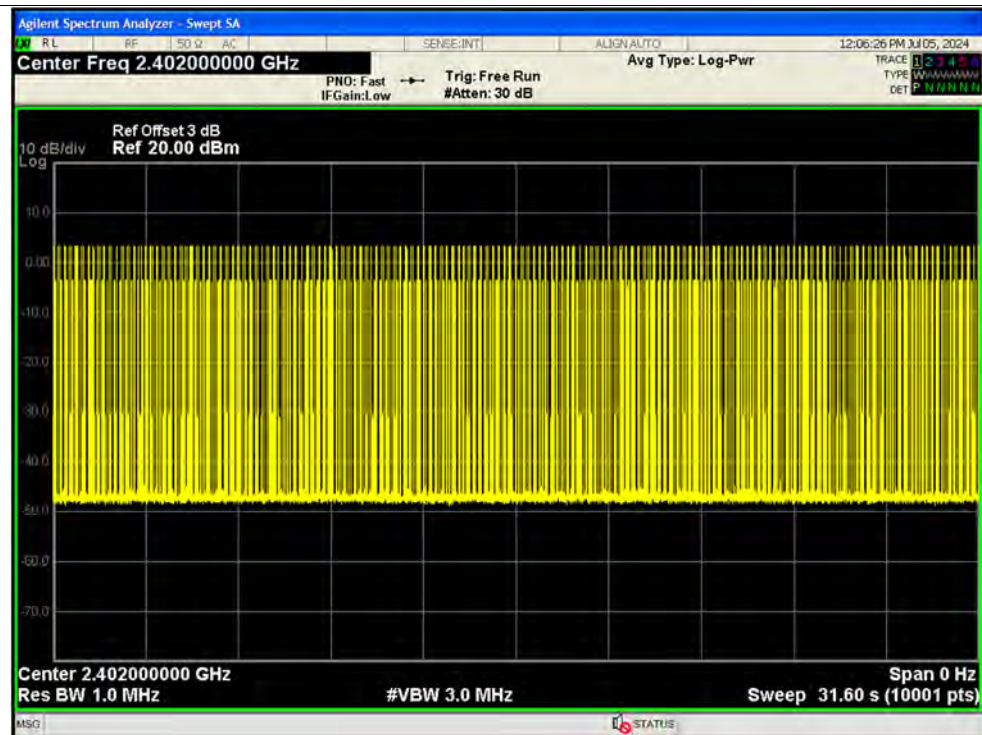




Dwell NVNT 2-DH3 2402MHz Ant1 One Burst

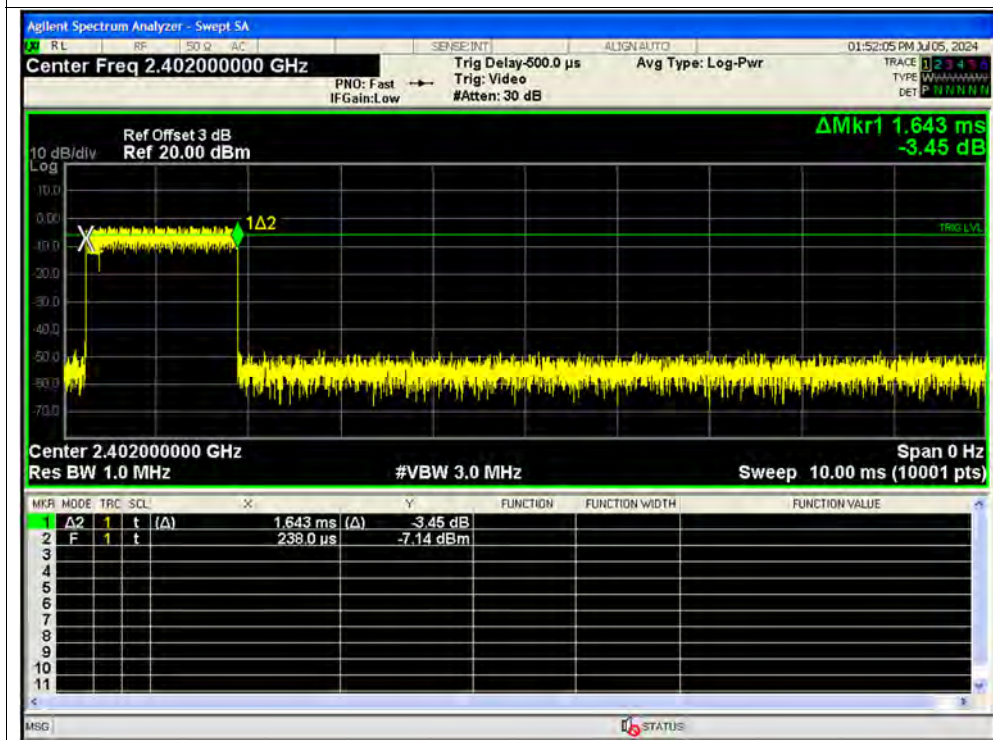

Dwell NVNT 2-DH3 2402MHz Ant1 Accumulated



Dwell NVNT 2-DH5 2402MHz Ant1 One Burst

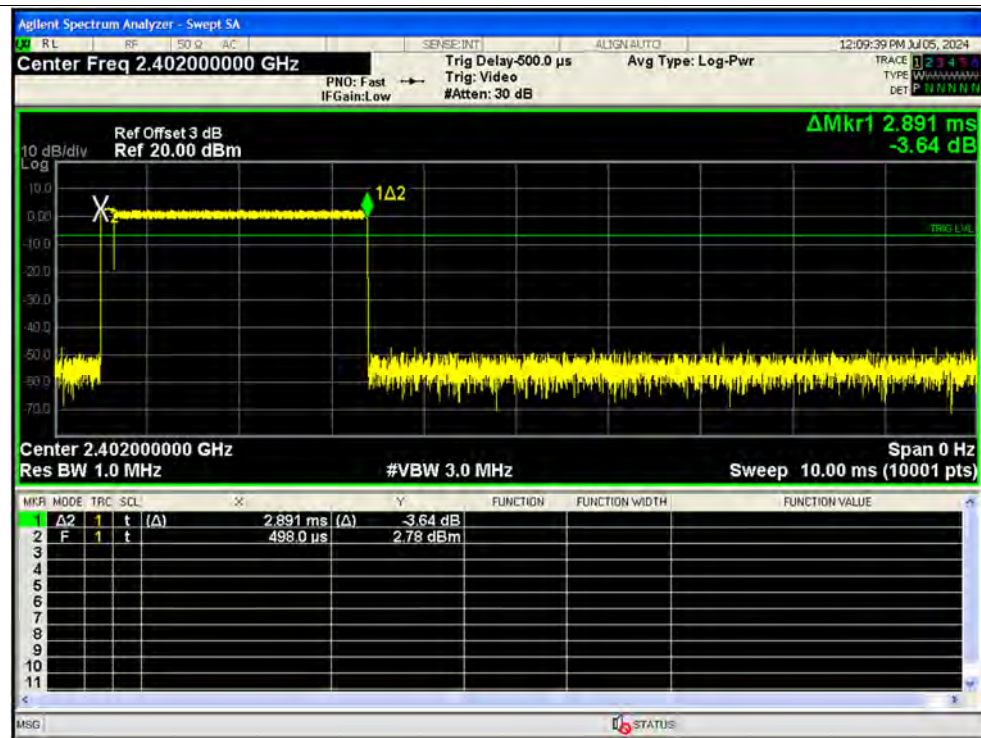


Dwell NVNT 2-DH5 2402MHz Ant1 Accumulated






Dwell NVNT 3-DH1 2402MHz Ant1 One Burst

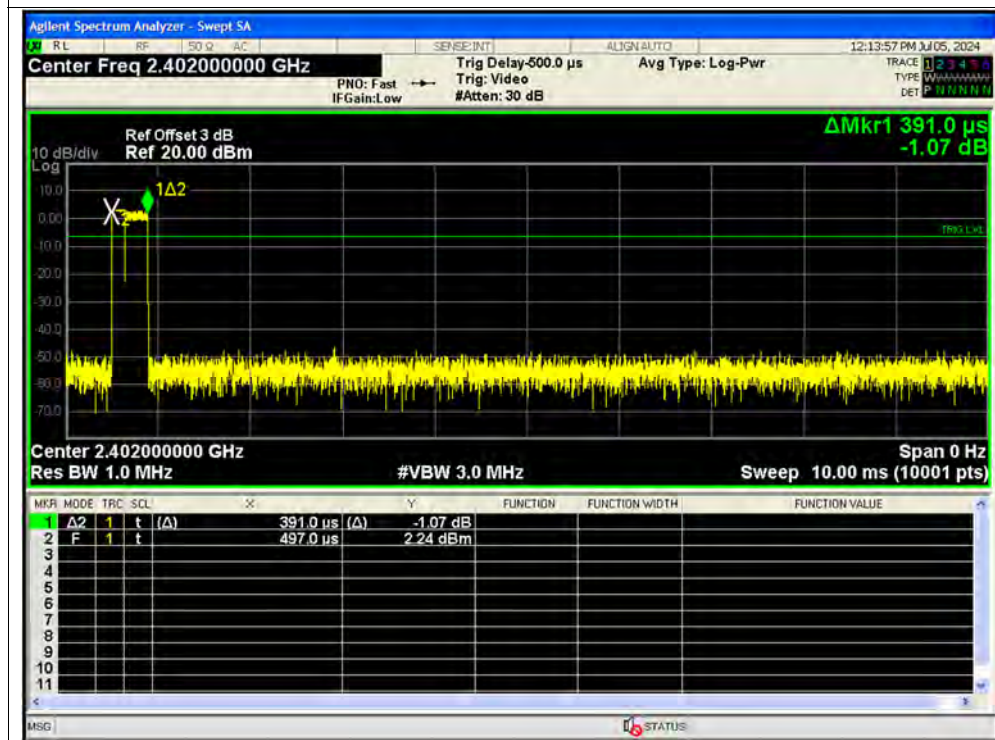


Dwell NVNT 3-DH1 2402MHz Ant1 Accumulated

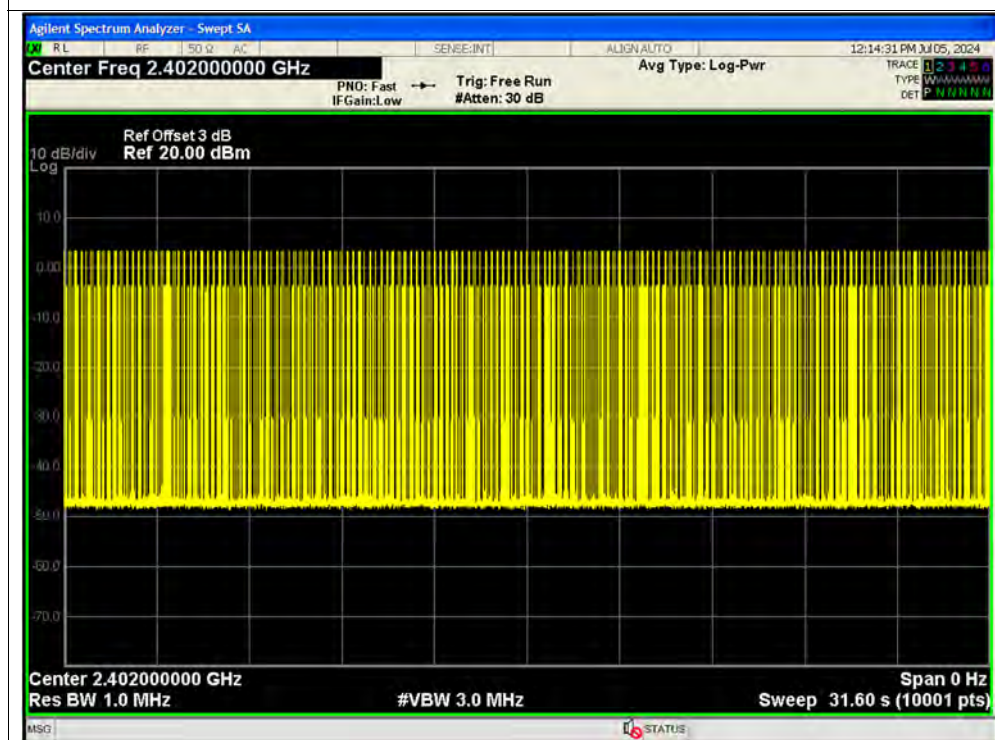




Dwell NVNT 3-DH3 2402MHz Ant1 One Burst

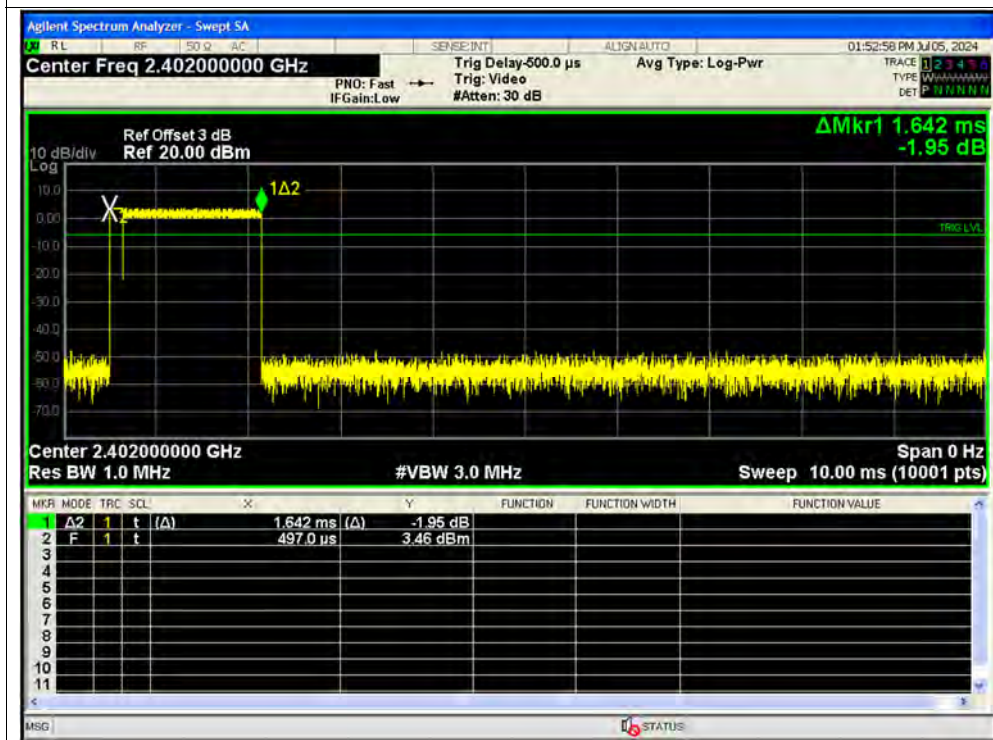


Dwell NVNT 3-DH3 2402MHz Ant1 Accumulated



Dwell NVNT 3-DH5 2402MHz Ant1 One Burst

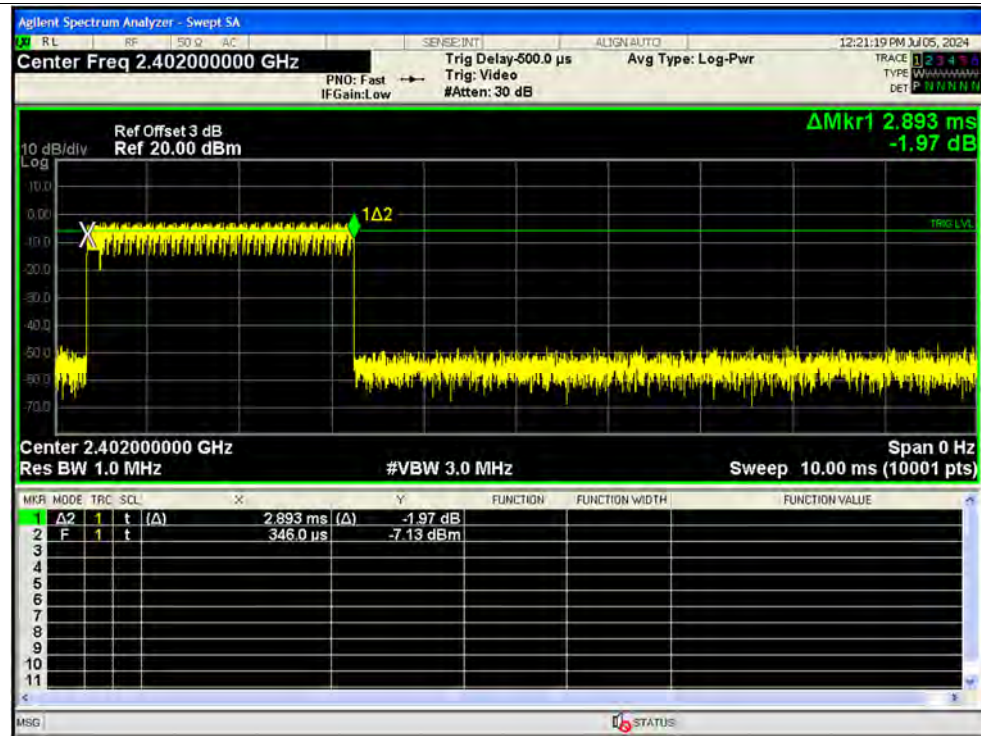

Dwell NVNT 3-DH5 2402MHz Ant1 Accumulated

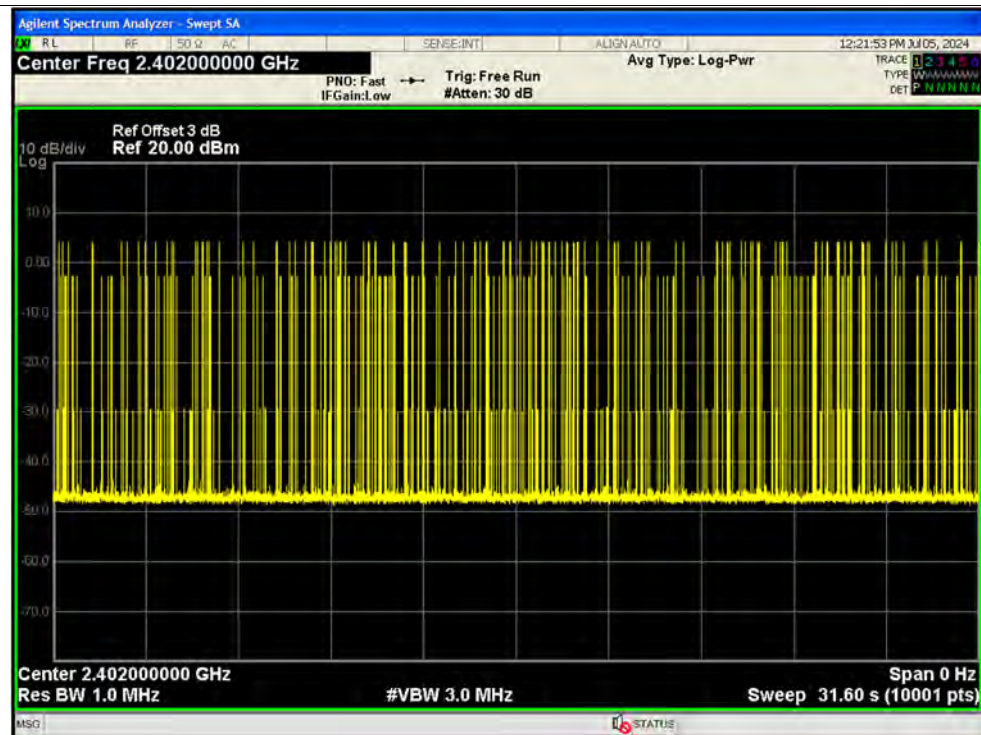

**A.8. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-40.03	-20	Pass
NVNT	1-DH5	2441	Ant1	-39.62	-20	Pass
NVNT	1-DH5	2480	Ant1	-39.49	-20	Pass
NVNT	2-DH5	2402	Ant1	-40.06	-20	Pass
NVNT	2-DH5	2441	Ant1	-40.02	-20	Pass
NVNT	2-DH5	2480	Ant1	-39.56	-20	Pass
NVNT	3-DH5	2402	Ant1	-39.78	-20	Pass
NVNT	3-DH5	2441	Ant1	-40.77	-20	Pass
NVNT	3-DH5	2480	Ant1	-40.02	-20	Pass

Test Graphs

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

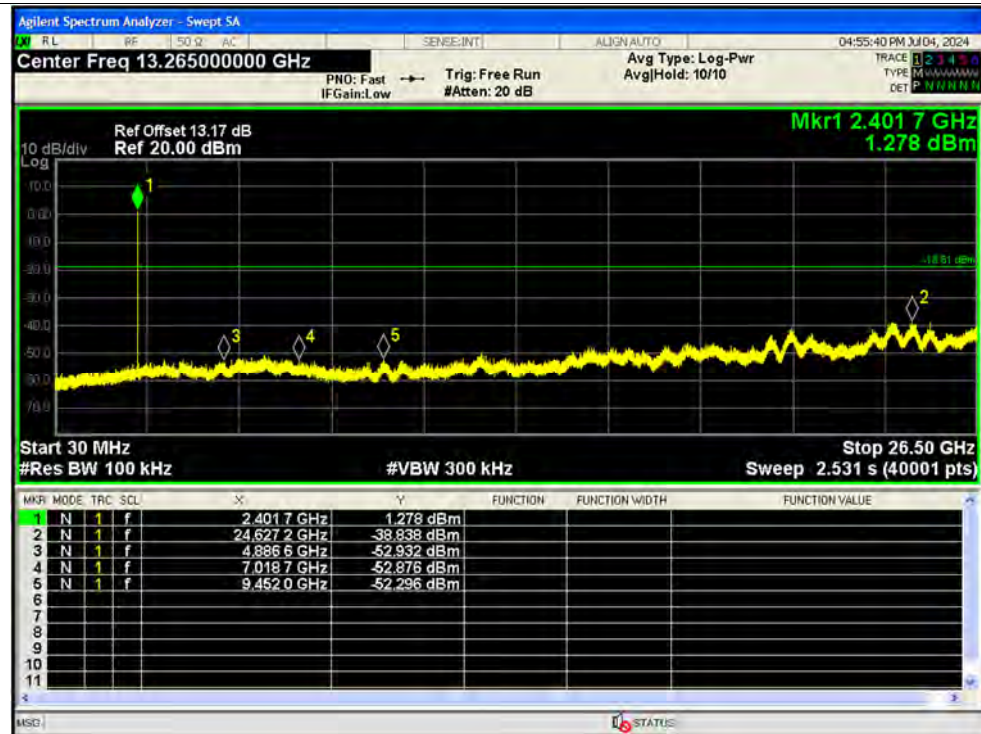

Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

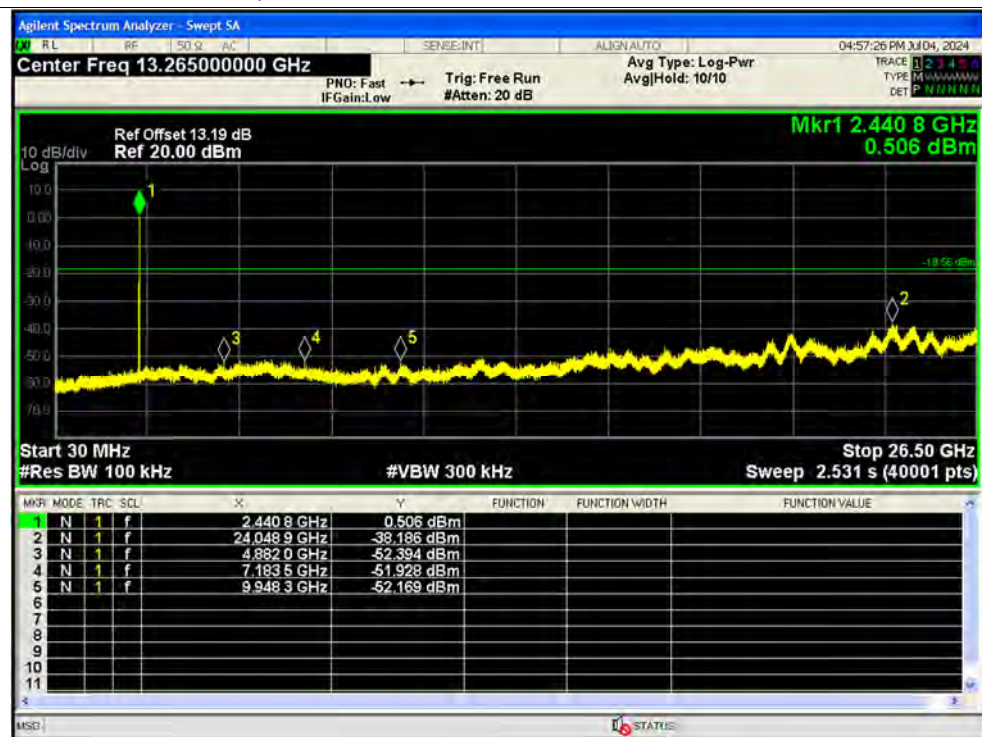

Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

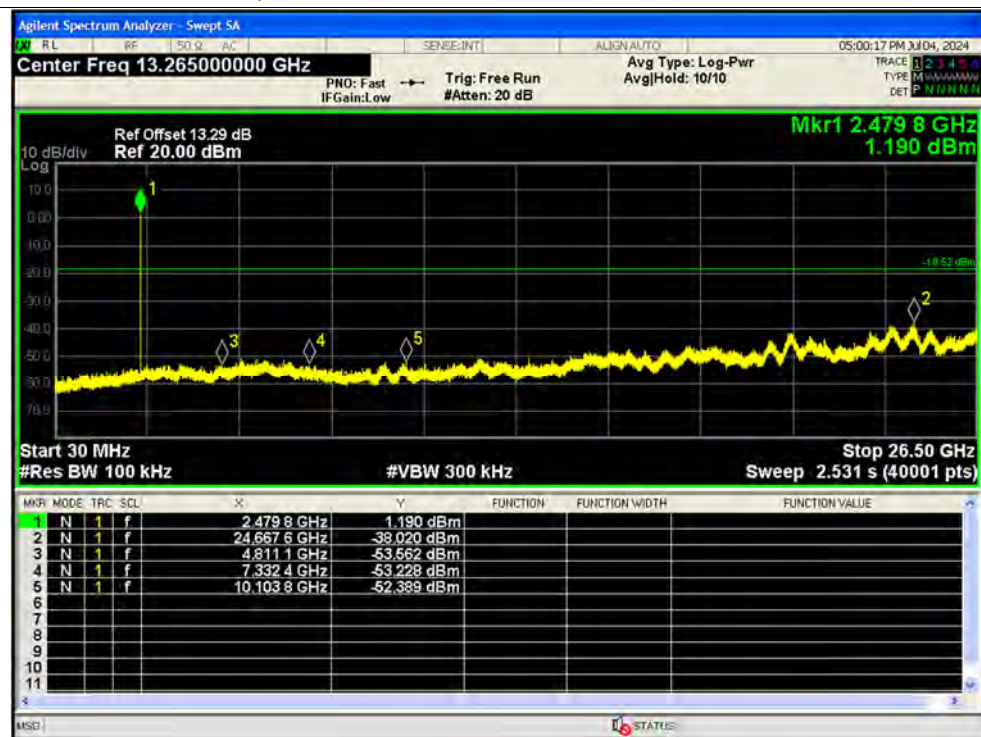

Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

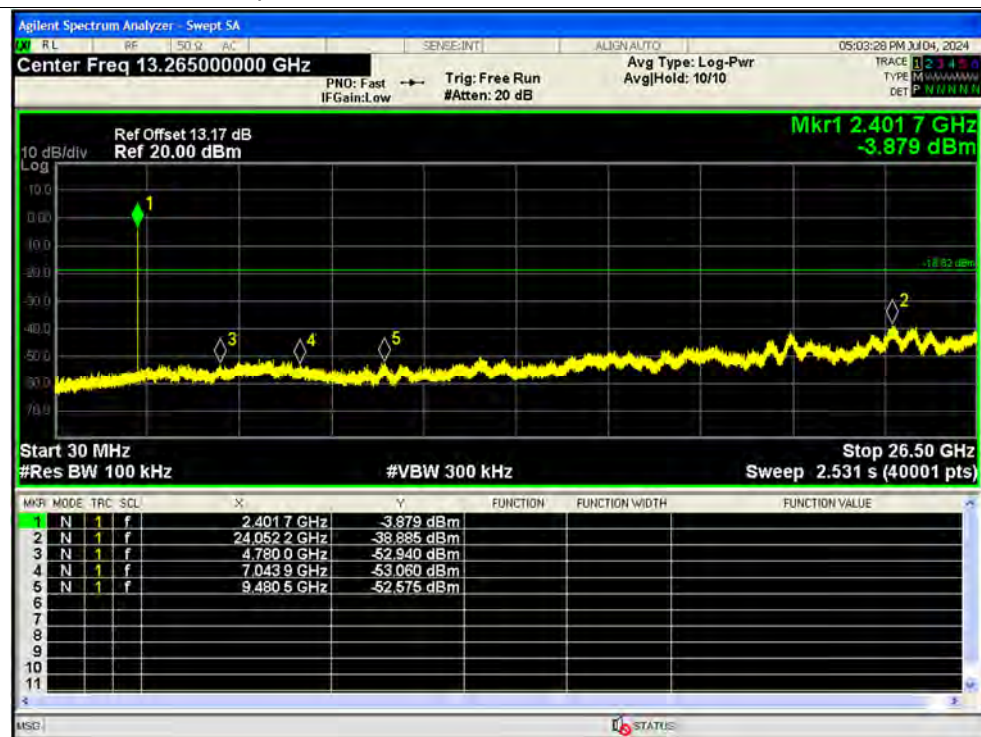

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

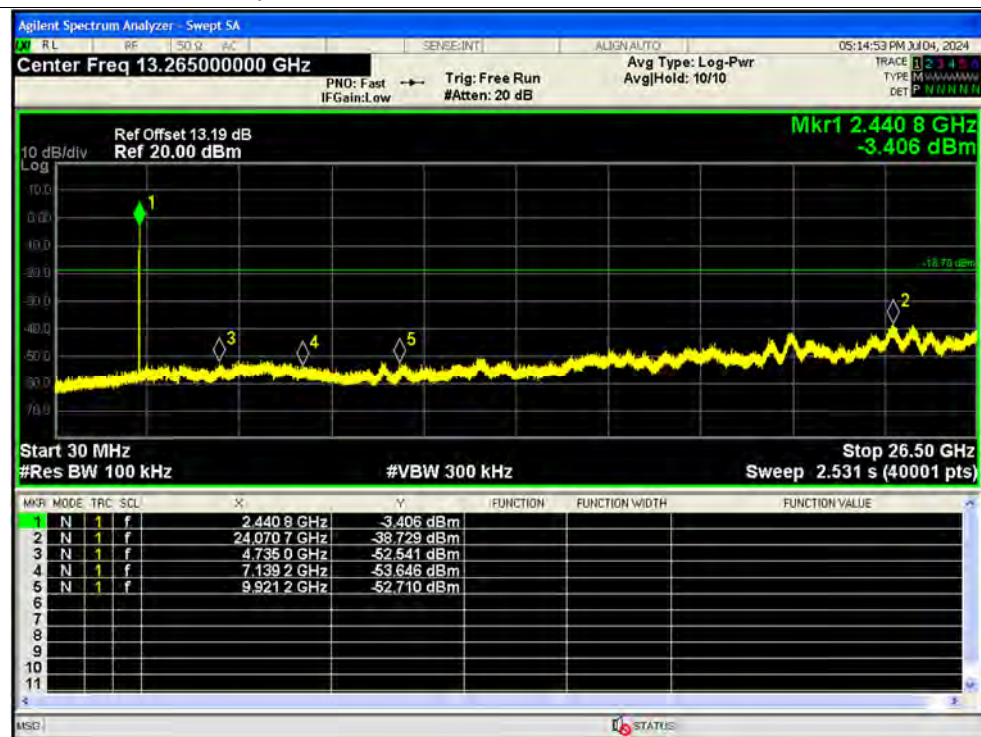

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref




Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

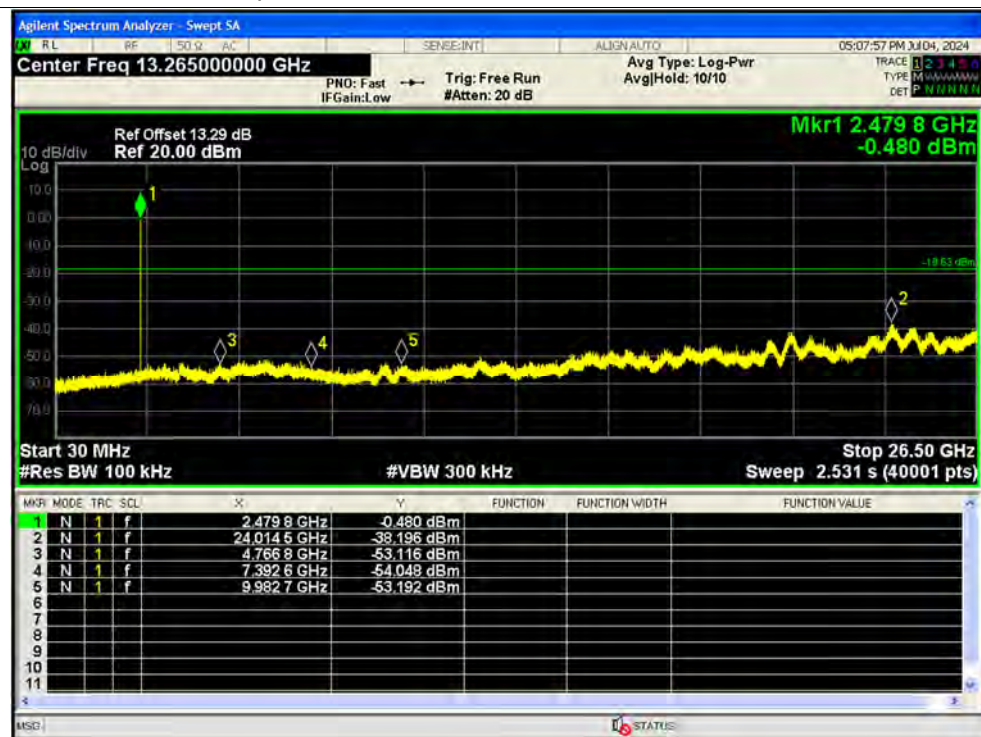

Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

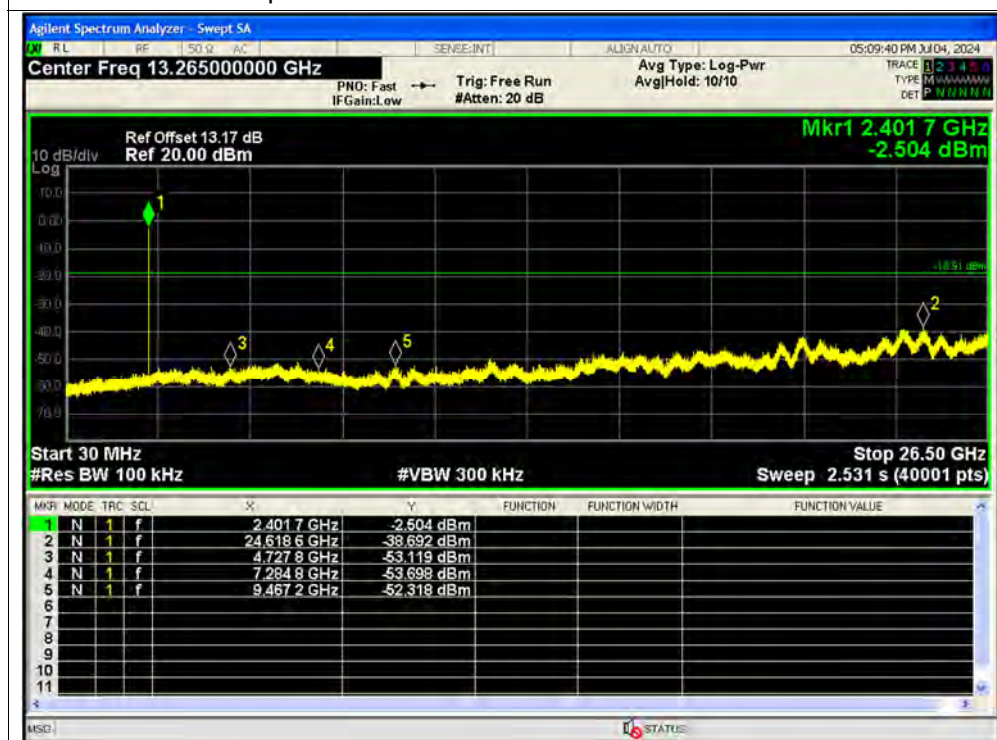

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref




Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

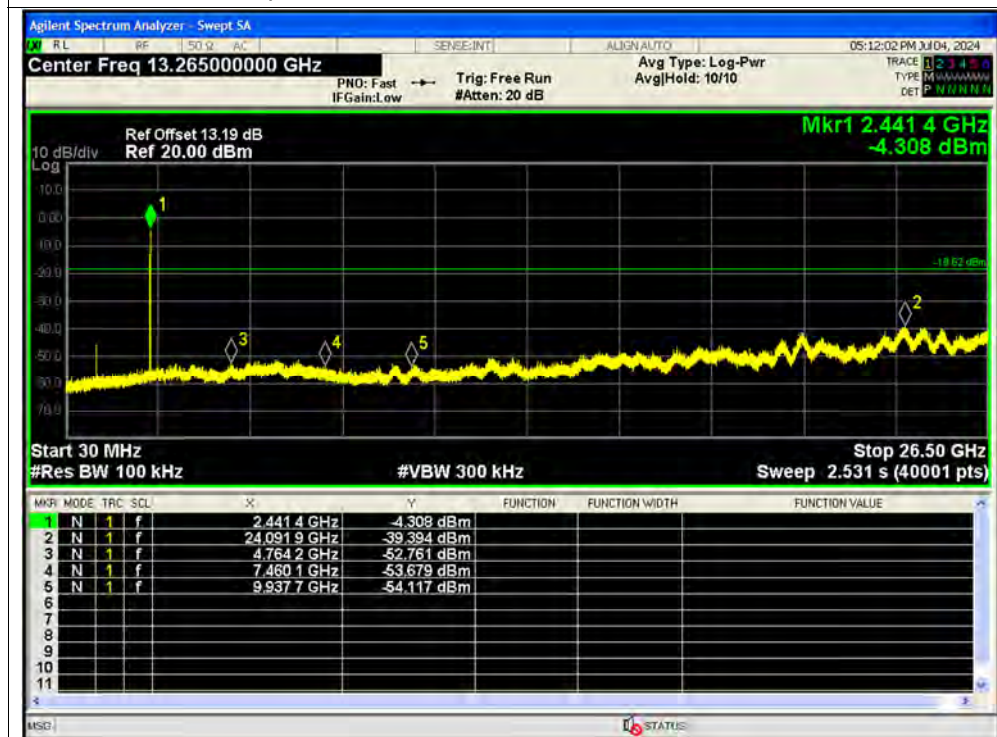

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref



Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

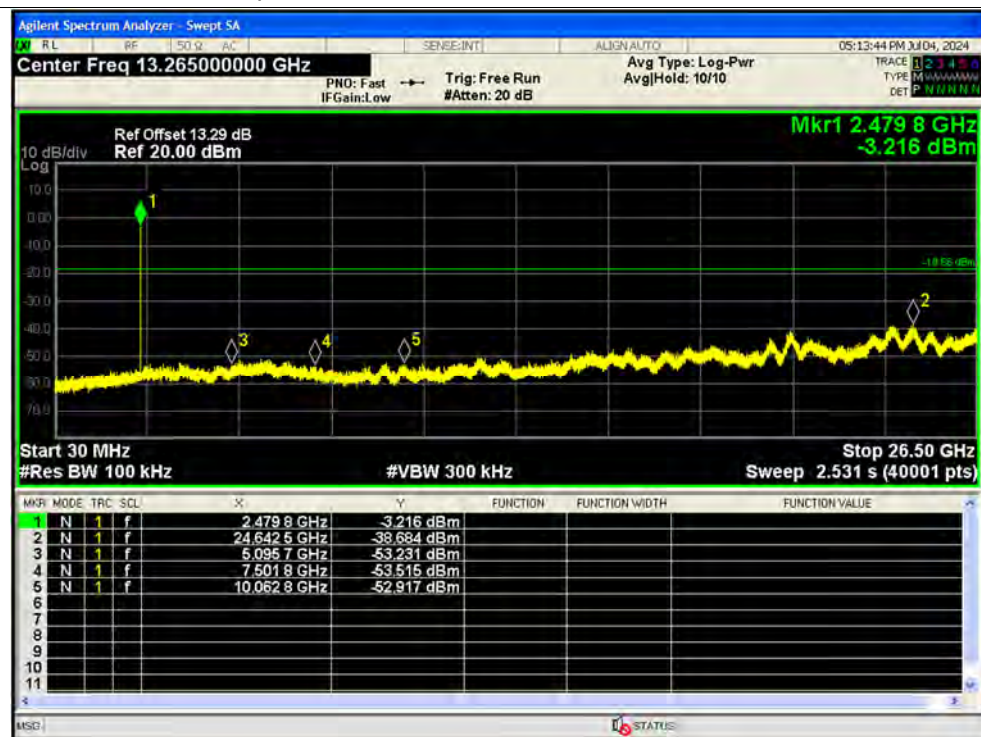


**A.9. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-46.91	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-47.27	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-46	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-45.75	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-42.52	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-47.26	-20	Pass
NVNT	1-DH5	2402	Ant1	Hopping	-55.11	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-55.41	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-57.57	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-57.34	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-58.76	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-59.28	-20	Pass

Test Graphs


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

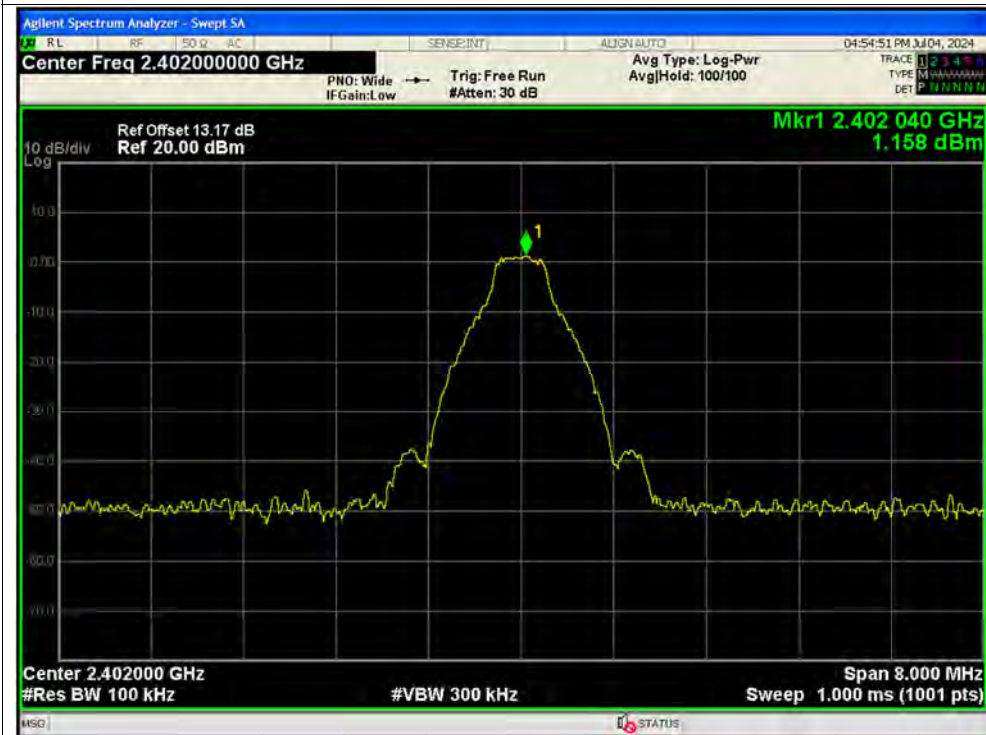


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

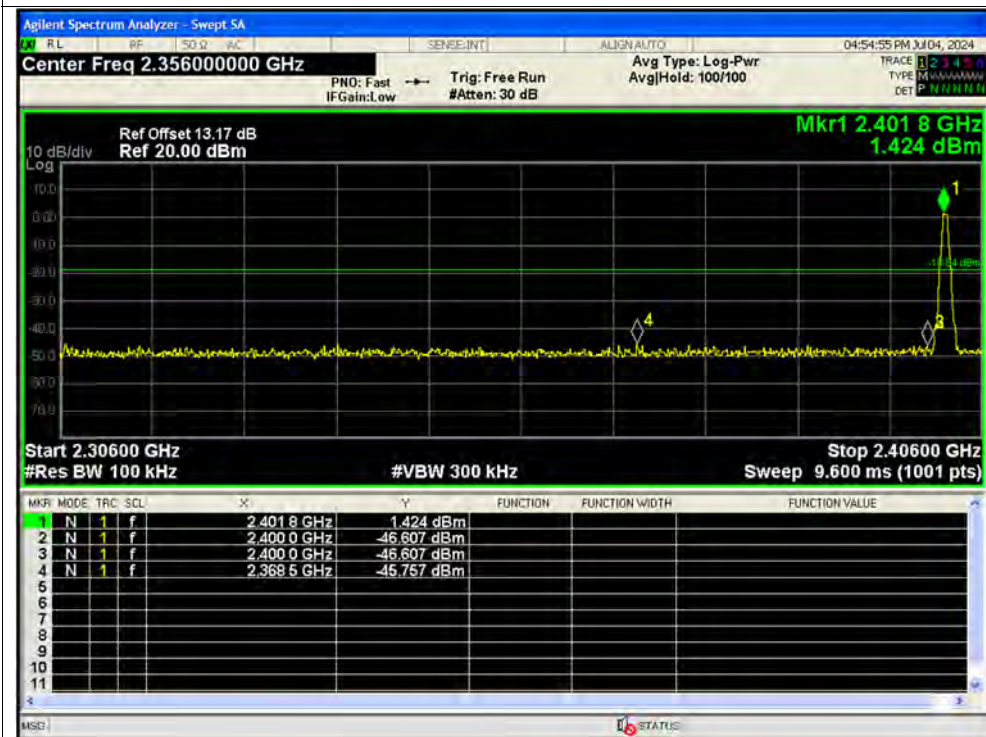


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

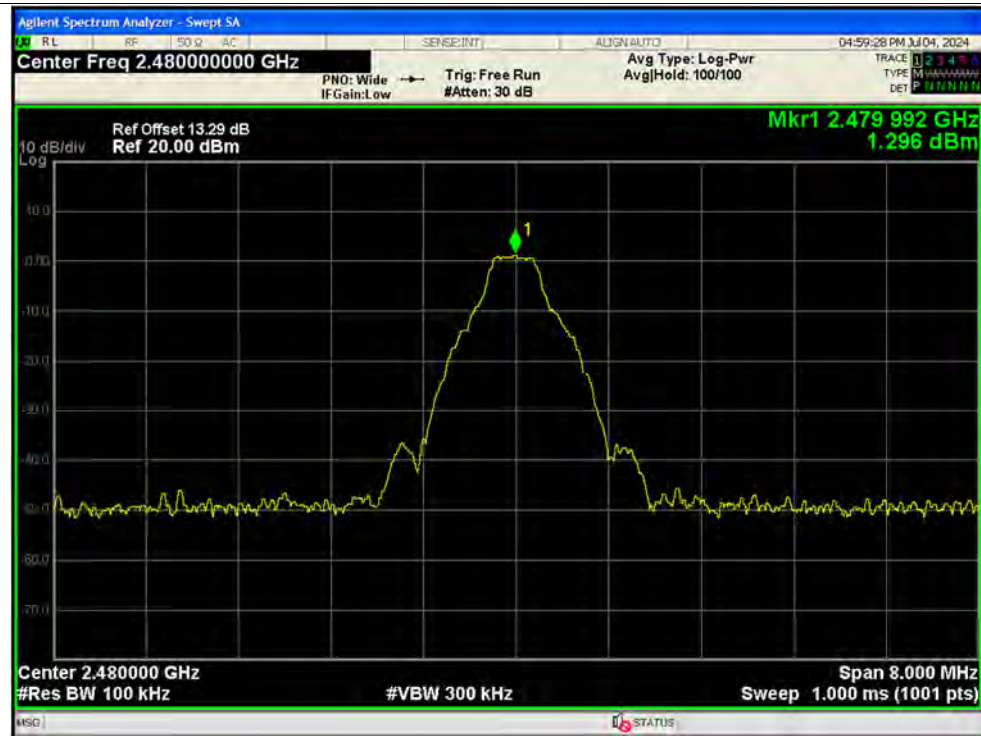


Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

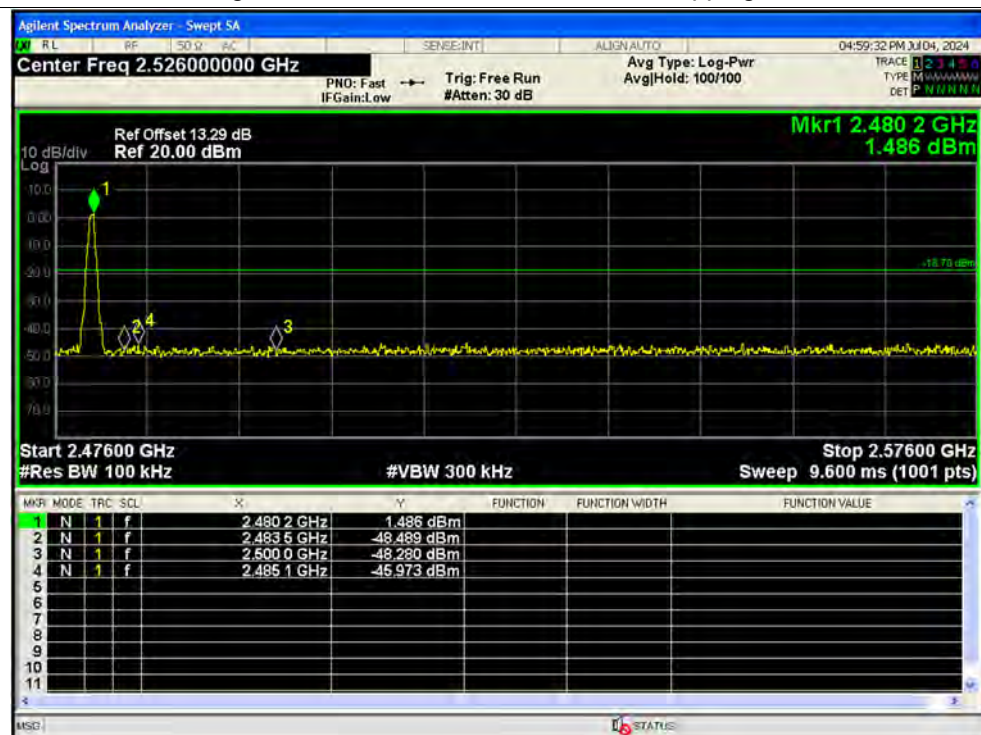


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

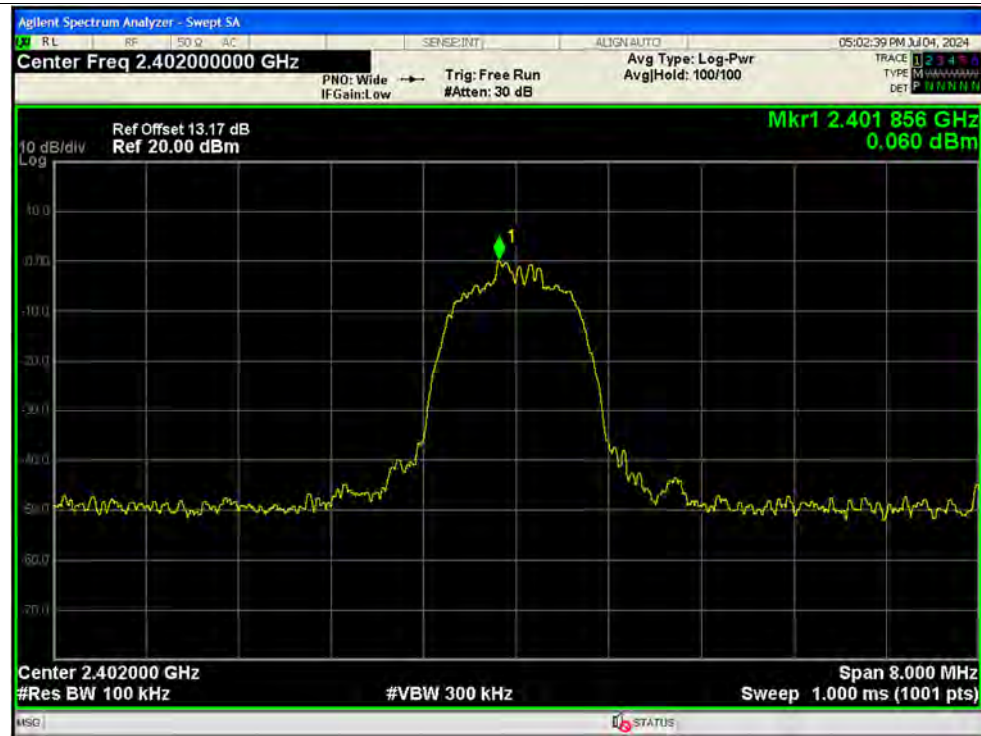


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission

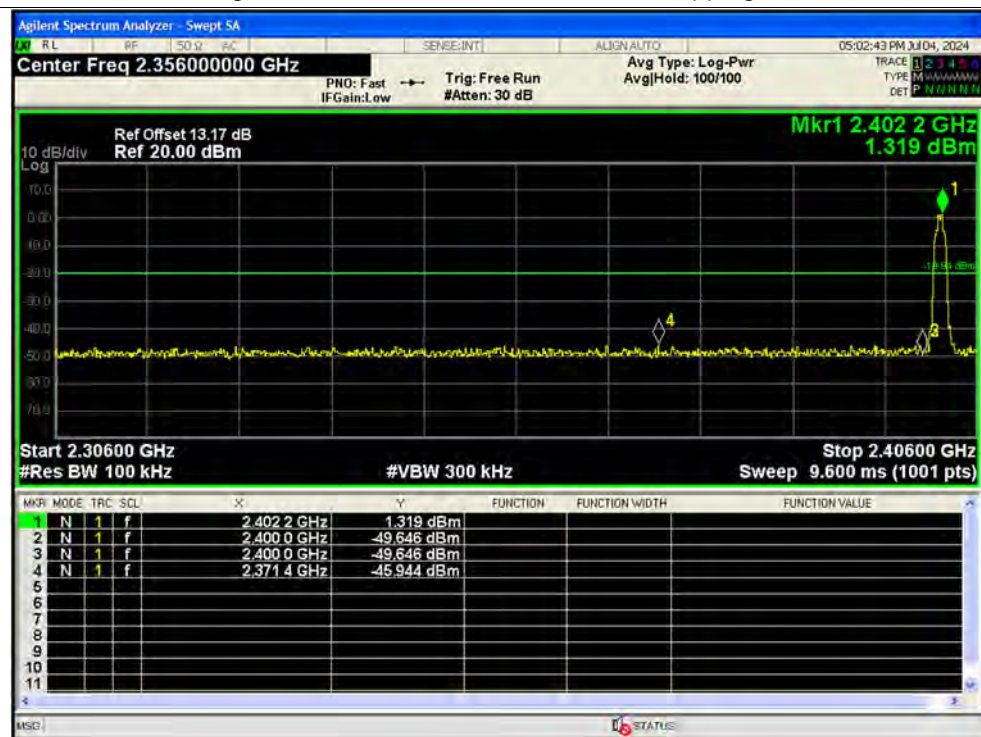


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

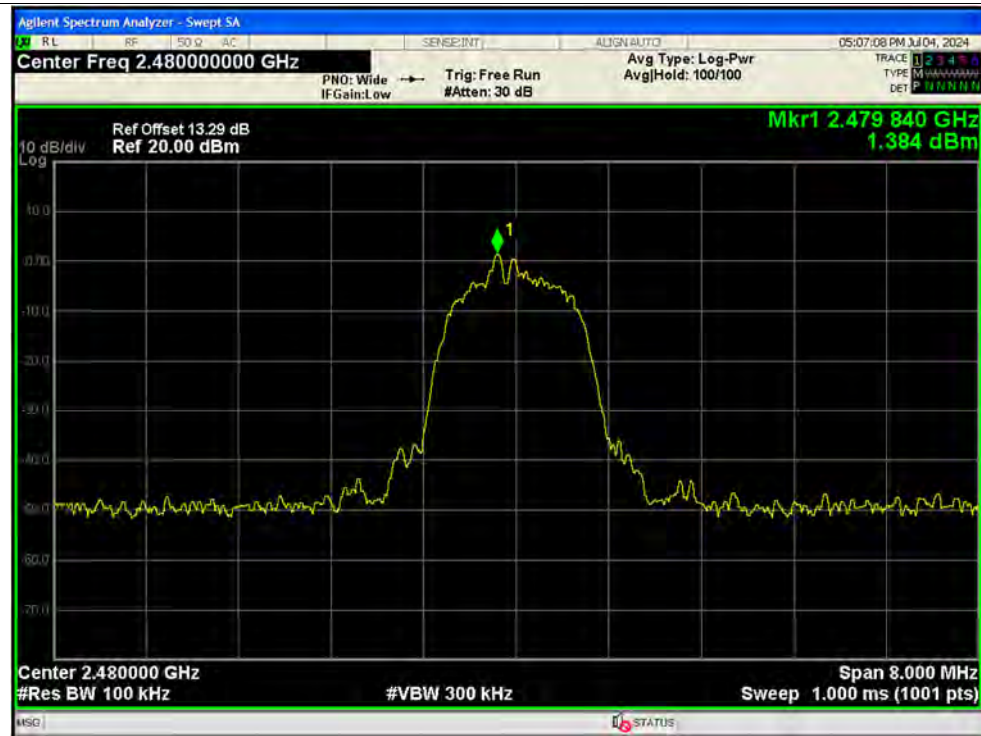


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

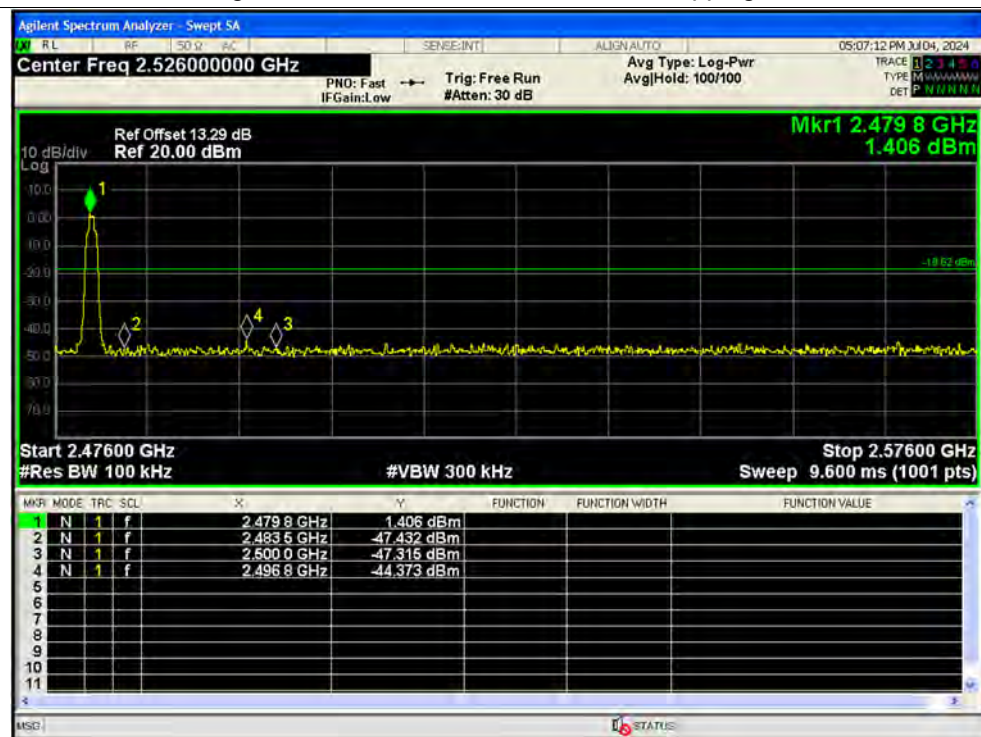


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

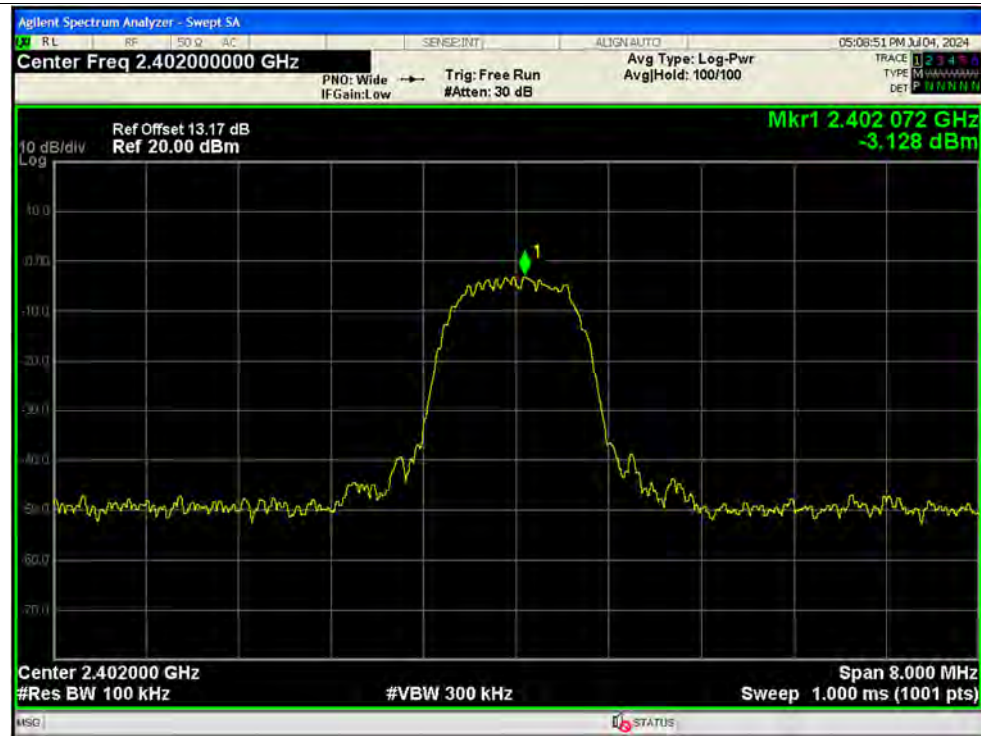


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

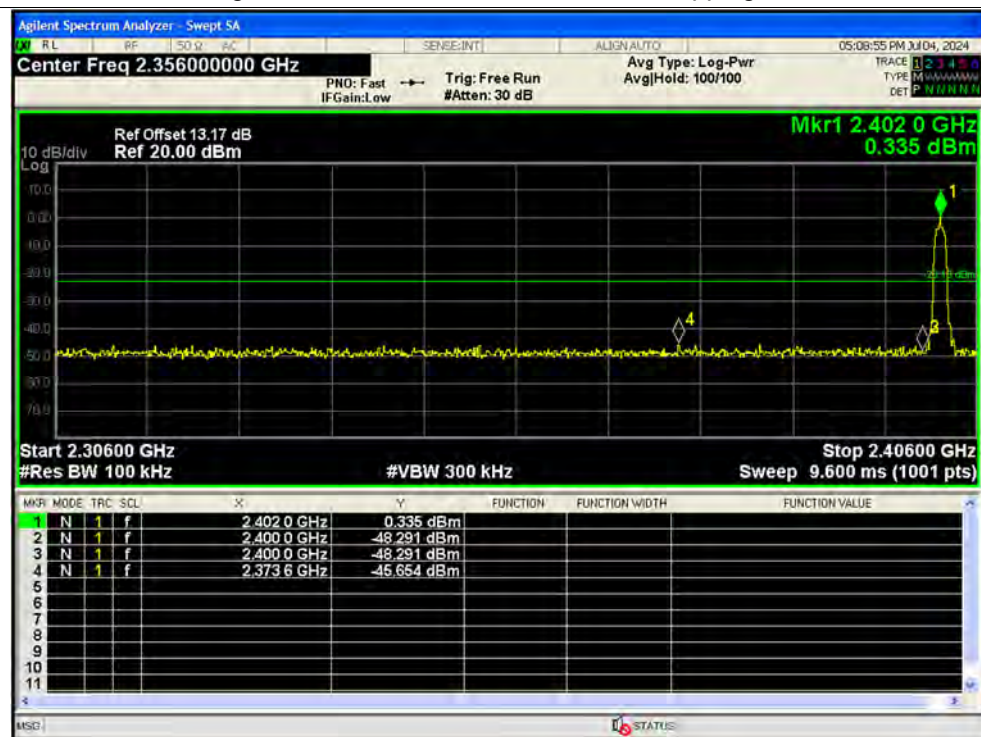

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

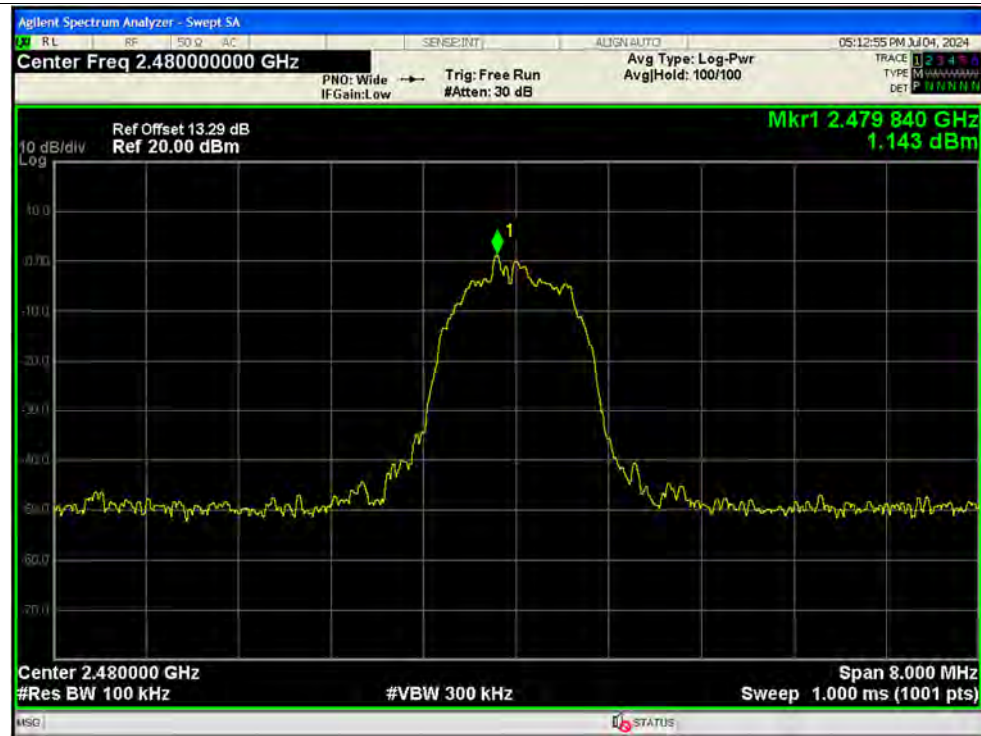

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

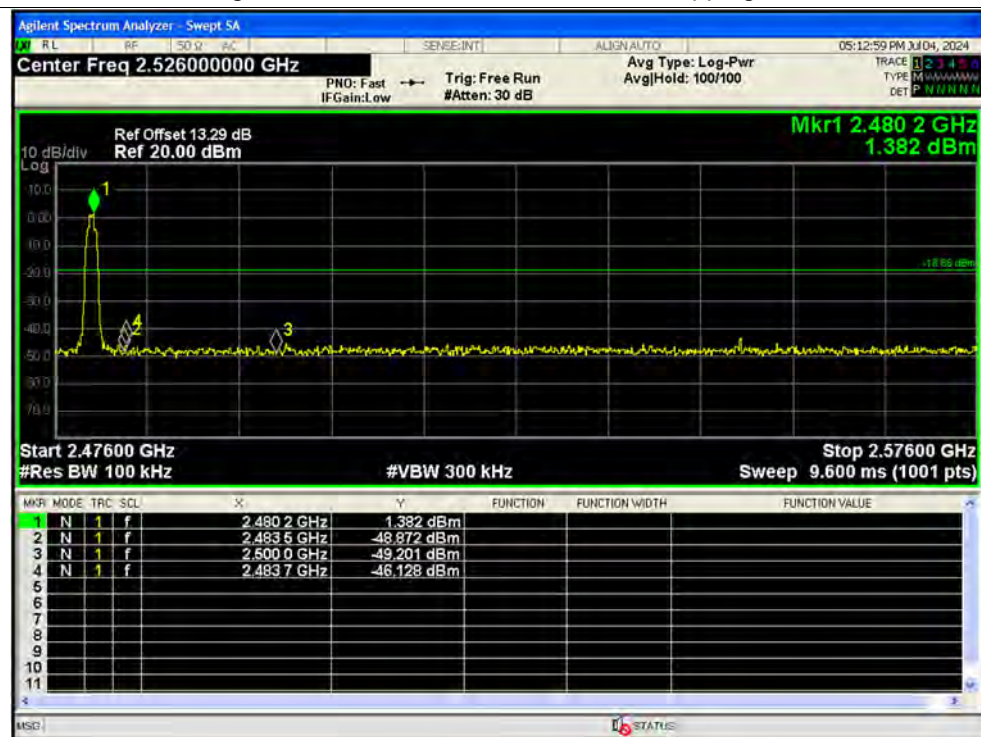




Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

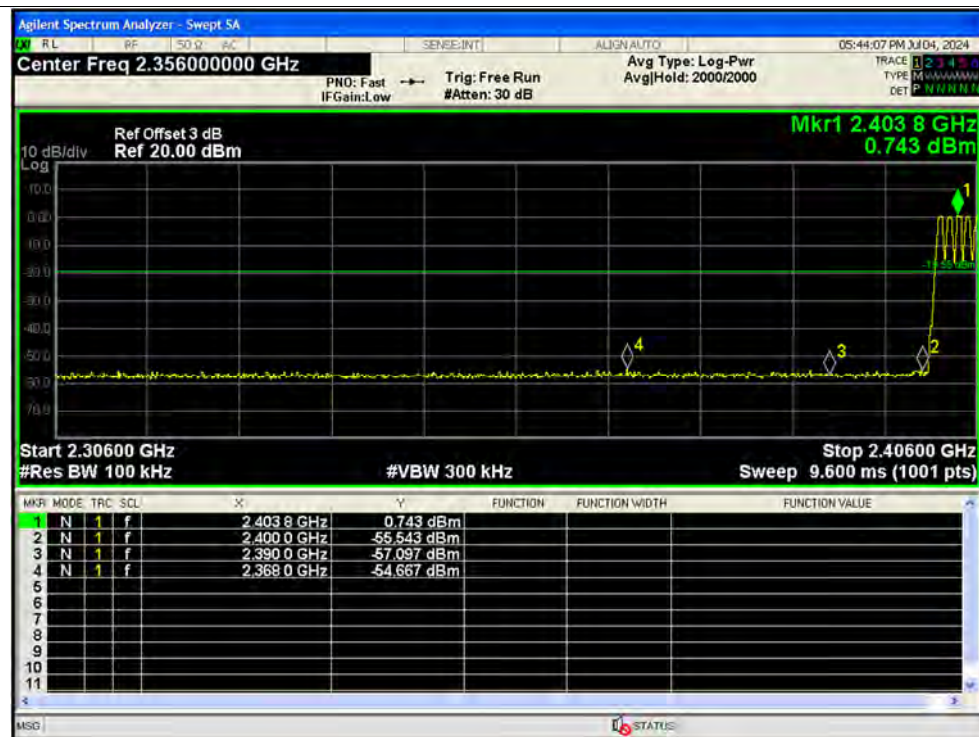




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission

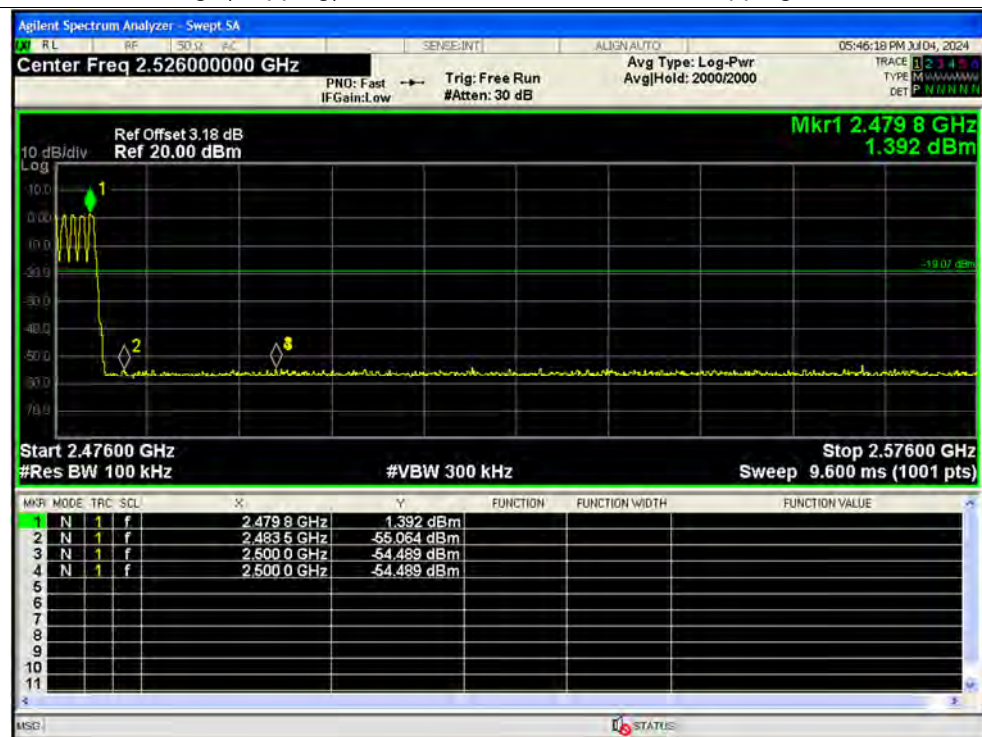

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission

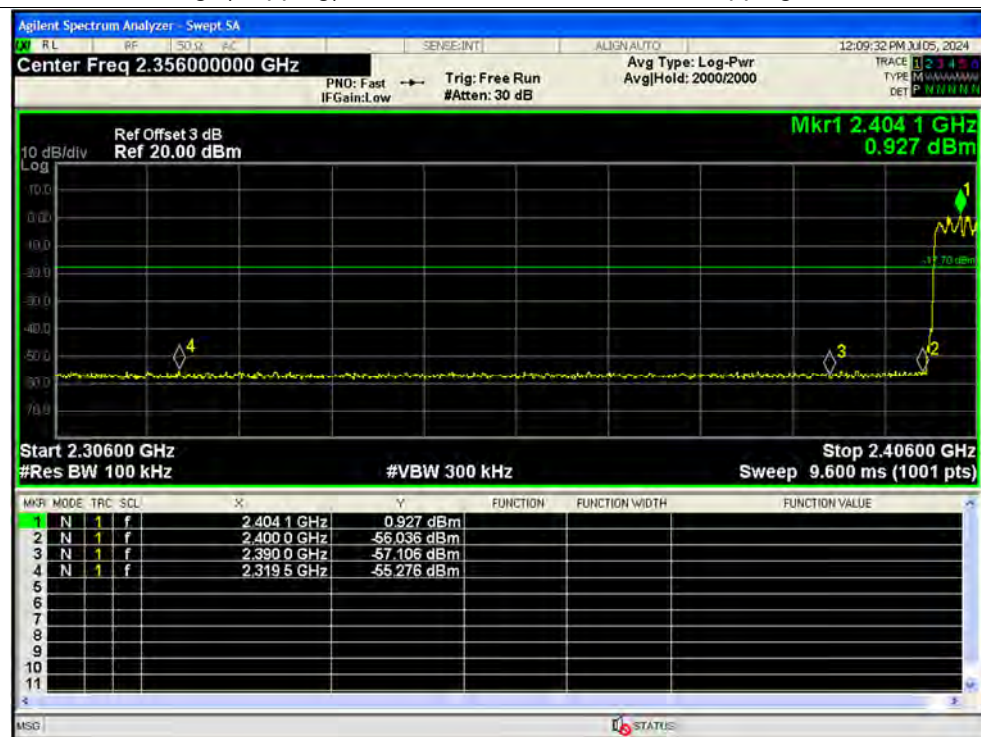




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission

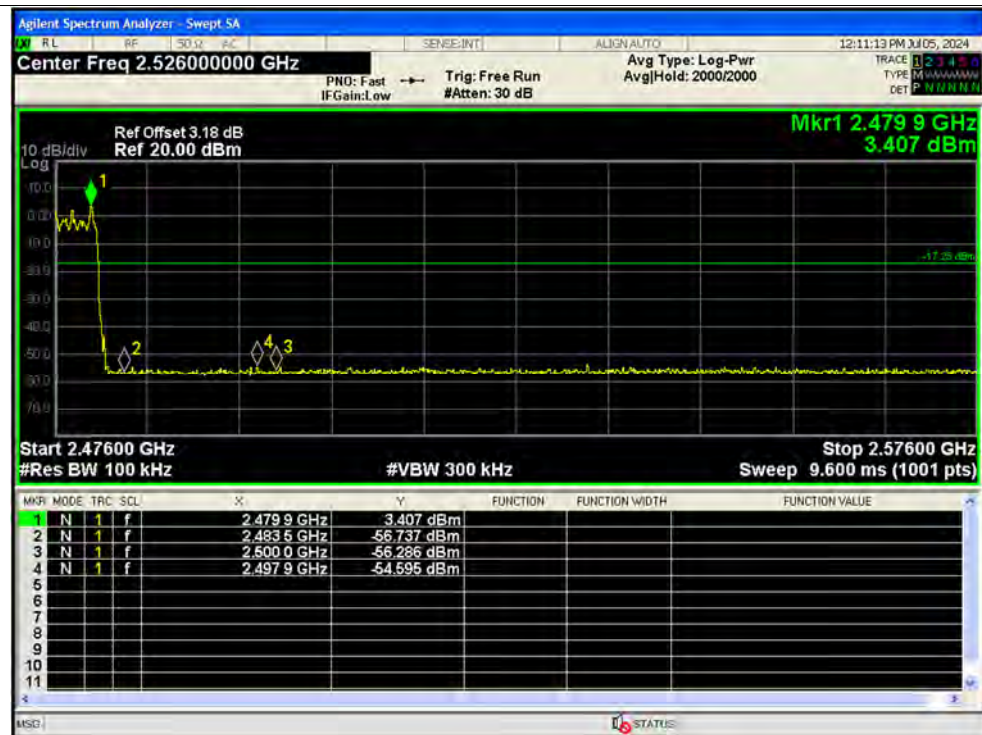

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission

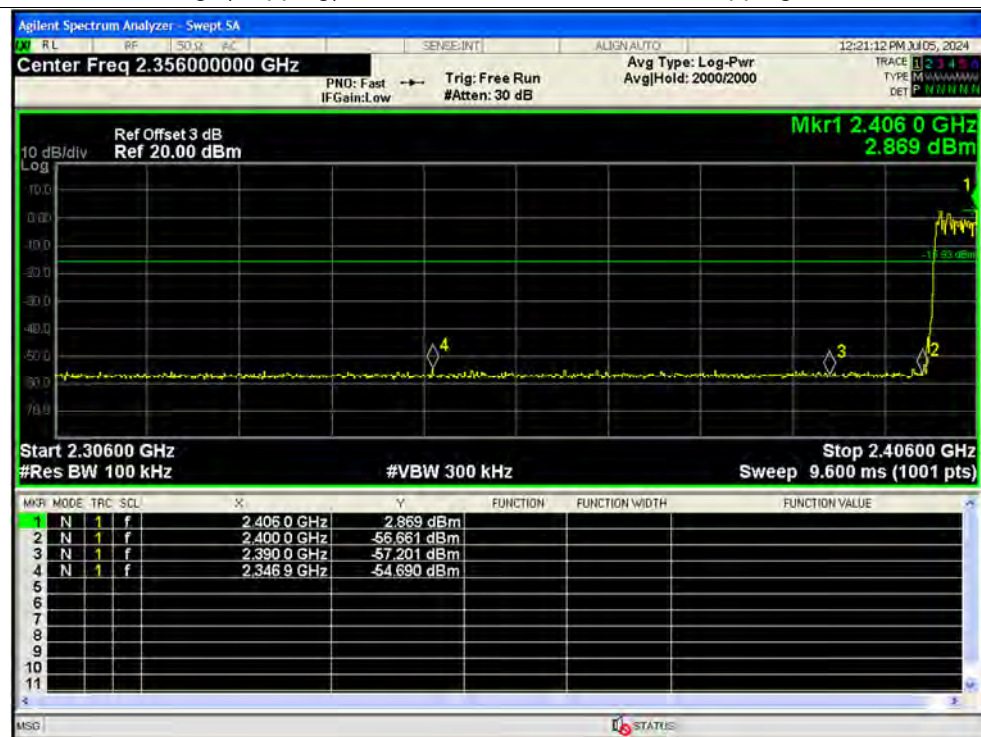

Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission

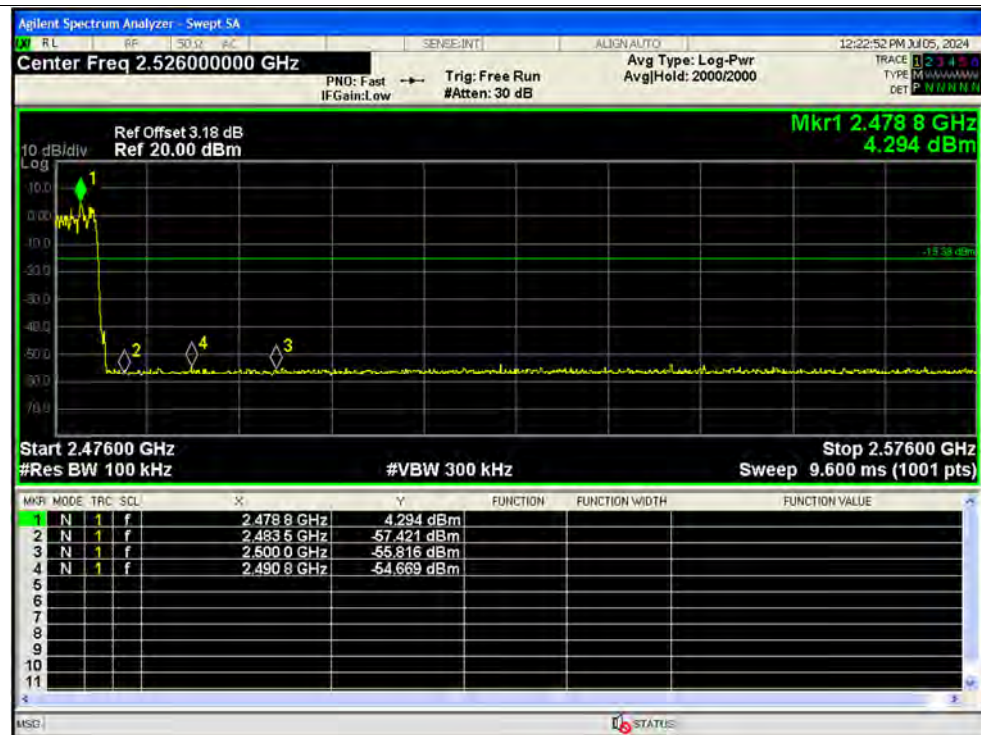

**A.10. Restricted Frequency Bands**

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

GFSK Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2378.83	PK	22.19	6.74	27.20	56.13	74	PASS
0	2389.23	AV	-0.16	6.74	27.20	33.78	54	PASS
78	2488.05	PK	22.10	6.74	27.20	56.04	74	PASS
78	2483.92	AV	-1.32	6.74	27.20	32.62	54	PASS

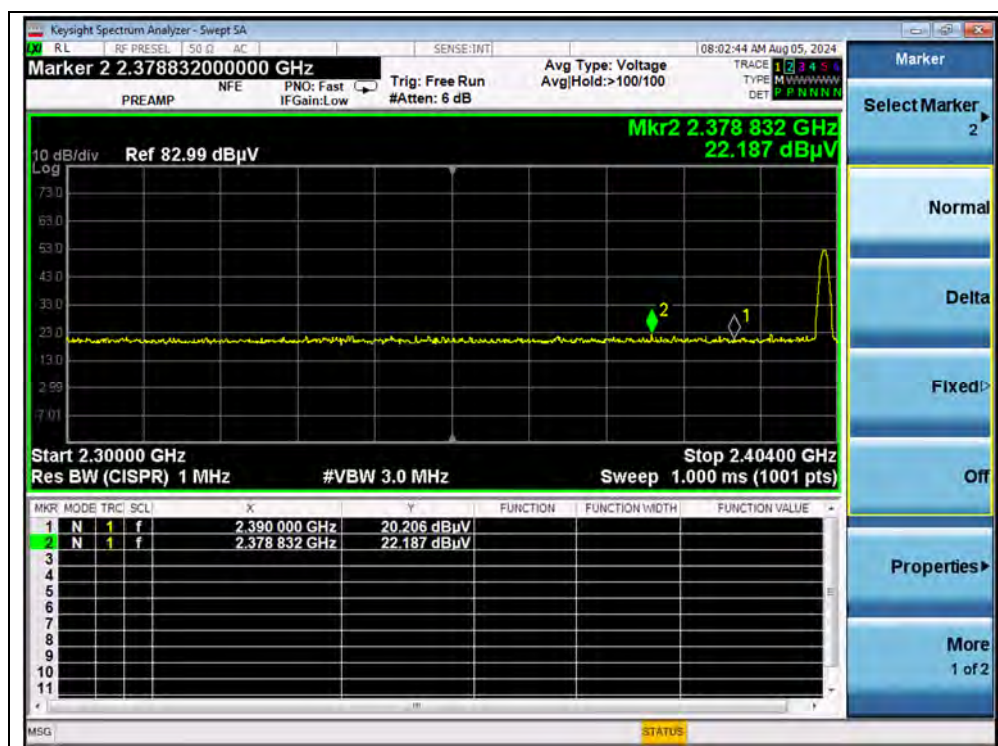

(PEAK, Channel 0, GFSK)

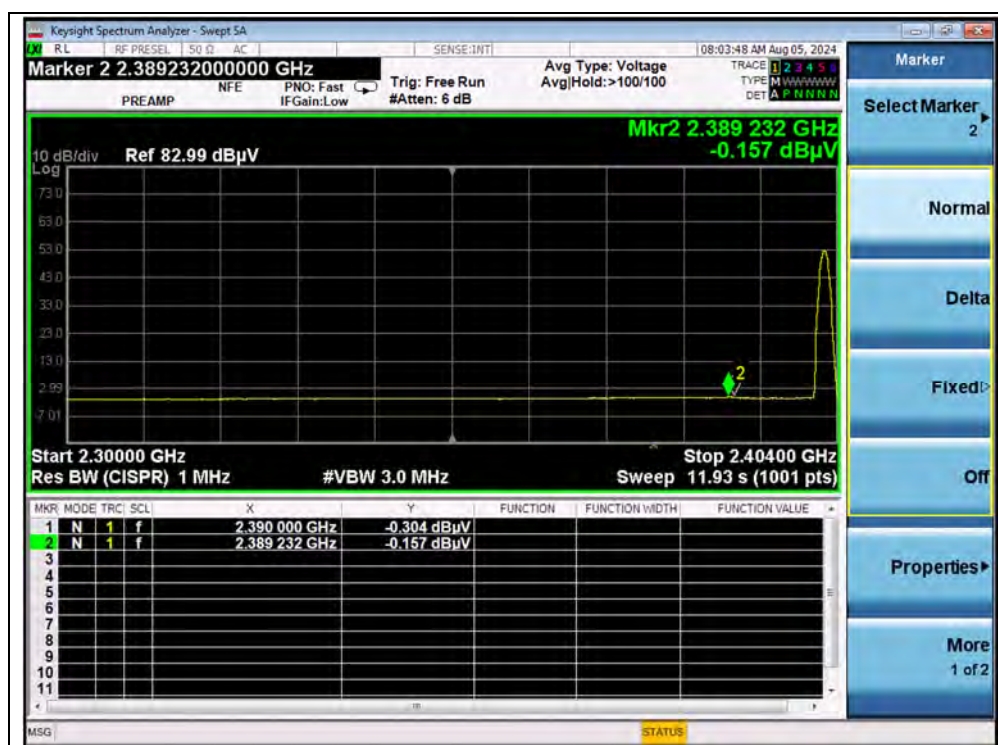

(AVERAGE, Channel 0, GFSK)

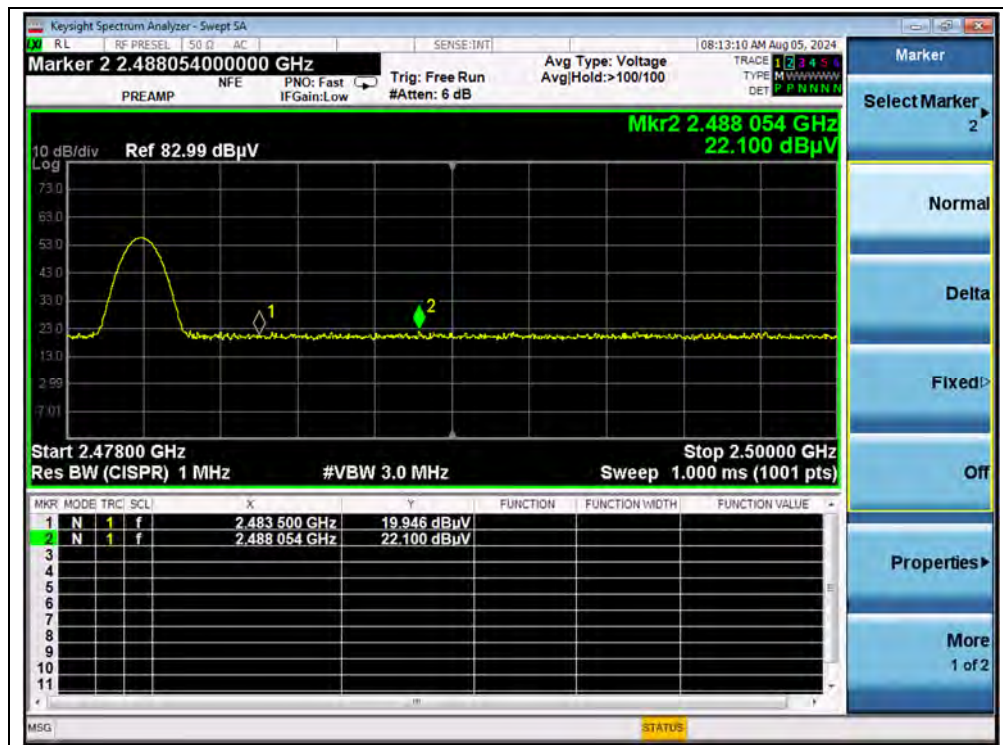

(PEAK, Channel 78, GFSK)




(AVERAGE, Channel 78, GFSK)




$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2315.91	PK	22.28	6.74	27.20	56.22	74	PASS
0	2389.65	AV	0.02	6.74	27.20	33.96	54	PASS
78	2484.40	PK	21.95	6.74	27.20	55.89	74	PASS
78	2483.50	AV	-1.25	6.74	27.20	32.69	54	PASS

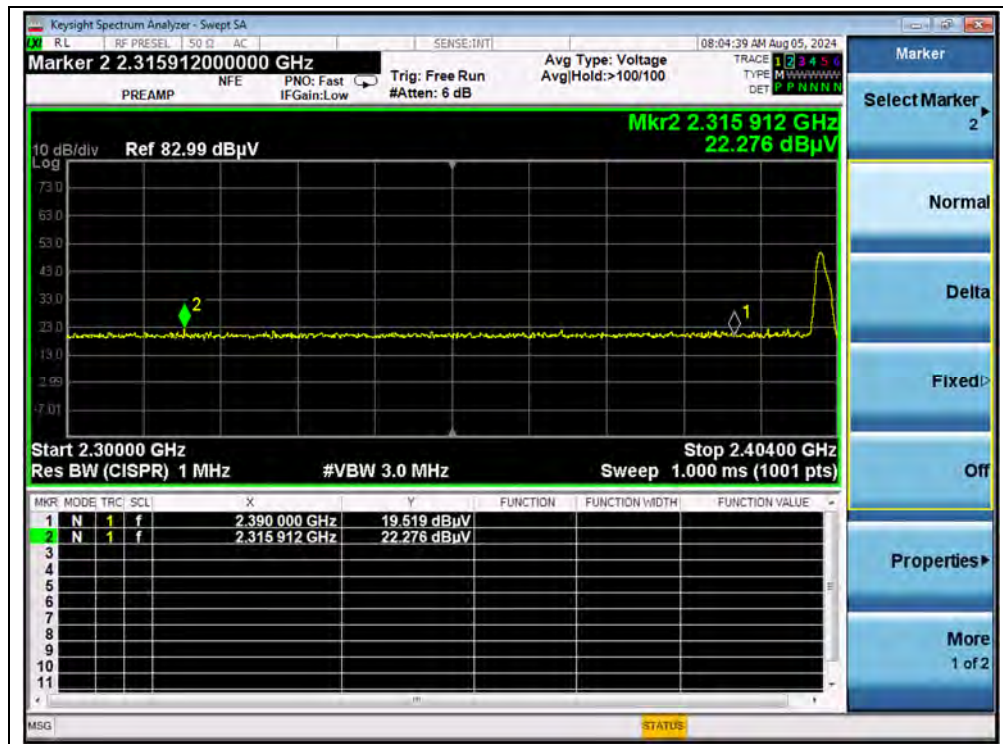

(PEAK, Channel 0, $\pi/4$ -DQPSK)

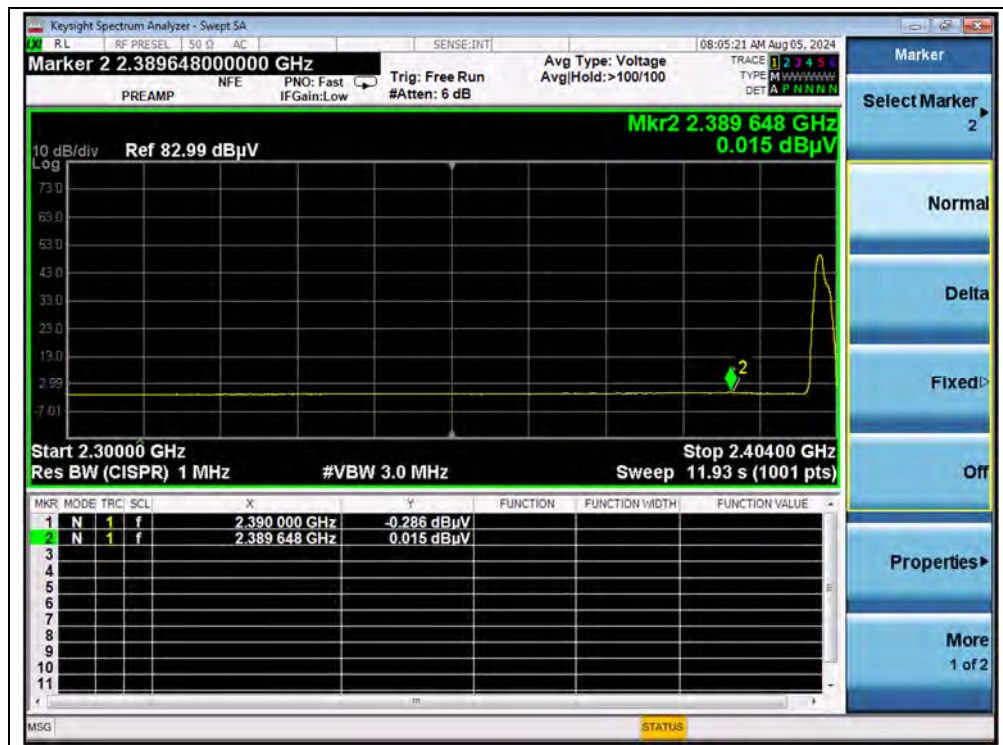
(AVERAGE, Channel 0, $\pi/4$ -DQPSK)


(PEAK, Channel 78, $\pi/4$ -DQPSK)

(AVERAGE, Channel 78, $\pi/4$ -DQPSK)




8-DPSK Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2374.88	PK	22.13	6.74	27.20	56.07	74	PASS
0	2389.44	AV	-0.04	6.74	27.20	33.90	54	PASS
78	2484.36	PK	21.41	6.74	27.20	55.35	74	PASS
78	2484.12	AV	-1.35	6.74	27.20	32.59	54	PASS

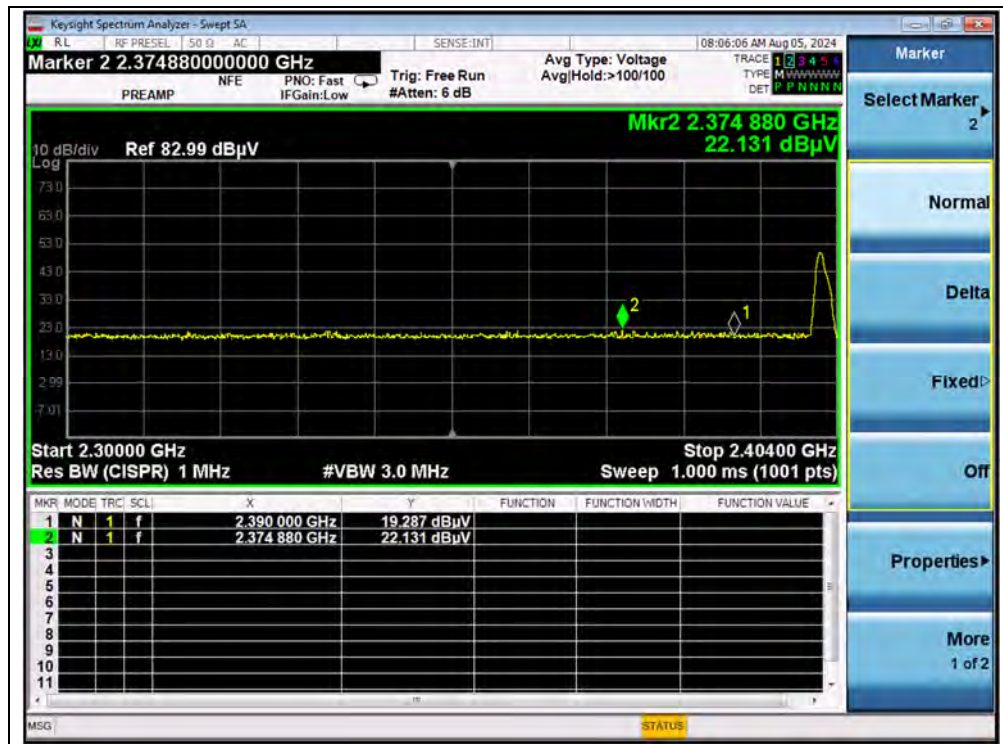

(PEAK, Channel 0, 8-DPSK)

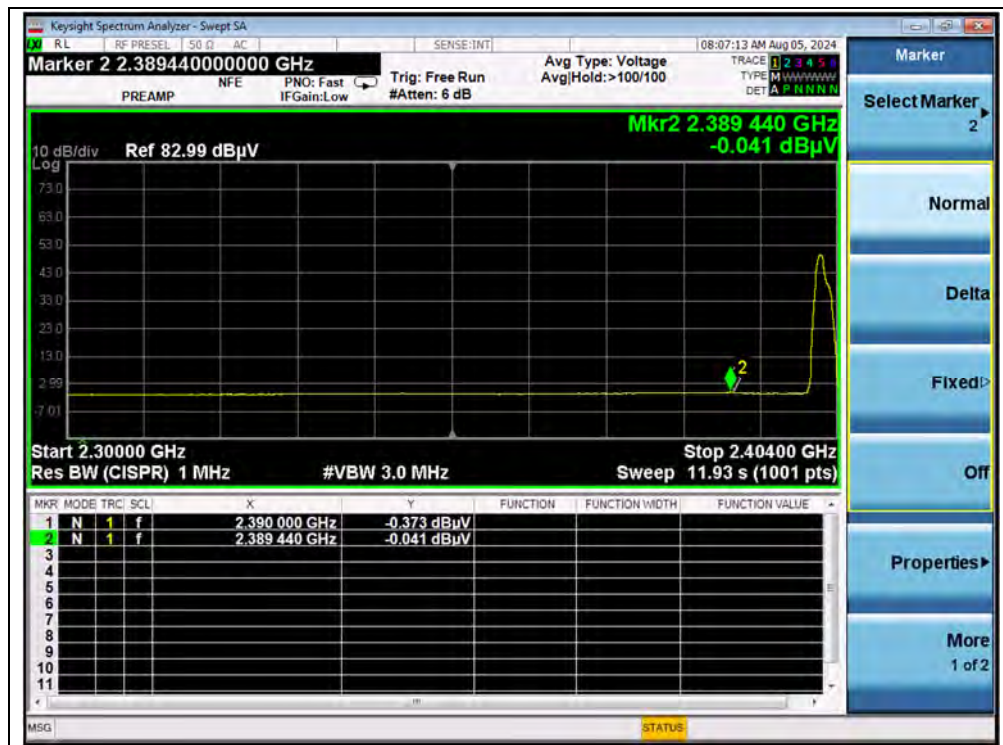

(AVERAGE, Channel 0, 8-DPSK)



(PEAK, Channel 78, 8-DPSK)



(AVERAGE, Channel 78, 8-DPSK)



A.11. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**GFSK Mode**

Plots for Channel 0

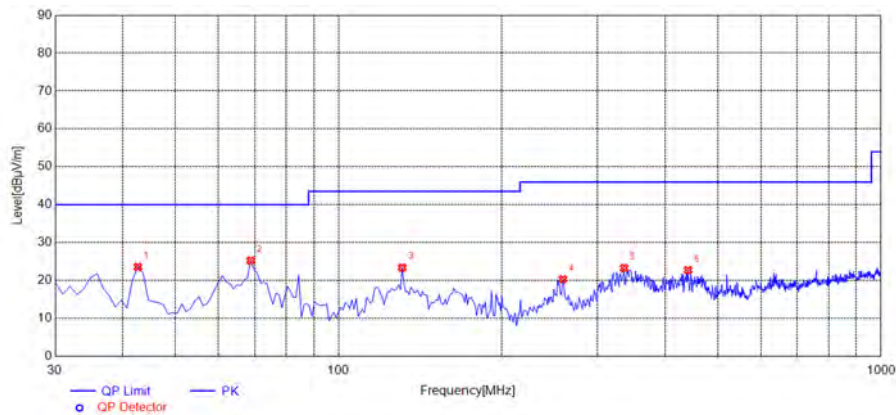


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	23.58	-29.25	40.00	Horizontal	PASS
68.8388	25.25	-32.79	40.00	Horizontal	PASS
130.9810	23.40	-34.52	43.50	Horizontal	PASS
259.1491	20.35	-30.15	46.00	Horizontal	PASS
335.8559	23.31	-27.86	46.00	Horizontal	PASS
440.7207	22.74	-25.44	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

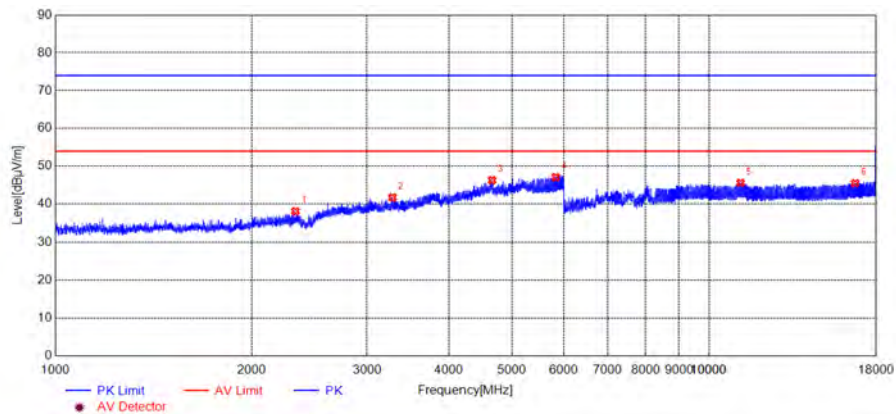


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2330.1330	38.08	-21.02	74.00	Horizontal	PASS
3281.2281	41.78	-16.73	74.00	Horizontal	PASS
4658.8659	46.31	-11.32	74.00	Horizontal	PASS
5826.9827	47.10	-8.38	74.00	Horizontal	PASS
11170.1170	45.61	2.99	74.00	Horizontal	PASS
16727.8728	45.52	6.90	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

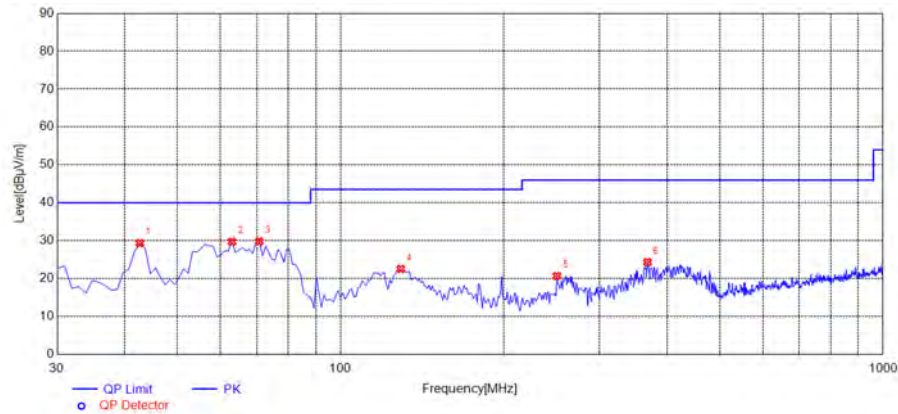

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	29.37	-29.25	40.00	Vertical	PASS
63.0130	29.74	-30.73	40.00	Vertical	PASS
70.7808	29.81	-33.44	40.00	Vertical	PASS
129.0390	22.56	-34.72	43.50	Vertical	PASS
250.4104	20.69	-30.39	46.00	Vertical	PASS
367.8979	24.35	-27.29	46.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

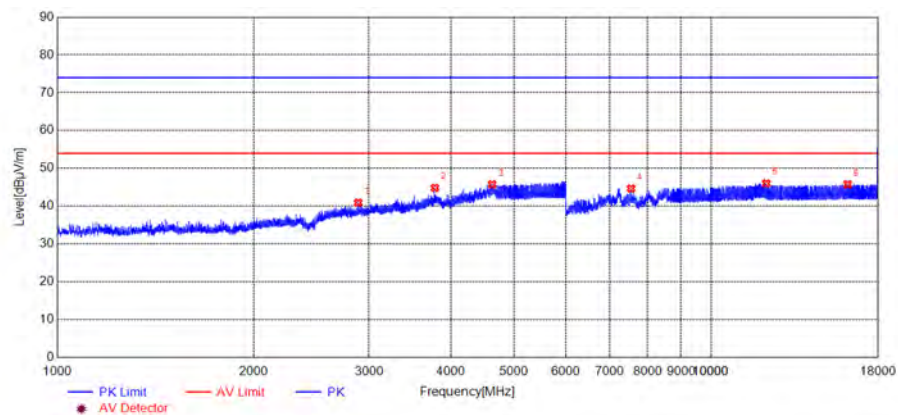

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2886.1886	40.94	-18.06	74.00	Vertical	PASS
3780.7781	44.85	-15.25	74.00	Vertical	PASS
4626.3626	45.79	-11.62	74.00	Vertical	PASS
7544.5545	44.69	-4.30	74.00	Vertical	PASS
12148.2148	46.03	3.57	74.00	Vertical	PASS
16175.8176	45.79	5.12	74.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 39

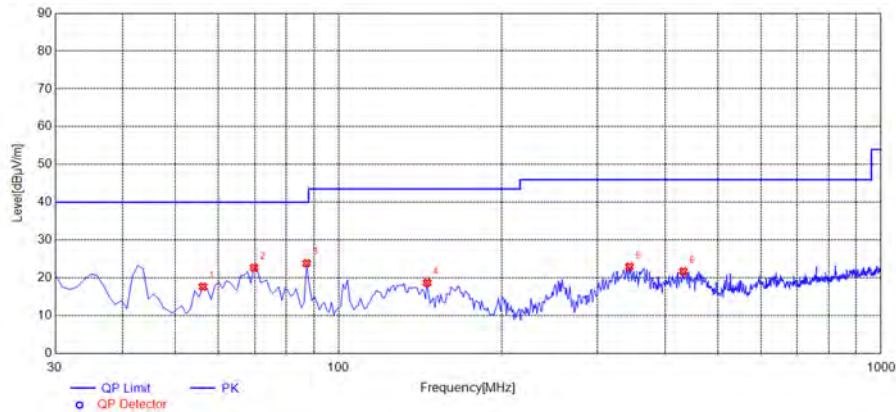


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
56.2162	17.68	-29.66	40.00	Horizontal	PASS
69.8098	22.73	-33.23	40.00	Horizontal	PASS
87.2873	23.88	-33.57	40.00	Horizontal	PASS
145.5455	18.72	-35.27	43.50	Horizontal	PASS
343.6236	22.96	-27.46	46.00	Horizontal	PASS
431.9820	21.73	-25.49	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

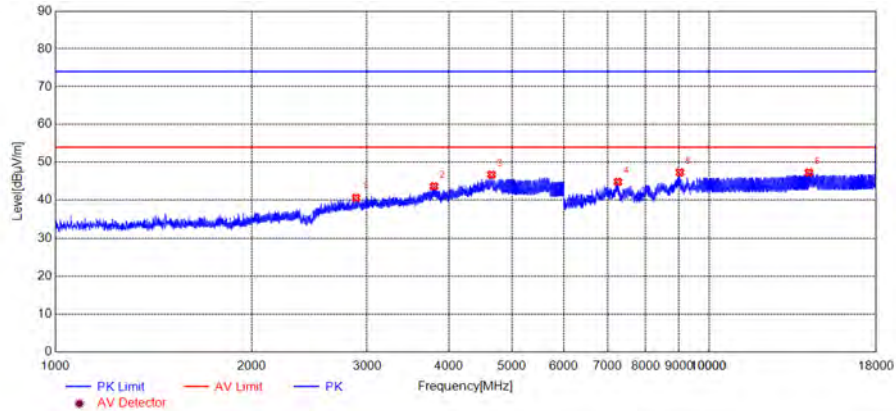


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2884.6885	40.62	-18.07	74.00	Horizontal	PASS
3797.2797	43.67	-14.96	74.00	Horizontal	PASS
4646.8647	46.74	-11.23	74.00	Horizontal	PASS
7256.5257	44.84	-3.09	74.00	Horizontal	PASS
9023.1023	47.32	-1.10	74.00	Horizontal	PASS
14214.8215	47.30	5.92	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

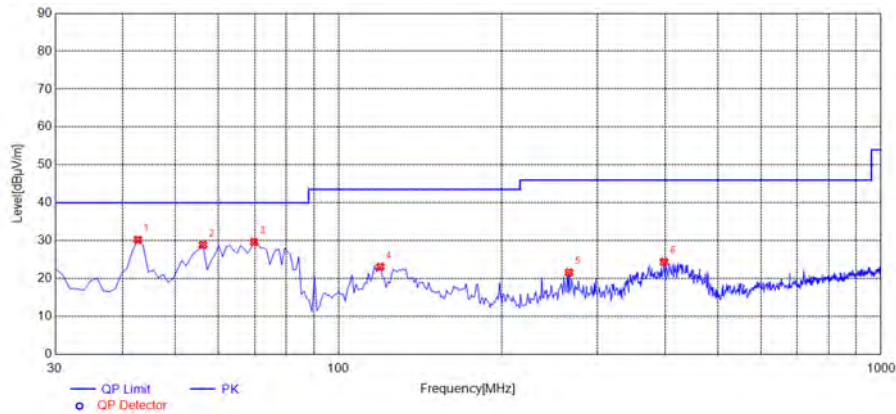

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	30.21	-29.25	40.00	Vertical	PASS
56.2162	28.91	-29.66	40.00	Vertical	PASS
69.8098	29.66	-33.23	40.00	Vertical	PASS
119.3293	23.13	-32.96	43.50	Vertical	PASS
265.9459	21.60	-30.09	46.00	Vertical	PASS
397.9980	24.44	-26.37	46.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

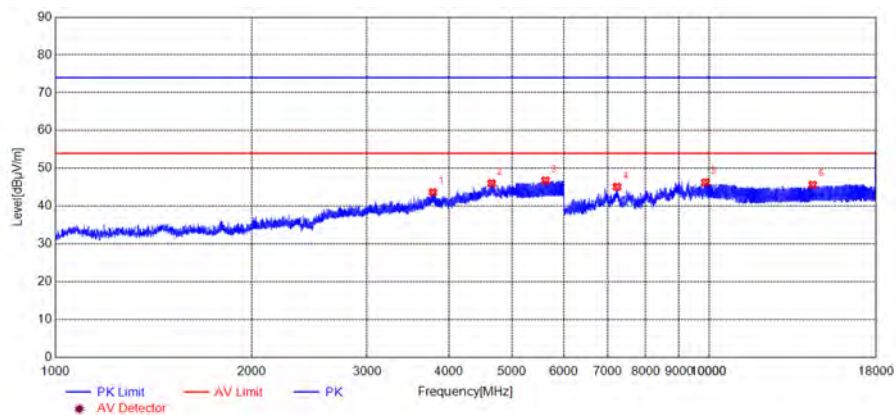

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3780.7781	43.69	-15.25	74.00	Vertical	PASS
4649.8650	46.02	-11.17	74.00	Vertical	PASS
5622.9623	46.79	-9.84	74.00	Vertical	PASS
7231.3231	45.15	-3.30	74.00	Vertical	PASS
9870.3870	46.27	0.34	74.00	Vertical	PASS
14405.6406	45.66	4.38	74.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 78

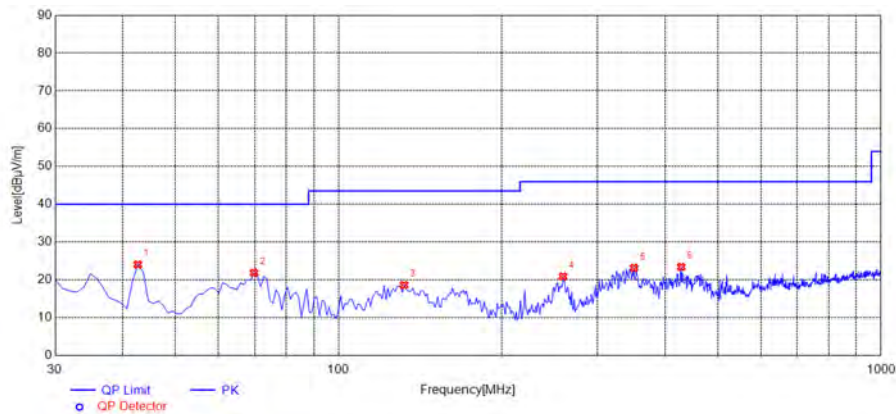


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	24.07	-29.25	40.00	Horizontal	PASS
69.8098	21.88	-33.23	40.00	Horizontal	PASS
131.9520	18.65	-34.69	43.50	Horizontal	PASS
259.1491	20.92	-30.15	46.00	Horizontal	PASS
350.4204	23.18	-27.18	46.00	Horizontal	PASS
428.0981	23.47	-25.49	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

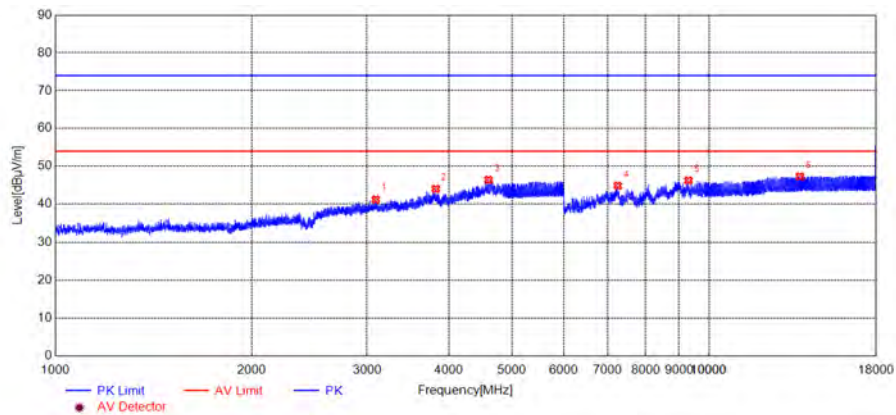


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3092.2092	41.23	-17.47	74.00	Horizontal	PASS
3819.7820	44.04	-15.07	74.00	Horizontal	PASS
4599.3599	46.45	-12.12	74.00	Horizontal	PASS
7252.9253	44.87	-2.98	74.00	Horizontal	PASS
9300.3300	46.25	0.53	74.00	Horizontal	PASS
13771.9772	47.31	6.78	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

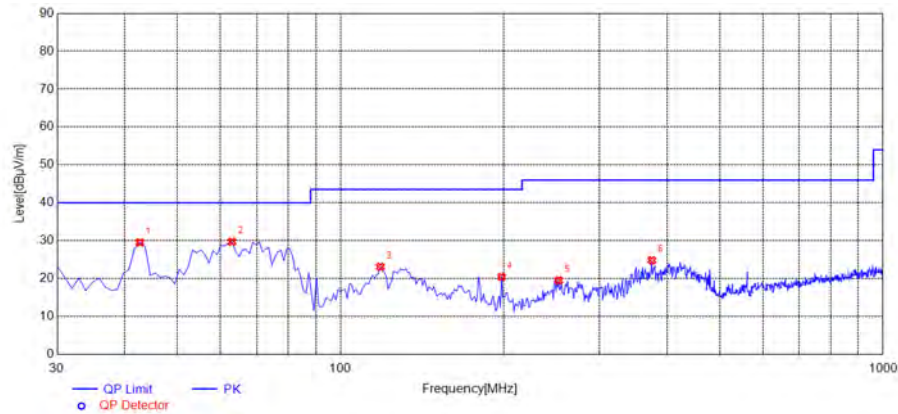

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	29.57	-29.25	40.00	Vertical	PASS
63.0130	29.73	-30.73	40.00	Vertical	PASS
118.3584	23.12	-32.73	43.50	Vertical	PASS
197.9780	20.43	-32.06	43.50	Vertical	PASS
252.3524	19.55	-30.34	46.00	Vertical	PASS
374.6947	24.85	-27.09	46.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

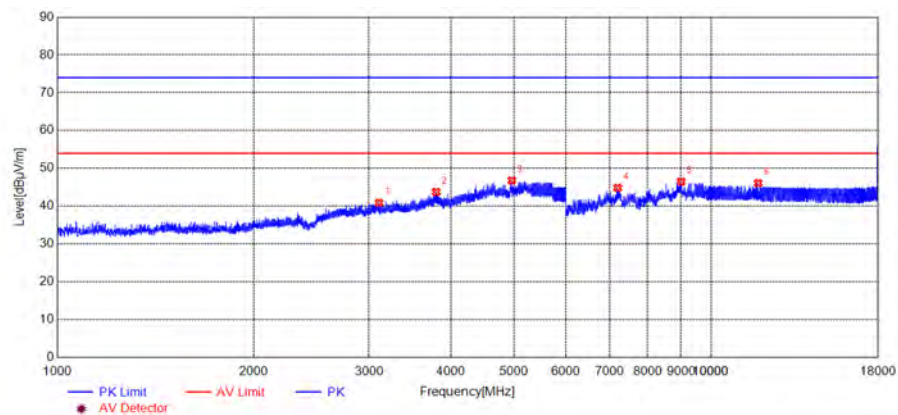


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3107.2107	40.87	-17.53	74.00	Vertical	PASS
3798.2798	43.77	-14.94	74.00	Vertical	PASS
4958.3958	46.80	-10.83	74.00	Vertical	PASS
7198.9199	44.86	-4.02	74.00	Vertical	PASS
9000.3000	46.51	-0.80	74.00	Vertical	PASS
11803.7804	46.10	2.11	74.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)


 **$\pi/4$ -DQPSK Mode**

Plot for Channel 0

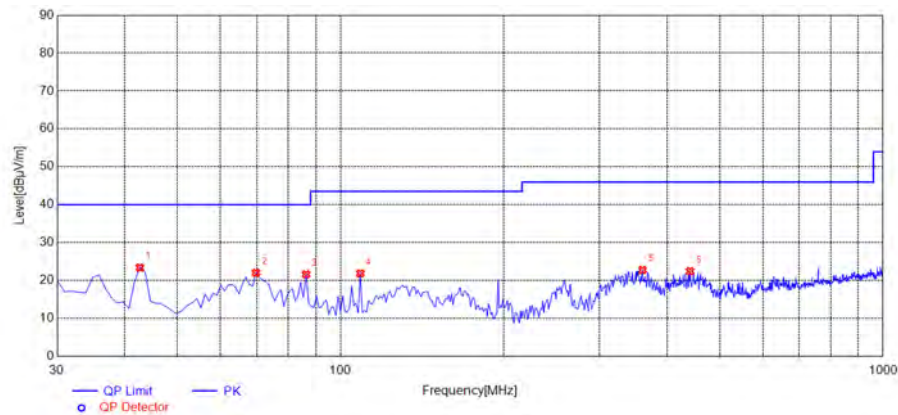


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	23.40	-29.25	40.00	Horizontal	PASS
69.8098	22.07	-33.23	40.00	Horizontal	PASS
86.3163	21.64	-33.79	40.00	Horizontal	PASS
108.6486	21.87	-31.41	43.50	Horizontal	PASS
360.1301	22.79	-27.24	46.00	Horizontal	PASS
440.7207	22.45	-25.44	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

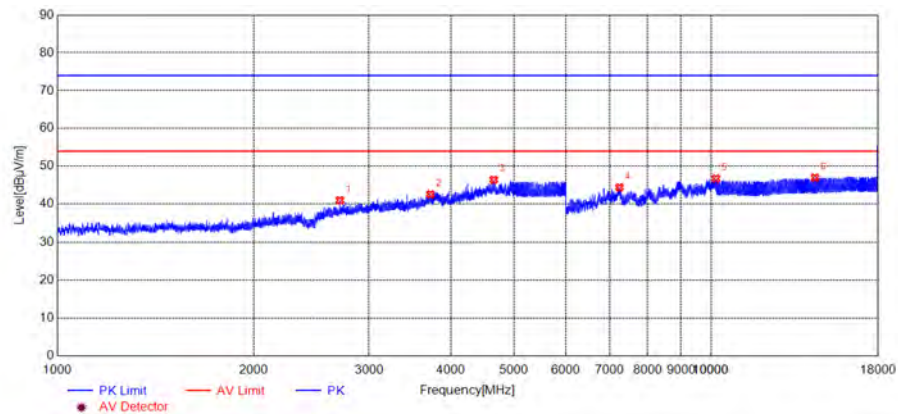


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2707.1707	41.00	-19.01	74.00	Horizontal	PASS
3722.7723	42.60	-15.82	74.00	Horizontal	PASS
4651.8652	46.43	-11.20	74.00	Horizontal	PASS
7243.3243	44.41	-3.03	74.00	Horizontal	PASS
10172.8173	46.77	0.64	74.00	Horizontal	PASS
14422.4422	46.99	4.78	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

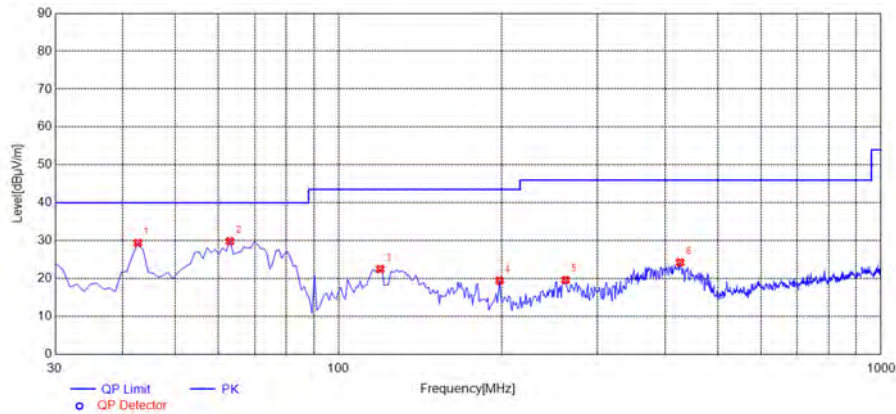

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	29.40	-29.25	40.00	Vertical	PASS
63.0130	29.85	-30.73	40.00	Vertical	PASS
119.3293	22.55	-32.96	43.50	Vertical	PASS
197.9780	19.50	-32.06	43.50	Vertical	PASS
262.0621	19.66	-30.13	46.00	Vertical	PASS
426.1562	24.27	-25.50	46.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

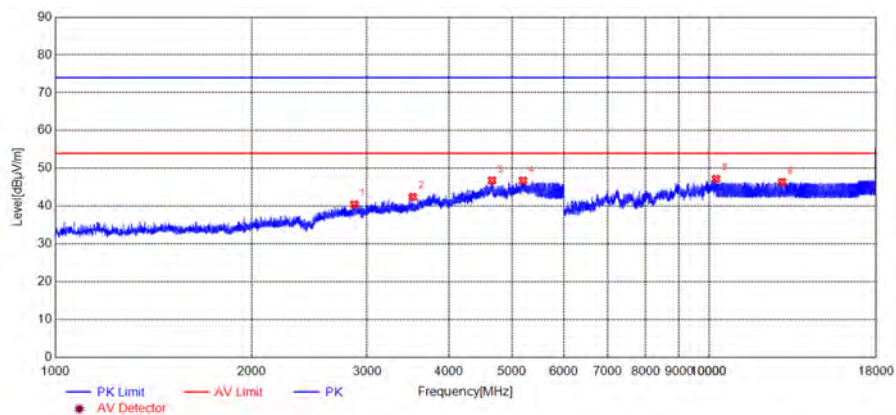


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2867.6868	40.48	-18.20	74.00	Vertical	PASS
3523.2523	42.47	-16.25	74.00	Vertical	PASS
4656.3656	46.81	-11.28	74.00	Vertical	PASS
5194.9195	46.78	-9.96	74.00	Vertical	PASS
10247.2247	47.22	1.57	74.00	Vertical	PASS
12930.6931	46.35	3.75	74.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




Plot for Channel 39

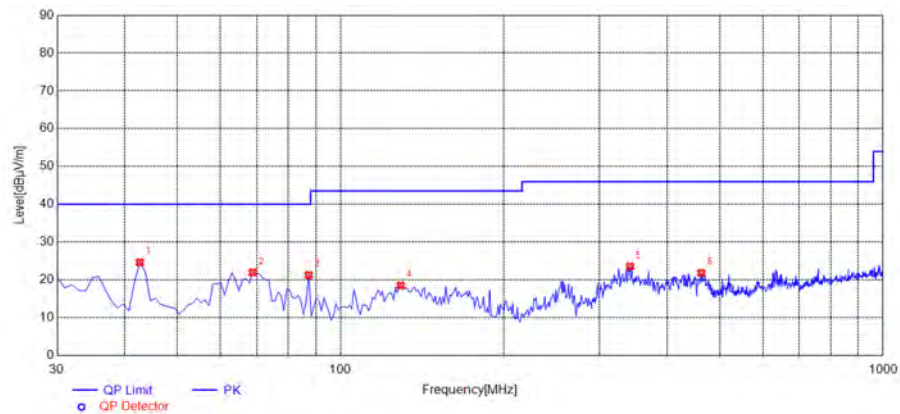


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	24.62	-29.25	40.00	Horizontal	PASS
68.8388	21.97	-32.79	40.00	Horizontal	PASS
87.2873	21.29	-33.57	40.00	Horizontal	PASS
129.0390	18.51	-34.72	43.50	Horizontal	PASS
341.6817	23.58	-27.50	46.00	Horizontal	PASS
462.0821	21.84	-25.12	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

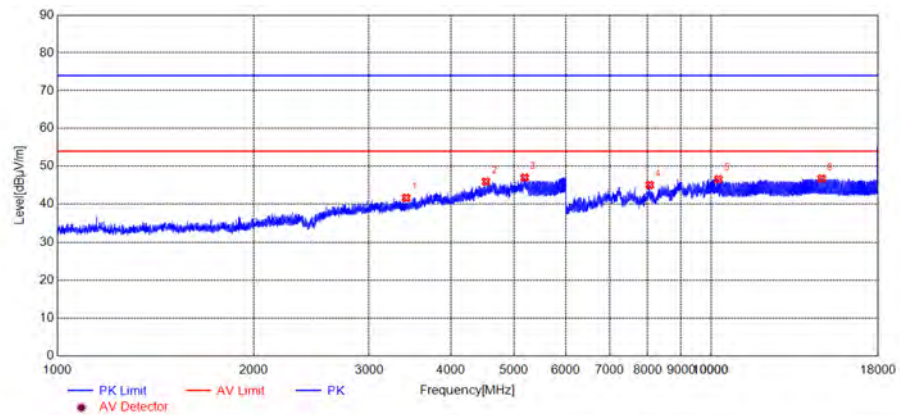


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3417.2417	41.66	-16.61	74.00	Horizontal	PASS
4525.8526	45.96	-12.44	74.00	Horizontal	PASS
5188.4188	47.04	-10.10	74.00	Horizontal	PASS
8059.4059	45.08	-3.11	74.00	Horizontal	PASS
10262.8263	46.65	1.34	74.00	Horizontal	PASS
14757.2757	46.79	5.42	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

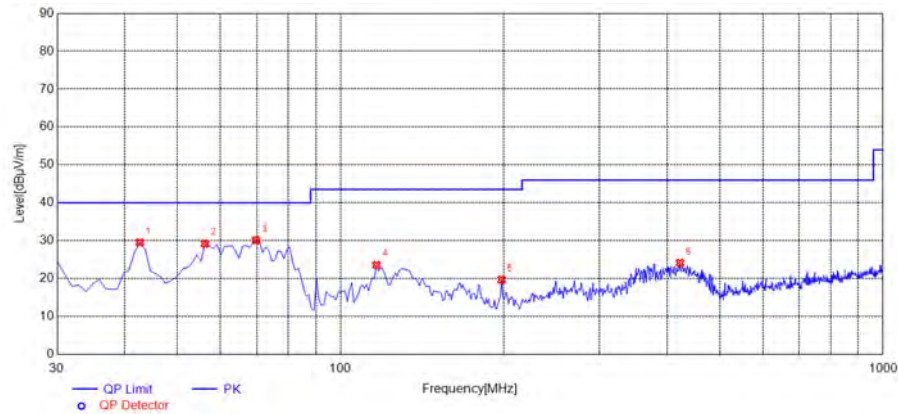

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	29.54	-29.25	40.00	Vertical	PASS
56.2162	29.20	-29.66	40.00	Vertical	PASS
69.8098	30.11	-33.23	40.00	Vertical	PASS
116.4164	23.60	-32.49	43.50	Vertical	PASS
197.9780	19.76	-32.06	43.50	Vertical	PASS
422.2723	24.16	-25.61	46.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

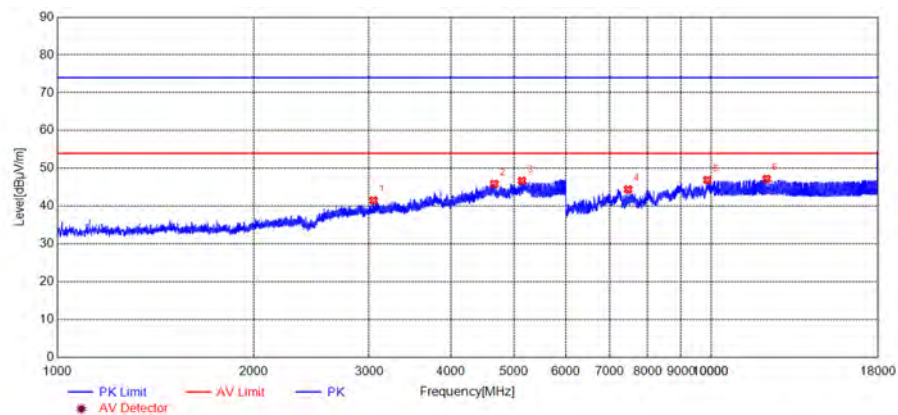

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3047.2047	41.50	-17.47	74.00	Vertical	PASS
4663.3663	45.89	-11.40	74.00	Vertical	PASS
5138.9139	46.73	-10.93	74.00	Vertical	PASS
7465.3465	44.46	-4.60	74.00	Vertical	PASS
9873.9874	46.92	0.37	74.00	Vertical	PASS
12157.8158	47.22	3.68	74.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 78

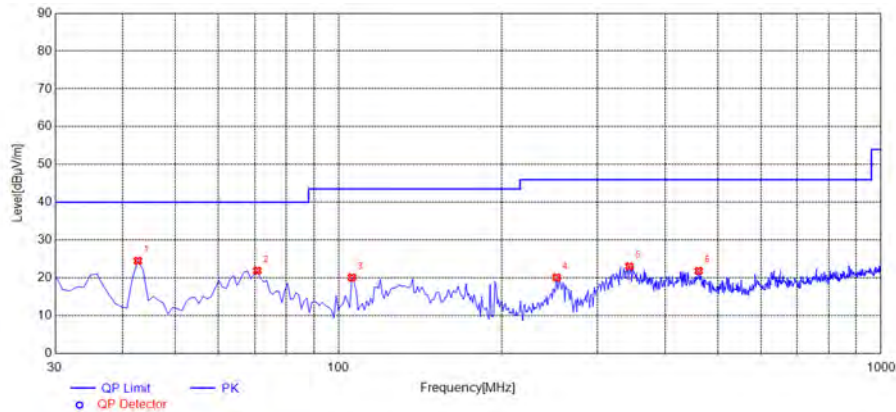


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	24.52	-29.25	40.00	Horizontal	PASS
70.7808	21.91	-33.44	40.00	Horizontal	PASS
105.7357	20.12	-30.93	43.50	Horizontal	PASS
252.3524	20.12	-30.34	46.00	Horizontal	PASS
343.6236	23.07	-27.46	46.00	Horizontal	PASS
461.1111	21.85	-25.15	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

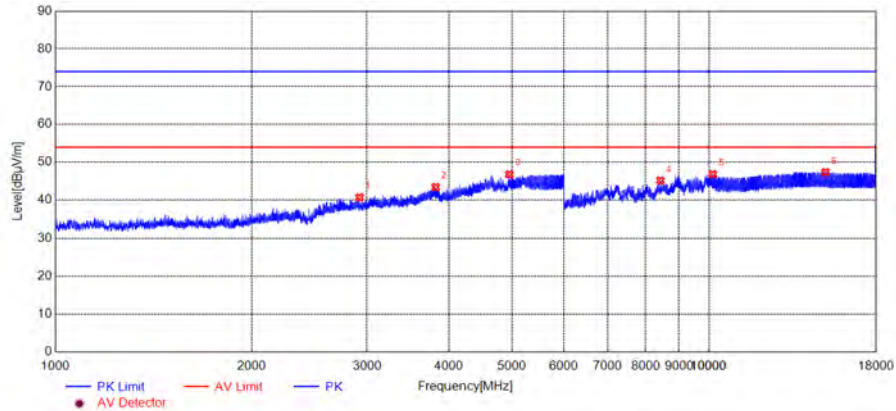


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2921.6922	40.73	-18.19	74.00	Horizontal	PASS
3819.2819	43.43	-15.07	74.00	Horizontal	PASS
4948.8949	46.82	-10.81	74.00	Horizontal	PASS
8426.6427	45.19	-2.99	74.00	Horizontal	PASS
10130.8131	46.87	0.64	74.00	Horizontal	PASS
15063.3063	47.40	6.69	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

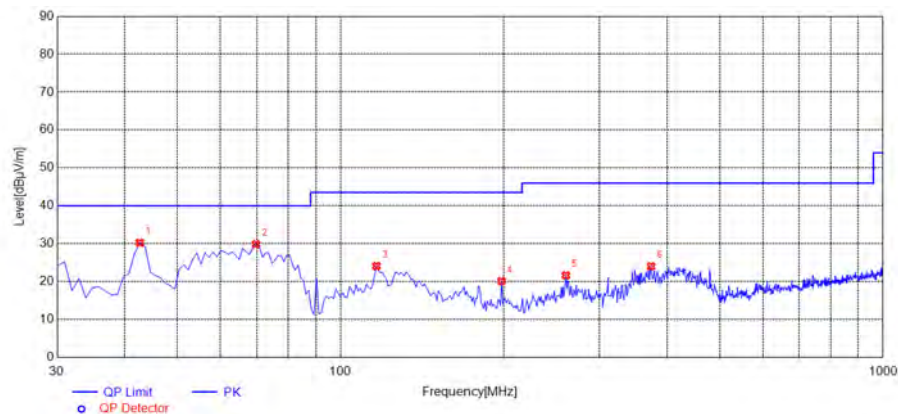

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	30.28	-29.25	40.00	Vertical	PASS
69.8098	29.88	-33.23	40.00	Vertical	PASS
116.4164	24.12	-32.49	43.50	Vertical	PASS
197.9780	20.16	-32.06	43.50	Vertical	PASS
260.1201	21.66	-30.13	46.00	Vertical	PASS
373.7237	24.02	-27.14	46.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

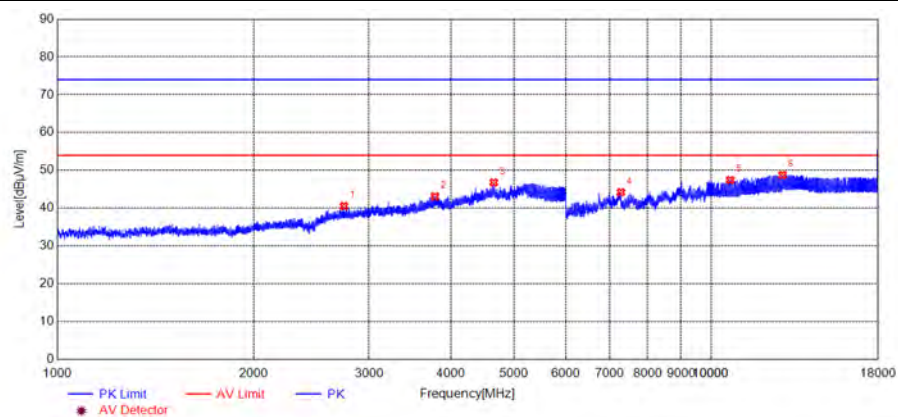


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2745.1745	40.55	-18.58	74.00	Vertical	PASS
3781.7782	43.14	-15.23	74.00	Vertical	PASS
4652.8653	46.80	-11.22	74.00	Vertical	PASS
7279.3279	44.21	-3.84	74.00	Vertical	PASS
10699.6700	47.45	1.56	74.00	Vertical	PASS
12861.0861	48.77	3.54	74.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)


**8-DPSK Mode**

Plot for Channel 0

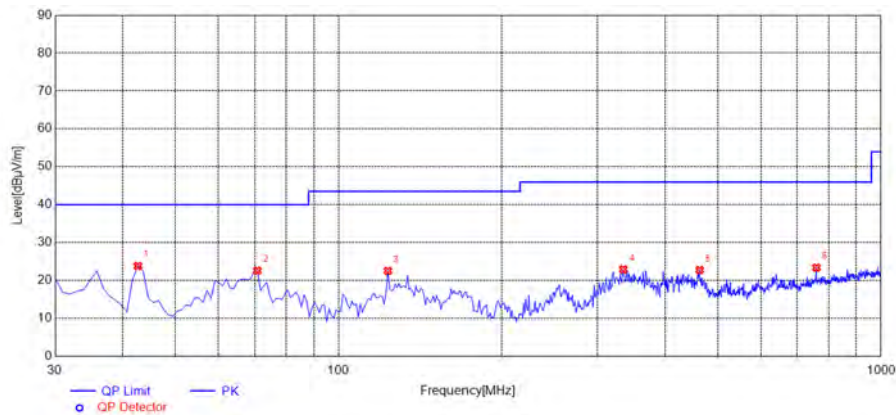


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	23.83	-29.25	40.00	Horizontal	PASS
70.7808	22.61	-33.44	40.00	Horizontal	PASS
123.2132	22.55	-33.79	43.50	Horizontal	PASS
334.8849	22.92	-27.94	46.00	Horizontal	PASS
463.0531	22.78	-25.09	46.00	Horizontal	PASS
760.1702	23.40	-20.50	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

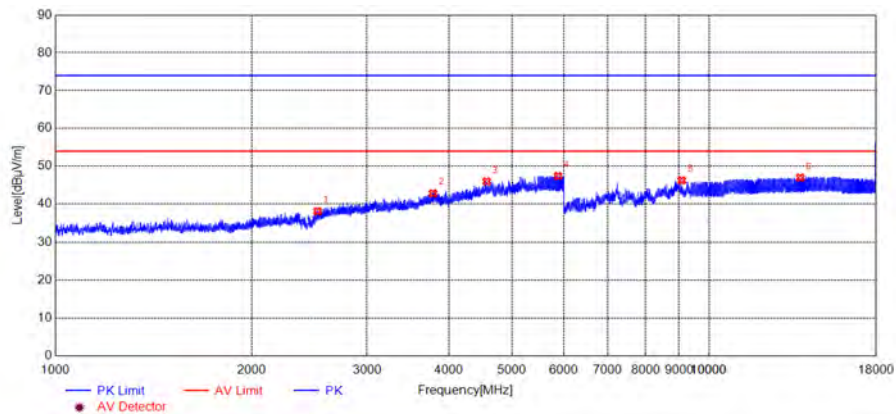


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
2520.1520	38.08	-20.26	74.00	Horizontal	PASS
3783.2783	42.81	-15.21	74.00	Horizontal	PASS
4570.3570	46.00	-12.03	74.00	Horizontal	PASS
5874.4874	47.42	-8.07	74.00	Horizontal	PASS
9083.1083	46.25	-1.46	74.00	Horizontal	PASS
13788.7789	47.00	6.46	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

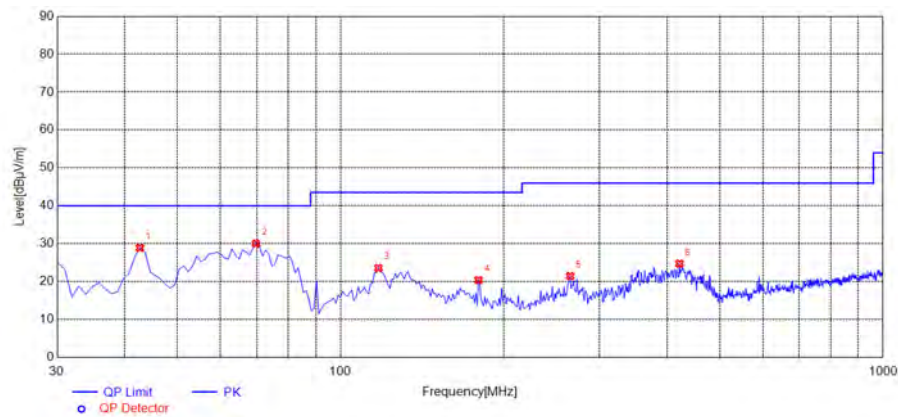

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	28.94	-29.25	40.00	Vertical	PASS
69.8098	30.01	-33.23	40.00	Vertical	PASS
117.3874	23.60	-32.46	43.50	Vertical	PASS
179.5295	20.40	-33.59	43.50	Vertical	PASS
264.9750	21.47	-30.12	46.00	Vertical	PASS
421.3013	24.76	-25.64	46.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

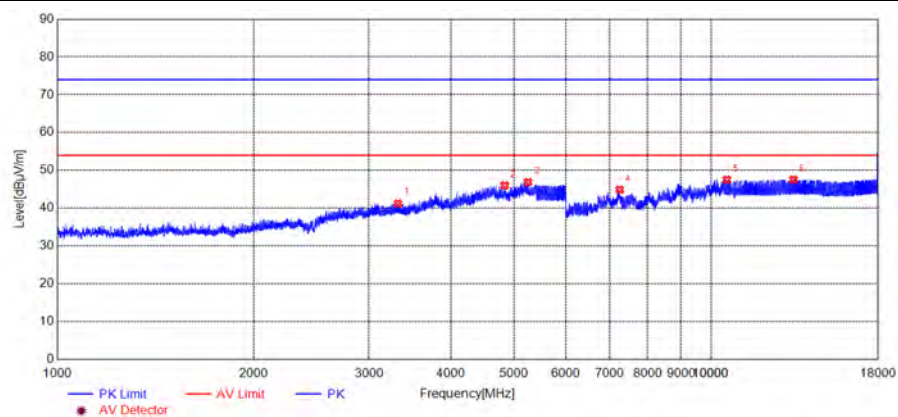


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3320.2320	41.24	-16.51	74.00	Vertical	PASS
4834.8835	46.01	-11.16	74.00	Vertical	PASS
5248.9249	46.91	-10.24	74.00	Vertical	PASS
7248.1248	44.88	-2.92	74.00	Vertical	PASS
10570.0570	47.55	2.62	74.00	Vertical	PASS
13363.9364	47.57	6.02	74.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)




Plot for Channel 39

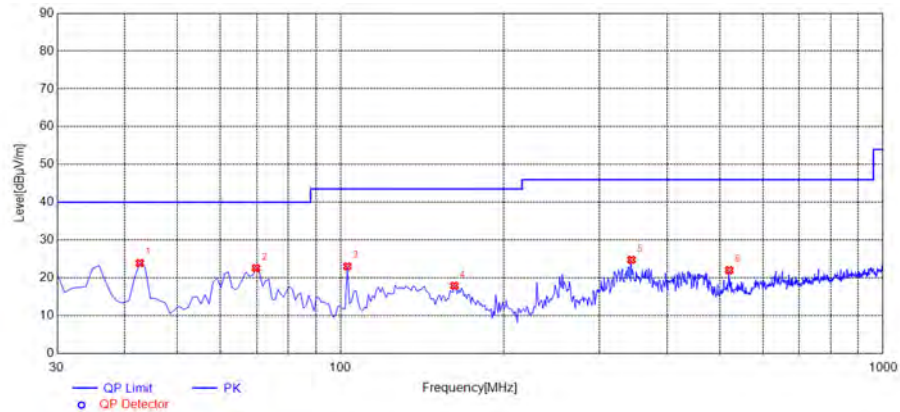


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	23.92	-29.25	40.00	Horizontal	PASS
69.8098	22.58	-33.23	40.00	Horizontal	PASS
102.8228	23.07	-31.18	43.50	Horizontal	PASS
162.0521	17.95	-34.56	43.50	Horizontal	PASS
343.6236	24.78	-27.46	46.00	Horizontal	PASS
520.3403	22.04	-23.68	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

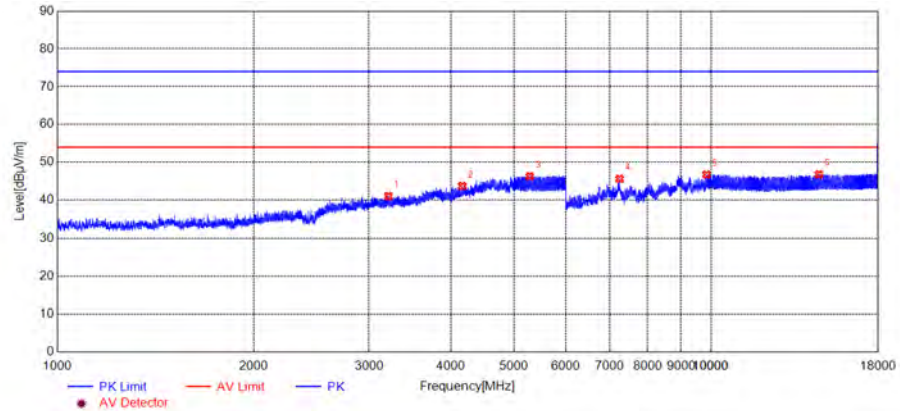


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3209.2209	41.09	-17.25	74.00	Horizontal	PASS
4165.3165	43.79	-14.06	74.00	Horizontal	PASS
5280.9281	46.29	-10.26	74.00	Horizontal	PASS
7246.9247	45.64	-2.95	74.00	Horizontal	PASS
9841.5842	46.77	0.06	74.00	Horizontal	PASS
14618.0618	46.83	7.05	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

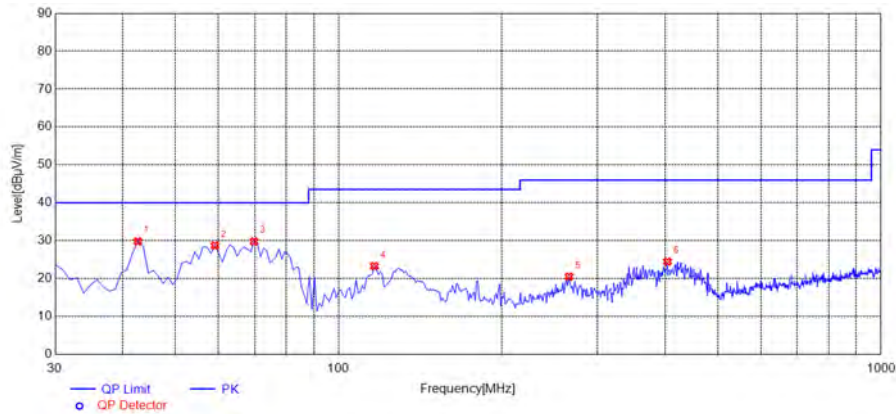

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	29.83	-29.25	40.00	Vertical	PASS
59.1291	28.72	-30.37	40.00	Vertical	PASS
69.8098	29.80	-33.23	40.00	Vertical	PASS
116.4164	23.30	-32.49	43.50	Vertical	PASS
265.9459	20.52	-30.09	46.00	Vertical	PASS
403.8238	24.49	-26.19	46.00	Vertical	PASS


(Antenna Vertical, 30MHz to 1GHz)

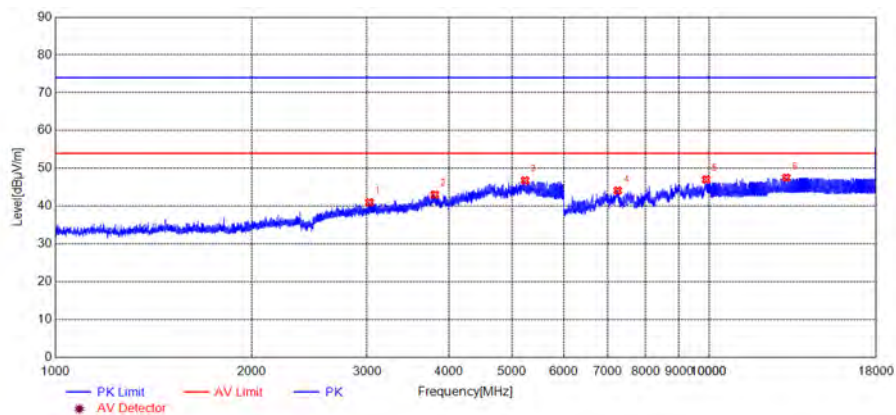

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3025.2025	41.03	-17.83	74.00	Vertical	PASS
3806.7807	43.06	-14.97	74.00	Vertical	PASS
5229.9230	46.82	-10.09	74.00	Vertical	PASS
7250.5251	44.13	-2.90	74.00	Vertical	PASS
9900.3900	47.07	0.55	74.00	Vertical	PASS
13121.5122	47.56	4.84	74.00	Vertical	PASS


(Antenna Vertical, 1GHz to 18GHz)

Plot for Channel 78

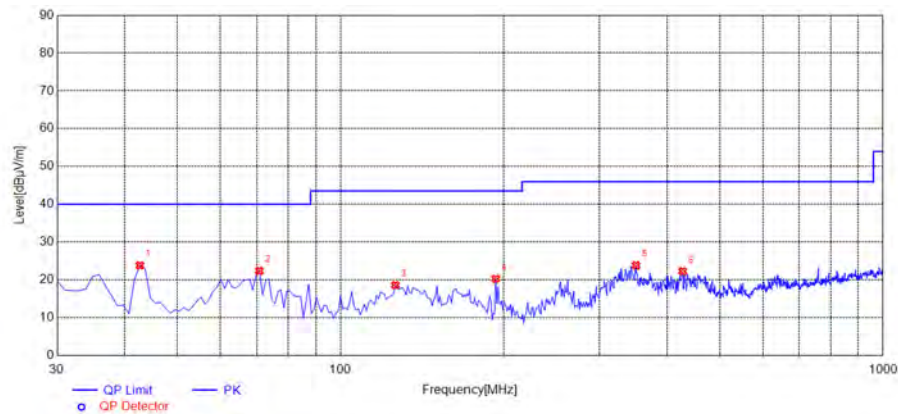


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	23.84	-29.25	40.00	Horizontal	PASS
70.7808	22.40	-33.44	40.00	Horizontal	PASS
126.1261	18.63	-34.22	43.50	Horizontal	PASS
193.1231	20.30	-32.15	43.50	Horizontal	PASS
350.4204	23.85	-27.18	46.00	Horizontal	PASS
427.1271	22.27	-25.49	46.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 1GHz)

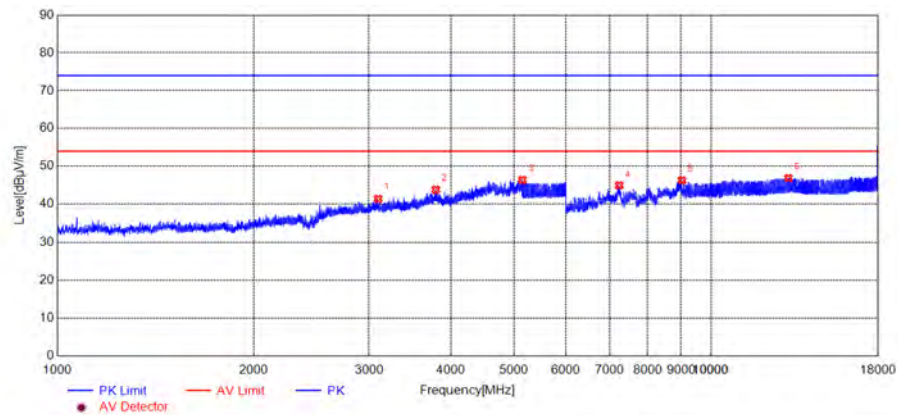


Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3095.7096	41.41	-17.47	74.00	Horizontal	PASS
3793.7794	43.84	-15.02	74.00	Horizontal	PASS
5146.9147	46.43	-10.90	74.00	Horizontal	PASS
7234.9235	44.95	-3.22	74.00	Horizontal	PASS
9026.7027	46.29	-1.15	74.00	Horizontal	PASS
13128.7129	46.90	4.86	74.00	Horizontal	PASS

(Antenna Horizontal, 1GHz to 18GHz)

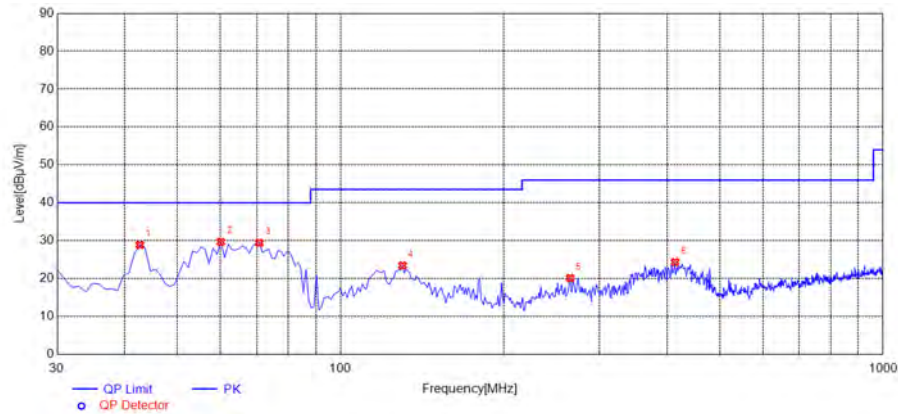

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
42.6226	28.91	-29.25	40.00	Vertical	PASS
60.1001	29.68	-30.55	40.00	Vertical	PASS
70.7808	29.41	-33.44	40.00	Vertical	PASS
130.0100	23.48	-34.73	43.50	Vertical	PASS
264.9750	20.16	-30.12	46.00	Vertical	PASS
413.5335	24.37	-25.88	46.00	Vertical	PASS

(Antenna Vertical, 30MHz to 1GHz)

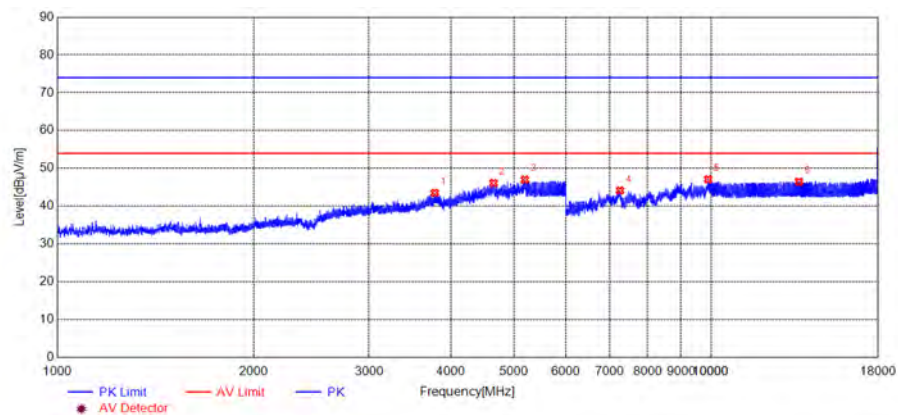

Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Antenna	Verdict
3778.7779	43.51	-15.29	74.00	Vertical	PASS
4647.8648	46.10	-11.21	74.00	Vertical	PASS
5191.4191	47.03	-10.04	74.00	Vertical	PASS
7258.9259	44.16	-3.17	74.00	Vertical	PASS
9896.7897	47.12	0.53	74.00	Vertical	PASS
13626.7627	46.48	6.12	74.00	Vertical	PASS

(Antenna Vertical, 1GHz to 18GHz)

END OF REPORT