

RF Test Report

Applicant: Quectel Wireless Solutions Co., Ltd.

Address: Building 5, Shanghai Business Park Phase III (Area B), No.1016
Tianlin Road, Minhang District, Shanghai, 200233 China

Product: Smart Module

Model No.: SC200E-WF

Brand Name: QUECTEL

FCC ID: XMR2024SC200EWF


Standards: FCC CFR47 Part 15E

Report No.: PD20240072RF04

Issue Date: 2024/06/14

Test Result: PASS *

* The above equipment has been tested and compliance with the requirement of the relative standards by Hefei Panwin Technology Co., Ltd.



Reviewed By: Jerry Zhang



Approved By: Alec Yang

Hefei Panwin Technology Co., Ltd.

Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin
Avenue, High-tech Zone, Hefei City, Anhui Province, China
TEL: 0551-63811775



Test Report

Report No.: PD20240072RF04

Report Version: 01

Revision History

Report No.	Version	Description	Issue Date	Note
PD20240072RF04	1	Initial Report	2024/06/14	Valid

CONTENTS

1 General Information	5
1.1 Notes of the Test Report	5
1.2 Test Facility	5
1.3 Testing Laboratory	5
2 General Description of Equipment under Test	6
2.1 Details of Application	6
2.2 General Information	6
2.3 Applicable Standards	7
3 Test Condition	8
3.1 Test Configuration	8
3.2 Wireless Technology and Frequency Range	9
3.3 Equipment List	10
3.4 Support Equipment List	11
3.5 Test Uncertainty	11
4 Test Items Description	12
4.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	12
4.2 Maximum Conducted Output Power Measurement	14
4.3 Power Spectral Density Measurement	17
4.4 Unwanted Emissions Measurement	19
4.5 AC Conducted Emission Measurement	24
4.6 Antenna Requirements	26
Appendix A – Test Results of Conducted Test	27
Appendix B – Test Results of Radiated Test	27
Appendix C – The EUT Appearance	110
Appendix D – Test Setup Photograph	110

Summary of Test Results

No.	Test Case	FCC Rules	Verdict
1	Occupied Bandwidth Measurement	15.407(e)	PASS
2	Maximum Conducted Output Power Measurement	15.407(a)	PASS
3	Power Spectral Density Measurement	15.407(a)	PASS
4	Unwanted Emissions Measurement	15.407(b)	PASS
5	AC Conducted Emission Measurement	15.207	NA
6	Antenna Requirements	15.203 & 15.407(a)	PASS
7	Frequency Stability ^{Note1}	15.407(g)	NA

Date of Testing: 2024/05/28 to 2024/06/11

Date of Sample Received: 2024/05/27

• We, Hefei Panwin Technology Co., Ltd., would like to declare that the tested sample has been evaluated in accordance with the procedures given in applied standard(s) in **Section 2.3** of this report and shown compliance with the applicable technical standards.

• All indications of PASS/FAIL in this report are based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.

Note1: Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

1 General Information

1.1 Notes of the Test Report

This report is invalid without signature of auditor and approver or with any alterations. The report shall not be partially reproduced without written approval of the testing company. Entrusted test results are only responsible for incoming samples. If there is any objection to the testing report, it shall be raised to the testing company within 15 days from the date of receiving the report. In the test results, "NA" means "not applicable", and the test items marked with "Δ" are subcontracted projects.

1.2 Test Facility

FCC (Designation number: CN1361, Test Firm Registration Number: 473156)

Hefei Panwin Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 6849.01)

Hefei Panwin Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Laboratory

Company Name	Hefei Panwin Technology Co., Ltd.
Address	Floor 1, Zone E, Plant 2#, Mingzhu Industrial Park, No.106 Chuangxin Avenue, High-tech Zone, Hefei City, Anhui Province, China
Telephone	+86-0551-63811775
Post Code	230031

2 General Description of Equipment under Test

2.1 Details of Application

Applicant	Quectel Wireless Solutions Co., Ltd.
Applicant Address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China
Manufacturer	Quectel Wireless Solutions Co., Ltd.
Manufacturer Address	Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai, 200233 China

2.2 General Information

Product	Smart Module
Model	SC200E-WF
SN	1. E1C24CT1S000008 2. E1C24CT1S000013
Hardware Version	R2.0
Software Version	SC200EWFDAR12A01
Antenna Type	External Antenna
Max. Conducted Power	Wi-Fi 5G: 17.00dBm
WLAN Mode Supported:	802.11a 802.11n 20M/40M 802.11ac 20M/40M/80M
Antenna Gain	5150MHz to 5250MHz: -0.67dBi 5250MHz to 5350MHz: -0.19dBi 5470MHz to 5725MHz: 1.28dBi 5725MHz to 5850MHz: 1.10dBi
Directional Gain	NA
Test Band	U-NII-1(5150MHz-5250MHz) U-NII-2A(5250MHz-5350MHz) U-NII-2C(5470MHz-5725MHz) U-NII-3(5725MHz-5850MHz)
Operating voltage	Typical 3.8Vdc
Modulation Type	802.11a/n/ac: BPSK;QPSK;16QAM;64QAM;256QAM
Note: The declared of product specification for EUT and/or Antenna presented in the report are provided by the	

manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

2.3 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UN II Test Procedures New Rules v02r01
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 Test Condition

3.1 Test Configuration

Test mode

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). The worst cases were recorded in this report.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes (Z, X, Y axis), receiver antenna polarization (horizontal and vertical), the worst emission was found in Z position and the worst case was recorded. This report presents the data for the worst polarity.

Test Mode	Data Rate(Mbps)
802.11a	6
802.11n 20M	MCS0
802.11n 40M	MCS0
802.11ac 20M	MCS0
802.11ac 40M	MCS0
802.11ac 80M	MCS0

3.2 Wireless Technology and Frequency Range

Wireless Technology	Bandwidth		Channel	Frequency
Wi-Fi	U-NII-1	20MHz	36	5180 MHz
			40	5200 MHz
			44	5220 MHz
			48	5240 MHz
		40MHz	38	5190 MHz
			46	5230 MHz
		80MHz	42	5210 MHz
	U-NII-2A	20MHz	52	5260 MHz
			56	5280 MHz
			60	5300 MHz
			64	5320 MHz
		40MHz	54	5270 MHz
			62	5310 MHz
		80MHz	58	5290 MHz
	U-NII-2C	20MHz	100	5500 MHz
			104	5520 MHz
			108	5540 MHz
			112	5560 MHz
			116	5580 MHz
			120	5600 MHz
			124	5620 MHz
			128	5640 MHz
			132	5660 MHz
			136	5680 MHz
			140	5700 MHz
			144	5720 MHz
		40MHz	102	5510 MHz
			110	5550 MHz
			118	5590 MHz
			126	5630 MHz
			134	5670 MHz
			142	5710 MHz
		80MHz	106	5530 MHz
			122	5610 MHz
			138	5690 MHz
	U-NII-3	20MHz	149	5745 MHz

			153	5765 MHz	
			157	5785 MHz	
			161	5805 MHz	
			165	5825 MHz	
		40MHz	151	5755 MHz	
			159	5795 MHz	
		80MHz	155	5775 MHz	
Does this device support TPC function?		☒ Yes		☐ No	
Does this device support TDWR band?		☒ Yes		☐ No	

3.3 Equipment List

Conducted

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
Spectrum Analyzer	KEYSIGHT	N9020B	PWC0048	1 Year	2024/10/11
DC Power	KEYSIGHT	E3640A	PWC0046	1 Year	2024/10/11
RF Control Unit	Tonsecod	JS0806-2	PWC0055	/	/
Shielded Chamber	Maorui	MR543	PWC0041	3 Years	2026/08/26
Test Software	Tonsecod	JS1120-3 V3.2.22	/	/	/

Radiated

Instrument	Manufacturer	Model	Asset No.	Cal. Interval	Cal. Due Date
EMI Test Receiver	R&S	ESR7	PWB0023	1 Year	2024/10/11
Spectrum Analyzer	R&S	FSV3044	PWB0024	1 Year	2024/10/11
Loop Antenna	R&S	HFH2-Z2E	PWB0026	1 Year	2024/10/21
TRILOG Broadband Antenna	Schwarzbeck	VULB9162	PWB0029	1 Year	2024/10/14
Double-Ridged Guide Antenna	ETS-Lindgren	3117	PWB0031	1 Year	2024/10/12
k Type Horn Antenna	Steatite Antennas	QMS-00880	PWB0035	1 Year	2024/10/17
Anechoic Chamber	ETS.LINDGREN	Fact 3-2m	PWB0003	3 Years	2026/06/05
Pre-Amplifier	R&S	SCU18F	PWB0034	1 Year	2024/10/11
Pre-Amplifier	R&S	SCU40F1	PWB0036	1 Year	2024/10/11

Pre-Amplifier	COM-MW	DLNA8	PWB0094	1 Year	2024/11/08
Test Software	R&S	ELEKTRA 4.20.2	/	/	/

3.4 Support Equipment List

Equipment	Manufacturer	Description	Model	Serial Number
External Antenna	SDN	Wi-Fi Antenna	SAA31578A	SDN-RD-FY-2020071001
EVB	QUECTEL	/	/	/
USB Cable	/	1m	/	/
Adapter	Xiamen Xinsenhai Electronics Co., Ltd	Output:5V/2A	P12F050200	/

3.5 Test Uncertainty

No.	Parameter	Uncertainty
1	Emission Bandwidth	1.9%
2	Occupied channel bandwidth	1.9%
3	Min emission bandwidth	1.9%
4	Unwanted Emissions Measurement	9kHz-7GHz: 1.21dB 7GHz-40GHz: 3.31dB
5	Radiated Band Edges and Spurious Emission	Below 1GHz: 4.88 dB Above 1GHz: 5.06 dB
6	Temperature	3 °C
7	Humidity	1.3 %
8	Supply voltages	0.006 V

4 Test Items Description

Ambient condition

Shielded Chamber

Temperature [°C]	23.1 to 23.3
Humidity [%RH]	49 to 55
Pressure [kPa]	101.3 to 102.1

Anechoic Chamber

Temperature [°C]	22.3 to 24.8
Humidity [%RH]	45 to 49
Pressure [kPa]	100.4 to 100.9

4.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

4.1.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

The minimum 6 dB bandwidth shall be at least 500 kHz

26dB and 99% Occupied bandwidth are reporting only.


4.1.2 Measuring Instruments

The measuring equipment is listed in the section 3.3 of this test report.

4.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01Section C) Emission bandwidth.
2. For 6dB BW, Set RBW = 100kHz.
For 26dB BW, Set RBW = approximately 1% of the emission bandwidth.
For 99% OBW, Set RBW = 1% to 5% of the OBW.
3. For 26dB BW. Set the VBW > RBW.
For 6dB BW & 99% OBW. Set the VBW $\geq 3 \times$ RBW
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer, Readjust RBW and repeat measurements needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the OBW and set the Video bandwidth (VBW) $\geq 3 \times$ RBW.
8. Measure and record the results in the test report.

4.1.4 Test Setup

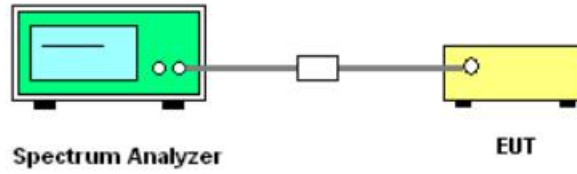

4.1.5 Test Results

See Appendix A.1.

4.2 Maximum Conducted Output Power Measurement

4.2.1 Limit of Maximum Conducted Output Power

<FCC 14 -30 CFR 15.407>

For the band 5.15–5.25 GHz.

(i) For an outdoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U–NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U–NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725–5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Measuring Instruments

The measuring equipment is listed in the section 3.3 of this test report.

4.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. Measure the duty cycle, x , of the transmitter output signal as described in II.B.
2. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
3. Set RBW = 1 MHz.
4. Set VBW $\geq$ 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
6. Sweep time = auto.
7. Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
8. Do not use sweep triggering. Allow the sweep to "free run."
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
11. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6 \text{ dB}$ if the duty cycle is 25%.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NI-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

4.2.4 Test Setup

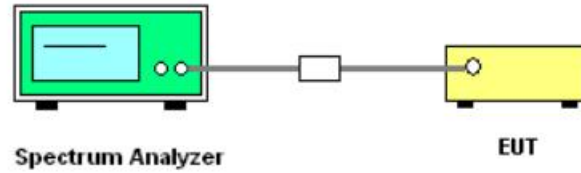

4.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.2.

4.3 Power Spectral Density Measurement

4.3.1 Limit of Power Spectral Density

Rule FCC Part 15.407(a)(1)/ Part 15.407(a)(2)/Part 15.407(a)(3)

For an indoor access point operating in the band 5.15–5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the 5.25-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2 Measuring Instruments

The measuring equipment is listed in the section 3.3 of this test report.


4.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Section F) Maximum power spectral density.

- 1.Measure the duty cycle.
- 2.Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 3.Set RBW $\geq 1/T$, where T is defined in II.B.I.a).
- 4.Set VBW ≥ 3 RBW.
- 5.If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas RBW ($< 500 \text{ kHz}$) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- 6.If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW ($< 1 \text{ MHz}$) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
7. Care must be taken to ensure that the measurements are performed during a period of continuous

transmission or are corrected upward for duty cycle.

4.3.4 Test Setup

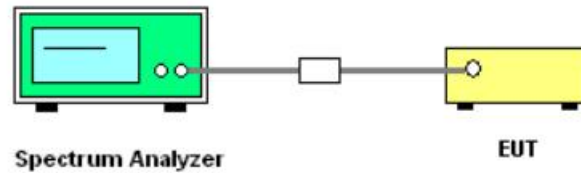

4.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.3.

4.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

4.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30-88	100	3
88 -216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dB μ V/m

d_{Meas} is the measurement distance, in m

4.4.2 Measuring Instruments

The measuring equipment is listed in the section 3.3 of this test report.

4.4.3 Test Procedures

- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Section G) Unwanted emissions measurement.
 - Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW= 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
- The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The antenna is a broadband antenna and its height is adjusted between one meter and four.