
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2024/08/14

140_WLAN2.4GHz_802.11b-1M_CH6_Front_25mm_ANT Main

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 37.69$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.22, 8.22, 8.22) @ 2437 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (12x15x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.03 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.533 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 2.64 W/kg

SAR(1 g) = 0.884 W/kg; SAR(10 g) = 0.396 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 1.07 W/kg

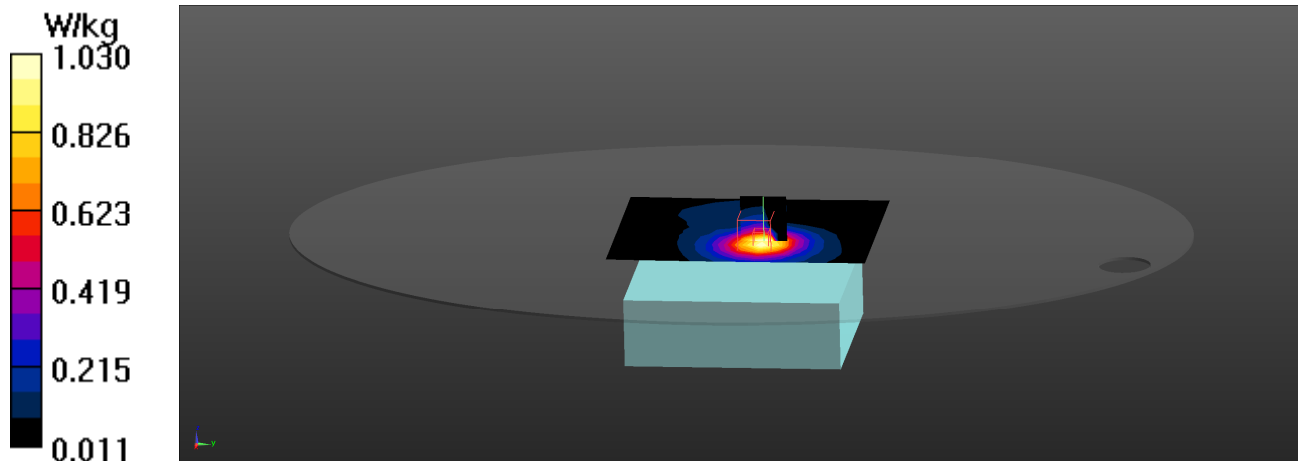

Test Laboratory: DEKRA

Date: 2024/07/17

63_LTE_Band4_QPSK_20M_20175_1RB-0offset_Bottom_25mm_ANT Main

Communication System: UID 0, LTE Band4; Frequency: 1732.5 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 39.90$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.71, 8.71, 8.71) @ 1732.5 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (16x22x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.198 W/kg

Configuration/Flat/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.57 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.227 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 63.9%

Maximum value of SAR (measured) = 0.198 W/kg

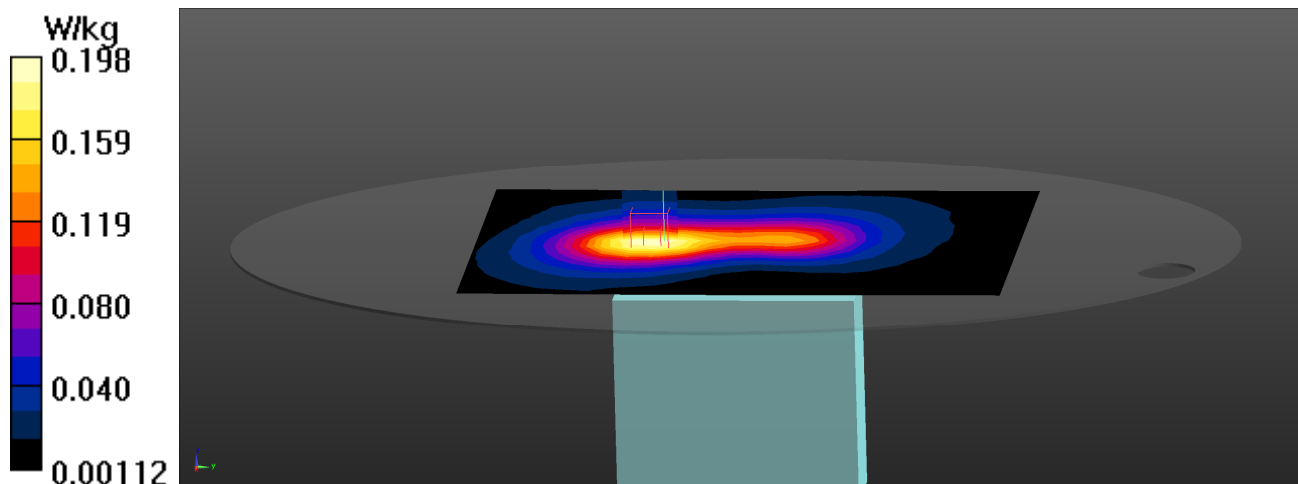

Test Laboratory: DEKRA

Date: 2024/07/20

6_LTE_Band7_QPSK_20M_21100_1RB-0offset_Right-side_25mm_ANT Main

Communication System: UID 0, LTE Band7; Frequency: 2535 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(7.97, 7.97, 7.97) @ 2535 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (9x13x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.603 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.48 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.602 W/kg

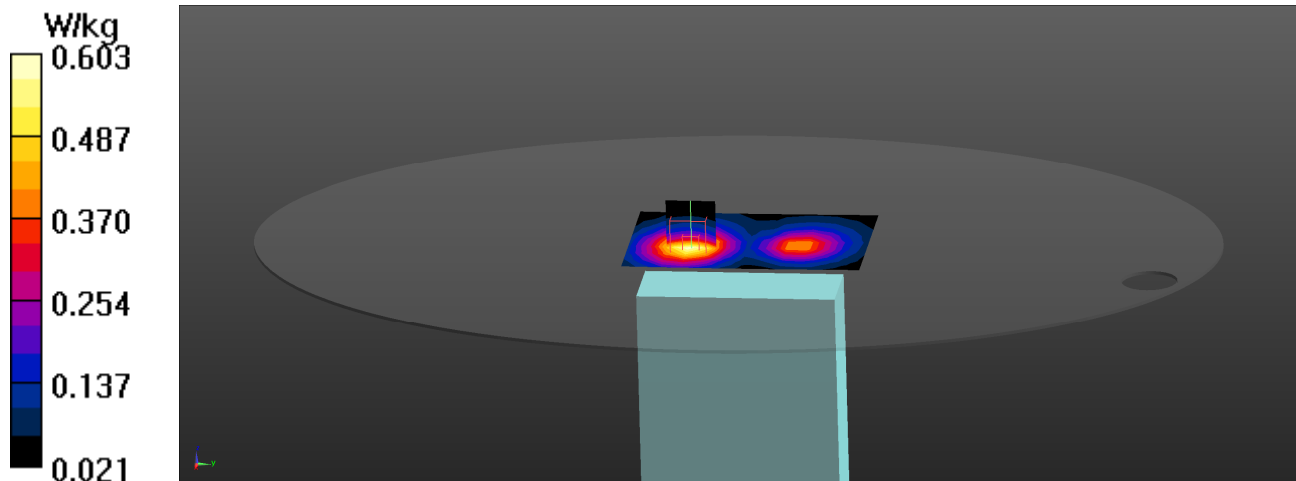

Test Laboratory: DEKRA

Date: 2024/07/21

44_LTE_Band12_QPSK_10M_23095_1RB-0offset_Front_25mm_ANT Main

Communication System: UID 0, LTE Band12; Frequency: 707.5 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.88$ S/m; $\epsilon_r = 44.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(10.5, 10.5, 10.5) @ 707.5 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (13x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.226 W/kg

Configuration/Flat/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.08 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 75.7%

Maximum value of SAR (measured) = 0.222 W/kg

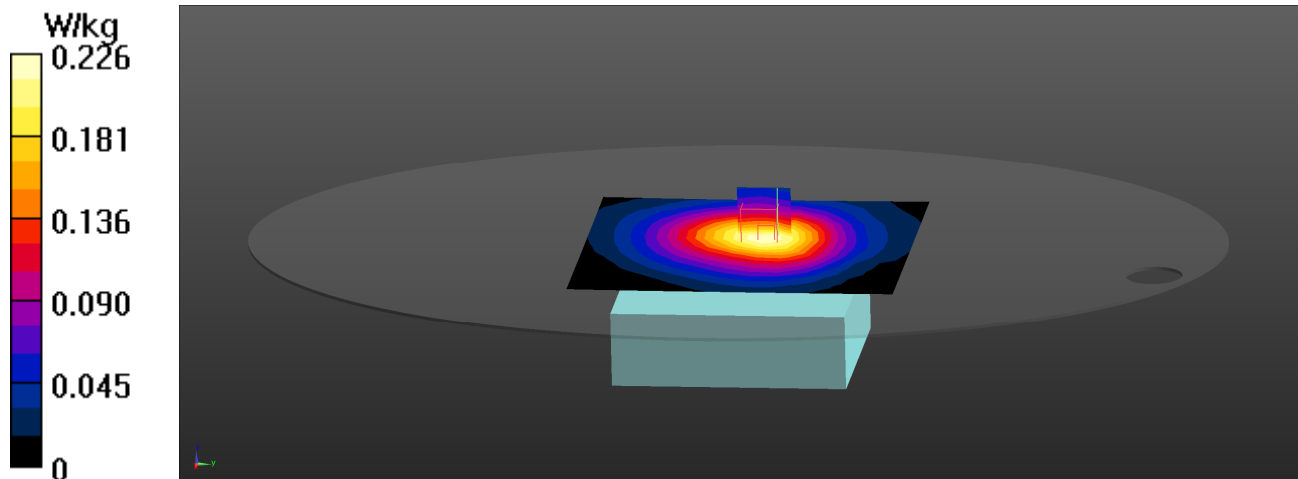

Test Laboratory: DEKRA

Date: 2024/07/21

45_LTE_Band13_QPSK_10M_23230_1RB-0offset_Front_25mm_ANT Main

Communication System: UID 0, LTE Band13; Frequency: 782 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 42.57$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(10.5, 10.5, 10.5) @ 782 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (13x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.171 W/kg

Configuration/Flat/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 13.89 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.104 W/kgSmallest distance from peaks to all points 3 dB below: Larger than measurement grid ($> 16 \text{ mm}$)

Ratio of SAR at M2 to SAR at M1 = 73.1%

Maximum value of SAR (measured) = 0.172 W/kg

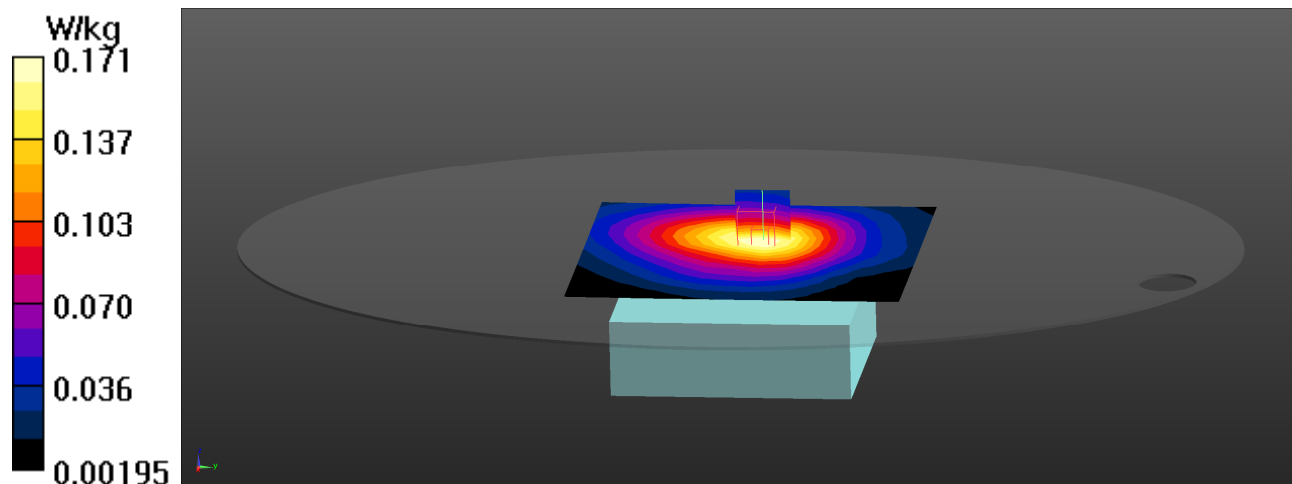

Test Laboratory: DEKRA

Date: 2024/07/19

2_LTE_Band25_QPSK_20M_26365_1RB-0offset_Right-side_25mm_ANT Main

Communication System: UID 0, LTE Band25; Frequency: 1882.5 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.21$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.46, 8.46, 8.46) @ 1882.5 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (9x12x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.201 W/kg

Configuration/Flat/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.493 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.229 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 0.205 W/kg

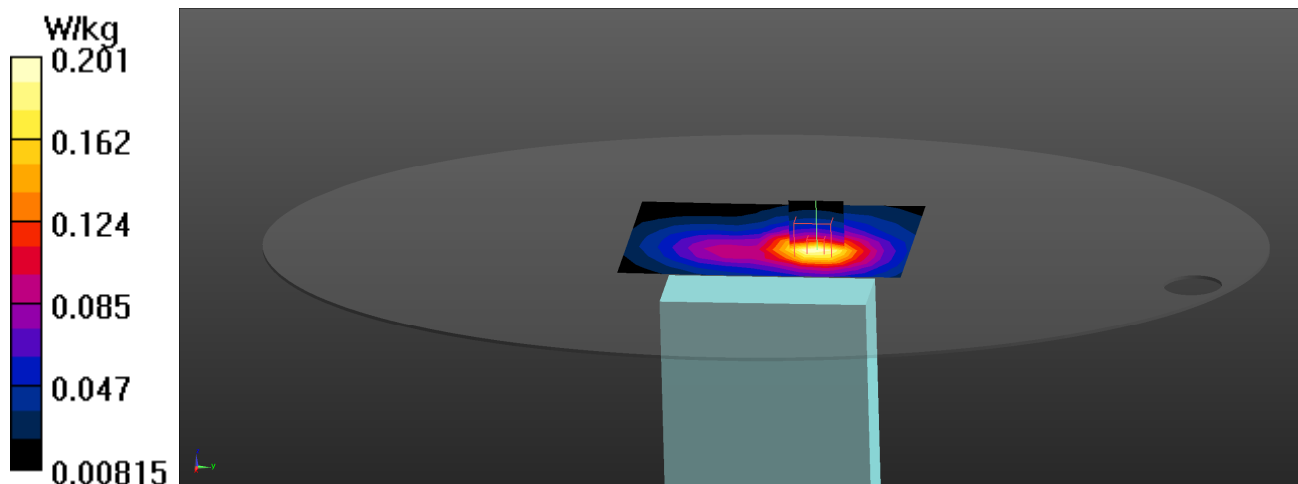

Test Laboratory: DEKRA

Date: 2024/07/16

40_LTE_Band26_QPSK_15M_26865_1RB-0offset_Front_25mm_ANT Main

Communication System: UID 0, LTE Band26; Frequency: 831.5 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 41.80$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(10.27, 10.27, 10.27) @ 831.5 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASY52, Version 52.10 (4);

Configuration/Flat/Area Scan (13x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.159 W/kg**Configuration/Flat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.03 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 0.163 W/kg

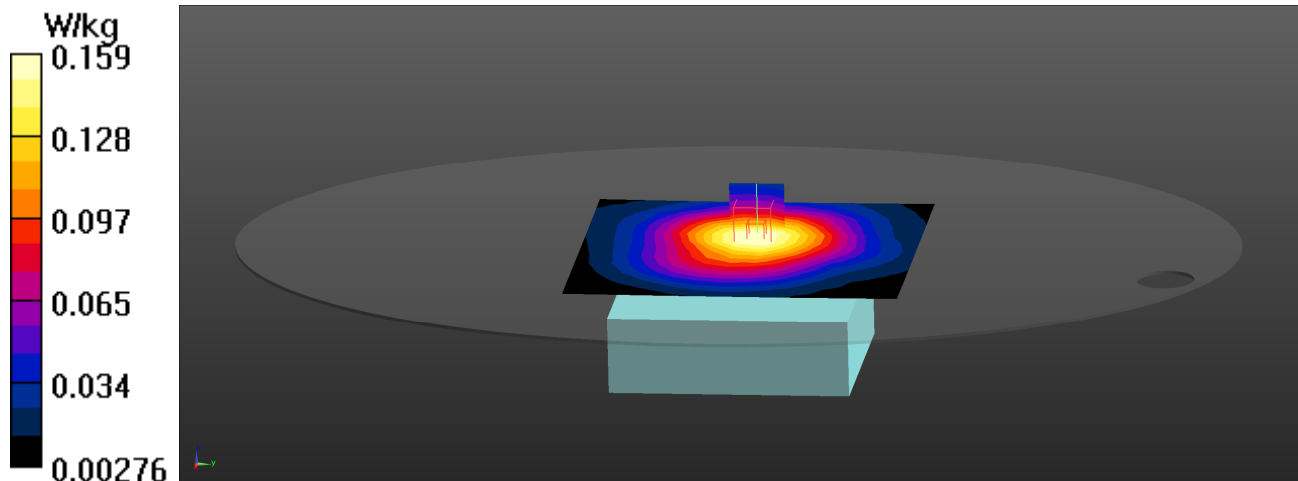

Test Laboratory: DEKRA

Date: 2024/07/20

125_LTE_Band41_QPSK_20M_40620_1RB-0offset_Righht-side_25mm_ANT Main

Communication System: UID 0, LTE-TDD Band41; Frequency: 2593 MHz

Communication System PAR: 2.014 dB

Medium parameters used: $f = 2593$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.85$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(7.97, 7.97, 7.97) @ 2593 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (11x14x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.244 W/kg**Configuration/Flat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.36 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.171 W/kg; SAR(10 g) = 0.098 W/kg

Smallest distance from peaks to all points 3 dB below = 20.5 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 0.255 W/kg

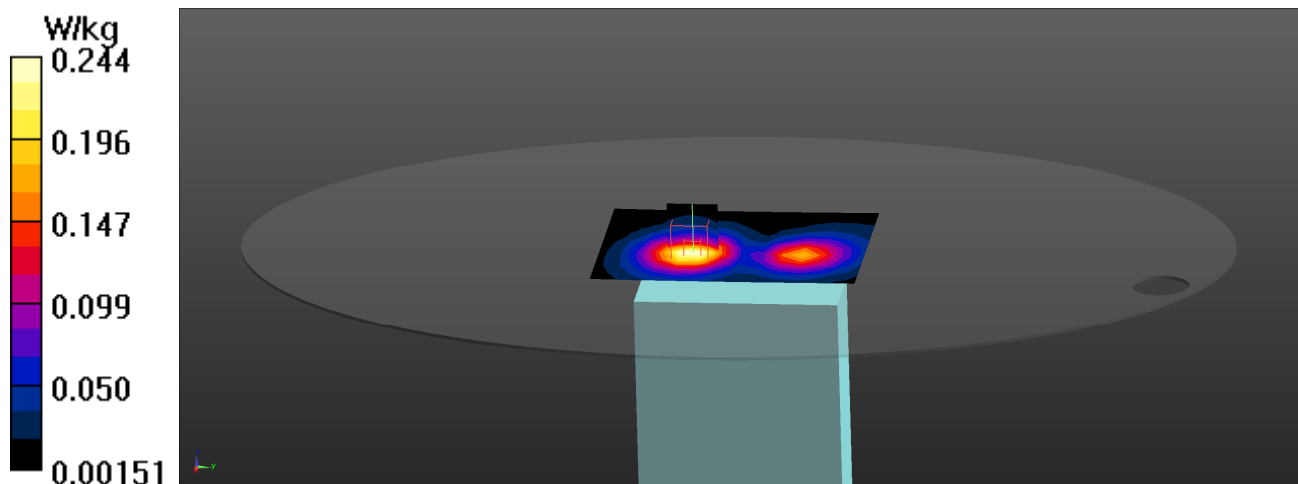

SAR Measurement Variability

Test Laboratory: DEKRA

Date: 2024/08/14

156_WLAN2.4GHz_802.11b-1M_CH6_Front_25mm_ANT Main_Verify

Communication System: UID 0, WLAN 2.4G; Frequency: 2437 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 37.69$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(8.22, 8.22, 8.22) @ 2437 MHz; Calibrated: 2024/02/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2024/02/15
- Phantom: ELI V8.0; Type: QD OVA 004 AA; Serial: 2139
- Measurement SW: DASYS2, Version 52.10 (4);

Configuration/Flat/Area Scan (12x15x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.22 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.60 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.847 W/kg; SAR(10 g) = 0.488 W/kg

Smallest distance from peaks to all points 3 dB below = 21.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 1.24 W/kg

