



**TEST REPORT OF A 2.4/5 GHZ IEEE 802.11g/a WLAN
CARDBUS CARD, BRAND AGERE, MODEL 1102, IN
CONFORMITY WITH 47 CFR PART 15 (July 22, 2003).**

FCC listed : 90828
Industry Canada : IC3501
VCCI registered : R-1518, C-1598

TNO Electronic Products & Services (EPS) B.V.
P.O. Box 15
9822 ZG Niekerk (NL)
Smidshornerweg 18
9822 TL Niekerk (NL)

Telephone: +31 594 505005
Telefax: +31 594 504804

E-mail: info@eps.tno.nl
Web: www.eps.tno.nl



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

MEASUREMENT/TECHNICAL REPORT

Agere Systems Nederland B.V.

Model : 1102

FCC ID: IMR1102CB

March 3, 2004

This report concerns:	Original grant/certification	Class 2 change	Verification
Equipment type:	Digital Transmission System		
Deferred grant requested per 47 CFR 0.457(d)(1)(ii) ?	Yes	No	
Report prepared by:	Name	: P.A.J.M. Robben, B.Sc.E.E.	
	Company name	: TNO Electronic Products & Services (EPS) B.V.	
	Address	: Smidshornerweg 18	
	Postal code/city	: 9822 ZG Niekerk	
	Mailing address	: P.O. Box 15	
	Postal code/city	: 9822 TL Niekerk	
	Country	: The Netherlands	
	Telephone number	: + 31 594 505 005	
	Telefax number	: + 31 594 504 804	
	E-mail	: info@eps.tno.nl	

The data taken for this test and report herein was done in accordance with 47 CFR Part 15 and the measurement procedures of ANSI C63.4-1992. TNO Electronic Products & Services (EPS) B.V. at Niekerk, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: March 3, 2004

Signature:

P. de Beer
TNO Electronic Products & Services (EPS) B.V.



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

Description of test item

Test item : 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer : Agere Systems Nederland B.V.
Brand : Agere
Model : 1102
Serial numbers : 04NG07900050 and 04NG07900057
Revision : C model
Receipt number : 2
Receipt date : February 16, 2004

Applicant information

Applicant's representative : Mr. W. Kerkhof
Company : Agere Systems Nederland B.V.
Address : Zadelstede 1-10
Postal code : 3431 JZ
City : Nieuwegein
PO-box : 755
Postal code : 3430 AT
City : Nieuwegein
Country : The Netherlands
Telephone number : +31 30 609 7534
Telefax number : +31 30 609 7556

Test(s) performed

Location : Niekirk
Test(s) started : February 16, 2004
Test(s) completed : February 23, 2004
Purpose of test(s) : Type approval / certification
Test specification(s) : 47 CFR Part 15 (July 22, 2003)

Test engineer : O.H. Hoekstra

H.J. Pieters

Report written by : P.A.J.M. Robben, B.Sc.E.E.

Project leader : H.J. Pieters

This report is in conformity with NEN-EN-ISO/IEC 17025: 2000.

This report shall not be reproduced, except in full, without the written permission of TNO Electronic Products & Services (EPS) B.V.
The test results relate only to the item(s) tested.



Table of contents

1	General information	6
1.1	Product description	6
1.2	Related submittal(s) and/or Grant(s)	6
1.3	Tested system details	6
1.4	Test methodology	7
1.5	Test facility	7
1.6	Product labeling	7
1.7	System test configuration	8
1.7.1	Justification	8
1.7.2	EUT test software	9
1.8	Special accessories	9
1.9	Equipment modifications	9
1.10	Configuration of the tested system	9
1.11	Block diagram(s) of the EUT	9
2	Radiated emission data	10
2.1	Test results with EUT operating in receive mode on channel 13	10
2.2	Test results with EUT operating in transmit mode on channel 13	11
2.2.1	DSSS mode	11
2.2.2	OFDM mode	12
3	Conducted emission data	13
3.1	AC mains with EUT operating in transmit and receive mode	13
3.2	Emission in restricted bands nearest to the band 2400 - 2483.5 MHz	14
3.2.1	DSSS mode	14
3.2.2	OFDM mode	15
4	Test results of measurements in conformity with 47 CFR Part 15.247	16
4.1	Minimum 6 dB bandwidth	16
4.1.1	DSSS mode	16
4.1.2	OFDM mode	16
4.2	Minimum 20 dB bandwidth	17
4.2.1	DSSS mode	17
4.2.2	OFDM mode	17
4.3	Maximum peak output power	18
4.3.1	DSSS mode	18
4.3.2	OFDM mode	18
4.4	Conducted emission data outside restricted bands	19
4.4.1	DSSS mode	19
4.4.2	OFDM mode	19
4.5	Peak power spectral density	20
4.5.1	DSSS mode	20
4.5.2	OFDM mode	20



5	Plots of measurement data.....	21
5.1	Emission in restricted bands nearest to the band 2400 - 2483.5 MHz.....	22
5.1.1	DSSS mode.....	22
5.1.2	OFDM mode.....	26
5.2	Minimum 6 dB bandwidth.....	30
5.2.1	DSSS mode.....	30
5.2.2	OFDM mode.....	38
5.3	Conducted emission data outside restricted bands	48
5.3.1	DSSS mode.....	48
5.3.2	OFDM mode.....	51
5.4	Peak power spectral density	54
5.4.1	DSSS mode.....	54
5.4.2	OFDM mode.....	62
5.5	Minimum 20 dB bandwidth.....	72
5.5.1	DSSS mode.....	72
5.5.2	OFDM mode.....	76
6	List of utilized test equipment	81



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

1 General information

1.1 Product description

The 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card, brand Agere, model 1102, is designed to operate in the 2.4 GHz ISM frequency band, channels 12 to 13 (2467 MHz to 2472 MHz), as specified by the Federal Communications Commission in the USA.

The 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card, brand Agere, model 1102, utilizes Direct Sequence Spread Spectrum (DSSS) and OFDM modulation techniques.

The 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card, brand Agere, model 1102, incorporates an integral antenna.

This test report is intended to be an addendum to TNO test report number 04021601.r01 in order to prove compliance of the 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card, brand Agere, model 1102, with the applicable FCC Rules in case it is operated in the whole 2.4 GHz ISM frequency band, channels 1 to 13 (2400 MHz to 2472 MHz).

1.2 Related submittal(s) and/or Grant(s)

Not applicable.

1.3 Tested system details

Details and an overview of the system and all its components, as it has been tested, can be found in table 1 below. FCC ID's are stated in this overview where applicable. The EUT is listed in the first row of this table 1.

Description	Model number	Serial number	FCC ID	Cable descriptions
2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card	1102	04NG07900050 and 04NG07900057	IMR1102CB	None.
Dell notebook computer	C600	4R4950J	n.a. (DoC)	-Unshielded DC power cord to AC/DC adapter; -Shielded parallel cable to printer; -Shielded mouse cable to mouse.
Dell AC/DC power adapter 100-240 VAC/1.5 Amps to +20 VDC/3.5 Amps	AA20031, PA-6 family	CN-09364U-16291-13N-0AT2	n.a. (DoC)	-Unshielded DC power cord to notebook computer; -Unshielded power cord to AC mains.
Hewlett-Packard Mouse	C3751B	LZA73702141	n.a. (DoC)	-Shielded mouse cable to notebook computer.
HP DeskJet 895Cxi	C6410A	ES8B42307H	n.a. (DoC)	-Unshielded DC power cord to AC/DC adapter; -Shielded parallel cable to notebook computer.
HP AC/DC power adapter 100-240 VAC/1 Amps to +18 VDC/1.1 Amps	C6409-60014	n.a.	n.a. (DoC)	-Unshielded DC power cord to printer; -Unshielded power cord to AC mains.

Table 1 - Tested system details overview.



Test specification(s):	47 CFR Part 15 (July 22, 2003)
Description of EUT:	2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer:	Agere Systems Nederland B.V.
Brand mark:	Agere
Model:	1102
FCC ID:	IMR1102CB

1.4 Test methodology

The test methodology used is based on the requirements of 47 CFR Part 15 (July 22, 2003), sections 15.107, 15.207, 15.109, 15.209, 15.205 and 15.247.

The test methods, which have been used, are based on ANSI C63.4: 1992.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters. Below 30 MHz the radiated emission tests were carried out at measurement distances of 3 and 10 meters. The test results regarding the radiated emission tests on frequencies below 30 MHz have been extrapolated in order to determine the field strength of the measured values at measurement distances of 30 and 300 meters (as required by 47 CFR Part 15).

The bandwidth of the receiver is switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

Radiated emission tests in the frequency range of 1 GHz – 26.5 GHz were performed with appropriate pre-amplifiers, antennas and a spectrum analyzer. At frequencies on which radiated emissions were found the level at the input of the pre-amplifier was reproduced by means of a RF signal generator. The output level of the signal generator was then increased with the antenna factor in order to obtain the actual field strength value for each individual frequency on which radiated emissions were found.

1.5 Test facility

The Federal Communications Commission has reviewed the technical characteristics of the test facilities at TNO Electronic Products & Services (EPS) B.V., located in Niekerk, 9822 TL Smidshornerweg 18, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948, per October 23, 2000.

The description of the test facilities has been filed under registration number 90828 at the Office of the Federal Communications Commission. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The list of all public test facilities is available on the Internet at <http://www.fcc.gov>.

1.6 Product labeling

In accordance with 47 CFR Part 15.19 (a)(3) the following text shall be placed on a label, which is attached to the EUT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

In accordance with 47 CFR Part 2.925 (a)(1), the FCC ID shall be placed on a label, which is attached to the EUT.

For further details about the labeling requirements (size, legibility, etc.) as set by the Federal Communications Commission see 47 CFR Part 15.19 (a)(3), 47 CFR Part 15.19 (b)(2), 47 CFR Part 15.19 (b)(4), 47 CFR Part 2.925 and 47 CFR Part 2.926.



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

1.7 System test configuration

1.7.1 Justification

The EUT was connected to the Cardbus slot of the host system by means of an “extender card” for the purpose of proving compliance with the applicable parts of 47 CFR Part 15 in case no additional shielding of the EUT is provided by the host system. The EUT was tested while using the integral antenna of the EUT.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4: 1992.

Tests were performed at the lowest operating frequency (channel 12: 2467 MHz) and the highest operating frequency (channel 13: 2472 MHz). Further details may be found in table 2 below.

Channel	Operating frequencies (MHz)	Rated output power (dBm)	Test performed
12	2467	+17.9	yes
13	2472	+17.9	yes

Table 2 - Specification of channels and rated maximum output power.

The EUT is able to transmit at various transmission bit-rates and utilizes a number of modulation techniques and modulation schemes. Table 3 lists all possible transmission bit-rates, modulation techniques and modulation schemes the EUT may utilize. The choice of the various transmission bit-rates which should be selected during all tests is based on the results of pre-scans from which the worst-case behavior of the EUT at certain transmission bit-rates could be determined.

Transmission bit-rate (Mbit/s)	Modulation technique	Modulation	Test performed
1	DSSS	BPSK	yes
2	DSSS	BPSK	yes
5.5	DSSS	QPSK	yes
11	DSSS	QPSK	yes
6	OFDM	BPSK	yes
9	OFDM	BPSK	yes
12	OFDM	QPSK	no
18	OFDM	QPSK	yes
24	OFDM	16 QAM	no
36	OFDM	16 QAM	yes
48	OFDM	64 QAM	no
54	OFDM	64 QAM	yes

Table 3 - Specification of transmission bit-rates, modulation techniques and modulation schemes.



Test specification(s):	47 CFR Part 15 (July 22, 2003)
Description of EUT:	2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer:	Agere Systems Nederland B.V.
Brand mark:	Agere
Model:	1102
FCC ID:	IMR1102CB

1.7.2 EUT test software

The EUT could be enabled to transmit or receive continuously on channels 12 (2467 MHz) and 13 (2472 MHz) by means of test software, which was supplied by the manufacturer of the EUT.

Furthermore, the utilized test software also enables access to transmission bit-rate settings in the range of: 1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s (DSSS mode); 6 Mbit/s, 9 Mbit/s, 12 Mbit/s, 18 Mbit/s, 24 Mbit/s, 36 Mbit/s, 48 Mbit/s and 54 Mbit/s (OFDM mode).

The test software enabled operation of the device with a duty-cycle of 100% in continuous transmit mode.

1.8 Special accessories

No special accessories are used and/or needed to achieve compliance with the appropriate sections of 47 CFR Part 15.

1.9 Equipment modifications

No modifications have been made to the equipment in order to achieve compliance with the appropriate sections of 47 CFR Part 15.

1.10 Configuration of the tested system

Not applicable. See table 1 in section 1.3 of this test report.

1.11 Block diagram(s) of the EUT

The block diagram is available as part of the documentation which is to be submitted to the FCC.



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

2 Radiated emission data

2.1 Test results with EUT operating in receive mode on channel 13

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.109 and 47 CFR Part 15.209 with the EUT operating in receive mode on channel 13 (2472 MHz), are depicted in table 4.

Frequency (MHz)	Test results quasi peak (dB μ V/m)		Test results average (dB μ V/m)		Test results peak (dB μ V/m)		Resolution bandwidth (kHz)	Quasi peak limits (dB μ V/m)	Average limits (dB μ V/m)	Peak limits (dB μ V/m)
	V	H	V	H	V	H				
78.44	21.0	15.9	-	-	-	-	120	46.0	-	-
165.09	21.9	13.9	-	-	-	-	120	46.0	-	-
166.52	25.2	30.2	-	-	-	-	120	46.0	-	-
166.67	25.8	26.8	-	-	-	-	120	46.0	-	-
167.06	25.5	30.5	-	-	-	-	120	46.0	-	-
167.91	25.1	30.6	-	-	-	-	120	46.0	-	-
168.21	18.1	23.0	-	-	-	-	120	46.0	-	-
484.00	26.4	23.9	-	-	-	-	120	46.0	-	-
4944.00	-	-	n.t.	n.t.	38.9	40.0	1000	-	54.0	74.0
7416.00	-	-	n.t.	n.t.	<38.0	<38.0	1000	-	54.0	74.0
9888.00	-	-	n.t.	n.t.	37.6	35.7	1000	-	54.0	74.0

Table 4 - Test results with the EUT operating in receive mode on channel 13 (2472 MHz).

Note: Above 1 GHz, all measured values of the spurious emissions with the detector in peak mode, are below the applicable limits, which are valid when using an average detector. Therefore, all spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested), unless otherwise noted.

Note: Field strength values of radiated emissions at frequencies not listed in table 4 are more than 20 dB below the applicable limit.

Test engineer

Signature : 

Name : H.J. Pieters

Date : February 16, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

2.2 Test results with EUT operating in transmit mode on channel 13

2.2.1 DSSS mode

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.109, 47 CFR Part 15.209 and 47 CFR Part 15.205 (restricted bands of operation) with the EUT operating in transmit mode on channel 13 (2472 MHz), are depicted in table 5.

Frequency (MHz)	Test results quasi peak (dB μ V/m)		Test results average (dB μ V/m)		Test results peak (dB μ V/m)		Resolution bandwidth (kHz)	Quasi peak limits (dB μ V/m)	Average limits (dB μ V/m)	Peak limits (dB μ V/m)
	V	H	V	H	V	H				
78.44	21.0	15.9	-	-	-	-	120	46.0	-	-
165.09	21.9	13.9	-	-	-	-	120	46.0	-	-
166.52	25.2	30.2	-	-	-	-	120	46.0	-	-
166.67	25.8	26.8	-	-	-	-	120	46.0	-	-
167.06	25.5	30.5	-	-	-	-	120	46.0	-	-
167.91	25.1	30.6	-	-	-	-	120	46.0	-	-
168.21	18.1	23.0	-	-	-	-	120	46.0	-	-
484.00	26.4	23.9	-	-	-	-	120	46.0	-	-
4944.00	-	-	n.t.	n.t.	< 36.0	37.5	1000	-	54.0	74.0
7416.00	-	-	n.t.	n.t.	< 42.0	< 42.0	1000	-	54.0	74.0
9888.00	-	-	n.t.	n.t.	48.7	48.6	1000	-	54.0	74.0
19776.00	-	-	n.t.	n.t.	<40.0	<40.0	1000	-	54.0	74.0

Table 5 - Test results with the EUT operating in transmit mode on channel 13 (2472 MHz).

Note: Above 1 GHz, most measured values of the spurious emissions with the detector in peak mode, are below the applicable limits, which are valid when using an average detector. Therefore, most spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested), unless otherwise noted.

Note: Radiated emission tests have been performed with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 5.

Note: Field strength values of radiated emissions at frequencies not listed in table 5 are more than 20 dB below the applicable limit.

Test engineer

Signature : 

Name : H.J. Pieters

Date : February 23, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
 Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
 Manufacturer: Agere Systems Nederland B.V.
 Brand mark: Agere
 Model: 1102
 FCC ID: IMR1102CB

2.2.2 OFDM mode

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15.109, 47 CFR Part 15.209 and 47 CFR Part 15.205 (restricted bands of operation) with the EUT operating in transmit mode on channel 13 (2472 MHz), are depicted in table 6.

Frequency (MHz)	Test results quasi peak (dBμV/m)		Test results average (dBμV/m)		Test results peak (dBμV/m)		Resolution bandwidth (kHz)	Quasi peak limits (dBμV/m)	Average limits (dBμV/m)	Peak limits (dBμV/m)
	V	H	V	H	V	H				
78.44	21.0	15.9	-	-	-	-	120	46.0	-	-
165.09	21.9	13.9	-	-	-	-	120	46.0	-	-
166.52	25.2	30.2	-	-	-	-	120	46.0	-	-
166.67	25.8	26.8	-	-	-	-	120	46.0	-	-
167.06	25.5	30.5	-	-	-	-	120	46.0	-	-
167.91	25.1	30.6	-	-	-	-	120	46.0	-	-
168.21	18.1	23.0	-	-	-	-	120	46.0	-	-
484.00	26.4	23.9	-	-	-	-	120	46.0	-	-
4944.00	-	-	n.t.	n.t.	<42.0	<42.0	1000	-	54.0	74.0
7416.00	-	-	n.t.	n.t.	<42.0	<42.0	1000	-	54.0	74.0
9888.00	-	-	n.t.	n.t.	49.5	49.3	1000	-	54.0	74.0
19776.00	-	-	n.t.	n.t.	<42.0	<42.0	1000	-	54.0	74.0

Table 6 - Test results with the EUT operating in transmit mode on channel 13 (2472 MHz).

Note: Above 1 GHz, most measured values of the spurious emissions with the detector in peak mode, are below the applicable limits, which are valid when using an average detector. Therefore, most spurious emissions above 1 GHz have been measured with the peak detector only (n.t. = not tested), unless otherwise noted.

Note: Radiated emission tests have been performed with all possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 6.

Note: Field strength values of radiated emissions at frequencies not listed in table 6 are more than 20 dB below the applicable limit.

Test engineer

Signature

Name : H.J. Pieters

Date : February 23, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

3 Conducted emission data

3.1 AC mains with EUT operating in transmit and receive mode

The (worst-case) results of the conducted emission tests at the 110 Volts AC mains connection terminals of the AC/DC power adapter of the notebook computer in which the EUT is mounted, carried out in accordance with 47 CFR Part 15.107 and 47 CFR Part 15.207 with the EUT operating in transmit and receive mode on channels 12 (2467 MHz) and 13 (2472 MHz) while utilizing all possible transmission bit-rates (DSSS mode: 1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s, OFDM mode: 6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s), are depicted in table 7.

Frequency (MHz)	Measurement results dB(μV) Neutral		Measurement results dB(μV) Line 1		Limits dB(μV)		Margin (dB) Neutral		Margin (dB) Line 1		Result
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV	
0.15	43.2	13.9	43.0	14.4	66.0	56.0	-22.8	-42.1	-23.0	-41.6	PASS
0.20	46.5	38.8	46.6	39.1	63.6	53.6	-17.1	-14.8	-17.0	-14.5	PASS
0.41	40.3	37.3	40.2	37.1	57.6	47.6	-17.3	-10.3	-17.4	-10.5	PASS
1.24	38.4	35.7	38.0	35.1	56.0	46.0	-17.6	-10.3	-18.0	-10.9	PASS
3.28	35.4	31.0	35.1	30.6	56.0	46.0	-20.6	-15.0	-20.9	-15.4	PASS
6.50	35.0	29.9	34.6	29.4	60.0	50.0	-25.0	-20.1	-25.4	-20.6	PASS
7.72	31.4	26.1	31.6	26.3	60.0	50.0	-28.6	-23.9	-28.4	-23.7	PASS
9.50	29.1	23.6	29.3	23.8	60.0	50.0	-30.9	-26.4	-30.7	-26.2	PASS
12.30	22.7	17.7	22.6	17.5	60.0	50.0	-37.3	-32.3	-37.4	-32.5	PASS
17.50	14.2	8.4	15.8	10.4	60.0	50.0	-45.8	-41.6	-44.2	-39.6	PASS
25.00	23.4	18.3	23.9	18.8	60.0	50.0	-36.6	-31.7	-36.1	-31.2	PASS

Table 7 - Test results with the EUT operating in transmit and receive mode.

Note: Disturbance voltage values of conducted emissions at frequencies not listed in table 7 are more than 20 dB below the applicable limit.

Test engineer

Signature

Name : H.J. Pieters

Date : February 23, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

3.2 Emission in restricted bands nearest to the band 2400 - 2483.5 MHz

3.2.1 DSSS mode

The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15.205 (restricted bands of operation, with the emphasis on the emission in restricted bands nearest to the band 2400-2483.5 MHz) with the EUT operating in transmit mode and on channel 12 (2467 MHz), are depicted in table 8. The plots of the measurement results may be found in section 5.1.1 of this test report.

Frequency (MHz)	Test results quasi peak (dBμV/m)	Test results average (dBμV/m)	Test results peak (dBμV/m)	Resolution bandwidth (kHz)	Quasi peak limits (dBμV/m)	Average limits (dBμV/m)	Peak limits (dBμV/m)
2483.5	-	51.6	64.0	1000	-	54.0	74.0
2484.3	-	52.4	62.8	1000	-	54.0	74.0

Table 8 - Test results with the EUT operating in transmit mode and on channel 12 (2467 MHz).

Note: Conducted emission tests have been performed with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 8.

Note: Field strength values of conducted emissions at frequencies not listed in table 8 are more than 20 dB below the applicable limit.

The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15.205 (restricted bands of operation, with the emphasis on the emission in restricted bands nearest to the band 2400-2483.5 MHz) with the EUT operating in transmit mode and on channel 13 (2472 MHz), are depicted in table 9. The plots of the measurement results may be found in section 5.1.1 of this test report.

Frequency (MHz)	Test results quasi peak (dBμV/m)	Test results average (dBμV/m)	Test results peak (dBμV/m)	Resolution bandwidth (kHz)	Quasi peak limits (dBμV/m)	Average limits (dBμV/m)	Peak limits (dBμV/m)
2485.6	-	53.7	62.7	1000	-	54.0	74.0
2487.4	-	45.6	63.7	1000	-	54.0	74.0

Table 9 - Test results with the EUT operating in transmit mode and on channel 13 (2472 MHz).

Note: Conducted emission tests have been performed with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 9.

Note: Field strength values of conducted emissions at frequencies not listed in table 9 are more than 20 dB below the applicable limit.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : February 18, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

3.2.2 OFDM mode

The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15.205 (restricted bands of operation, with the emphasis on the emission in restricted bands nearest to the band 2400-2483.5 MHz) with the EUT operating in transmit mode and on channel 12 (2467 MHz), are depicted in table 10. The plots of the measurement results may be found in section 5.1.2 of this test report.

Frequency (MHz)	Test results quasi peak (dBµV/m)	Test results average (dBµV/m)	Test results peak (dBµV/m)	Resolution bandwidth (kHz)	Quasi peak limits (dBµV/m)	Average limits (dBµV/m)	Peak limits (dBµV/m)
2483.5	-	53.9	65.9	1000	-	54.0	74.0
2484.2	-	53.2	71.3	1000	-	54.0	74.0

Table 10 - Test results with the EUT operating in transmit mode and on channel 12 (2467 MHz).

Note: Conducted emission tests have been performed with all possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 10.

Note: Field strength values of conducted emissions at frequencies not listed in table 10 are more than 20 dB below the applicable limit.

The results of the conducted emission tests, carried out in accordance with 47 CFR Part 15.205 (restricted bands of operation, with the emphasis on the emission in restricted bands nearest to the band 2400-2483.5 MHz) with the EUT operating in transmit mode and on channel 13 (2472 MHz), are depicted in table 11. The plots of the measurement results may be found in section 5.1.2 of this test report.

Frequency (MHz)	Test results quasi peak (dBµV/m)	Test results average (dBµV/m)	Test results peak (dBµV/m)	Resolution bandwidth (kHz)	Quasi peak limits (dBµV/m)	Average limits (dBµV/m)	Peak limits (dBµV/m)
2483.5	-	53.8	72.2	1000	-	54.0	74.0

Table 11 - Test results with the EUT operating in transmit mode and on channel 13 (2472 MHz).

Note: Conducted emission tests have been performed with all possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s) in transmit mode. The highest values measured of the spurious emission components are reported by means of table 11.

Note: Field strength values of conducted emissions at frequencies not listed in table 11 are more than 20 dB below the applicable limit.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : February 18, 2004



4 Test results of measurements in conformity with 47 CFR Part 15.247

4.1 Minimum 6 dB bandwidth

4.1.1 DSSS mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (a)(2), are depicted in table 12.

The plots of the measurement results may be found in section 5.2.1 of this test report.

Transmission bit-rate (Mbit/s)	Minimum 6 dB bandwidth (kHz)		Limit (kHz)
	Channel 12 (2467 MHz)	Channel 13 (2472 MHz)	
1	12075	12150	>500
2	12750	12750	>500
5.5	12150	12450	>500
11	11250	11250	>500

Table 12 - Minimum 6 dB bandwidth.

4.1.2 OFDM mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (a)(2), are depicted in table 13.

The plots of the measurement results may be found in section 5.2.2 of this test report.

Transmission bit-rate (Mbit/s)	Minimum 6 dB bandwidth (kHz)		Limit (kHz)
	Channel 12 (2467 MHz)	Channel 13 (2472 MHz)	
6	16650	16650	>500
9	16725	16650	>500
18	16650	16575	>500
36	16650	16650	>500
54	16575	16650	>500

Table 13 - Minimum 6 dB bandwidth.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : February 16, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

4.2 Minimum 20 dB bandwidth

4.2.1 DSSS mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.215 (c), are depicted in table 14. These tests have been performed in order to show compliance with the requirement that the 20 dB bandwidth must fall within the allowed band of operation. The EUT was operating on channel 13 (2472 MHz) during all tests.

The plots of the measurement results may be found in section 5.5.1 of this test report.

Transmission bit-rate (Mbit/s)	Minimum 20 dB bandwidth (MHz, upper frequency)	Limit (MHz)
1	2480.25	2483.50
2	2480.40	2483.50
5.5	2480.40	2483.50
11	2480.33	2483.50

Table 14 - Minimum 20 dB bandwidth.

4.2.2 OFDM mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.215 (c), are depicted in table 15. These tests have been performed in order to show compliance with the requirement that the 20 dB bandwidth must fall within the allowed band of operation. The EUT was operating on channel 13 (2472 MHz) during all tests.

The plots of the measurement results may be found in section 5.5.2 of this test report.

Transmission bit-rate (Mbit/s)	Minimum 20 dB bandwidth (MHz, upper frequency)	Limit (MHz)
6	2481.98	2483.50
9	2482.05	2483.50
18	2482.13	2483.50
36	2482.05	2483.50
54	2481.98	2483.50

Table 15 - Minimum 20 dB bandwidth.

Test engineer

Signature

: 

Name : Onno H. Hoekstra

Date : February 16, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

4.3 Maximum peak output power

4.3.1 DSSS mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (b)(3), are depicted in table 16. The maximum peak output power (conducted) was measured directly at the antenna connector.

Transmission bit-rate (Mbit/s)	Maximum peak output power (conducted, dBm)		Limit (dBm) Antenna gain < 6 dBi
	Channel 12 (2467 MHz)	Channel 13 (2472 MHz)	
1	11.5	8.3	30.0
2	11.8	8.4	30.0
5.5	11.1	7.7	30.0
11	11.8	8.6	30.0

Table 16 - Maximum peak output power (conducted).

Note: During the measurements, the AC mains supply voltage of the notebook PC to which the EUT is connected in was varied between 85% and 115% of the nominal value. The maximum measured values are depicted in table 16. No differences in measurement results, due to the AC mains voltage variations between 85% and 115% from the nominal value, have been observed. As the antenna gain does not exceed 6 dBi, no reduction of the maximum peak output power is required.

4.3.2 OFDM mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (b)(3), are depicted in table 17. The maximum peak output power (conducted) was measured directly at the antenna connector.

Transmission bit-rate (Mbit/s)	Maximum peak output power (conducted, dBm)		Limit (dBm) Antenna gain < 6 dBi
	Channel 12 (2467 MHz)	Channel 13 (2472 MHz)	
6	17.5	14.7	30.0
9	17.2	14.7	30.0
18	17.5	14.7	30.0
36	17.9	15.0	30.0
54	17.9	14.8	30.0

Table 17 - Maximum peak output power (conducted).

Note: During the measurements, the AC mains supply voltage of the notebook PC to which the EUT is connected in was varied between 85% and 115% of the nominal value. The maximum measured values are depicted in table 17. No differences in measurement results, due to the AC mains voltage variations between 85% and 115% from the nominal value, have been observed. As the antenna gain does not exceed 6 dBi, no reduction of the maximum peak output power is required.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : February 18, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

4.4 Conducted emission data outside restricted bands

4.4.1 DSSS mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (c), are depicted in table 18.

Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band.

The plots of the measurement results may be found in section 5.3.1 of this test report.

Frequency (MHz)	Level below working channel (dB)	Limit of level below working channel (dB)
all frequencies	< -40.0	< -20.0

Table 18 - Conducted emission data outside restricted bands.

Note: Worst case measurement values for transmissions with all possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s) and channel 12 (2467 MHz) and channel 13 (2472 MHz)) combinations.

4.4.2 OFDM mode

The results of tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (c), are depicted in table 19.

Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band.


The plots of the measurement results may be found in section 5.3.2 of this test report.

Frequency (MHz)	Level below working channel (dB)	Limit of level below working channel (dB)
2001.0	-42.5	< -20.0
other frequencies	< -40.0	< -20.0

Table 19 - Conducted emission data outside restricted bands.

Note: Worst case measurement values for transmissions with all possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s) and channel 12 (2467 MHz) channel 13 (2472 MHz)) combinations.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : February 18, 2004



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

4.5 Peak power spectral density

4.5.1 DSSS mode

The results of the tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (d), are depicted in table 20.

The plots of the measurement results may be found in section 5.4.1 of this test report.

Transmission bit-rate (Mbit/s)	Peak power spectral density (conducted) in any 3 kHz band (dBm)		Limit (dBm)
	Channel 12 (2467 MHz)	Channel 13 (2472 MHz)	
1	-14.1	-17.5	<8.0
2	-14.0	-17.2	<8.0
5.5	-12.9	-15.2	<8.0
11	-11.7	-14.4	<8.0

Table 20 - Peak power spectral density.

4.5.2 OFDM mode

The results of the tests on the EUT, carried out in accordance with 47 CFR Part 15.247 (d), are depicted in table 21.

The plots of the measurement results may be found in section 5.4.2 of this test report.

Transmission bit-rate (Mbit/s)	Peak power spectral density (conducted) in any 3 kHz band (dBm)		Limit (dBm)
	Channel 12 (2467 MHz)	Channel 13 (2472 MHz)	
6	-13.9	-12.6	<8.0
9	-13.8	-12.6	<8.0
18	-14.0	-12.9	<8.0
36	-14.0	-12.9	<8.0
54	-14.1	-12.9	<8.0

Table 21 - Peak power spectral density.

Test engineer

Signature : 

Name : Onno H. Hoekstra

Date : February 17, 2004



Test specification(s):	47 CFR Part 15 (July 22, 2003)
Description of EUT:	2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer:	Agere Systems Nederland B.V.
Brand mark:	Agere
Model:	1102
FCC ID:	IMR1102CB

5 Plots of measurement data

For reference purposes and visualization of spectrum analyzer settings during the measurements, a selection of plots of measurement data is included in this test report.

Test engineer

Signature

:

A handwritten signature in blue ink, which appears to read 'Onno H. Hoekstra', is placed next to the colon.

Name


: Onno H. Hoekstra

Date

: February 18, 2004

5.1 Emission in restricted bands nearest to the band 2400 - 2483.5 MHz

5.1.1 DSSS mode

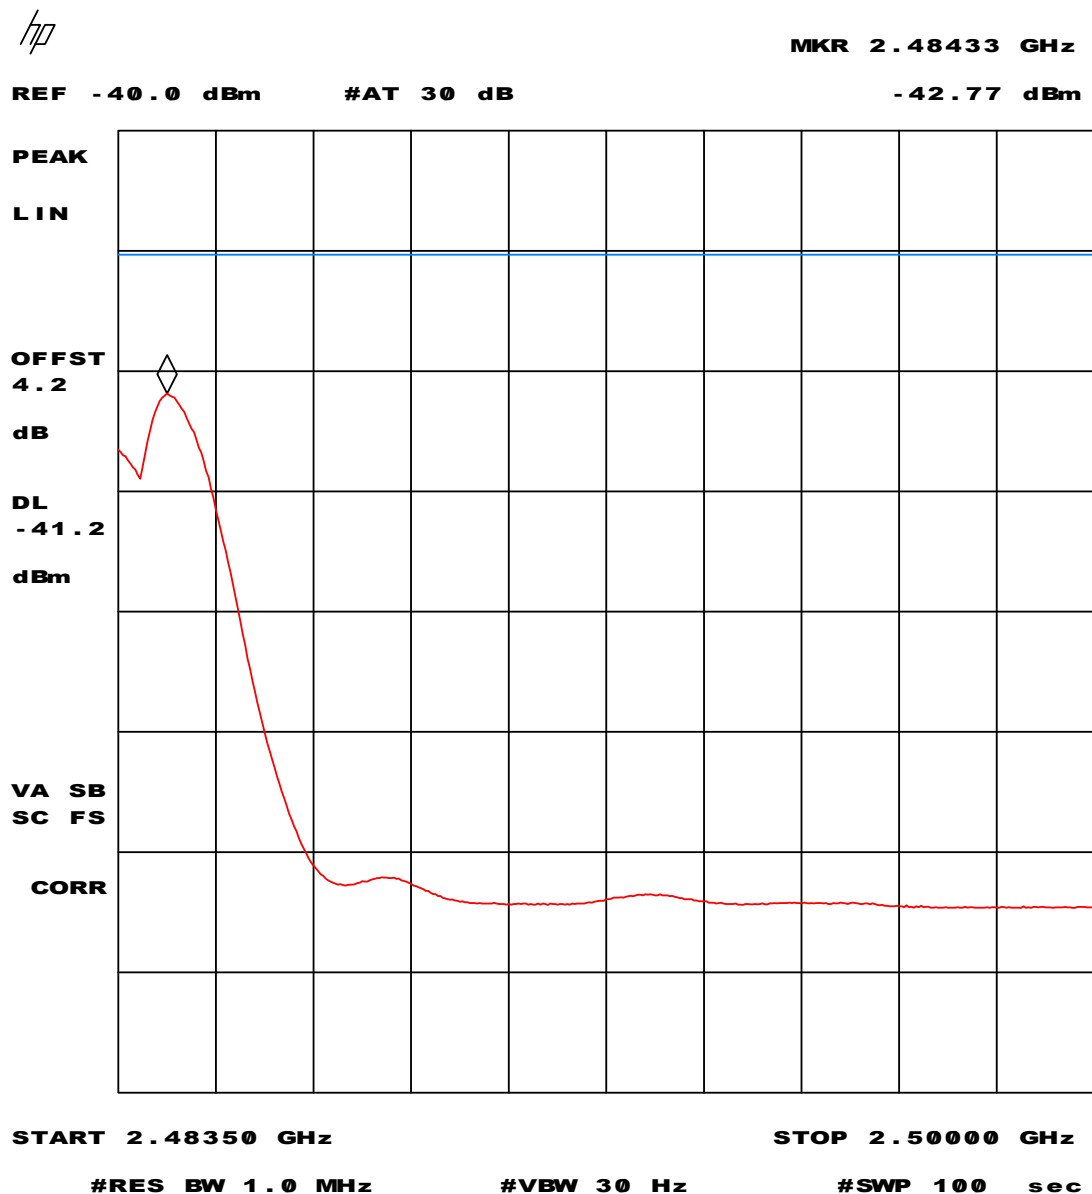


Plot 1 - Average measurement values in restricted band 2483.5 - 2500 MHz.

Average measurement values in restricted band. All possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 12 (2467 MHz) during this measurement.

Note: 54 dBμV/m :: -41.2 dBm display line setting.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

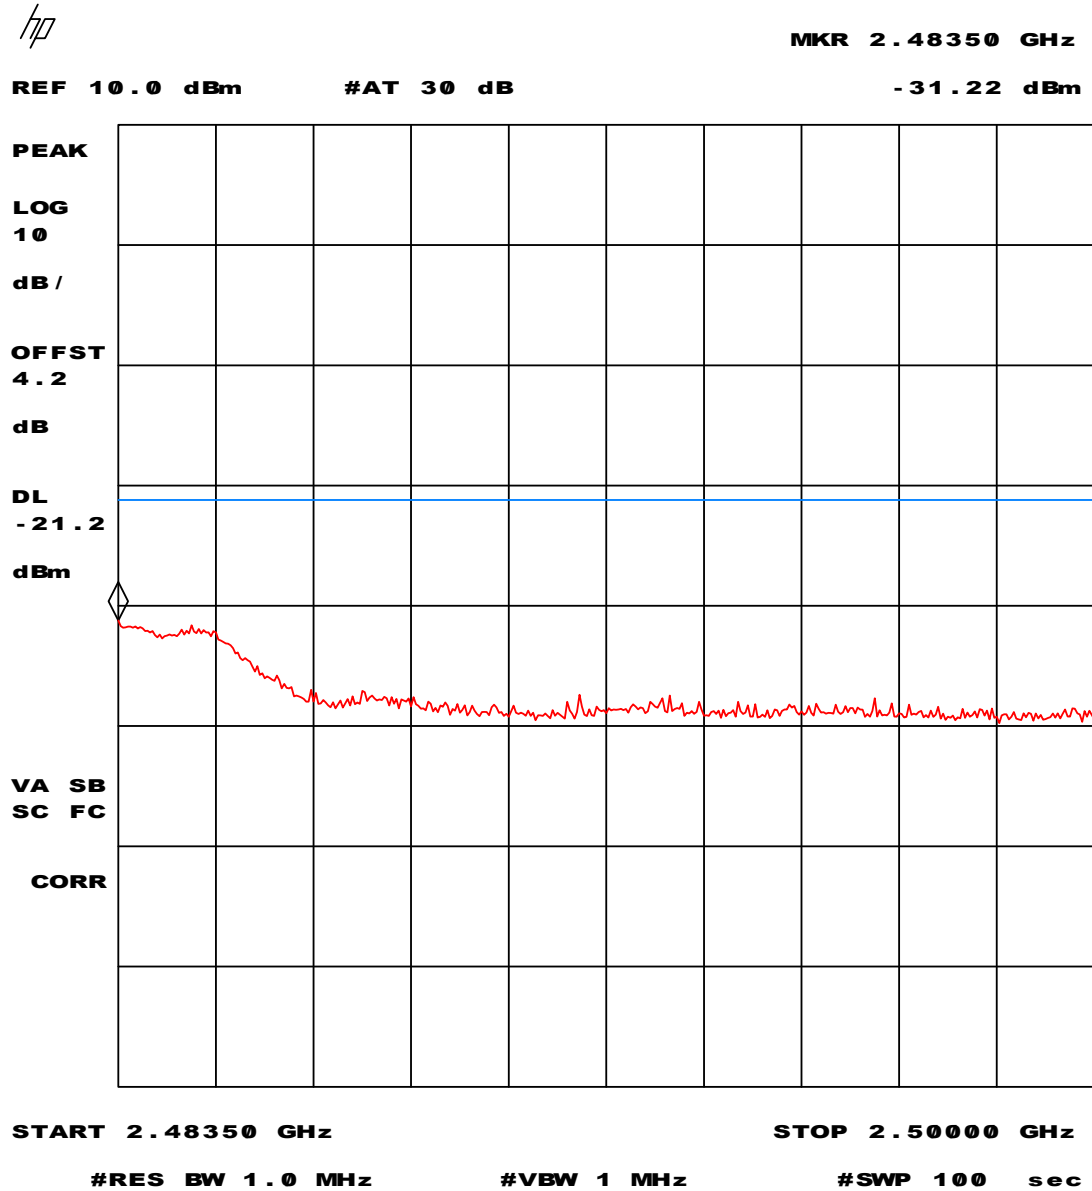

Plot 2 - Peak measurement values in restricted band 2483.5 - 2500 MHz.

Peak measurement values in restricted band. All possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 12 (2467 MHz) during this measurement.

Note: 74 dB μ V/m :: -21.2 dBm display line setting.

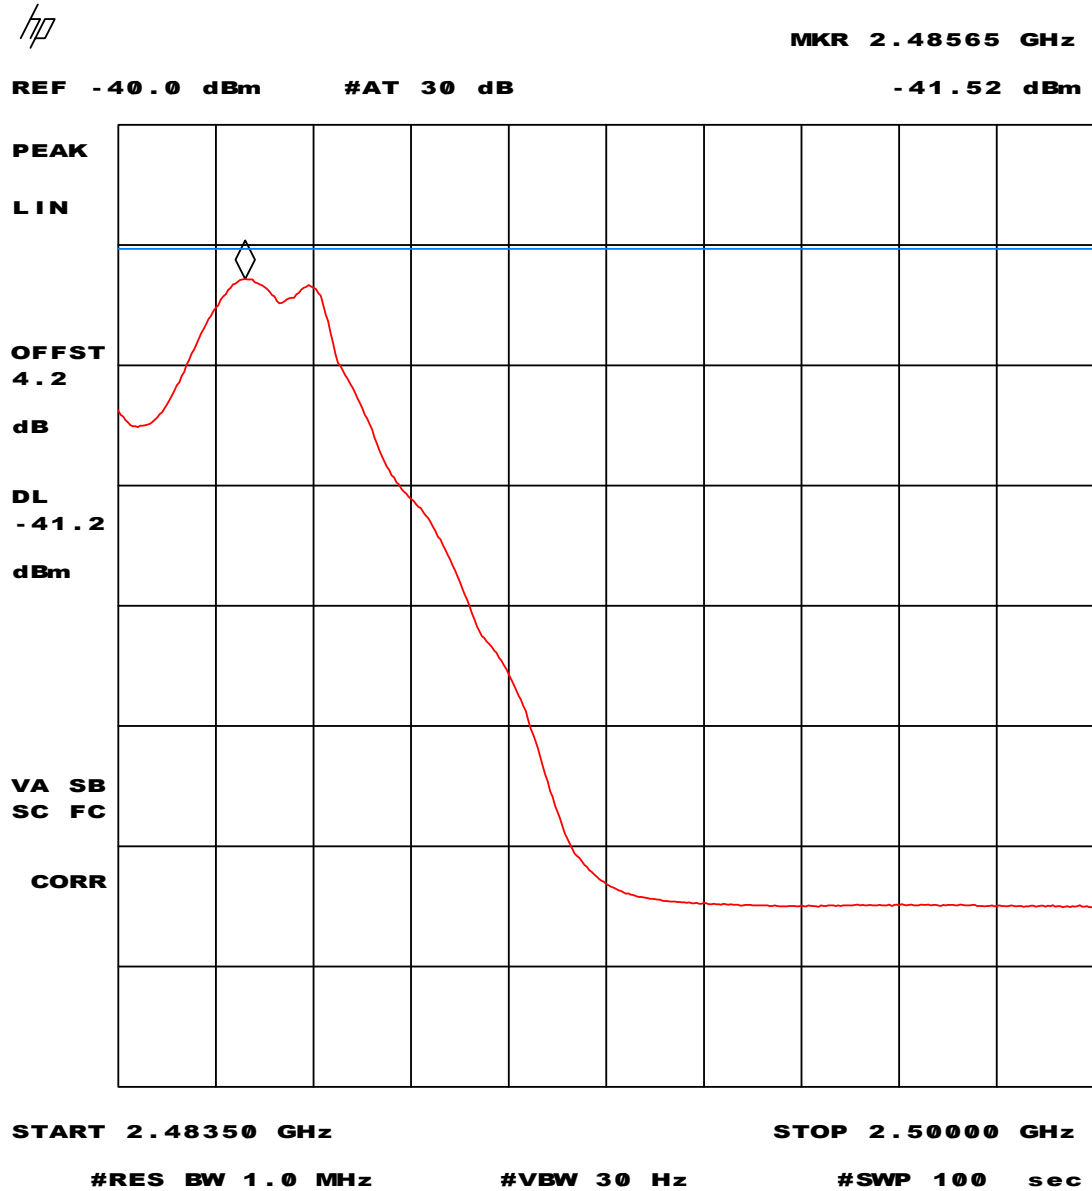


Plot 3 - Average measurement values in restricted band 2483.5 - 2500 MHz.

Average measurement values in restricted band. All possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 13 (2472 MHz) during this measurement.

Note: 54 dBμV/m :: -41.2 dBm display line setting.



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

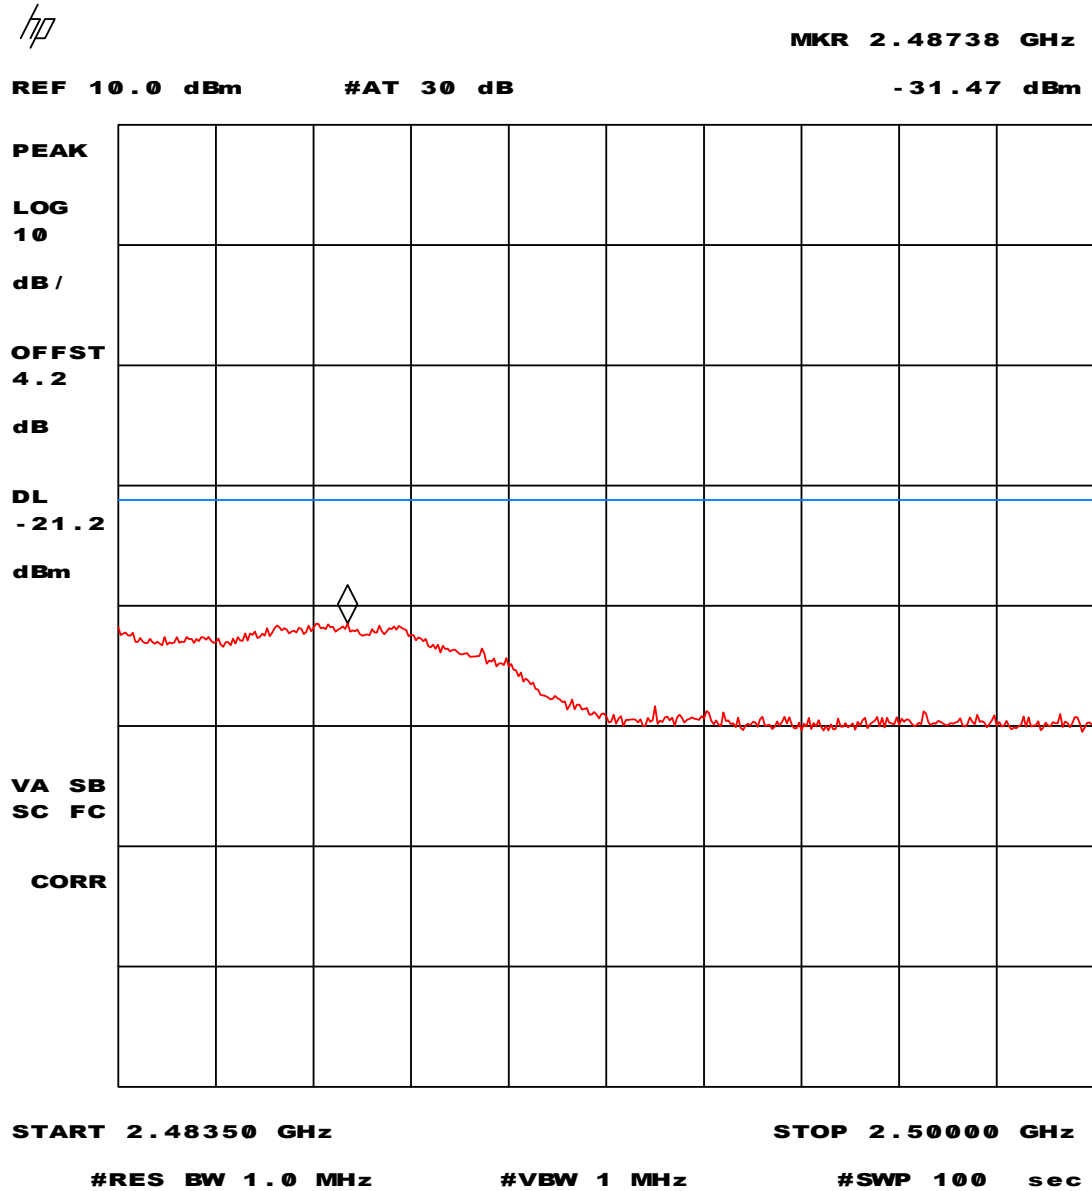


Plot 4 - Peak measurement values in restricted band 2483.5 - 2500 MHz.

Peak measurement values in restricted band. All possible transmission bit-rates (1 Mbit/s, 2 Mbit/s, 5.5 Mbit/s and 11 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 13 (2472 MHz) during this measurement.

Note: 74 dB μ V/m :: -21.2 dBm display line setting.




5.1.2 OFDM mode

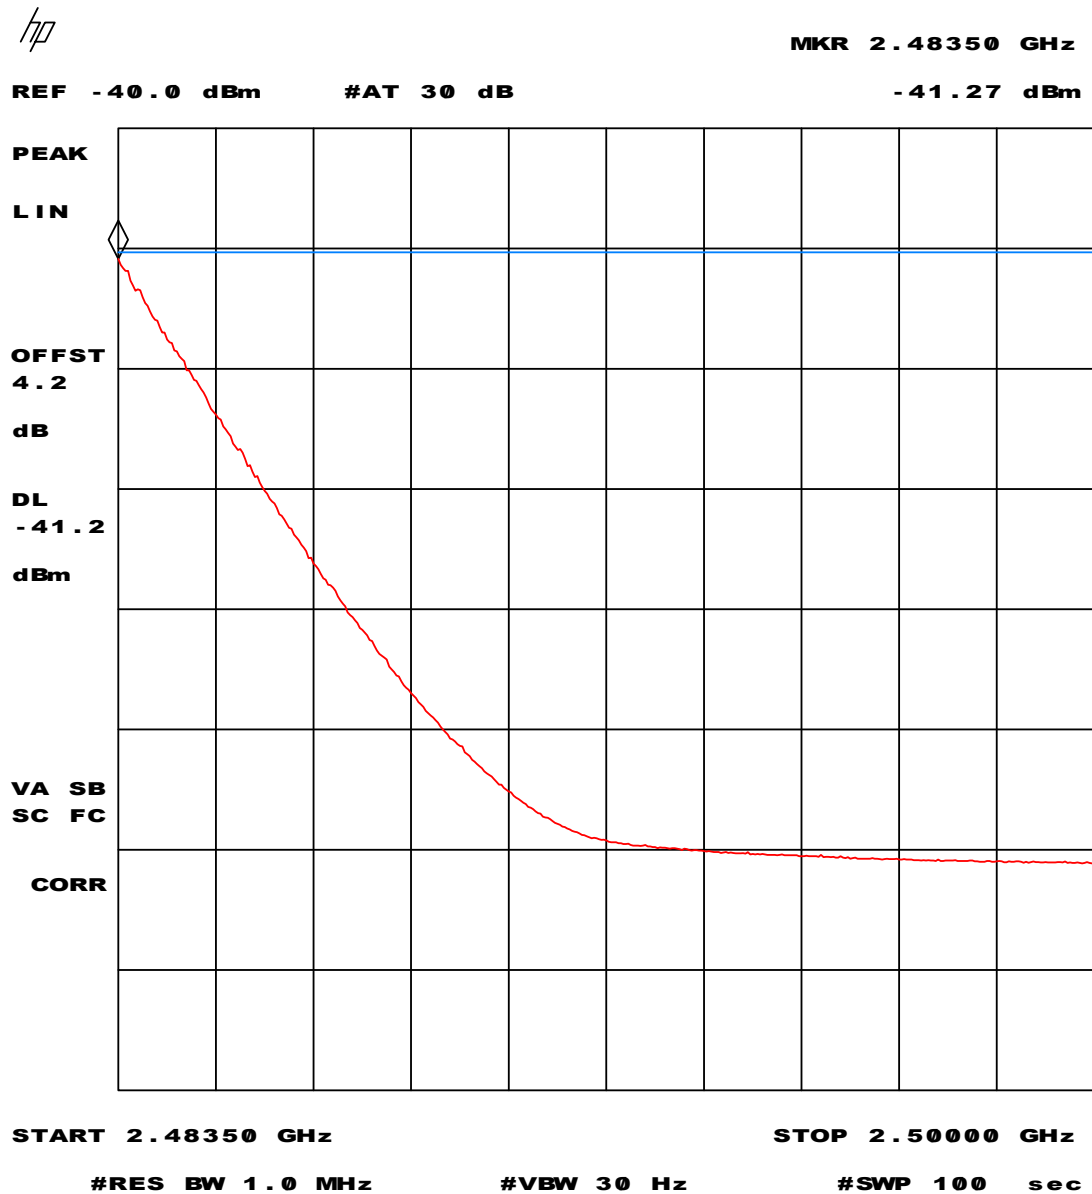

Plot 5 - Average measurement values in restricted band 2483.5 - 2500 MHz.

Average measurement values in restricted band. All possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 12 (2467 MHz) during this measurement.


Note: 54 dBμV/m :: -41.2 dBm display line setting.

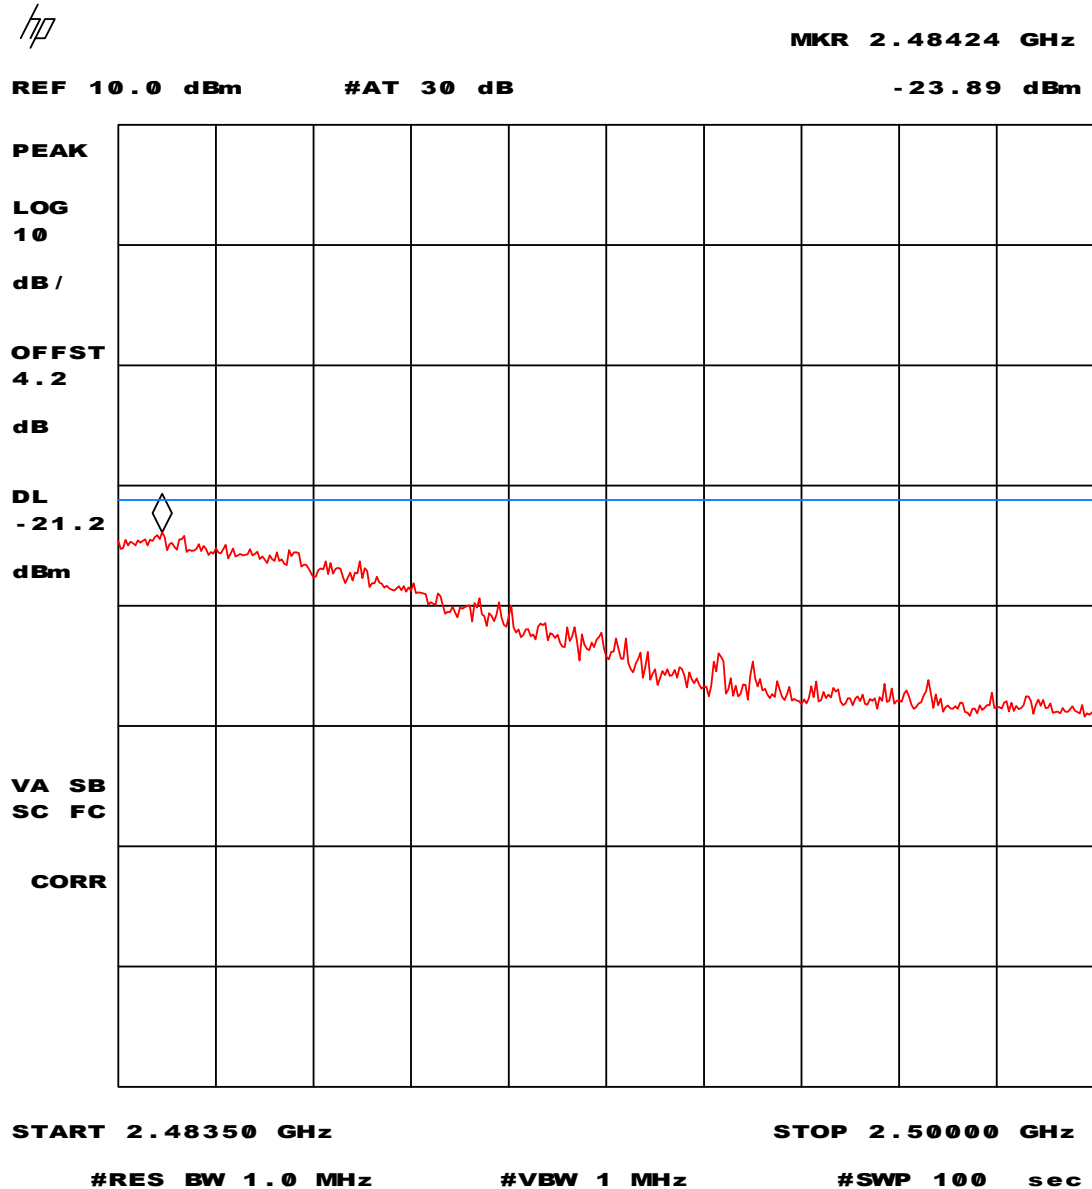

Plot 6 - Peak measurement values in restricted band 2483.5 - 2500 MHz.

Peak measurement values in restricted band. All possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 12 (2467 MHz) during this measurement.


Note: 74 dB μ V/m :: -21.2 dBm display line setting.

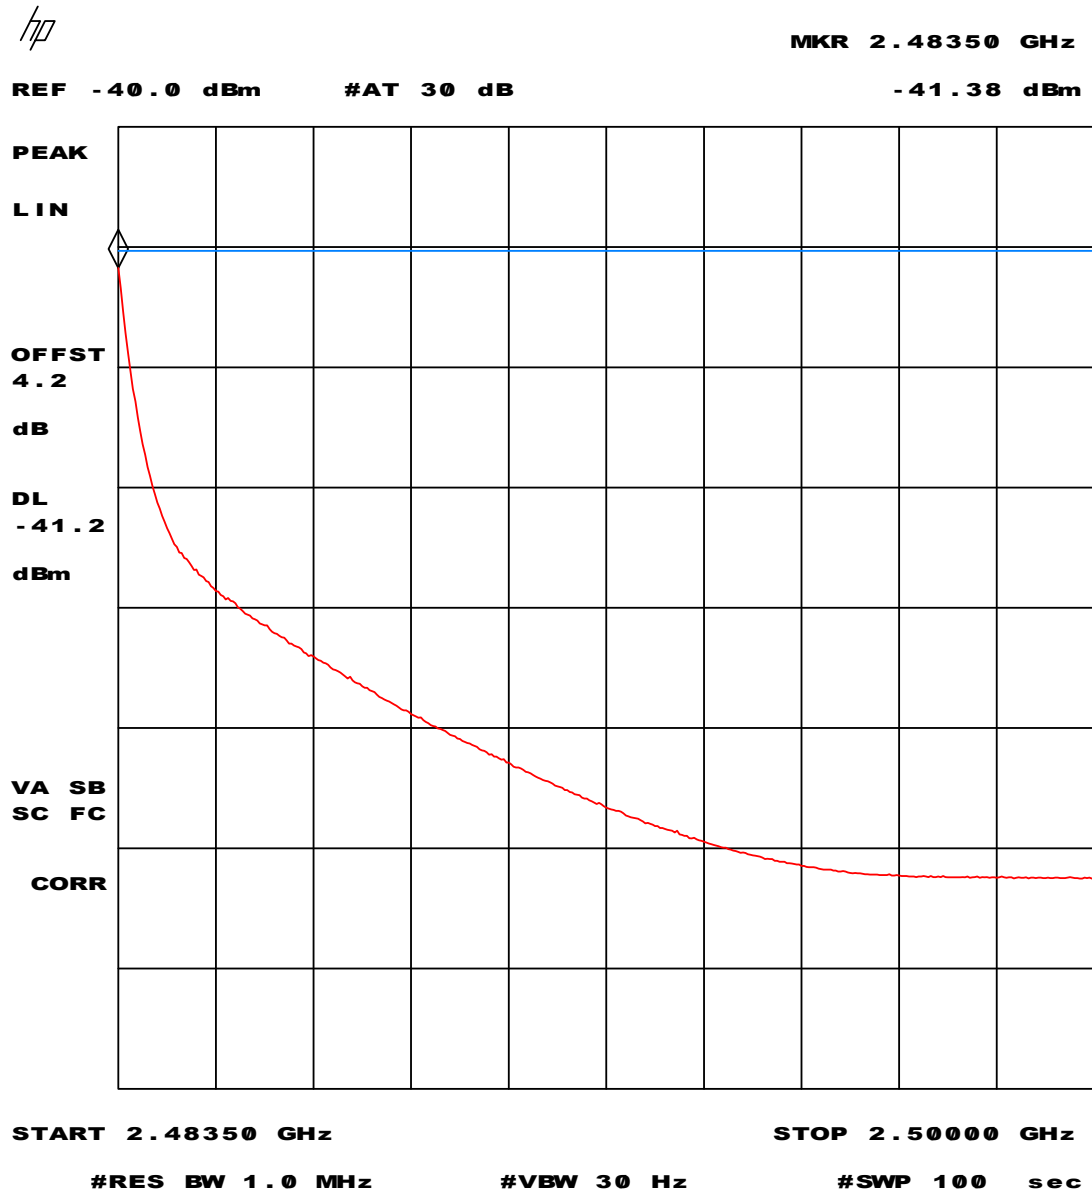

Plot 7 - Average measurement values in restricted band 2483.5 - 2500 MHz.

Average measurement values in restricted band. All possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 13 (2472 MHz) during this measurement.

Note: 54 dBμV/m :: -41.2 dBm display line setting.

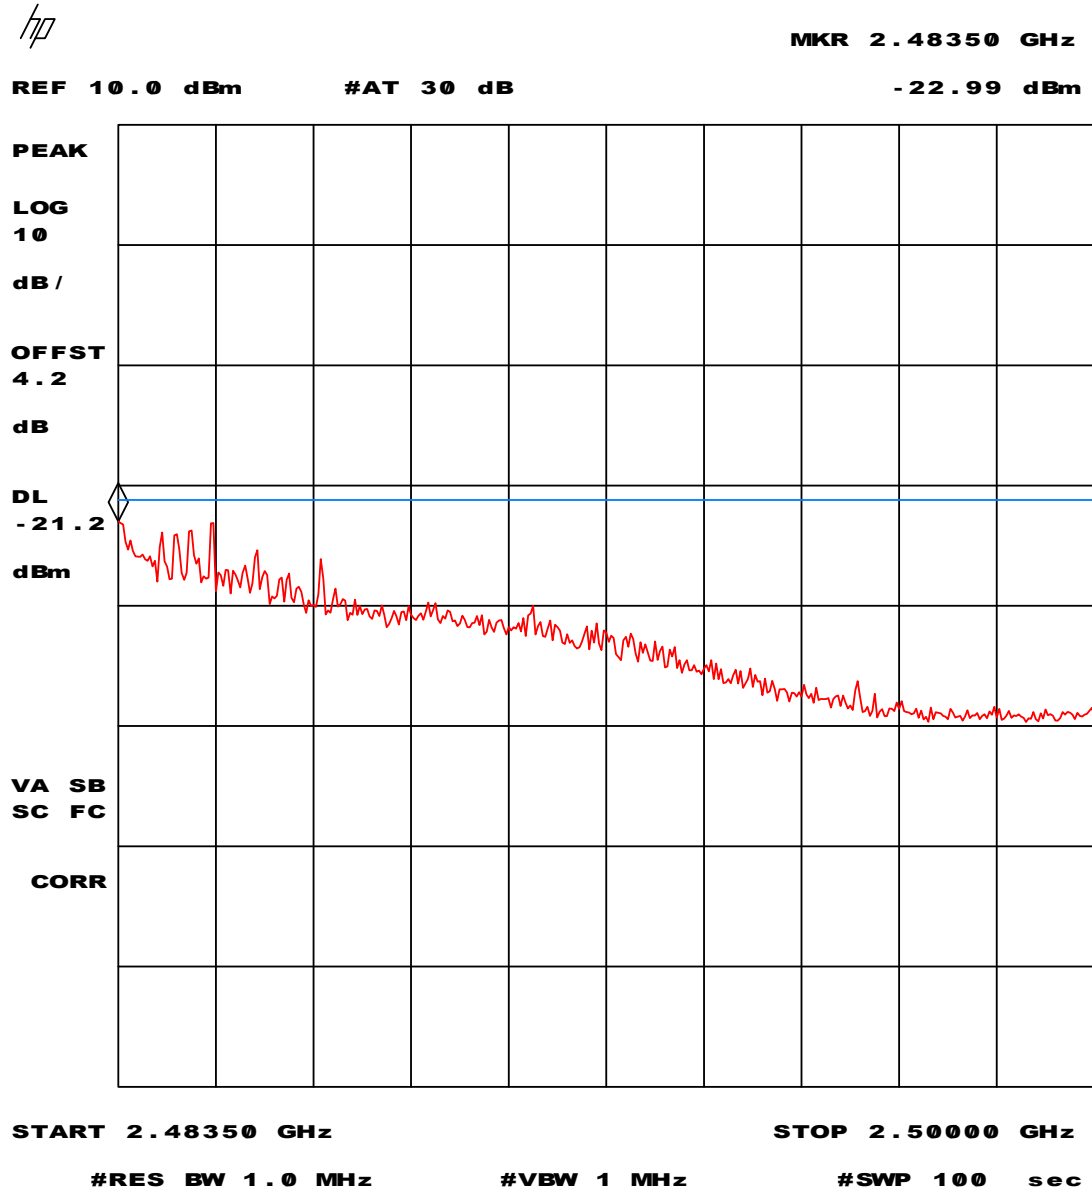


Plot 8 - Peak measurement values in restricted band 2483.5 - 2500 MHz.

Peak measurement values in restricted band. All possible transmission bit-rates (6/9 Mbit/s, 12/18 Mbit/s, 24/36 Mbit/s and 48/54 Mbit/s), conducted measurement, corrected for 3 dBi antenna gain (including antenna cable losses) and 1.2 dB cable losses (measurement cable). The EUT was operating on channel 13 (2472 MHz) during this measurement.

Note: 74 dB μ V/m :: -21.2 dBm display line setting.


5.2 Minimum 6 dB bandwidth

5.2.1 DSSS mode

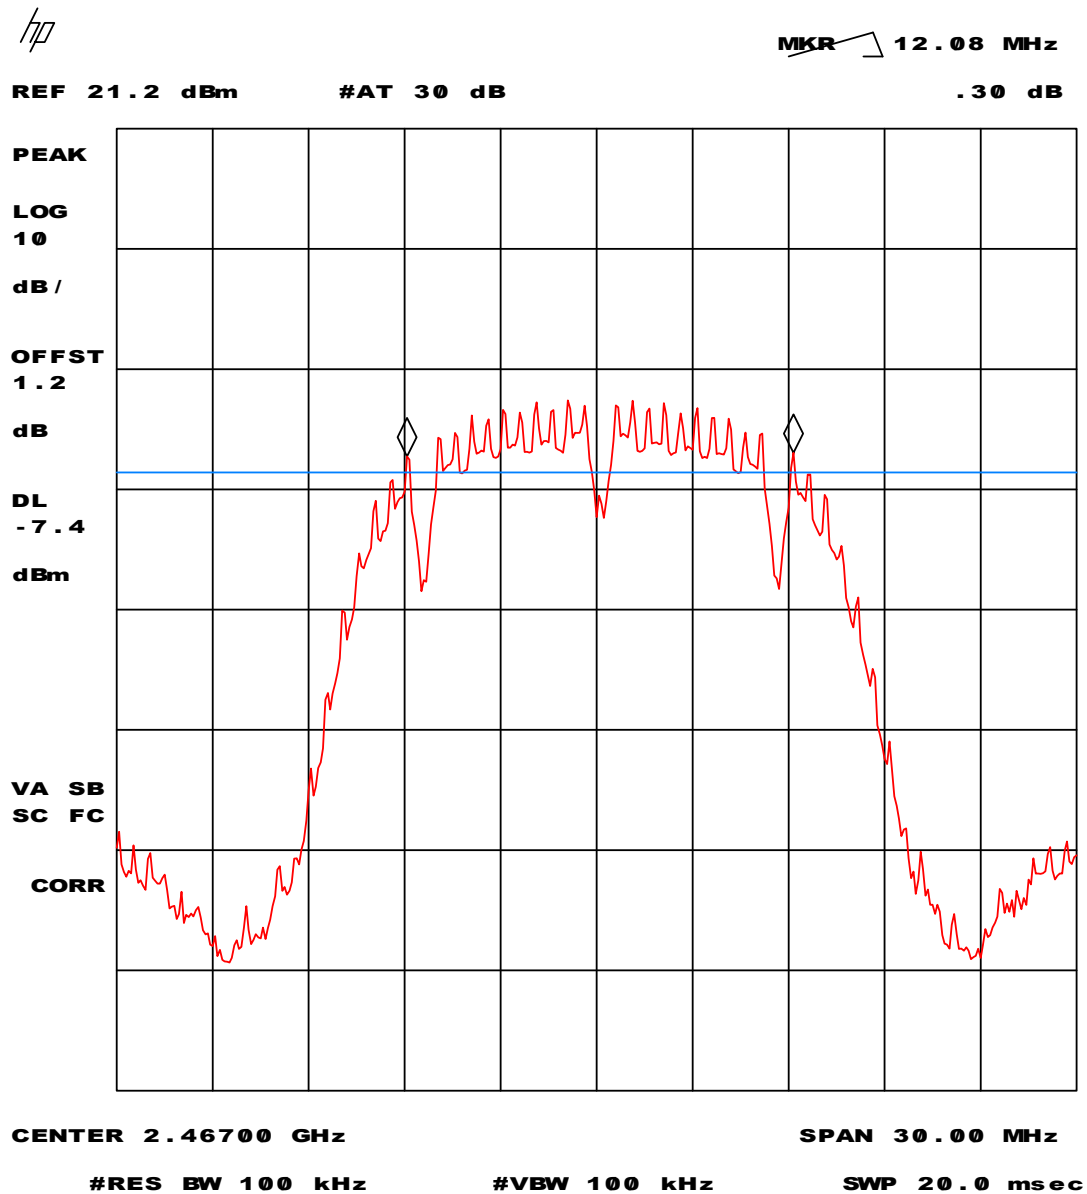


Plot 9 - Minimum 6 dB bandwidth at a transmission bit-rate of 1 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

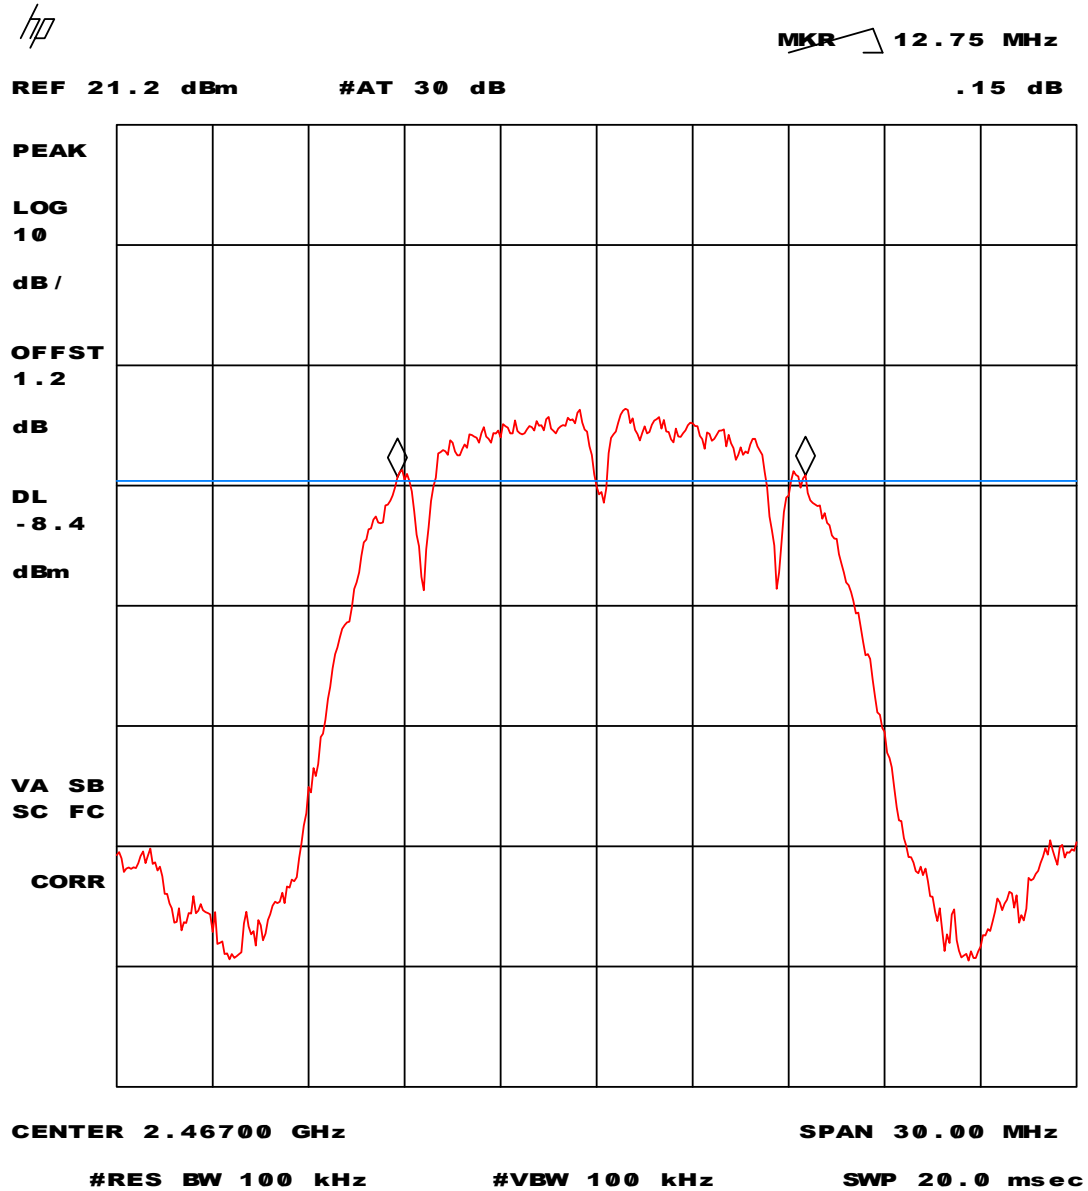


Plot 10 - Minimum 6 dB bandwidth at a transmission bit-rate of 2 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

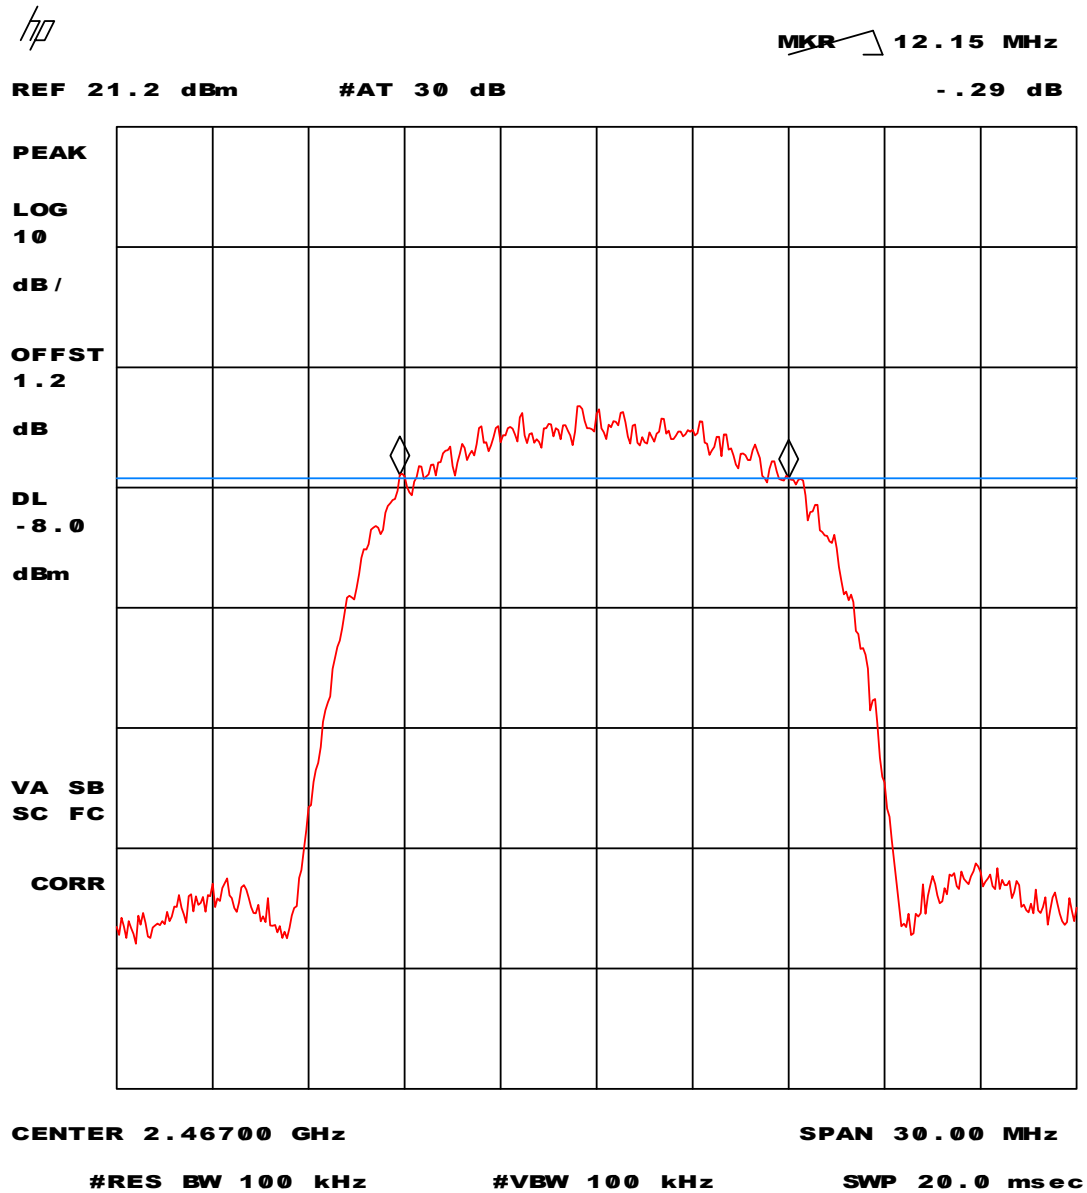

Plot 11 - Minimum 6 dB bandwidth at a transmission bit-rate of 5.5 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

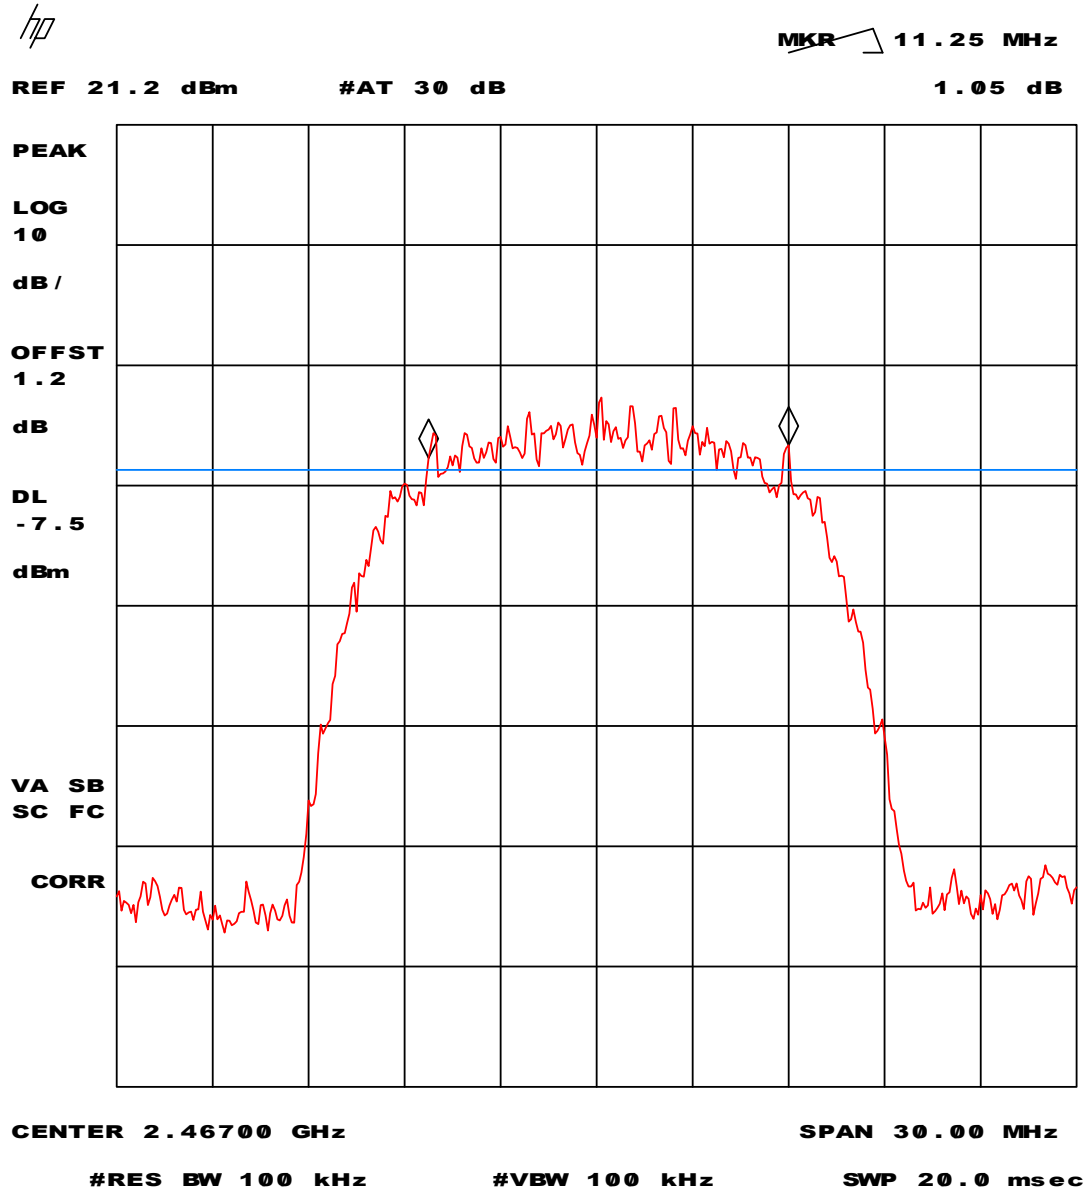


Plot 12 - Minimum 6 dB bandwidth at a transmission bit-rate of 11 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

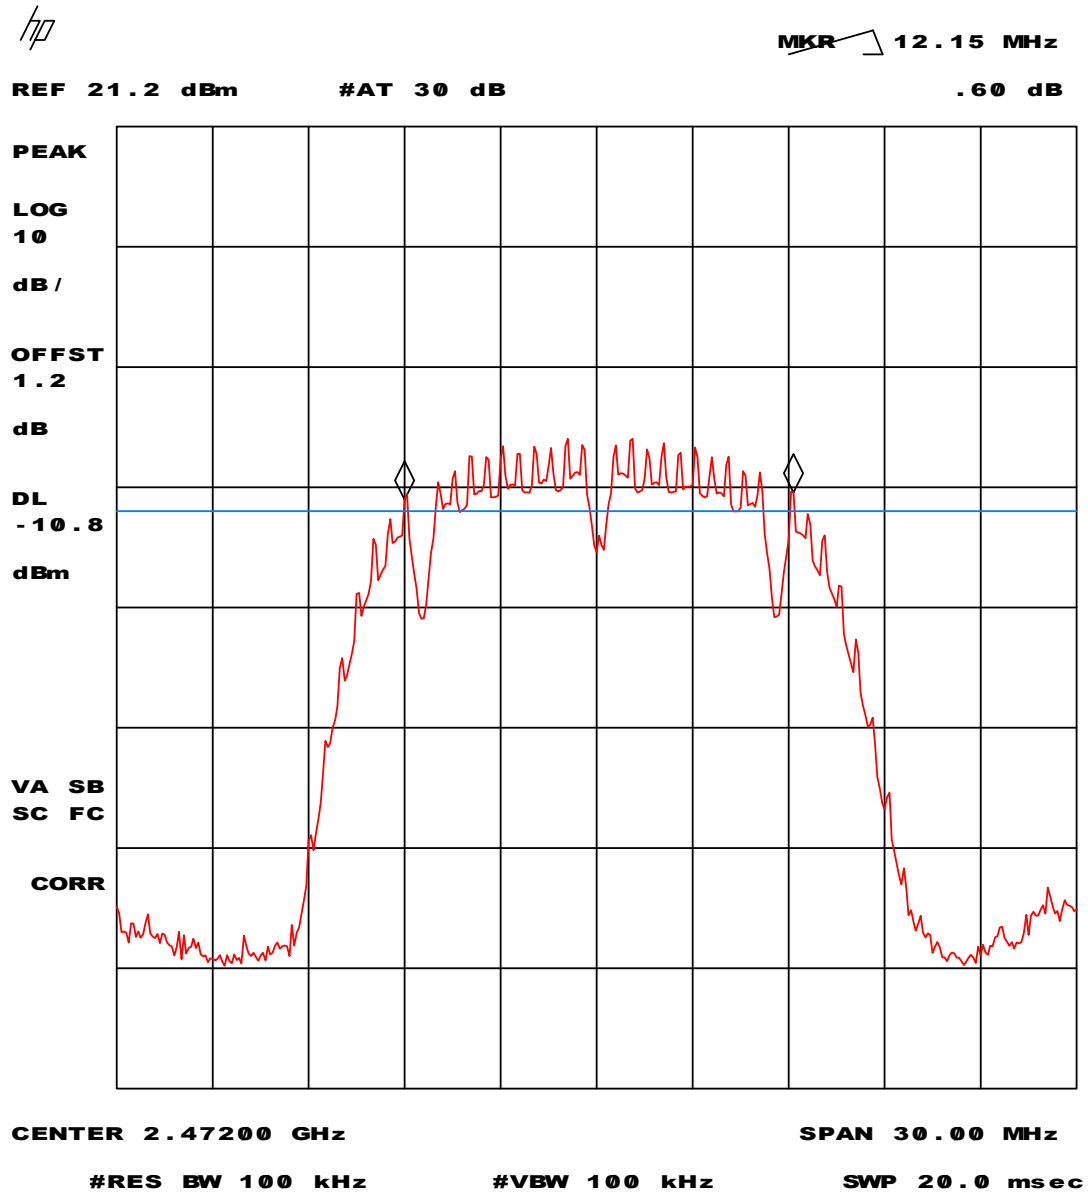


Plot 13 - Minimum 6 dB bandwidth at a transmission bit-rate of 1 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

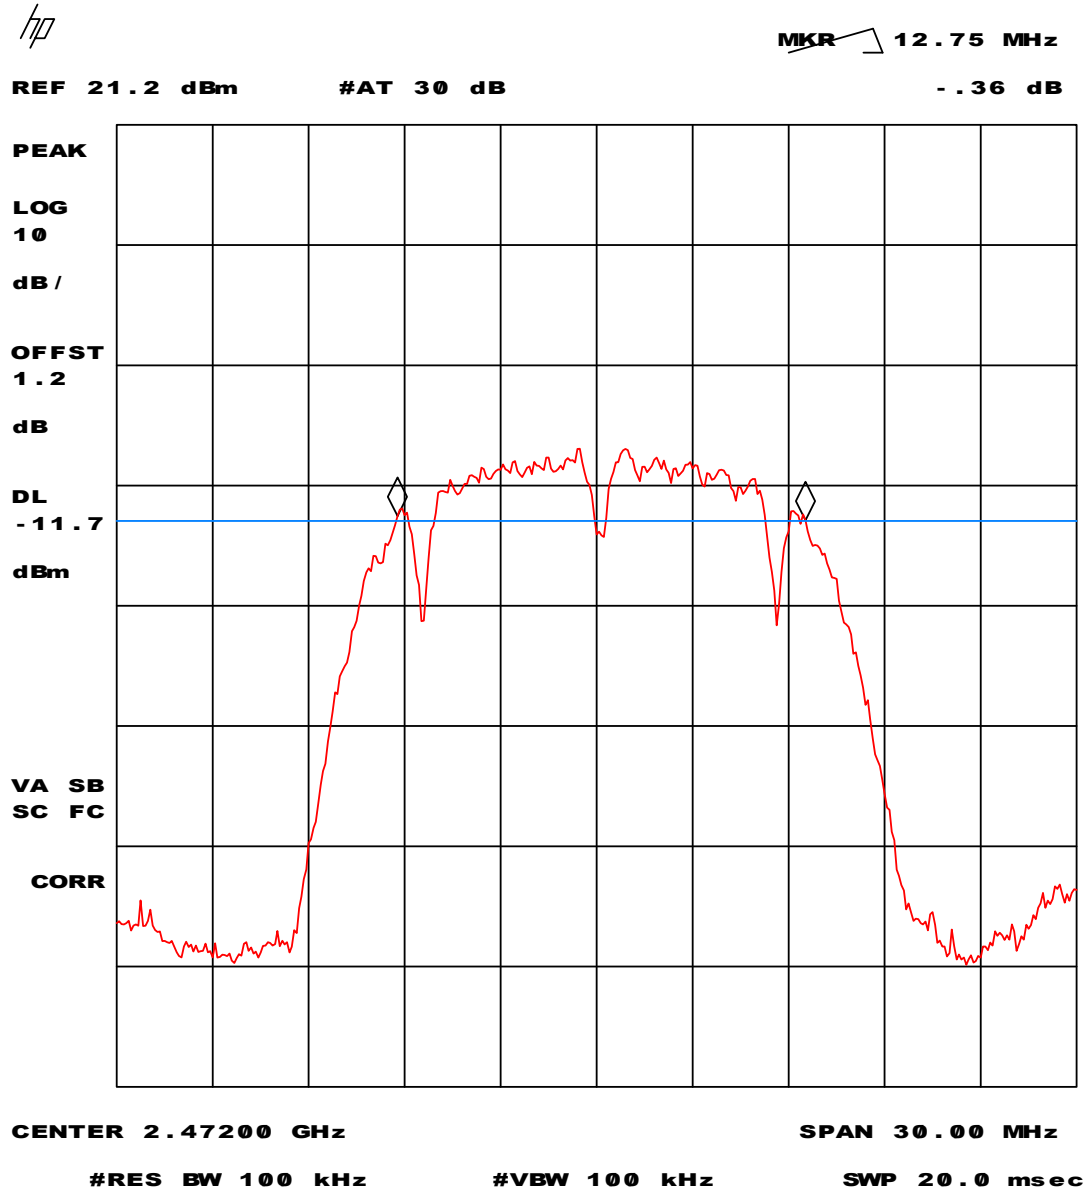


Plot 14 - Minimum 6 dB bandwidth at a transmission bit-rate of 2 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

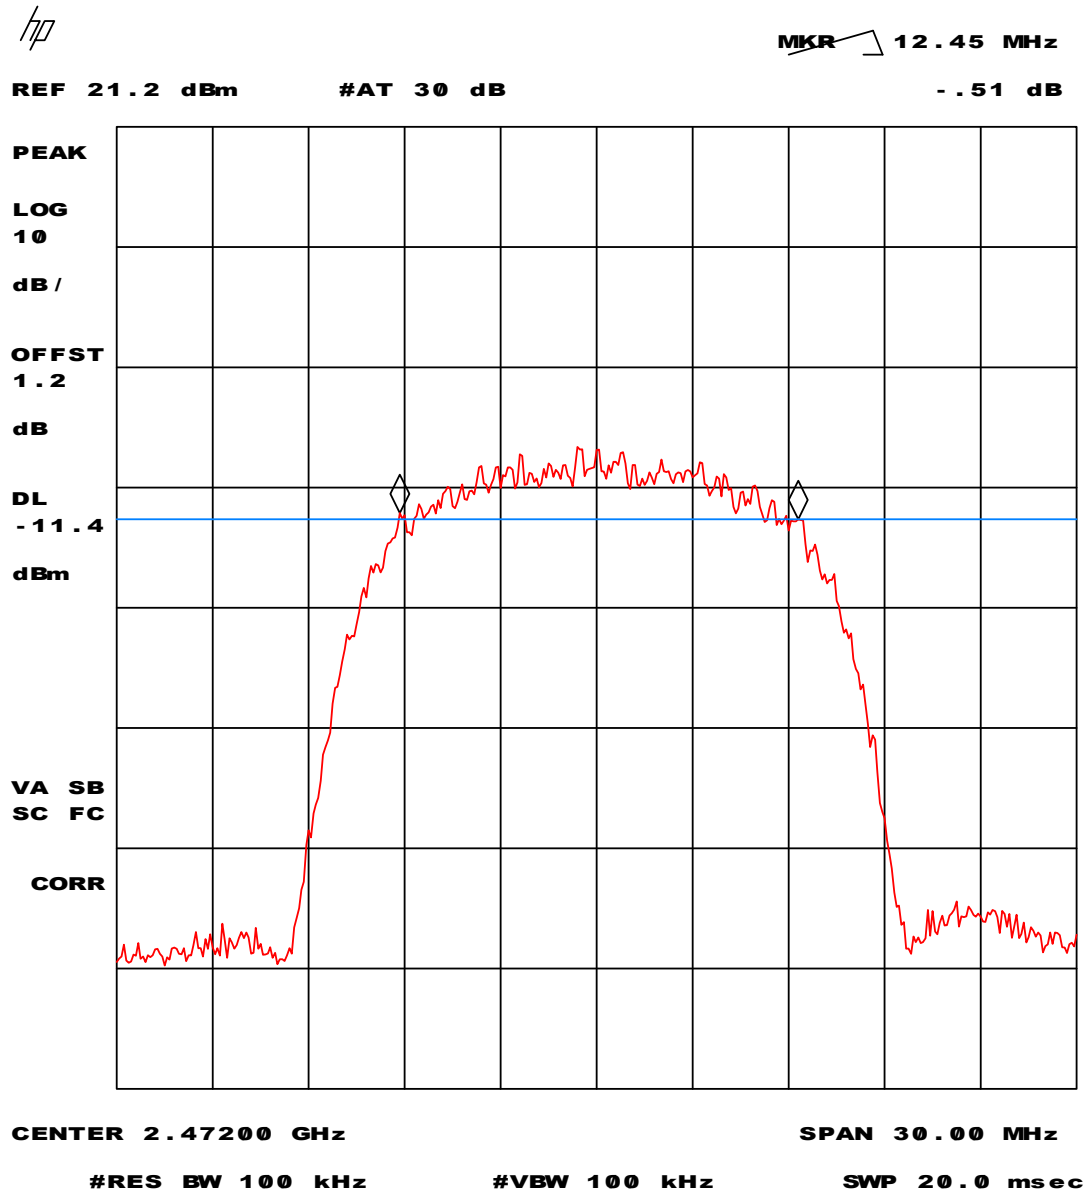

Plot 15 - Minimum 6 dB bandwidth at a transmission bit-rate of 5.5 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

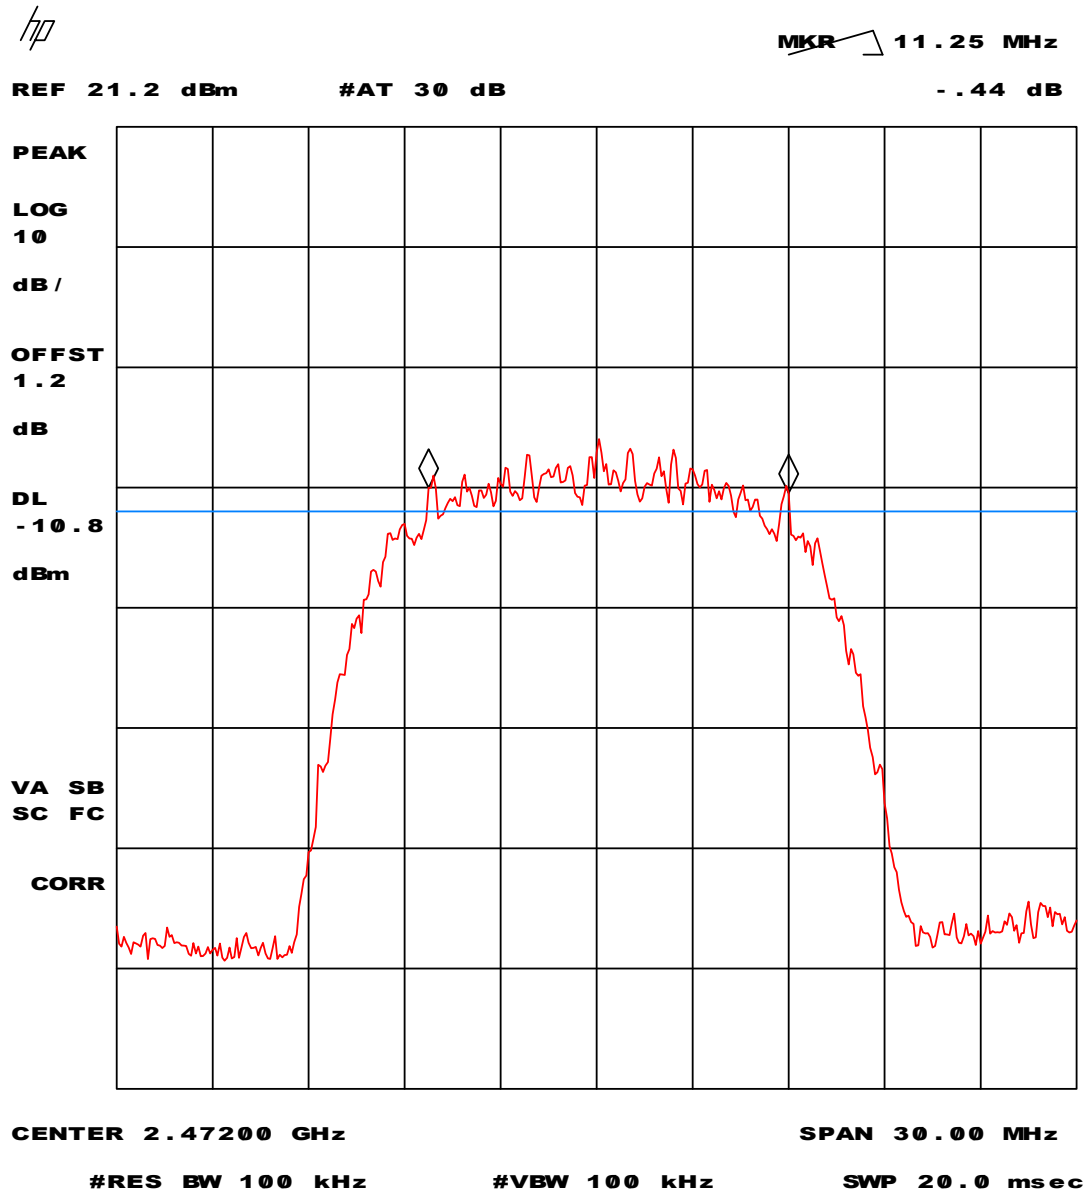


Plot 16 - Minimum 6 dB bandwidth at a transmission bit-rate of 11 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.




5.2.2 OFDM mode

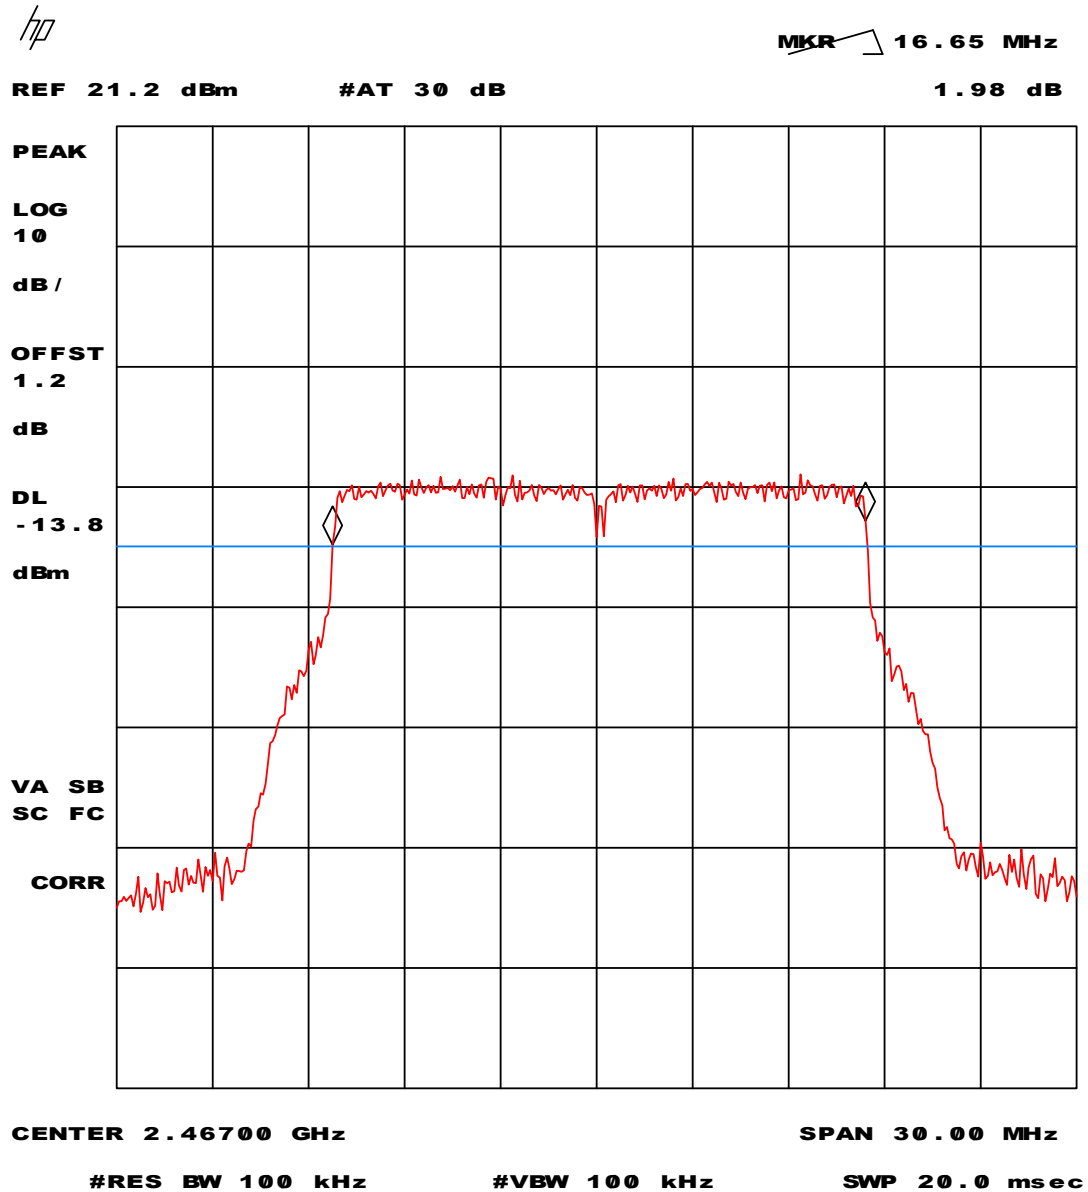


Plot 17 - Minimum 6 dB bandwidth at a transmission bit-rate of 6 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

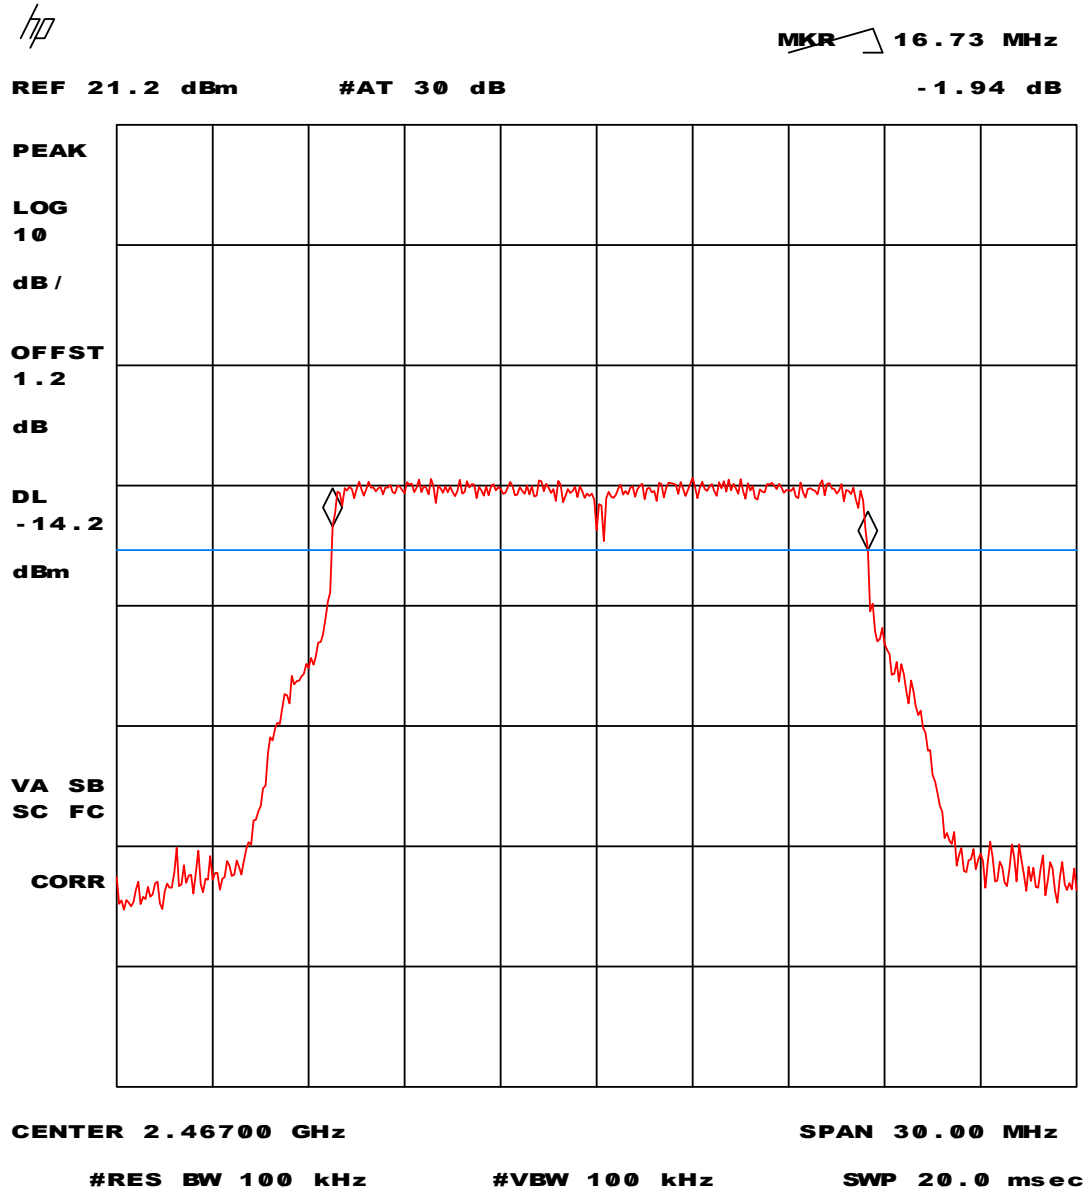


Plot 18 - Minimum 6 dB bandwidth at a transmission bit-rate of 9 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

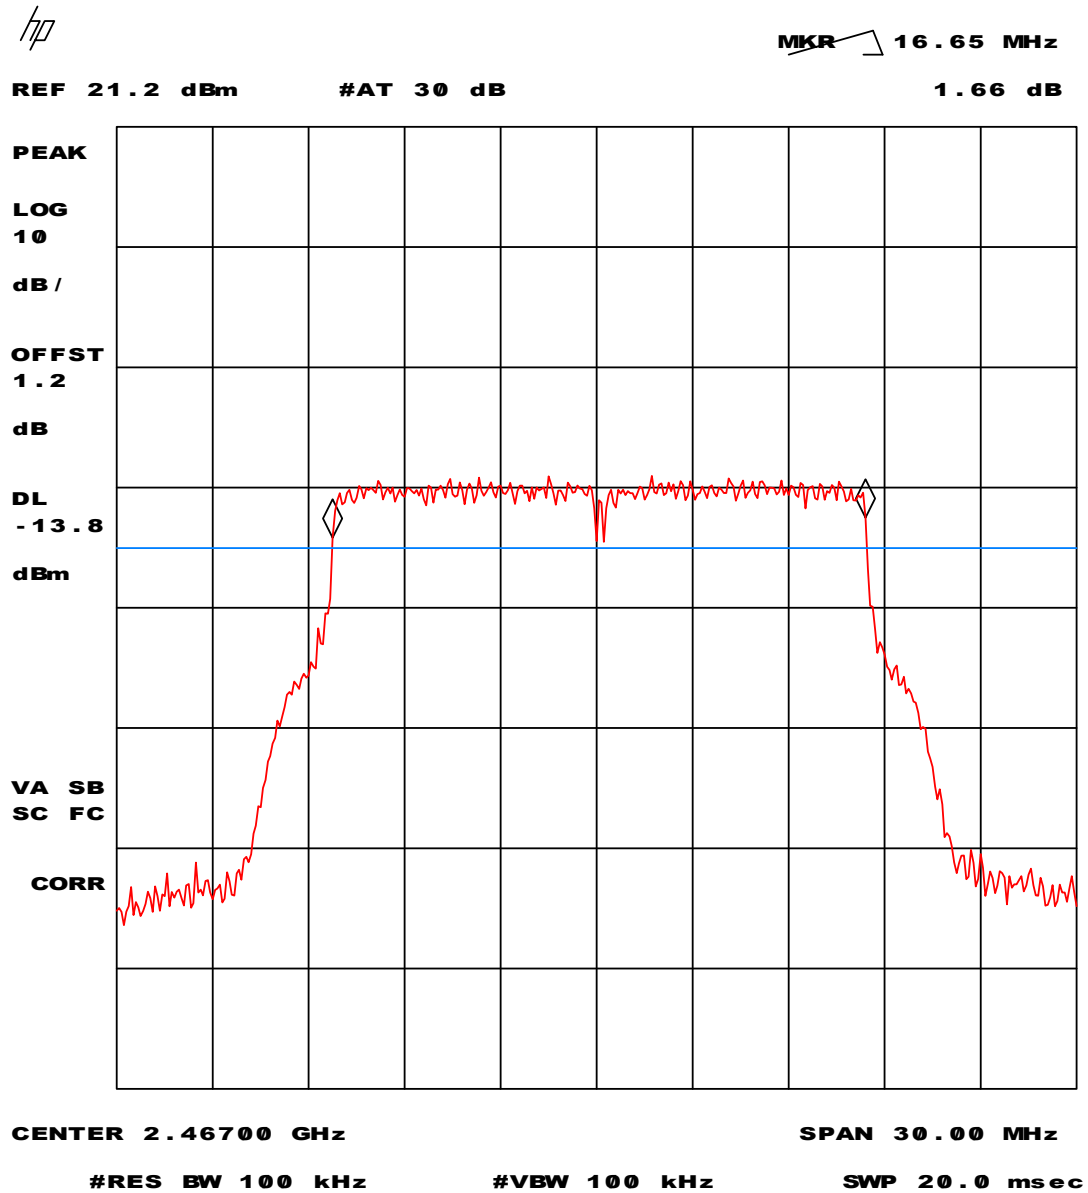


Plot 19 - Minimum 6 dB bandwidth at a transmission bit-rate of 18 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

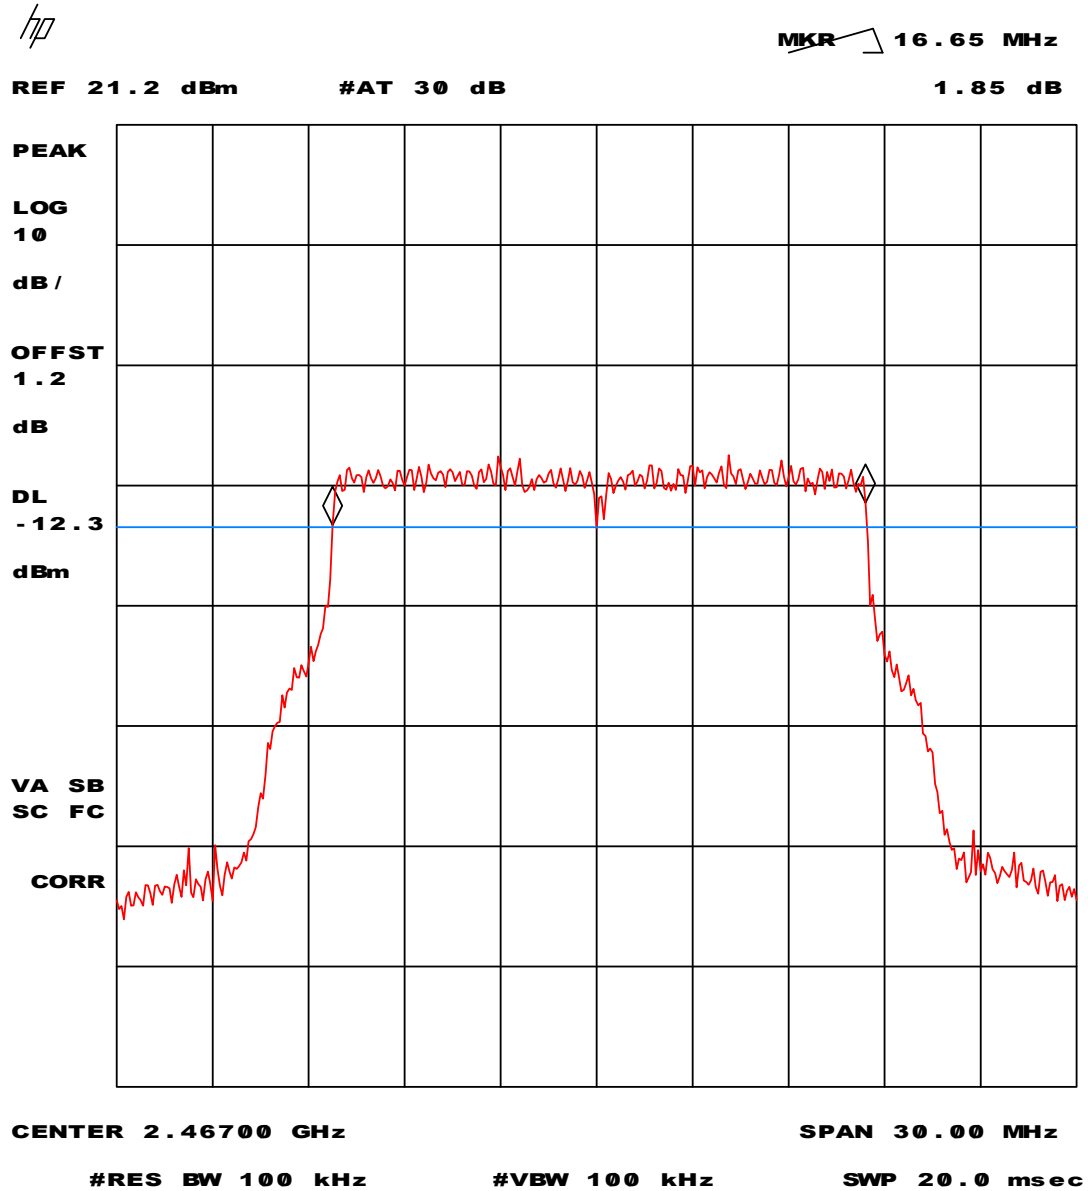


Plot 20 - Minimum 6 dB bandwidth at a transmission bit-rate of 36 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

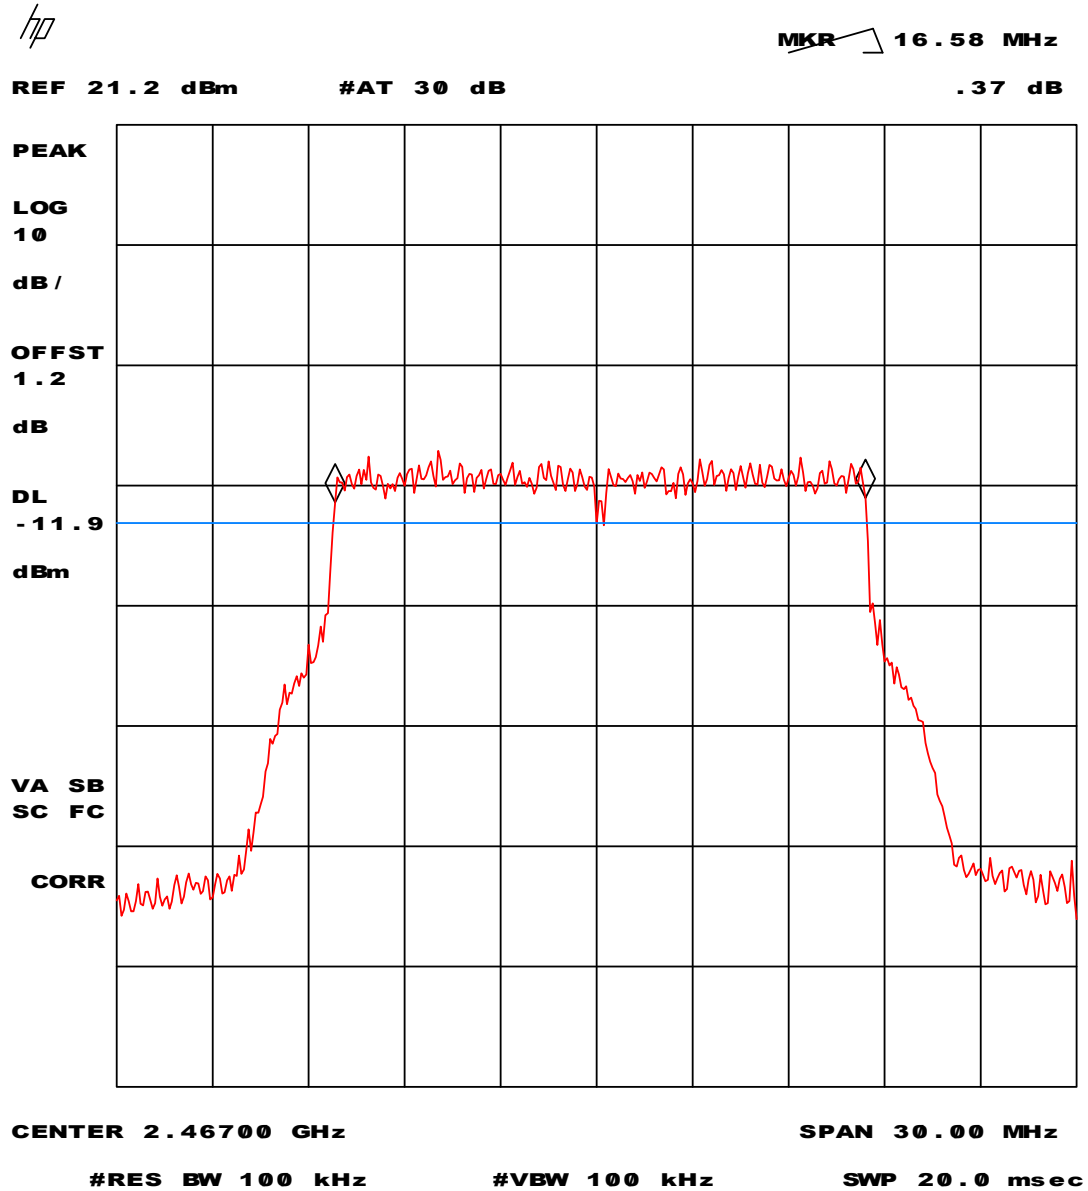

Plot 21 - Minimum 6 dB bandwidth at a transmission bit-rate of 54 Mbit/s.

The EUT was operating on channel 12 (2467 MHz) during this measurement.

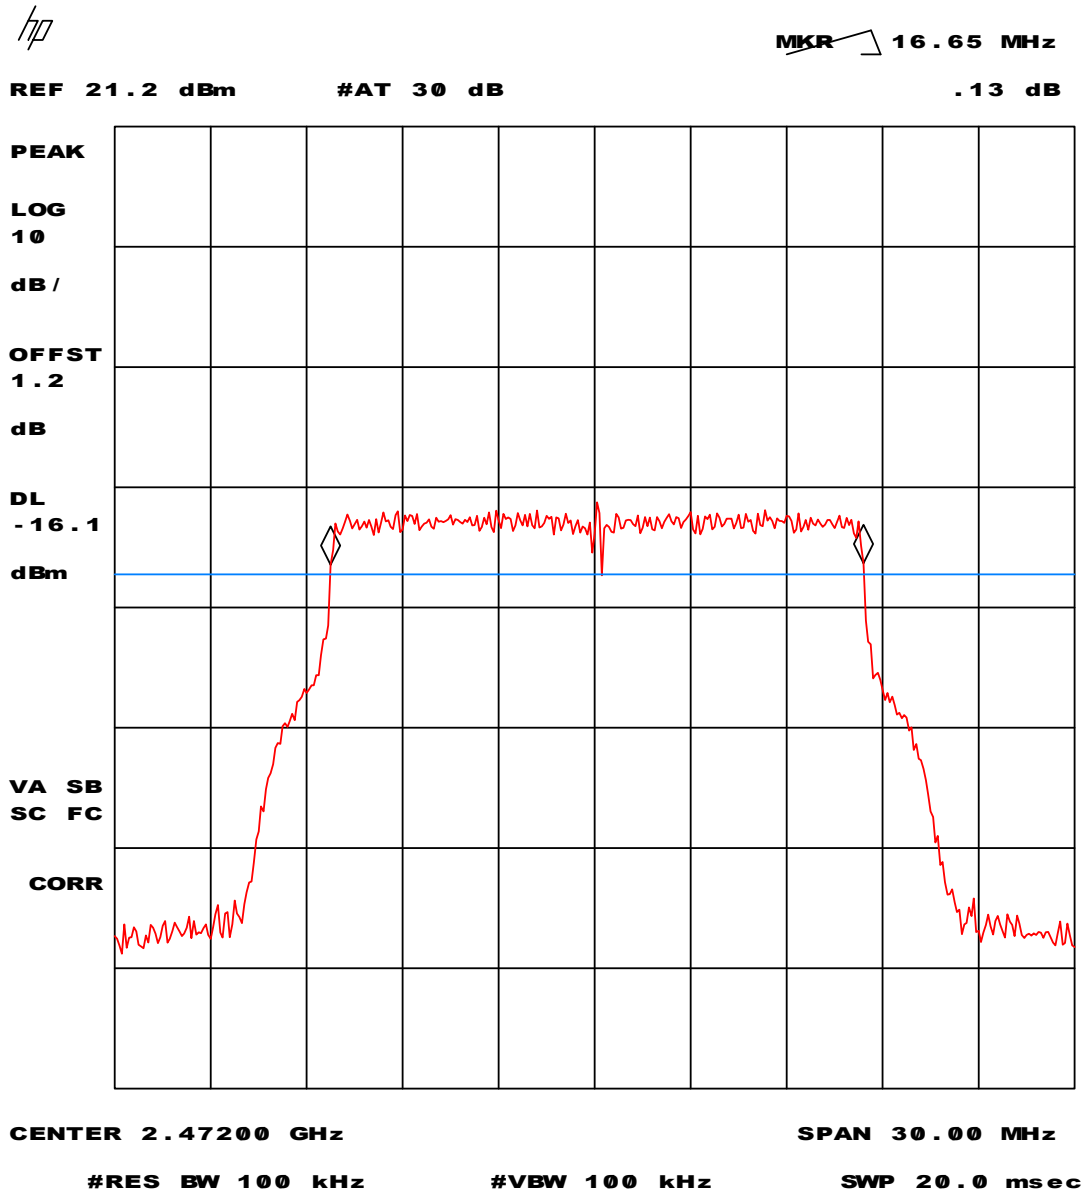


Plot 22 - Minimum 6 dB bandwidth at a transmission bit-rate of 6 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

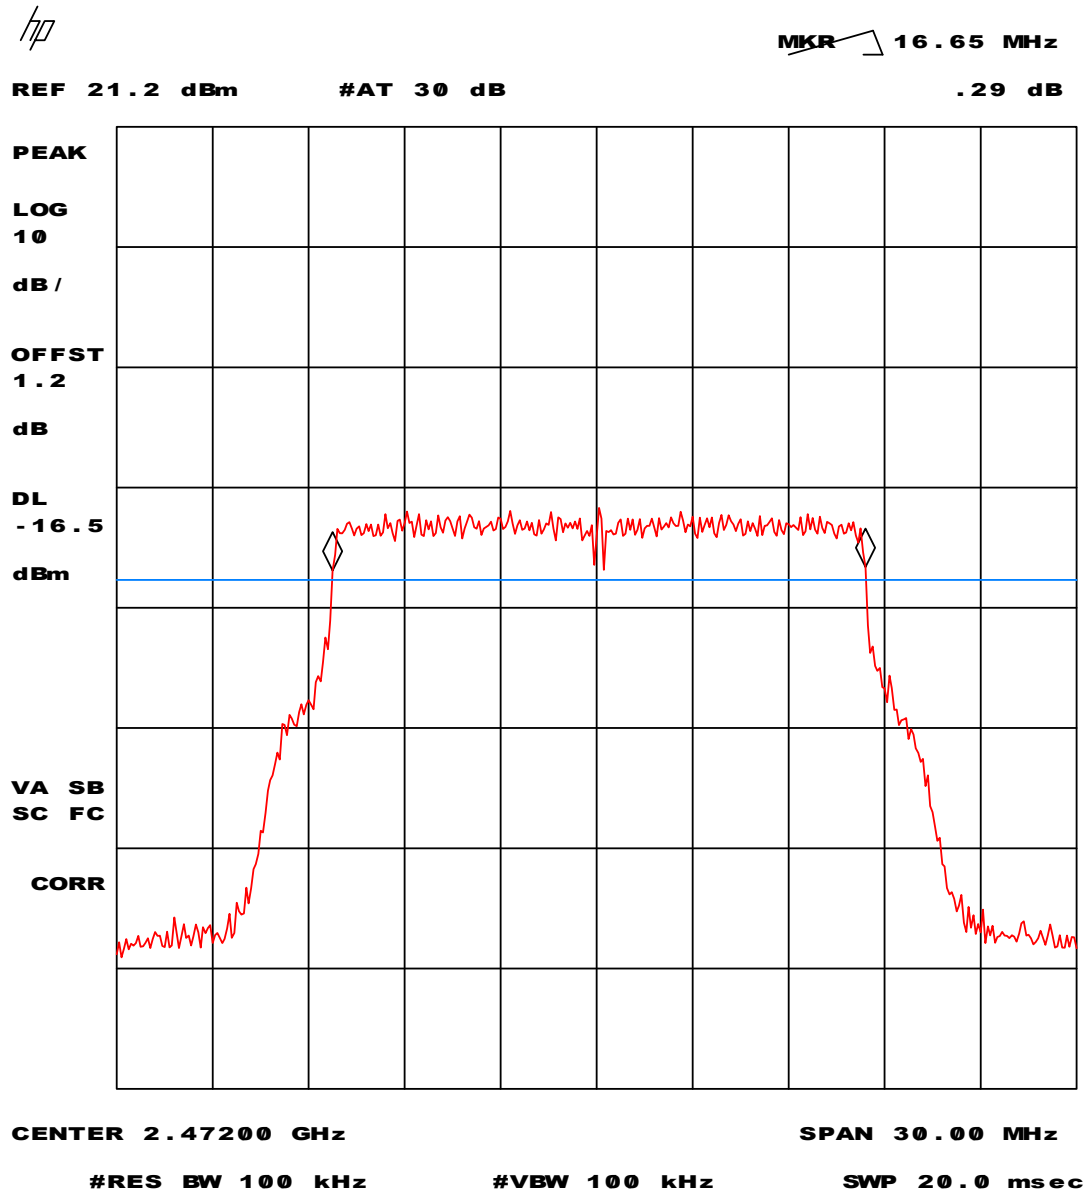


Plot 23 - Minimum 6 dB bandwidth at a transmission bit-rate of 9 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

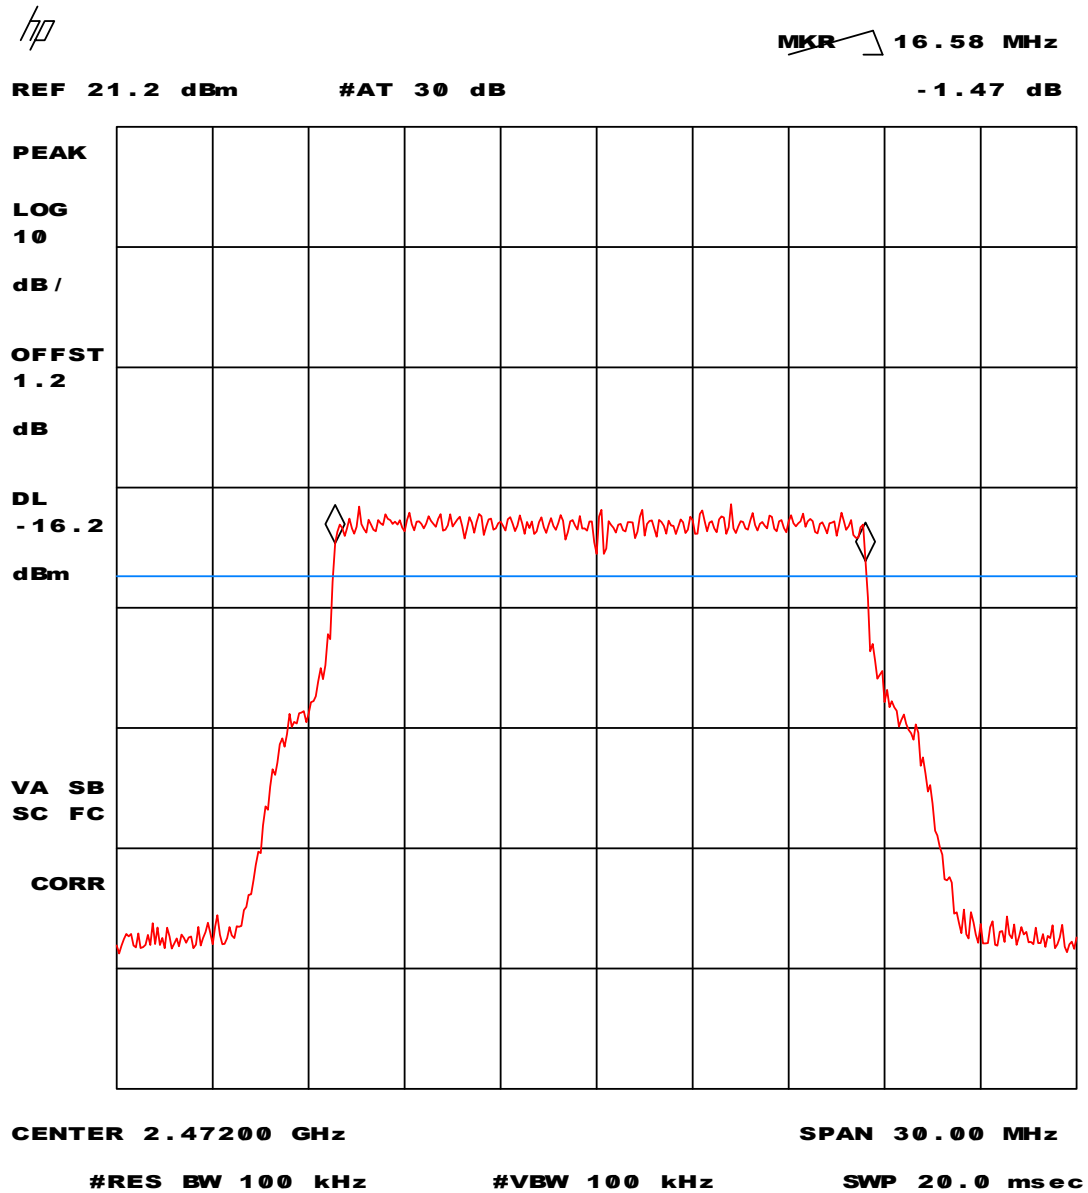


Plot 24 - Minimum 6 dB bandwidth at a transmission bit-rate of 18 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

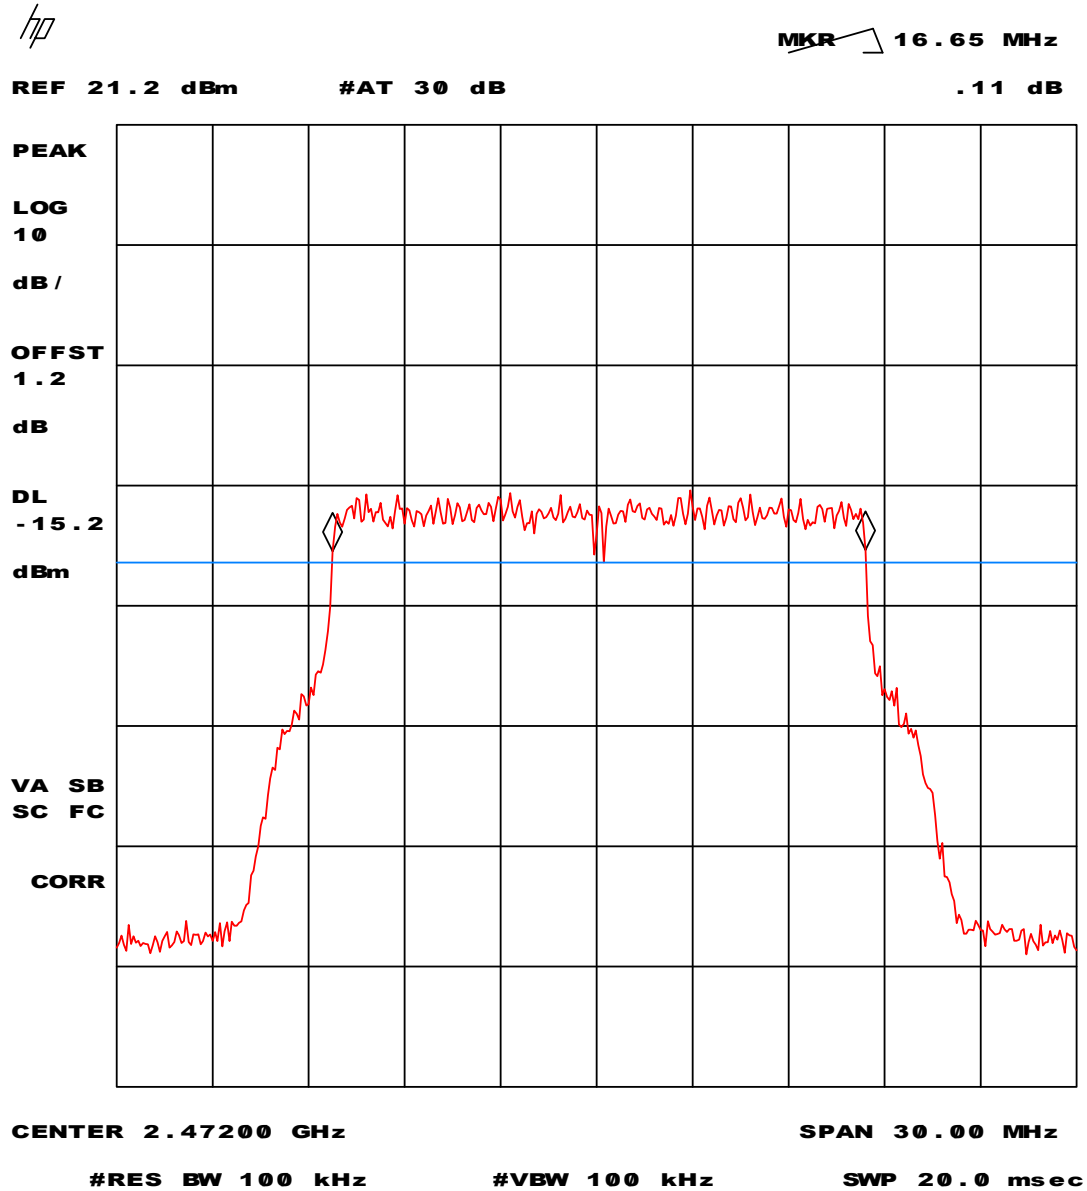

Plot 25 - Minimum 6 dB bandwidth at a transmission bit-rate of 36 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

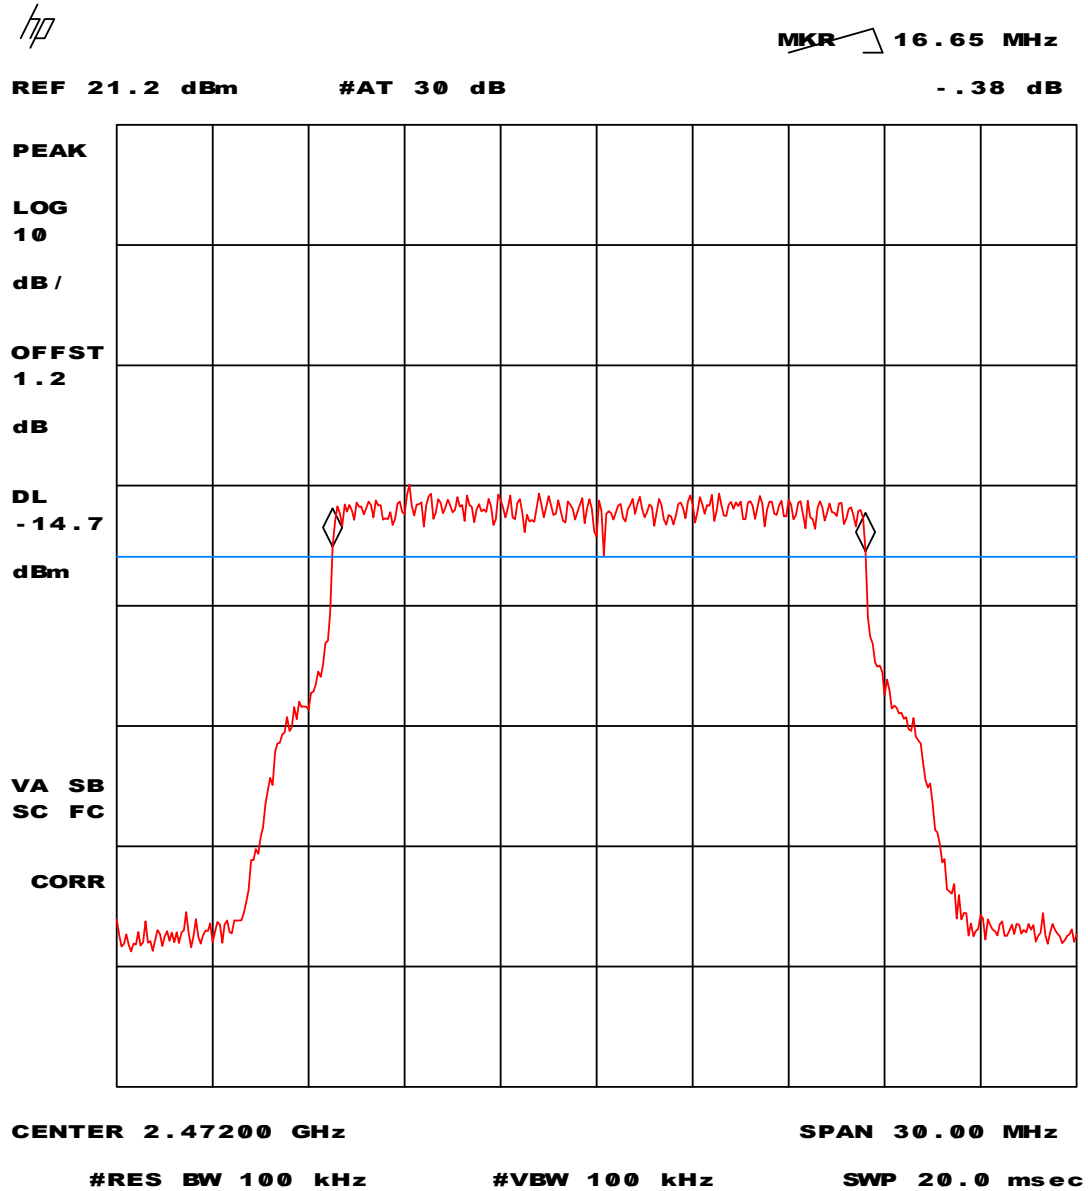


Plot 26 - Minimum 6 dB bandwidth at a transmission bit-rate of 54 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.



5.3 Conducted emission data outside restricted bands

5.3.1 DSSS mode

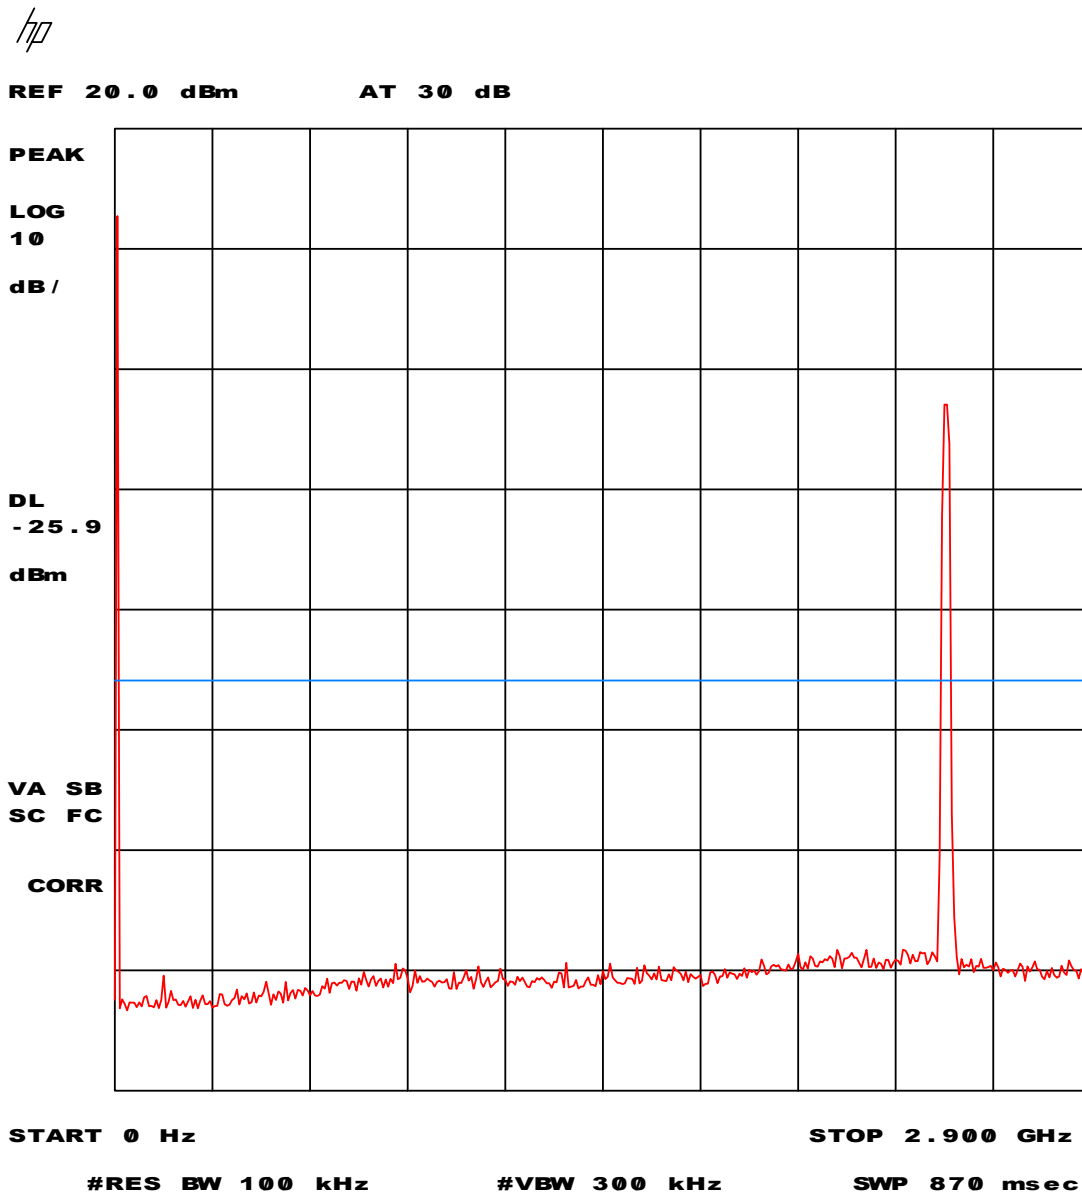


Plot 27 - Conducted emission outside restricted bands (DSSS mode).

Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

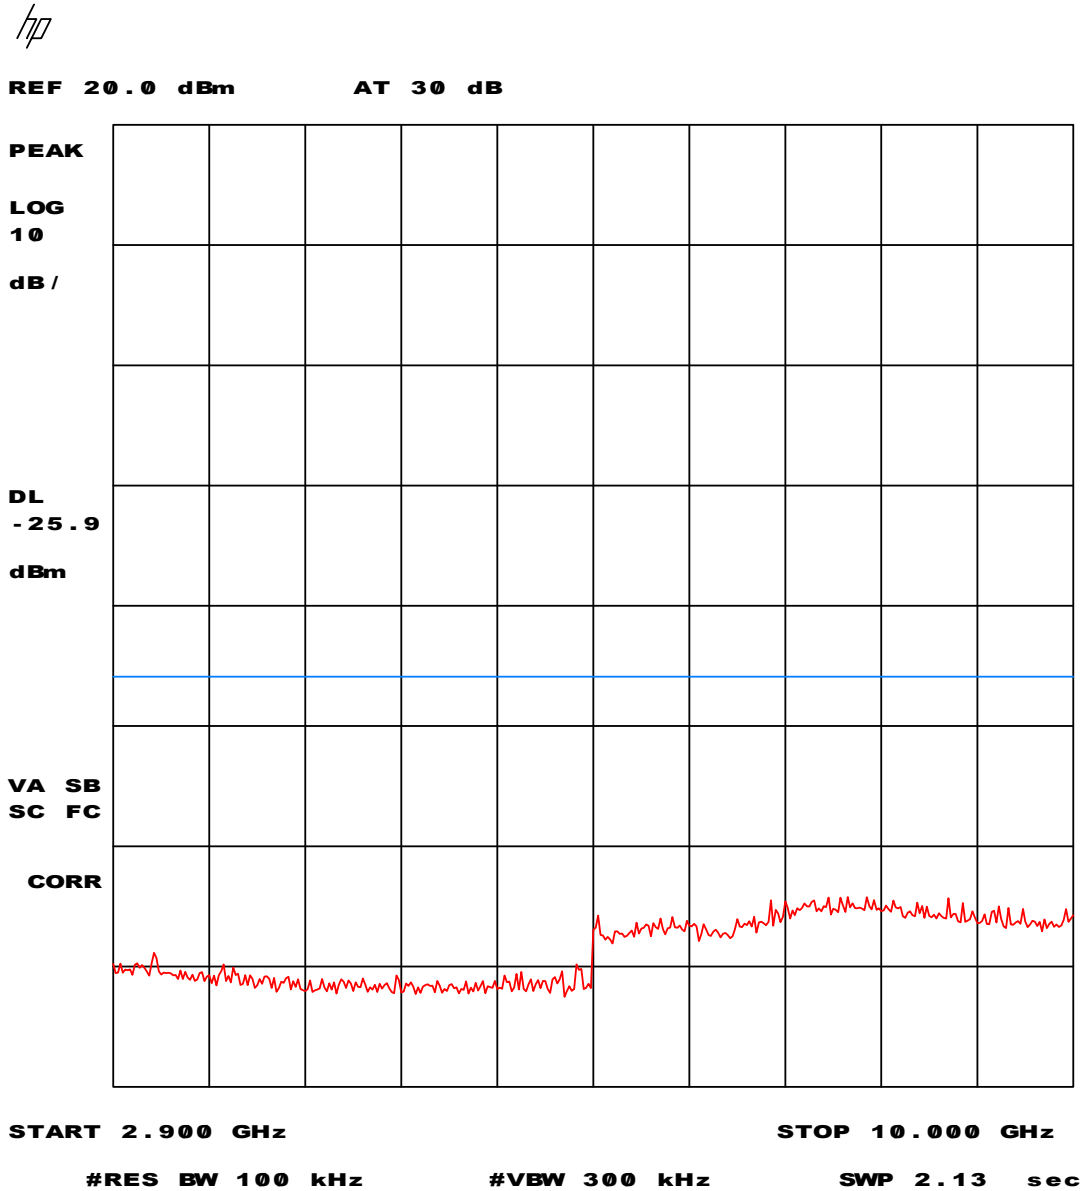

Plot 28 - Conducted emission outside restricted bands (DSSS mode).


Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line.

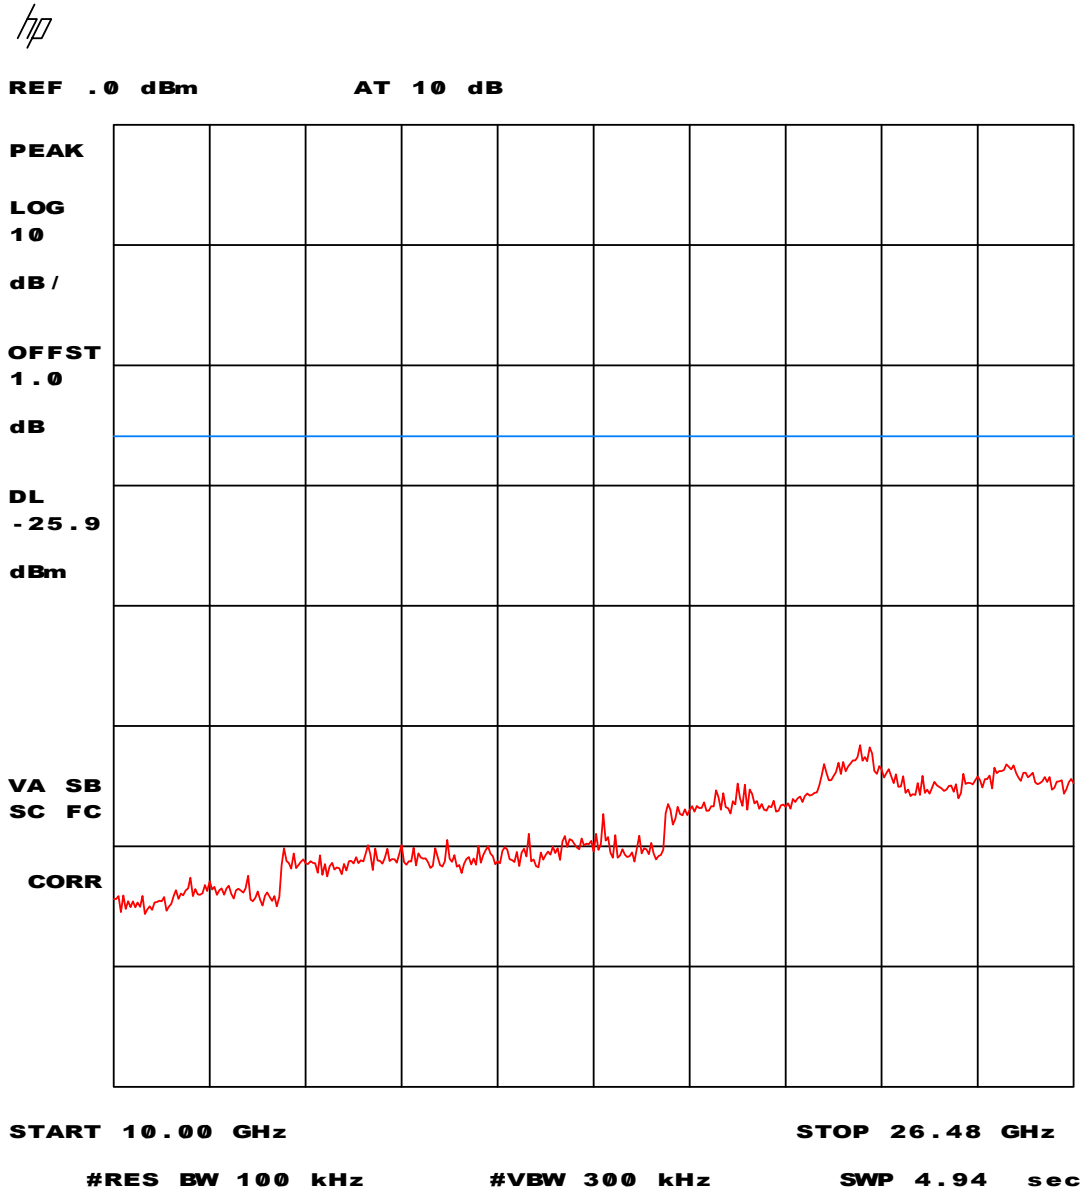

Plot 29 - Conducted emission outside restricted band (DSSS mode).


Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line. Corrected (offset) for cable losses.

5.3.2 OFDM mode

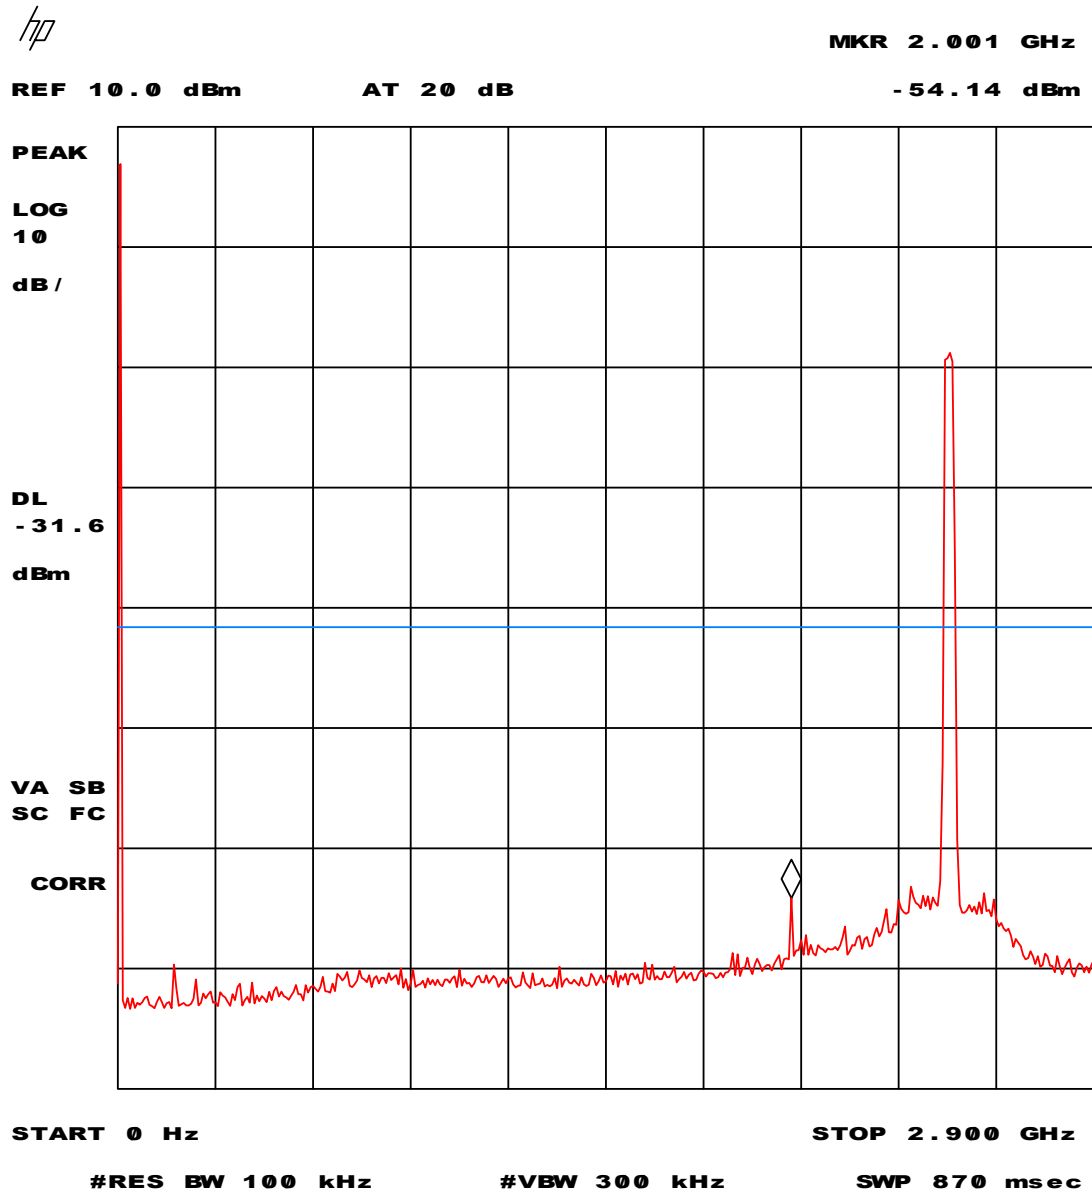


Plot 30 - Conducted emission outside restricted bands (OFDM mode).

Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line.

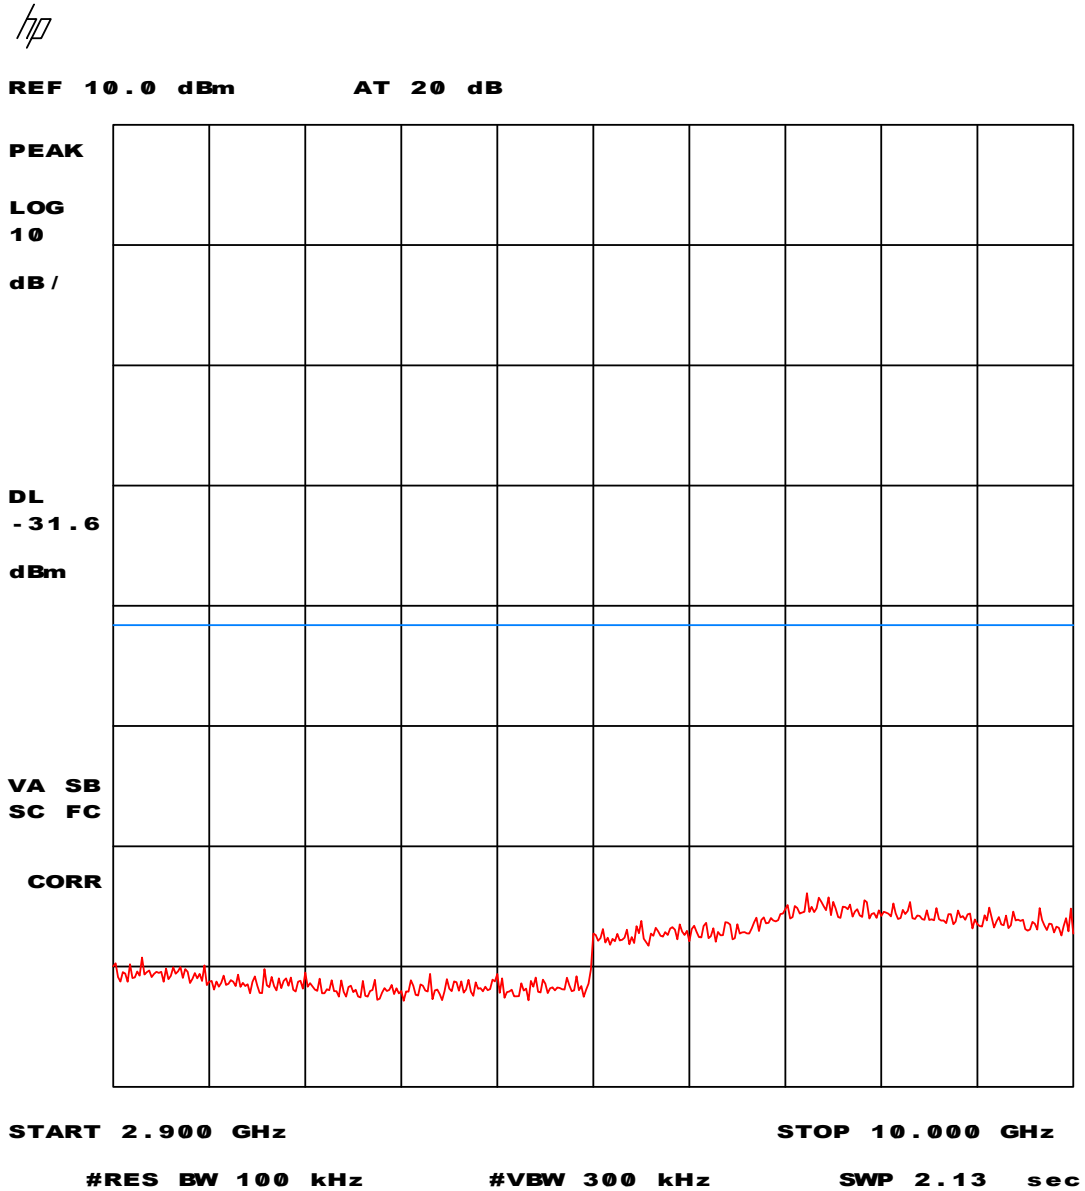

Plot 31 - Conducted emission outside restricted bands (OFDM mode).

Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line.

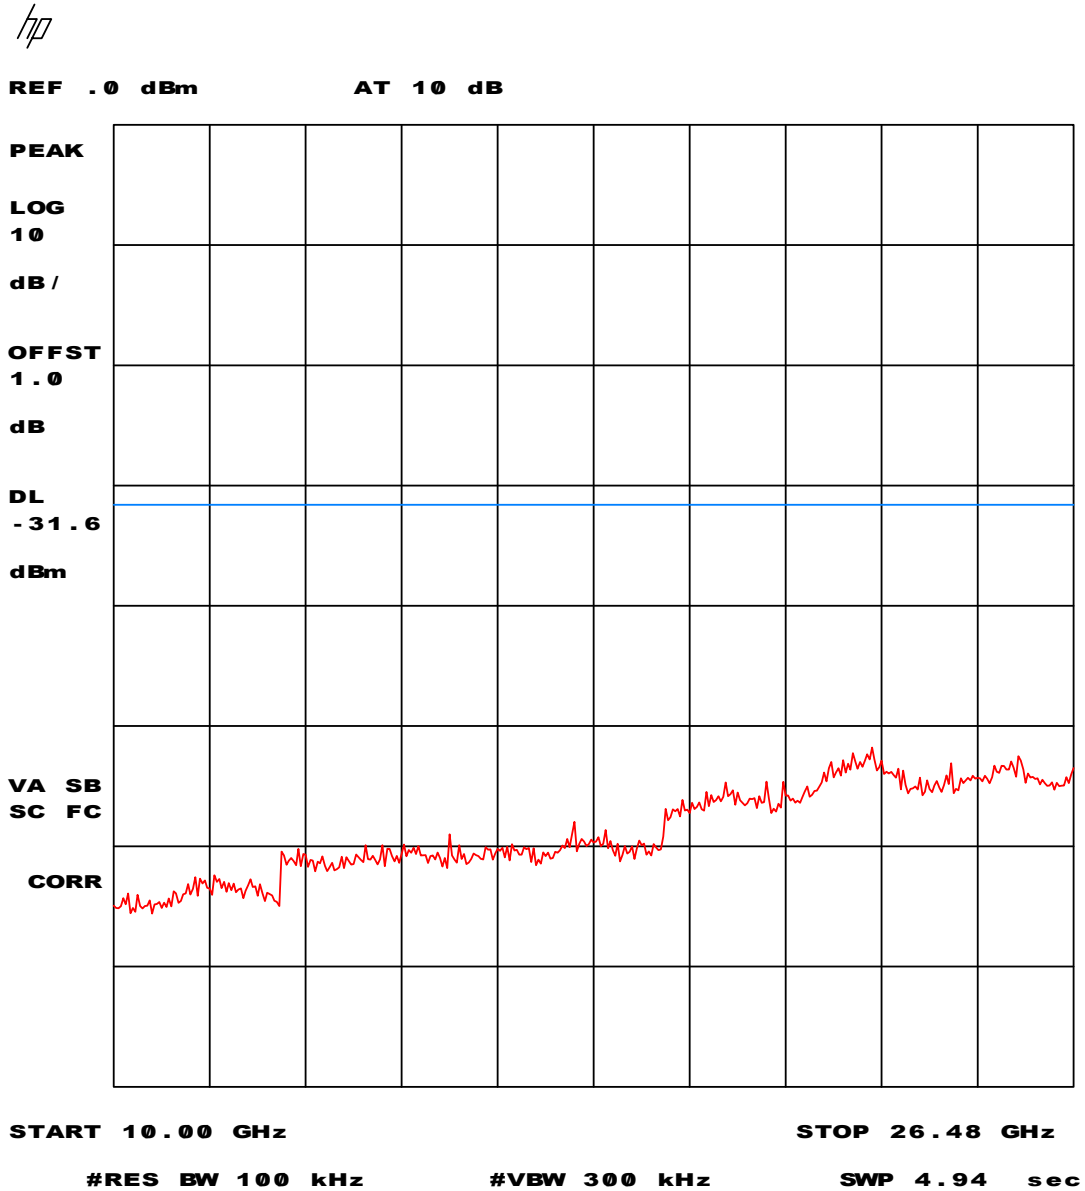


Plot 32 - Conducted emission outside restricted band (OFDM mode).

Conducted emission data outside restricted bands in a 100 kHz bandwidth shall be at least 20 dB below the highest level in a 100 kHz bandwidth within the band. Display line :: -20 dB limit line. Corrected (offset) for cable losses.


5.4 Peak power spectral density

5.4.1 DSSS mode

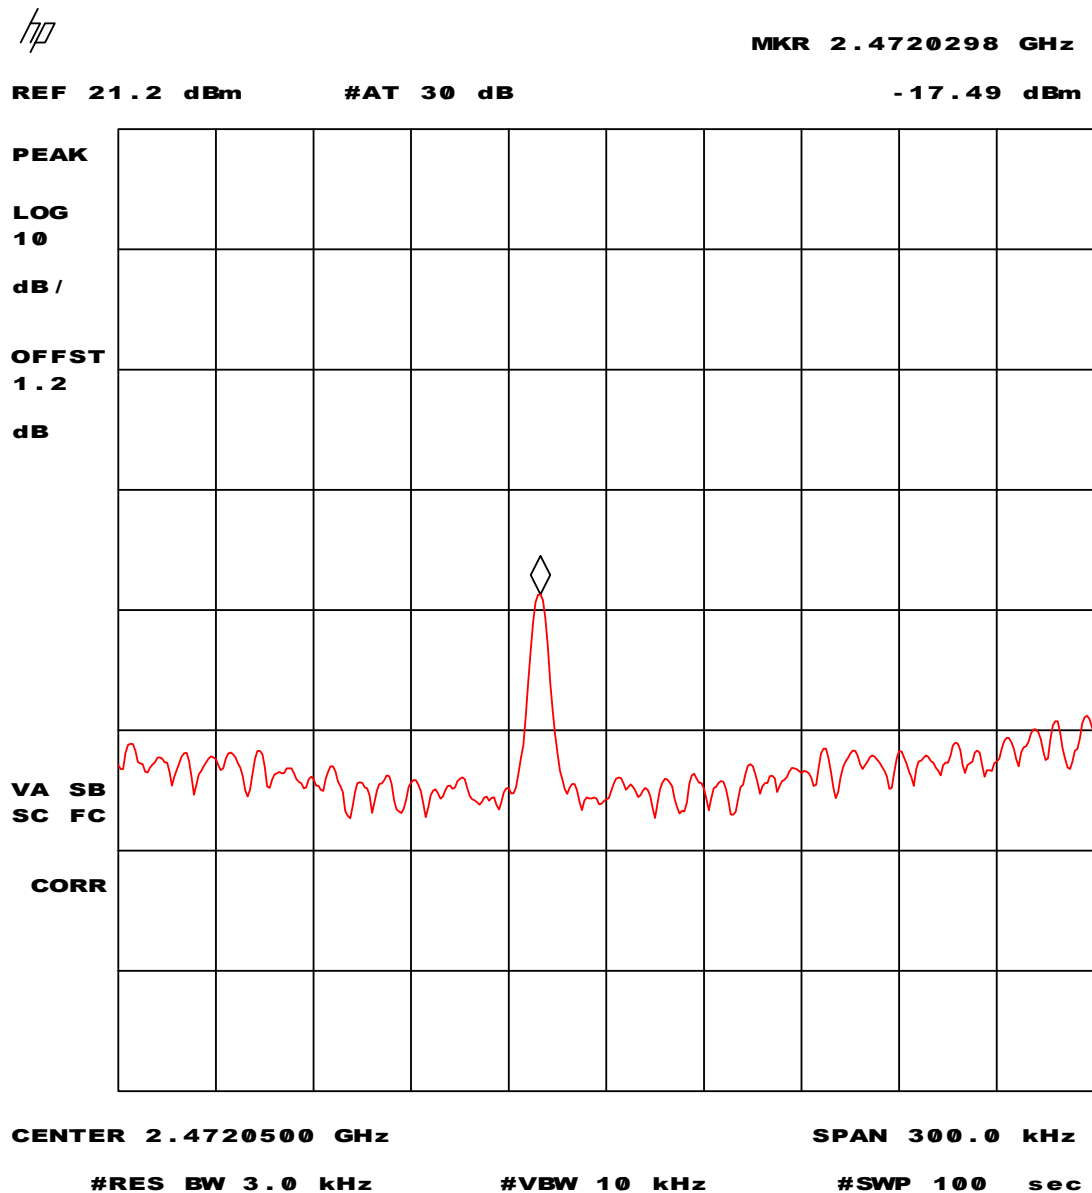


Plot 33 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 1 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.

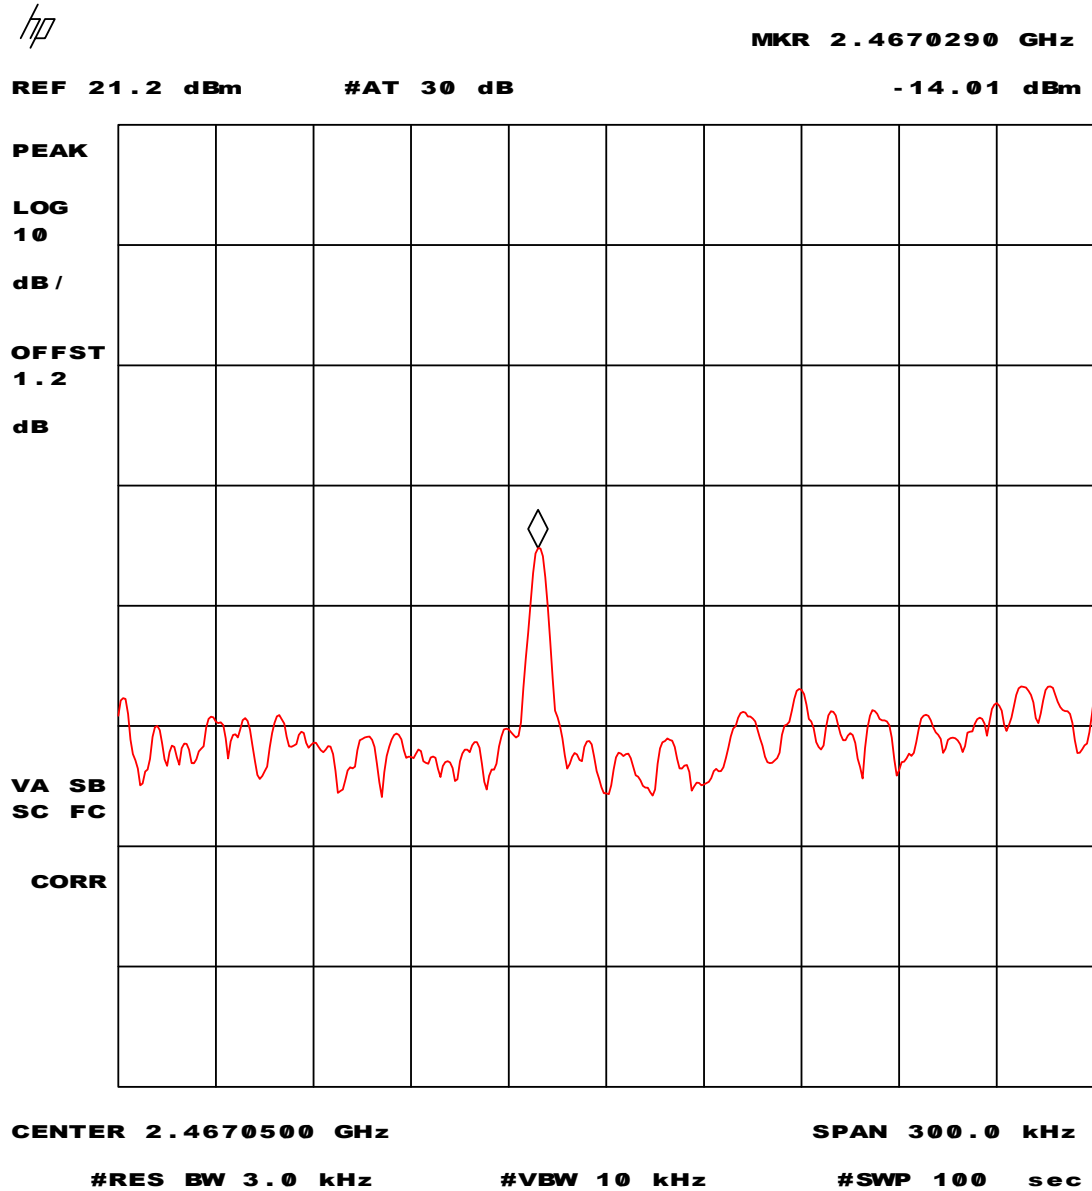

Plot 34 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 2 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.

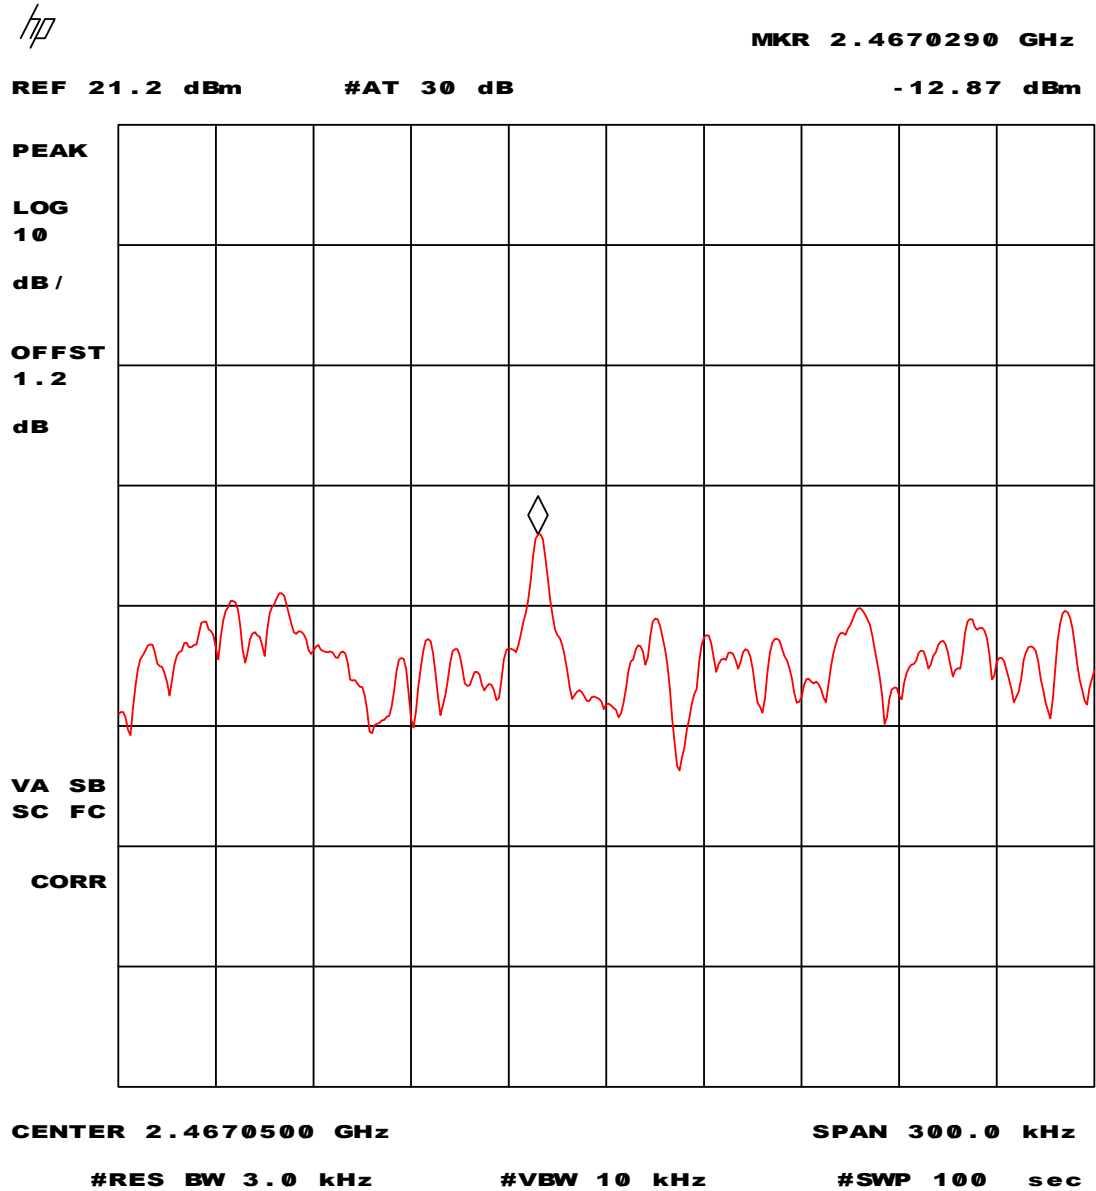


Plot 35 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 5.5 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

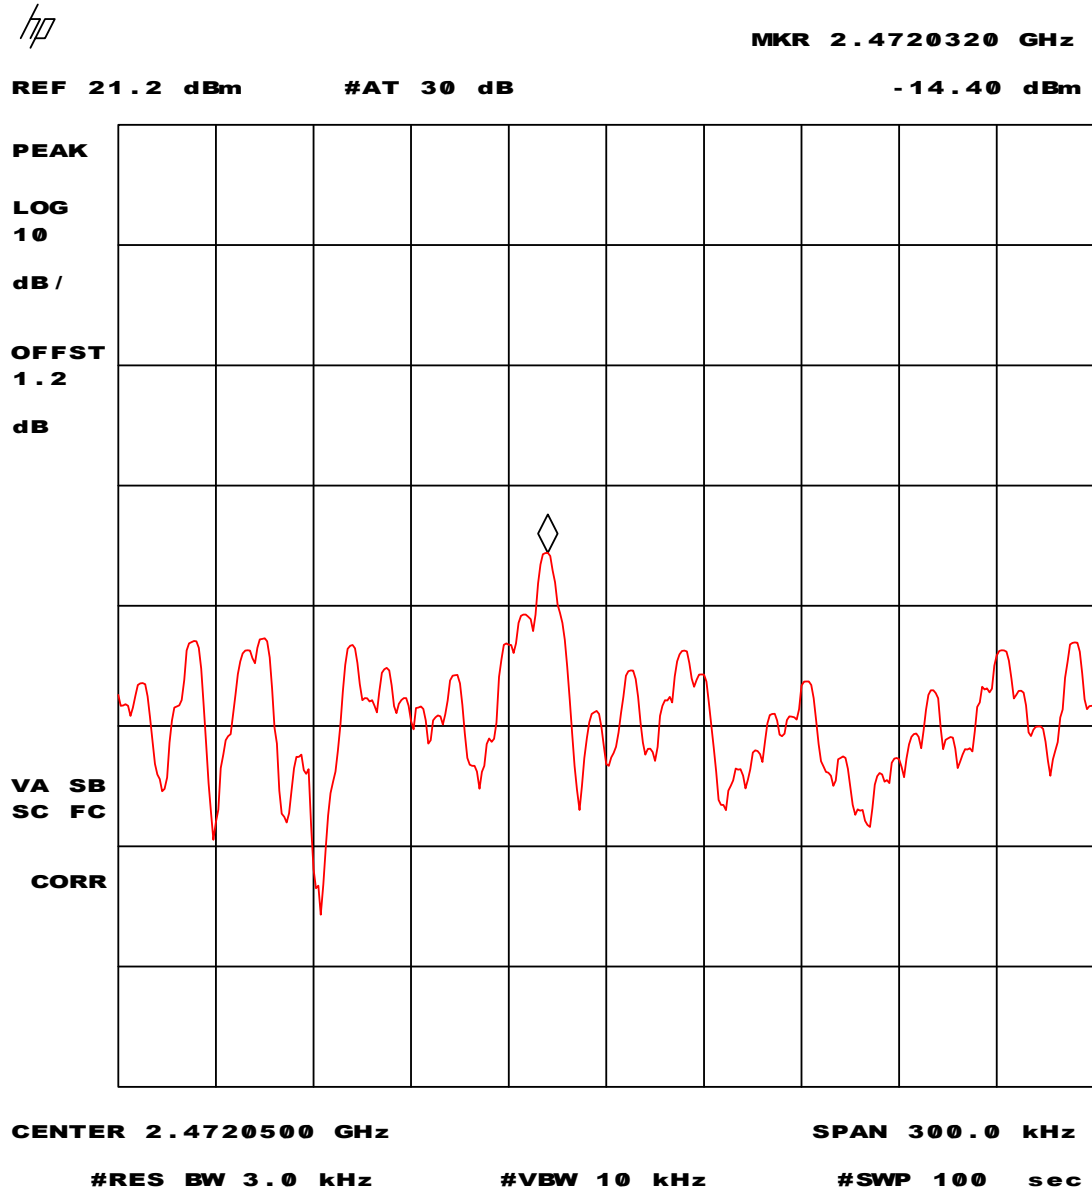


Plot 36 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 11 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.

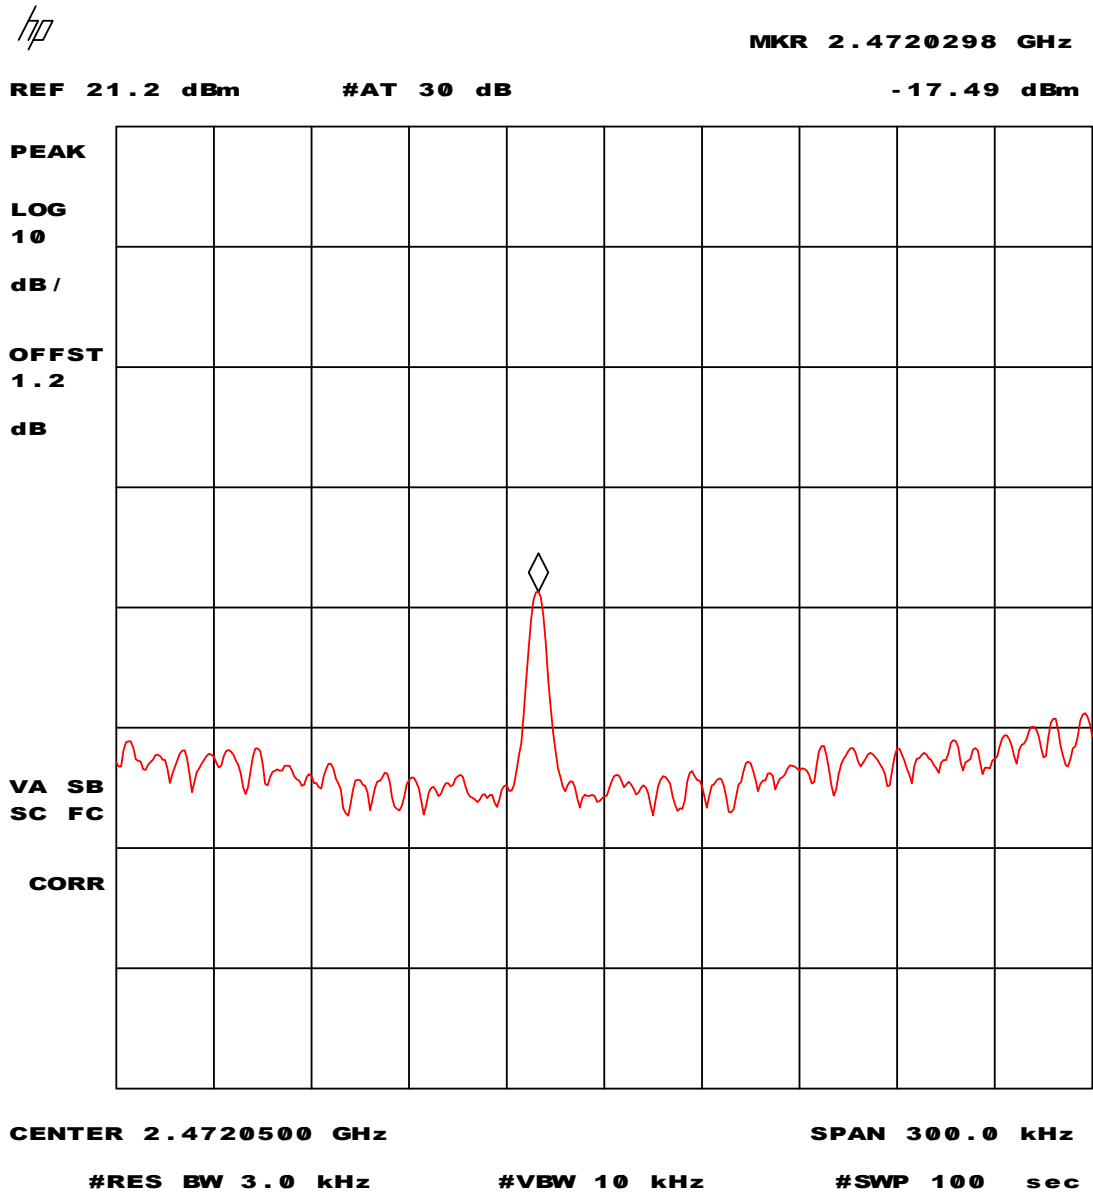

Plot 37 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 1 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.

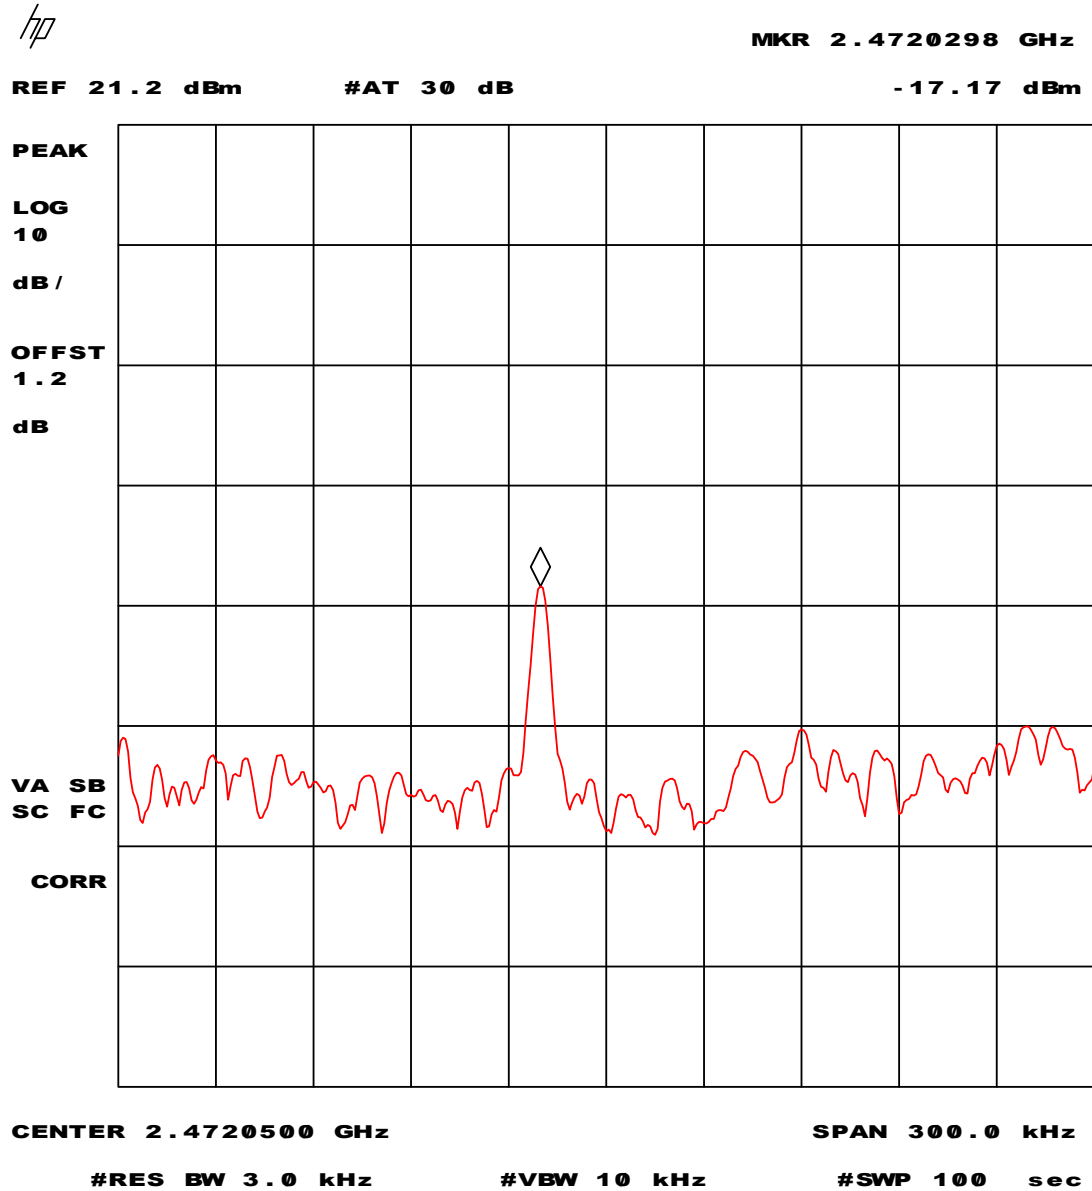


Plot 38 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 2 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

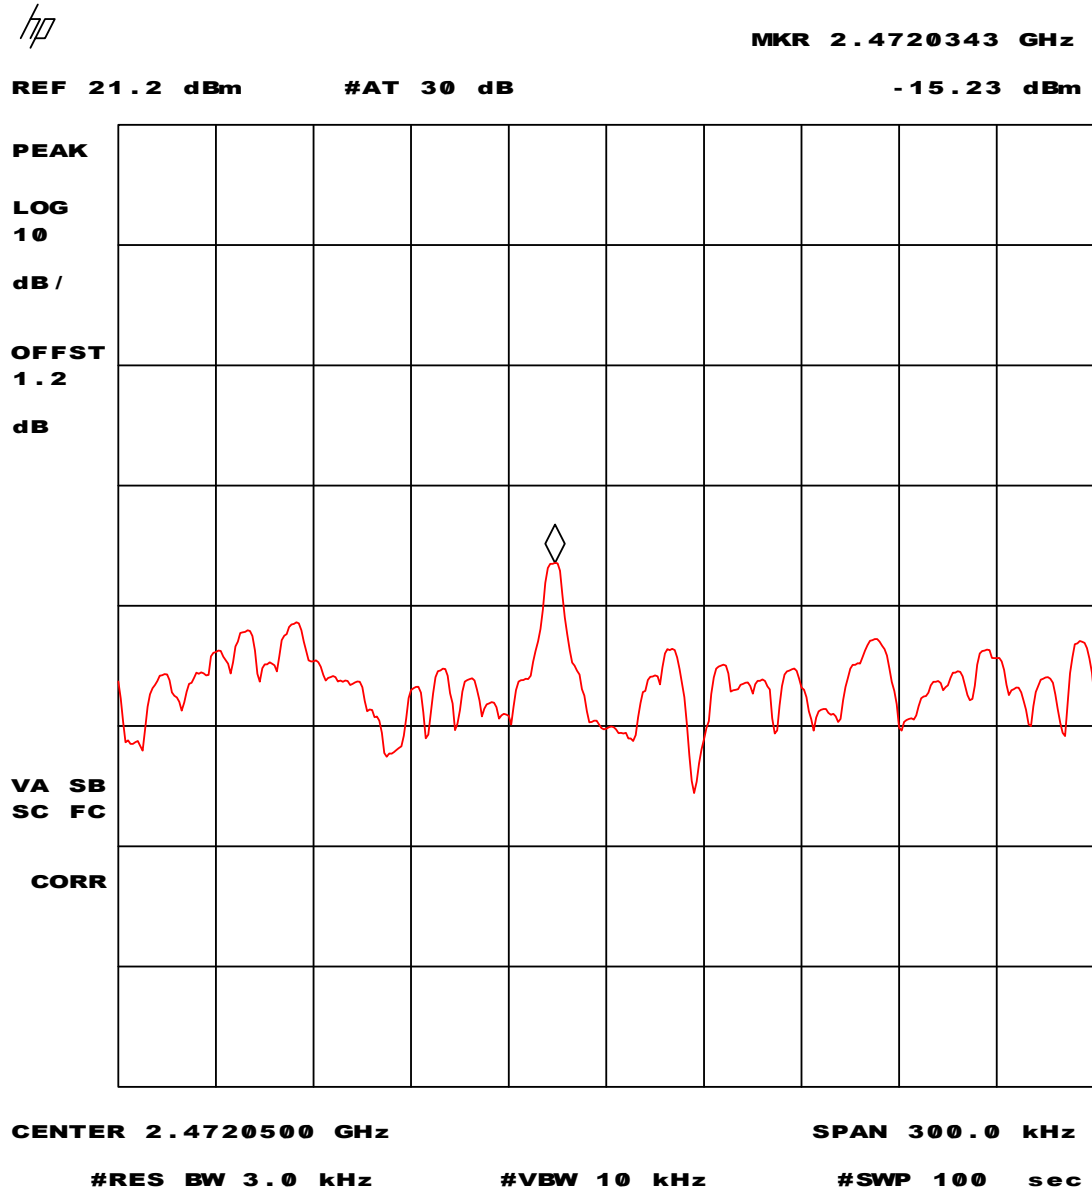


Plot 39 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 5.5 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

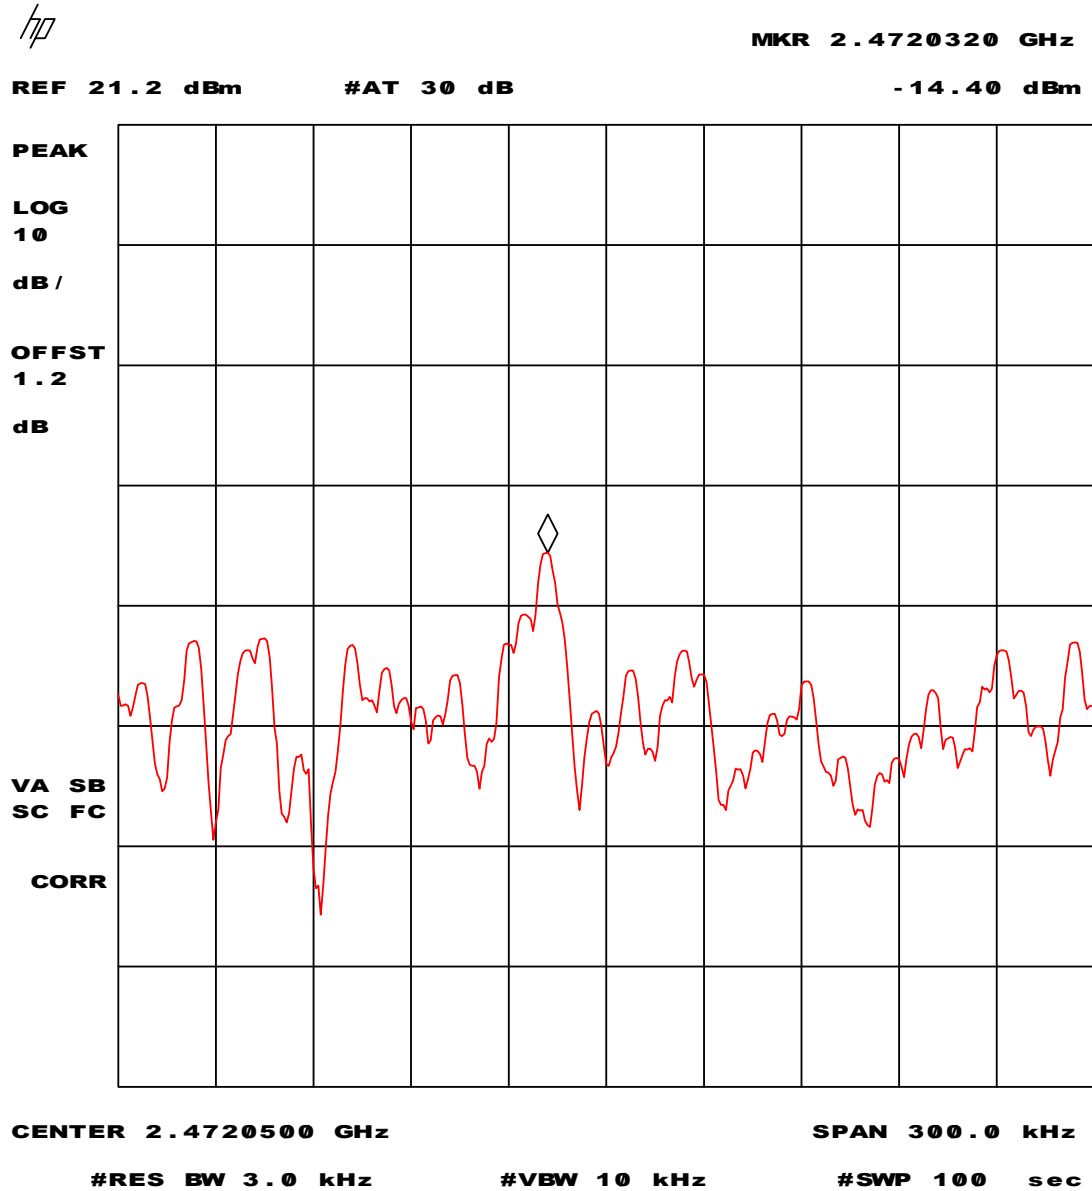

Plot 40 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.


Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 11 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.

5.4.2 OFDM mode

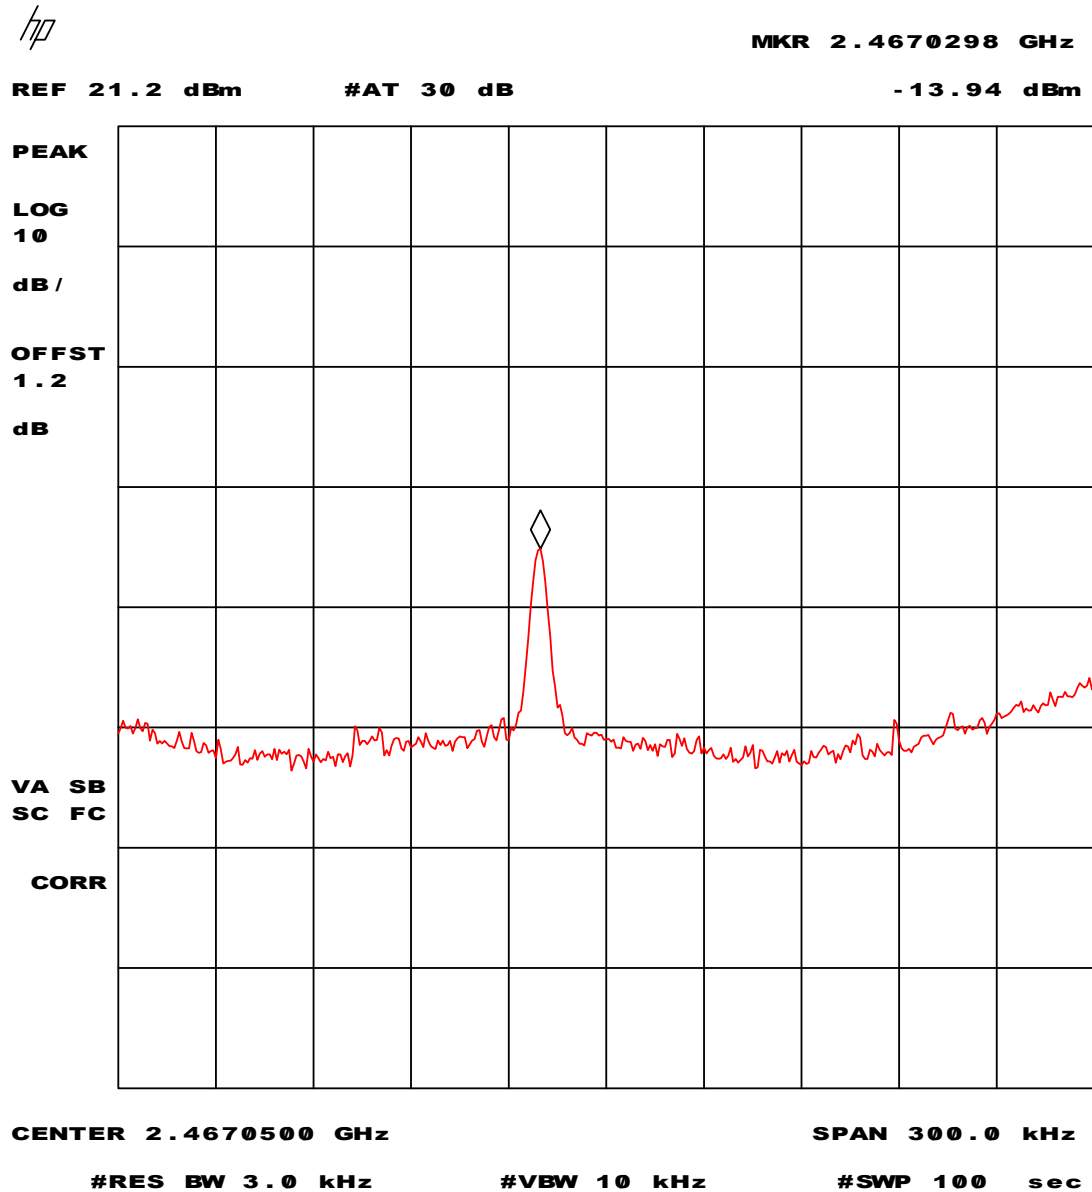


Plot 41 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 6 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.

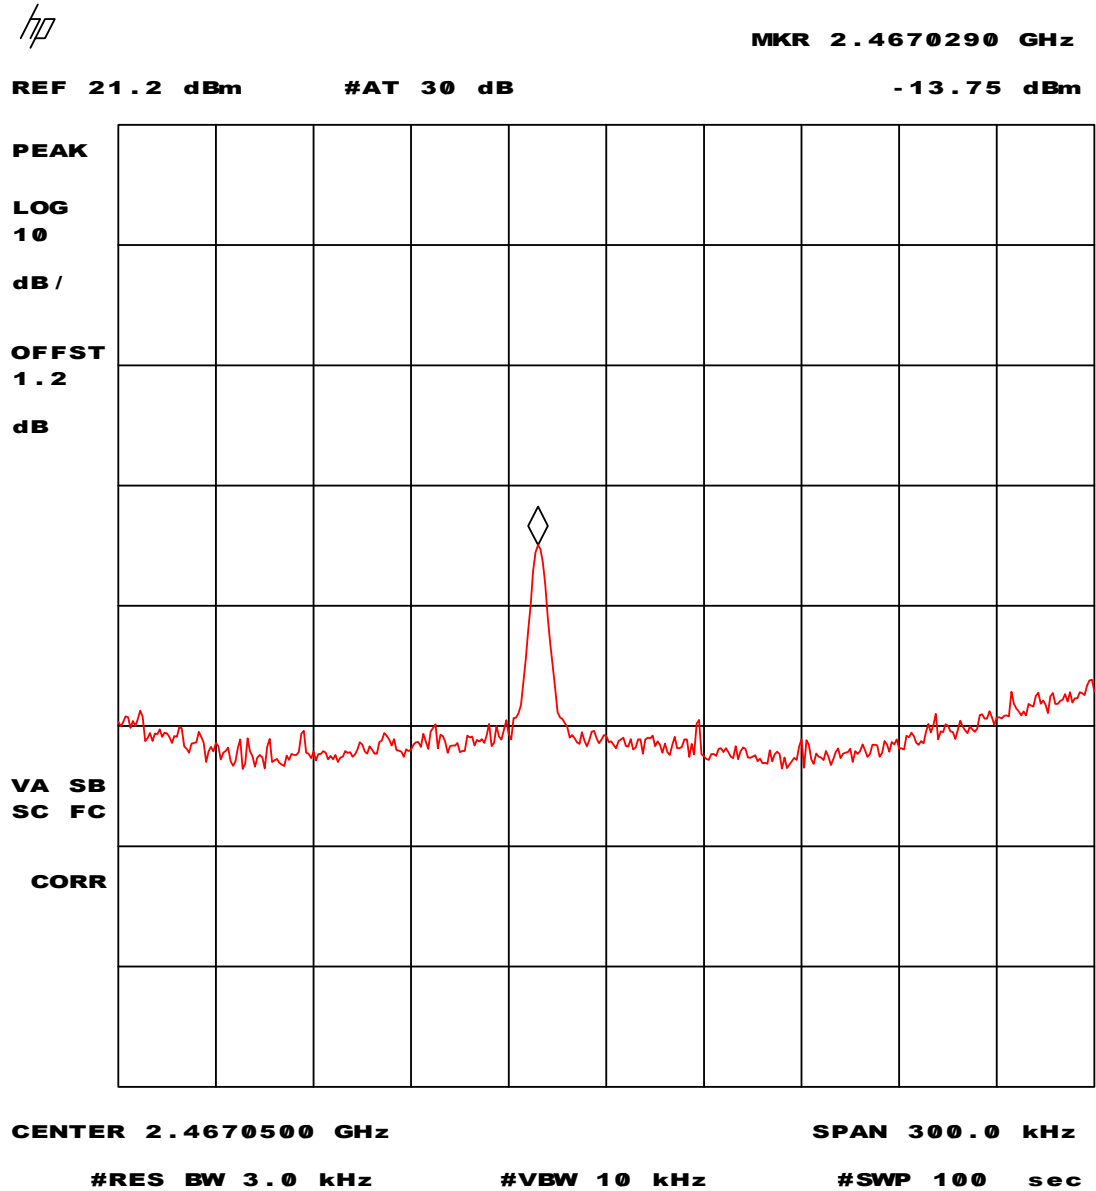


Plot 42 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 9 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.

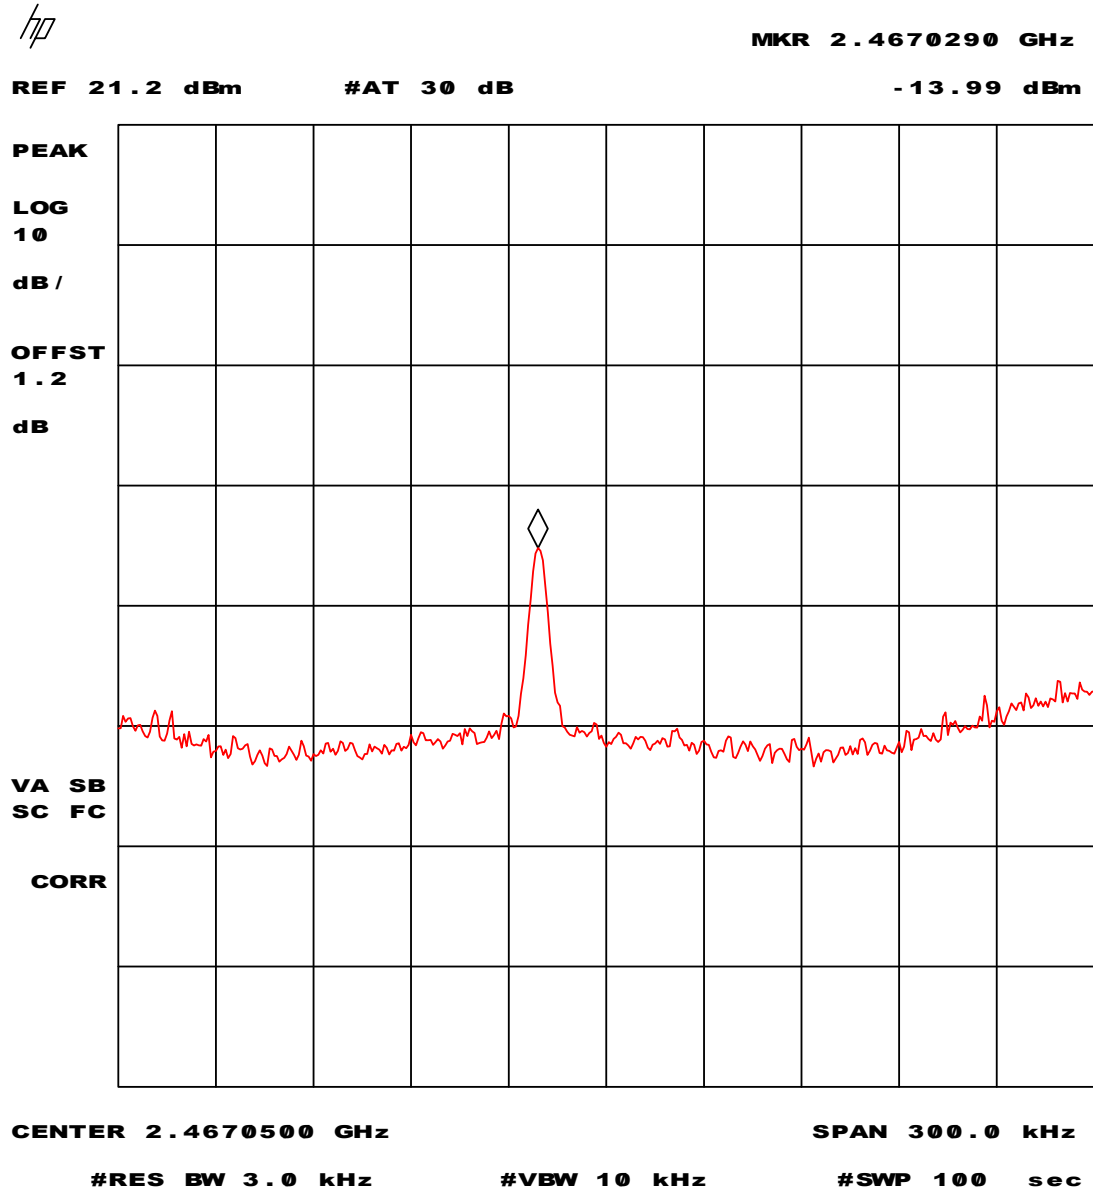


Plot 43 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 18 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.

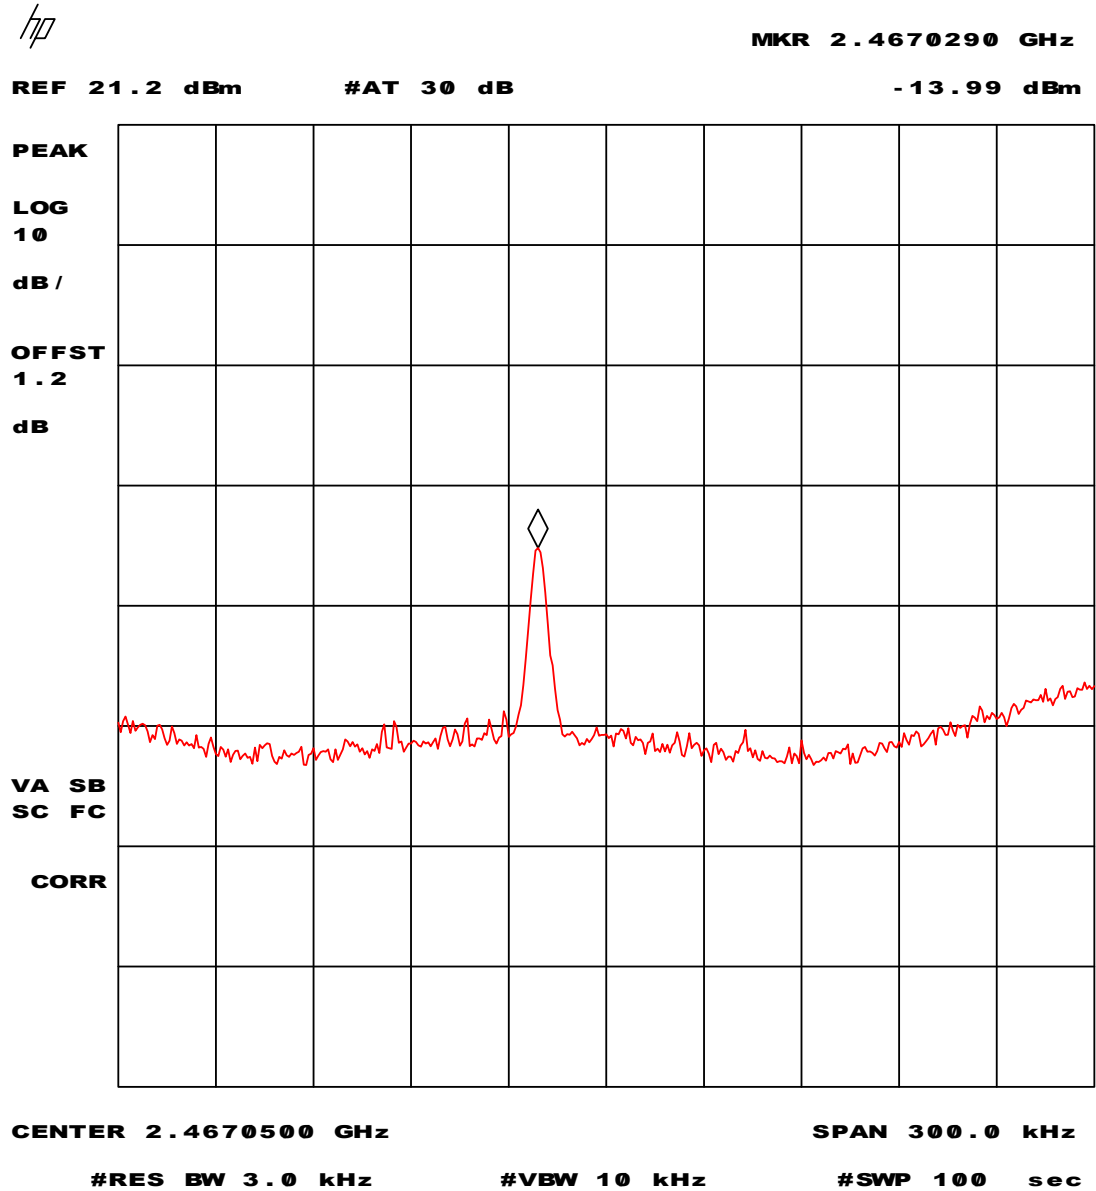

Plot 44 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 36 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.

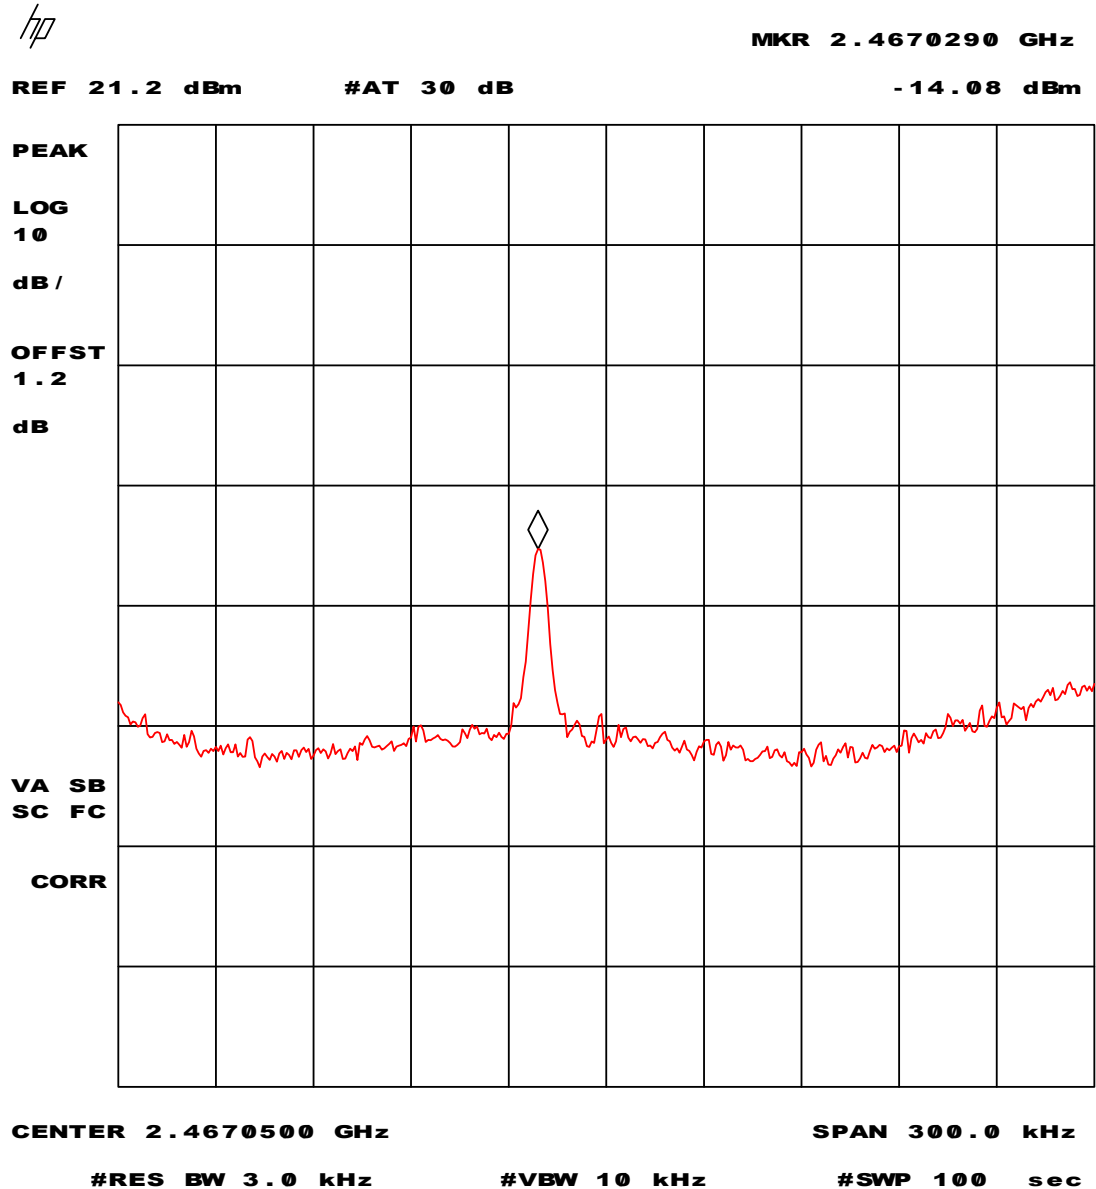


Plot 45 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 54 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 12 (2467 MHz) during this measurement.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

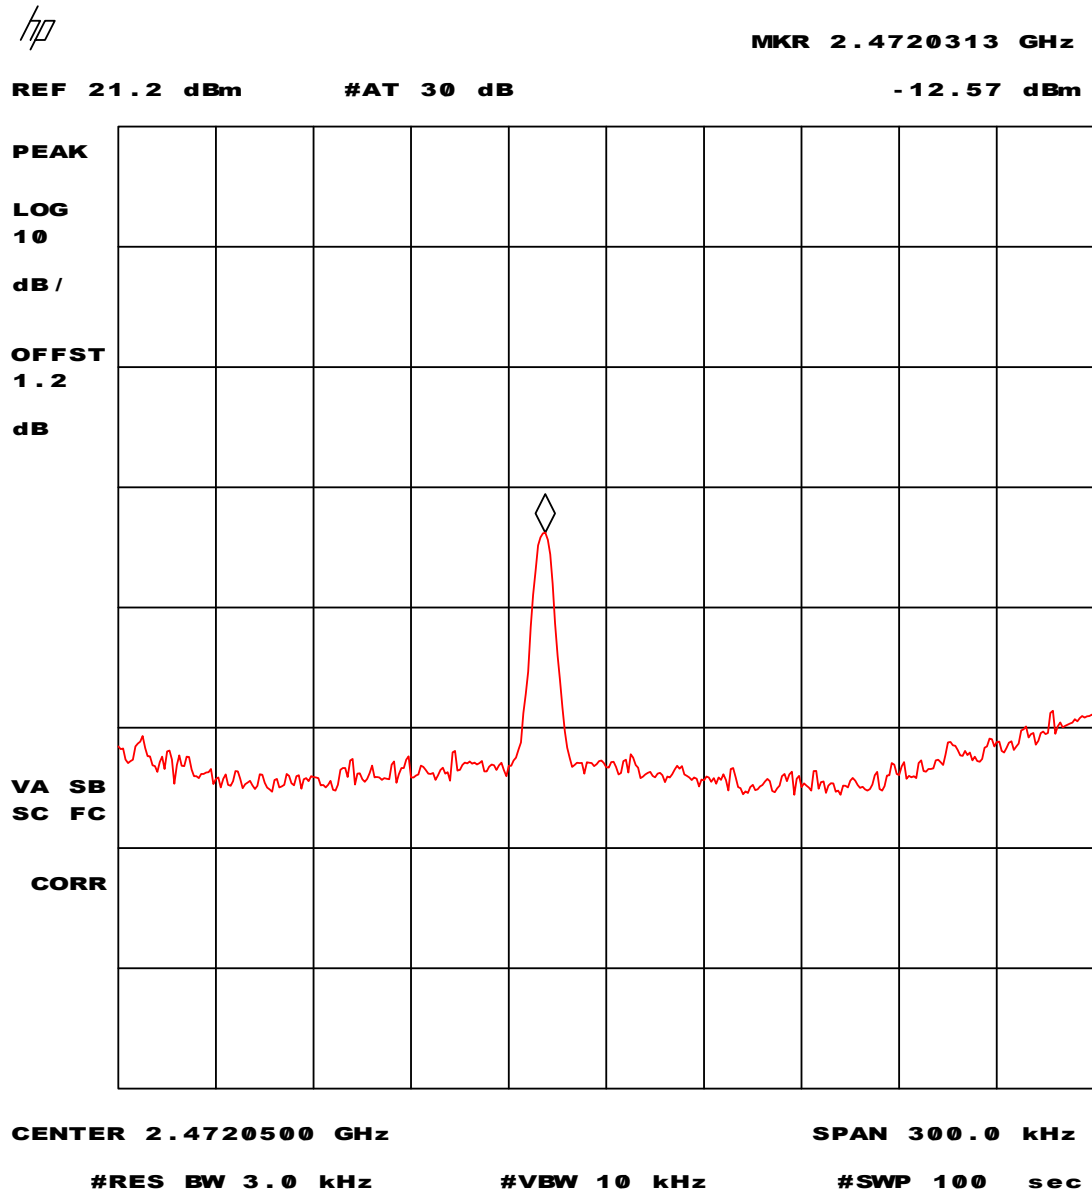


Plot 46 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 6 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.

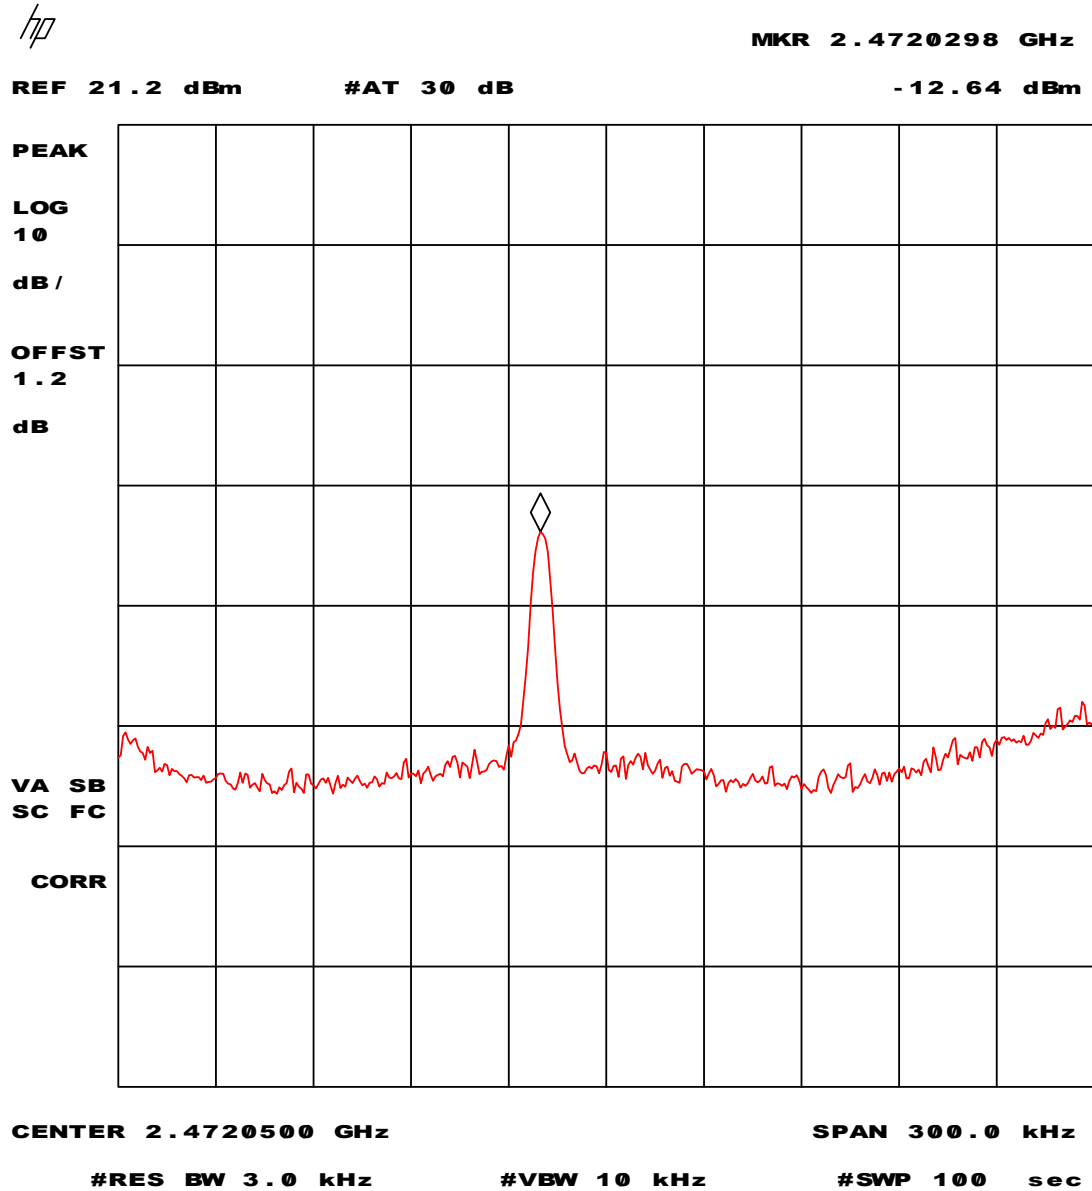


Plot 47 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 9 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.

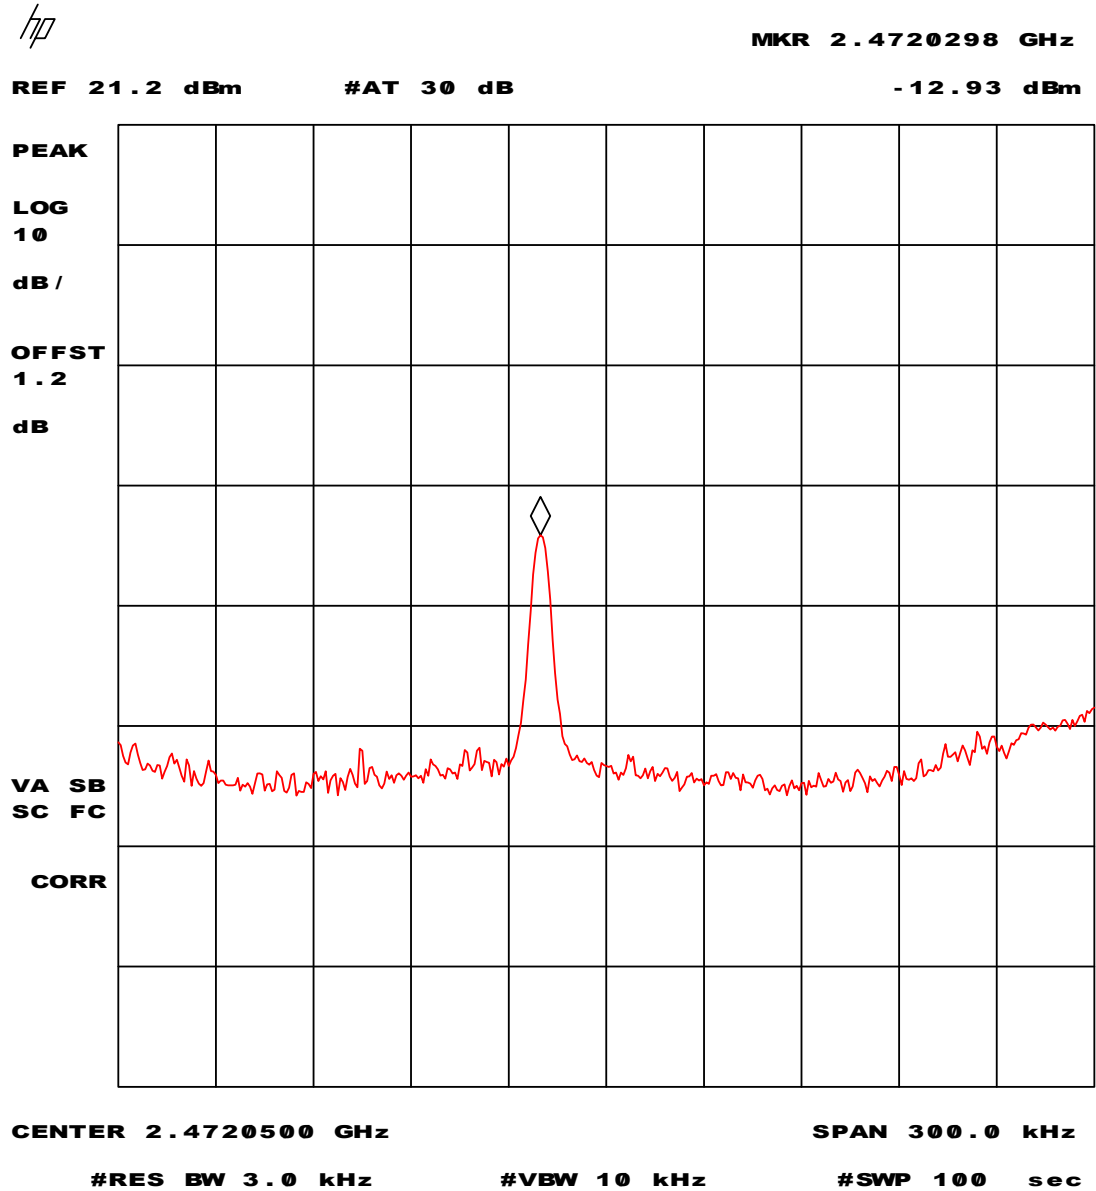


Plot 48 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 18 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.

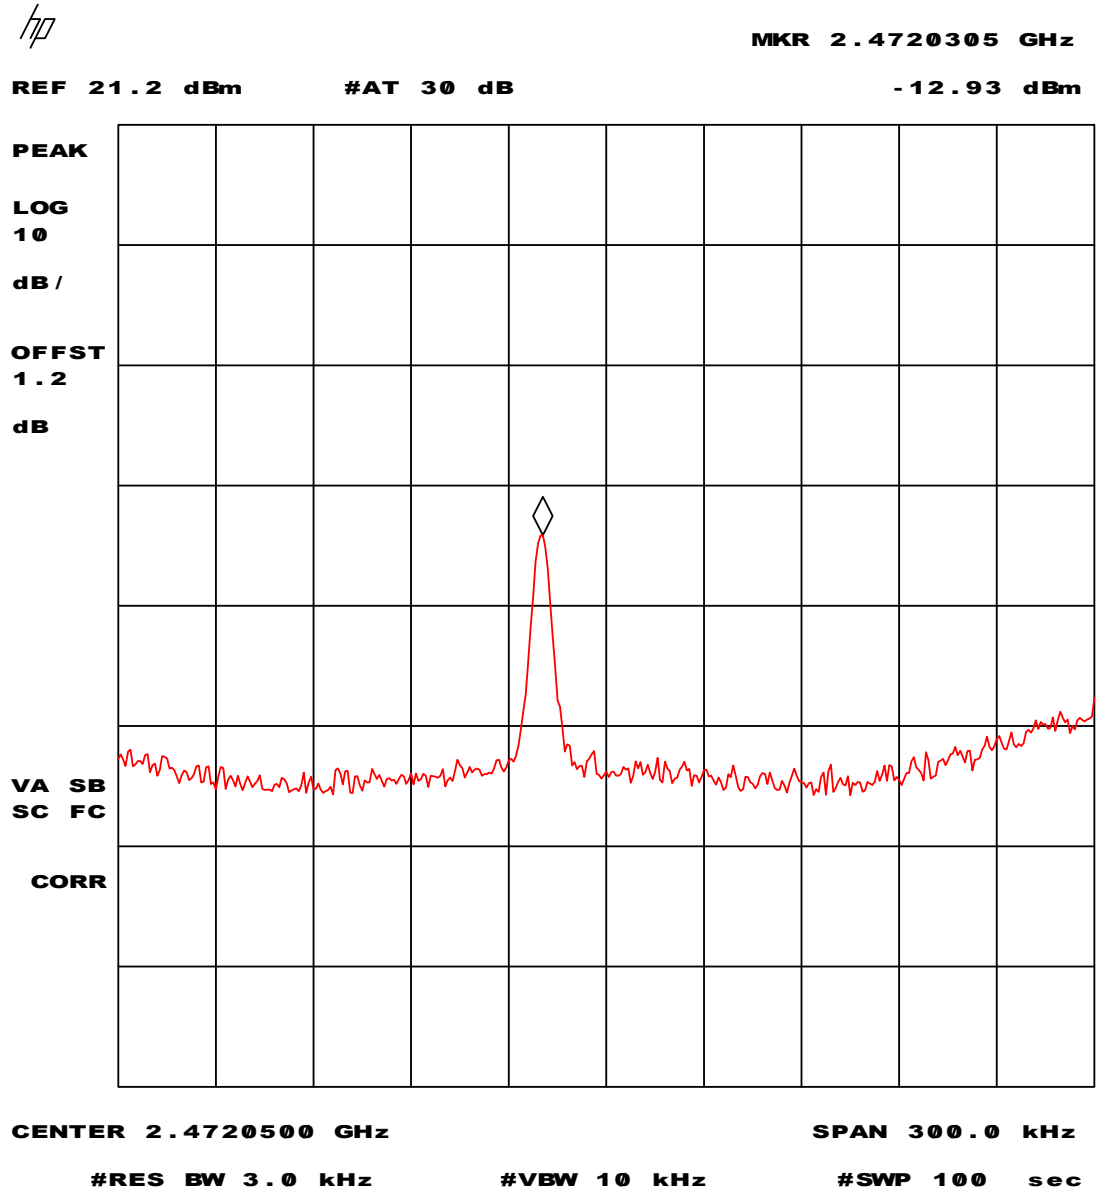

Plot 49 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 36 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.

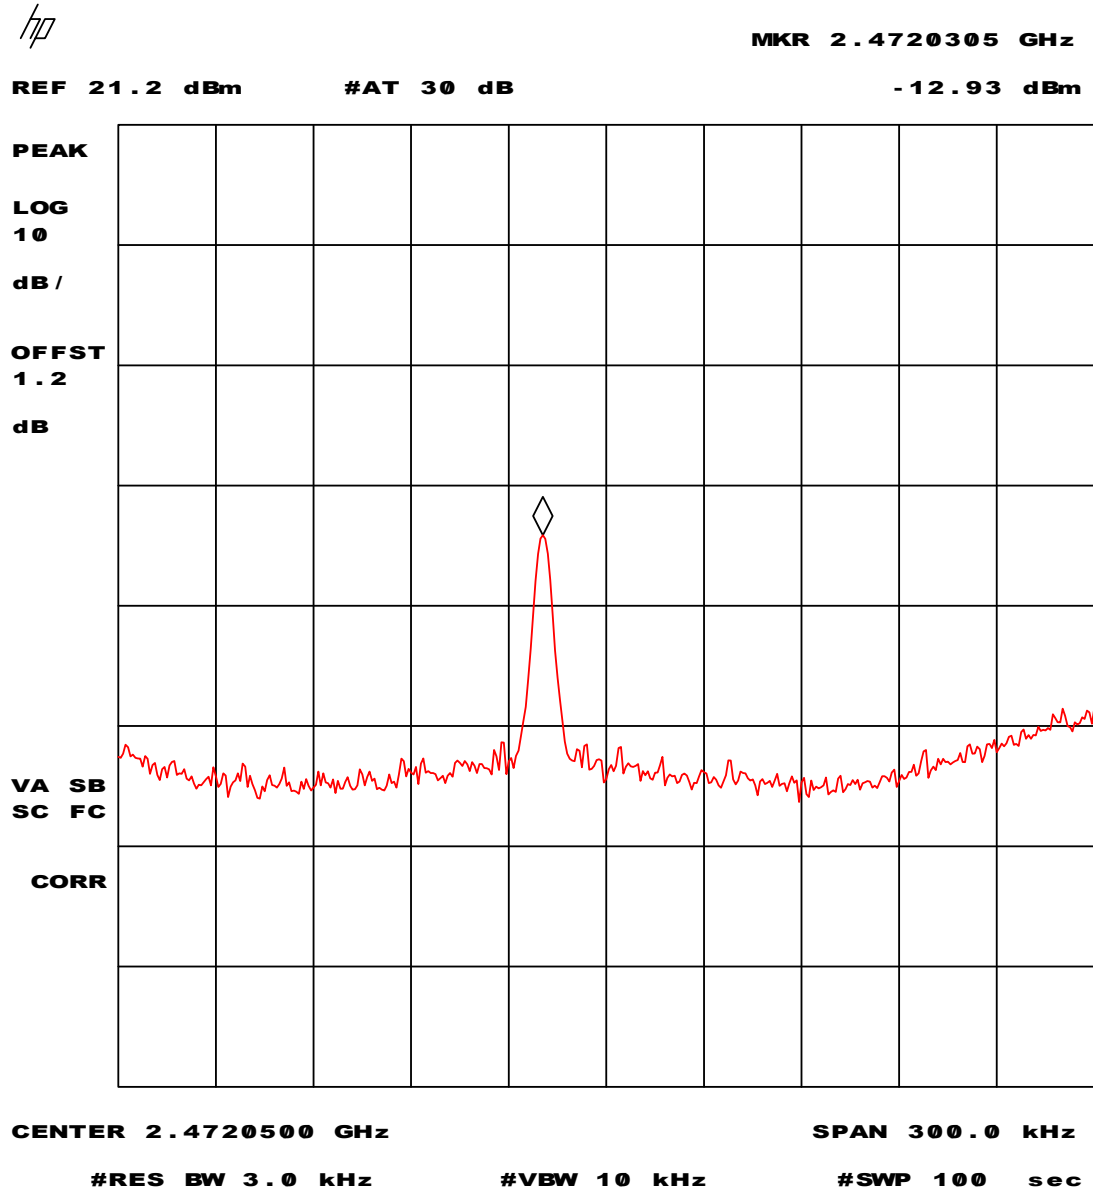


Plot 50 - Peak power spectral density (conducted) from the intentional radiator in any 3 kHz band.

Peak power spectral density (conducted) in a 3 kHz bandwidth at a transmission bit-rate of 54 Mbit/s. Corrected (offset) for cable losses. The EUT was operating on channel 13 (2472 MHz) during this measurement.



5.5 Minimum 20 dB bandwidth

5.5.1 DSSS mode

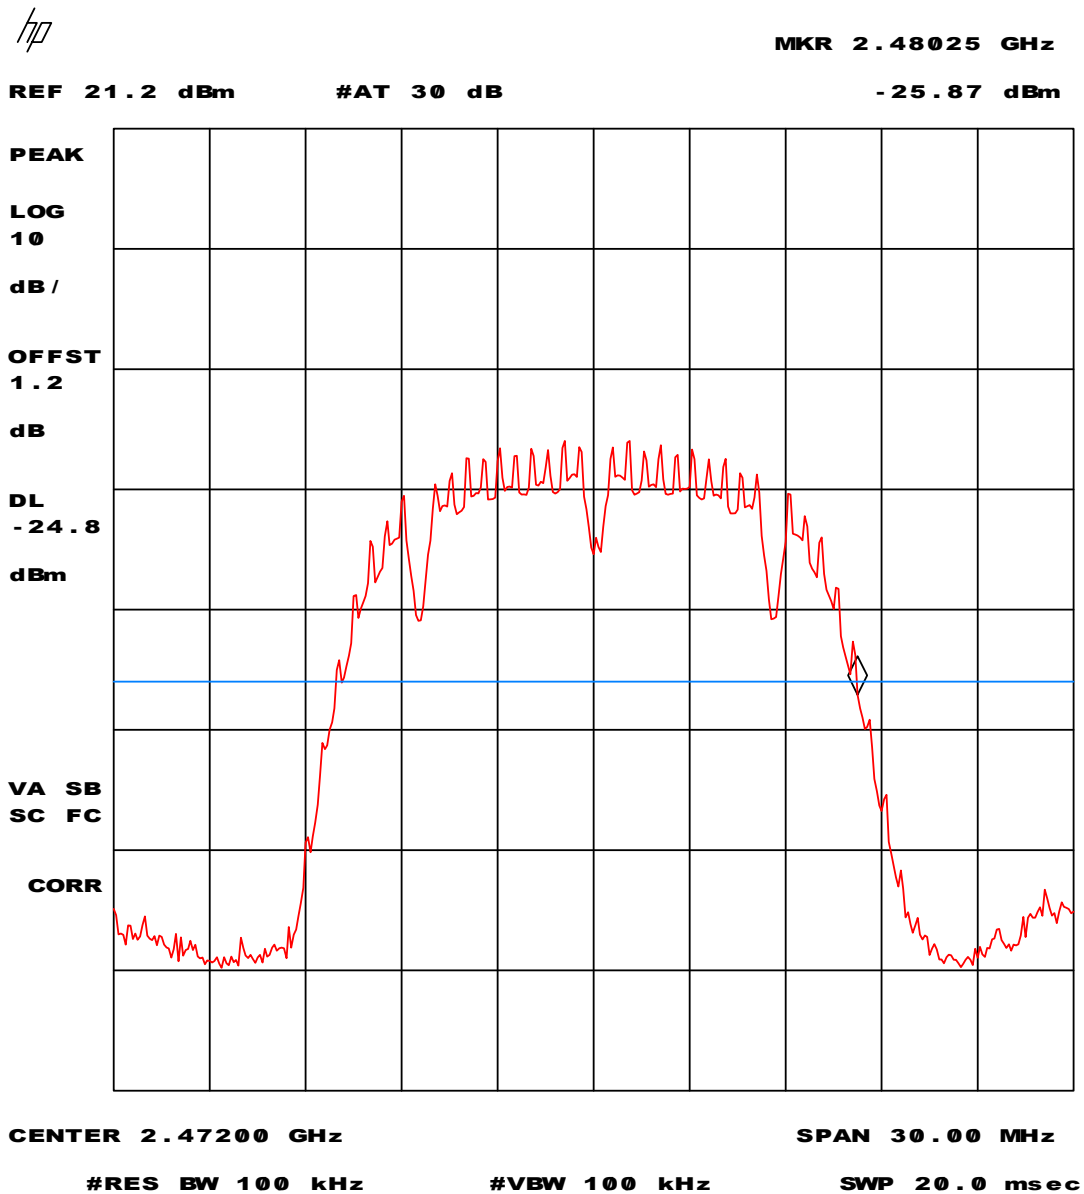


Plot 51 - Minimum 20 dB bandwidth at a transmission bit-rate of 1 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.




Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

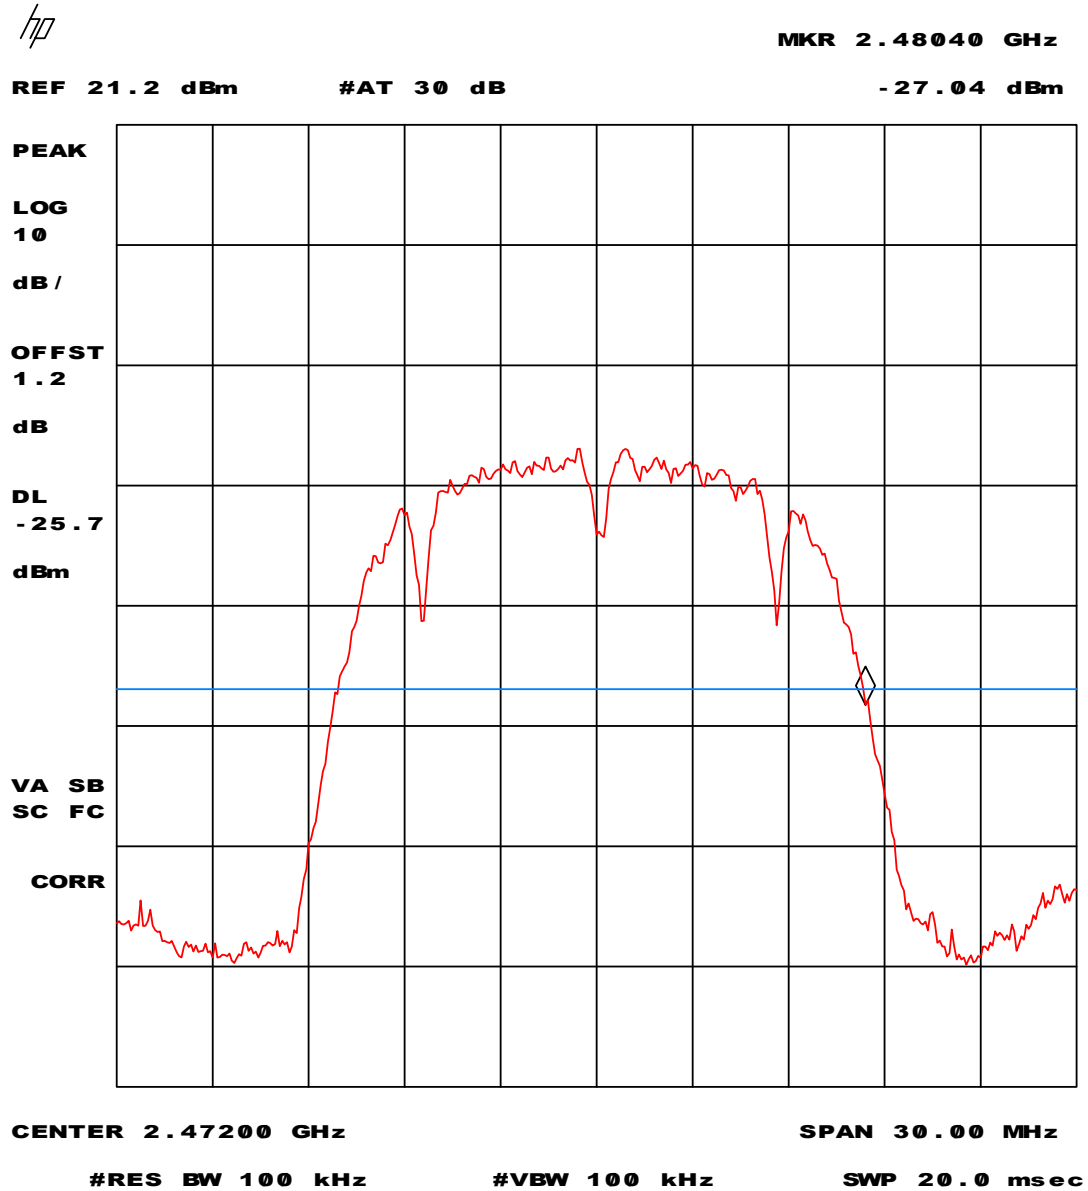

Plot 52 - Minimum 20 dB bandwidth at a transmission bit-rate of 2 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

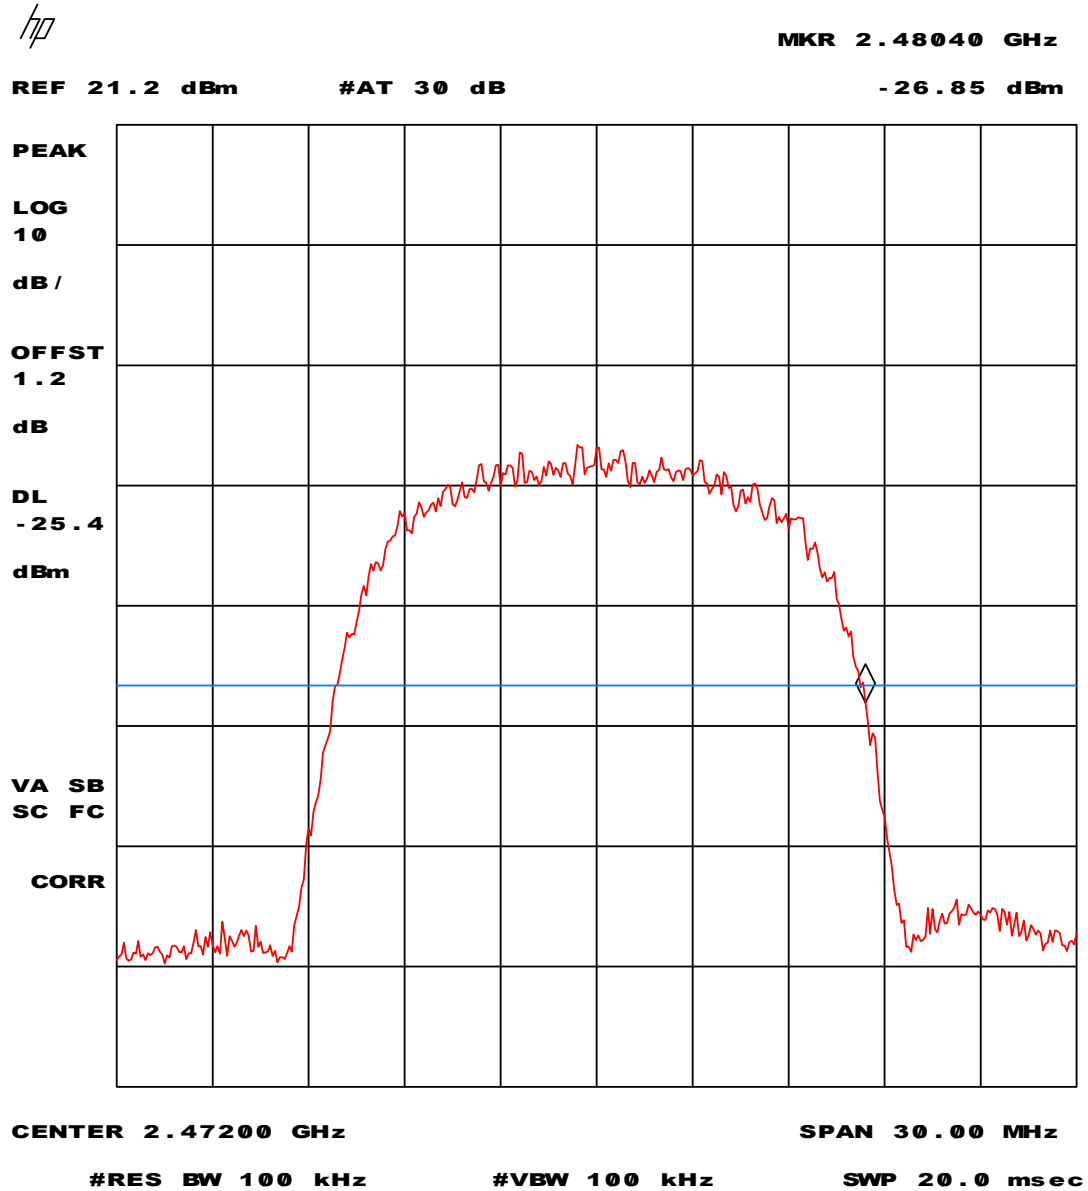


Plot 53 - Minimum 20 dB bandwidth at a transmission bit-rate of 5.5 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

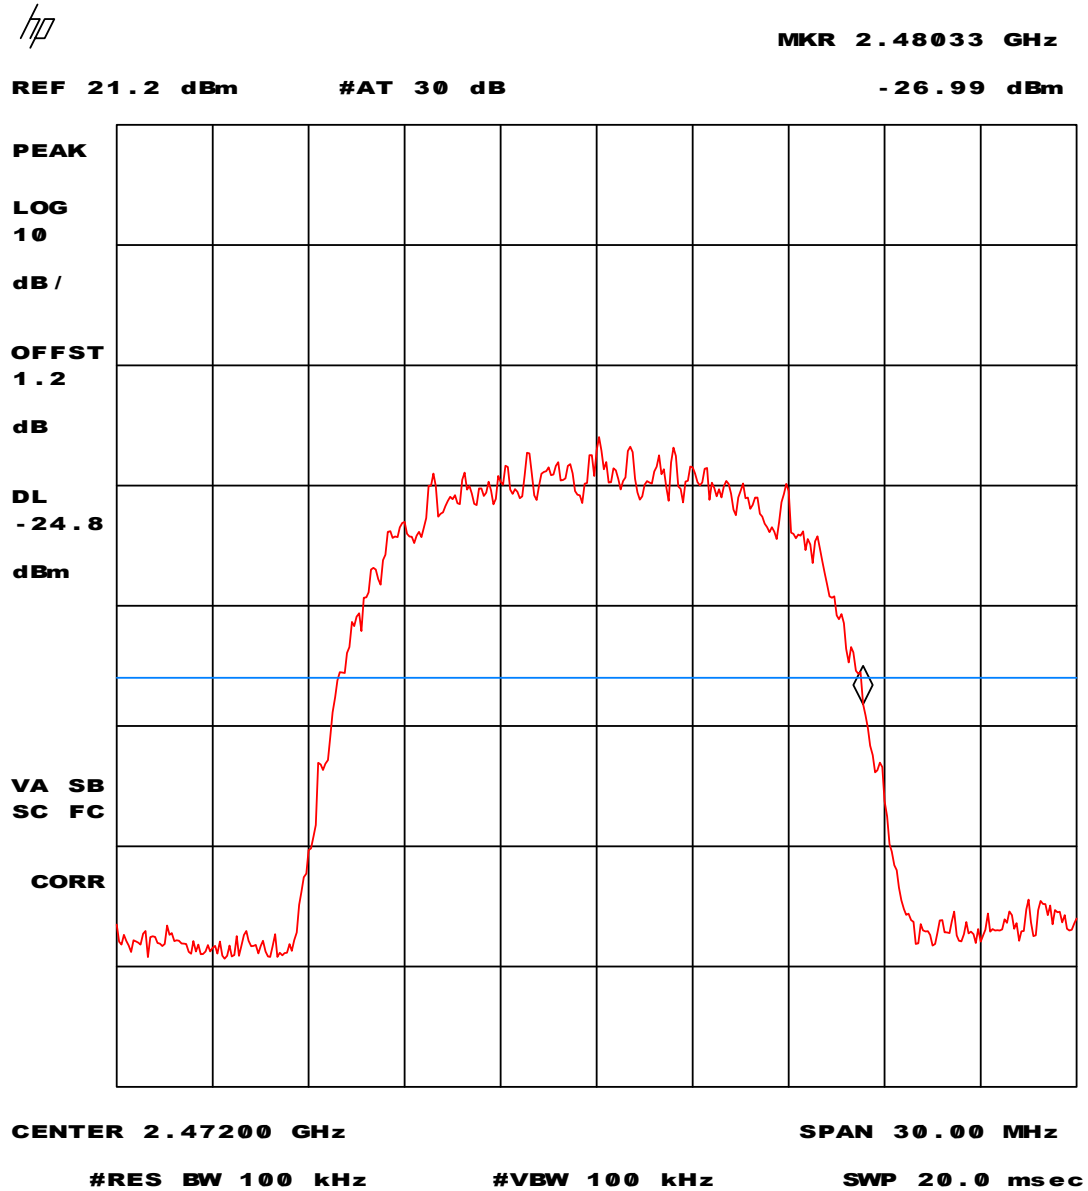


Plot 54 - Minimum 20 dB bandwidth at a transmission bit-rate of 11 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.




5.5.2 OFDM mode

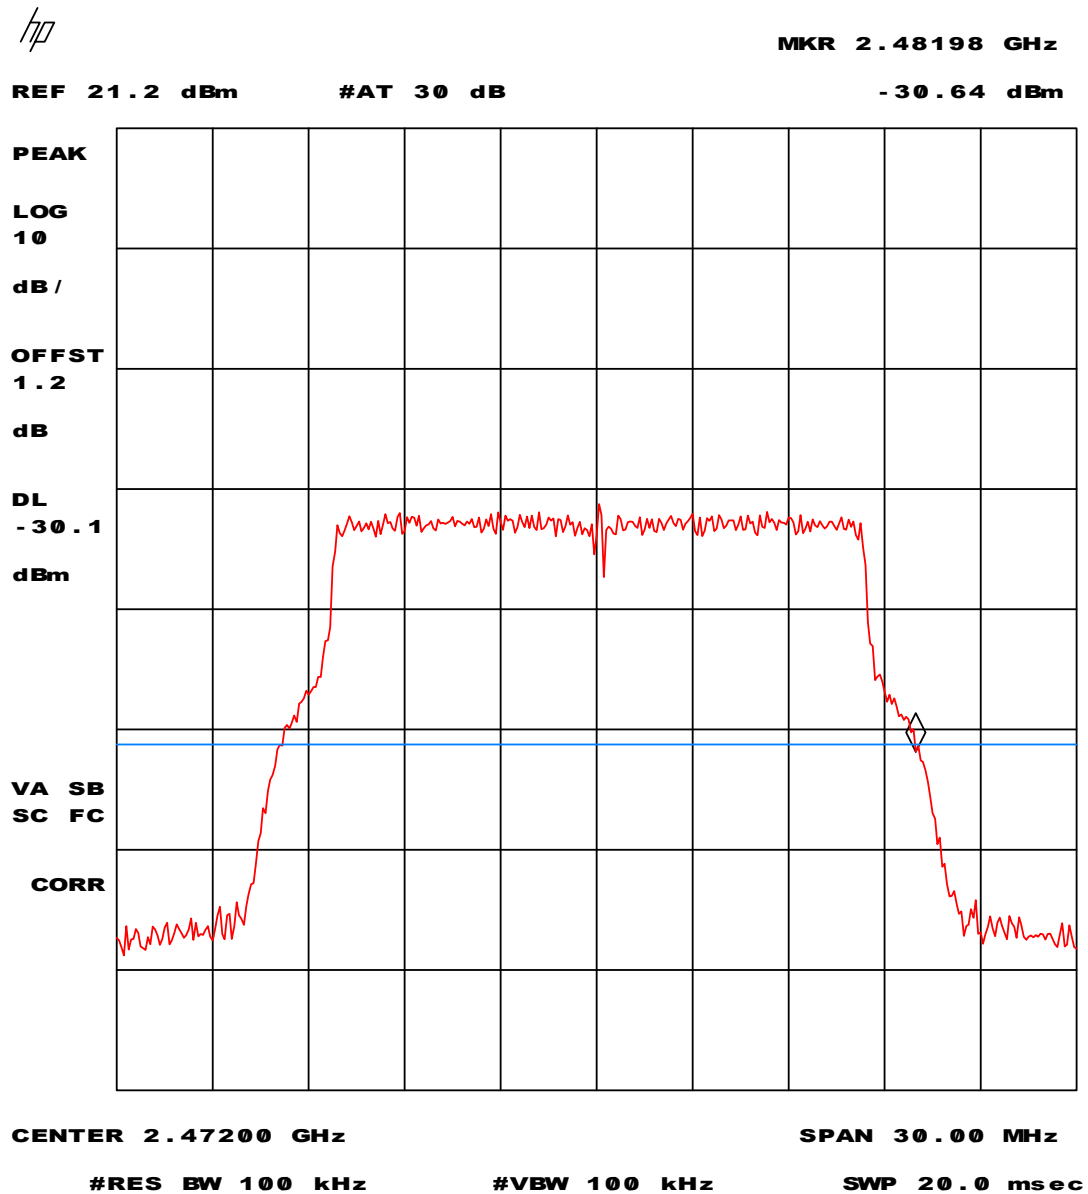


Plot 55 - Minimum 20 dB bandwidth at a transmission bit-rate of 6 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

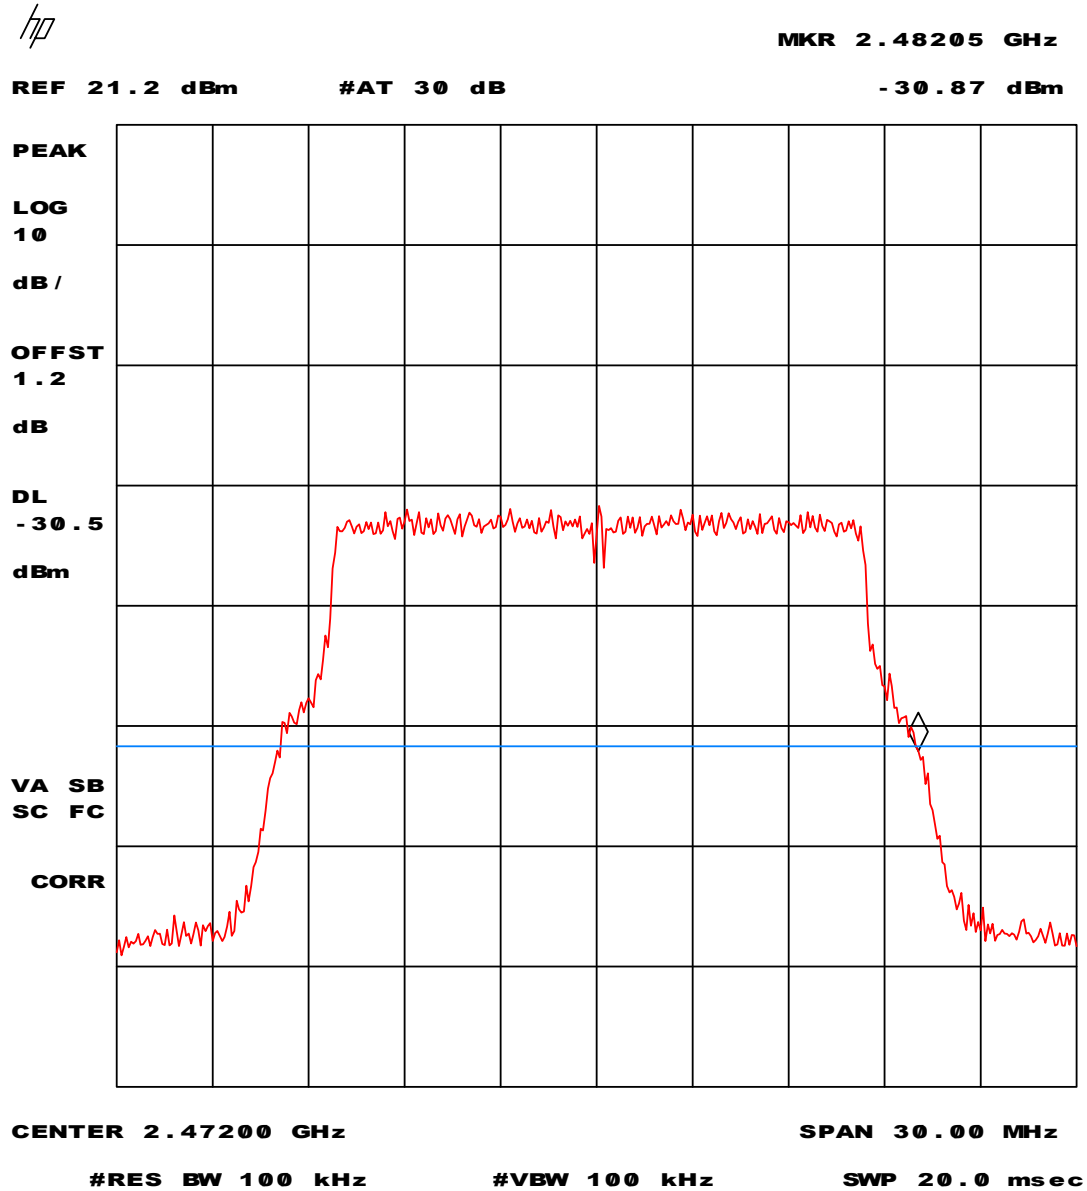


Plot 56 - Minimum 20 dB bandwidth at a transmission bit-rate of 9 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

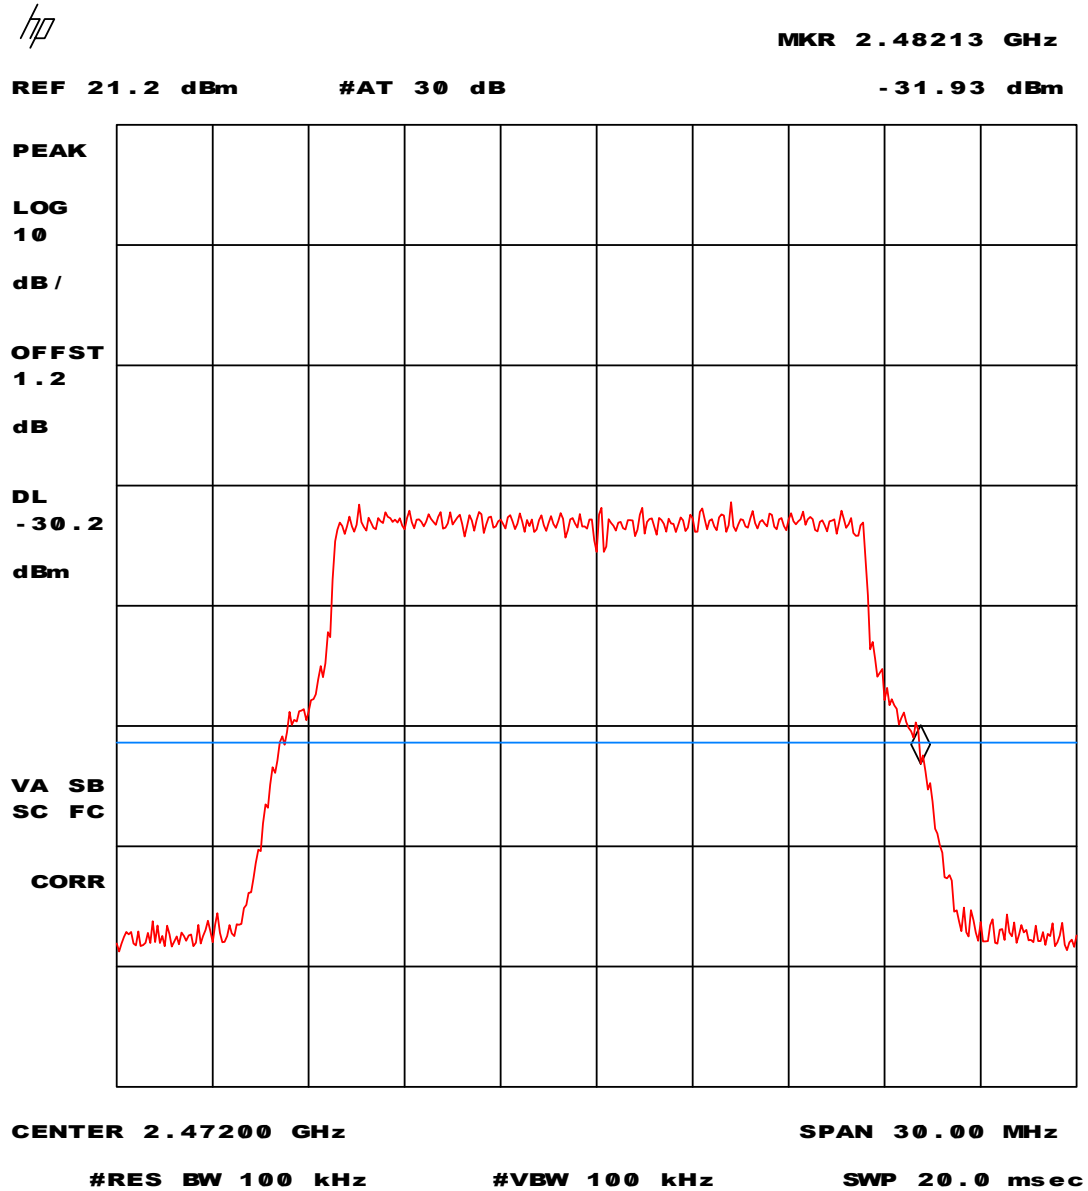


Plot 57 - Minimum 20 dB bandwidth at a transmission bit-rate of 18 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

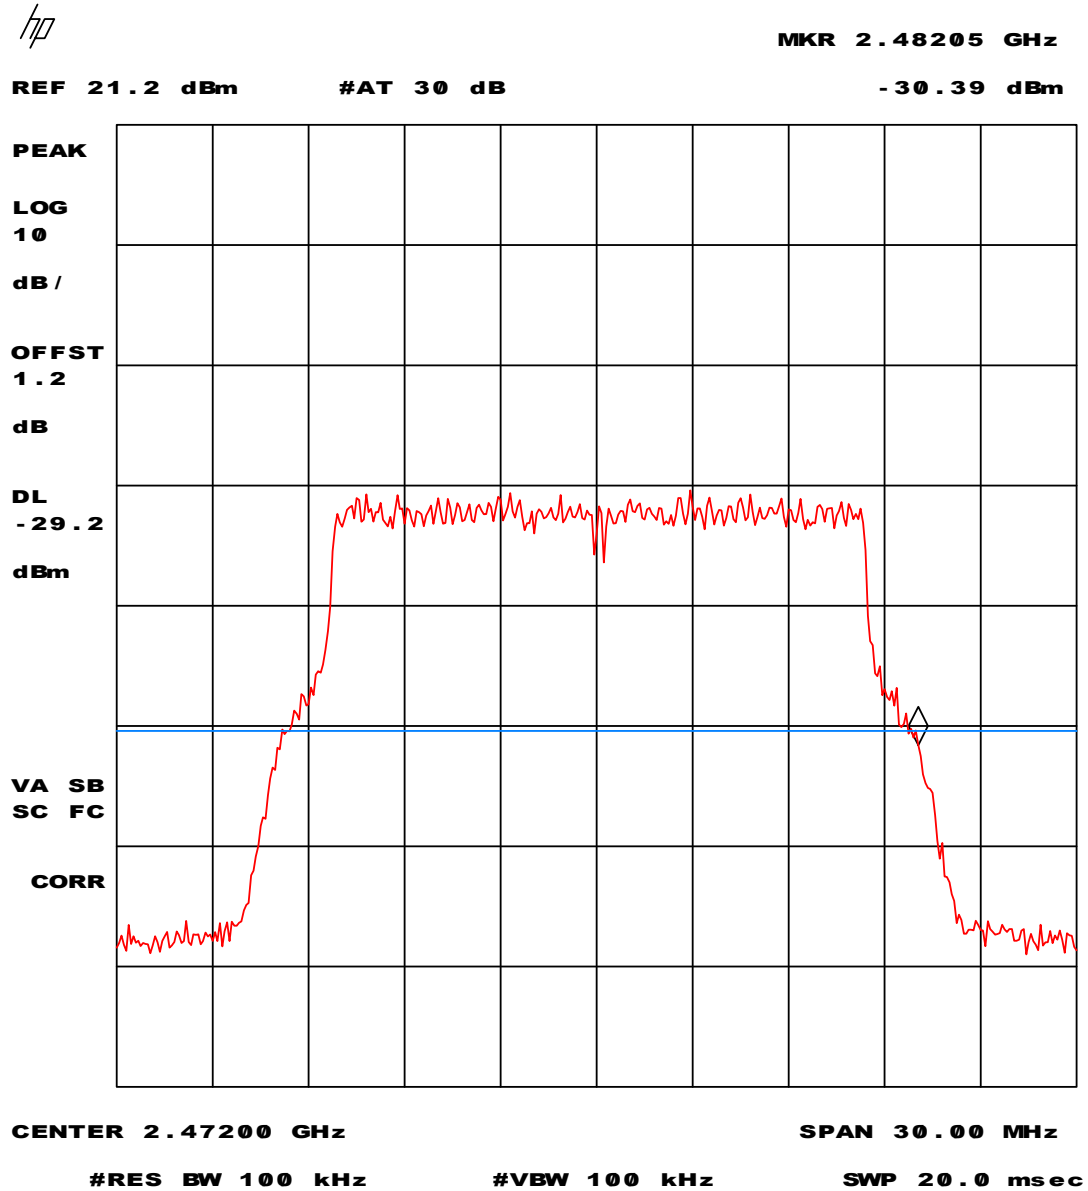

Plot 58 - Minimum 20 dB bandwidth at a transmission bit-rate of 36 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.

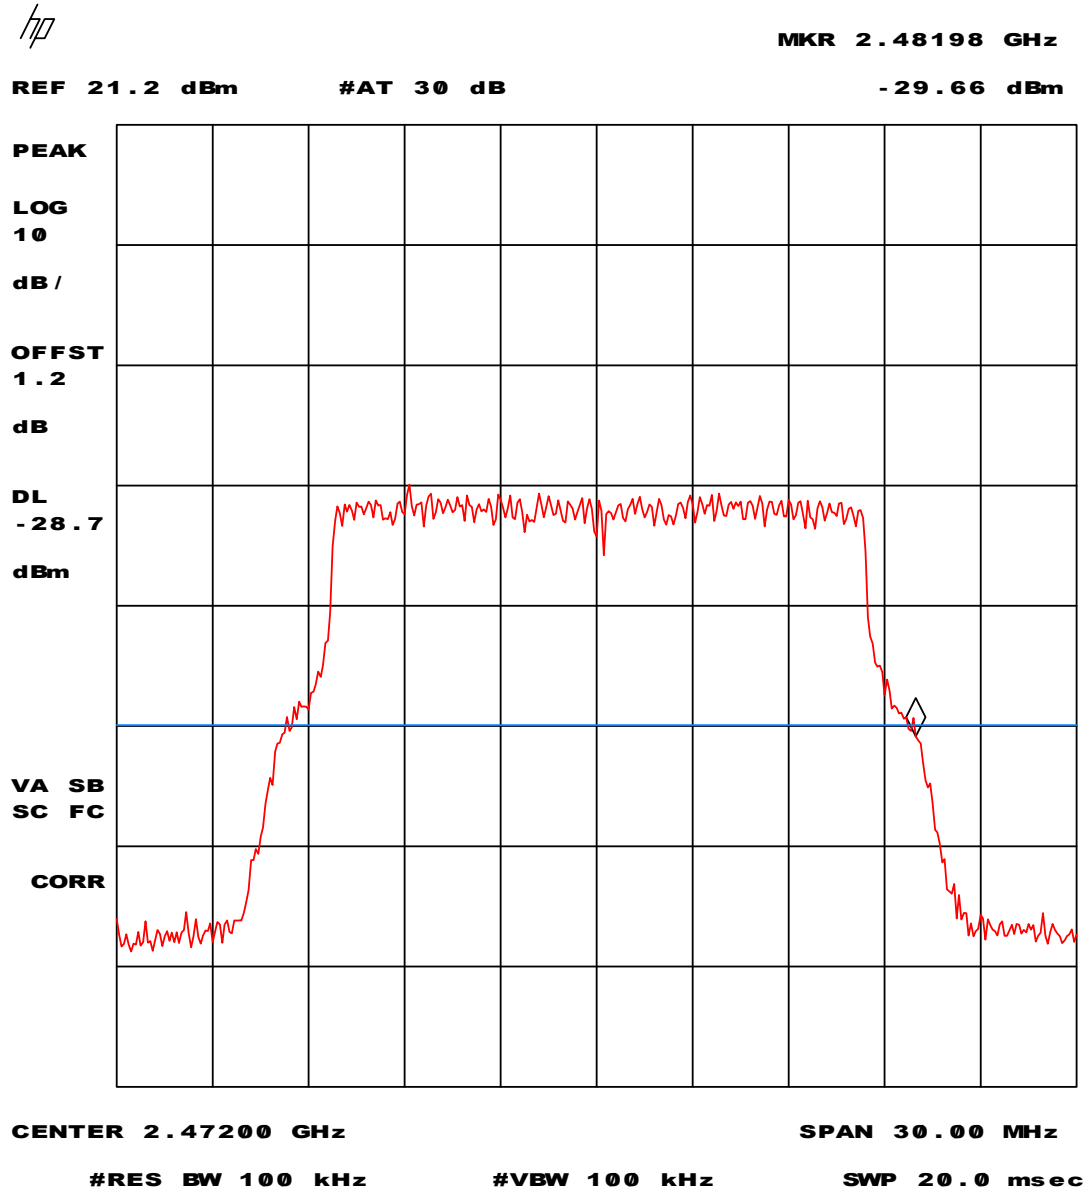

Plot 59 - Minimum 20 dB bandwidth at a transmission bit-rate of 54 Mbit/s.

The EUT was operating on channel 13 (2472 MHz) during this measurement.



Test specification(s): 47 CFR Part 15 (July 22, 2003)
Description of EUT: 2.4/5 GHz IEEE 802.11g/a WLAN Cardbus card
Manufacturer: Agere Systems Nederland B.V.
Brand mark: Agere
Model: 1102
FCC ID: IMR1102CB

6 List of utilized test equipment

Inventory number	Description	Brand	Model
12471	Biconical antenna 20MHz-200MHz	EATON	94455-1
12473	Log-per antenna 200-1000MHz	EATON	96005
12476	Antenna mast	EMCO	TR3
12477	Antenna mast 1-4 mtr	Poelstra	--
12482	Loop antenna	EMCO	6507
12483	Guidehorn	EMCO	3115
12484	Guidehorn	EMCO	3115
12488	Guidehorn 18 - 26.5 GHz	EMCO	RA42-K-F-4B-C
12533	Signalgenerator	MARCONI	2032
12559	Digital storage oscilloscope	Le Croy	9310M
12561	DC Power Supply 20A/70V	DELTA	SM7020D
12567	Plotter	HP	7440A
12605	calibrated dipole 28MHz-1GHz	Emco	3121c
12608	HF milliwattmeter	Hewlett Packard	HP435a
12609	Power sensor 10MHz-18GHz	Hewlett Packard	HP8481A
12636	Polyester chamber	Polyforce	--
12640	Temperature chamber	Heraeus	VEM03/500
13664	Spectrum analyzer	HP	HP8593E
13078	Preamplifier 0.1 GHz - 12 GHz	Miteq	AMF-3D-001120-35-14p
13452	Digital multi meter	HP	34401A
13526	Signalgenerator 20 GHz	Hewlett & Packard	83620A
13594	Preamplifier 10 GHz - 25 GHz	Miteq	AMF-6D-100250-10p
13886	Open Area testsite	Comtest	--
14051	Anechoic room	Comtest	--
14450	2.4 GHz bandrejectfilter	BSC	XN-1783
15633	Biconilog Testantenna	Chase	CBL 6111B
15667	Measuring receiver	R&S	ESCS 30
99045	DC Power Supply 3A/30V	DELTA	E030/3
99055	Non-conducting support	NMi	--
99061	Non-conducting support 150cm	NMi	--
99068	Detector N-F/BNC-F	Radiall	R451576000
99069	Cable 5m RG214	NMi	--
99071	Cable 10m RG214	NMi	--
99076	Bandpassfilter 4 - 10 GHz	Reactel	7AS-7G-6G-511
99077	Regulating trafo	RFT	LTS006
99112	Tripod	Chase	--
99136	Bandpassfilter 10 - 26.5 GHz	Reactel	9HS-10G/26.5G-S11