FCC ID: EF400180 IC ID: 1078-00180

Report Number: D81128P1

FCC PART 15 SUBPART C, SECTION 15.231 RSS GEN & RSS 210 TEST REPORT

For

CARBON MONOXIDE ALARM Model: 2GIG-C08E-345

Prepared for

NORTEK SECURITY & CONTROL 5919 SEA OTTER PL #100 CARLSBAD, CA 92010

Prepared by: _		
	HOWARD HUANG	
Approved by:		
	JOEY MADLANGBAYAN	1

COMPATIBLE ELECTRONICS INC. 20621 PASCAL WAY LAKE FOREST, CALIFORNIA 92630 (949) 587-0400

DATE: FEBRUARY 28, 2020

	REPORT	APPENDICES					TOTAL
	BODY	\boldsymbol{A}	В	C	D	E	
PAGES	22	2	2	2	12	17	57

This report shall not be reproduced, except in full, without the written approval of Compatible Electronics.





Report Number: D81128P1 FCC ID: EF400180 IC ID: 1078-00180

TABLE OF CONTENTS

Section / Title	PAGE
GENERAL REPORT SUMMARY	4
SUMMARY OF TEST RESULTS	5
1. PURPOSE	6
2. ADMINISTRATIVE DATA	7
2.1 Location of Testing	7
2.2 Traceability Statement	7
2.3 Cognizant Personnel	7
2.4 Date Test Sample was Received	7
2.5 Disposition of the Test Sample2.6 Abbreviations and Acronyms	7 7
·	
3. APPLICABLE DOCUMENTS	8
4. DESCRIPTION OF TEST CONFIGURATION	9
4.1 Description of Test Configuration - EMI	9
5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT	13
5.1 EUT and Accessory List	13
5.2 EMI Test Equipment	14
5.3 Test Software	14
6. TEST SITE DESCRIPTION	15
6.1 Test Facility Description	15
6.2 EUT Mounting, Bonding and Grounding	15
6.3 Facility Environmental Characteristics	15
6.4 Measurement Uncertainty	15
7. CHARACTERISTICS OF THE TRANSMITTER	16
7.1 Channel Number and Frequencies	16
7.2 Antenna	16
7.3 EUT Test Software	16
8. TEST PROCEDURES	17
8.1 RF Emissions	17
9. TEST PROCEDURE DEVIATIONS	22
10. CONCLUSIONS	22



LIST OF APPENDICES

APPENDIX	TITLE					
A	Laboratory Accreditations					
В	Modifications to the EUT					
С	Additional Models Covered Under This Report					
D	Diagrams, Charts and Photos					
	Test Setup Diagrams					
	Antenna Factors					
	Radiated Emissions Photos					
Е	Data Sheets					

LIST OF FIGURES

FIGURE	TITLE
1	RADIATED EMISSIONS 3-METER SEMI -ANECHOIC TEST CHAMBER



GENERAL REPORT SUMMARY

This electromagnetic emission report is generated by Compatible Electronics Inc., which is an independent testing and consulting firm. The test report is based on testing performed by Compatible Electronics personnel according to the measurement procedures described in the test specifications given below and in the "Test Procedures" section of this report.

The measurement data and conclusions appearing herein relate only to the sample tested and this report may not be reproduced in any form except in full, without the written permission of Compatible Electronics.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Device Tested: Carbon Monoxide Alarm

Model: 2GIG-CO8E-345

Product Description: The model 2GIG-CO8E-345 is a low power, microprocessor controlled, alarm sensor, and

transmitter operating at a frequency of 345 MHz. Power is supplied by two replaceable

Alkaline AAA 1.5V batteries in series to supply 3.0V to the circuit.

(Dimensions: Radius 5" & 2.5" height).

Modifications: The EUT was modified during the testing. Please see the list of modifications located in

Appendix B.

Manufacturer: Nortek Security & Control.

5919 Sea Otter #100 Carlsbad, CA 92010

Test Dates: November 28 & December 16, 2018 and November 21 & December 1, 2019

and February 28, 2020.



Test Specifications Covered by Accreditation:

EMI requirements:

CFR Title 47, Part 15 Subpart B and C Sections 15.205, 15.207, 15.209 & 15.231 RSS GEN & RSS 210.

Test Procedure:

ANSI C63.4: 2014 & ANSI C63.10: 2013.



SUMMARY OF TEST RESULTS

TEST	DESCRIPTION	RESULTS
1	Conducted RF Emissions, 150 kHz - 30 MHz	The EUT is battery powered; therefore, this test was deemed unnecessary and thus was not performed.
2	Radiated RF Emissions, 9 kHz – 3450 MHz	Complies with the limits of CFR Title 47, Part 15, Subpart B & C Section 15.209, 15.231 & RSS GEN
3	-20 dB and 99% Occupied Bandwidth of the Emission	Complies with the limits of CFR Title 47, Part 15, Subpart C Section 15.231 & RSS 210.
4	Peak Radiated EMI	Complies with the limits of CFR Title 47, Part 15, Subpart C Section 15.231 & RSS 210.
5	Transmit Timeout	Complies with the limits of CFR Title 47, Part 15, Subpart C Section 15.231 & RSS 210.

TABLE 1 SIX HIGHEST RADIATED EMISSIONS READINGS

	Reading Type (PK / QP / AV)	Polarization (Vert / Horz)	Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Delta (dB)	Test Distance
1	AV	Н	345.00	74.92	77.26	-2.34	3-Meter
2	AV	V	345.00	73.55	77.26	-3.71	3-Meter
3	PK	Н	345.00	92.32	97.26	-4.94	3-Meter
4	PK	V	345.00	90.95	97.26	-6.31	3-Meter
5	AV	V	345.00	69.83	77.26	-7.43	3-Meter
6	PK	V	345.00	87.23	97.26	-10.03	3-Meter

FCC ID: EF400180 IC ID: 1078-00180

FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

1. **PURPOSE**

This document is a qualification test report based on the Electromagnetic Interference (EMI) tests performed on the Carbon Monoxide Alarm Model: 2GIG-CO8E-345. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4: 2014. The tests were performed in order to determine whether the electromagnetic emissions from the equipment under test, referred to as EUT hereafter, are within the specification limits defined by FCC Code of Federal Regulations Title 47, part 15 Subpart B. section 15.109, Subpart C sections 15.205, 15.209 15.231, RSS GEN & RSS 210.



2. **ADMINISTRATIVE DATA**

2.1 **Location of Testing**

The emissions tests described herein were performed at the test facility of Compatible Electronics, 20621 Pascal Way, Lake Forest, California 92630.

2.2 **Traceability Statement**

The calibration certificates of all test equipment used during the test are on file at the location of the test. The calibration is traceable to the National Institute of Standards and Technology (NIST).

2.3 **Cognizant Personnel**

Nortek Security & Control LLC

Josh Hansen Regulatory & Compliance Engineering Manager

Regulatory Compliance Engineer David Shephard

Compatible Electronics, Inc.

Test Technician Sam Kerckhoff **Howard Huang** Test Technician Torey Oliver Sr. Test Engineer

Joey Madlangbayan Product Safety Manager

2.4 **Date Test Sample was Received**

The test sample was received on November 28, 2018.

2.5 **Disposition of the Test Sample**

The test sample remains at Compatible Electronics, Inc.

2.6 **Abbreviations and Acronyms**

The following abbreviations and acronyms may be used in this document.

EUT	Equipment Under Test	HP	Hewlett Packard
ESD	Electrostatic Discharge	ITE	Information Technology Equipment
EMI	Electromagnetic Interference	PE	Protective Earth
EMC	Electromagnetic Compatibility	NCR	No Calibration Required
VCP	Vertical Coupling Plane	EFT	Electrical Fast Transients
HCP	Horizontal Coupling Plane	Inc.	Incorporated
HF	High Frequency	AC	Alternating Current
VAC	Voltage Alternating Current	N/A	Not Applicable
DC	Direct Current	PFM	Power Frequency Magnetic
PC	Personal Computer	LED	Light Emitting Diode
PQF	Voltage Dips and Interrupts	RJ	Registered Jack
DoC	Declaration of Conformity	USB	Universal Serial Bus
S/N	Serial Number		



3. APPLICABLE DOCUMENTS

The following documents are referenced or used in the preparation of this EMI Test Report.

SPEC	TITLE
FCC CFR Title	FCC Rules Part 15 - Radio frequency devices (including digital devices).
47, Subpart B	Subpart B – Unintentional Radiators.
FCC CFR Title	FCC Rules Part 15 - Radio frequency devices (including digital devices).
47, Subpart C	Subpart C – Intentional Radiators.
ANSI C63.4:	Methods of measurement of radio-noise emissions from low-voltage
2014	electrical and electronic equipment in the range of 9 kHz to 40 GHz.
ANSI C63.10:	Procedures for Compliance Testing of Unlicensed Wireless Devices.
2013	Trocedures for Compitance Testing of Connectised Wheless Devices.
RSS GEN	General Requirements for Compliance of Radio Apparatus
RSS 210	License-exempt Radio Apparatus: Category I Equipment



4. DESCRIPTION OF TEST CONFIGURATION

4.1 Description of Test Configuration - EMI

The EUT was set up in a tabletop configuration. The EUT was checked in all 3 axes. The worst case was found to be in the X-Axis. The EUT was continuously transmitting during the transmit tests and in standby mode for standby tests.

The final radiated data was taken in the aforementioned configuration and mode of operation. All initial investigations were performed with the EMI Receiver in manual mode scanning the frequency range continuously.

4.1.1 Photograph of Test Configuration - EMI





4.1.2 Cable Construction and Termination

The EUT had no interconnecting cables.

4.1.3 Axis Orientation


X-Axis





4.1.3 **Axis Orientation Continued**

Y-Axis

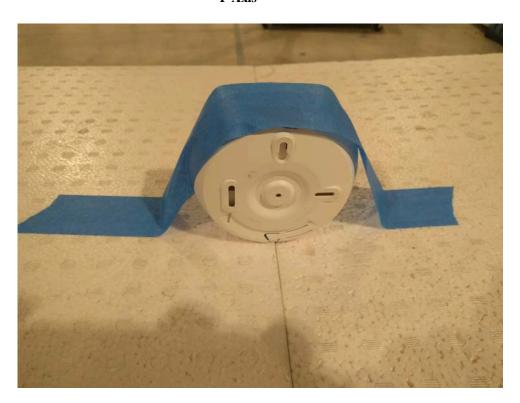

FCC ID: EF400180 IC ID: 1078-00180

4.1.3 Axis Orientation Continued









5. LISTS OF EUT, ACCESSORIES AND TEST EQUIPMENT

5.1 EUT and Accessory List

#	EQUIPMENT TYPE	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID & IC ID
1	CARBON MONOXIDE ALARM (EUT)	NORTEK SECURITY & CONTROL	2GIG-CO8E-345	S/N: NONE	FCC ID: EF400180 IC ID: 1078- 00180
2	BATTERY	DURACELL	LR03	S/N: NONE	NONE



EMI Test Equipment 5.2

EQUIPMENT TYPE	MANUFACTURER	MODEL NUMBER	ASSET NUMBER	CAL. DATE	CAL. DUE DATE
Barometer & Thermometer	Davis Instruments	6312C	5459	09/20/2018	09/20/2021
Computer	Dell	Inspiron	NONE	NCR	NCR
EMI Receiver	Rohde & Schwarz	ESIB40	3500	03/05/2018	03/05/2019
EMI Receiver	Rohde & Schwarz	ESIB40	5050	09/25/2019	09/25/2020
EMI Receiver	Keysight	N9038A	5551	02/05/2019	02/05/2020
EMI Receiver	Keysight	N9038A	5551	01/21/2020	01/21/2021
Antenna, Loop	Com Power	AL-130	5496	02/09/2017	02/09/2019
Antenna, Loop	Com Power	AL-130	5496	03/21/2019	03/21/2021
Antenna, Combilog	Com-Power	AC-220	5510	03/12/2018	03/12/2019
Antenna, Combilog	Com-Power	AC-220	5556	04/05/2019	04/05/2021
Antenna, Horn	Com-Power	AH-118	5028	07/05/2018	07/05/2019
Antenna, Horn	Com-Power	AH-118	5559	07/19/2019	07/19/2021
Mast, Antenna Positioner	Sunol Science Corporation	SC104V	5197	NCR	NCR
Antenna Mast	Sunol Science Corporation	TWR 95-4	NONE	NCR	NCR
Turntable	Sunol Science Corporation	FM2	NONE	NCR	NCR

5.3 **Test Software**

LAB(S)	SOFTWARE TITLE	MANUFACTURER	VERSION
	Measurement and Automation		
P, R	Software	TDK TestLab	5.53

6.

TEST SITE DESCRIPTION

6.1 Test Facility Description

Please refer to section 2.1 of this report.

6.2 EUT Mounting, Bonding and Grounding

The EUT was mounted on a 0.6 by 1.2-meter non-conductive table 0.8 meters above the ground plane.

The EUT was raised to 1.5-meters above the ground place for frequencies above 1 GHz.

The EUT was not grounded.

6.3 Facility Environmental Characteristics

When applicable refer to the data sheets in Appendix E for the relative humidity, air temperature and barometric pressure.

6.4 Measurement Uncertainty

"Compatible Electronics' U_{lab} value is less than U_{cispr} , thus based on this – compliance is deemed to occur if no measured disturbance exceeds the disturbance limit

$$u_{\rm c}(y) = \sqrt{\sum_i c_i^2 \ u^2(x_i)}$$

Measurement		Ucispr	$U_{\text{lab}} = 2 \text{ uc } (y)$
Conducted disturbance (mains port)	(150 kHz – 30 MHz)	3,6 dB	2.88
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(30 MHz – 1000 MHz)	5,2 dB	3.53
Radiated disturbance (electric field strength on an open area test site or alternative test site)	(1000 MHz – 3450 MHz)	5,5dB	3.59



7. CHARACTERISTICS OF THE TRANSMITTER

7.1 Channel Number and Frequencies

The EUT has one operating channel and uses ASK-OOK modulation. The EUT has fixed output power.

1 == 345 MHz

7.2 Antenna

The antenna is made up of an etched trace on the PCB.

7.3 EUT Test Software

Firmware V1.1.2

Location: 5919 Sea Otter Pl #100, Carlsbad, CA 92010



8. TEST PROCEDURES

The following sections describe the test methods and the specifications for the tests. Test results are also included in this section.

8.1 **RF** Emissions

8.1.1 **Conducted Emissions Test**

Test Results: The EUT was battery operated; therefore, this test was deemed unnecessary and not performed. If this test had been performed it would have been as below.

The EMI Receiver was used as a measuring meter. A 10-dB attenuation pad was used for the protection of the EMI Receiver input stage. All factors associated with attenuator and cables were recorded into the EMI Software Program accordingly to display the actual corrected measured level. The LISN output was connected to the input of the EMI Receiver. The output of the second LISN was terminated with 50-ohm termination. The effective measurement bandwidth used for the conducted emissions test was 9 kHz.

Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The EUT was powered through the LISN, which was bonded to the ground plane. The LISN power was filtered and the filter was bonded to the ground plane. The EUT was set up with the minimum distances from any conductive surfaces as specified in ANSI C63.4: 2014. The excess power cord was wrapped in a figure eight pattern to form a bundle not exceeding 0.4 meters in length.

The initial test data was taken in manual mode while scanning the frequency ranges of 0.15 MHz to 30 MHz. The conducted emissions from the EUT were maximized for operating mode as well as cable placement. Once a predominant frequency (within 12 dB of the limit) was found, it was more closely examined with the spectrum analyzer span adjusted to 1 MHz.

The final data was collected under program control by the computer in several overlapping sweeps by running the EMI Receiver at a minimum scan rate of 10 seconds per octave.



FCC ID: EF400180 IC ID: 1078-00180

8.1.2 Radiated Emissions (Spurious and Harmonics) Test

The EMI receiver was used as a measuring meter. The receiver was used in the peak detect mode with the "Max Hold" feature activated. In this mode, the receiver records the highest measured reading over all the sweeps.

For spurious emissions the quasi-peak detector was used for frequencies below 1GHz and the average detector was used for frequencies above 1 GHz.

For the Fundamental & Harmonic emissions a duty cycle average was used.

The measurement bandwidths and transducers used for the radiated emissions test were:

FREQUENCY RANGE (MHz)	TRANSDUCER	EFFECTIVE MEASUREMENT BANDWIDTH
.009 to .150	Active Loop Antenna	200 Hz
.150 to 30	Active Loop Antenna	9 kHz
30 to 1000	Combilog Antenna	100 kHz (120kHz for QP Measurements)
1000 to 3450	Horn Antenna	1 MHz

The TDK FAC-3 shielded test chamber of Compatible Electronics, Inc. was used for radiated emissions testing. This test site is in full compliance with ANSI C63.4: 2014 & ANSI C63.10: 2013. Please see section 6.2 of this report for mounting, bonding and grounding of the EUT. The turntable supporting the EUT is remote controlled using a motor. The turntable permits EUT rotation of 360 degrees in order to maximize emissions. Also, the antenna mast allows height variation of the antenna from 1 meter to 4 meters. Data was collected in the worst case (highest emission) configuration of the EUT. At each reading, the EUT was rotated 360 degrees and the antenna height was varied from 1 to 4 meters in both vertical and horizontal polarizations (for E field radiated field strength).

Test Results:

The EUT complies with the limits of CFR Title 47 Part 15 Subpart B section 15.109, Subpart C sections 15.205, 15.209, 15.231, RSS GEN & RSS 210.

Page 19 of 22

Report Number: D81128P1 FCC ID: EF400180 IC ID: 1078-00180

FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

8.1.3 **Duty Cycle**

The EUT was tested at a 3-meter test distance to obtain the final test data. The final qualification data sheets are located in Appendix E.

$$\delta(dB) = 20 \log \left[\sum (nt_1 + mt_2 + \dots + \xi t_x) / T \right]$$

where

n is the number of pulses of duration t1m is the number of pulses of duration t2 ξ is the number of pulses of duration txT is the period of the pulse train or 100 ms if the pulse train length is greater than 100 ms

Pulse Type $1 = 52 * 156.4 \mu s = 8,132.8 \mu s$

Pulse Type $2 = 18 * 297.8 \mu s = 5,361.2 \mu s$

 $5,360.4\mu s + 8,132.8\mu s = 13,494\mu s$

Total On Time = 13.4941ms

13.4941 ms / 100 ms = 0.134941

 $20\log(0.13494) = -17.40$ dB

Duty Cycle Correction Factor Used = -17.40 dB



FCC ID: EF400180 FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

8.1.4 Bandwidth of the Fundamental

The -20 dB bandwidth was checked using the EMI Receiver in the spectrum analyzer mode to see that the emissions were wholly within the 0.25% of the operating frequency centered on the fundamental frequency. The RBW was set to 1-5% of the occupied bandwidth and the VBW was set to approximately three times the RBW. The span was to between two and five times the occupied bandwidth. A Plot of the -20 dB bandwidth is located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.231 (c) for the -20 dB bandwidth of the fundamental. The EUT has a -20 dB bandwidth that is lies wholly within the 0.25% of the operating frequency centered on the fundamental frequency.

8.1.5 **Occupied Bandwidth**

The 99% occupied bandwidth was checked using EMI Receiver. The RBW was set to 1-5% of the occupied bandwidth and the VBW was set to approximately three times the RBW. The span was to between 1.5-5 times the occupied bandwidth. A plot of the Occupied Bandwidth is located in Appendix E.

Test Results:

The EUT complies with the requirements of RSS GEN for the 99% occupied bandwidth of the fundamental.

8.1.6 **Transmit Timeout**

The Transmit Timeout test was performed using the EMI Receiver to make sure the transmission coming from the transmitter would cease within 5 seconds after the activation. A Plot of the transmission duration is located in Appendix E.

Test Results:

The EUT complies with the requirements of CFR Title 47, Part 15, Subpart C, section 15.231 (a) or transmission times out within 5 seconds after activation.





8.1.6 **Sample Calculations**

A correction factor for the antenna, cable and a distance factor (if any) must be applied to the meter reading before a true field strength reading can be obtained. This Corrected Meter Reading is then compared to the specification limit in order to determine compliance with the limits.

The equation can be derived in the following manner:

Specification limit ($\mu V/m$) log x 20 = Specification Limit in dBuV

(Specification distance / test distance) $\log x = 40 = 40$

Note: When using an Active Antenna, the Antenna factor shall be subtracted due to the combination of the internal amplification and antenna loss. At lower frequencies the cable loss is negligible.

OR

Corrected Meter Reading = meter reading + F - A + C

where:

F = antenna factor

A= amplifier gain

C = cable loss

The correction factors for the antenna and the amplifier gain are attached in Appendix D of this report. The data sheets are attached in Appendix E.

The distance factor D is 0 when the test is performed at the required specification distance.

Report Number: D81128P1 FCC ID: EF400180

IC ID: 1078-00180

FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

9. TEST PROCEDURE DEVIATIONS

There were no deviations from the test procedures.

10. CONCLUSIONS

The Carbon Monoxide Alarm Model: 2GIG-CO8E-345 as tested meets all of the relevant specification requirements defined in the Code of Federal Regulations Title 47, Part 15 Subpart B and C sections 15.205, 15.207, 15.209, 15.231, RSS GEN & RSS 210.

APPENDIX A

LABORATORY ACCREDITATIONS

Page A2

LABORATORY ACCREDITATIONS AND RECOGNITIONS



For US, Canada, Australia/New Zealand, Japan, Taiwan, Korea, and the European Union, Compatible Electronics is currently accredited by NVLAP to ISO/IEC 17025.

For the most up-to-date version of our scopes and certificates please visit

http://celectronics.com/quality/scope/

Quote from ISO-ILAC-IAF Communiqué on 17025:

"A laboratory's fulfilment of the requirements of ISO/IEC 17025: 2005 means the laboratory meets both the technical competence requirements and management system requirements that are necessary for it to consistently deliver technically valid test results and calibrations. The management system requirements in ISO/IEC 17025: 2005 (Section 4) are written in language relevant to laboratory operations and meet the principles of ISO 9001:2008 Quality Management Systems — Requirements."

Innovation, Science and Economic Development Canada Lab Code: 2154C

Page B1



APPENDIX B

MODIFICATIONS TO THE EUT



MODIFICATIONS TO THE EUT

The modifications listed below were made to the EUT to pass the FCC, RSS-Gen and RSS-210 specifications.

All the rework described below are implemented during the test in a method that could be reproduced in all the units by the manufacturer.

Modifications:

1) Changed R9 to 68 Ohms



APPENDIX C

ADDITIONAL MODELS COVERED **UNDER THIS REPORT**

ADDITIONAL MODELS COVERED **UNDER THIS REPORT**

USED FOR THE PRIMARY TEST

Carbon Monoxide Alarm Model: 2GIG-CO8E-345

There are no additional models covered under this report.




APPENDIX D

DIAGRAMS, CHARTS AND PHOTOS

FCC ID: EF400180 IC ID: 1078-00180

FIGURE 1: RADIATED EMISSIONS 3-METER SEMI -ANECHOIC TEST CHAMBER

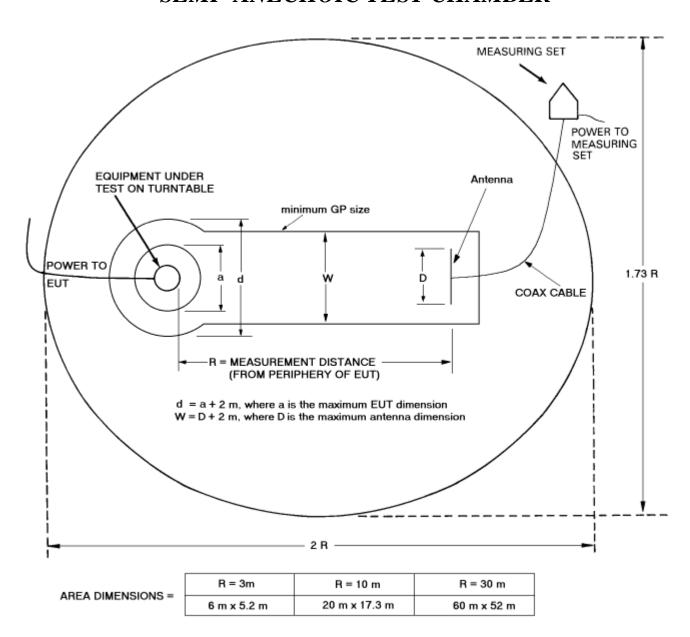

FCC ID: EF400180 IC ID: 1078-00180

COM-POWER AL-130

LOOP ANTENNA

A/N: 5496

CALIBRATION DATE: FEBRUARY 9, 2017

FREQUENCY	MAGNETIC	ELECTRIC	FREQUENCY	MAGNETIC	ELECTRIC
(MHz)	(dB/m)	(dB/m)	(MHz)	(dB/m)	(dB/m)
0.009	-34.68	16.82	0.8	-37.44	14.06
0.01	-35.54	15.96	0.9	-37.34	14.16
0.02	-37.22	14.28	1.0	-37.34	14.16
0.03	-36.44	15.06	2.0	-37.03	14.47
0.04	-36.90	14.60	3.0	-37.02	14.48
0.05	-37.56	13.94	4.0	-37.12	14.38
0.06	-37.45	14.05	5.0	-36.92	14.58
0.07	-37.55	13.95	6.0	-37.12	14.38
0.08	-37.46	14.04	7.0	-37.02	14.48
0.09	-37.56	13.94	8.0	-36.81	14.69
0.1	-37.56	13.94	9.0	-36.81	14.69
0.2	-37.75	13.75	10.0	-36.70	14.80
0.3	-37.75	13.75	15.0	-37.08	14.42
0.4	-37.65	13.85	20.0	-36.60	14.90
0.5	-37.75	13.75	25.0	-38.62	12.88
0.6	-37.75	13.75	30.0	-38.92	12.58
0.7	-37.64	13.86			

IC ID: 1078-00180

COM-POWER AL-130

LOOP ANTENNA

A/N: 5496

CALIBRATION DATE: 03/21/2019

FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)	FREQUENCY (MHz)	MAGNETIC (dB/m)	ELECTRIC (dB/m)
0.009	-35.2	16.3	7.0	-36.9	14.6
0.01	-35.7	15.7	8.0	-36.8	14.6
0.02	-36.6	14.8	9.0	-36.9	14.6
0.03	-35.8	15.6	10.0	-36.6	14.9
0.04	-36.4	15.1	11.0	-36.5	14.9
0.05	-37.0	14.5	12.0	-36.5	14.9
0.06	-36.8	14.7	13.0	-36.7	14.8
0.07	-37.0	14.4	14.0	-36.8	14.7
0.08	-37.1	14.4	15.0	-36.9	14.6
0.09	-36.9	14.5	16.0	-36.9	14.6
0.1	-37.3	14.1	17.0	-36.8	14.6
0.2	-37.3	14.1	18.0	-36.7	14.8
0.3	-37.4	14.0	19.0	-36.5	14.9
0.4	-37.4	14.0	20.0	-36.5	14.9
0.5	-37.2	14.2	21.0	-36.8	14.7
0.6	-37.2	14.2	22.0	-37.2	14.3
0.7	-37.2	14.2	23.0	-37.6	13.8
0.8	-37.2	14.2	24.0	-38.1	13.4
0.9	-37.2	14.3	25.0	-38.4	13.1
1.0	-36.9	14.5	26.0	-38.5	13.0
2.0	-36.9	14.6	27.0	-38.4	13.1
3.0	-36.9	14.6	28.0	-38.3	13.2
4.0	-36.8	14.7	29.0	-38.3	13.2
5.0	-36.8	14.6	30.0	-38.4	13.0
6.0	-36.9	14.6			



COM-POWER AC-220

LAB P - COMBILOG ANTENNA

S/N: 061105

CALIBRATION DATE: MARCH 12, 2018

FREQUENCY (MHz)	FACTOR	FREQUENCY (MHz)	FACTOR
	(dB)		(dB)
30	24.05	160	13.57
35	22.46	180	14.07
40	19.36	200	14.72
45	17.42	250	18.27
50	15.77	300	20.95
60	12.86	400	23.16
70	11.22	500	21.86
80	11.84	600	23.54
90	13.48	700	23.85
100	14.80	800	25.91
120	16.38	900	26.71
140	14.41	1000	27.60

COM-POWER AC-220

LAB R - COMBILOG ANTENNA

A/N: 5556

CALIBRATION DATE: APRIL 5, 2019

FREQUENCY (MHz)	FACTOR	FREQUENCY (MHz)	FACTOR
	(dB)		(dB)
30	22.00	160	14.00
35	21.00	180	14.70
40	20.40	200	15.10
45	19.60	250	16.70
50	18.40	300	18.20
60	14.90	400	20.70
70	11.70	500	22.00
80	11.60	600	24.50
90	13.20	700	24.50
100	14.30	800	26.10
120	15.60	900	27.00
140	14.30	1000	27.60



COM-POWER AH-118

HORN ANTENNA

A/N: 5028

CALIBRATION DATE: JULY 5, 2018

FREQUENCY (MHz)	FACTOR	FREQUENCY (MHz)	FACTOR
	(dB)		(dB)
1000	24.45	9500	38.91
1500	25.34	10000	39.38
2000	28.06	10500	39.64
2500	28.82	11000	39.42
3000	29.80	11500	39.84
3500	30.65	12000	39.66
4000	31.28	12500	40.12
4500	32.24	13000	40.27
5000	33.09	13500	40.42
5500	33.55	14000	40.85
6000	34.45	14500	42.06
6500	35.37	15000	42.33
7000	36.91	15500	39.45
7500	37.39	16000	39.54
8000	37.62	16500	39.57
8500	37.40	17000	41.79
9000	37.39	17500	43.87
		18000	44.53

IC ID: 1078-00180 FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

COM-POWER AH-118

HORN ANTENNA

A/N: 5559

CALIBRATION DUE: JULY 19, 2021

FREQUENCY (MHz)	FACTOR (dB)	FREQUENCY (MHz)	FACTOR (dB)
700	25.84	7500	37.73
750	25.46	8000	38.05
800	24.96	8500	38.29
850	24.51	9000	38.93
900	24.01	9500	39.64
950	23.73	10000	39.12
1000	23.83	10500	39.16
1250	24.81	11000	39.18
1500	25.32	11500	39.85
1750	26.30	12000	40.27
2000	27.94	12500	40.91
2250	28.16	13000	40.50
2500	29.07	13500	40.59
3000	30.07	14000	40.44
3500	30.81	14500	40.62
4000	31.68	15000	43.35
4500	32.64	15500	40.76
5000	33.79	16000	41.61
5500	34.20	16500	40.38
6000	35.24	17000	40.88
6500	35.74	17500	42.79
7000	37.17	18000	43.86

Report Number: D81128P1



FRONT VIEW

NORTEK SECURITY & CONTROL CARBON MONOXIDE ALARM MODEL: 2GIG-C08E-345 FCC PART 15 SUBPART C - 30-1000 MHz RADIATED EMISSIONS

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

Report Number: D81128P1




REAR VIEW

NORTEK SECURITY & CONTROL CARBON MONOXIDE ALARM MODEL: 2GIG-CO8E-345 FCC PART 15 SUBPART C – 30-1000 MHz RADIATED EMISSIONS

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

Report Number: D81128P1

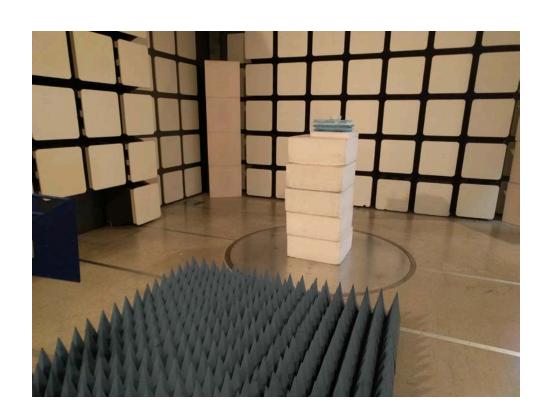

FRONT VIEW

NORTEK SECURITY & CONTROL CARBON MONOXIDE ALARM MODEL: 2GIG-CO8E-345 FCC PART 15 SUBPART C - 1000 – 3450 MHz RADIATED EMISSIONS

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS

Report Number: D81128P1





REAR VIEW

NORTEK SECURITY & CONTROL CARBON MONOXIDE ALARM MODEL: 2GIG-CO8E-345 FCC PART 15 SUBPART C - 1000 - 3450 MHz RADIATED EMISSIONS

PHOTOGRAPH SHOWING THE EUT CONFIGURATION FOR MAXIMUM EMISSIONS



APPENDIX E

RADIATED EMISSIONS DATA SHEETS



Report Number: D81128P1 FCC ID: EF400180 IC ID: 1078-00180

FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

Title: FCC 15.209 12/1/2019 5:14:33 PM File: Radiated Pre-Scan 30-1000Mhz Sequence: Preliminary Scan

Operator: Sam Kerckhoff

EUT Type: Carbon MONOXIDE Alarm / 2GIG-CO8E-345


EUT Condition: The EUT is constantly transmitting 345 MHz.

Comments: Standalone Device

Temp: 76f Hum: 37%

Battery Powered

Compatible Electronics, Inc. FAC-3 (Lab R)

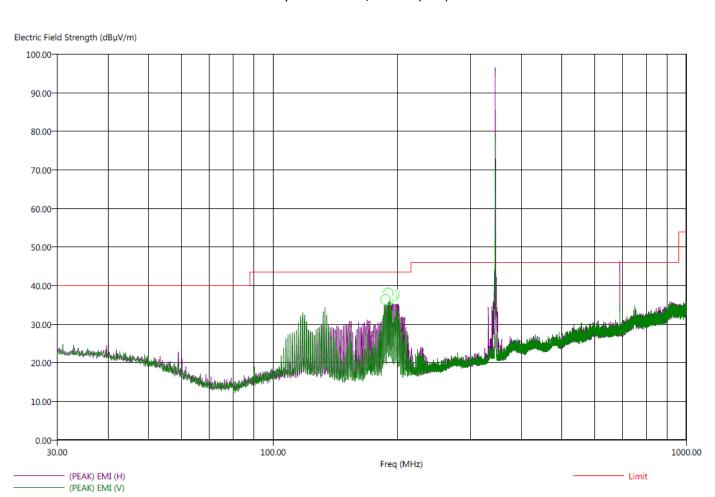

 ${\it There were no spurious radiated emissions found below 30Mhz and above 1 GHz}.$

The two over-the-limit emissions are the fundamental of the intentional radiator and its 2^{nd} harmonic and are not subject to spurious emission limits. Refer to the harmonics data sheet for these results.

No additional emissions were found in standby mode.

Report Number: D81128P1 FCC ID: EF400180

IC ID: 1078-00180

FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

Title: FCC 15.209 12/1/2019 5:40:08 PM File: Radiated Final-Scan 30-1000Mhz Sequence: Final Measurements

Operator: Sam Kerckhoff

EUT Type: Carbon MONOXIDE Alarm / 2GIG-C08E-345

EUT Condition: The EUT is constantly transmitting 345MHz.

Comments: Temp: 76f


Hum: 37%

Battery Powered

Compatible Electronics, Inc. FAC-3 (Lab R)

Freq (MHz)	(QP) Margin (dB)	(QP) EMI (dBµV/m)	(PEAK) EMI (dBµV/m)	Limit (dBµV/m)	Pol	Ttbl Agl (deg)	Twr Ht (cm)	Transducer (dB)	Cable (dB)
187.30	-4.03	39.49	41.60	43.52	Н	60.25	175.94	14.76	1.18
190.10	-5.69	37.83	42.68	43.52	Н	262.75	183.40	15.58	1.19
191.30	-3.46	40.06	42.61	43.52	Н	37.00	189.25	15.94	1.19
193.90	-4.55	38.97	41.58	43.52	Н	125.25	213.67	15.82	1.20
196.50	-4.12	39.40	41.60	43.52	Н	156.25	212.65	15.45	1.21
197.70	-6.86	36.66	38.73	43.52	Н	222.00	228.29	15.33	1.21

There were no radiated emissions found below 30Mhz and above 1GHz. No additional emissions were found in standby mode.





FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report

FUNDAMENTAL & HARMONICS

DATA SHEETS



FUNDAMENTAL FIELD STRENGTH

FCC 15.231

Company: Nortek Security & Control, LLC Date: 11/28/2018

EUT: Carbon Monoxide Alarm Lab: R

Model: 2GIG-CO8E-345 Tested By: Sam K.

Duty Cycle Correction Factor: -17.40

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit	Margin	Peak / QP / Avg	Table	Tower	Comments
345.00	92.32	Н	97.26	-4.94	Peak	105.00	1.01	X-Axis
345.00	74.92	Н	77.26	-2.34	Avg	105.00	1.01	X-Axis
345.00	74.58	V	97.26	-22.68	Peak	68.00	1.40	X-Axis
345.00	57.18	V	77.26	-20.08	Avg	68.00	1.40	X-Axis
345.00	85.27	Н	97.26	-11.99	Peak	163.00	1.45	Z-Axis
345.00	67.87	Н	77.26	-9.39	Avg	163.00	1.45	Z-Axis
345.00	87.23	V	97.26	-10.03	Peak	148.00	1.75	Z-Axis
345.00	69.83	V	77.26	-7.43	Avg	148.00	1.75	Z-Axis
345.00	85.44	Н	97.26	-11.82	Peak	0.00	2.42	Y-Axis
345.00	68.04	Н	77.26	-9.22	Avg	0.00	2.42	Y-Axis
345.00	90.95	V	97.26	-6.31	Peak	260.00	1.60	Y-Axis
345.00	73.55	V	77.26	-3.71	Avg	260.00	1.60	Y-Axis



Report Number: D81128P1 IC ID: 1078-00180

HARMONICS - HORIZONTAL

FCC 15.231

Company: Nortek Security & Control, LLC Date: 11/28/2018

EUT: Carbon Monoxide Alarm Lab: R

Model: 2GIG-CO8E-345 Tested By: Sam K.

-17.40 Duty Cycle Correction Factor:

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
690.00	54.85	Н	77.26	-22.44	Peak	1.27	276.00	X-Axis
690.00	37.45	Н	57.26	-19.81	Avg	1.27	276.00	X-Axis
1035.00	41.40	Н	73.98	-32.58	Peak	1.70	60.00	X-Axis
1035.00	24.00	Н	53.98	-29.98	Avg	1.70	60.00	X-Axis
1380.00	34.79	Н	73.98	-39.19	Peak	1.63	343.00	X-Axis
1380.00	17.39	Н	53.98	-36.59	Avg	1.63	343.00	X-Axis
1725.00	41.41	Н	77.26	-35.85	Peak	1.20	20.00	X-Axis
1725.00	24.01	Н	57.26	-33.25	Avg	1.20	20.00	X-Axis
2070.00	46.45	Н	77.26	-30.81	Peak	1.00	15.00	X-Axis
2070.00	29.05	Н	57.26	-28.21	Avg	1.00	15.00	X-Axis
2415.00	50.33	Н	77.26	-26.93	Peak	1.05	0.00	X-Axis
2415.00	32.93	Н	57.26	-24.33	Avg	1.05	0.00	X-Axis
2760.00	45.37	Н	73.98	-28.61	Peak	1.10	94.00	X-Axis
2760.00	27.97	Н	53.98	-26.01	Avg	1.10	94.00	X-Axis
3105.00	59.13	Н	77.26	-18.13	Peak	1.03	150.00	X-Axis
3105.00	41.73	Н	57.26	-15.53	Avg	1.03	150.00	X-Axis
3450.00	43.07	Н	77.26	-34.19	Peak	1.05	195.00	X-Axis
3450.00	25.67	Н	57.26	-31.59	Avg	1.05	195.00	X-Axis

Test distance

3 meter



HARMONICS - VERTICAL

FCC 15.231

Company: Nortek Security & Control, LLC Date: 11/28/2018

EUT: Carbon Monoxide Alarm Lab: R Model: 2GIG-CO8E-345 Tested By: Sam K.

Duty Cycle Correction Factor: -17.40

Freq. (MHz)	Level (dBuV/m)	Pol (v/h)	Limit (dBuV/m)	Margin (dB)	Peak / QP / Avg	Ant. Height (m)	Table Angle (deg)	Comments
690.00	45.85	V	77.26	-31.41	Peak	1.20	145.00	X-Axis
690.00	28.45	V	57.26	-28.81	Avg	1.20	145.00	X-Axis
1035.00	33.91	V	73.98	-40.07	Peak	1.71	300.00	X-Axis
1035.00	16.51	V	53.98	-37.47	Avg	1.71	300.00	X-Axis
1380.00	34.79	V	73.98	-39.91	Peak	1.40	202.00	X-Axis
1380.00	17.39	V	53.98	-36.59	Avg	1.40	202.00	X-Axis
						71		
1725.00	41.41	V	77.26	-35.85	Peak	1.15	180.00	X-Axis
1725.00	24.01	V	57.26	-33.25	Avg	1.15	180.00	X-Axis
2070.00	46.45	V	77.26	-30.81	Peak	1.65	163.00	X-Axis
2070.00	29.05	V	57.26	-28.21	Avg	1.65	163.00	X-Axis
2415.00	48.59	V	77.26	-28.67	Peak	1.25	217.00	X-Axis
2415.00	31.19	V	57.26	-26.07	Avg	1.25	217.00	X-Axis
2760.00	48.95	V	73.98	-25.03	Peak	1.05	200.00	X-Axis
2760.00	31.55	V	53.98	-22.43	Avg	1.05	200.00	X-Axis
3105.00	55.32	V	77.26	-21.94	Peak	1.30	215.00	X-Axis
3105.00	37.92	V	57.26	-19.34	Avg	1.30	215.00	X-Axis
3450.00	42.95	V	77.26	-34.31	Peak	1.45	250.00	X-Axis
3450.00	25.55	V	57.26	-31.71	Avg	1.45	250.00	X-Axis

Test distance

3 meter






FCC Part 15 Subpart C Section 15.231, RSS GEN & RSS 210 Test Report


DUTY CYCLE
PLOTS

DUTY CYCLE

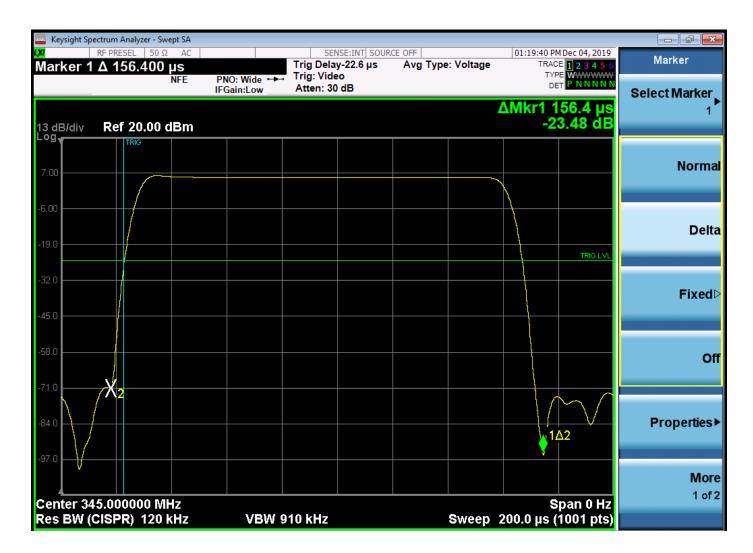

Time of Pulse Type 1=156.4 µs


DUTY CYCLE

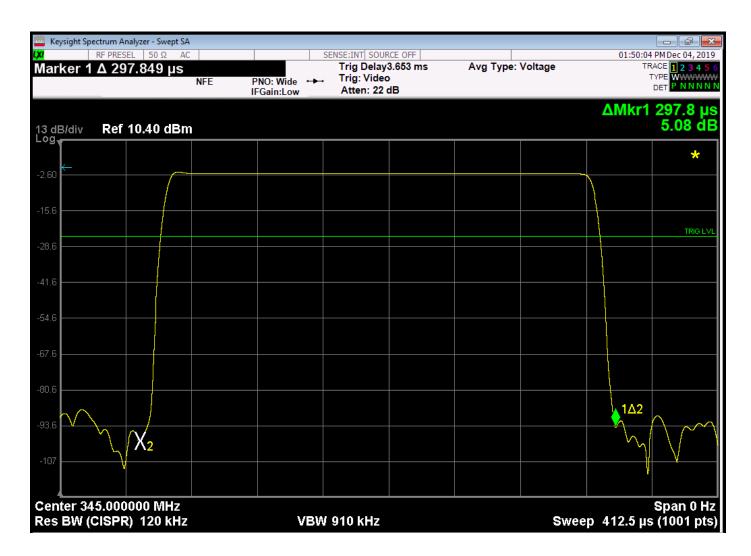

Time of Pulse Type 2=297.849 µs




DUTY CYCLE

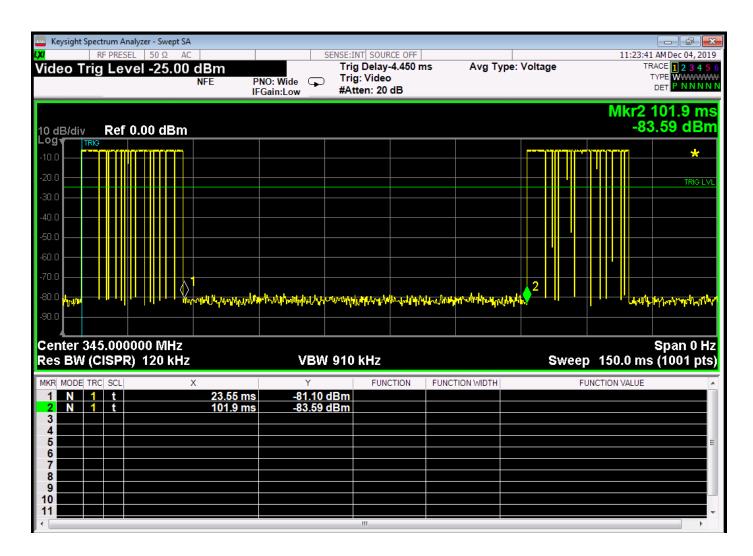

Total On Time in a 100ms Span=23.55ms



DUTY CYCLE

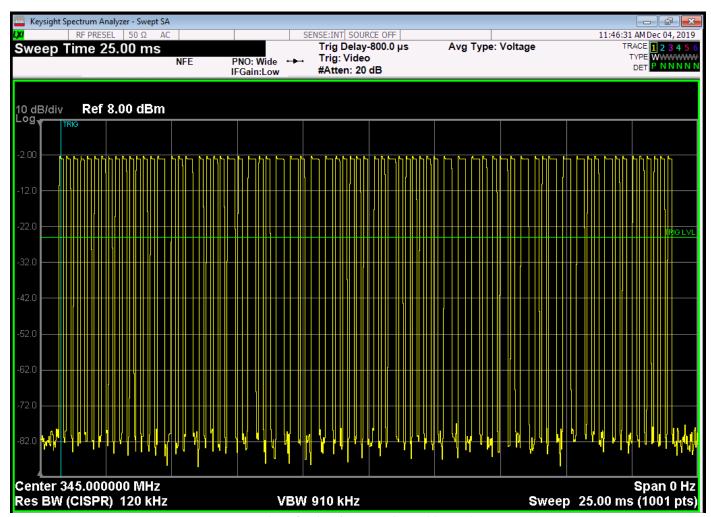

Number of Pulses in Worst Case 100ms=70 Pulse Type 1 On Time=156.4 μ s*52=8,132.8 μ s Pulse Type 2 On Time=297.849 μ s*18=5361.28 μ s 5,361.28 μ s+8,132.8 μ s=13.494ms Duty Cycle=13.4941ms/100ms=0.134941 The Peak to Average Duty Cycle Correction= -17.40dB





TRANSMIT TIMEOUT
DATA

Date:

Lab: R

12/16/2018

IC ID: 1078-00180



TRANSMIT TIMEOUT


FCC 15.231

Company: Nortek Security & Control, LLC

EUT: Carbon Monoxide Alarm

Model: 2GIG-C08E-345 Tested By: Sam K.

Freq. (MHz)	Time (s)	Limit (s)	Margin	Comments
345.00	2.27	5	-2.73	N/A

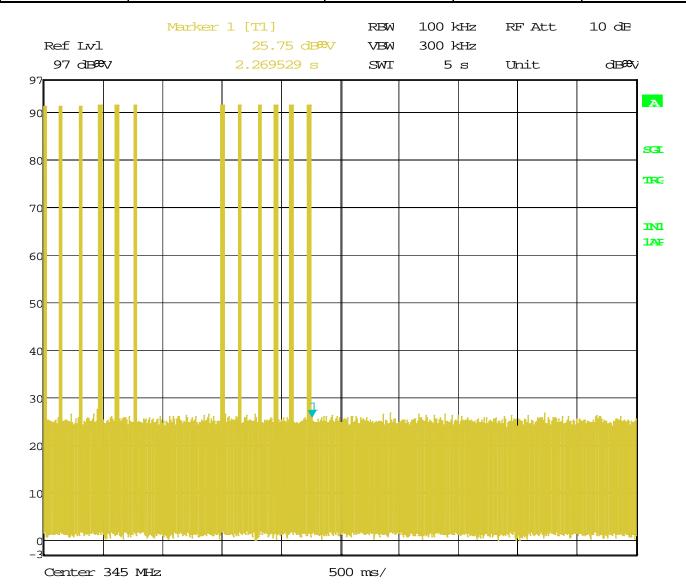





-20 dB & Occupied Bandwidth DATA



-20dB & 99% BANDWIDTH

FCC 15.231

Company: Nortek Security & Control, LLC Date: 02/28/2020

EUT: Carbon Monoxide Alarm Lab: R
Model: 2GIG-C08E-345 Tested By: Sam K.

Freq. (MHz)	Bandwidth (kHz)	Limit (kHz)	Margin	Comments
345.00	96.32	N/A	N/A	99%
345.00	26.26	862.50	-836.240000	-20dB





-20dB BANDWIDTH

