



802.11ax HE80 CH42



Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
1255.500000	44.77	(<u></u>)	68.20	23.43	500.0	100.0	V	119.0	2.8
1390.250000		34.16	54.00	19.84	500.0	200.0	V	114.0	3.8
1721.000000		35.14	54.00	18.86	500.0	200.0	٧	78.0	5.3
1934.500000	48.13		68.20	20.07	500.0	200.0	٧	0.0	6.2
2396.500000	49.26		68.20	18.94	500.0	100.0	٧	244.0	8.1
2801.625000	and the second se	37.94	54.00	16.06	500.0	200.0	Н	0.0	9.1
3488.500000	51.83		68.20	16.37	500.0	200.0	V	148.0	11.5
3987.250000		41.52	54.00	12.48	500.0	100.0	Н	193.0	12.5
4777.375000		40.92	54.00	13.08	500.0	100.0	Н	151.0	12.9
5760.000000	56.51		68.20	11.69	500.0	200.0	Н	283.0	14.6
6946.500000	60.04		68.20	8.16	500.0	100.0	V	11.0	17.1
7321.000000		44.93	54.00	9.07	500.0	200.0	٧	218.0	17.7

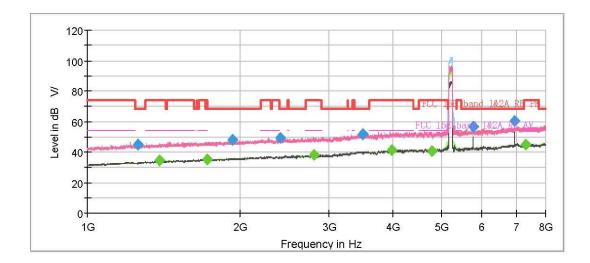

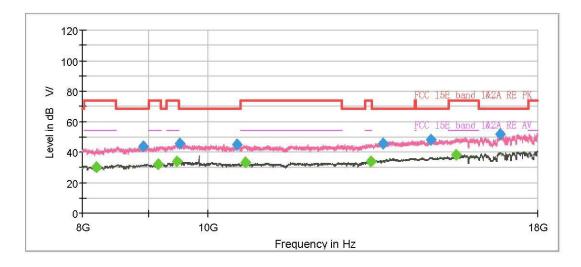


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8198.750000		30.31	54.00	23.69	500.0	200.0	V	17.0	-2.4
8913.750000	43.51		68.20	24.69	500.0	200.0	Н	300.0	-1.3
9151.250000		32.14	54.00	21.86	500.0	200.0	Н	0.0	-1.1
9470.000000		34.02	54.00	19.98	500.0	200.0	٧	205.0	-0.1
9512.500000	45.42	(1999))	68.20	22.78	500.0	200.0	Н	255.0	-0.1
10532.500000	44.63	(68.20	23.57	500.0	100.0	٧	256.0	-1.0
10700.000000		33.41	54.00	20.59	500.0	100.0	V	230.0	-0.8
13376.250000		34.08	54.00	19.92	500.0	100.0	Н	103.0	2.4
13672.500000	45.79	1	68.20	22.41	500.0	100.0	٧	146.0	3.1
14886.250000	48.25		68.20	19.95	500.0	200.0	Н	245.0	5.0
15575.000000		37.88	54.00	16.12	500.0	100.0	Н	259.0	6.4
16846.250000	51.57		68.20	16.63	500.0	100.0	V	0.0	8.8



802.11ax HE80 CH58


🛟 eurofins

RF Test Report

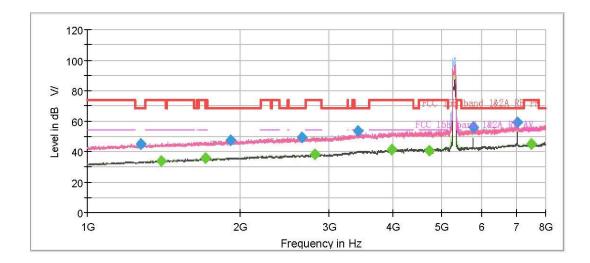


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1272.125000	44.69		68.20	23.51	500.0	100.0	V	130.0	3.0
1399.000000		34.05	54.00	19.95	500.0	200.0	V	169.0	3.8
1706.125000		35.52	54.00	18.48	500.0	200.0	V	43.0	5.3
1919.625000	47.64		68.20	20.56	500.0	100.0	Н	188.0	6.1
2645.000000	49.33		68.20	18.87	500.0	200.0	Н	150.0	8.6
2807.750000		37.95	54.00	16.05	500.0	100.0	V	206.0	9.1
3415.000000	53.37		68.20	14.83	500.0	200.0	V	347.0	11.3
3988.125000		41.17	54.00	12.83	500.0	100.0	Н	142.0	12.5
4722.250000		40.84	54.00	13.16	500.0	100.0	H	117.0	13.2
5760.000000	56.02		68.20	12.18	500.0	200.0	н	263.0	14.6
7053.250000	59.07		68.20	9.13	500.0	100.0	V	24.0	17.3
7491.625000		44.83	54.00	9.17	500.0	200.0	V	179.0	17.0



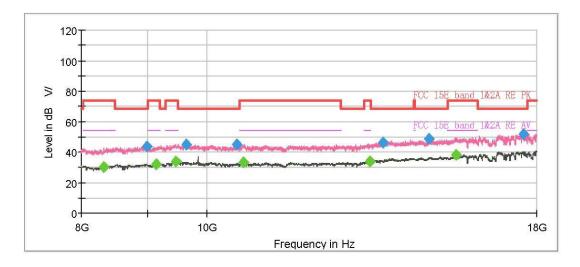


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8325.000000		30.31	54.00	23.69	500.0	100.0	Н	287.0	-2.4
8988.750000	43.53		68.20	24.67	500.0	100.0	Н	220.0	-1.3
9147.500000		32.08	54.00	21.92	500.0	200.0	٧	0.0	-1.1
9465.000000		33.84	54.00	20.16	500.0	100.0	Н	0.0	-0.1
9636.250000	44.90	()	68.20	23.30	500.0	200.0	V	182.0	-0.6
10561.250000	44.68	(68.20	23.52	500.0	100.0	Н	78.0	-0.9
10673.750000		33.42	54.00	20.58	500.0	200.0	Н	335.0	-0.8
13381.250000		34.11	54.00	19.89	500.0	200.0	H	0.0	2.4
13685.000000	46.22		68.20	21.98	500.0	100.0	H	24.0	3.1
14858.750000	48.38		68.20	19.82	500.0	100.0	٧	356.0	4.9
15586.250000		37.88	54.00	16.12	500.0	100.0	Н	83.0	6.5
17586.250000	51.64		68.20	16.56	500.0	200.0	٧	12.0	10.1






802.11ax HE80 CH106

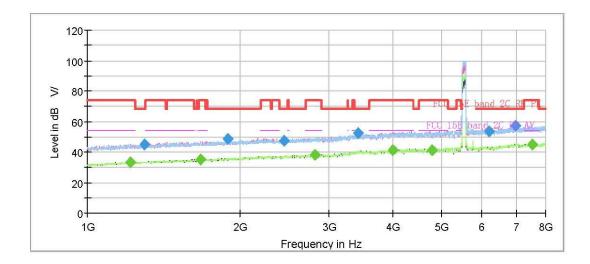


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
((((()	(ms)	(0,		((
1214.375000		32.93	54.00	21.07	500.0	200.0	V	196.0	2.7
1298.375000	44.68		68.20	23.52	500.0	100.0	Н	149.0	3.2
1670.250000		35.36	54.00	18.64	500.0	100.0	V	185.0	5.2
1889.000000	48.41		68.20	19.79	500.0	200.0	Н	4.0	6.0
2439.375000	47.30		68.20	20.90	500.0	100.0	٧	55.0	8.3
2809.500000		37.87	54.00	16.13	500.0	100.0	٧	199.0	9.1
3413.250000	52.02		68.20	16.18	500.0	200.0	Н	321.0	11.3
3993.375000		41.30	54.00	12.70	500.0	100.0	٧	226.0	12.6
4786.125000		41.06	54.00	12.94	500.0	100.0	V	5.0	12.9
6199.250000	53.45		68.20	14.75	500.0	100.0	V	70.0	15.0
6988.500000	57.34		68.20	10.86	500.0	200.0	V	249.0	17.2
7535.375000		44.86	54.00	9.14	500.0	100.0	V	170.0	17.8



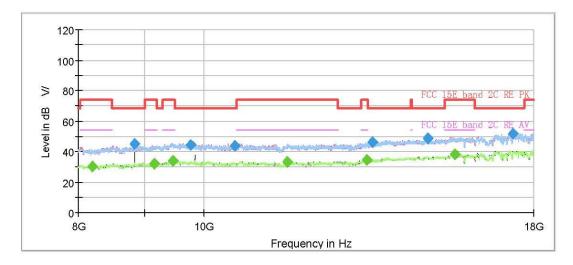


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8202.500000		29.95	54.00	24.05	500.0	200.0	V	319.0	-2.4
8847.500000	44.66		68.20	23.54	500.0	100.0	V	227.0	-1.4
9151.250000		32.26	54.00	21.74	500.0	200.0	Н	201.0	-1.1
9468.750000		33.96	54.00	20.04	500.0	100.0	Н	247.0	-0.1
9768.750000	44.52		68.20	23.69	500.0	100.0	V	32.0	-0.5
10568.750000	43.92	()	68.20	24.28	500.0	200.0	V	274.0	-0.9
11605.000000		33.36	54.00	20.64	500.0	100.0	Н	116.0	-0.5
13385.000000		34.30	54.00	19.70	500.0	200.0	V	258.0	2.4
13503.750000	46.22		68.20	21.98	500.0	100.0	Н	207.0	2.7
14897.500000	48.42		68.20	19.78	500.0	100.0	н	34.0	5.0
15637.500000		38.06	54.00	15.94	500.0	100.0	٧	84.0	6.5
17360.000000	51.58		68.20	16.62	500.0	100.0	Н	150.0	9.6

RF Test Report 802.11ax HE80 CH122

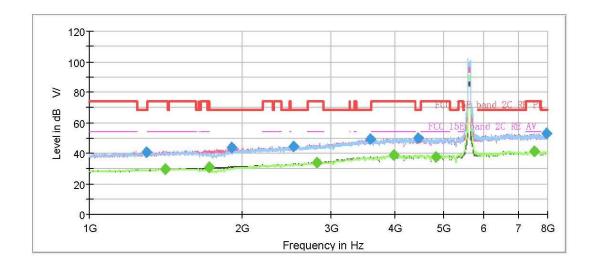


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
	Java Paes - X				(ms)			SAME MASHI	
1296.625000	40.33		68.20	27.87	500.0	100.0	Н	187.0	-8.1
1411.250000		29.51	54.00	24.49	500.0	200.0	٧	118.0	-7.4
1721.875000		30.51	54.00	23.49	500.0	100.0	V	93.0	-5.8
1906.500000	43.44		68.20	24.76	500.0	200.0	V	0.0	-4.9
2529.500000	44.52		68.20	23.68	500.0	100.0	Н	325.0	-2.3
2811.250000		34.05	54.00	19.95	500.0	200.0	V	221.0	-1.3
3576.875000	49.27		68.20	18.93	500.0	100.0	Н	280.0	1.5
3990.750000		38.68	54.00	15.32	500.0	100.0	Н	315.0	2.9
4440.500000	49.63		68.20	18.57	500.0	200.0	Н	7.0	3.9
4829.875000		37.80	54.00	16.20	500.0	100.0	V	170.0	4.5
7539.750000		41.26	54.00	12.74	500.0	200.0	٧	83.0	7.4
7961.500000	52.79		68.20	15.41	500.0	100.0	Н	133.0	8.3

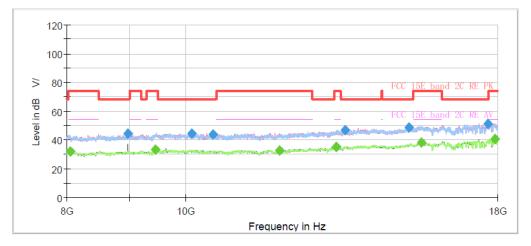


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8052.500000		31.83	54.00	22.17	500.0	200.0	н	151.0	-1.5
8975.000000	44.04		68.20	24.16	500.0	100.0	V	256.0	-1.4
9460.000000		33.00	54.00	21.00	500.0	200.0	Н	19.0	-0.3
10115.000000	44.39		68.20	23.81	500.0	100.0	V	77.0	-0.8
10530.000000	43.41		68.20	24.79	500.0	200.0	V	221.0	-0.9
11941.250000		32.90	54.00	21.10	500.0	200.0	V	0.0	0.3
13296.250000		35.21	54.00	18.79	500.0	100.0	V	118.0	3.3
13505.000000	46.85		68.20	21.35	500.0	100.0	Н	162.0	3.5
15223.750000	48.33		68.20	19.87	500.0	200.0	Н	0.0	5.7
15585.000000		38.07	54.00	15.93	500.0	200.0	V	331.0	6.7
17675.000000	51.19		68.20	17.01	500.0	100.0	V	261.0	10.2
17906.250000		40.45	54.00	13.55	500.0	100.0	Н	101.0	10.2

RF Test Report 802.11ax HE80 CH138

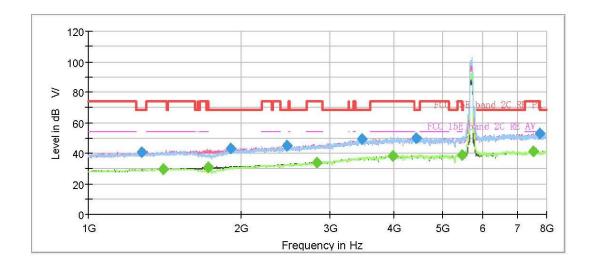

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
1274.750000	40.71		68.20	27.49	500.0	200.0	v	0.0	-8.2
1405.125000		29.56	54.00	24.44	500.0	100.0	V	115.0	-7.4
1721.875000		30.76	54.00	23.24	500.0	200.0	V	312.0	-5.8
1910.875000	43.26		68.20	24.94	500.0	100.0	٧	146.0	-4.9
2462.125000	45.06		68.20	23.14	500.0	100.0	V	0.0	-2.6
2823.500000		34.13	54.00	19.87	500.0	100.0	V	0.0	-1.3
3467.500000	49.27	Transarta	68.20	18.93	500.0	100.0	V	176.0	1.2
3990.750000		38.38	54.00	15.62	500.0	200.0	Н	179.0	2.9
4424.750000	50.08		68.20	18.12	500.0	100.0	Н	169.0	3.9
5453.750000		38.88	54.00	15.12	500.0	100.0	Н	288.0	6.0
7533.625000		41.36	54.00	12.64	500.0	200.0	Н	8.0	7.4
7763.750000	53.02		68.20	15.18	500.0	100.0	V	90.0	7.9




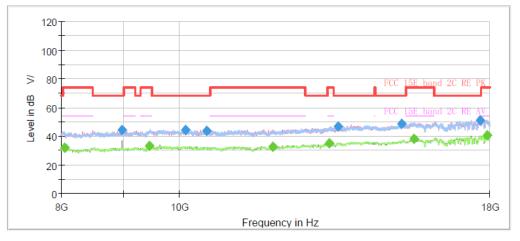


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
8052.500000		31.83	54.00	22.17	500.0	200.0	н	151.0	-1.5
8975.000000	44.04		68.20	24.16	500.0	100.0	V	256.0	-1.4
9460.000000		33.00	54.00	21.00	500.0	200.0	н	19.0	-0.3
10115.000000	44.39		68.20	23.81	500.0	100.0	V	77.0	-0.8
10530.000000	43.41		68.20	24.79	500.0	200.0	V	221.0	-0.9
11941.250000		32.90	54.00	21.10	500.0	200.0	V	0.0	0.3
13296.250000		35.21	54.00	18.79	500.0	100.0	V	118.0	3.3
13505.000000	46.85		68.20	21.35	500.0	100.0	н	162.0	3.5
15223.750000	48.33		68.20	19.87	500.0	200.0	н	0.0	5.7
15585.000000		38.07	54.00	15.93	500.0	200.0	V	331.0	6.7
17675.000000	51.19		68.20	17.01	500.0	100.0	V	261.0	10.2
17906.250000		40.45	54.00	13.55	500.0	100.0	н	101.0	10.2



802.11ax HE80 CH155

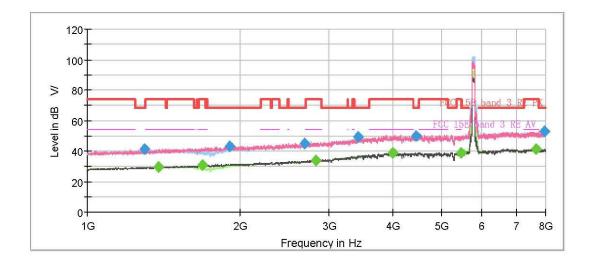


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
1295.750000	40.93		68.20	27.27	500.0	200.0	Н	334.0	-8.1
1381.500000	-	29.77	54.00	24.23	500.0	200.0	V	134.0	-7.5
1689.500000		30.74	54.00	23.26	500.0	100.0	٧	195.0	-5.9
1906.500000	42.97		68.20	25.23	500.0	100.0	۷	321.0	-4.9
2678.250000	45.23		68.20	22.97	500.0	200.0	Н	283.0	-1.9
2819.125000		34.02	54.00	19.98	500.0	200.0	Н	353.0	-1.3
3411.500000	48.95	()	68.20	19.25	500.0	100.0	Н	179.0	1.0
3991.625000		38.78	54.00	15.22	500.0	100.0	V	273.0	2.9
4447.500000	49.98		68.20	18.22	500.0	100.0	V	48.0	3.9
5449.375000		38.70	54.00	15.30	500.0	100.0	Н	0.0	5.9
7674.500000		41.26	54.00	12.74	500.0	100.0	V	180.0	7.8
7971.125000	53.17		68.20	15.03	500.0	100.0	V	297.0	8.4

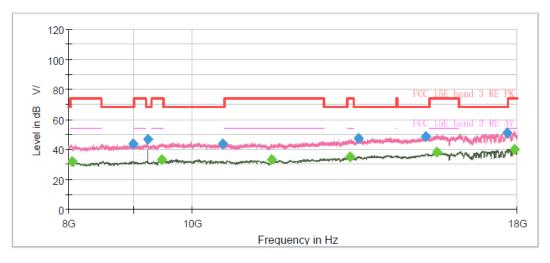


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8051.250000		32.01	54.00	21.99	500.0	200.0	н	81.0	-1.5
8990.000000	43.90		68.20	24.30	500.0	100.0	V	170.0	-1.4
9240.000000	46.61		68.20	21.59	500.0	100.0	V	265.0	-0.9
9468.750000		33.25	54.00	20.75	500.0	100.0	V	255.0	-0.3
10578.750000	43.59		68.20	24.61	500.0	100.0	н	28.0	-0.8
11550.000000		33.21	54.00	20.79	500.0	100.0	V	220.0	-0.2
13317.500000		35.15	54.00	18.85	500.0	100.0	Н	267.0	3.3
13507.500000	47.24		68.20	20.96	500.0	200.0	н	149.0	3.5
15261.250000	48.77		68.20	19.43	500.0	200.0	V	103.0	5.9
15567.500000		38.11	54.00	15.89	500.0	100.0	н	299.0	6.6
17682.500000	51.32		68.20	16.88	500.0	200.0	V	9.0	10.2
17905.000000		40.26	54.00	13.74	500.0	100.0	V	335.0	10.2

802.11ax HE160 CH50

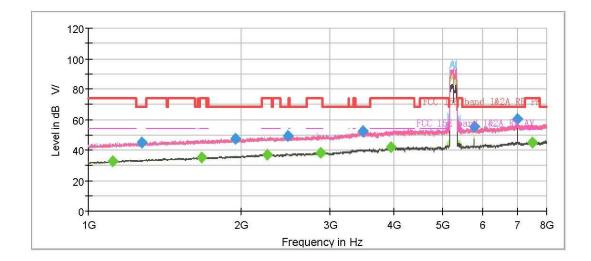


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
1116.375000		32.46	54.00	21.54	500.0	100.0	V	222.0	1.5
1273.875000	45.21		68.20	22.99	500.0	200.0	н	0.0	3.0
1674.625000		35.21	54.00	18.79	500.0	200.0	н	284.0	5.2
1949.375000	47.31		68.20	20.89	500.0	100.0	Н	24.0	6.3
2255.625000		36.72	54.00	17.28	500.0	200.0	Н	144.0	7.8
2476.125000	49.11		68.20	19.09	500.0	200.0	V	71.0	8.4
2867.250000		37.98	54.00	16.02	500.0	100.0	Н	100.0	9.2
3476.250000	52.15		68.20	16.05	500.0	100.0	V	0.0	11.5
3941.750000		41.62	54.00	12.38	500.0	100.0	Н	34.0	12.3
5760.000000	55.65		68.20	12.55	500.0	100.0	Н	348.0	14.6
7000.750000	60.40		68.20	7.80	500.0	100.0	Н	348.0	17.3
7518.750000		45.02	54.00	8.98	500.0	100.0	V	338.0	17.7



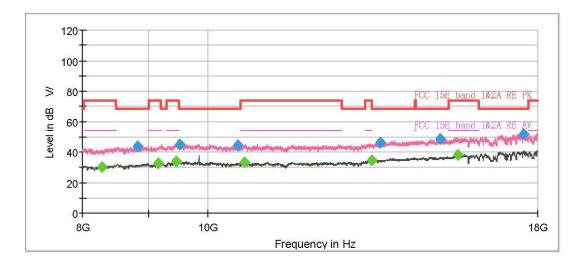


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8280.000000		29.94	54.00	24.06	500.0	200.0	Н	194.0	-2.5
8833.750000	43.42		68.20	24.78	500.0	200.0	Н	256.0	-1.4
9153.750000		32.40	54.00	21.60	500.0	100.0	٧	302.0	-1.1
9451.250000		33.87	54.00	20.13	500.0	200.0	Н	0.0	-0.3
9517.500000	45.17	(1999))	68.20	23.03	500.0	100.0	V	176.0	-0.1
10558.750000	44.47	(68.20	23.73	500.0	200.0	V	136.0	-0.9
10671.250000		33.43	54.00	20.57	500.0	100.0	V	196.0	-0.8
13400.000000		34.50	54.00	19.50	500.0	200.0	V	299.0	2.4
13593.750000	46.31		68.20	21.89	500.0	200.0	Н	292.0	3.0
15123.750000	48.59		68.20	19.61	500.0	200.0	V	17.0	5.1
15608.750000		38.09	54.00	15.91	500.0	100.0	Н	258.0	6.5
17560.000000	51.91		68.20	16.29	500.0	200.0	Н	148.0	10.0

802.11ax HE160 CH114

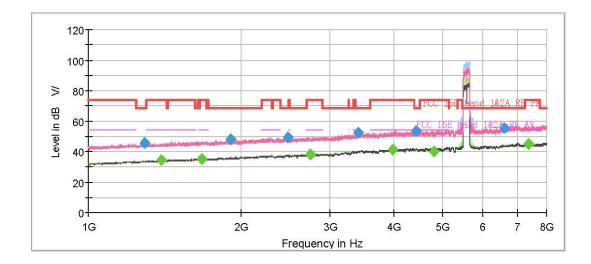

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1293.125000	45.51		68.20	22.69	500.0	100.0	V	57.0	3.2
1393.750000		34.40	54.00	19.60	500.0	200.0	Н	72.0	3.8
1671.125000		35.38	54.00	18.62	500.0	200.0	Н	202.0	5.2
1907.375000	47.84		68.20	20.36	500.0	200.0	V	46.0	6.1
2474.375000	48.93		68.20	19.27	500.0	200.0	V	1.0	8.4
2740.375000		38.12	54.00	15.88	500.0	100.0	V	187.0	8.8
3400.125000	52.34		68.20	15.86	500.0	200.0	V	217.0	11.2
3988.125000		41.50	54.00	12.50	500.0	100.0	Н	179.0	12.5
4430.875000	53.25		68.20	14.95	500.0	100.0	H	110.0	12.7
4810.625000		40.15	54.00	13.85	500.0	100.0	н	41.0	12.8
6599.125000	55.69		68.20	12.51	500.0	100.0	V	109.0	15.9
7379.625000		44.92	54.00	9.08	500.0	200.0	н	245.0	17.8

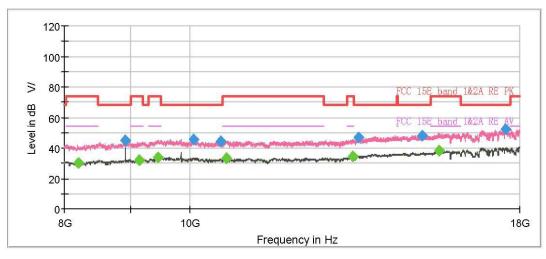


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)	10101100	(deg)	(dB/m)
8202.500000		30.05	54.00	23.95	500.0	100.0	н	117.0	-2.4
8911.250000	44.95		68.20	23.25	500.0	100.0	V	226.0	-1.3
9145.000000		32.21	54.00	21.79	500.0	100.0	Н	43.0	-1.1
9453.750000		34.06	54.00	19.94	500.0	200.0	Н	249.0	-0.3
10078.750000	45.38		68.20	22.82	500.0	200.0	Н	239.0	-0.7
10575.000000	44.36	()	68.20	23.84	500.0	100.0	Н	238.0	-0.9
10682.500000		33.51	54.00	20.49	500.0	100.0	Н	326.0	-0.8
13380.000000		34.30	54.00	19.70	500.0	100.0	٧	53.0	2.4
13515.000000	46.52		68.20	21.68	500.0	200.0	Н	142.0	2.8
15135.000000	48.03		68.20	20.17	500.0	100.0	V	343.0	5.2
15586.250000		37.98	54.00	16.02	500.0	200.0	н	358.0	6.5
17562.500000	52.07		68.20	16.13	500.0	200.0	V	113.0	10.0



RF Test Report

Report No.: R2406A0726-R3


During the test, the Radiates Emission from 18GHz to 40GHz was performed in all modes with all channels, 802.11ac VHT 80, Channel 42 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

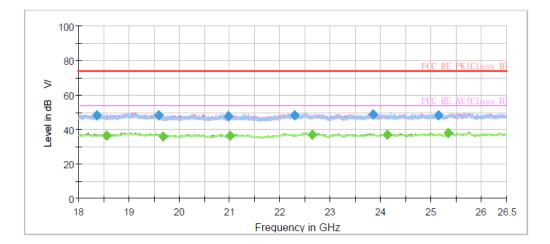

F	inal	R	60	ш	f
Γ.	IIIa		e 5	uı	ι

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
18368.687500	48.30		74.00	25.70	500.0	200.0	V	181.0	-4.2
18559.937500		36.52	54.00	17.48	500.0	100.0	V	305.0	-4.3
19593.750000	48.26		74.00	25.74	500.0	100.0	V	138.0	-4.4
19690.437500		36.02	54.00	17.98	500.0	200.0	V	117.0	-4.5
20972.875000	47.57		74.00	26.43	500.0	100.0	V	134.0	-3.8
21022.812500		36.38	54.00	17.62	500.0	100.0	V	254.0	-3.8
22301.000000	48.13		74.00	25.87	500.0	200.0	V	10.0	-2.6
22637.812500		36.88	54.00	17.12	500.0	100.0	V	323.0	-2.4
23856.500000	48.71		74.00	25.29	500.0	200.0	н	329.0	-1.9
24135.937500		36.96	54.00	17.04	500.0	200.0	V	327.0	-1.9
25150.625000	48.15		74.00	25.85	500.0	100.0	Н	113.0	-1.4
25349.312500		37.75	54.00	16.25	500.0	200.0	V	359.0	-1.2



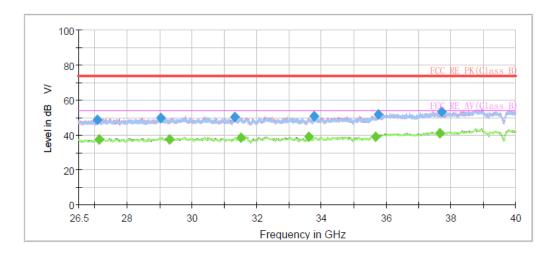

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
27090.625000	48.83		74.00	25.17	500.0	200.0	н	67.0	0.3
27139.562500		37.56	54.00	16.44	500.0	200.0	V	12.0	0.3
29044.750000	49.52		74.00	24.48	500.0	200.0	н	320.0	1.0
29304.625000		37.53	54.00	16.47	500.0	100.0	Н	185.0	1.1
31327.937500	50.01		74.00	23.99	500.0	100.0	V	0.0	0.0
31525.375000		38.67	54.00	15.33	500.0	200.0	V	59.0	-0.1
33612.812500		38.93	54.00	15.07	500.0	200.0	V	107.0	0.4
33766.375000	51.02		74.00	22.98	500.0	100.0	н	322.0	0.4
35666.500000		39.17	54.00	14.83	500.0	200.0	V	237.0	2.6
35764.375000	51.54		74.00	22.46	500.0	200.0	V	0.0	2.9
37651.000000		41.28	54.00	12.73	500.0	200.0	V	45.0	5.3
37711.750000	53.10		74.00	20.90	500.0	200.0	V	98.0	5.3

5.6. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

Methods of Measurement

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10.Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

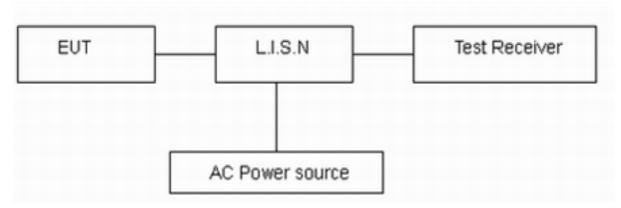

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency	Conducted Limits(dBµV)								
(MHz)	Quasi-peak	Average							
0.15 - 0.5	66 to 56 *	56 to 46*							
0.5 - 5	56	46							
5 - 30	60	50							
*: Decreases wit	* Decreases with the logarithm of the frequency.								

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96, U= 2.69 dB.

🛟 eurofins

RF Test Report

Test Results:


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels, 802.11ac VHT 80, Channel 42 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

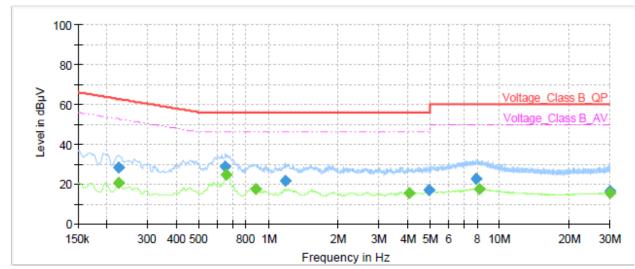


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.22		20.27	52.66	32.39	1000.0	9.000	L1	ON	21.1
0.22	28.28		62.66	34.38	1000.0	9.000	L1	ON	21.1
0.65	28.73		56.00	27.27	1000.0	9.000	L1	ON	20.7
0.66		24.78	46.00	21.22	1000.0	9.000	L1	ON	20.7
0.88		17.28	46.00	28.72	1000.0	9.000	L1	ON	20.3
1.18	21.29		56.00	34.71	1000.0	9.000	L1	ON	20.1
4.06		15.57	46.00	30.43	1000.0	9.000	L1	ON	19.5
4.94	16.75		56.00	39.25	1000.0	9.000	L1	ON	19.5
7.91	22.44		60.00	37.56	1000.0	9.000	L1	ON	19.5
8.20		17.21	50.00	32.79	1000.0	9.000	L1	ON	19.5
29.86		15.57	50.00	34.43	1000.0	9.000	L1	ON	19.7
29.97	16.27		60.00	43.73	1000.0	9.000	L1	ON	19.7

Remark: Correct factor=cable loss + LISN factor

L line Conducted Emission from 150 kHz to 30 MHz



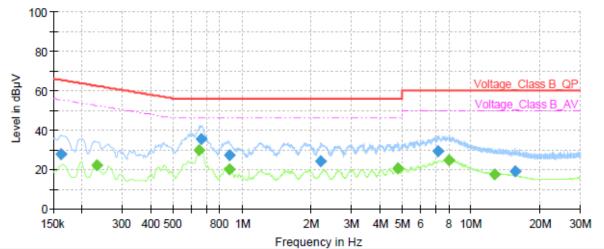

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.16	27.85		65.40	37.55	1000.0	9.000	Ν	ON	21.0
0.23		22.06	52.41	30.35	1000.0	9.000	Ν	ON	21.1
0.65		29.82	46.00	16.18	1000.0	9.000	Ν	ON	20.7
0.66	35.58		56.00	20.42	1000.0	9.000	Ν	ON	20.7
0.88		19.84	46.00	26.16	1000.0	9.000	Ν	ON	20.3
0.88	27.08		56.00	28.92	1000.0	9.000	Ν	ON	20.3
2.22	24.25		56.00	31.75	1000.0	9.000	Ν	ON	19.7
4.77		20.43	46.00	25.57	1000.0	9.000	Ν	ON	19.5
7.18	29.02		60.00	30.98	1000.0	9.000	Ν	ON	19.5
8.04		24.62	50.00	25.38	1000.0	9.000	Ν	ON	19.5
12.67		17.63	50.00	32.37	1000.0	9.000	Ν	ON	19.6
15.56	19.01		60.00	40.99	1000.0	9.000	Ν	ON	19.7

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 kHz to 30 MHz



6. Main Test Instruments

Name	Manufacturer	Туре	Serial Number	Calibration Date	Expiration Date
Power sensor	R&S	NRP18S	101954	2024-05-07	2025-05-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY51330870	2024-05-07	2025-05-06
DC Power Supply	UNI-T	UTP1306S+	2205D0517426	2023-12-05	2024-12-04
Climate Chamber	ESPEC	SU-242	93000506	2023-12-05	2024-12-04
Vector Signal Generator	KEYSIGHT	N5182B	MY51350303	2023-12-05	2024-12-04
EMI Test Receiver	R&S	ESR	102389	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101298	2024-05-07	2025-05-06
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	R&S	HF 907	102723	2023-11-24	2026-11-23
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Horn Antenna	STEATITE	QSH-SL-26-40 -K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	9.26.01	/	/
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

****** END OF REPORT ******