



RF TEST REPORT

Applicant ZTE Corporation

FCC ID SRQ-BLADEVULTRA

Product LTE/WCDMA/GSM (GPRS)
Multi-Mode Digital Mobile Phone

Model BLADE V Ultra

Marketing BLADE V Ultra

Report No. R1809A0434-R1

Issue Date November 6, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR 47 Part 22H (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Jiangpeng Lan

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the Test Report	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	11
5.1. RF Power Output	11
5.2. Effective Radiated Power	15
5.3. Occupied Bandwidth	19
5.4. Band Edge Compliance	25
5.5. Peak-to-Average Power Ratio (PAPR)	33
5.6. Frequency Stability	36
5.7. Spurious Emissions at Antenna Terminals	40
5.8. Radiates Spurious Emission	47
6. Main Test Instruments	57

Summary of measurement results

No.	Test Type	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Radiated Power	22.913(a)(5)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 / 22.917(a)	PASS
5	Peak-to-Average Power Ratio	22.913(d)/ KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 22.355	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 22.917(a)	PASS
8	Radiates Spurious Emission	2.1053 / 22.917 (a)	PASS
Date of Testing: September 28, 2018~ October 25, 2018			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			



1. Test Laboratory

1.1. Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General Information

EUT Description			
Model	BLADE V Ultra		
IMEI	868867040002670		
Hardware Version	uxjA		
Software Version	TEL_MX_BLADE_V_UltraV1.0		
Power Supply	Battery/AC adapter		
Antenna Type	Internal Antenna		
Antenna Gain	820 MHz	-4.9 dBi	
	830 MHz	-4.1 dBi	
	840 MHz	-3.5 dBi	
	850 MHz	-3.2 dBi	
	860 MHz	-3.7 dBi	
	870 MHz	-3.5 dBi	
	880 MHz	-3.7 dBi	
	890 MHz	-4.1 dBi	
Test Mode(s)	GSM 850; WCDMA Band V; LTE Band 5;		
Test Modulation	(GSM)GMSK,8PSK; (WCDMA)QPSK; (LTE)QPSK 16QAM;		
GPRS Multislot Class	12		
EGPRS Multislot Class	12		
HSDPA UE Category	24		
HSUPA UE Category	6		
LTE Category	4		
Maximum E.R.P.	GSM 850:	28.95dBm	
	WCDMA Band V:	17.81dBm	
	LTE Band 5:	17.72dBm	
Rated Power Supply Voltage	3.85V		
Extreme Voltage	Minimum: 3.6V	Maximum: 4.4V	
Extreme Temperature	Lowest: -10°C	Highest: +55°C	
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)



	GSM850	824 ~ 849	869 ~ 894
	WCDMA Band V	824 ~ 849	869 ~ 894
	LTE Band 5	824 ~ 849	869 ~ 894
EUT Accessory			
Adapter	Manufacturer: Salcomp (Shenzhen) Co., Ltd. Model: STC-A5915A-Z		
Battery	Manufacturer: HARBIN COSLIGHT POWER CO LTD Model: Li3940T44P8h937238		
Earphone	Manufacturer: Shen zhen FDC Electronic Co.,Ltd. Model: DEM-66		
USB Cable	99cm Cable, Shielded		
Note: The information of the EUT is declared by the manufacturer.			
2. There is more than one Battery, each one should be applied throughout the compliance test respectively, and however, only the worst case (Battery 1) will be recorded in this report.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2018)

FCC CFR 47 Part 22H (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions were investigated. Subsequently, only the worst case emissions are reported.

The following testing in GSM/WCDMA/LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below:

Test items	Modes/Modulation	
	GSM 850	WCDMA Band V
RF power output	GSM GPRS EGPRS	RMC HSDPA/HSUPA DC-HSDPA
Effective Radiated Power	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Occupied Bandwidth	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Band Edge Compliance	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Peak-to-Average Power Ratio	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Frequency Stability	GSM GPRS(1Tx slot) EGPRS(1Tx slot)	RMC
Spurious Emissions at Antenna Terminals	GSM	RMC
Radiates Spurious Emission	GSM	RMC

Test modes are chosen as the worst case configuration below for LTE Band 5.

Test items	Bandwidth (MHz)				Modulation		RB			Test Channel		
	1.4	3	5	10	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	-	-	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	-	-	O	O	O	O
Band Edge Compliance	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	O	O	O	O
Spurious Emissions at Antenna Terminals	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	-	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.											

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

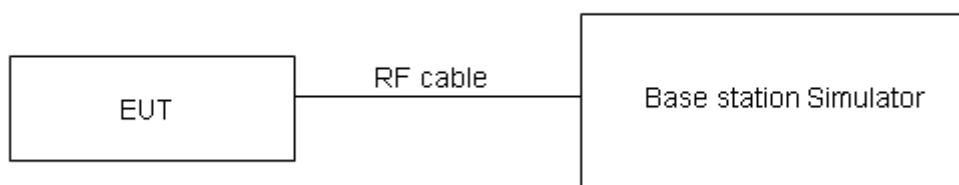

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

GSM 850		Conducted Power(dBm)		
		Channel 128	Channel 190	Channel 251
		824.2 (MHz)	836.6 (MHz)	848.8 (MHz)
GSM	Results	33.21	33.24	33.19
GPRS (GMSK)	1TXslot	33.25	33.28	33.15
	2TXslots	32.12	32.28	32.21
	3TXslots	30.76	30.94	30.87
	4TXslots	30.26	30.41	30.27
EGPRS (8PSK)	1TXslot	26.43	26.62	26.53
	2TXslots	25.74	25.90	25.85
	3TXslots	25.09	25.49	25.29
	4TXslots	24.06	23.88	24.12

WCDMA Band V		Conducted Power(dBm)		
		Channel 4132	Channel 4183	Channel 4233
		826.4(MHz)	836.6(MHz)	846.6(MHz)
RMC		23.58	23.38	23.50
AMR		23.48	23.29	23.37
HSDPA	Sub - Test 1	22.50	22.30	22.42
	Sub - Test 2	22.49	22.29	22.41
	Sub - Test 3	21.98	21.78	21.90
	Sub - Test 4	21.97	21.77	21.89
HSUPA	Sub - Test 1	22.46	22.26	22.38
	Sub - Test 2	21.45	21.25	21.37
	Sub - Test 3	21.93	21.74	21.86
	Sub - Test 4	21.42	21.23	21.35
	Sub - Test 5	22.41	22.22	22.34
DC-HSDPA	Sub - Test 1	22.42	22.24	22.34
	Sub - Test 2	22.41	22.23	22.33
	Sub - Test 3	21.99	21.72	21.84
	Sub - Test 4	21.98	21.71	21.83

LTE Band 5				Conducted Power(dBm)		
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20407/824.7	20525/836.5	20643/848.3
1.4MHz	QPSK	1	0	23.58	23.50	23.54
		1	2	23.27	23.32	23.23
		1	5	23.81	23.52	23.70
		3	0	23.46	23.31	23.48
		3	2	23.32	23.35	23.36
		3	3	23.47	23.31	23.39
		6	0	22.44	22.48	22.60
	16QAM	1	0	22.71	22.80	22.83
		1	2	22.69	22.66	22.65
		1	5	22.89	22.85	22.83
		3	0	22.45	22.34	22.45
		3	2	22.48	22.45	22.48
		3	3	22.61	22.55	22.55
		6	0	21.52	21.53	21.60
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20415/825.5	20525/836.5	20635/847.5
3MHz	QPSK	1	0	23.59	23.53	23.56
		1	7	23.31	23.38	23.28
		1	14	23.83	23.56	23.73
		8	0	22.56	22.43	22.61
		8	4	22.45	22.46	22.47
		8	7	22.57	22.44	22.50
		15	0	22.53	22.53	22.65
	16QAM	1	0	22.73	22.81	22.85
		1	7	22.72	22.73	22.69
		1	14	22.91	22.89	22.85
		8	0	21.57	21.48	21.58
		8	4	21.58	21.57	21.59
		8	7	21.71	21.67	21.68
		15	0	21.56	21.58	21.62
BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
				20425/826.5	20525/836.5	20625/846.5
5MHz	QPSK	1	0	23.58	23.49	23.54



		1	13	23.29	23.37	23.25	
		1	24	23.80	23.51	23.69	
		12	0	22.54	22.39	22.58	
		12	6	22.42	22.41	22.43	
		12	13	22.54	22.41	22.46	
		25	0	22.51	22.49	22.60	
		16QAM	1	0	22.68	22.79	22.83
			1	13	22.70	22.70	22.67
			1	24	22.88	22.85	22.82
			12	0	21.54	21.46	21.55
			12	6	21.55	21.52	21.55
			12	13	21.69	21.63	21.65
	25	0	21.53	21.53	21.58		
	BW	Modulation	RB size	RB offset	Channel/Frequency(MHz)		
					20450/829	20525/836.5	20600/844
10MHz	QPSK	1	0	23.55	23.45	23.51	
		1	25	23.28	23.33	23.23	
		1	49	23.78	23.50	23.66	
		25	0	22.51	22.34	22.54	
		25	13	22.40	22.37	22.40	
		25	25	22.51	22.36	22.42	
		50	0	22.48	22.44	22.56	
	16QAM	1	0	22.80	22.75	22.78	
		1	25	22.66	22.68	22.63	
		1	49	22.86	22.82	22.80	
		25	0	21.51	21.42	21.52	
		25	13	21.52	21.50	21.52	
		25	25	21.66	21.58	21.61	
		50	0	21.51	21.49	21.55	

5.2. Effective Radiated Power

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Methods of Measurement

The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).

- Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.
- Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).
- Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.
- Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading. $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$
- Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation: $ERP \text{ (dBm)} = LVL \text{ (dBm)} + LOSS \text{ (dB)}$
- The maximum ERP is the maximum value determined in the preceding step.
- When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:
 $EIRP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$
 where: dBd refers to gain relative to an ideal dipole.
 $EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB.)}$

The RB allocation refers to section 5.1, using the maximum output power configuration.

Test setup

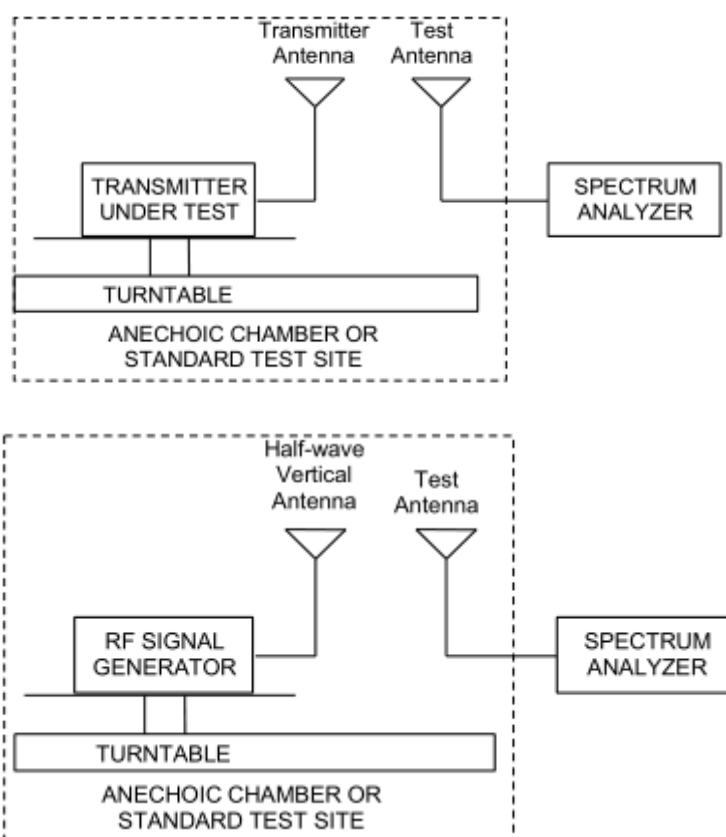

Limits

Rule Part 22.913(a)(5) specifies that "Mobile/portable stations are limited to 7 watts ERP".

Limit	$\leq 7 \text{ W}$ (38.45 dBm)
-------	--------------------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 1.19 \text{ dB}$

Test Results:

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
GSM 850	Low	824.2	Horizontal	26.91	38.45	Pass
	Mid	836.6	Horizontal	28.95	38.45	Pass
	High	848.8	Horizontal	28.34	38.45	Pass
GPRS 850	Low	824.2	Horizontal	26.99	38.45	Pass
	Mid	836.6	Horizontal	27.84	38.45	Pass
	High	848.8	Horizontal	27.18	38.45	Pass
EGPRS 850	Low	824.2	Horizontal	25.87	38.45	Pass
	Mid	836.6	Horizontal	26.50	38.45	Pass
	High	848.8	Horizontal	25.98	38.45	Pass
WCDMA Band V	Low	826.4	Horizontal	17.44	38.45	Pass
	Mid	836.6	Horizontal	17.53	38.45	Pass
	High	846.6	Horizontal	17.81	38.45	Pass

LTE Band 5						
bandwidth	Channel	Frequency (MHz)	Polarization	ERP (dBm)	Limit (dBm)	Conclusion
1.4 MHz (QPSK)	Low	824.7	Horizontal	17.29	38.45	Pass
	Mid	836.5	Horizontal	17.12	38.45	Pass
	High	848.3	Horizontal	17.49	38.45	Pass
3 MHz (QPSK)	Low	825.5	Horizontal	17.52	38.45	Pass
	Mid	836.5	Horizontal	17.08	38.45	Pass
	High	847.5	Horizontal	17.23	38.45	Pass
5 MHz (QPSK)	Low	826.5	Horizontal	17.33	38.45	Pass
	Mid	836.5	Horizontal	17.09	38.45	Pass
	High	846.5	Horizontal	17.37	38.45	Pass
10 MHz (QPSK)	Low	829	Horizontal	17.41	38.45	Pass
	Mid	836.5	Horizontal	17.09	38.45	Pass
	High	844	Horizontal	17.72	38.45	Pass
1.4 MHz (16QAM)	Low	824.7	Horizontal	16.82	38.45	Pass
	Mid	836.5	Horizontal	16.60	38.45	Pass
	High	848.3	Horizontal	16.89	38.45	Pass
3 MHz (16QAM)	Low	825.5	Horizontal	16.98	38.45	Pass
	Mid	836.5	Horizontal	16.59	38.45	Pass
	High	847.5	Horizontal	16.67	38.45	Pass
5 MHz (16QAM)	Low	826.5	Horizontal	16.82	38.45	Pass
	Mid	836.5	Horizontal	16.61	38.45	Pass
	High	846.5	Horizontal	16.86	38.45	Pass
10 MHz (16QAM)	Low	829	Horizontal	16.98	38.45	Pass
	Mid	836.5	Horizontal	16.64	38.45	Pass
	High	844	Horizontal	17.22	38.45	Pass

5.3. Occupied Bandwidth

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 3kHz, VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz, VBW is set to 160kHz for WCDMA Band V,


RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5 (1.4MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5 (3MHz/5MHz),

RBW is set to 300 kHz, VBW is set to 1 MHz for LTE Band 5 (10MHz),

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

Test Setup

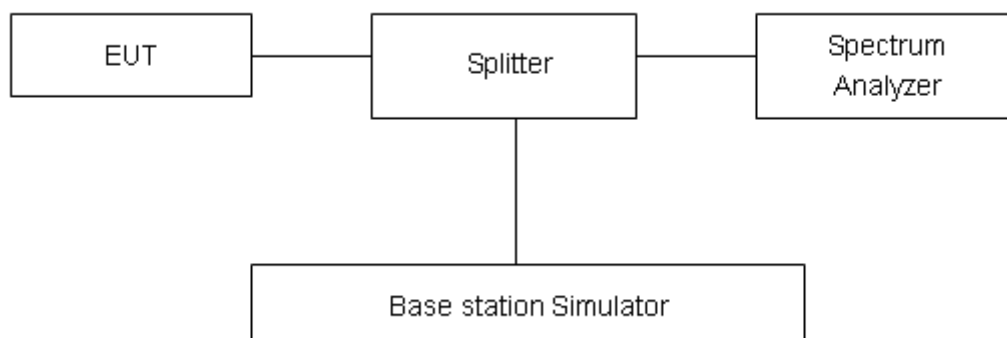

Limits

No specific occupied bandwidth requirements in part 2.1049.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 624\text{Hz}$.


Test Result

Mode	Channel	Frequency (MHz)	99% Power Bandwidth (MHz)	-26dBc Bandwidth(MHz)
GSM 850 (GSM)	128	824.2	0.24608	0.3074
	190	836.6	0.24619	0.309
	251	848.8	0.2491	0.3066
GPRS 850 (GMSK)	128	824.2	0.24741	0.3143
	190	836.6	0.24506	0.3086
	251	848.8	0.24342	0.3125
EGPRS 850 (8-PSK)	128	824.2	0.24523	0.3119
	190	836.6	0.24417	0.3106
	251	848.8	0.24303	0.3127
WCDMA Band V (RMC)	4132	826.4	4.1210	4.688
	4183	836.6	4.1210	4.698
	4233	846.6	4.1318	4.685


LTE Band 5						
RB	Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	99% Power Bandwidth(MHz)	-26dBc Bandwidth(MHz)
100%	QPSK	1.4	20525	836.5	1.1223	1.351
		3	20525	836.5	2.7451	3.082
		5	20525	836.5	4.5125	5.003
		10	20525	836.5	9.0790	10.190
	16QAM	1.4	20525	836.5	1.1296	1.334
		3	20525	836.5	2.7628	3.088
		5	20525	836.5	4.5267	5.013
		10	20525	836.5	9.0750	10.040



GSM 850 CH-Low

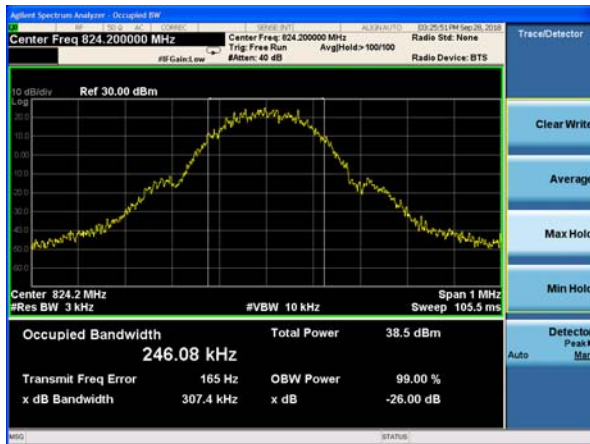

GSM 850 GPRS CH-Low

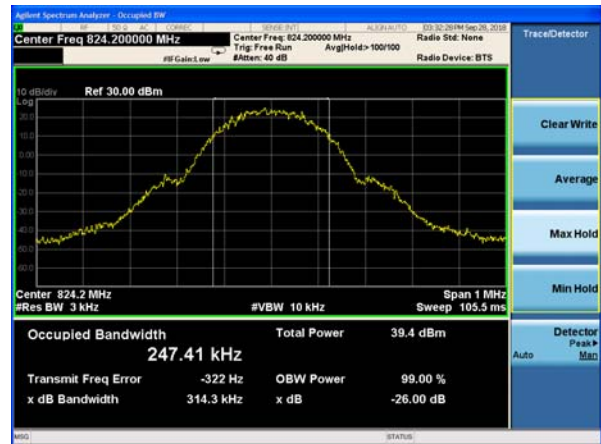

GSM 850 CH-Middle



GSM 850 GPRS CH-Middle



GSM 850 CH-High




GSM 850 GPRS CH-High







GSM 850 EGPRS CH-Low

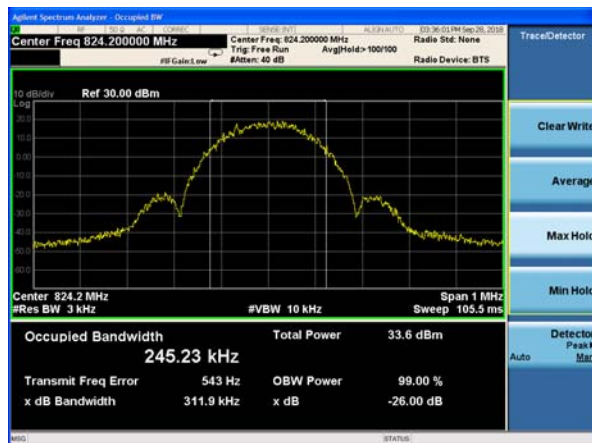


WCDMA Band V CH-Low

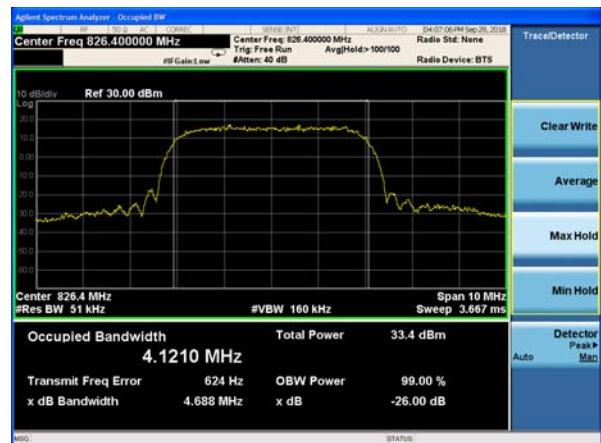


GSM 850 EGPRS CH-Middle

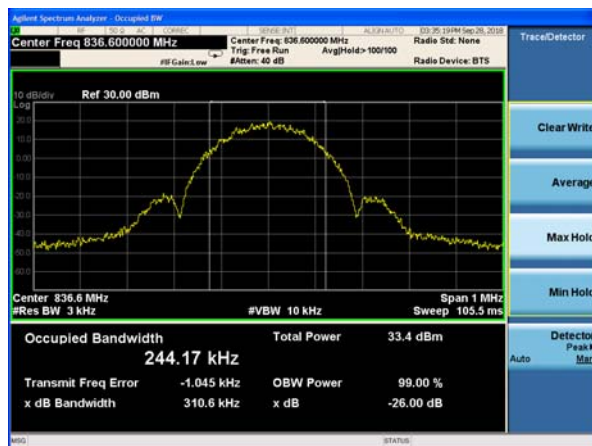


WCDMA Band V CH-Middle

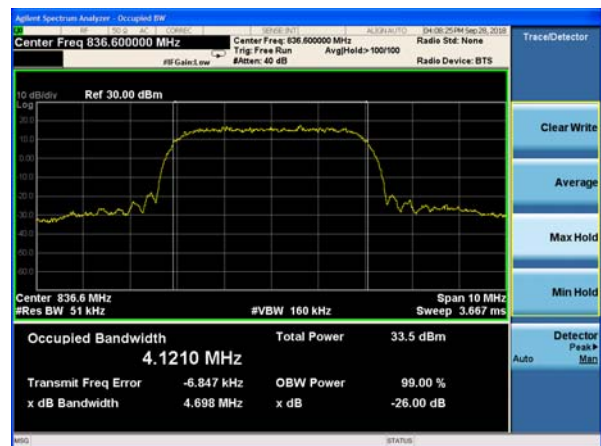


GSM 850 EGPRS CH-High

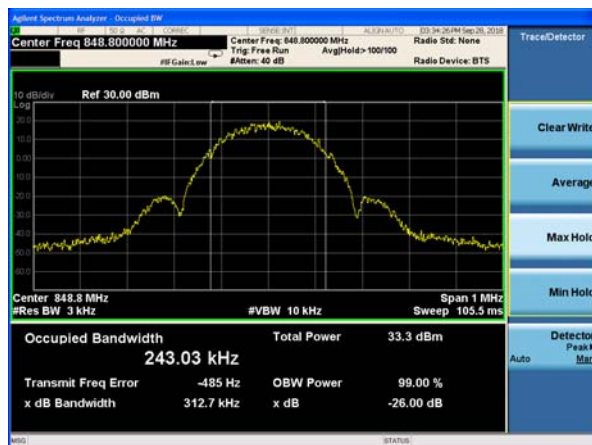


WCDMA Band V CH-High

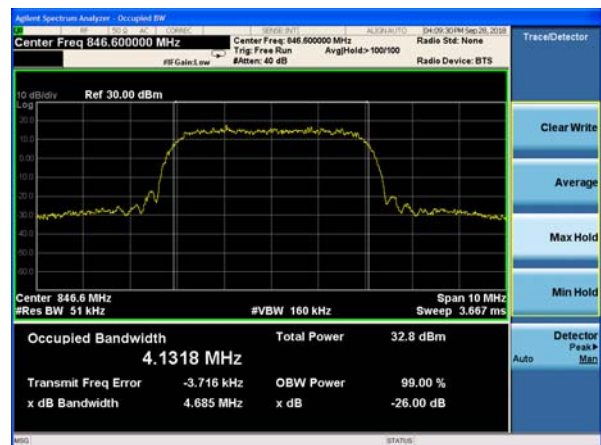


LTE Band 5 QPSK 1.4MHz CH-Middle

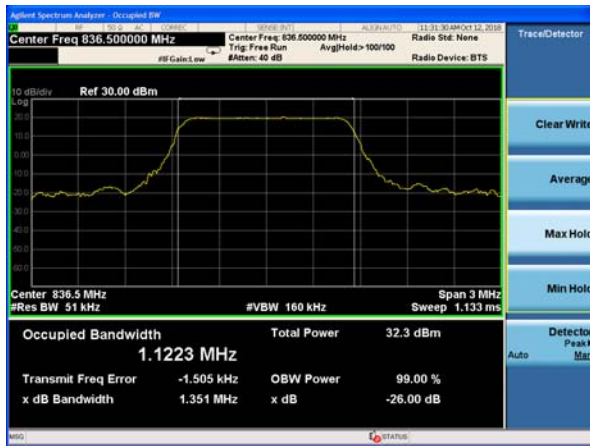

LTE Band 5 QPSK 3MHz CH-Middle

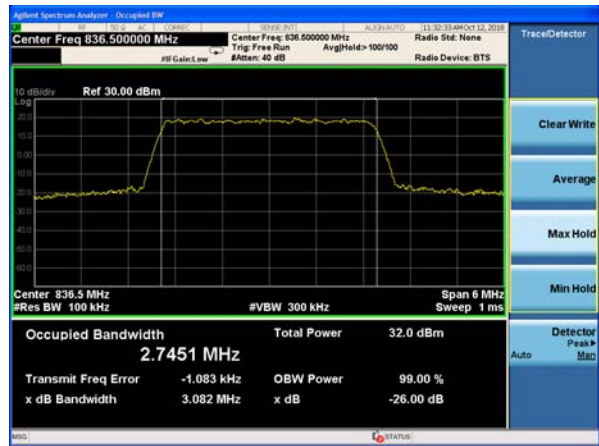


LTE Band 5 QPSK 5MHz CH-Middle

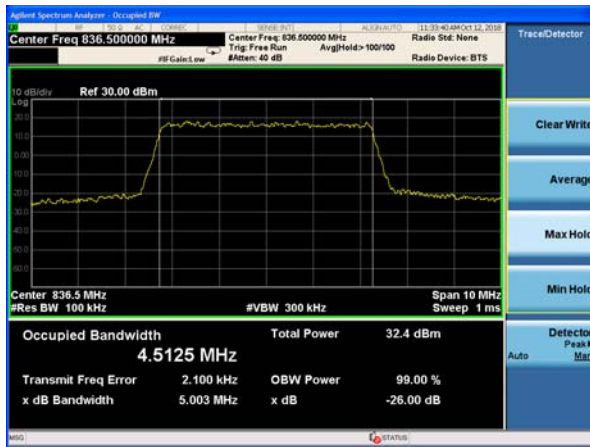


LTE Band 5 QPSK 10MHz CH-Middle




LTE Band 5 16QAM 1.4MHz CH-Middle

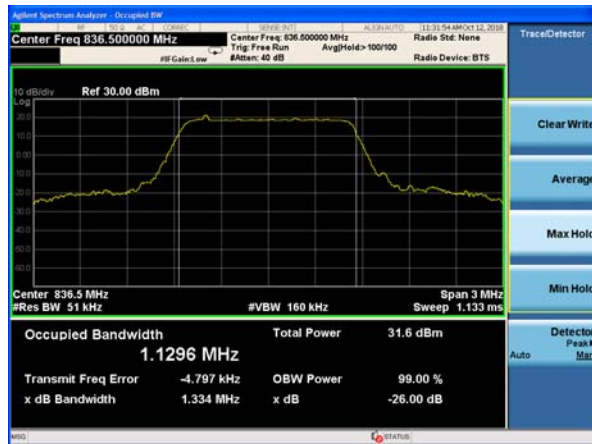

LTE Band 5 16QAM 3MHz CH-Middle

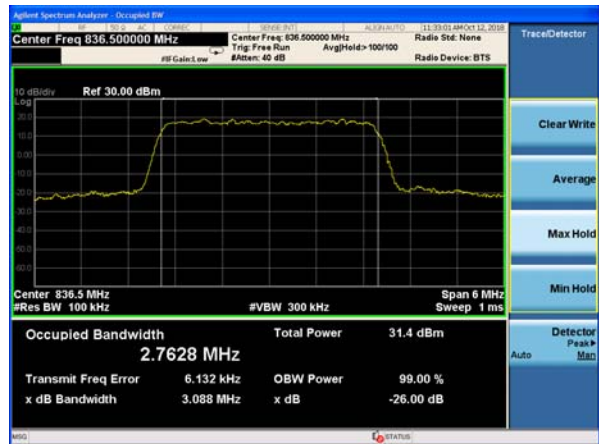

LTE Band 5 16QAM 5MHz CH-Middle

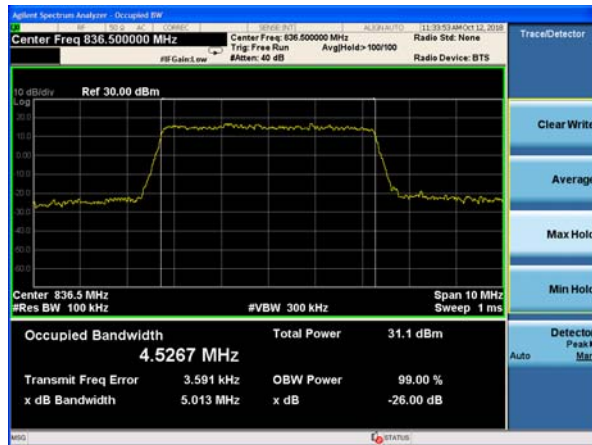

LTE Band 5 16QAM 10MHz CH-Middle



5.4. Band Edge Compliance

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The average detector is used.

RBW is set to 3kHz,VBW is set to 10kHz for GSM 850,

RBW is set to 51kHz,VBW is set to 160kHz for WCDMA Band V,

RBW is set to 15 kHz, VBW is set to 51 kHz for LTE Band 5 (1.4MHz),


RBW is set to 30 kHz, VBW is set to 100 kHz for LTE Band 5 (3MHz),

RBW is set to 51 kHz, VBW is set to 160 kHz for LTE Band 5 (5MHz),

RBW is set to 100 kHz, VBW is set to 300 kHz for LTE Band 5 (10MHz),

Spectrum analyzer plots are included on the following pages.

Test Setup

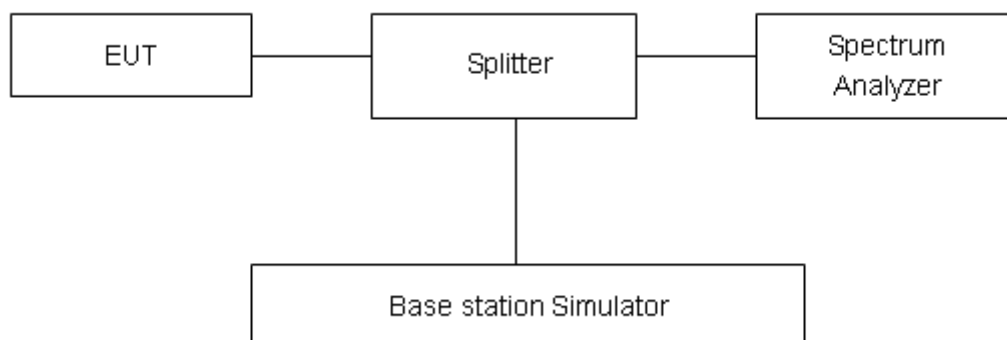

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U=0.684$ dB.



Test Result:

GSM 850 CH-Low



GSM 850 CH-High



GSM 850 GPRS CH-Low



GSM 850 GPRS CH-High



GSM 850 EGPRS CH-Low




GSM 850 EGPRS CH-High






WCDMA Band V CH-Low

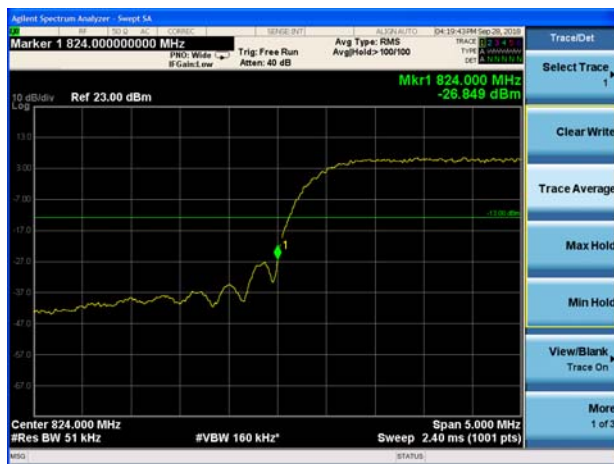


WCDMA Band V CH-High



LTE Band 5 QPSK 1.4MHz CH-Low 1RB

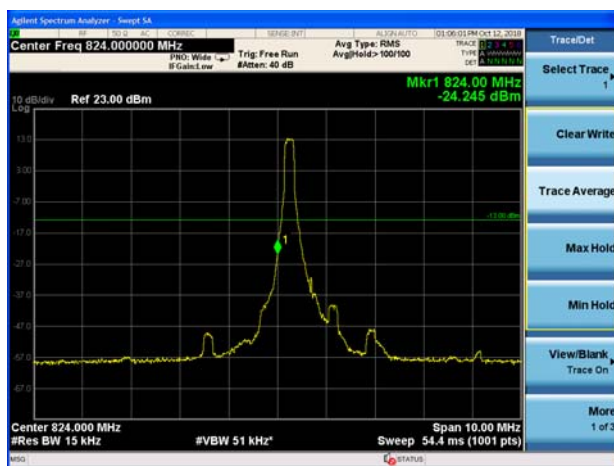


LTE Band 5 QPSK 1.4MHz CH-High 1RB

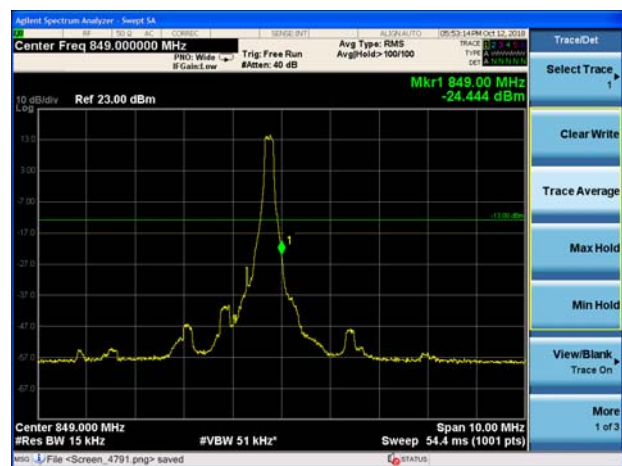


LTE Band 5 QPSK 1.4MHz CH-Low 100%RB




LTE Band 5 QPSK 1.4MHz CH-High 100%RB

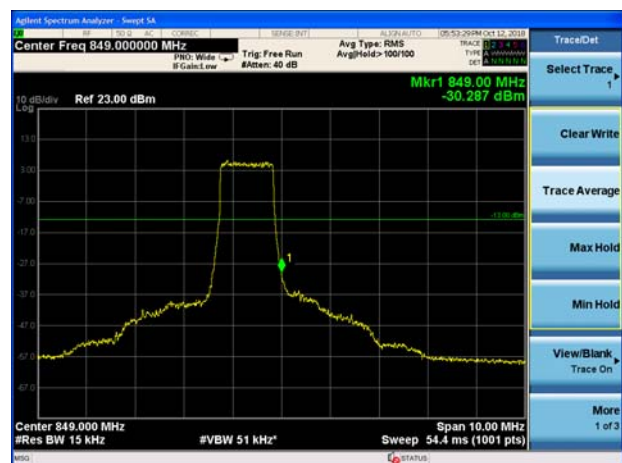


LTE Band 5 QPSK 3MHz CH-Low 1RB

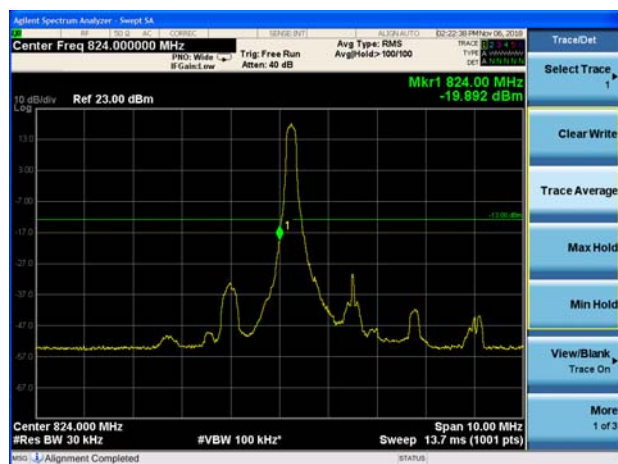

LTE Band 5 QPSK 3MHz CH-High 1RB

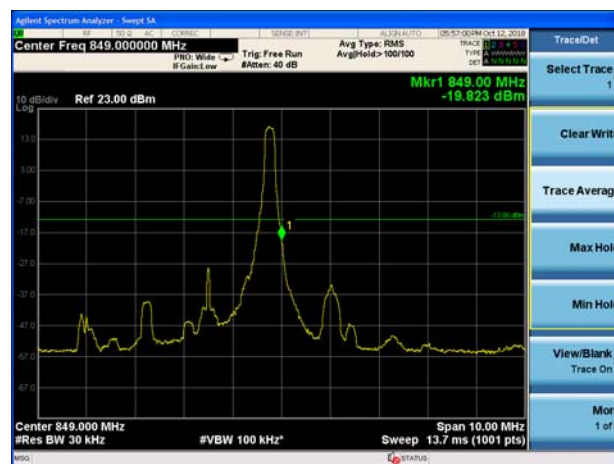


LTE Band 5 QPSK 3MHz CH-Low 100%RB

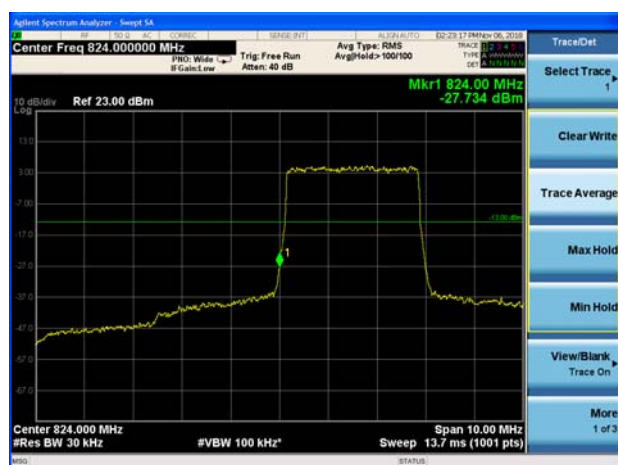


LTE Band 5 QPSK 3MHz CH-High 100%RB



LTE Band 5 QPSK 5MHz CH-Low 1RB

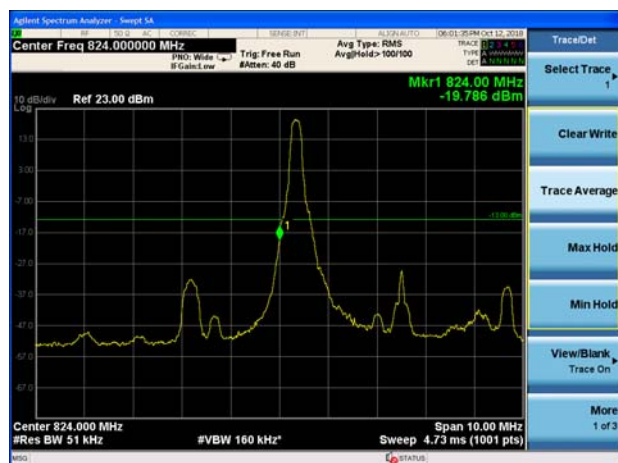

LTE Band 5 QPSK 5MHz CH-High 1RB

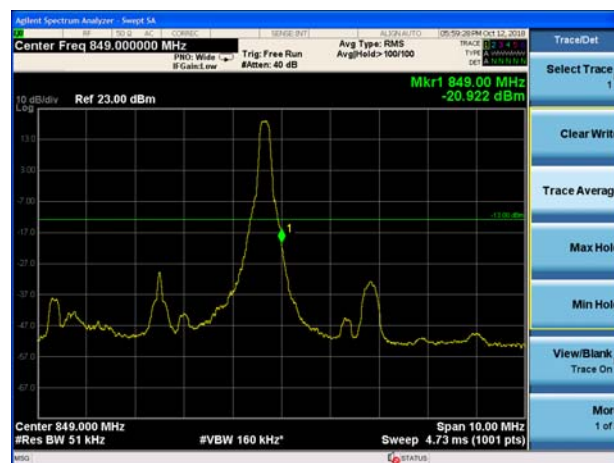




LTE Band 5 QPSK 5MHz CH-Low 100%RB




LTE Band 5 QPSK 5MHz CH-High 100%RB




LTE Band 5 QPSK 10MHz CH-Low 1RB

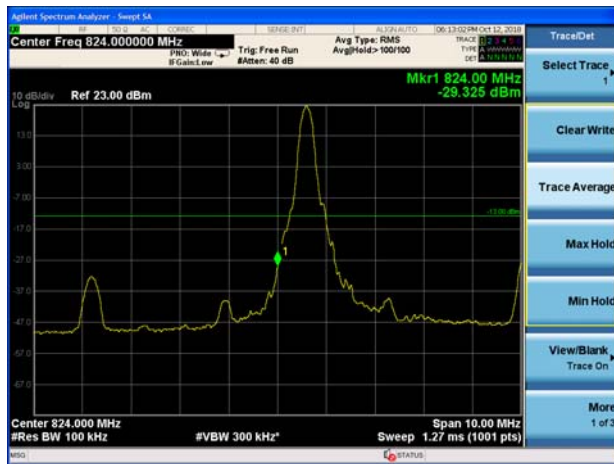

LTE Band 5 QPSK 10MHz CH-High 1RB

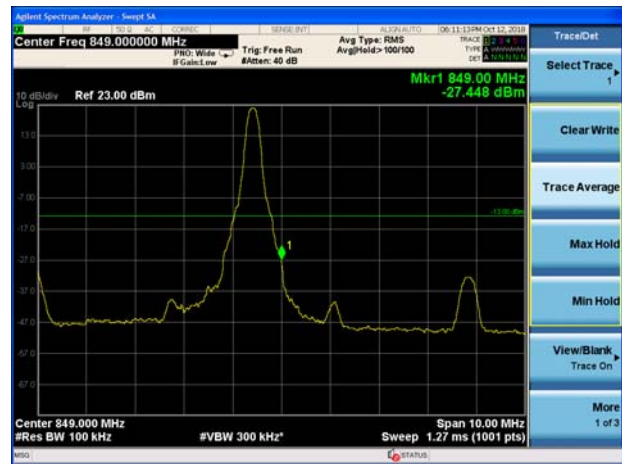


LTE Band 5 QPSK 10MHz CH-Low 100%RB

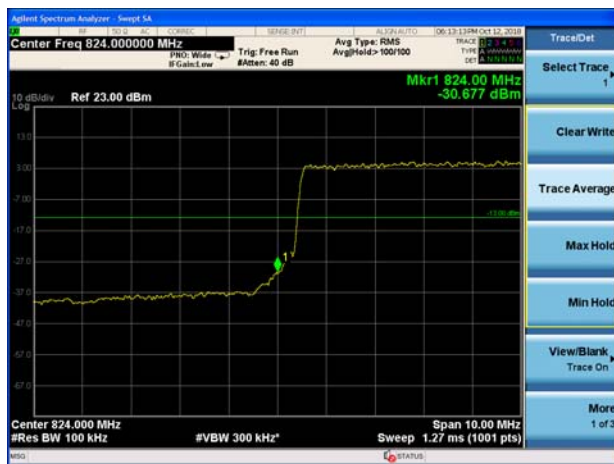


LTE Band 5 QPSK 10MHz CH-High 100%RB




LTE Band 5 16QAM 1.4MHz CH-Low 1RB

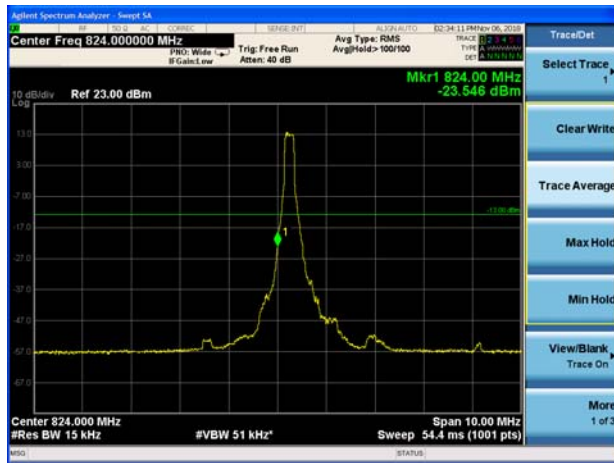


LTE Band 5 16QAM 1.4MHz CH-High 1RB

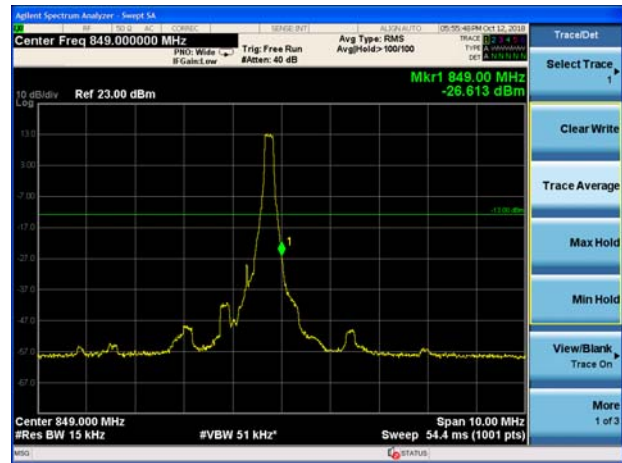


LTE Band 5 16QAM 1.4MHz CH-Low 100%RB

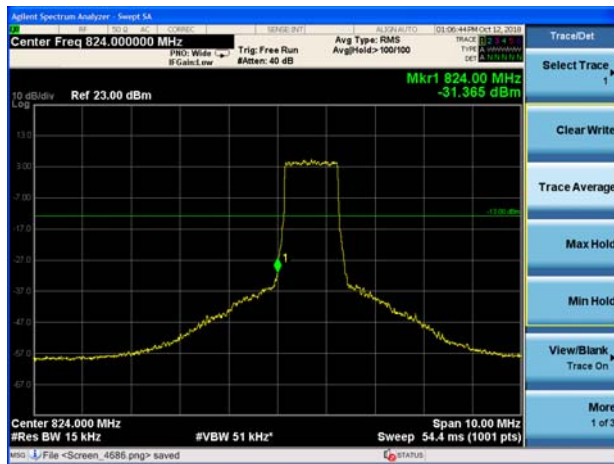

LTE Band 5 16QAM 1.4MHz CH-High 100%RB

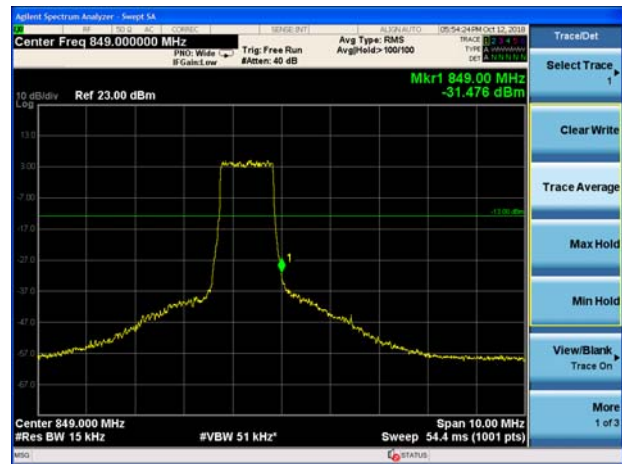

LTE Band 5 16QAM 3MHz CH-Low 1RB

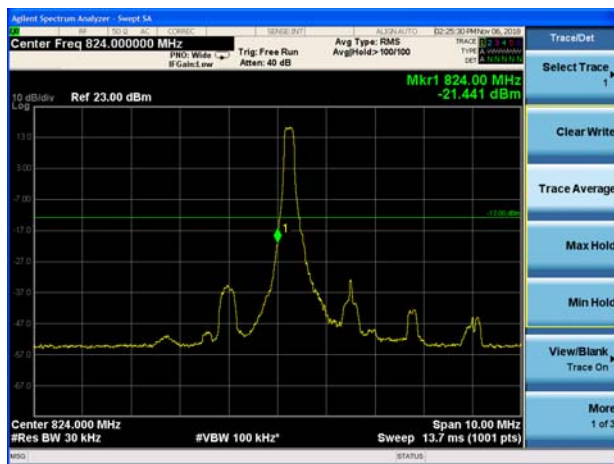

LTE Band 5 16QAM 3MHz CH-High 1RB






LTE Band 5 16QAM 3MHz CH-Low 100%RB




LTE Band 5 16QAM 3MHz CH-High 100%RB




LTE Band 5 16QAM 5MHz CH-Low 1RB

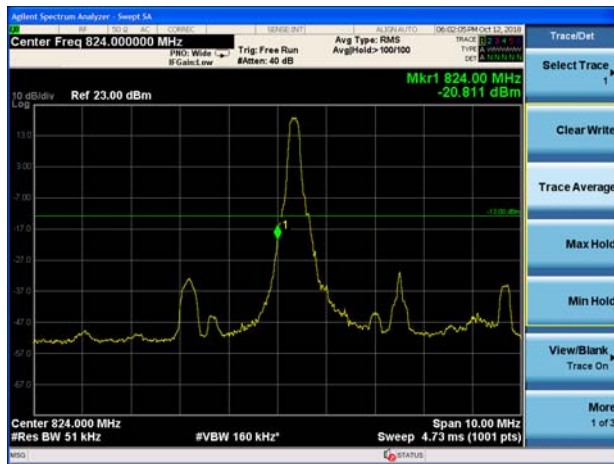

LTE Band 5 16QAM 5MHz CH-High 1RB

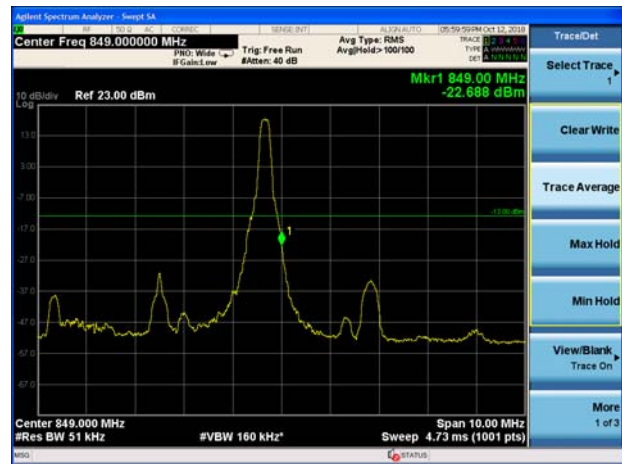

LTE Band 5 16QAM 5MHz CH-Low 100%RB

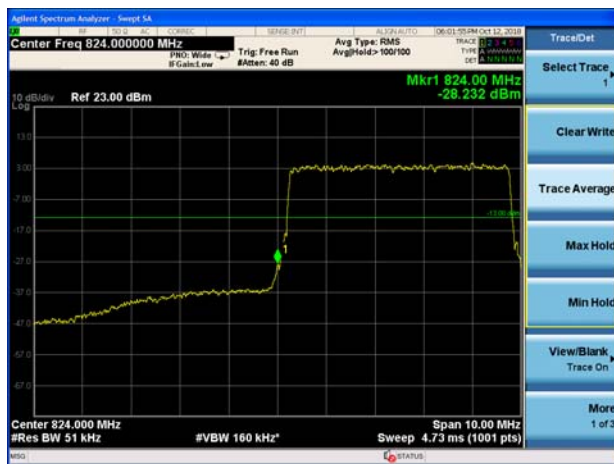


LTE Band 5 16QAM 5MHz CH-High 100%RB







LTE Band 5 16QAM 10MHz CH-Low 1RB

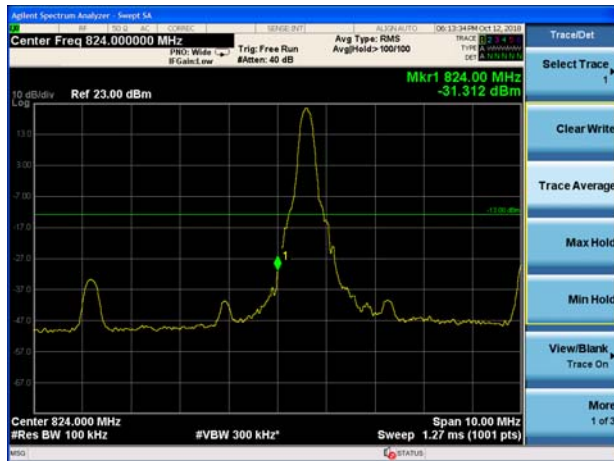

LTE Band 5 16QAM 10MHz CH-High 1RB

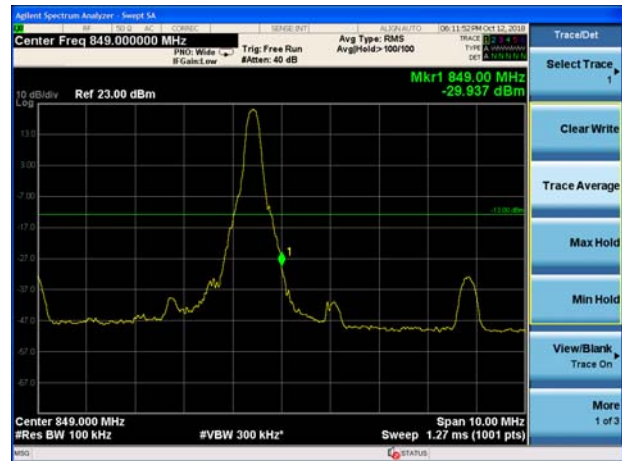

LTE Band 5 16QAM 10MHz CH-Low 100%RB

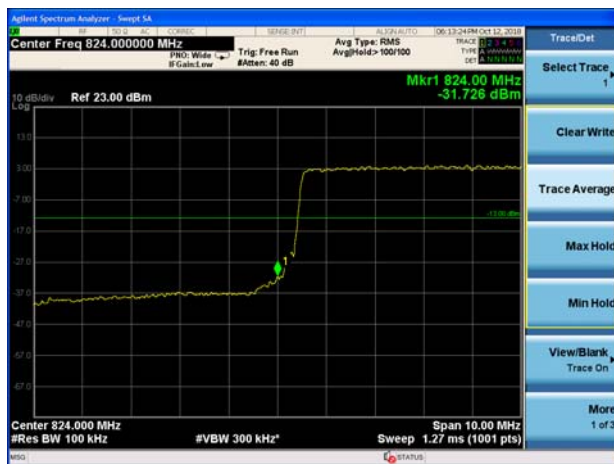

LTE Band 5 16QAM 10MHz CH-High 100%RB



5.5. Peak-to-Average Power Ratio (PAPR)

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

Measure the total peak power and record as P_{Pk} . And measure the total average power and record as P_{Avg} . Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm).$$

Test Setup

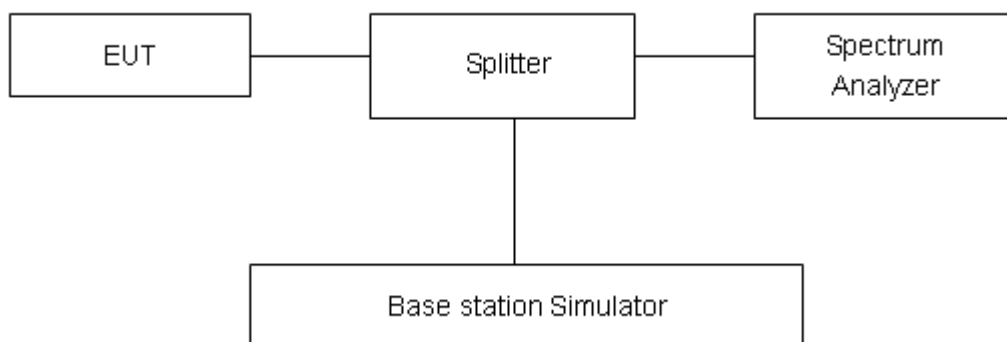

Limits

According to the Sec. 22.913(d), The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

Test Results

Mode	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
GSM 850 (GSM)	128	824.2	34.22	33.21	1.01	≤13	PASS
	190	836.6	34.29	33.24	1.05	≤13	PASS
	251	848.8	34.25	33.19	1.06	≤13	PASS
GPRS 850 (GMSK)	128	824.2	31.30	30.26	1.04	≤13	PASS
	190	836.6	31.48	30.41	1.07	≤13	PASS
	251	848.8	31.30	30.27	1.03	≤13	PASS
EGPRS 850 (8-PSK)	128	824.2	25.10	24.06	1.04	≤13	PASS
	190	836.6	25.88	24.88	1.00	≤13	PASS
	251	848.8	25.23	24.12	1.11	≤13	PASS
WCDMA Band V (RMC)	4132	826.4	26.32	23.58	2.74	≤13	PASS
	4183	836.6	26.41	23.38	3.03	≤13	PASS
	4233	846.6	26.14	23.50	2.64	≤13	PASS

LTE Band 5								
Modulation	Bandwidth (MHz)	Channel	Frequency (MHz)	Peak (dBm)	Avg (dBm)	PAPR (dB)	Limit (dB)	Conclusion
QPSK	1.4	20407	824.7	27.54	22.44	5.10	≤13	PASS
		20525	836.5	27.17	22.48	4.69	≤13	PASS
		20643	848.3	27.43	22.60	4.83	≤13	PASS
	3	20415	825.5	27.75	22.53	5.22	≤13	PASS
		20525	836.5	27.36	22.53	4.83	≤13	PASS
		20635	847.5	27.68	22.65	5.03	≤13	PASS
	5	20425	826.5	27.70	22.51	5.19	≤13	PASS
		20525	836.5	27.32	22.49	4.83	≤13	PASS
		20625	846.5	27.65	22.60	5.05	≤13	PASS
	10	20450	829	27.46	22.48	4.98	≤13	PASS
		20525	836.5	27.37	22.44	4.93	≤13	PASS
		20600	844	27.59	22.56	5.03	≤13	PASS
16QAM	1.4	20407	824.7	27.51	21.52	5.99	≤13	PASS
		20525	836.5	27.05	21.53	5.52	≤13	PASS
		20643	848.3	27.25	21.60	5.65	≤13	PASS
	3	20415	825.5	27.63	21.56	6.07	≤13	PASS
		20525	836.5	27.24	21.58	5.66	≤13	PASS
		20635	847.5	27.45	21.62	5.83	≤13	PASS
	5	20425	826.5	27.54	21.53	6.01	≤13	PASS
		20525	836.5	27.15	21.53	5.62	≤13	PASS
		20625	846.5	27.47	21.58	5.89	≤13	PASS
	10	20450	829	27.20	21.51	5.69	≤13	PASS
		20525	836.5	27.20	21.49	5.71	≤13	PASS
		20600	844	26.96	21.55	5.41	≤13	PASS

5.6. Frequency Stability

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -30°C to +55°C in 10°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -30°C to +55°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.6 V and 4.4 V, with a nominal voltage of 3.85V.

Test setup

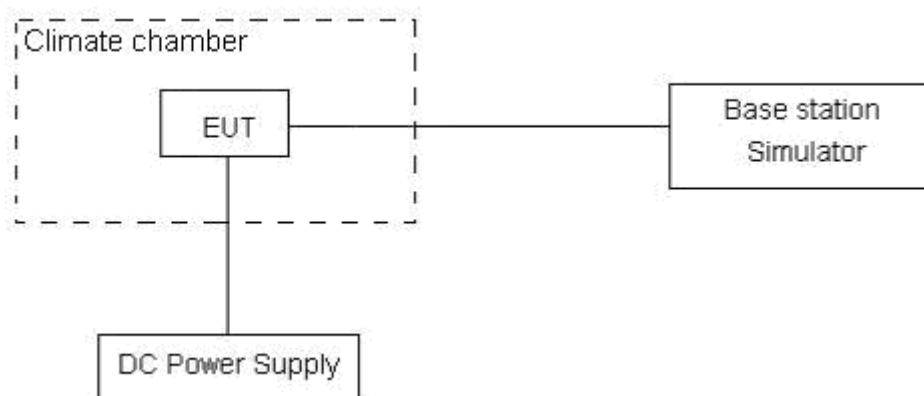



Limits

According to the Sec. 22.355, the frequency stability of the carrier shall be accurate to within 2.5 ppm of the received frequency for mobile stations.

Limits	≤ 2.5 ppm
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 3$, $U = 0.01$ ppm.

Test Result

GSM 850					
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.0689	848.9736	4.27	0.00510
Extreme (55°C)		824.0687	848.9734	2.74	0.00328
Extreme (50°C)		824.0675	848.9722	1.88	0.00225
Extreme (40°C)		824.0688	848.9735	4.95	0.00592
Extreme (30°C)		824.0677	848.9724	8.10	0.00968
Extreme (20°C)		824.0676	848.9723	11.32	0.01353
Extreme (10C)		824.0686	848.9733	6.58	0.00787
Extreme (0°C)		824.0677	848.9724	3.27	0.00391
Extreme (-10°C)		824.0685	848.9732	7.82	0.00935
Extreme (-20°C)		824.0678	848.9725	4.33	0.00518
Extreme (-30°C)		824.0684	848.9731	6.19	0.00740
25C	LV	824.0681	848.9728	7.26	0.00868
	HV	824.0690	848.9737	8.97	0.01072
GPRS 850					
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.0654	848.9658	14.23	0.01701
Extreme (55°C)		824.0652	848.9656	6.84	0.00818
Extreme (50°C)		824.0640	848.9644	5.49	0.00656
Extreme (40°C)		824.0653	848.9657	18.46	0.02207
Extreme (30°C)		824.0642	848.9646	12.31	0.01471
Extreme (20°C)		824.0641	848.9645	4.77	0.00570
Extreme (10C)		824.0651	848.9655	9.58	0.01145



Extreme (0°C)		824.0642	848.9646	6.23	0.00745
Extreme (-10°C)		824.0650	848.9654	7.14	0.00853
Extreme (-20°C)		824.0643	848.9647	2.44	0.00292
Extreme (-30°C)		824.0649	848.9653	4.61	0.00551
25C	LV	824.0646	848.9650	5.14	0.00614
	HV	824.0655	848.9659	6.98	0.00834
EGPRS 850					
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.0782	848.9396	14.39	0.01720
Extreme (55°C)		824.0780	848.9394	5.84	0.00698
Extreme (50°C)		824.0768	848.9382	2.09	0.00250
Extreme (40°C)		824.0781	848.9395	0.23	0.00027
Extreme (30°C)		824.0770	848.9384	-1.45	-0.00173
Extreme (20°C)		824.0769	848.9383	3.75	0.00448
Extreme (10C)		824.0779	848.9393	2.42	0.00289
Extreme (0°C)		824.0770	848.9384	7.14	0.00853
Extreme (-10°C)		824.0778	848.9392	2.04	0.00244
Extreme (-20°C)		824.0771	848.9385	4.33	0.00518
Extreme (-30°C)		824.0777	848.9391	8.79	0.01051
25C	LV	824.0774	848.9388	3.59	0.00429
	HV	824.0783	848.9397	4.61	0.00551

WCDMA Band 5					
Condition		824	849	Delta (Hz)	Frequency Stability (ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.0321	848.9679	17.21	0.02057
Extreme (55°C)		824.0289	848.9690	19.36	0.02314
Extreme (50°C)		824.0328	848.9651	18.54	0.02216
Extreme (40°C)		824.0309	848.9672	19.66	0.02350
Extreme (30°C)		824.0323	848.9656	17.03	0.02036
Extreme (20°C)		824.0317	848.9662	18.22	0.02178
Extreme (10C)		824.0304	848.9675	18.43	0.02203
Extreme (0°C)		824.0297	848.9682	19.67	0.02351
Extreme (-10°C)		824.0318	848.9661	16.17	0.01933
Extreme (-20°C)		824.0306	848.9673	17.49	0.02091
Extreme (-30°C)		824.0319	848.9662	19.87	0.02375



25C	LV	824.0316	848.9663	18.25	0.02181
	HV	824.0313	848.9669	17.66	0.02111

LTE Band 5					
(QPSK, 10MHz BANDWIDTH)					
Condition		824	849	Delta (Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.2278	848.7882	1.36	0.00163
Extreme (55°C)		824.2267	848.7869	1.58	0.00189
Extreme (50°C)		824.2306	848.7908	-0.79	-0.00094
Extreme (40°C)		824.2287	848.7889	3.23	0.00386
Extreme (30°C)		824.2301	848.7903	-1.77	-0.00212
Extreme (20°C)		824.2295	848.7897	-1.99	-0.00238
Extreme (10°C)		824.2282	848.7884	1.22	0.00146
Extreme (0°C)		824.2275	848.7877	3.36	0.00402
Extreme (-10°C)		824.2296	848.7898	2.37	0.00283
Extreme (-20°C)		824.2284	848.7886	-0.33	-0.00039
Extreme (-30°C)		824.2297	848.7899	-1.09	-0.00130
25°C	LV	824.2294	848.7896	3.32	0.00397
	HV	824.2288	848.7896	2.37	0.00283
(16QAM, 10MHz BANDWIDTH)					
Condition		824	849	Delta (Hz)	Frequency Stability(ppm)
Temperature	Voltage	F low@-13dBm(MHz)	F high@-13dBm(MHz)		
Normal (25°C)	Normal	824.3662	848.7284	1.24	0.00148
Extreme (55°C)		824.3673	848.7295	0.96	0.00115
Extreme (50°C)		824.3634	848.7256	3.32	0.00397
Extreme (40°C)		824.3653	848.7275	1.68	0.00201
Extreme (30°C)		824.3639	848.7261	-0.92	-0.00110
Extreme (20°C)		824.3645	848.7267	-0.37	-0.00044
Extreme (10°C)		824.3658	848.7283	2.21	0.00264
Extreme (0°C)		824.3665	848.7287	0.98	0.00117
Extreme (-10°C)		824.3644	848.7266	3.16	0.00378
Extreme (-20°C)		824.3656	848.7278	3.99	0.00477
Extreme (-30°C)		824.3643	848.7265	-1.03	-0.00123
25°C	LV	824.3646	848.7268	-0.78	-0.00093
	HV	824.3652	848.7274	2.37	0.00283

5.7. Spurious Emissions at Antenna Terminals

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier.

The peak detector is used. RBW are set to 100 kHz and VBW are set to 300 kHz for below 1G, RBW are set to 1MHz and VBW are set to 3MHz for above 1G, Sweep is set to ATUO.

The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

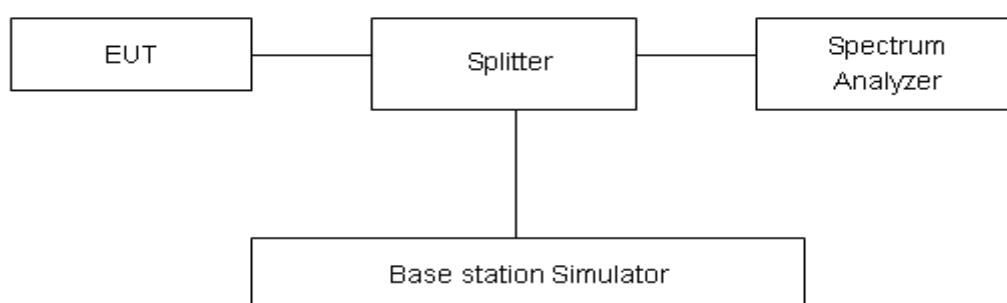

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-1GHz	0.684 dB
1GHz-18GHz	1.407 dB




Test Result


Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions more than 20 dB below the limit are not reported.

The signal beyond the limit is carrier.


GSM 850 CH-Low 30MHz ~ 1GHz

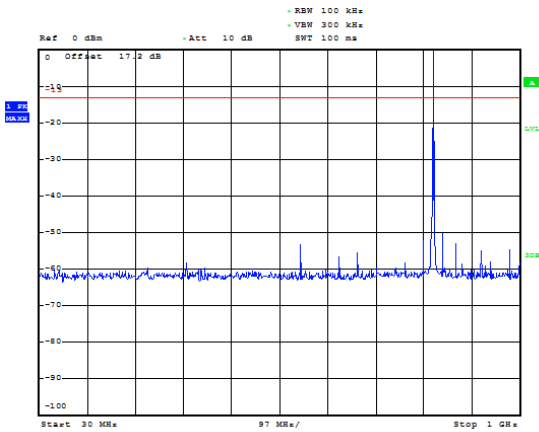


GSM 850 CH-Low 1GHz ~ 9GHz

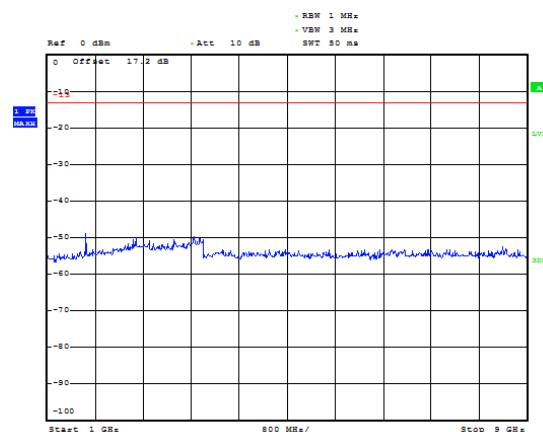


GSM 850 CH-Middle 30MHz ~ 1GHz

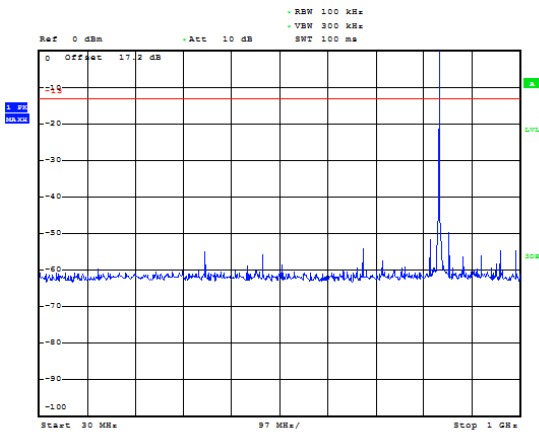


GSM 850 CH-Middle 1GHz ~ 9GHz

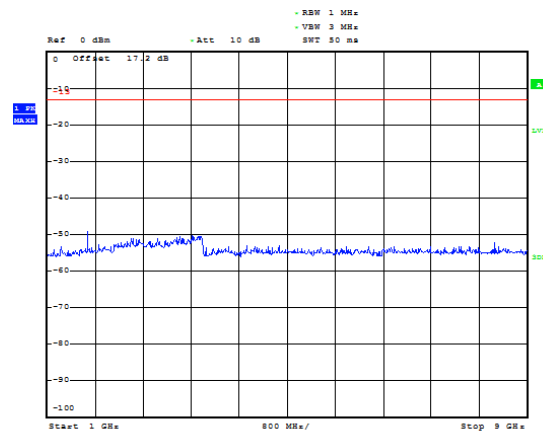

GSM 850 CH-High 30MHz ~ 1GHz

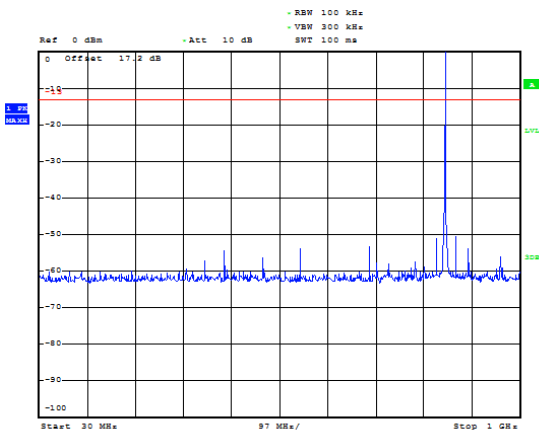


GSM 850 CH-High 1GHz ~ 9GHz

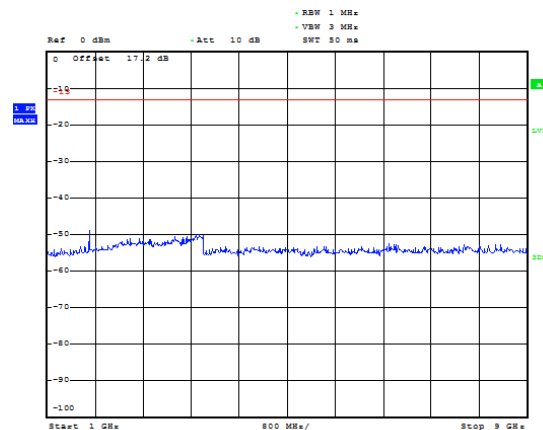





WCDMA Band V CH-Low 30MHz ~ 1GHz

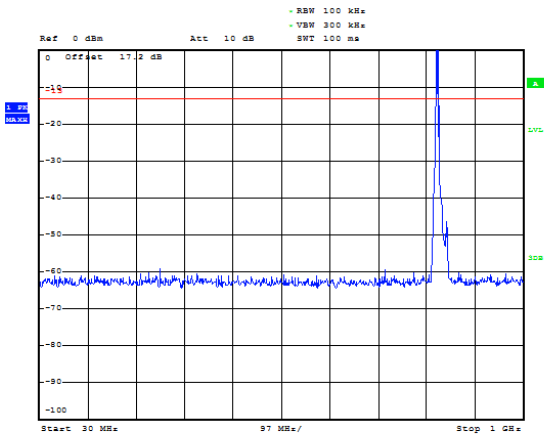


WCDMA Band V CH-Low 1GHz ~ 9GHz

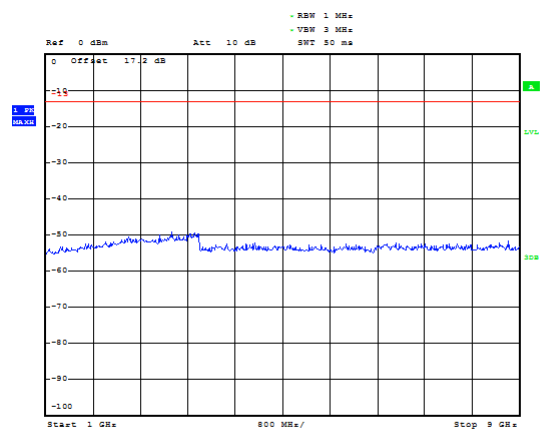


WCDMA Band V CH-Middle 30MHz ~ 1GHz

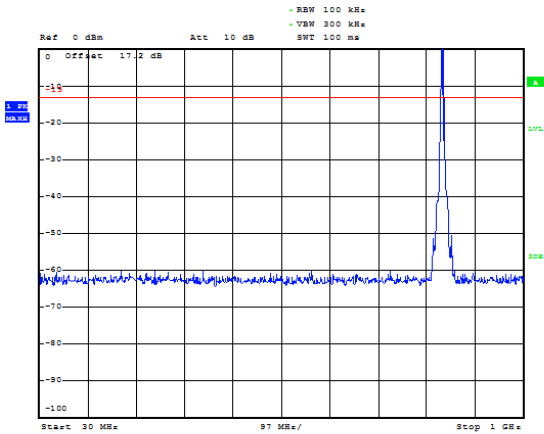


WCDMA Band V CH-Middle 1GHz ~ 9GHz

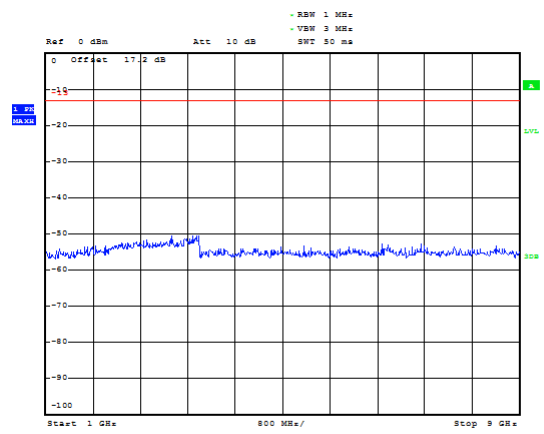

WCDMA Band V CH-High 30MHz ~ 1GHz

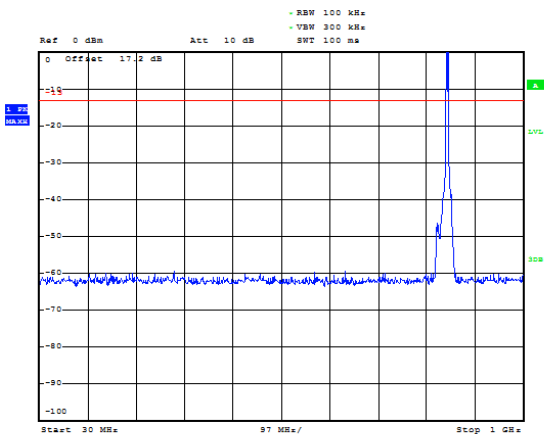


WCDMA Band V CH-High 1GHz ~ 9GHz

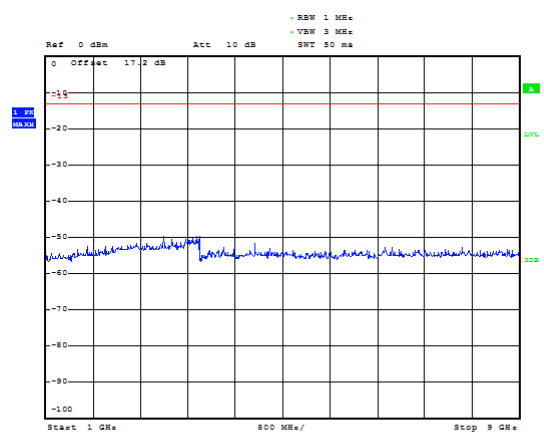





LTE Band 5 1.4MHz CH-Low 30MHz~1GHz

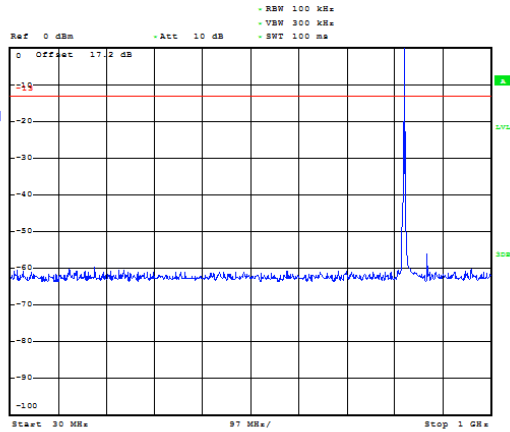


LTE Band 5 1.4MHz CH-Low 1GHz~9GHz

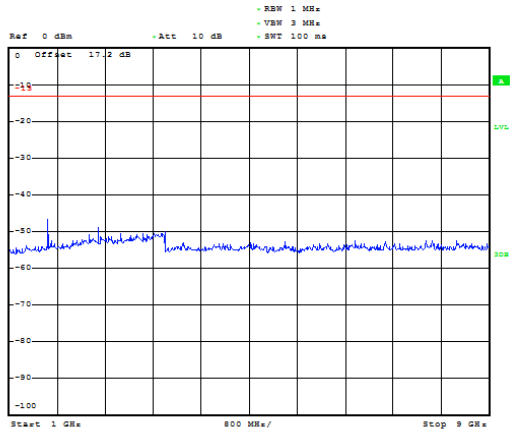


LTE Band 5 1.4MHz CH-Middle 30MHz~1GHz

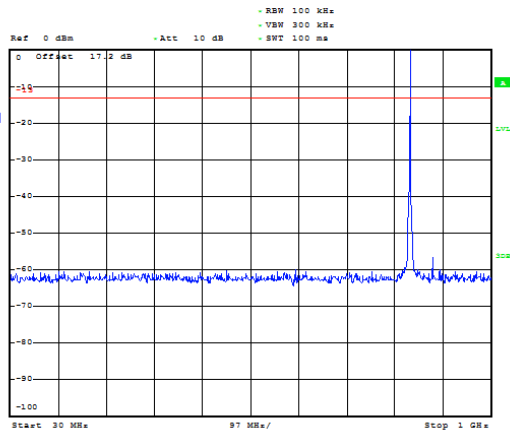


LTE Band 5 1.4MHz CH-Middle 1GHz~9GHz

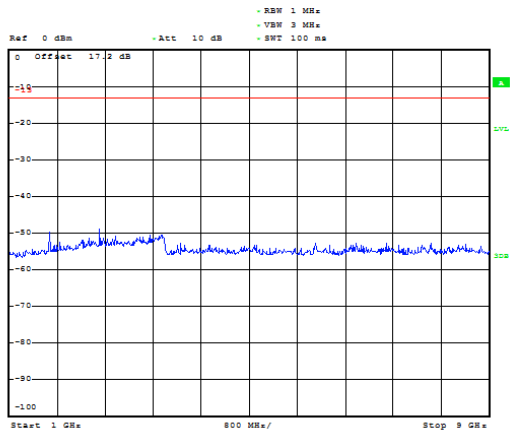


LTE Band 5 1.4MHz CH-High 30MHz~1GHz

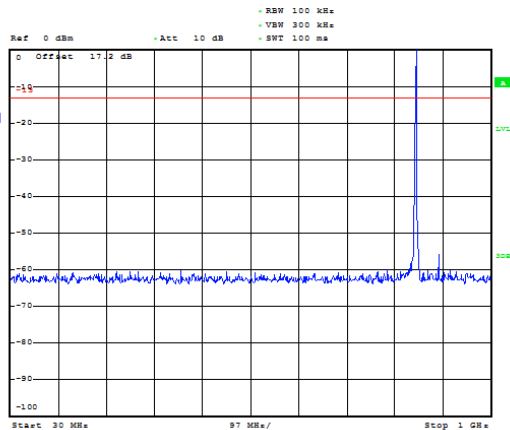


LTE Band 5 1.4MHz CH-High 1GHz~9GHz

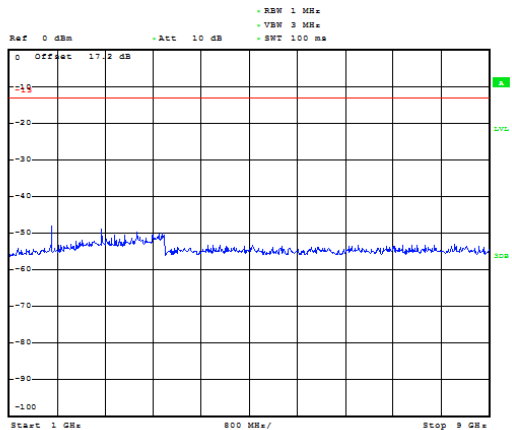


LTE Band 5 3MHz CH-Low 30MHz~1GHz

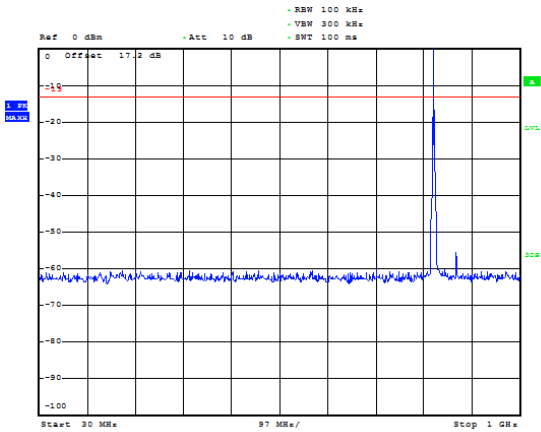


LTE Band 5 3MHz CH-Low 1GHz~9GHz

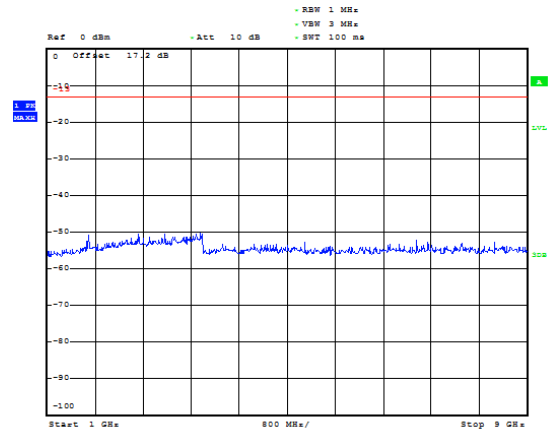


LTE Band 5 3MHz CH-Middle 30MHz~1GHz

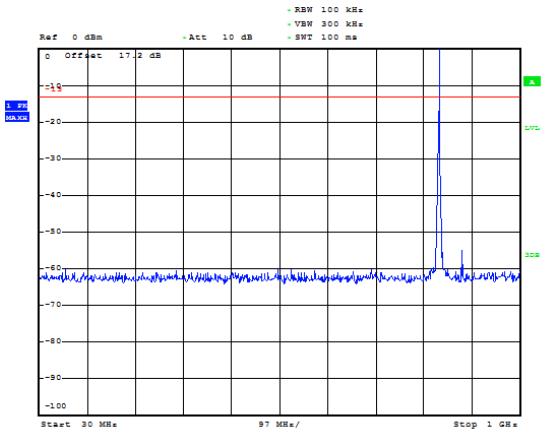


LTE Band 5 3MHz CH-Middle 1GHz~9GHz

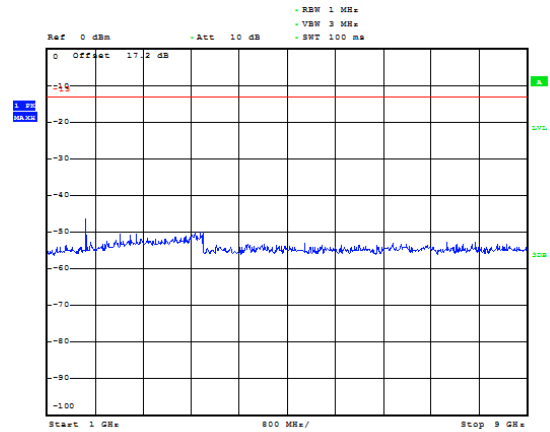

LTE Band 5 3MHz CH-High 30MHz~1GHz

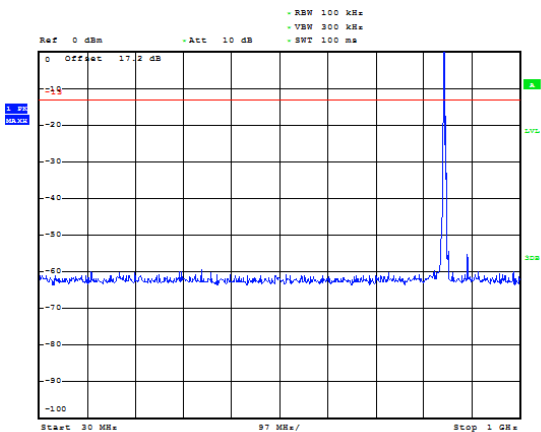


LTE Band 5 3MHz CH-High 1GHz~9GHz

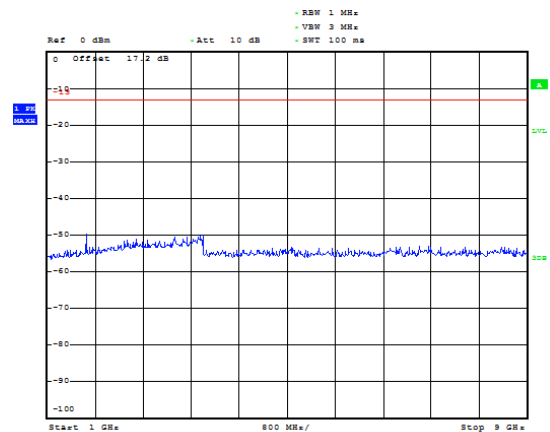





LTE Band 5 5MHz CH-Low 30MHz~1GHz

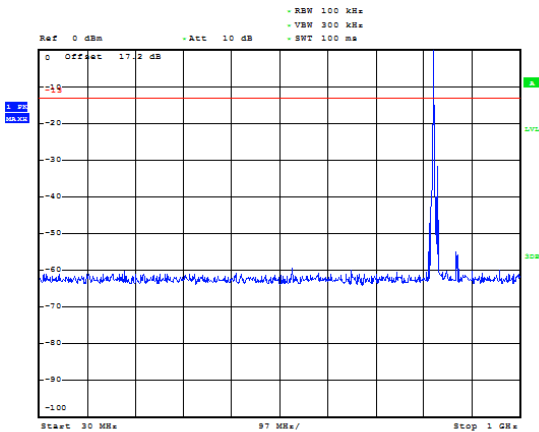


LTE Band 5 5MHz CH-Low 1GHz~9GHz

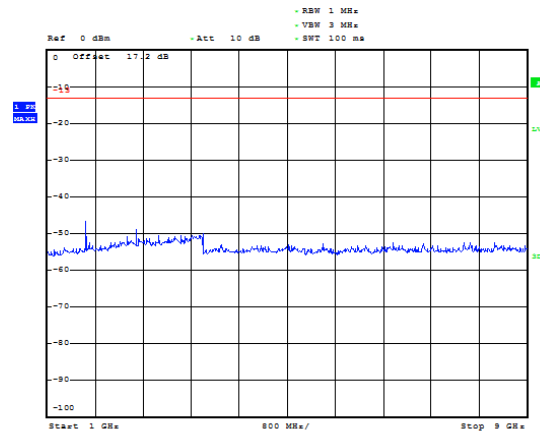


LTE Band 5 5MHz CH-Middle 30MHz~1GHz

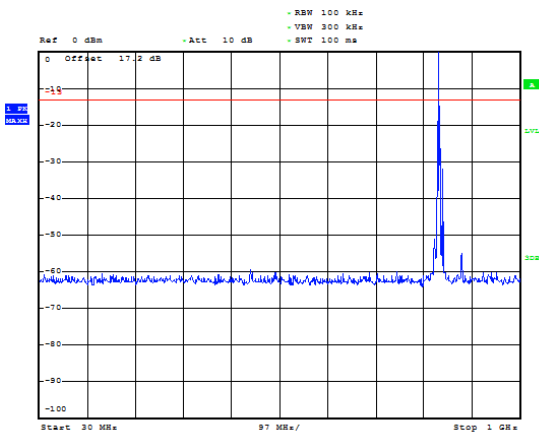


LTE Band 5 5MHz CH-Middle 1GHz~9GHz

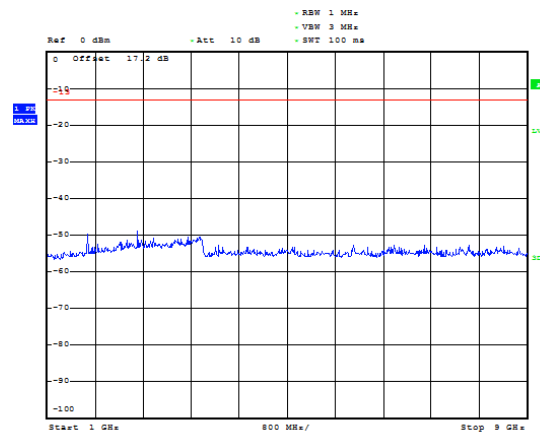

LTE Band 5 5MHz CH-High 30MHz~1GHz

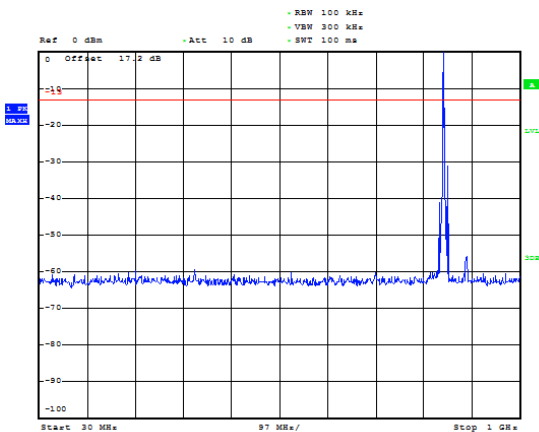


LTE Band 5 5MHz CH-High 1GHz~9GHz

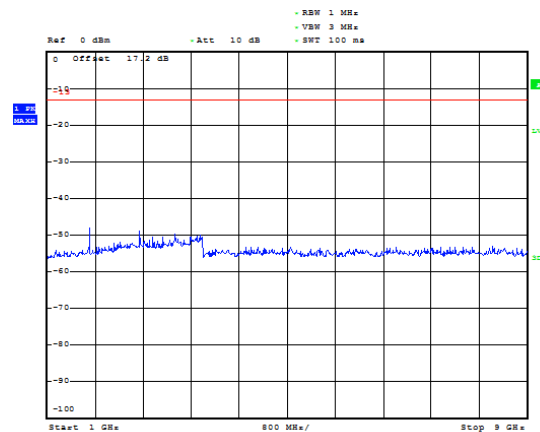





LTE Band 5 10MHz CH-Low 30MHz~1GHz

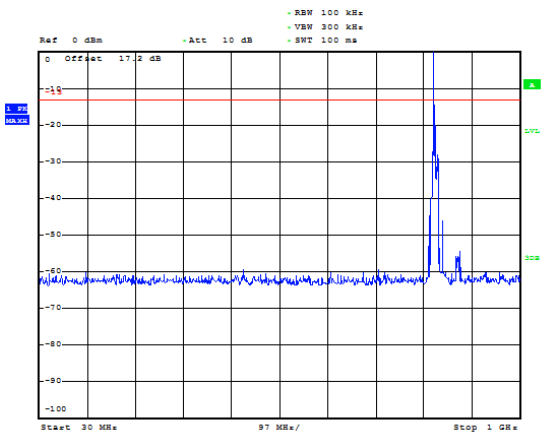


LTE Band 5 10MHz CH-Low 1GHz~9GHz

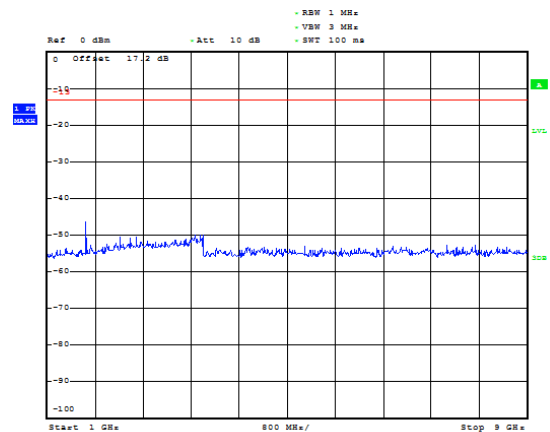


LTE Band 5 10MHz CH-Middle 30MHz~1GHz

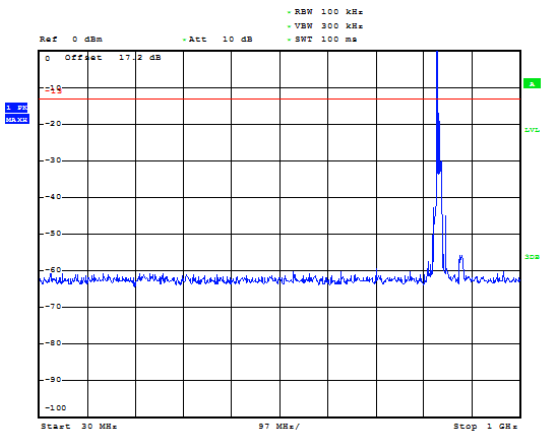


LTE Band 5 10MHz CH-Middle 1GHz~9GHz

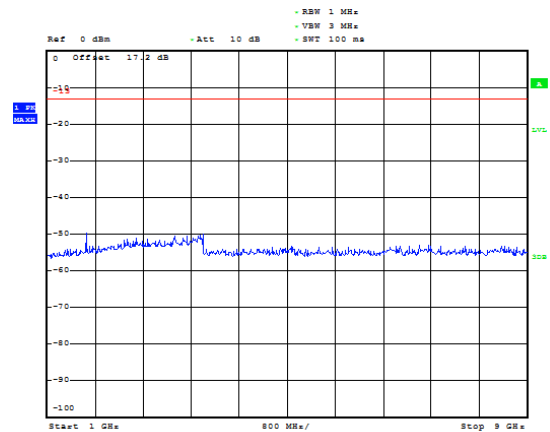

LTE Band 5 10MHz CH-High 30MHz~1GHz

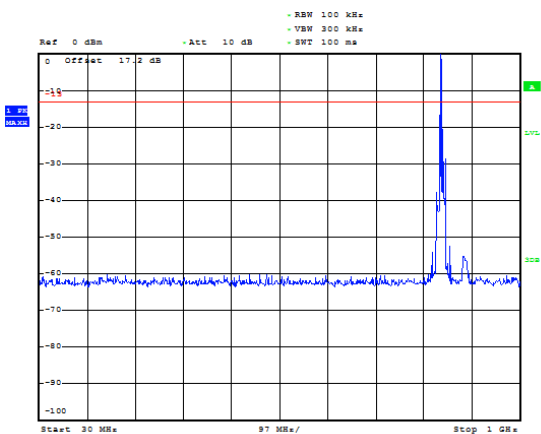

LTE Band 5 10MHz CH-High 1GHz~9GHz

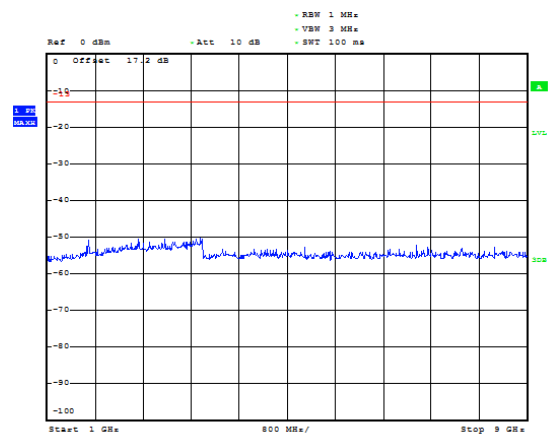

5.8. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAG) should be recorded after test.
7. The measurement results are obtained as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{PAG} - \text{Pcl} + \text{Ga}$$


The measurement results are amend as described below:
$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi)

and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~ 1GHz

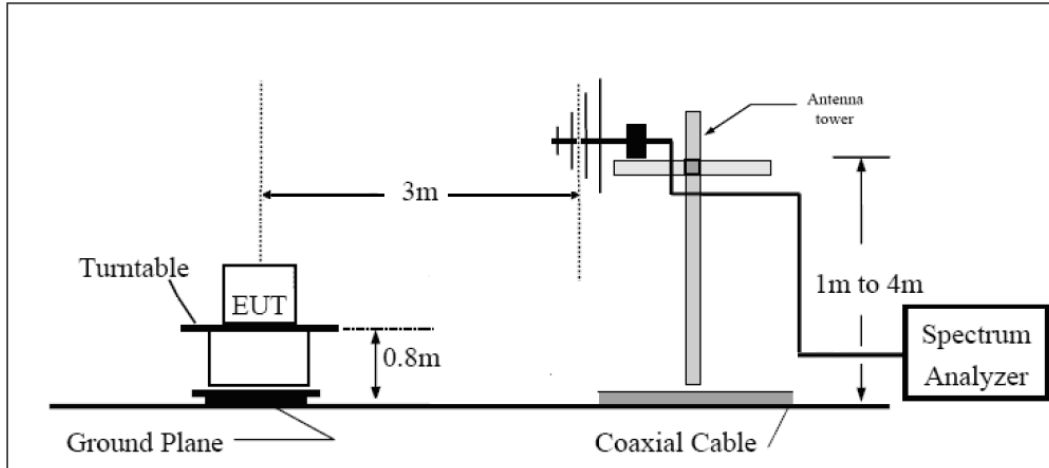

Above 1GHz

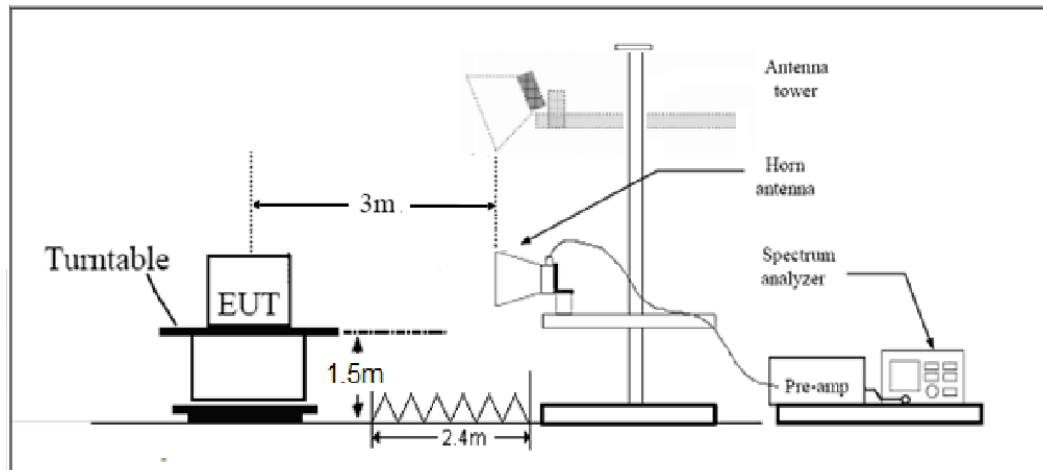

Note: Area side: 2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.1	-50.79	2.00	10.15	Horizontal	-44.79	-13.00	31.79	45
3	2509.5	-50.60	2.51	11.35	Horizontal	-43.91	-13.00	30.91	45
4	3296.8	-58.46	4.20	10.85	Horizontal	-53.96	-13.00	40.96	45
5	4121.0	-53.70	5.20	11.35	Horizontal	-49.70	-13.00	36.70	225
6	4945.2	-56.81	5.50	11.95	Horizontal	-52.51	-13.00	39.51	90
7	5769.4	-56.90	5.70	13.55	Horizontal	-51.20	-13.00	38.20	135
8	6593.6	-53.58	6.30	13.75	Horizontal	-48.28	-13.00	35.28	270
9	7417.8	-52.52	6.80	13.85	Horizontal	-47.62	-13.00	34.62	0
10	8242.0	-50.73	6.90	14.25	Horizontal	-45.53	-13.00	32.53	45
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.6	-42.23	2.00	10.75	Horizontal	-35.63	-13.00	22.63	90
3	2510.1	-48.24	2.51	11.05	Horizontal	-41.85	-13.00	28.85	45
4	3346.4	-59.02	4.20	11.15	Horizontal	-54.22	-13.00	41.22	45
5	4183.3	-52.45	5.20	11.15	Horizontal	-48.65	-13.00	35.65	0
6	5019.6	-57.70	5.50	11.95	Horizontal	-53.40	-13.00	40.40	45
7	5856.2	-56.41	5.70	13.55	Horizontal	-50.71	-13.00	37.71	225
8	6692.8	-52.63	6.30	13.75	Horizontal	-47.33	-13.00	34.33	180
9	7529.4	-51.81	6.80	13.85	Horizontal	-46.91	-13.00	33.91	90
10	8366.0	-51.05	6.90	14.25	Horizontal	-45.85	-13.00	32.85	180
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2.The worst emission was found in the antenna is Horizontal position.									



GSM 850 CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1697.1	-42.25	2.00	10.15	Horizontal	-36.25	-13.00	23.25	135
3	2546.1	-43.85	2.51	11.05	Horizontal	-37.46	-13.00	24.46	135
4	3395.2	-58.33	4.20	11.15	Horizontal	-53.53	-13.00	40.53	225
5	4244.0	-50.22	5.20	11.15	Horizontal	-46.42	-13.00	33.42	0
6	5092.8	-55.81	5.50	11.95	Horizontal	-51.51	-13.00	38.51	180
7	5941.6	-55.83	5.70	13.55	Horizontal	-50.13	-13.00	37.13	315
8	6790.4	-53.55	6.30	13.75	Horizontal	-48.25	-13.00	35.25	315
9	7639.2	-50.84	6.80	13.85	Horizontal	-45.94	-13.00	32.94	90
10	8488.0	-49.63	6.90	14.25	Horizontal	-44.43	-13.00	31.43	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1652.8	-61.97	2.00	10.15	Horizontal	-55.97	-13.00	42.97	225
3	2479.2	-63.74	2.51	11.35	Horizontal	-57.05	-13.00	44.05	45
4	3305.6	-58.53	4.20	10.85	Horizontal	-54.03	-13.00	41.03	135
5	4132.0	-56.45	5.20	11.35	Horizontal	-52.45	-13.00	39.45	45
6	4958.4	-55.40	5.50	11.95	Horizontal	-51.10	-13.00	38.10	0
7	5784.8	-55.86	5.70	13.55	Horizontal	-50.16	-13.00	37.16	180
8	6611.2	-53.26	6.30	13.75	Horizontal	-47.96	-13.00	34.96	315
9	7437.6	-50.59	6.80	13.85	Horizontal	-45.69	-13.00	32.69	0
10	8264.0	-51.32	6.90	14.25	Horizontal	-46.12	-13.00	33.12	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2.The worst emission was found in the antenna is Horizontal position.



WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.2	-61.63	2.00	10.75	Horizontal	-55.03	-13.00	42.03	315
3	2509.8	-63.54	2.51	11.05	Horizontal	-57.15	-13.00	44.15	180
4	3346.4	-57.79	4.20	11.15	Horizontal	-52.99	-13.00	39.99	225
5	4183.0	-55.84	5.20	11.15	Horizontal	-52.04	-13.00	39.04	0
6	5019.6	-55.63	5.50	11.95	Horizontal	-51.33	-13.00	38.33	270
7	5856.2	-56.11	5.70	13.55	Horizontal	-50.41	-13.00	37.41	180
8	6692.8	-52.78	6.30	13.75	Horizontal	-47.48	-13.00	34.48	0
9	7529.4	-50.06	6.80	13.85	Horizontal	-45.16	-13.00	32.16	315
10	8366.0	-50.12	6.90	14.25	Horizontal	-44.92	-13.00	31.92	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

WCDMA Band V CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1693.2	-62.08	2.00	10.15	Horizontal	-56.08	-13.00	43.08	0
3	2539.8	-62.75	2.51	11.05	Horizontal	-56.36	-13.00	43.36	45
4	3386.4	-58.88	4.20	11.15	Horizontal	-54.08	-13.00	41.08	90
5	4233.0	-55.46	5.20	11.15	Horizontal	-51.66	-13.00	38.66	45
6	5079.6	-55.12	5.50	11.95	Horizontal	-50.82	-13.00	37.82	315
7	5926.2	-55.56	5.70	13.55	Horizontal	-49.86	-13.00	36.86	270
8	6772.8	-53.15	6.30	13.75	Horizontal	-47.85	-13.00	34.85	180
9	7619.4	-50.28	6.80	13.85	Horizontal	-45.38	-13.00	32.38	0
10	8466.0	-49.21	6.90	14.25	Horizontal	-44.01	-13.00	31.01	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1649.4	-57.34	2.00	10.75	Horizontal	-50.74	-13.00	37.74	0
3	2474.1	-63.21	2.51	11.05	Horizontal	-56.82	-13.00	43.82	135
4	3298.8	-56.50	4.20	11.15	Horizontal	-51.70	-13.00	38.70	180
5	4123.5	-55.78	5.20	11.15	Horizontal	-51.98	-13.00	38.98	0
6	4948.2	-55.50	5.50	11.95	Horizontal	-51.20	-13.00	38.20	45
7	5772.9	-54.82	5.70	13.55	Horizontal	-49.12	-13.00	36.12	180
8	6597.6	-53.18	6.30	13.75	Horizontal	-47.88	-13.00	34.88	270
9	7422.3	-50.43	6.80	13.85	Horizontal	-45.53	-13.00	32.53	135
10	8247.0	-50.51	6.90	14.25	Horizontal	-45.31	-13.00	32.31	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-58.36	2.00	10.75	Horizontal	-51.76	-13.00	38.76	225
3	2509.5	-64.51	2.51	11.05	Horizontal	-58.12	-13.00	45.12	180
4	3346.0	-58.79	4.20	11.15	Horizontal	-53.99	-13.00	40.99	0
5	4182.5	-55.40	5.20	11.15	Horizontal	-51.60	-13.00	38.60	270
6	5019.0	-55.50	5.50	11.95	Horizontal	-51.20	-13.00	38.20	90
7	5855.5	-54.60	5.70	13.55	Horizontal	-48.90	-13.00	35.90	90
8	6692.0	-52.42	6.30	13.75	Horizontal	-47.12	-13.00	34.12	315
9	7528.5	-49.97	6.80	13.85	Horizontal	-45.07	-13.00	32.07	45
10	8365.0	-50.77	6.90	14.25	Horizontal	-45.57	-13.00	32.57	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1696.6	-61.99	2.00	10.75	Horizontal	-55.39	-13.00	42.39	90
3	2544.9	-63.29	2.51	11.05	Horizontal	-56.90	-13.00	43.90	90
4	3393.2	-58.30	4.20	11.15	Horizontal	-53.50	-13.00	40.50	0
5	4241.5	-55.00	5.20	11.15	Horizontal	-51.20	-13.00	38.20	135
6	5089.8	-54.80	5.50	11.95	Horizontal	-50.50	-13.00	37.50	225
7	5938.1	-55.50	5.70	13.55	Horizontal	-49.80	-13.00	36.80	90
8	6786.4	-51.80	6.30	13.75	Horizontal	-46.50	-13.00	33.50	0
9	7634.7	-50.40	6.80	13.85	Horizontal	-45.50	-13.00	32.50	90
10	8483.0	-50.30	6.90	14.25	Horizontal	-45.10	-13.00	32.10	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1653.0	-58.30	2.00	10.75	Horizontal	-51.70	-13.00	38.70	0
3	2479.5	-63.79	2.51	11.05	Horizontal	-57.40	-13.00	44.40	180
4	3356.3	-57.93	4.20	11.15	Horizontal	-53.13	-13.00	40.13	270
5	4007.6	-55.69	5.20	11.15	Horizontal	-51.89	-13.00	38.89	135
6	4994.3	-55.78	5.50	11.95	Horizontal	-51.48	-13.00	38.48	135
7	5961.8	-55.32	5.70	13.55	Horizontal	-49.62	-13.00	36.62	0
8	6796.8	-52.17	6.30	13.75	Horizontal	-46.87	-13.00	33.87	45
9	7631.8	-50.52	6.80	13.85	Horizontal	-45.62	-13.00	32.62	315
10	8466.8	-49.27	6.90	14.25	Horizontal	-44.07	-13.00	31.07	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-58.17	2.00	10.75	Horizontal	-51.57	-13.00	38.57	315
3	2509.5	-63.38	2.51	11.05	Horizontal	-56.99	-13.00	43.99	45
4	3466.2	-58.31	4.20	11.15	Horizontal	-53.51	-13.00	40.51	135
5	4215.9	-56.36	5.20	11.15	Horizontal	-52.56	-13.00	39.56	225
6	5165.6	-55.35	5.50	11.95	Horizontal	-51.05	-13.00	38.05	0
7	5815.3	-55.66	5.70	13.55	Horizontal	-49.96	-13.00	36.96	315
8	6765.0	-52.27	6.30	13.75	Horizontal	-46.97	-13.00	33.97	180
9	7614.7	-51.35	6.80	13.85	Horizontal	-46.45	-13.00	33.45	315
10	8464.4	-49.73	6.90	14.25	Horizontal	-44.53	-13.00	31.53	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 5MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1693.0	-61.26	2.00	10.75	Horizontal	-54.66	-13.00	41.66	225
3	2539.5	-63.31	2.51	11.05	Horizontal	-56.92	-13.00	43.92	90
4	3386.0	-57.47	4.20	11.15	Horizontal	-52.67	-13.00	39.67	315
5	4232.5	-56.02	5.20	11.15	Horizontal	-52.22	-13.00	39.22	270
6	5079.0	-55.92	5.50	11.95	Horizontal	-51.62	-13.00	38.62	180
7	5925.5	-55.07	5.70	13.55	Horizontal	-49.37	-13.00	36.37	0
8	6772.0	-52.23	6.30	13.75	Horizontal	-46.93	-13.00	33.93	315
9	7618.5	-51.47	6.80	13.85	Horizontal	-46.57	-13.00	33.57	45
10	8465.0	-49.57	6.90	14.25	Horizontal	-44.37	-13.00	31.37	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 10MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1658.0	-59.30	2.00	10.75	Horizontal	-52.70	-13.00	39.70	135
3	2487.0	-63.92	2.51	11.05	Horizontal	-57.53	-13.00	44.53	270
4	3316.0	-58.40	4.20	11.15	Horizontal	-53.60	-13.00	40.60	180
5	4145.0	-56.30	5.20	11.15	Horizontal	-52.50	-13.00	39.50	315
6	4974.0	-56.00	5.50	11.95	Horizontal	-51.70	-13.00	38.70	0
7	5803.0	-56.20	5.70	13.55	Horizontal	-50.50	-13.00	37.50	225
8	6632.0	-55.10	6.30	13.75	Horizontal	-49.80	-13.00	36.80	0
9	7461.0	-51.40	6.80	13.85	Horizontal	-46.50	-13.00	33.50	270
10	8290.0	-50.40	6.90	14.25	Horizontal	-45.20	-13.00	32.20	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.0	-59.73	2.00	10.75	Horizontal	-53.13	-13.00	40.13	315
3	2509.5	-64.01	2.51	11.05	Horizontal	-57.62	-13.00	44.62	90
4	3346.0	-58.00	4.20	11.15	Horizontal	-53.20	-13.00	40.20	225
5	4182.5	-55.20	5.20	11.15	Horizontal	-51.40	-13.00	38.40	0
6	5019.0	-55.80	5.50	11.95	Horizontal	-51.50	-13.00	38.50	225
7	5855.5	-55.30	5.70	13.55	Horizontal	-49.60	-13.00	36.60	315
8	6692.0	-52.40	6.30	13.75	Horizontal	-47.10	-13.00	34.10	270
9	7528.5	-51.40	6.80	13.85	Horizontal	-46.50	-13.00	33.50	0
10	8365.0	-50.30	6.90	14.25	Horizontal	-45.10	-13.00	32.10	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



LTE Band 5 10MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1688.0	-61.79	2.00	10.75	Horizontal	-55.19	-13.00	42.19	45
3	2532.0	-61.86	2.51	11.05	Horizontal	-55.47	-13.00	42.47	0
4	3376.0	-58.40	4.20	11.15	Horizontal	-53.60	-13.00	40.60	225
5	4220.0	-55.60	5.20	11.15	Horizontal	-51.80	-13.00	38.80	0
6	5064.0	-54.80	5.50	11.95	Horizontal	-50.50	-13.00	37.50	270
7	5908.0	-55.70	5.70	13.55	Horizontal	-50.00	-13.00	37.00	0
8	6752.0	-54.00	6.30	13.75	Horizontal	-48.70	-13.00	35.70	315
9	7596.0	-51.40	6.80	13.85	Horizontal	-46.50	-13.00	33.50	180
10	8440.0	-50.00	6.90	14.25	Horizontal	-44.80	-13.00	31.80	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Agilent	N9010A	MY50210259	2018-05-20	2019-05-19
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-21	2019-05-20
RF Cable	Agilent	SMA 15cm	0001	/	/
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****