

FCC - TEST REPORT

Report Number : **60.790.22.009.01R01** Date of Issue : October 27, 2022

Model : **QTM-EAP10**

Product Type : **Quantum RTLS POE Anchor**

Applicant : **ZEROKEY INC.**

Address : **3120 12TH ST NE, CALGARY AB T2E 8T3, CANADA**

Production Facility 1 : **ZEROKEY INC.**

Address : **3120 12TH ST NE, CALGARY AB T2E 8T3, CANADA**

Production Facility 2 : **DYNAMIC SOURCE MANUFACTURING INC**

Address : **6285 76 AVE SE, UNIT 130, CALGARY ALBERTA T2C 5L9, CANADA**

Test Result : **nPositive** ☐ Negative

Total pages
including
Appendices : 45

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval

1 Table of Contents

| | |
|--------------------------------------------------------|----|
| 1 Table of Contents..... | 2 |
| 2 Description of Equipment Under Test | 3 |
| 3 Summary of Test Standards | 4 |
| 4 Details about the Test Laboratory | 5 |
| 4.1 Test Equipment Site List..... | 6 |
| 4.2 Measurement System Uncertainty | 7 |
| 5 Summary of Test Results..... | 8 |
| 6 General Remarks..... | 9 |
| 7 Test Setups..... | 10 |
| 7.1 Radiated test setups Below 1GHz..... | 10 |
| 7.2 Radiated test setups Above 1GHz | 10 |
| 7.3 AC Power Line Conducted Emission test setups | 11 |
| 7.4 Conducted RF test setups..... | 11 |
| 8 Emission Test Results | 12 |
| 8.1 Spurious Radiated Emission | 12 |
| 8.2 Conducted Emission at AC Power line..... | 16 |
| 8.3 6dB & 99% Bandwidth | 18 |
| 8.4 Peak Output Power..... | 21 |
| 8.5 Spurious Emissions at Antenna Terminals..... | 24 |
| 8.6 100kHz Bandwidth of band edges..... | 30 |
| 8.7 Power Spectral Density..... | 32 |
| 8.8 Antenna Requirement..... | 35 |
| 9 Test setup procedure | 36 |
| 10 Appendix A - General Product Information | 44 |

2 Description of Equipment Under Test

Description of the Equipment Under Test

Product: Quantum RTLS POE Anchor

Model no.: QTM-EAP10

FCC ID: **2AX6LQTMEAP10**

Rating: Input:
56VDC, 30W (POE input)
Or 56VDC, 30W (DC Jack input)

Output:
56VDC (POE output)

Operating mode: Enhanced Shockburst

Frequency: 2402-2480MHz (Tx and Rx)

Antenna Info.: Internal Antenna, PCB antenna, 3.2dBi gain.

Number of operated channels: 79, 1MHz channel space

Modulation: GFSK

Remark: ---

Auxiliary Equipment and Software Used during Test:

| DESCRIPTION | MANUFACTURER | MODEL NO./ SPEC. | REMARK |
|---------------------------------|-----------------------------|--------------------------------------------------------------------------------------|--------|
| POE Injector (AC/DC Adapter) | Phihong Technology Co., Ltd | Model: POE29U-1AT(PL) Input: 100-240VAC 0.8A 50-60Hz Output: 56VDC 0.536A, 30W | / |
| DC Supply (AC/DC Adapter) | Phihong Technology Co., Ltd | Model: PSAC30U-560L6 Input: 100-240VAC 0.8A 50-60Hz Output: 56VDC 0.536A | / |
| Personal Computer | Lenovo (Beijing) Co., Ltd | ThinkPad X240 | / |

Auxiliary Software Used during Test:

| DESCRIPTION | SOFTWARE NAME | VERSION | REMARK |
|-----------------------|-----------------|-----------------|--------|
| RF Test Mode Software | Windows Command | 10.0.19044.2006 | / |

3 Summary of Test Standards

| Test Standards |
|----------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC Part 15 Subpart C 10-1-21 Edition Federal Communications Commission, PART 15 — Radio Frequency Devices, Subpart C —Intentional Radiators |

All the test methods were according to KDB558074 D01 v05r02 DTS Measurement Guidance and ANSI C63.10 (2013).

4 Details about the Test Laboratory

Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch
 Building 12&13 Zhiheng Wisdomland Business Park,
 Nantou Checkpoint Road 2,
 Shenzhen 518052, P.R.China
 FCC Registration Number: 514049
 ISED test site number: 10320A

| Emission Tests | |
|------------------------------------------------------------------------------|-----------|
| Test Item | Test Site |
| FCC Part 15 Subpart C | |
| FCC Title 47 Part 15.205, 15.209 & 15.247(d) Spurious Radiated Emission | Site 1 |
| FCC Title 47 Part 15.207 Conduct Emission | Site 1 |
| FCC Title 47 Part 15.247(a)(1) 6dB & 99% Bandwidth | Site 1 |
| FCC Title 47 Part 15.247(b) Peak Output Power | Site 1 |
| FCC Title 47 Part 2.1051 & 15.247(d) Spurious Emissions at Antenna Terminals | Site 1 |
| FCC Title 47 Part 15.247(d) 100kHz Bandwidth of band edges | Site 1 |
| FCC Title 47 Part 15.247(e) Power Spectral Density | Site 1 |
| FCC Title 47 Part 15.203 & 15.247(b) Antenna Requirement | Site 1 |

4.1 Test Equipment Site List

Radiated Emission – Site 1

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------------------------|-----------------|-----------|----------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 7 | 101269 | 2023-5-27 |
| Trilog Super Broadband Test Antenna | Schwarzbeck | VULB 9163 | 707 | 2023-7-12 |
| Horn Antenna | Rohde & Schwarz | HF907 | 102294 | 2023-6-19 |
| Loop Antenna | Rohde & Schwarz | HFH2-Z2 | 100398 | 2023-8-17 |
| Pre-amplifier | Rohde & Schwarz | SCU 18 | 102230 | 2023-5-28 |
| Attenuator | Mini-circuits | UNAT-6+ | MY39264334 | 2023-5-27 |
| 3m Semi-anechoic chamber | TDK | SAC-3 #1 | ---- | 2023-5-28 |
| Test software | Rohde & Schwarz | EMC32 | Version9.15.00 | N/A |

Conducted Emission Test – Site 1

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------|-------------------|-----------|----------------|---------------|
| EMI Test Receiver | Rohde & Schwarz | ESR 3 | 101782 | 2023-5-27 |
| LISN | Rohde & Schwarz | ENV4200 | 100249 | 2023-5-27 |
| LISN | Rohde & Schwarz | ENV432 | 101318 | 2023-5-27 |
| LISN | Rohde & Schwarz | ENV216 | 100326 | 2023-5-27 |
| ISN | Rohde & Schwarz | ENY81 | 100177 | 2023-5-27 |
| ISN | Rohde & Schwarz | ENY81-CA6 | 101664 | 2023-5-27 |
| RF Current Probe | Rohde & Schwarz | EZ-17 | 100816 | 2023-5-27 |
| Attenuator | Shanghai Huaxiang | TS2-26-3 | 080928189 | 2023-5-31 |
| Test software | Rohde & Schwarz | EMC32 | Version9.15.00 | N/A |
| Shielding Room | TDK | CSR #1 | ---- | 2025-10-15 |

20dB & 99% Bandwidth, Peak Output Power, Spurious Emissions at Antenna Terminals, 100kHz Bandwidth of band edges, Power Spectral Density – Site 1

| DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DUE DATE |
|-------------------------------------------|-----------------|--------------------|------------------|---------------|
| Signal Generator | Rohde & Schwarz | SMB100A | 108272 | 2023-5-27 |
| Vector Signal Generator | Rohde & Schwarz | SMBV100A | 262825 | 2023-5-27 |
| Communication Synthetical Test Instrument | Rohde & Schwarz | CMW 270 | 101251 | 2023-5-27 |
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101030 | 2023-5-27 |
| Vector Signal Generator | Rohde & Schwarz | SMU 200A | 105324 | 2023-5-27 |
| RF Switch Module | Rohde & Schwarz | OSP120/OSP-B157 | 101226/100851 | 2023-5-27 |
| Power Splitter | Weinschel | 1580 | SC319 | 2023-5-28 |
| 10dB Attenuator | Weinschel | 4M-10 | 43152 | 2023-5-28 |
| 10dB Attenuator | R&S | DNF | DNF-001 | 2023-5-27 |
| 10dB Attenuator | R&S | DNF | DNF-002 | 2023-5-27 |
| 10dB Attenuator | R&S | DNF | DNF-003 | 2023-5-27 |
| 10dB Attenuator | R&S | DNF | DNF-004 | 2023-5-27 |
| Test software | Rohde & Schwarz | EMC32 | Version 10.38.00 | N/A |
| Test software | Tonscend | System for BT/WIFI | Version 2.6 | N/A |

4.2 Measurement System Uncertainty

Measurement System Uncertainty Emissions

| System Measurement Uncertainty | |
|---------------------------------------------------------------------|------------------------------------------|
| Items | Extended Uncertainty |
| Uncertainty for Radiated Emission in 3m chamber 9kHz-30MHz | 4.66dB |
| Uncertainty for Radiated Emission in 3m chamber 30MHz-1000MHz | Horizontal: 4.26dB; Vertical: 4.25dB; |
| Uncertainty for Radiated Emission in 3m chamber 1000MHz-25000MHz | Horizontal: 4.51dB; Vertical: 4.50dB; |
| Uncertainty for Conducted Emission at AC Power Line 150kHz-30MHz | 3.31dB |
| Uncertainty for conducted power test | 1.27dB |
| Uncertainty for frequency test | 0.6×10^{-7} |

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.

5 Summary of Test Results

| Emission Tests | | | | |
|------------------------------------------------------------------------------|-------|-------------------------------------|--------------------------|--------------------------|
| FCC Part 15 Subpart C | | | | |
| Test Condition | Pages | Test Result | | |
| | | Pass | Fail | N/A |
| FCC Title 47 Part 15.205, 15.209 & 15.247(d) Spurious Radiated Emission | 12-15 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.207 Conduct Emission | 16-17 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.247(a)(2) 6dB & 99% Bandwidth | 18-20 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.247(b) Peak Output Power | 21-23 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 2.1051 & 15.247(d) Spurious Emissions at Antenna Terminals | 24-29 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.247(d) 100kHz Bandwidth of band edges | 30-31 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.247(e) Power Spectral Density | 32-34 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| FCC Title 47 Part 15.203 & 15.247(b) Antenna Requirement | 35 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

6 General Remarks

Remarks

EUT can be powered by 56VDC from the POE port or DC jack. Pre-test was performed for both cases, results between them have no obvious deviation, so finally DC jack power was chosen to perform the full test.

This submittal(s) (test report) is intended for **FCC ID: 2AX6LQTMEAP10**, complies with Section 15.203, 15.205, 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C rules for the DTS grant.

The TX and RX range is 2402MHz-2480MHz.

SUMMARY:

- All tests according to the regulations cited on page 8 were

n - Performed

o - **Not** Performed

- The Equipment Under Test

n - **Fulfills** the general approval requirements.

o - **Does not** fulfill the general approval requirements.

Sample Received Date: January 12, 2022

Testing Start Date: January 25, 2022


Testing End Date: February 28, 2022

- TÜV SÜD Certification and Testing (China) Co., Ltd. Shenzhen Branch -


Reviewed by:

Prepared by:

Tested by:



Eric LI
EMC Project Manager




Hosea CHAN
EMC Project Engineer




Louise Liu
EMC Test Engineer

7 Test Setups


7.1 Radiated test setups Below 1GHz

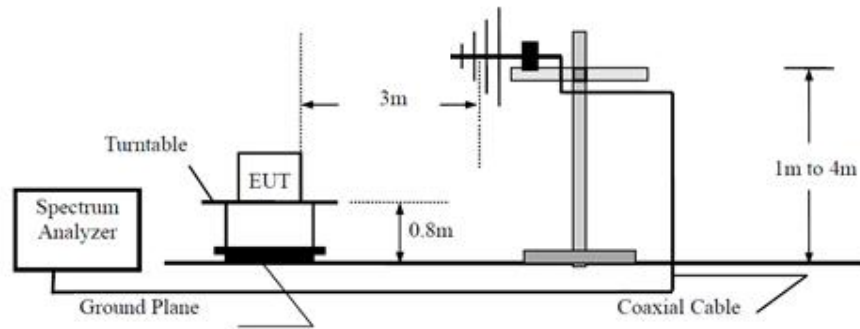


7.2 Radiated test setups Above 1GHz

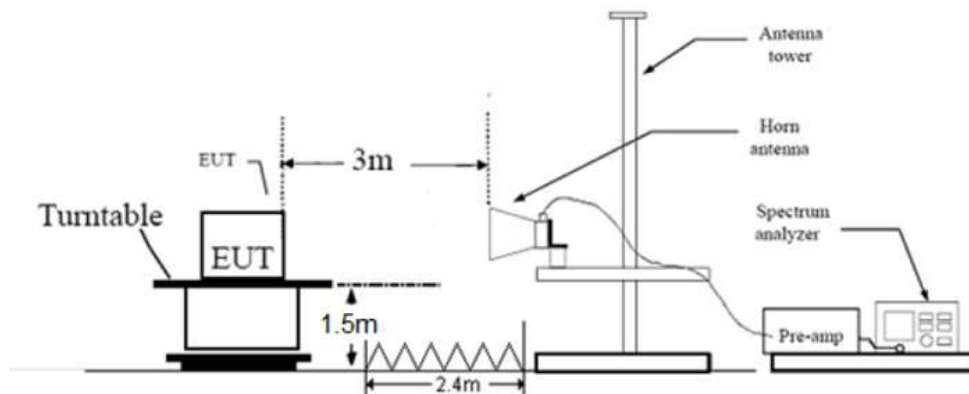

7.3 AC Power Line Conducted Emission test setups

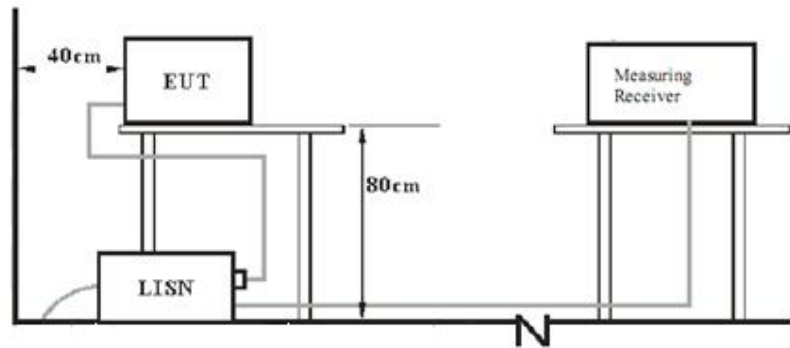

7.4 Conducted RF test setups

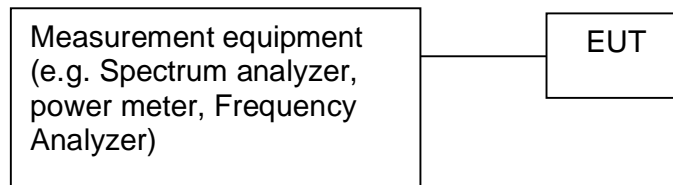

8 Emission Test Results

8.1 Spurious Radiated Emission

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode
 (Middle channel is the worst case)
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 56VDC
 Remark: Below 1GHz

| |
|--------------------------------------------|
| Test Result |
| <input checked="" type="checkbox"/> Passed |
| <input type="checkbox"/> Not Passed |

| Frequency MHz | Result dB μ V/m | Limit dB μ V/m | Margin dB | Detector PK/QP/AV | Ant. Polarity H/V | Corr. (dB) |
|------------------|------------------------|-----------------------|--------------|----------------------|----------------------|---------------|
| 47.763125 | 29.00 | 40.00 | 11.0 | Peak | H | 20.55 |
| 98.385000 | 34.52 | 43.50 | 8.98 | Peak | H | 19.00 |
| 101.840625 | 32.51 | 43.50 | 10.99 | Peak | H | 19.31 |
| 151.553125 | 32.13 | 43.50 | 11.37 | Peak | H | 15.55 |
| 215.694375 | 28.99 | 43.50 | 14.51 | Peak | H | 19.00 |
| 310.390625 | 35.37 | 46.00 | 10.63 | Peak | H | 21.89 |
| 45.701875 | 36.77 | 40.00 | 3.23 | Quasi-Peak | V | 20.77 |
| 47.763125 | 35.23 | 40.00 | 4.77 | Quasi-Peak | V | 20.55 |
| 151.492500 | 39.88 | 43.50 | 3.62 | Quasi-Peak | V | 15.54 |
| 207.146250 | 33.90 | 43.50 | 9.60 | Peak | V | 18.78 |
| 314.573750 | 36.71 | 46.00 | 9.29 | Peak | V | 21.87 |
| 465.590625 | 42.34 | 46.00 | 3.66 | Peak | V | 25.16 |

Remark:

- As the measured peak value not exceeded the Quasi-peak limit, Quasi-peak value no need to be measured.
- Result Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

Spurious Radiated Emission

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 56VDC
 Remark: 1GHz to 25GHz

| | |
|-------------------------------------|------------|
| Test Result | |
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

| Frequency MHz | Result dBμV/m | Limit dBμV/m | Margin dB | Detector PK/QP/AV | Ant. Polarity H/V | Corr. (dB) |
|------------------|------------------|-----------------|--------------|----------------------|-------------------------|---------------|
| 1825.000000 | 39.94 | 74.00 | 34.06 | Peak | H | -5.80 |
| 3326.000000 | 44.08 | 74.00 | 29.92 | Peak | H | -1.12 |
| 4804.000000 | 50.05 | 74.00 | 23.95 | Peak | H | 2.81 |
| 5908.500000 | 48.50 | 74.00 | 25.50 | Peak | H | 4.95 |
| 7206.500000 | 43.83 | 74.00 | 30.17 | Peak | H | 7.33 |
| 1375.000000 | 38.67 | 74.00 | 35.33 | Peak | V | -8.97 |
| 3345.500000 | 43.21 | 74.00 | 30.79 | Peak | V | -1.19 |
| 5558.500000 | 48.29 | 74.00 | 25.71 | Peak | V | 4.36 |
| 7205.000000 | 48.24 | 74.00 | 25.76 | Peak | V | 7.33 |
| 16637.000000 | 47.82 | 74.00 | 26.18 | Peak | V | 19.16 |

Remark:

1. According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
2. Consequence Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

Spurious Radiated Emission

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2440MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 56VDC
 Remark: 1GHz to 25GHz

| Test Result | |
|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

| Frequency MHz | Result dBμV/m | Limit dBμV/m | Margin dB | Detector PK/QP/AV | Ant. Polarity H/V | Corr. (dB) |
|------------------|------------------|-----------------|--------------|----------------------|-------------------------|---------------|
| 1610.500000 | 37.93 | 74.00 | 36.07 | Peak | H | -8.51 |
| 3166.000000 | 44.19 | 74.00 | 29.81 | Peak | H | -0.78 |
| 4506.500000 | 46.70 | 74.00 | 27.30 | Peak | H | 2.23 |
| 7319.500000 | 40.21 | 74.00 | 33.79 | Peak | H | 7.48 |
| 9850.500000 | 44.06 | 74.00 | 29.94 | Peak | H | 11.64 |
| 1284.500000 | 38.54 | 74.00 | 35.46 | Peak | V | -8.41 |
| 4881.000000 | 46.56 | 74.00 | 27.44 | Peak | V | 3.32 |
| 5980.500000 | 48.94 | 74.00 | 25.06 | Peak | V | 5.12 |
| 7319.000000 | 43.51 | 74.00 | 30.49 | Peak | V | 7.48 |

Remark:

- According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
- Consequence Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

Spurious Radiated Emission

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2480MHz)
 Test Specification: FCC15.205, 15.209 & 15.247(d)
 Comment: 56VDC
 Remark: 1GHz to 25GHz

| | |
|-------------------------------------|------------|
| Test Result | |
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

| Frequency | Result | Limit | Margin | Detector | Ant. Polarity | Corr. |
|-------------|--------|--------|--------|----------|---------------|-------|
| MHz | dBμV/m | dBμV/m | dB | PK/QP/AV | H/V | (dB) |
| 1300.000000 | 37.17 | 74.00 | 36.83 | Peak | H | -8.39 |
| 1938.000000 | 40.36 | 74.00 | 33.64 | Peak | H | -4.77 |
| 4267.000000 | 46.64 | 74.00 | 27.36 | Peak | H | 1.54 |
| 5826.000000 | 48.84 | 74.00 | 25.16 | Peak | H | 4.85 |
| 7163.500000 | 40.51 | 74.00 | 33.49 | Peak | H | 7.23 |
| 4533.500000 | 47.52 | 74.00 | 26.48 | Peak | V | 2.22 |
| 5905.000000 | 49.07 | 74.00 | 24.93 | Peak | V | 4.95 |
| 7687.500000 | 40.93 | 74.00 | 33.07 | Peak | V | 8.31 |
| 9790.000000 | 43.11 | 74.00 | 30.89 | Peak | V | 10.60 |


Remark:

- According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in data table if the peak value complies with average limit.
- Consequence Level=Reading Level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Amplifier Gain
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

8.2 Conducted Emission at AC Power line

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode
 Test Specification: FCC15.207
 Comment: AC mains, 120V AC, 60Hz, L line, Powered by DC supply
 Remark: This is the worst case of the two power supply modes

| Test Result | |
|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

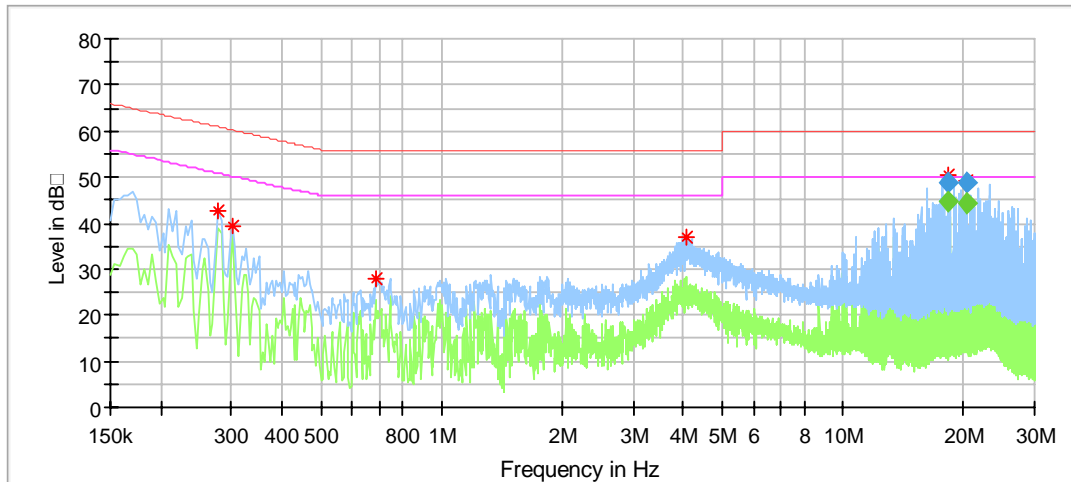


| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------------|
| 0.278000 | 42.54 | --- | 60.88 | 18.34 | 9.22 |
| 0.302000 | 39.39 | --- | 60.19 | 20.80 | 9.22 |
| 0.686000 | 27.73 | --- | 56.00 | 28.27 | 9.20 |
| 4.094000 | 36.81 | --- | 56.00 | 19.19 | 9.28 |
| 18.245500 | --- | 44.83 | 50.00 | 5.17 | 9.43 |
| 18.245500 | 48.96 | --- | 60.00 | 11.04 | 9.43 |
| 20.257500 | --- | 44.37 | 50.00 | 5.63 | 9.47 |
| 20.257500 | 48.69 | --- | 60.00 | 11.31 | 9.47 |

Conducted Emission Test

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode
 Test Specification: FCC15.207
 Comment: AC mains, 120V AC, 60Hz, N Line, Powered by DC supply
 Remark: This is the worst case of the two power supply modes

| Test Result | |
|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |


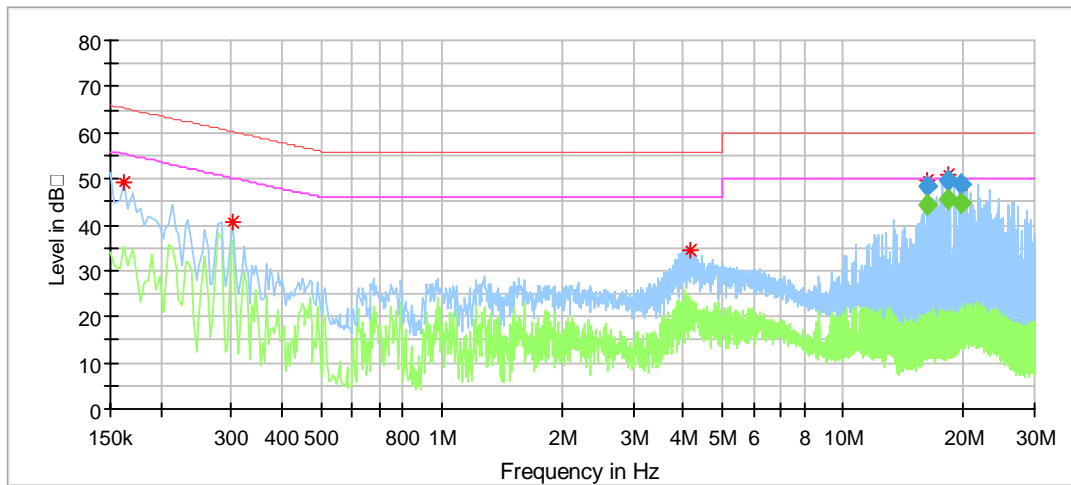


| Frequency (MHz) | MaxPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Corr. (dB) |
|-----------------|----------------|----------------|--------------|-------------|------------|
| 0.162000 | 49.09 | --- | 65.36 | 16.27 | 9.41 |
| 0.302000 | 40.52 | --- | 60.19 | 19.67 | 9.39 |
| 4.174000 | 34.46 | --- | 56.00 | 21.54 | 9.47 |
| 16.229500 | --- | 44.35 | 50.00 | 5.65 | 9.65 |
| 16.229500 | 48.52 | --- | 60.00 | 11.48 | 9.65 |
| 18.241500 | --- | 45.63 | 50.00 | 4.37 | 9.71 |
| 18.241500 | 49.64 | --- | 60.00 | 10.36 | 9.71 |
| 19.709500 | --- | 44.54 | 50.00 | 5.46 | 9.75 |
| 19.709500 | 48.74 | --- | 60.00 | 11.26 | 9.75 |

8.3 6dB & 99% Bandwidth

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

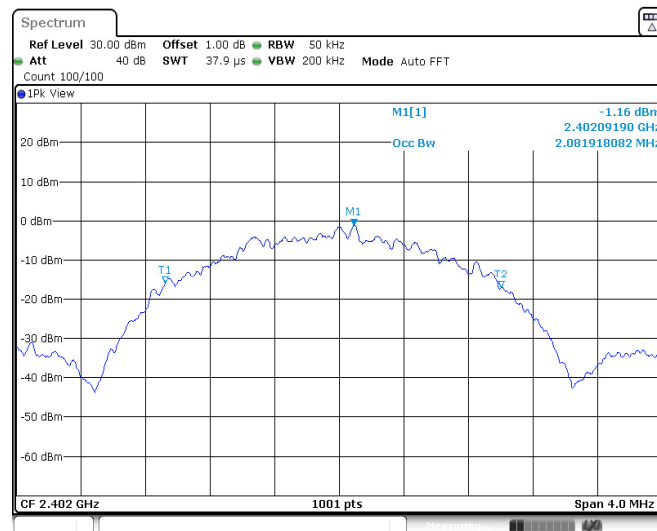
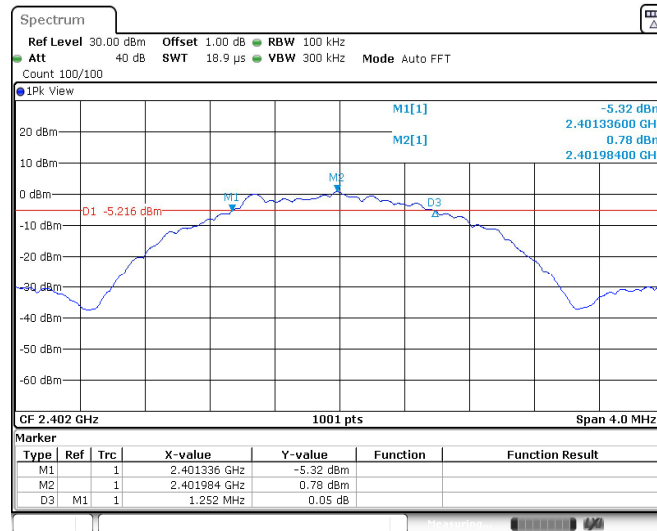


| Bandwidth | Measured Value | Limit |
|---------------|----------------|----------|
| 6dB bandwidth | 1.252 MHz | > 0.5MHz |
| 99% OCB | 2.082 MHz | NA |

6dB & 99% Bandwidth

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2440MHz)
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

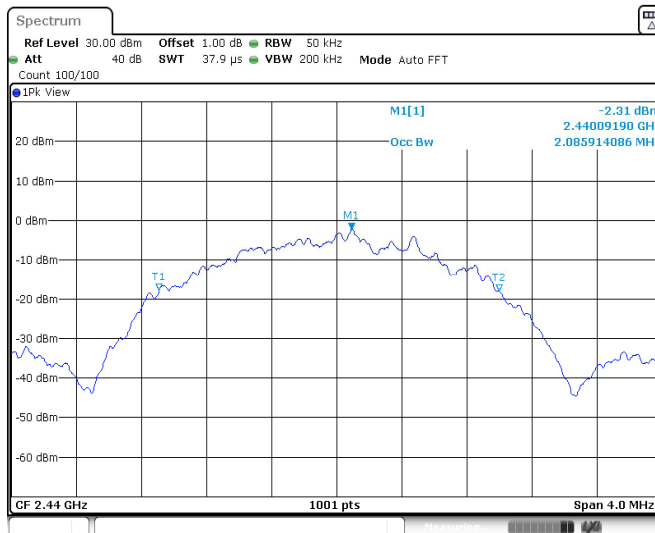
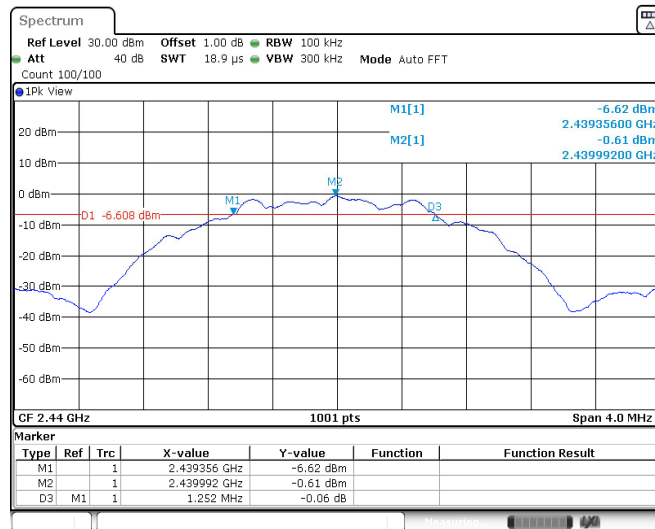


| Bandwidth | Measured Value | Limit |
|---------------|----------------|-----------|
| 6dB bandwidth | 1.252 MHz | > 0.5 MHz |
| 99% OCB | 2.086 MHz | NA |

6dB & 99% Bandwidth

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2480MHz)
 Test Specification: FCC15.247(a)(2), 6dB Bandwidth & 99% Bandwidth
 Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

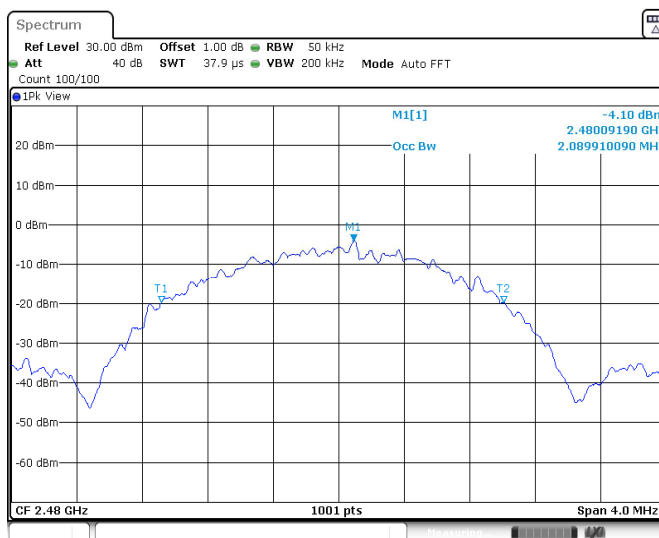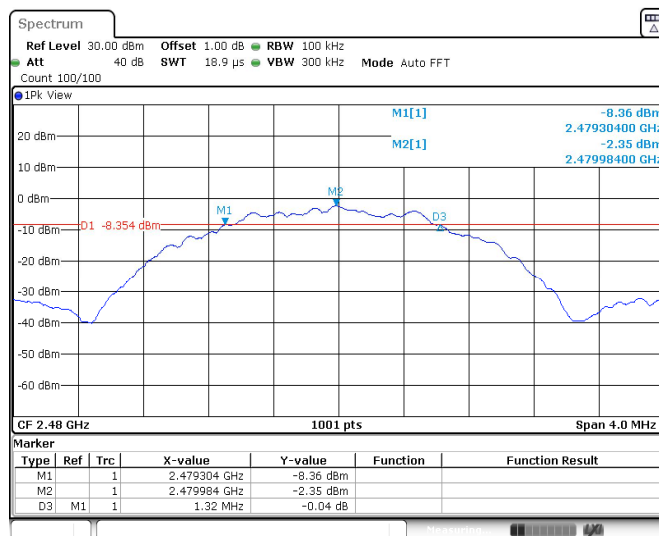


| Bandwidth | Measured Value | Limit |
|---------------|----------------|-----------|
| 6dB bandwidth | 1.320 MHz | > 0.5 MHz |
| 99% OCB | 2.090 MHz | NA |

8.4 Peak Output Power

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC15.247(b)
 Comment: 56VDC

| Test Result | |
|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

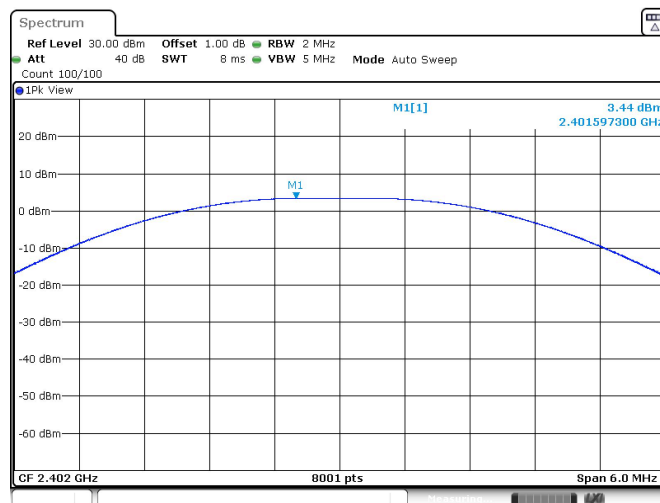


Date: 28.JAN.2022 09:48:12

| Conducted Output Power | Limit |
|------------------------|---------|
| 3.44 dBm | < 30dBm |

Peak Output Power

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2440MHz)
Test Specification: FCC15.247(b)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

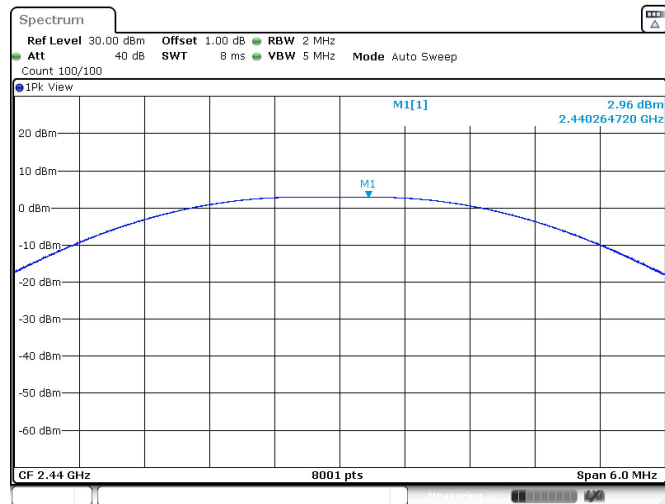


Date: 28.JAN.2022 09:50:07

| Conducted Output Power | Limit |
|------------------------|---------|
| 2.96 dBm | < 30dBm |

Peak Output Power

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC15.247(b)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

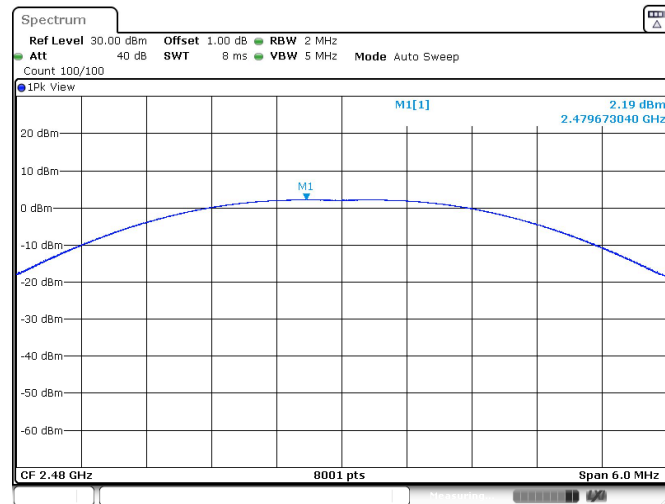

Date: 28 JAN 2022 09:58:22


| Conducted Output Power | Limit |
|------------------------|---------|
| 2.19 dBm | < 30dBm |

8.5 Spurious Emissions at Antenna Terminals

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2402MHz)
 Test Specification: FCC2.1051 & 15.247(d)
 Comment: 56VDC

| | |
|-------------------------------------|------------|
| Test Result | |
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

| Channel | FreqRange MHz | RefLevel dBm | Result dBm | Limit dBm | Verdict |
|---------|---------------|--------------|------------|-----------|---------|
| 2402 | 2402 | 2.48 | 2.48 | --- | PASS |
| 2402 | 30~1000 | 2.48 | -68.13 | <=-17.52 | PASS |
| 2402 | 1000~26500 | 2.48 | -24.36 | <=-17.52 | PASS |

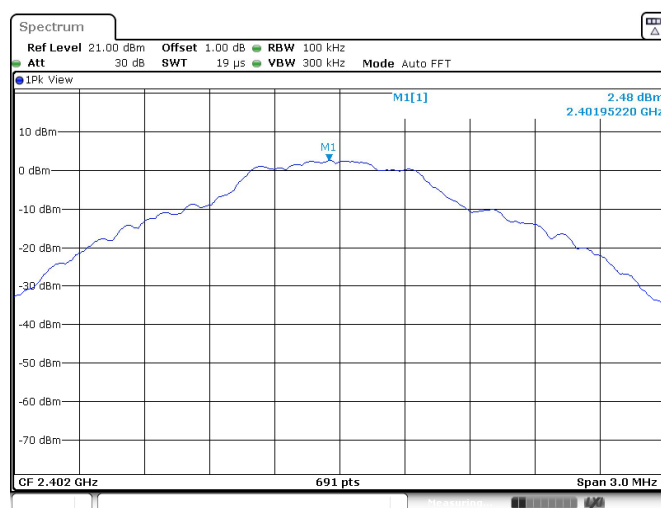


Date: 28 JAN 2022 09:48:32


Spurious Emissions at Antenna Terminals

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2402MHz)
Test Specification: FCC2.1051 & 15.247(d)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

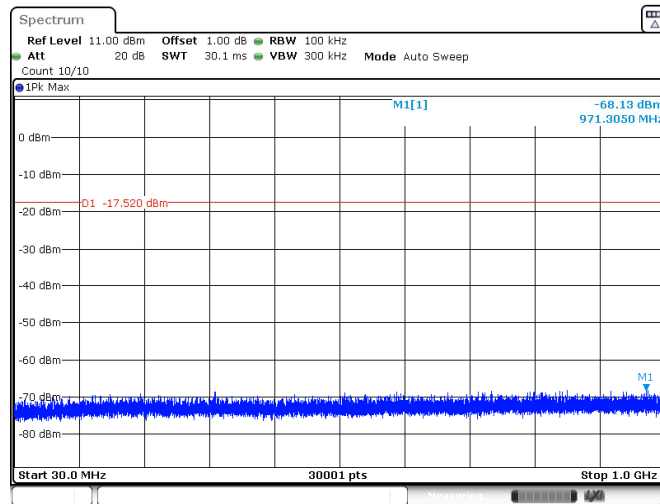

Date: 28.JAN.2022 09:48:38

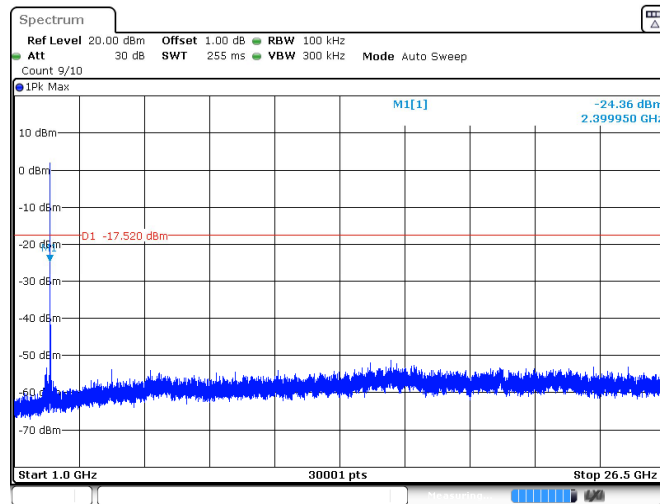


Date: 28.JAN.2022 09:48:46

Spurious Emissions at Antenna Terminals

EUT: QTM-EAP10
 Op Condition: Operated, TX Mode (2440MHz)
 Test Specification: FCC2.1051 & 15.247(d)
 Comment: 56VDC

| Test Result | |
|-------------------------------------|------------|
| <input checked="" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

| Channel | FreqRange MHz | RefLevel dBm | Result dBm | Limit dBm | Verdict |
|---------|---------------|--------------|------------|-----------|---------|
| 2440 | 2440 | 2.34 | 2.34 | --- | PASS |
| 2440 | 30~1000 | 2.34 | -67.82 | <=-17.66 | PASS |
| 2440 | 1000~26500 | 2.34 | -52.28 | <=-17.66 | PASS |

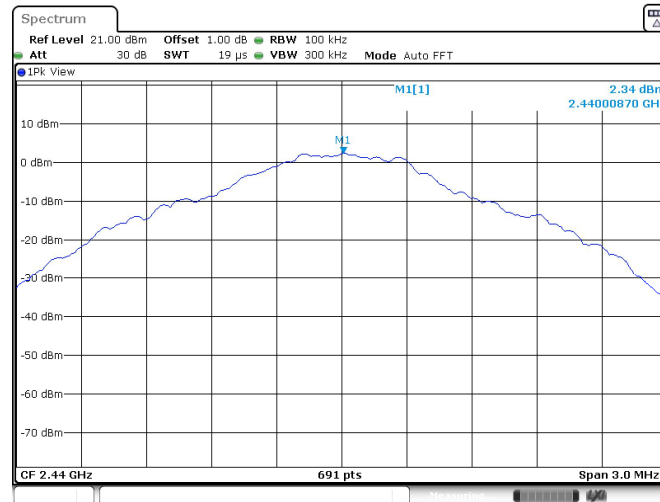


Date: 28 JAN 2022 09:50:18


Spurious Emissions at Antenna Terminals

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2440MHz)
Test Specification: FCC2.1051 & 15.247(d)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

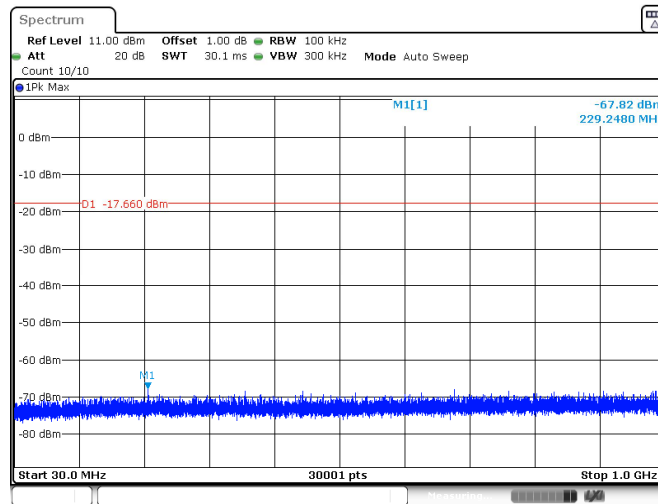

Date: 28.JAN.2022 09:50:24

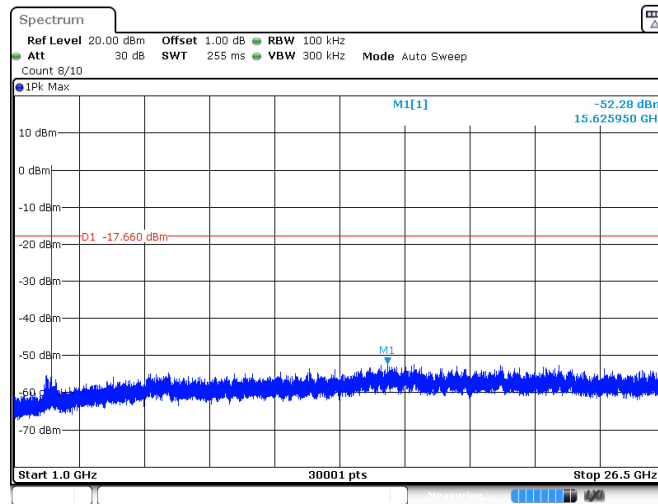


Date: 28.JAN.2022 09:50:32

Spurious Emissions at Antenna Terminals

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC2.1051 & 15.247(d)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

| Channel | FreqRange MHz | RefLevel dBm | Result dBm | Limit dBm | Verdict |
|---------|---------------|--------------|------------|-----------|---------|
| 2480 | 2480 | 1.19 | 1.19 | --- | PASS |
| 2480 | 30~1000 | 1.19 | -68.1 | <=-18.81 | PASS |
| 2480 | 1000~26500 | 1.19 | -52.16 | <=-18.81 | PASS |

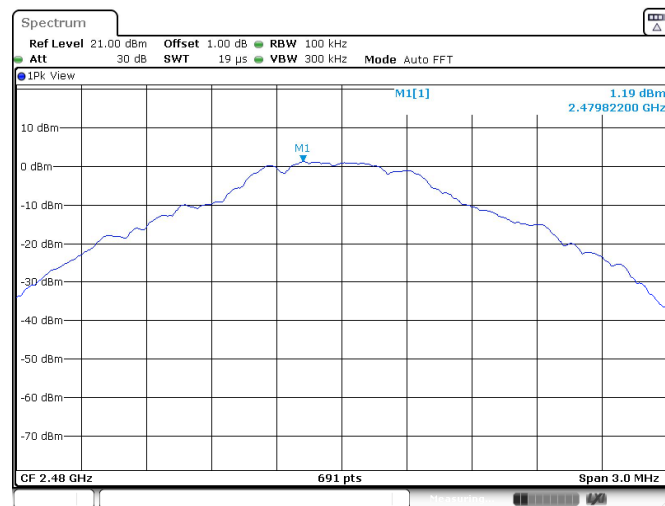


Date: 28.JAN.2022 09:58:42


Spurious Emissions at Antenna Terminals

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC2.1051 & 15.247(d)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

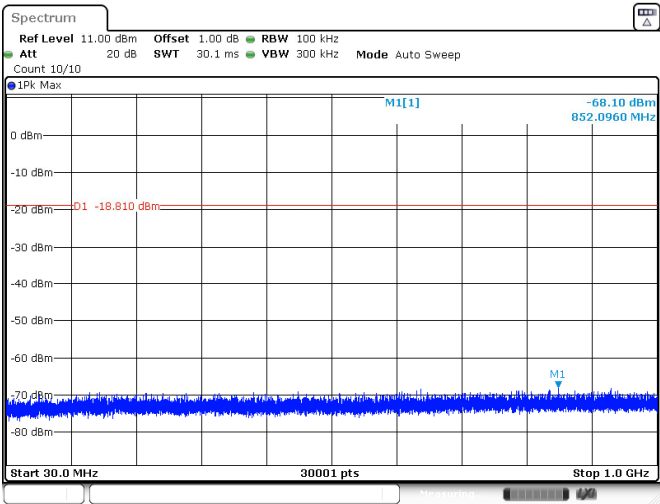

Date: 28.JAN.2022 09:58:49

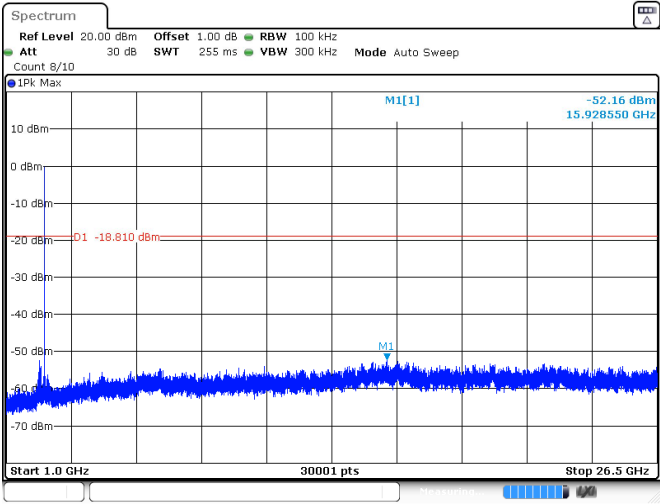


Date: 28.JAN.2022 09:58:56

8.6 100kHz Bandwidth of band edges

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2402MHz)
Test Specification: FCC15.247(d), Conducted
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

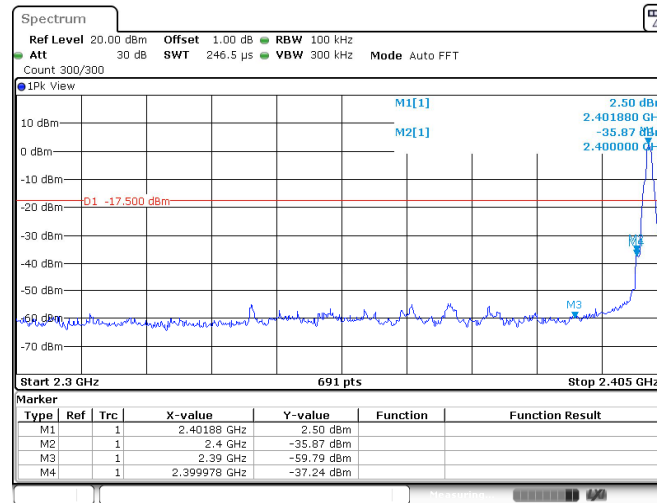


Date: 28.JAN.2022 09:48:26

| Band edges | Limit |
|------------|--------|
| 38.37 dB | > 20dB |

100kHz Bandwidth of band edges

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC15.247(d), Conducted
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

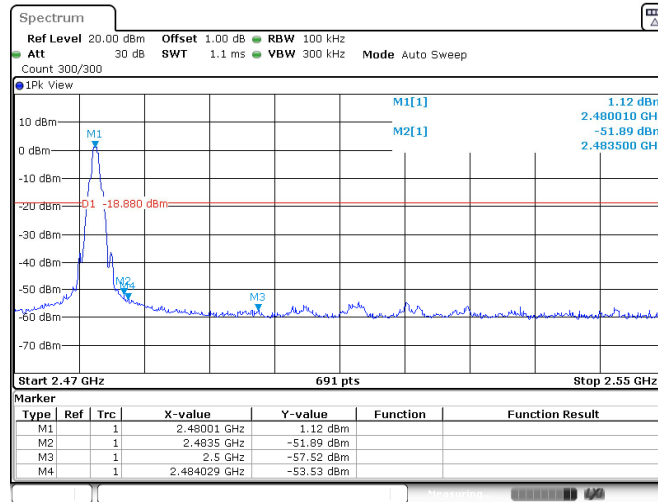


Date: 28 JAN 2022 09:58:37

| Band edges | Limit |
|------------|--------|
| 53.01 dB | > 20dB |

8.7 Power Spectral Density

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2402MHz)
Test Specification: FCC15.247(e)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

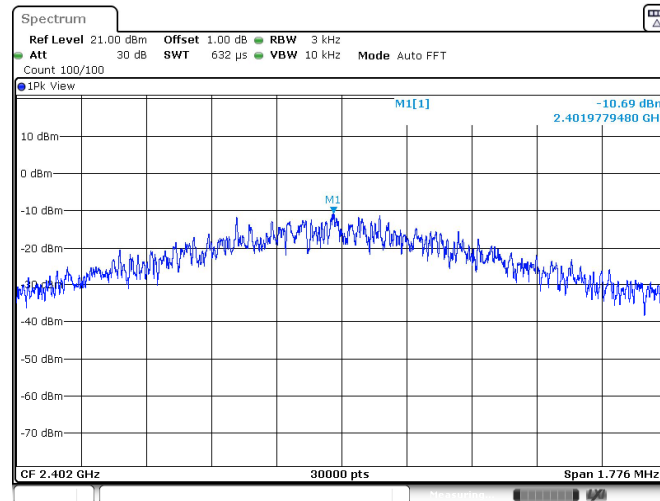


Date: 28.JAN.2022 09:48:17

| PSD | Limit |
|-----------------|--------------|
| -10.69 dBm/3kHz | < 8 dBm/3kHz |

Power Spectral Density

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2440MHz)
Test Specification: FCC15.247(e)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

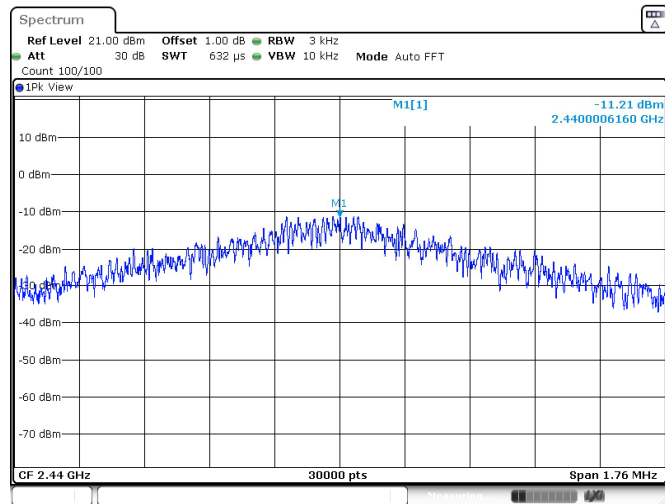


Date: 28 JAN 2022 09:50:12

| PSD | Limit |
|-----------------|--------------|
| -11.21 dBm/3kHz | < 8 dBm/3kHz |

Power Spectral Density

EUT: QTM-EAP10
Op Condition: Operated, TX Mode (2480MHz)
Test Specification: FCC15.247(e)
Comment: 56VDC

Test Result
☒ Passed
☐ Not Passed

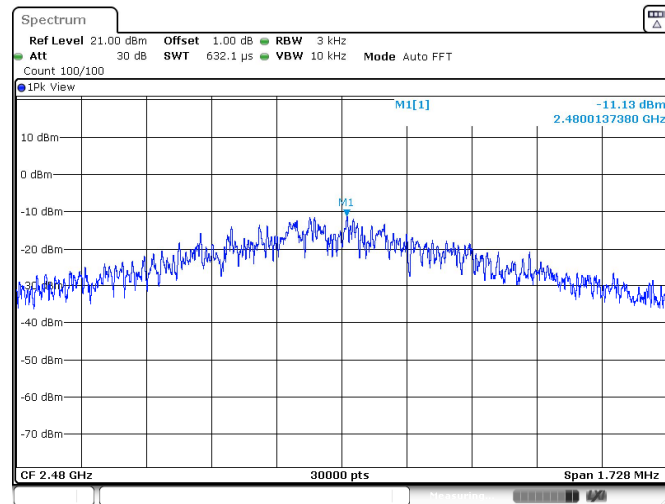

Date: 28 JAN 2022 09:58:28

| PSD | Limit |
|-----------------|--------------|
| -11.13 dBm/3kHz | < 8 dBm/3kHz |

8.8 Antenna Requirement

EUT: QTM-EAP10
Op Condition: Operated, TX Mode
Test Specification: FCC15.203 & 15.247(b)
Comment: 56VDC

| Test Result | |
|--------------------------------------------|------------|
| <input checked="checked" type="checkbox"/> | Passed |
| <input type="checkbox"/> | Not Passed |

Limit

For intentional device, according to FCC Title 47 Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC Title 47 Part 15.247(b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The antenna used in this product is a pre-installed internal PCB antenna, and the maximum gain of this antenna is 3.2dBi. User is not able to open the shell to change the antenna as it is sealed with special screws. So EUT fulfill with 15.203 requirements.

9 Test setup procedure

9.1 Spurious Radiated Emission

Test Method

1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.

3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

5: Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 100 KHz to 120KHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector

function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious

RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function =

peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

a) RBW = 1MHz.

b) VBW \ [3 × RBW].

c) Detector = RMS (power averaging), if [span / (# of points in sweep)] \ RBW / 2.

Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of 1 / D, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section RSS-GEN 8.10, must comply with the radiated emission limits specified in section 15.209.

| Frequency MHz | Field Strength uV/m | Field Strength dBμV/m | Detector |
|------------------|------------------------|--------------------------|----------|
| 30-88 | 100 | 40 | QP |
| 88-216 | 150 | 43.5 | QP |
| 216-960 | 200 | 46 | QP |
| 960-1000 | 500 | 54 | QP |
| Above 1000 | 500 | 54 | AV |
| Above 1000 | 5000 | 74 | PK |

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

9.2 Conducted Emission at AC Power line

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

According to §15.207 & RSS-GEN 8.8, conducted emissions limit as below:

| Frequency MHz | QP Limit dB μ V | AV Limit dB μ V |
|------------------|------------------------|------------------------|
| 0.150-0.500 | 66-56* | 56-46* |
| 0.500-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Remark: “*” Decreasing linearly with logarithm of the frequency

9.3 6dB & 99% Bandwidth

Test Method

1. Use the following spectrum analyzer settings:
RBW=100K, VBW \geq 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Use the automatic bandwidth measurement capability of an instrument, may be employed using the X dB bandwidth mode with X set to 6 dB, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be \geq 6 dB.
3. Allow the trace to stabilize, record the X dB Bandwidth value.

Limit

Limit [kHz]

≥ 500

9.4 Peak Output Power

Test Method

1. Connect the spectrum analyzer to the EUT
 - a) The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
 - b) At all times the EUT is transmitting at its maximum power control level.
 - c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

Limits

According to §15.247 (b) (1) & RSS-247 5.4(d), conducted peak output power limit as below:

| Frequency Range MHz | Limit W | Limit dBm |
|------------------------|------------|--------------|
| 2400-2483.5 | ≤ 1 | ≤ 30 |

For e.i r.p:

| Frequency Range MHz | Limit W | Limit dBm |
|------------------------|------------|--------------|
| 2400-2483.5 | ≤ 4 | ≤ 30 |

9.5 Spurious Emissions at Antenna Terminals

Test Method

1. Establish a reference level by using the following procedure:
 - a. Set RBW=100 kHz. VBW \geq 3RBW. Detector =peak, Sweep time = auto couple, Trace mode = max hold.
 - b. Allow trace to fully stabilize, use the peak marker function to determine the maximum PSD level.
2. Use the maximum PSD level to establish the reference level.
 - a. Set the center frequency and span to encompass frequency range to be measured.
 - b. Use the peak marker function to determine the maximum amplitude level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements, report the three highest emissions relative to the limit.
3. Repeat above procedures until other frequencies measured were completed.

Limit

| Frequency Range MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000 | -20 |

9.6 100kHz Bandwidth of band edges

Test Method

- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold.
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.

Limit

| Frequency Range MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000 | -20 |

9.7 Power Spectral Density

Test Method

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance:

1. Set analyzer center frequency to DTS channel center frequency. RBW=3kHz, VBW \geq 3RBW, Span=1.5 times DTS bandwidth, Detector=Peak, Sweep=auto, Trace= max hold.
2. Allow trace to fully stabilize, use the peak marker function to determine the maximum amplitude level within the RBW.
3. Repeat above procedures until other frequencies measured were completed.

Limit

Limit [dBm/3KHz]

≤ 8

10 Appendix A - General Product Information

Radiofrequency radiation exposure evaluation

This exposure evaluation is intended for **FCC ID: 2AX6LQTMEAP10**

According to FCC CFR 47 part1 §1.1310, Part 2 §2.1091, and KDB447498 D01 General RF Exposure Guidance v06, As specified in Table 1B of 47 CFR 1.1310 – Limits for Maximum Permissible Exposure (MPE), Limits for General Population/Uncontrolled Exposure

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *100 | 30 |
| 1.34-30 | 824/f | 2.19/f | *180/f ² | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1,500 | | | f/1500 | 30 |
| 1,500-100,000 | | | 1.0 | 30 |

MPE calculation method:

$P_d = (P \cdot G) / (4 \cdot \pi \cdot R^2)$, where

P_d = power density in mW/cm²

P = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = calculation distance in cm

>> The limit of Power density in 2402-2480MHz band is 1 mW/cm²

>> The antenna gain is 3.2dBi (=2.09 in linear scale).

Manufacturer specified the separation distance is: 20cm

The max. power (calculated power + tune up tolerance) of EUT in 2402-2483.5MHz band is: 2.21mW

>> The calculated P_d for the EUT in 2402-2480MHz band is 0.00092mW/cm²


>> So, the calculated P_d is smaller than the threshold of the limit.

Therefore, the device is exempt from stand-alone SAR test requirements.

Appendix A**Calculated Data**


| | |
|-----------------------------------------------------------------------------|---------|
| Maximum peak output power at antenna input terminal (dBm): | 3.44 |
| Maximum peak output power at antenna input terminal (mW): | 2.21 |
| Prediction distance (cm): | 20 |
| Maximum Antenna Gain, typical (dBi): | 3.2 |
| Maximum Antenna Gain (numeric): | 2.09 |
| The worst case is power density at predication frequency at 20 cm (mW/cm2): | 0.00092 |

Reviewed by:



Eric LI
EMC Project Manager

Prepared by:



Hosea CHAN
EMC Project Engineer