



802.11n-HT40: Band Edge, Left Side

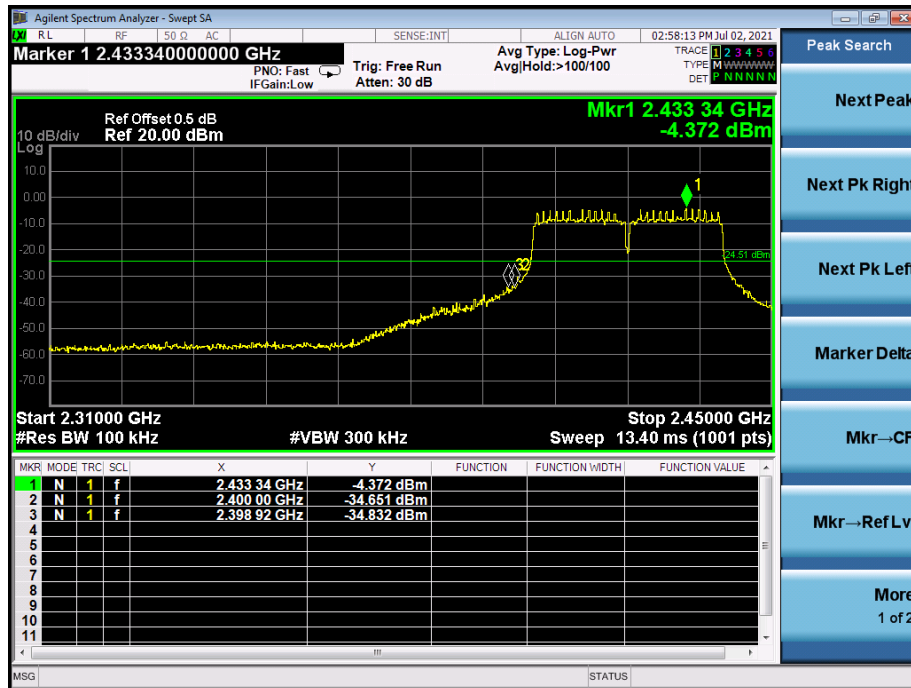

802.11n-HT40: Band Edge, Right Side

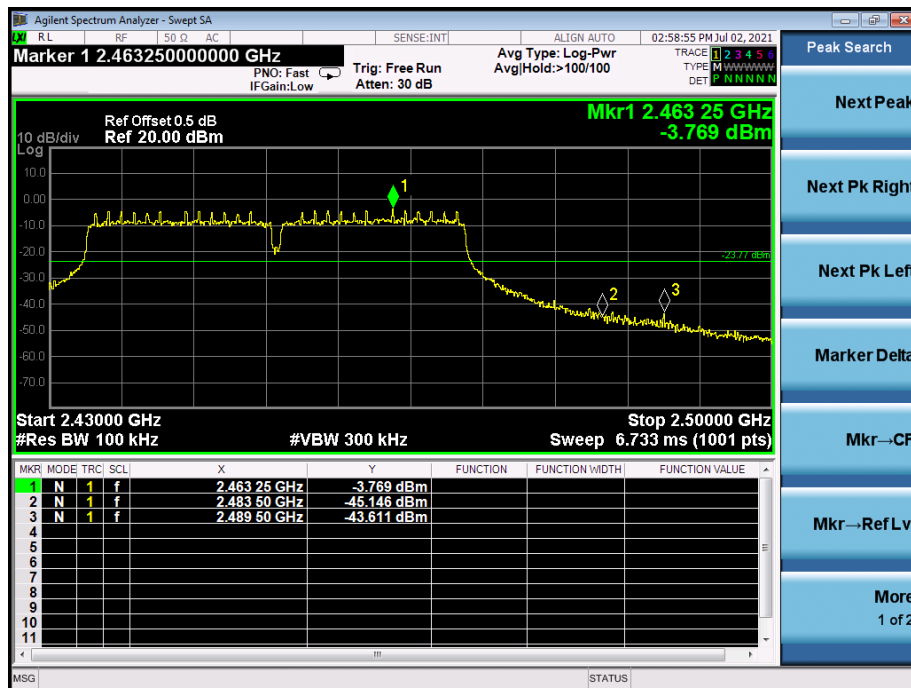


CONDUCTED EMISSION MEASUREMENT


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

802.11b


Low Channel 2412MHz

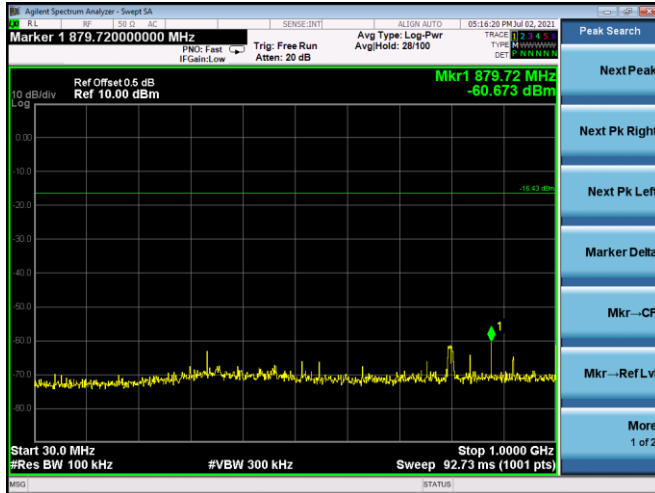

Middle Channel 2437MHz

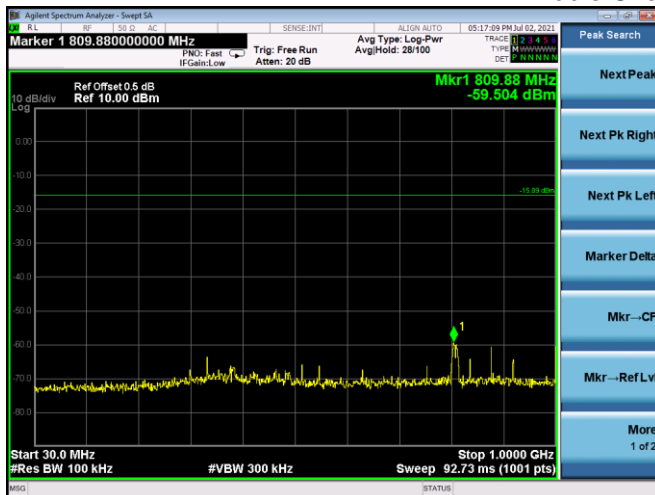


High Channel 2462MHz

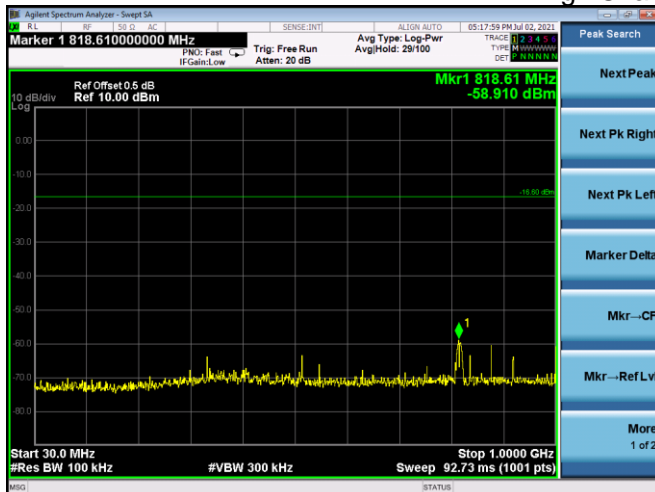


802.11g


Low Channel 2412MHz

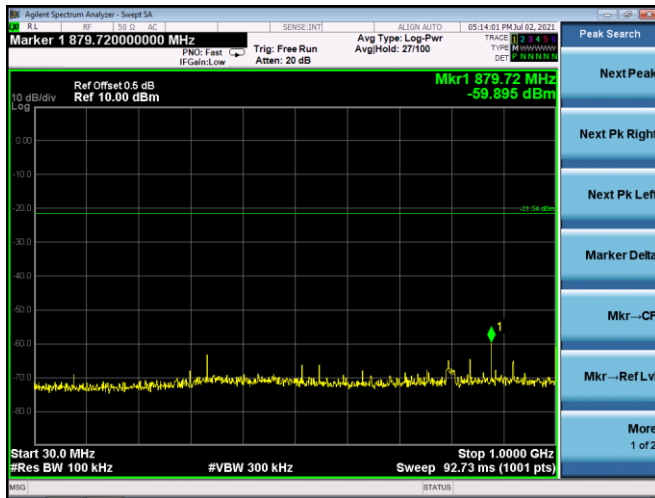

Middle Channel 2437MHz

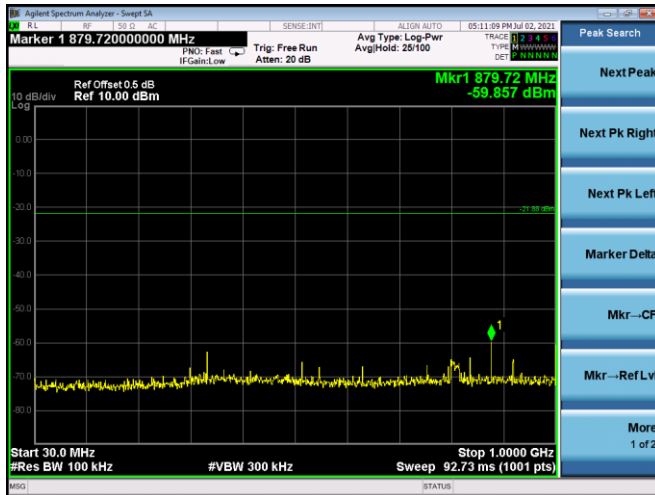


High Channel 2462MHz

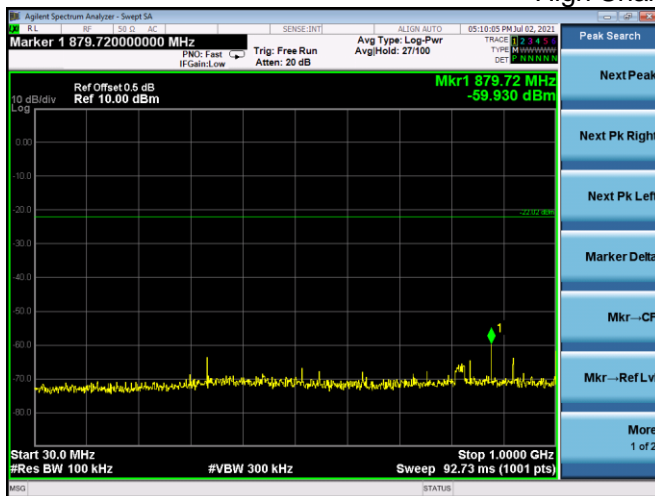


802.11n20


Low Channel 2412MHz

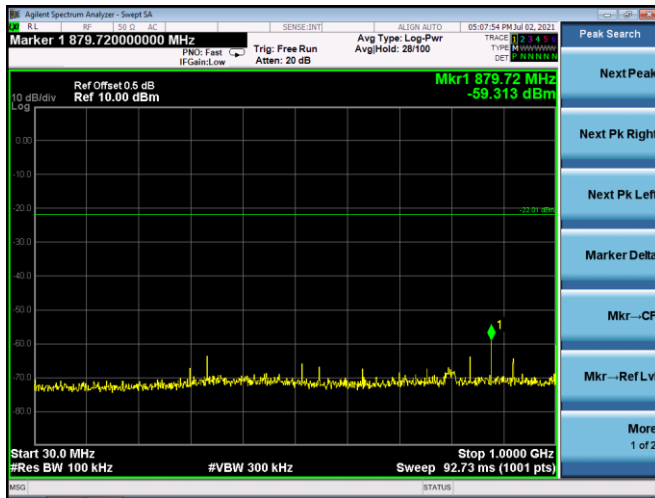

Middle Channel 2437MHz

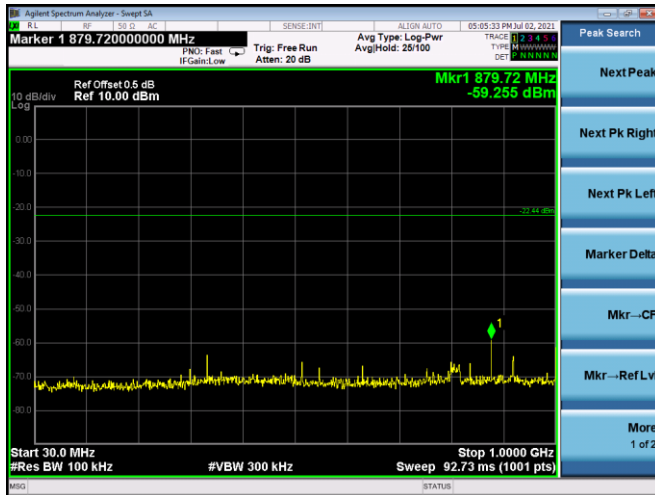


High Channel 2462MHz

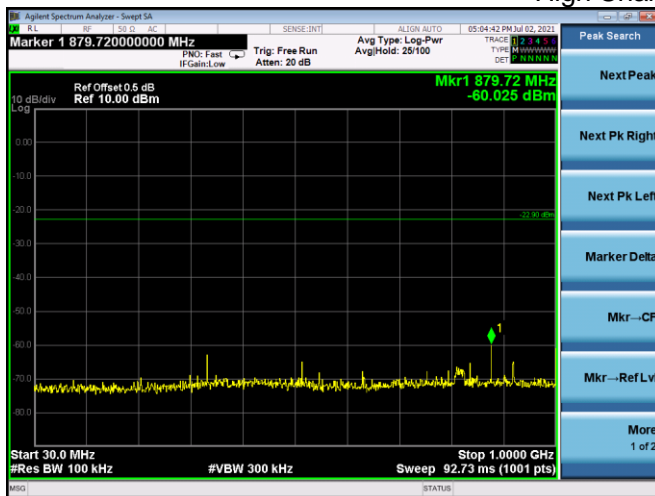


802.11n40


Low Channel 2422MHz

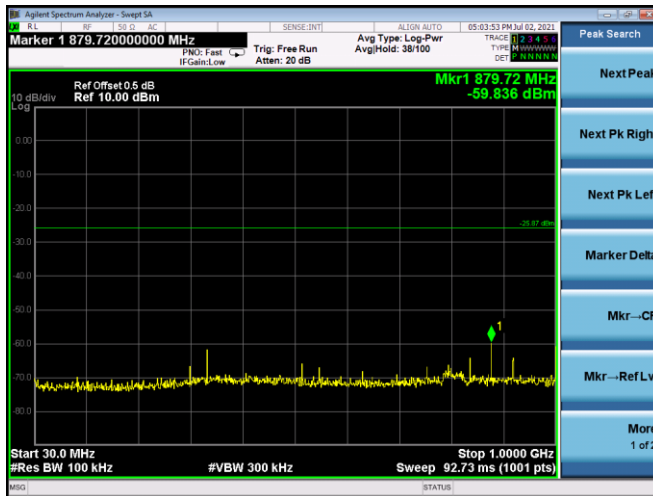

Middle Channel 2437MHz

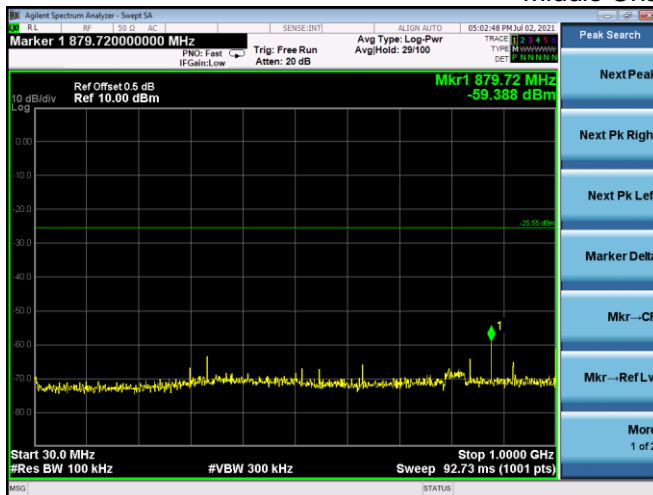

High Channel 2452MHz

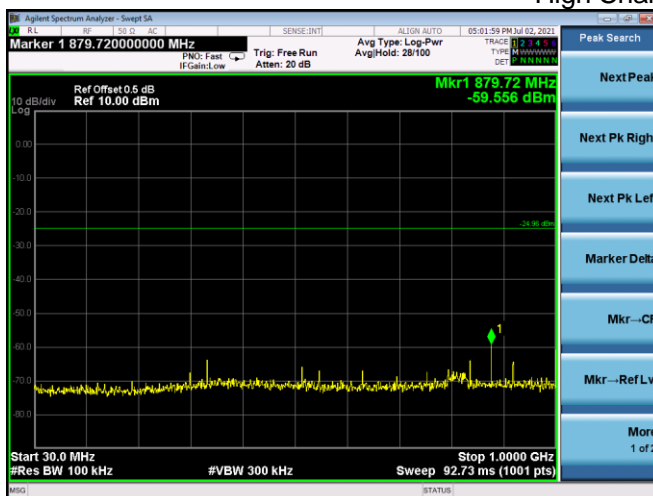

9. DUTY CYCLE OF TEST SIGNAL

9.1 STANDARD REQUIREMENT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

9.2 FORMULA:

Duty Cycle = $T_{on} / (T_{on} + T_{off})$


Measurement Procedure:

1. Set span = Zero
2. RBW = 8MHz
3. VBW = 8MHz,
4. Detector = Peak


Duty Cycle:

	Duty Cycle	Duty Fator (dB)
802.11b	1	0
802.11g	1	0
802.11n(HT20)	1	0
802.11n(HT40)	1	0


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

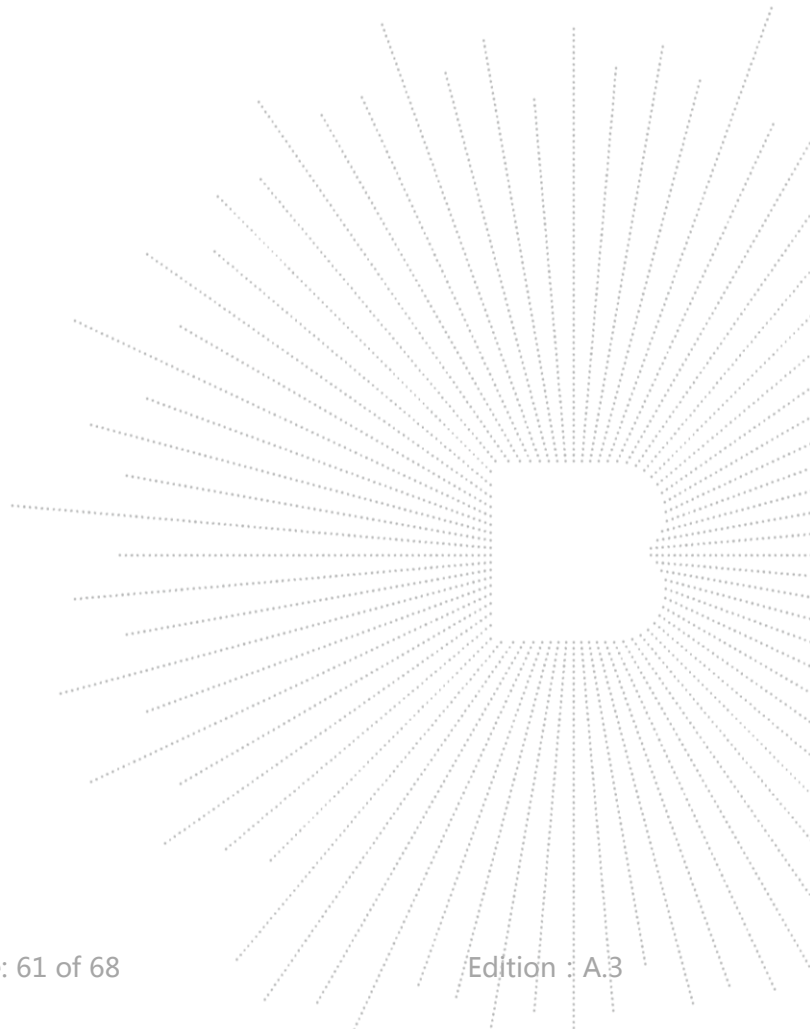


802.11b

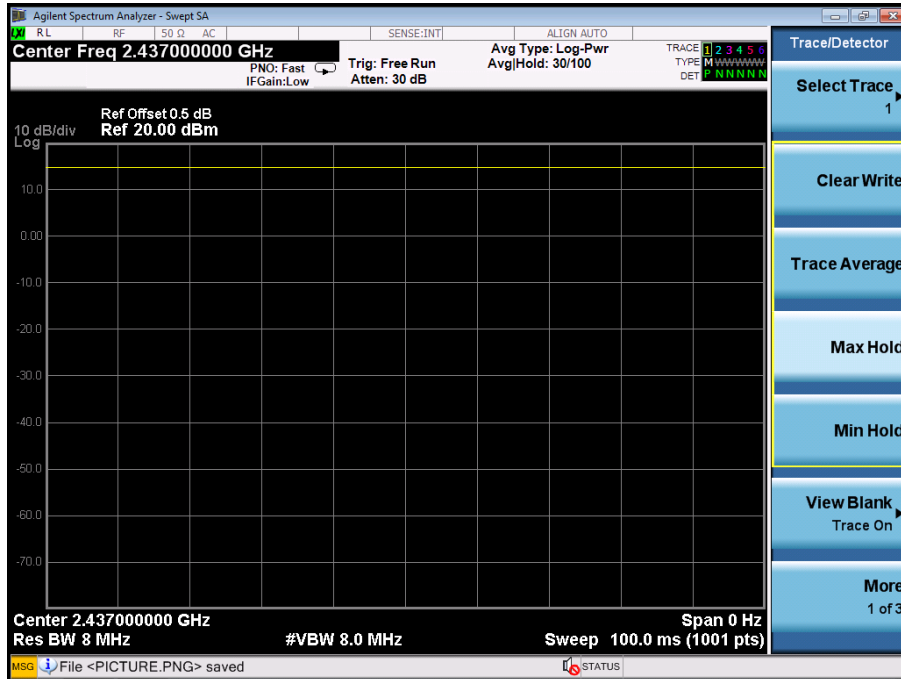


802.11g

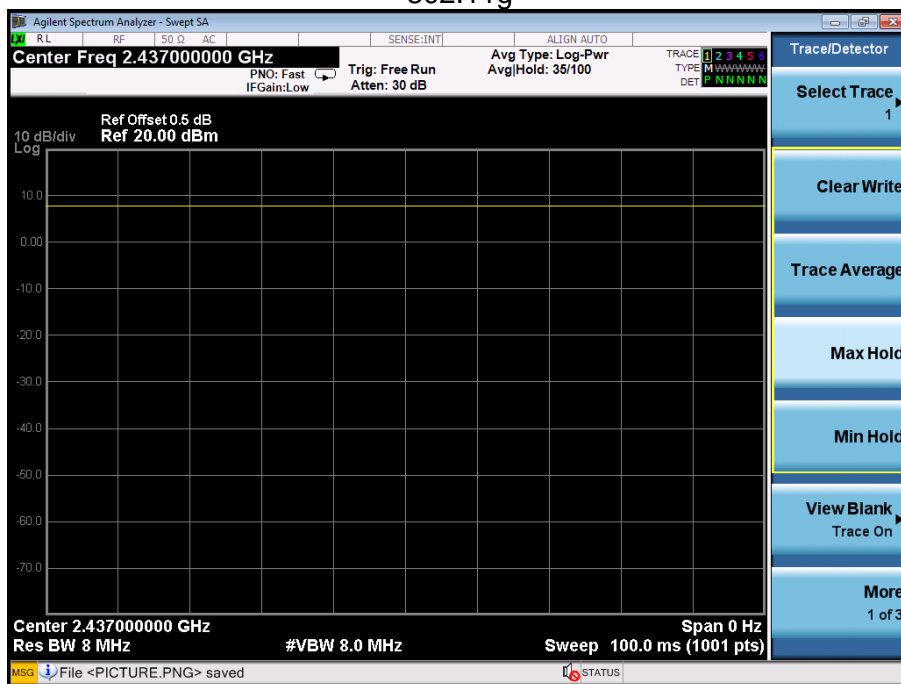

802.11n(HT20)

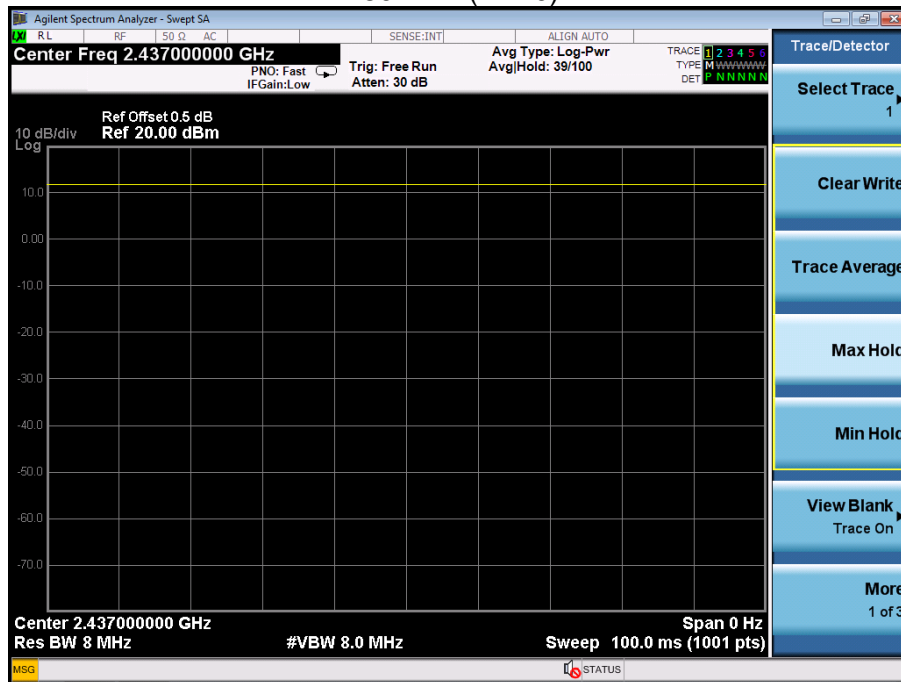

802.11n(HT40)

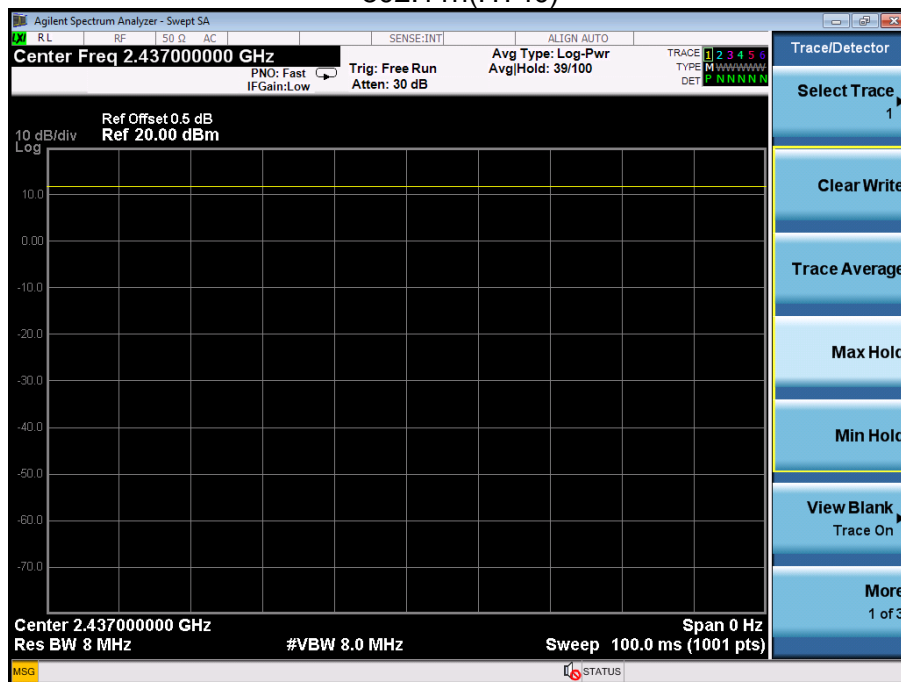


10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is External antenna, antenna(A) Gain 2dBi, antenna(B) Gain 2dBi, impedance 50Ω. It comply with the standard requirement.

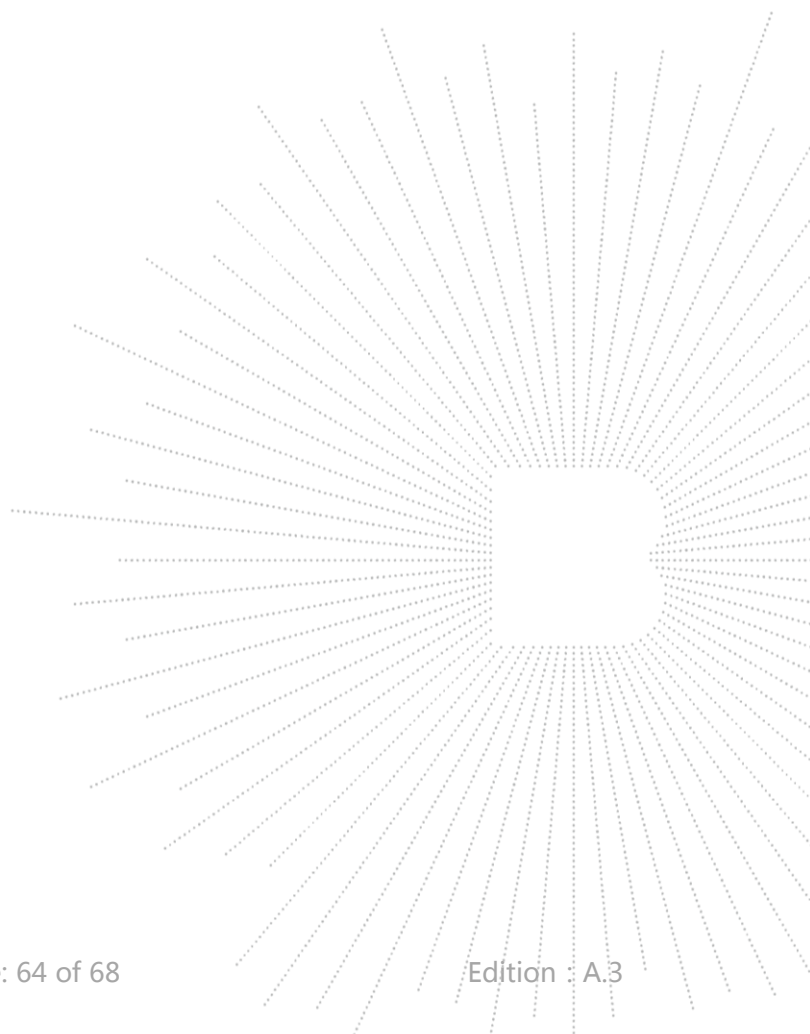



11. EUT TEST PHOTO

Conducted Measurement Photos



Radiated Measurement Photos

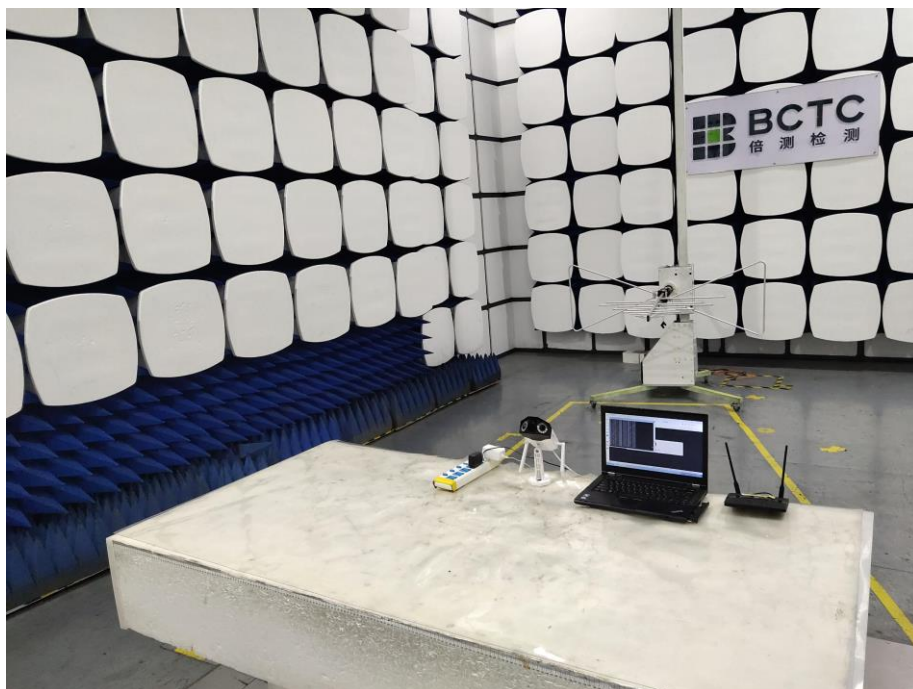

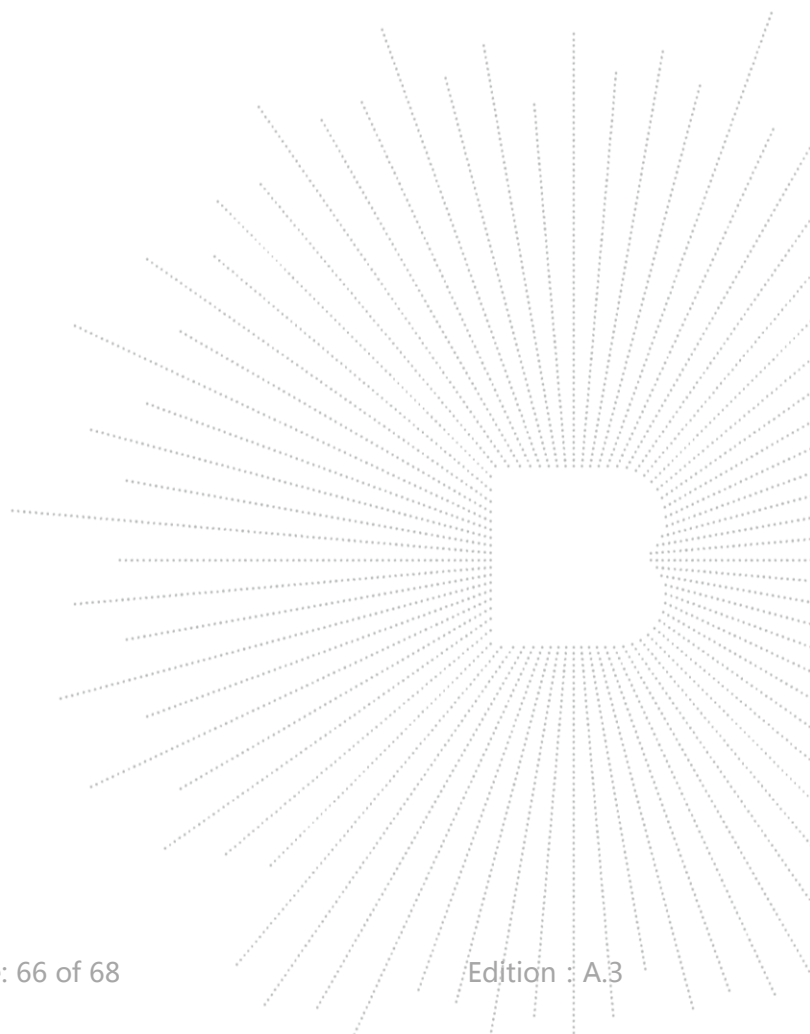

12. EUT PHOTO**EUT Photo 1****EUT Photo 2**

STATEMENT

- 1.The equipment lists are traceable to the national reference standards.
- 2.The test report can not be partially copied unless prior written approval is issued from our lab.
- 3.The test report is invalid without stamp of laboratory.
- 4.The test report is invalid without signature of person(s) testing and authorizing.
- 5.The test process and test result is only related to the Unit Under Test.
- 6.The quality system of our laboratory is in accordance with ISO/IEC17025.
- 7.If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL : 400-788-9558

P. C.: 518103

FAX : 0755-33229357

Website : <http://www.chnbctc.com>

E-Mail : bctc@bctc-lab.com.cn

***** END *****