





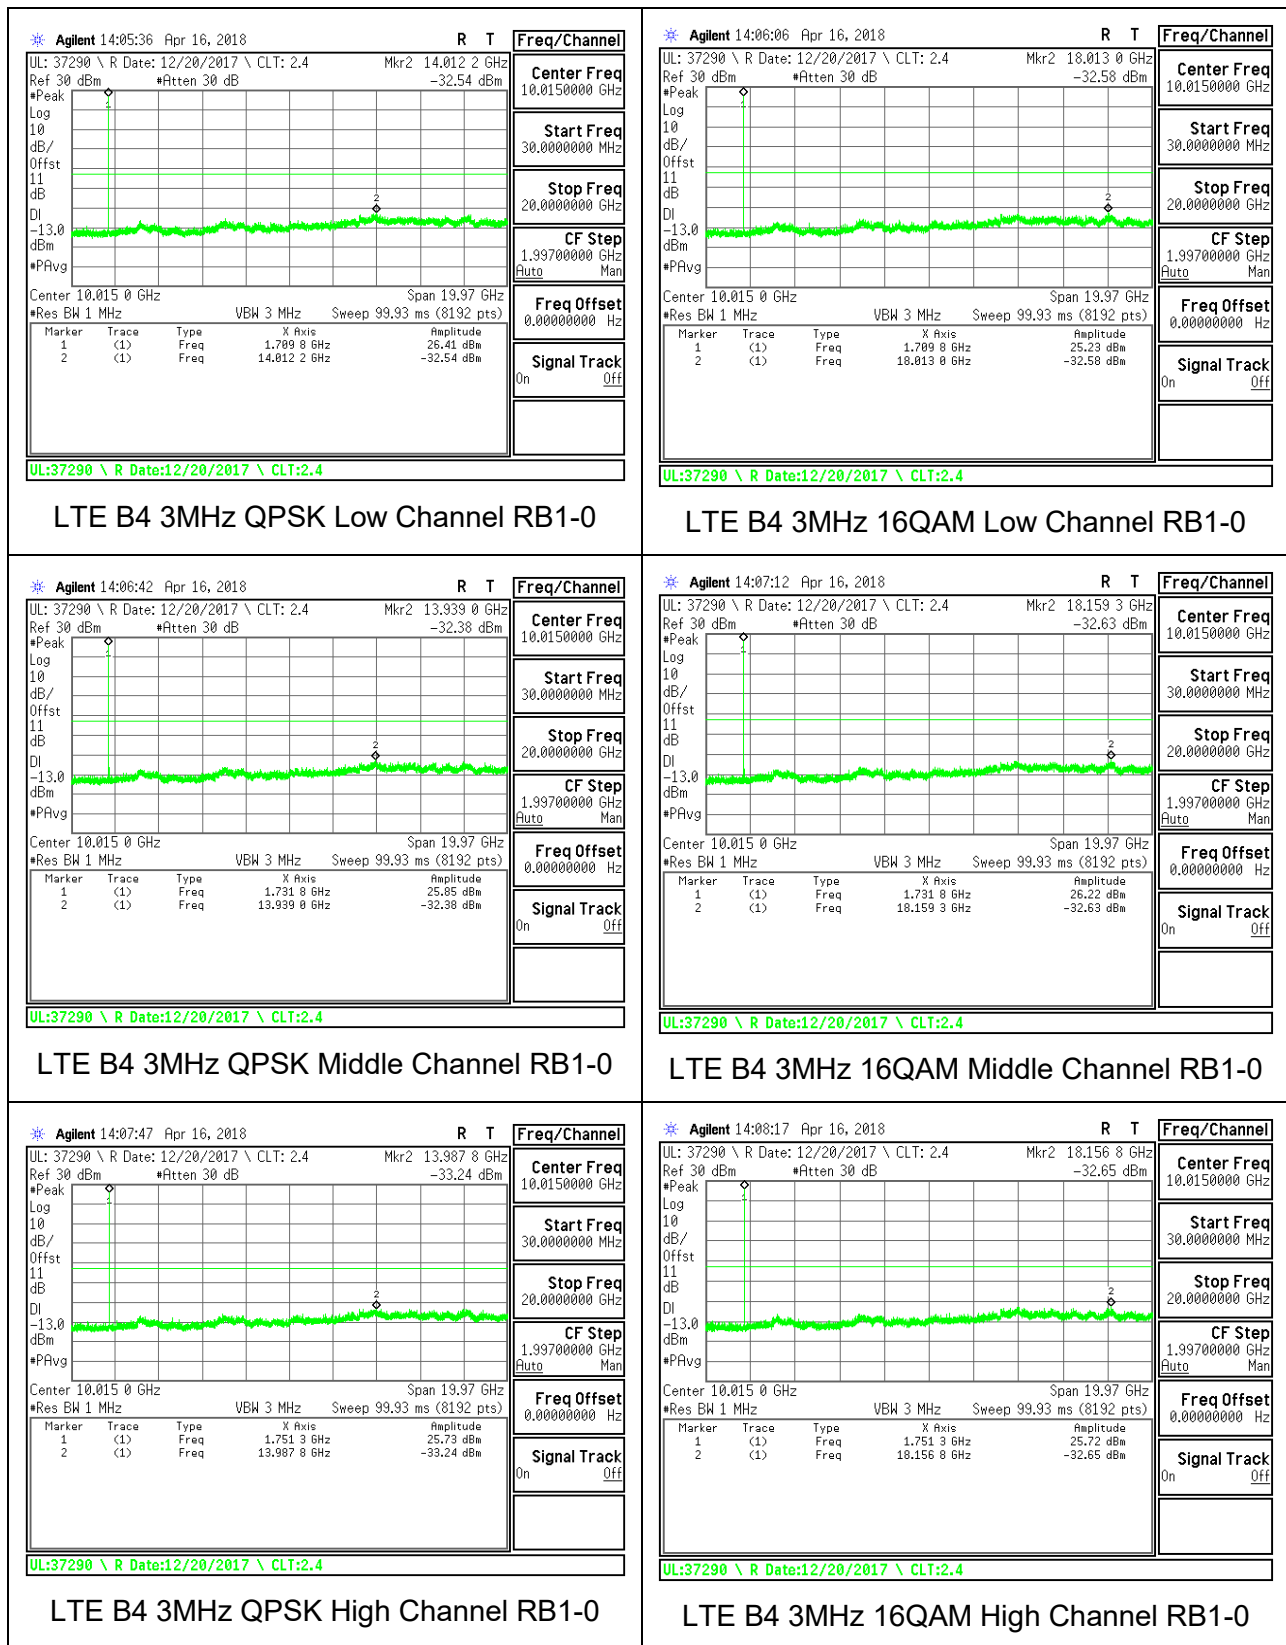

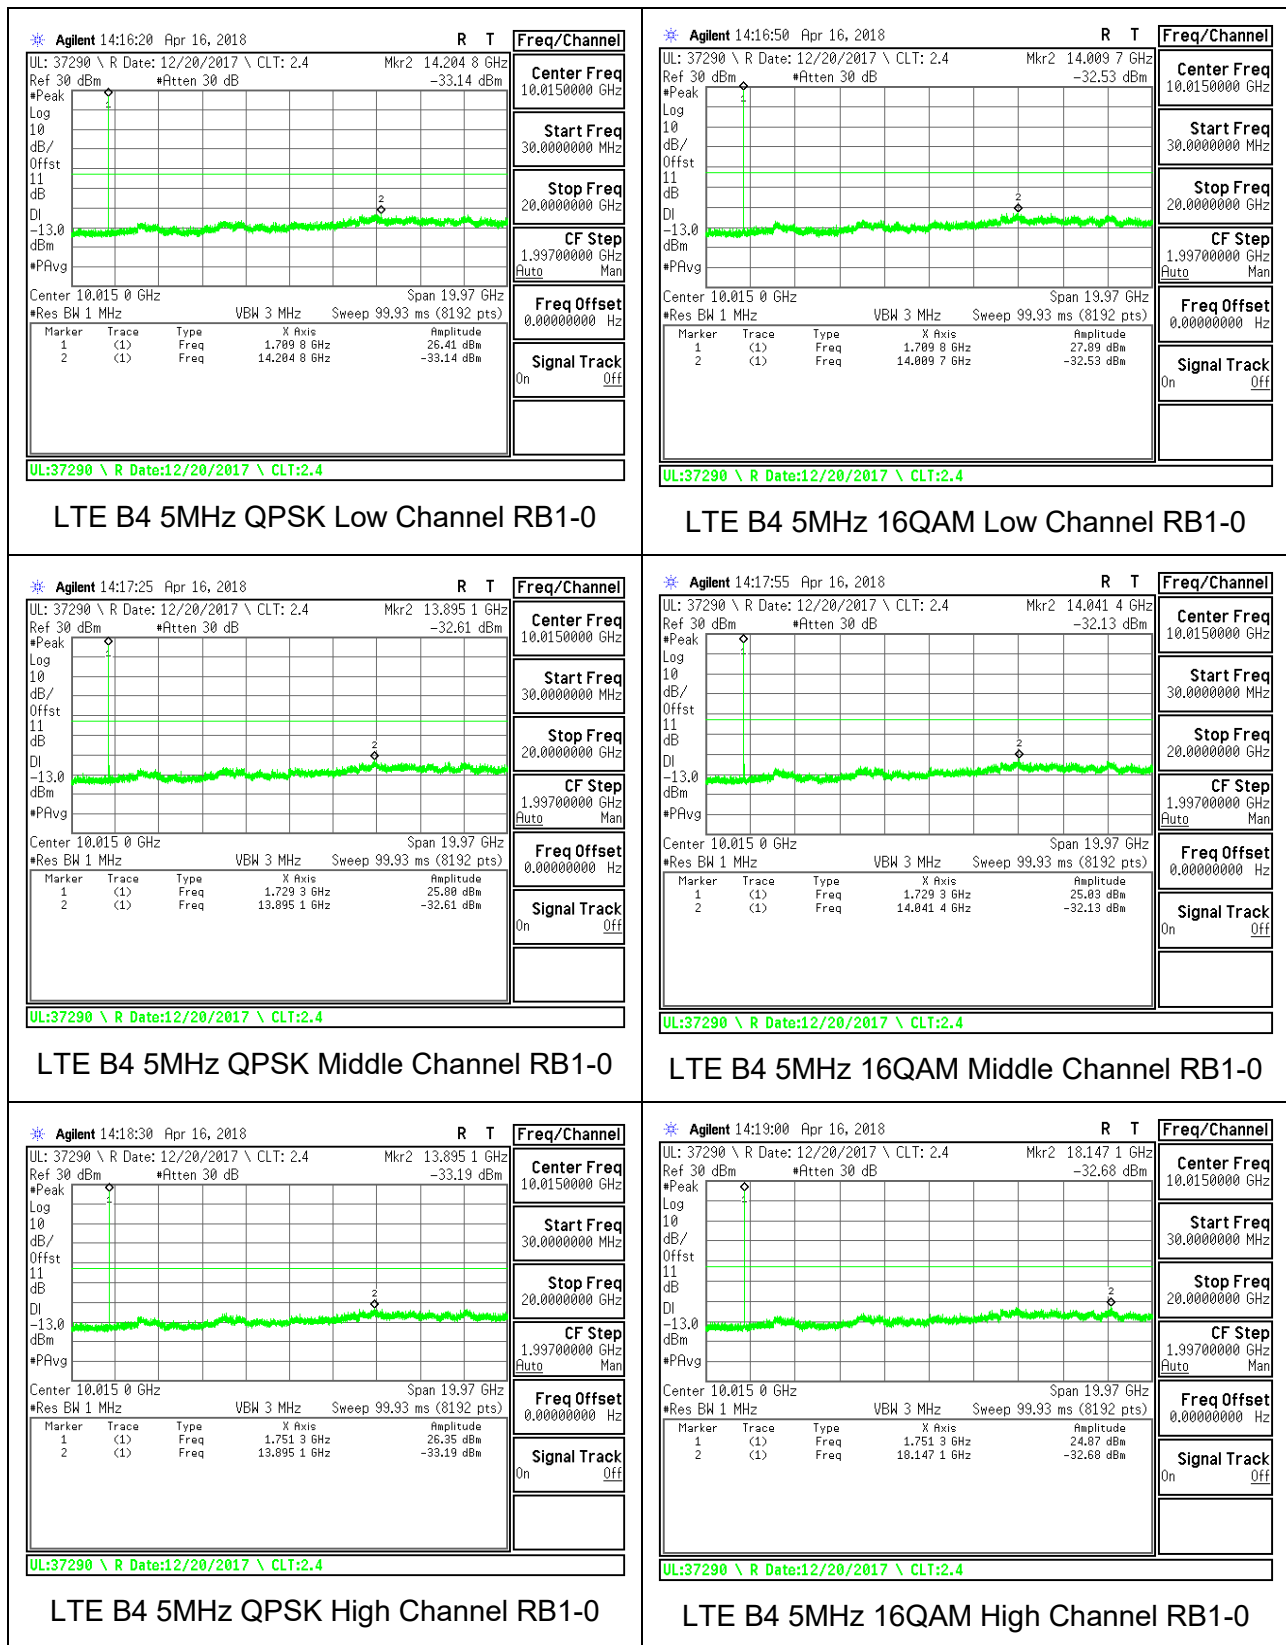


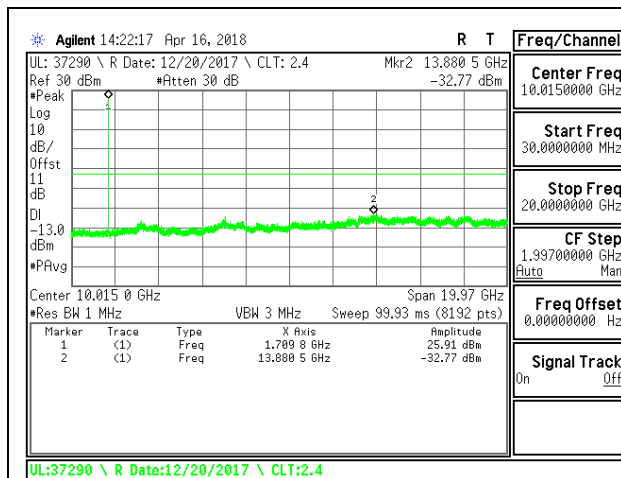


LTE B4 10MHz QPSK Low Channel RB1-0

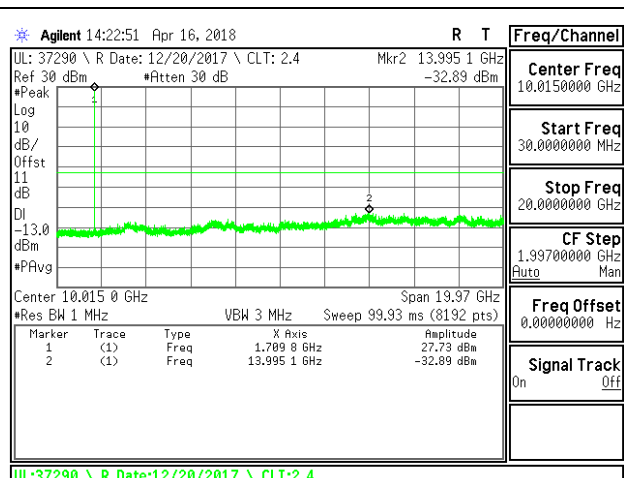


LTE B4 10MHz 16QAM Low Channel RB1-0

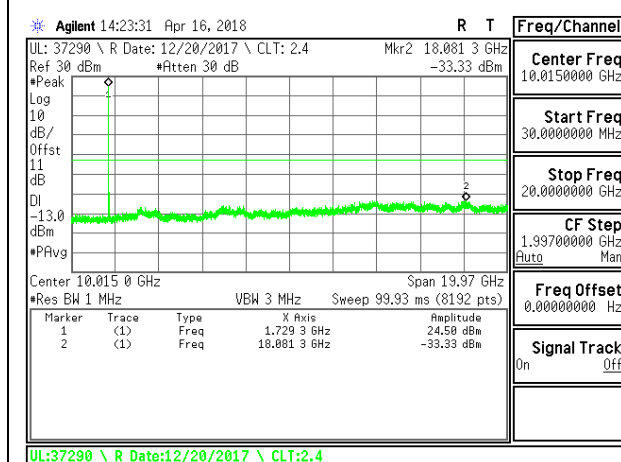


LTE B4 10MHz QPSK Middle Channel RB1-0

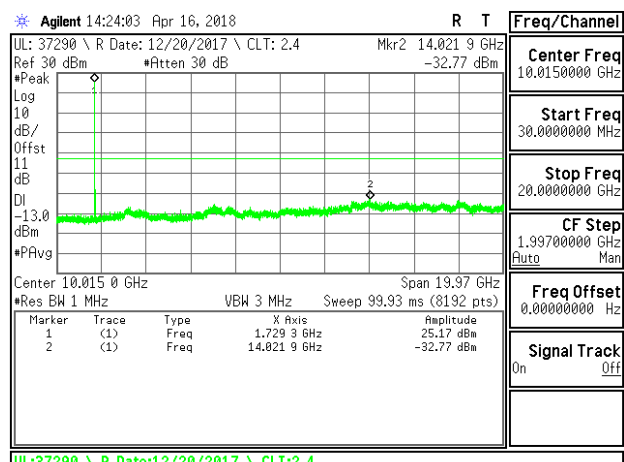


LTE B4 10MHz 16QAM Middle Channel RB1-0

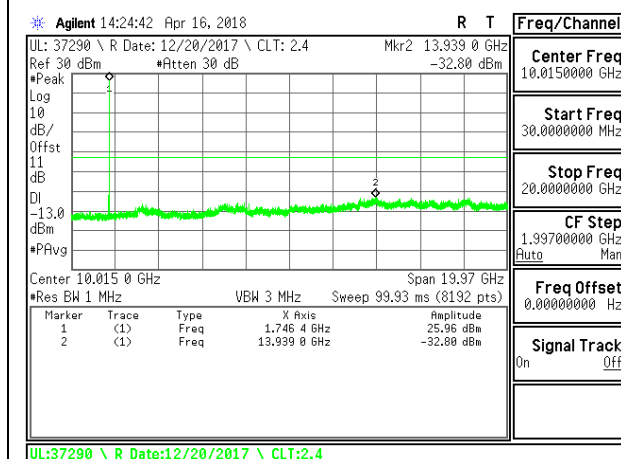


LTE B4 10MHz QPSK High Channel RB1-0

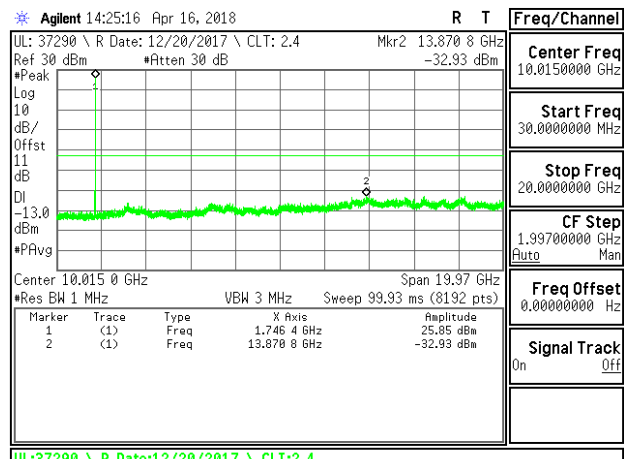


LTE B4 10MHz 16QAM High Channel RB1-0

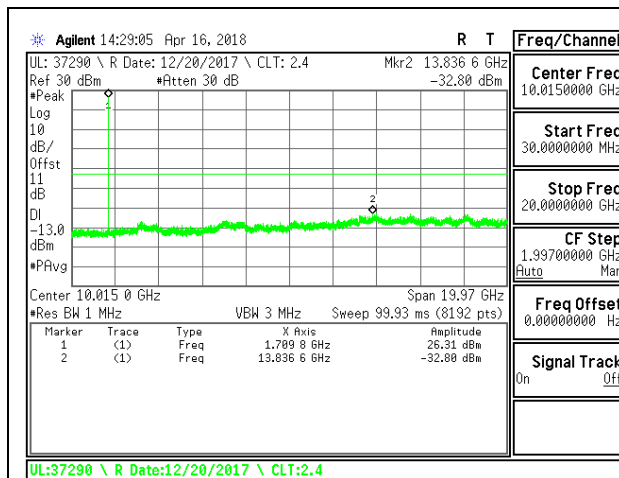


LTE B4 15MHz QPSK Low Channel RB1-0

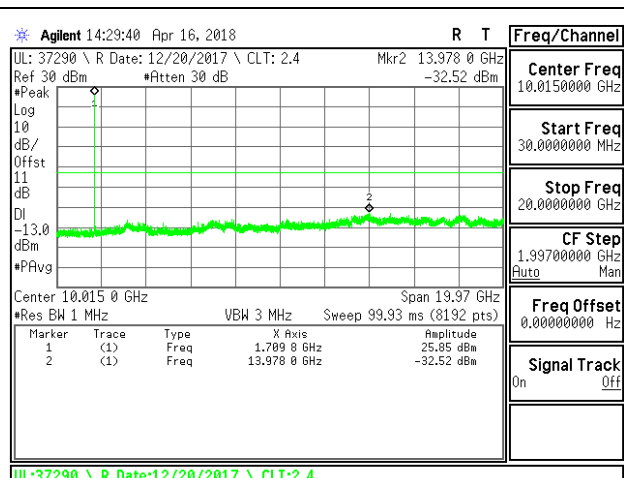


LTE B4 15MHz 16QAM Low Channel RB1-0

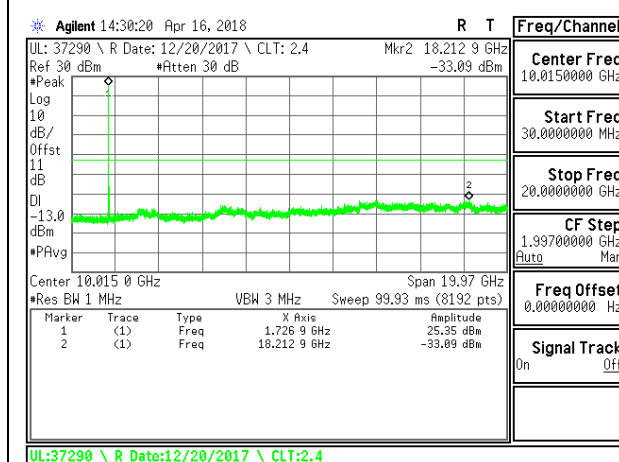


LTE B4 15MHz QPSK Middle Channel RB1-0

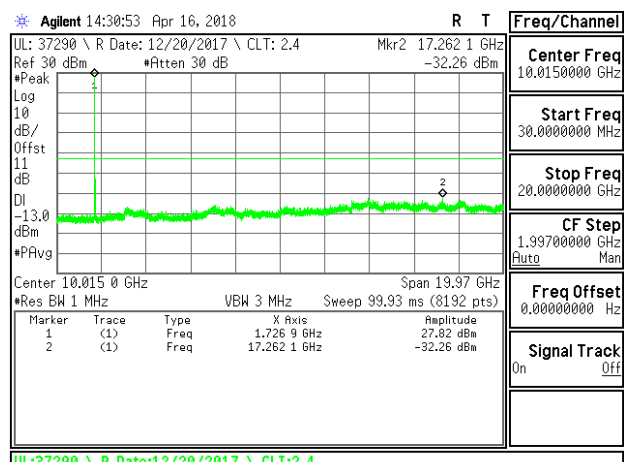


LTE B4 15MHz 16QAM Middle Channel RB1-0

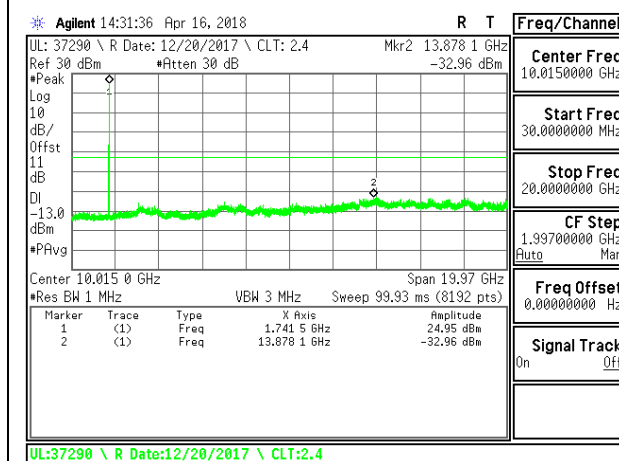


LTE B4 15MHz QPSK High Channel RB1-0

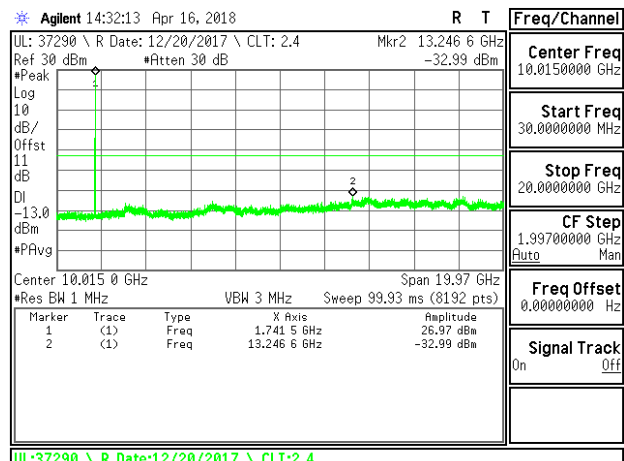


LTE B4 15MHz 16QAM High Channel RB1-0

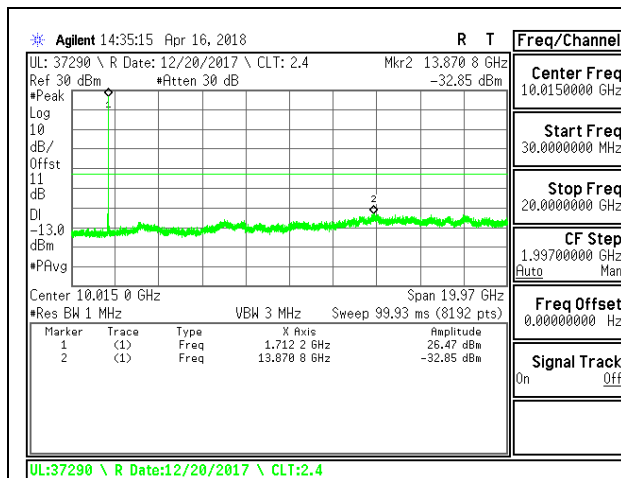


LTE B4 20MHz QPSK Low Channel RB1-0

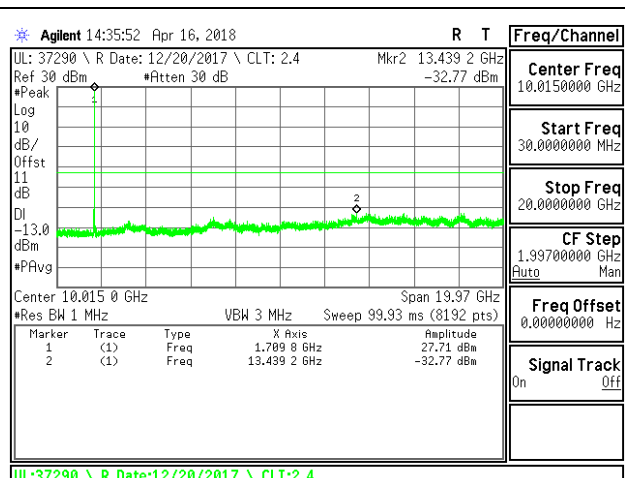


LTE B4 20MHz 16QAM Low Channel RB1-0

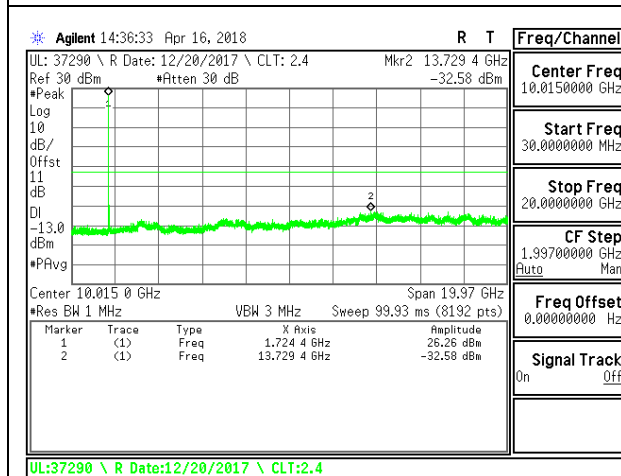


LTE B4 20MHz QPSK Middle Channel RB1-0

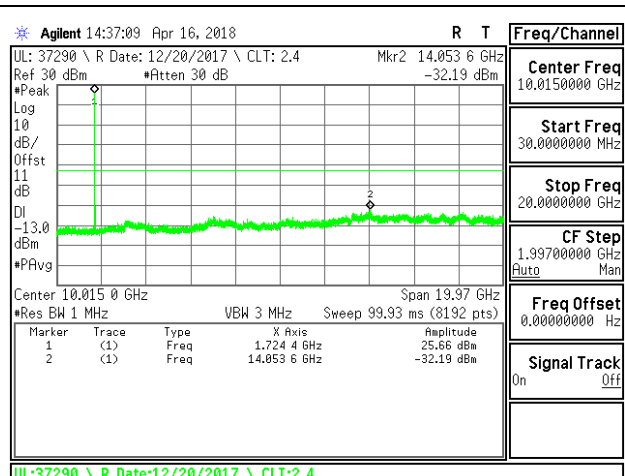

LTE B4 20MHz 16QAM Middle Channel RB1-0

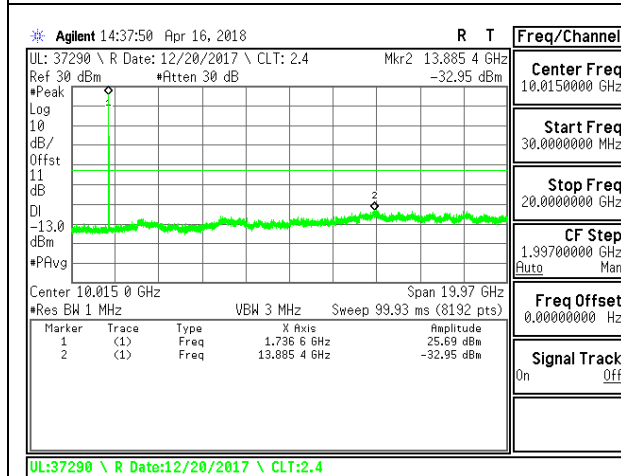



LTE B4 20MHz QPSK High Channel RB1-0

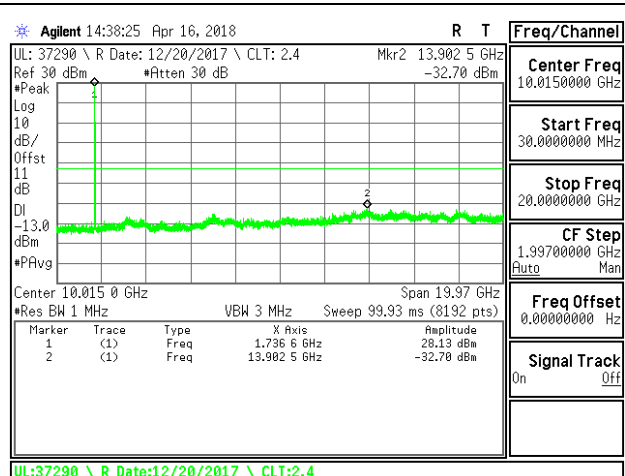


LTE B4 20MHz 16QAM High Channel RB1-0

8.3.7. LTE BAND 5

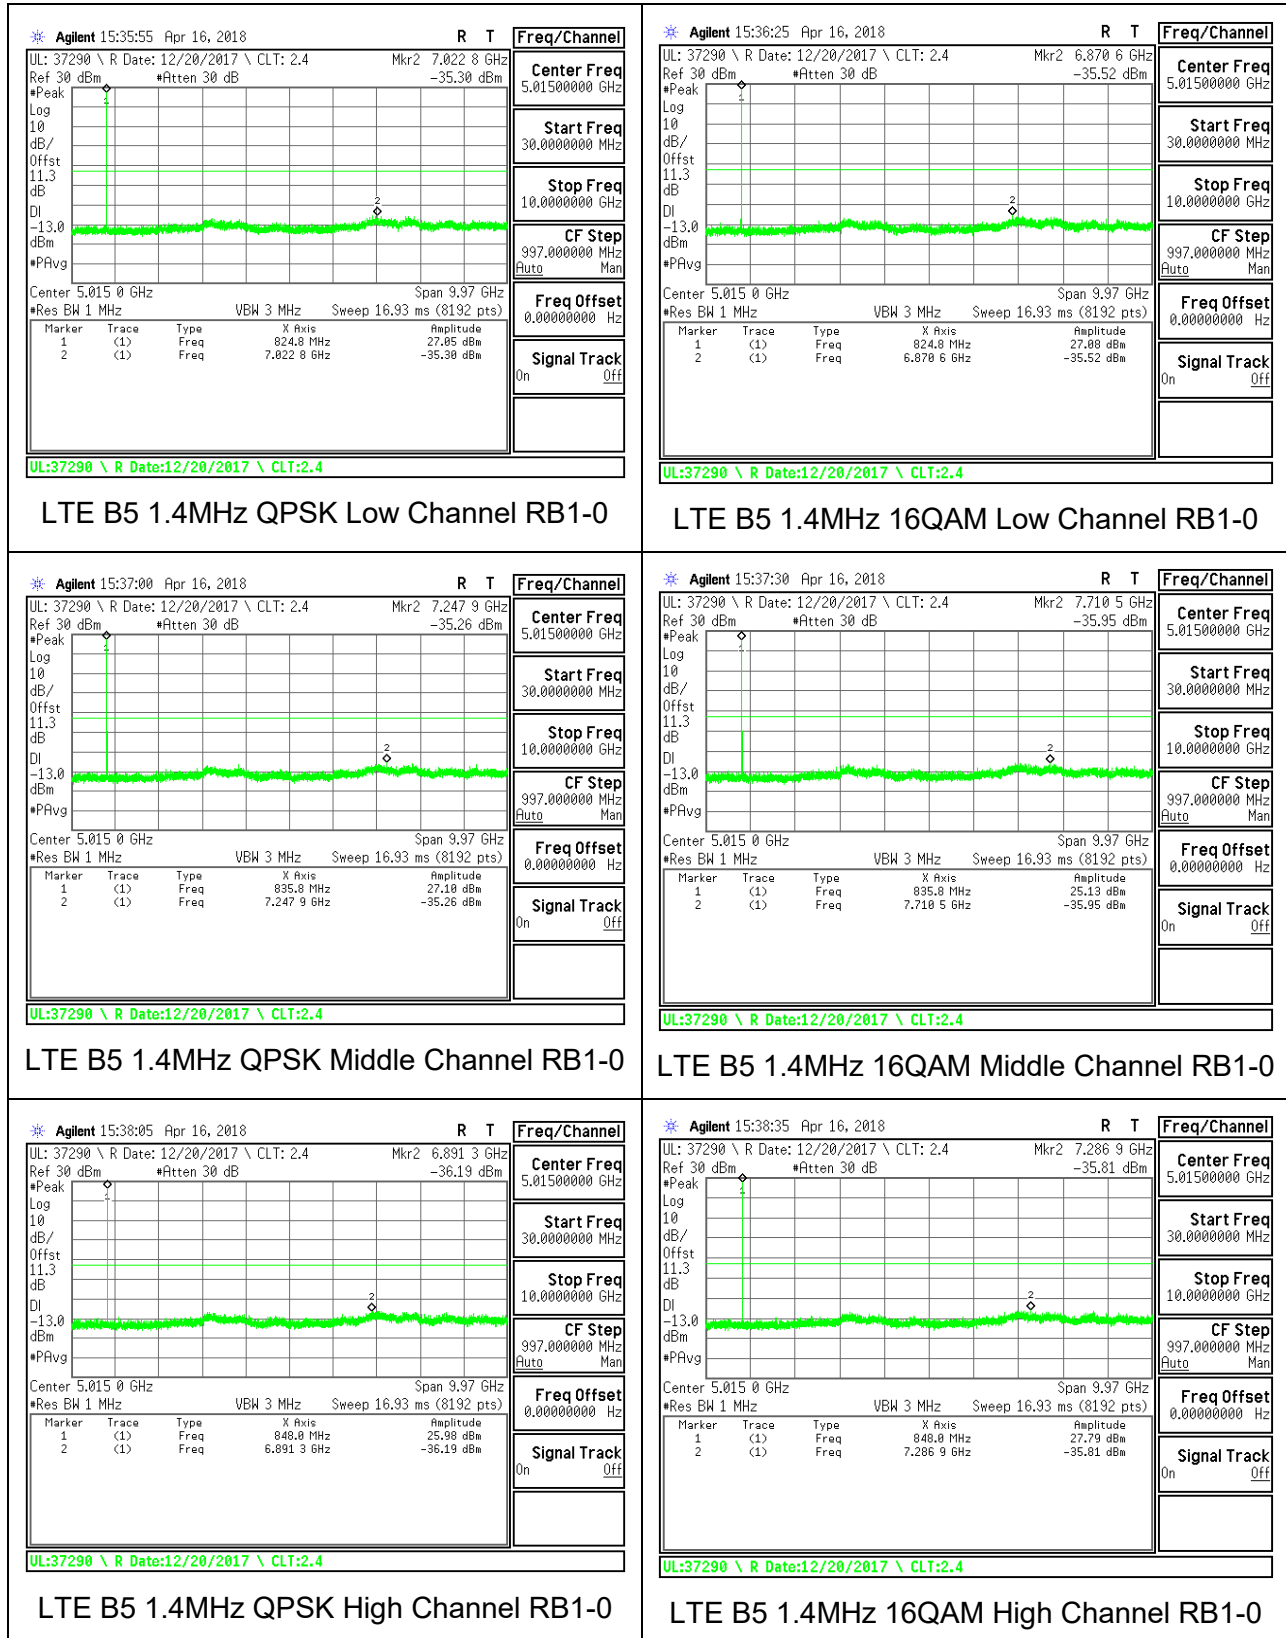


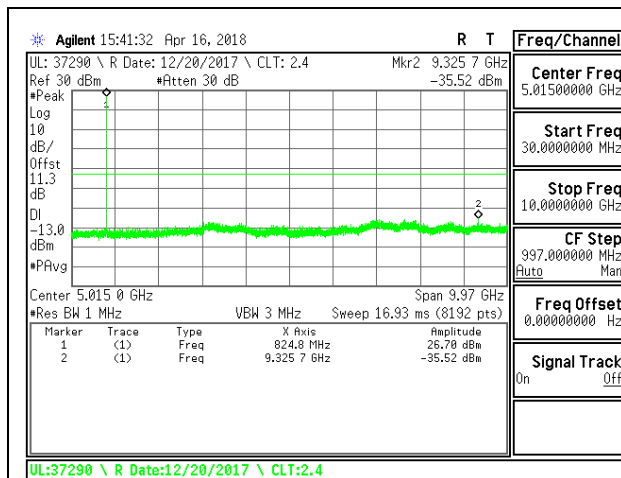


LTE B5 3MHz QPSK Low Channel RB1-0

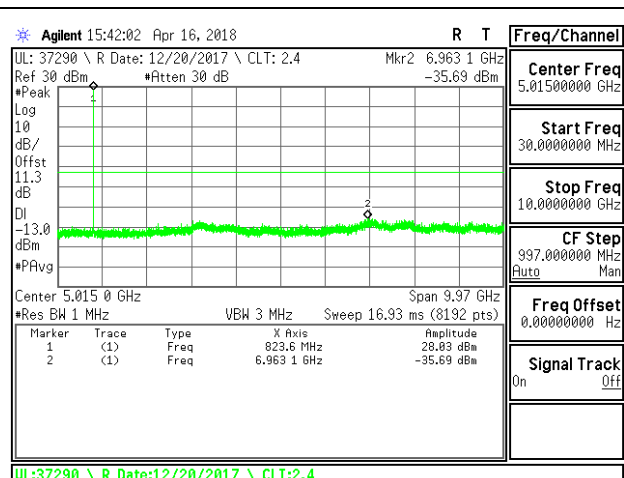


LTE B5 3MHz 16QAM Low Channel RB1-0

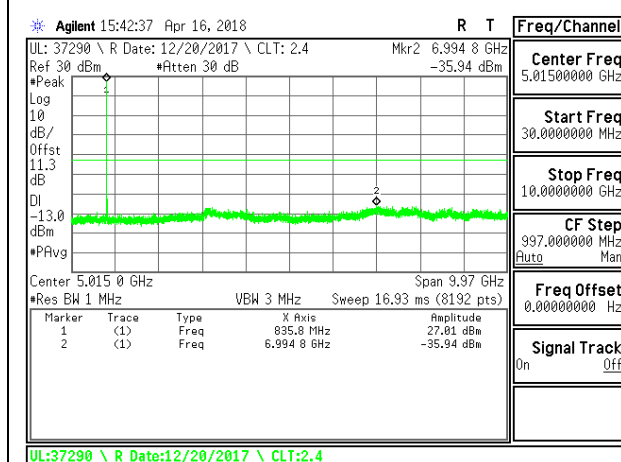


LTE B5 3MHz QPSK Middle Channel RB1-0

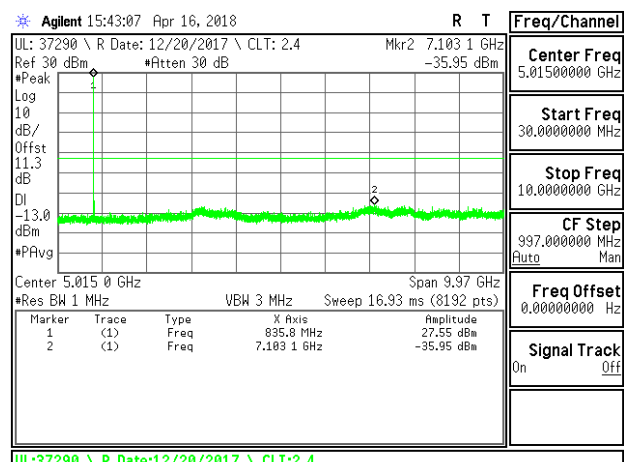


LTE B5 3MHz 16QAM Middle Channel RB1-0

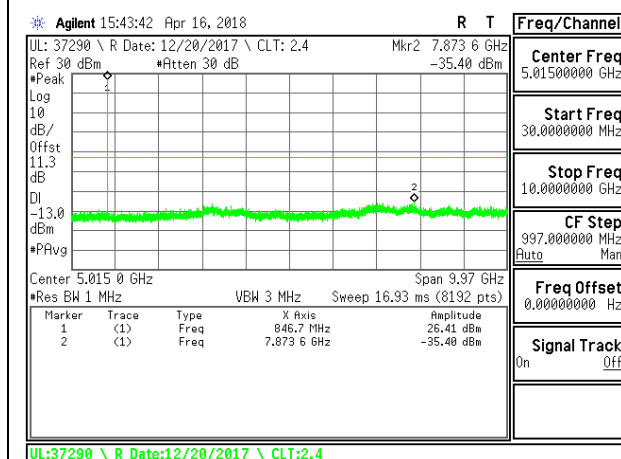


LTE B5 3MHz QPSK High Channel RB1-0

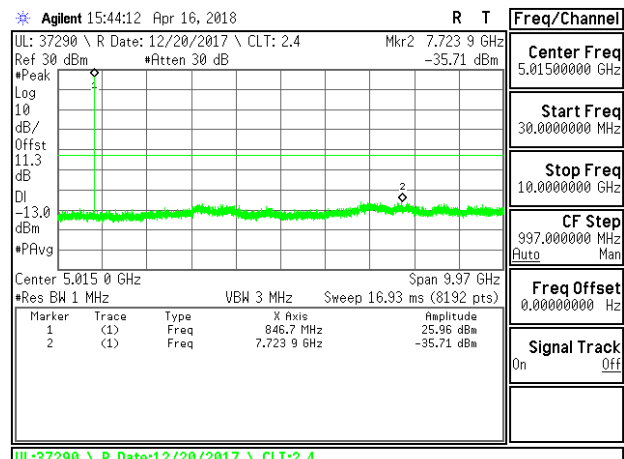


LTE B5 3MHz 16QAM High Channel RB1-0

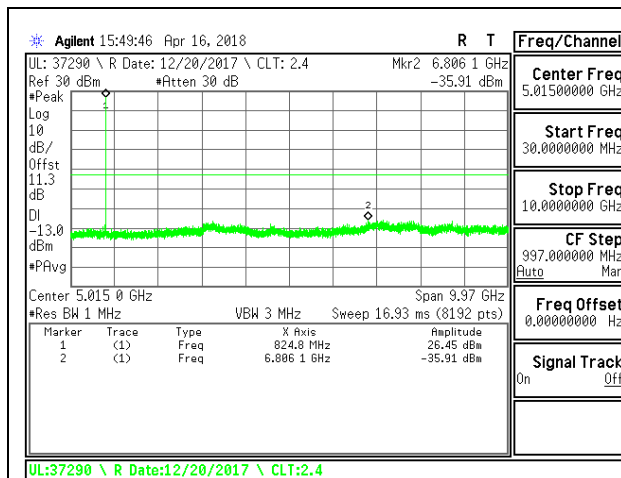


LTE B5 5MHz QPSK Low Channel RB1-0

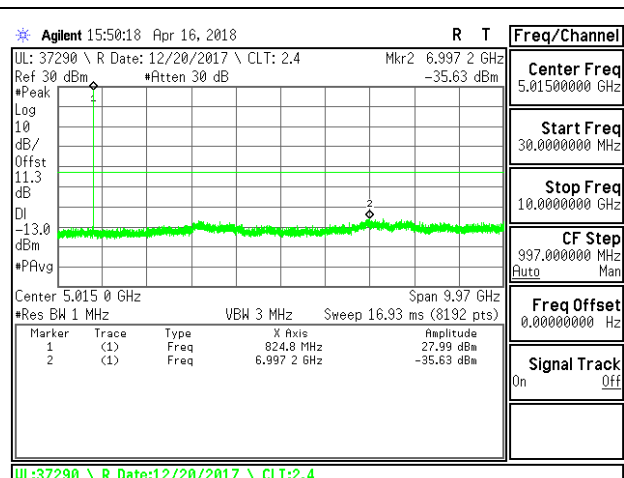


LTE B5 5MHz 16QAM Low Channel RB1-0

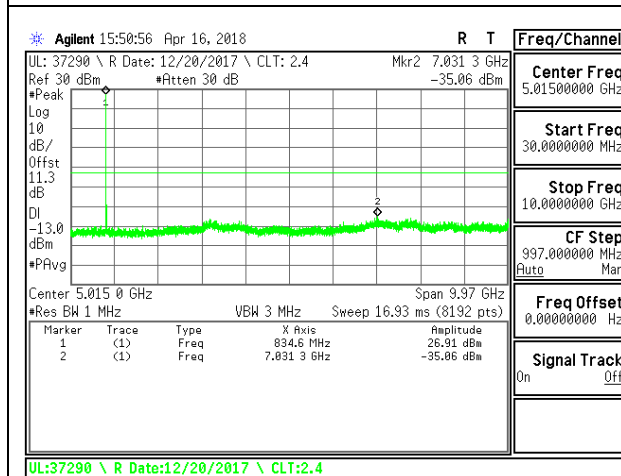


LTE B5 5MHz QPSK Middle Channel RB1-0

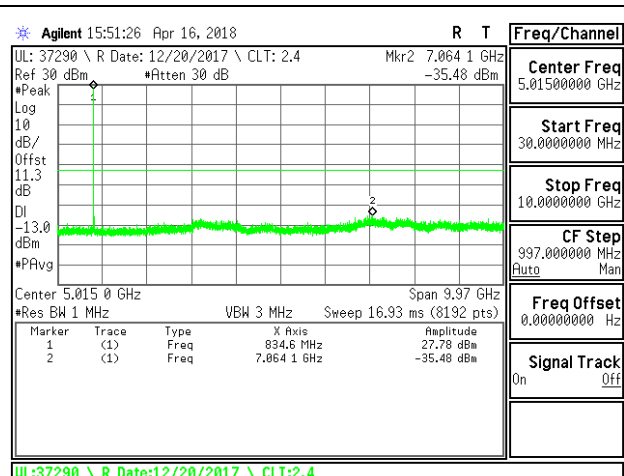


LTE B5 5MHz 16QAM Middle Channel RB1-0

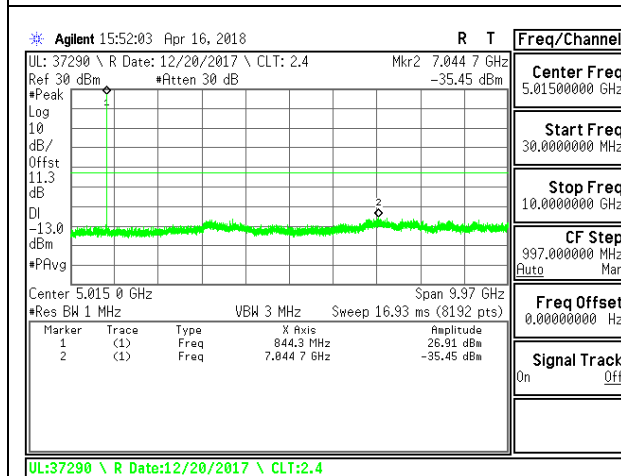


LTE B5 5MHz QPSK High Channel RB1-0

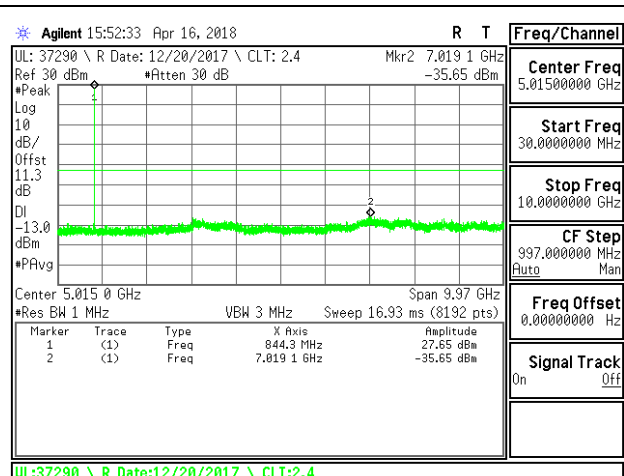


LTE B5 5MHz 16QAM High Channel RB1-0

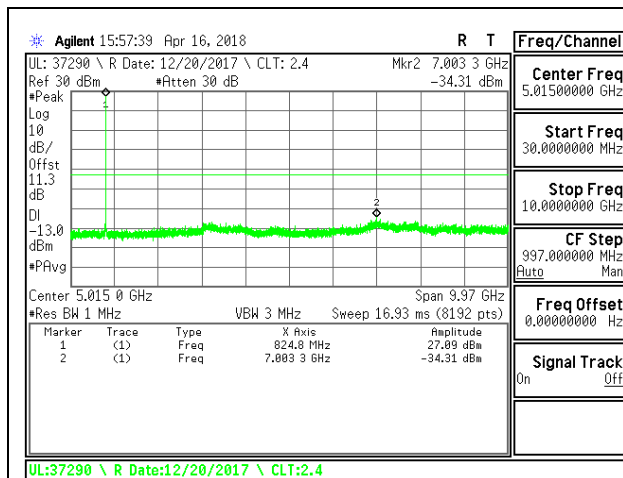


LTE B5 10MHz QPSK Low Channel RB1-0

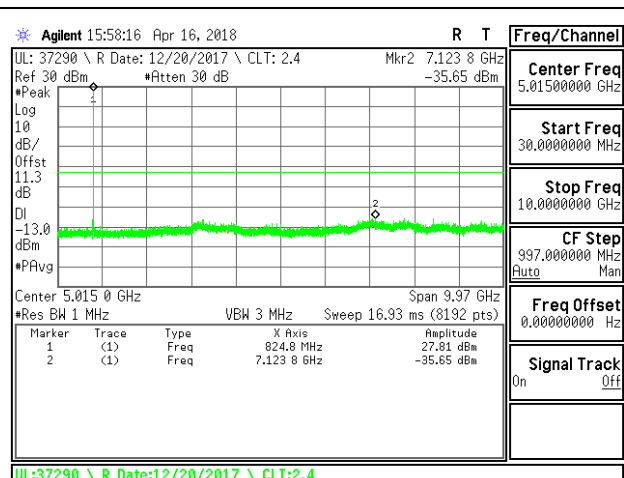


LTE B5 10MHz 16QAM Low Channel RB1-0

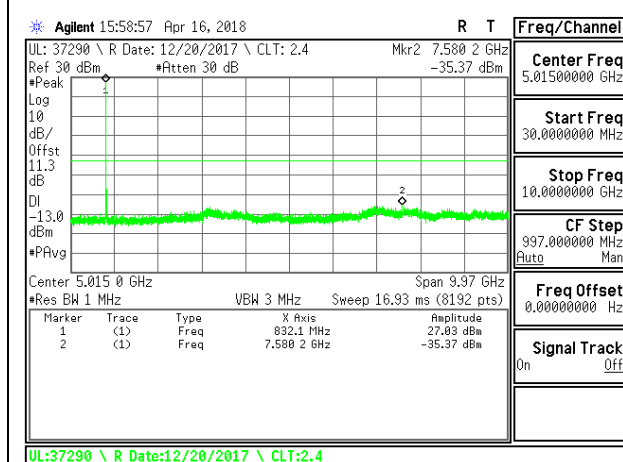


LTE B5 10MHz QPSK Middle Channel RB1-0

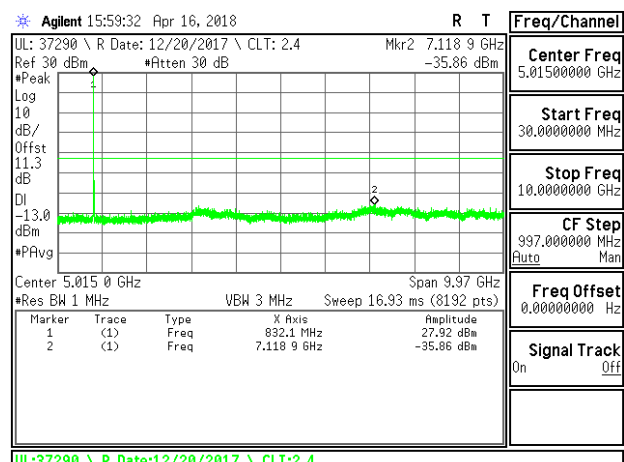

LTE B5 10MHz 16QAM Middle Channel RB1-0

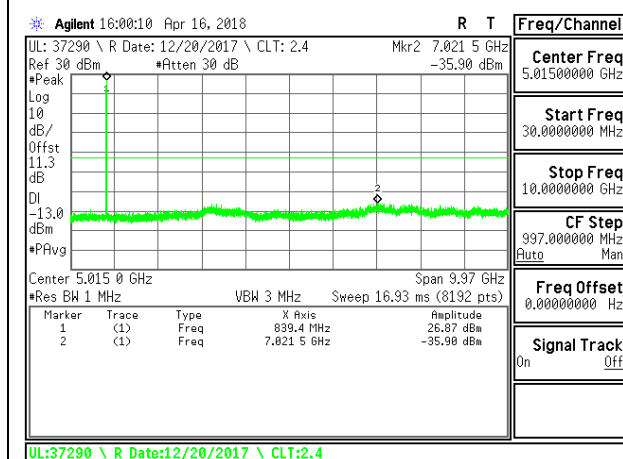



LTE B5 10MHz QPSK High Channel RB1-0

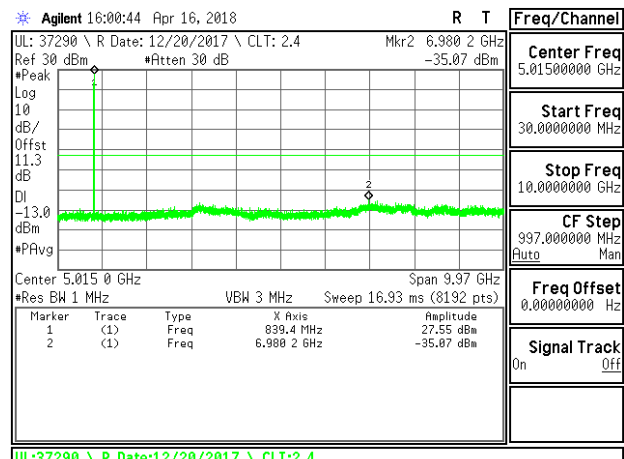


LTE B5 10MHz 16QAM High Channel RB1-0

8.3.8. LTE BAND 7

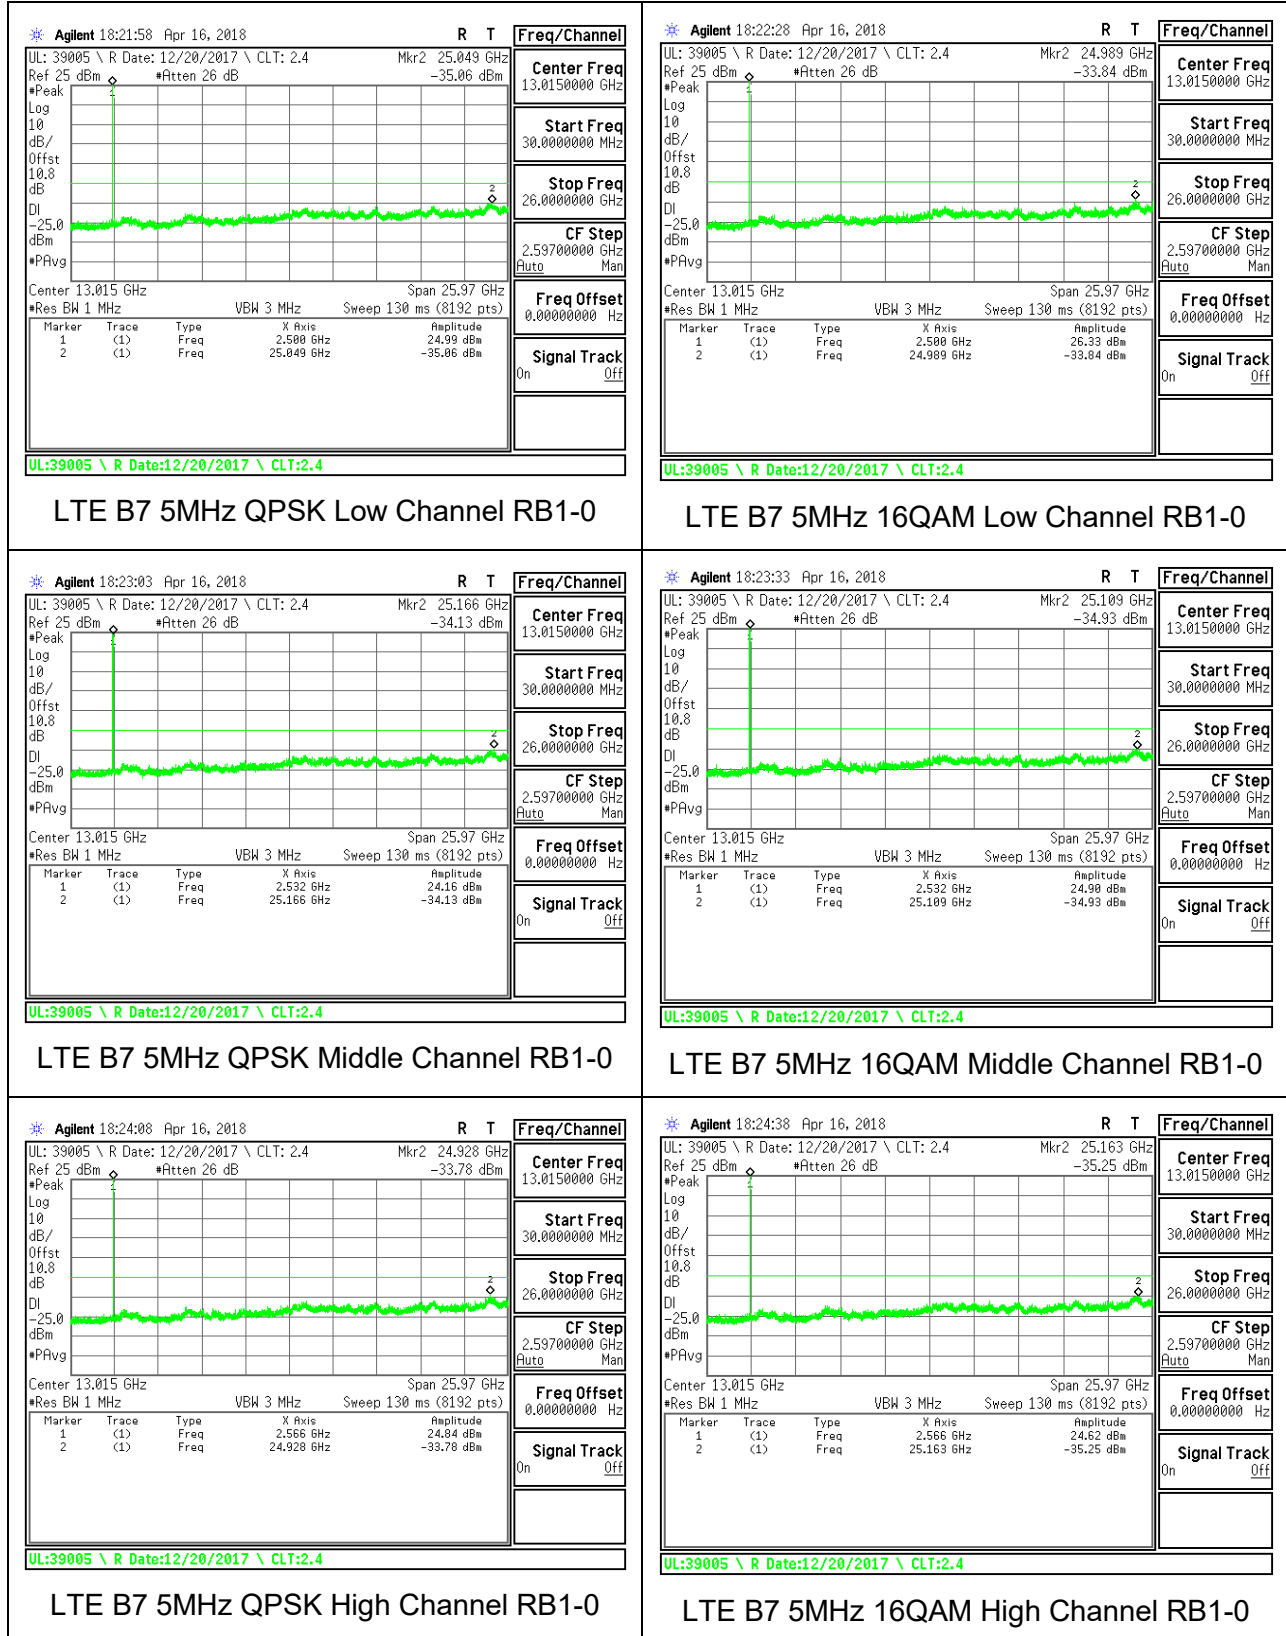


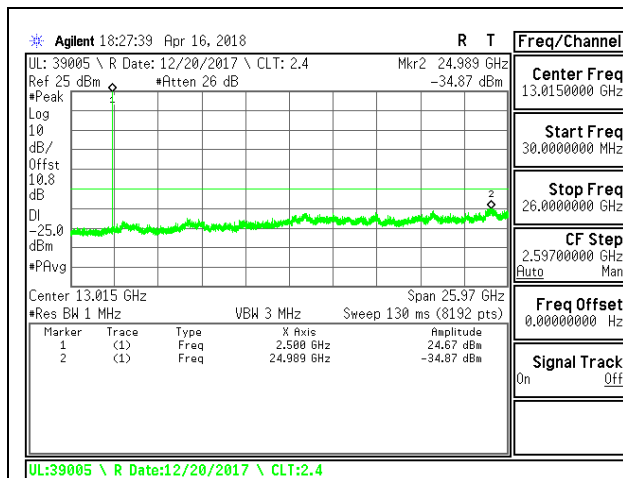


LTE B7 10MHz QPSK Low Channel RB1-0

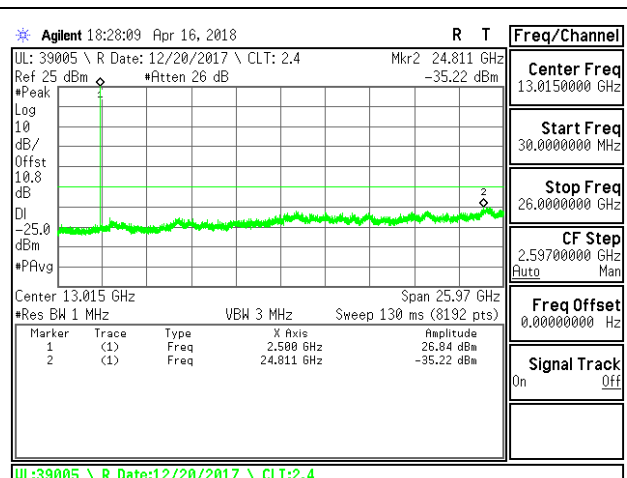


LTE B7 10MHz 16QAM Low Channel RB1-0

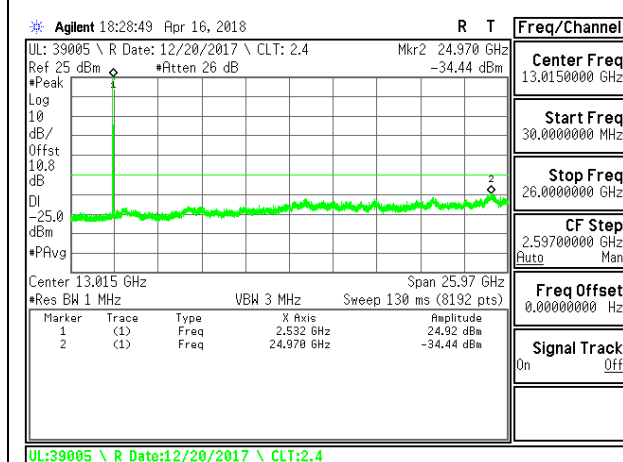


LTE B7 10MHz QPSK Middle Channel RB1-0

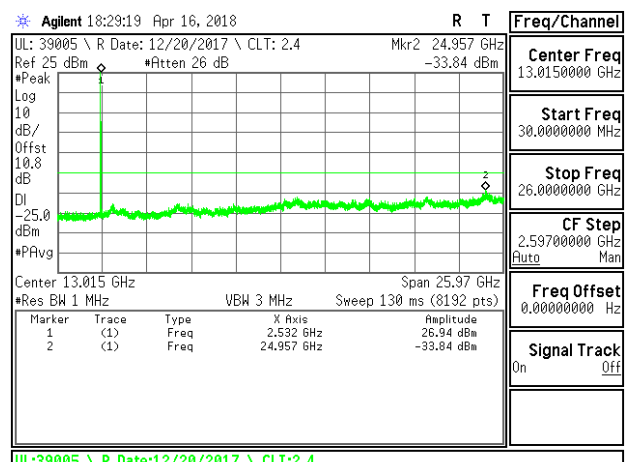


LTE B7 10MHz 16QAM Middle Channel RB1-0

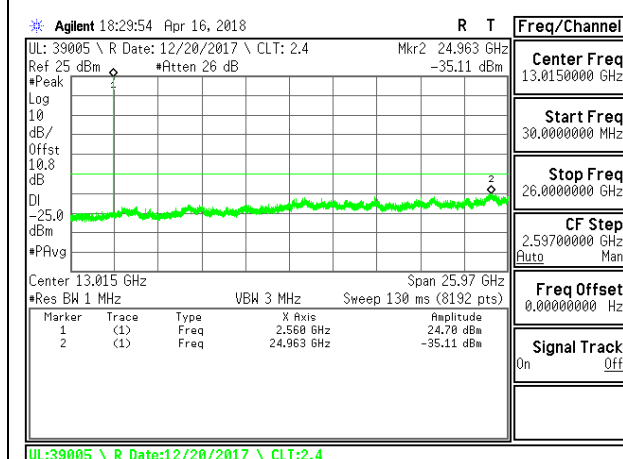


LTE B7 10MHz QPSK High Channel RB1-0

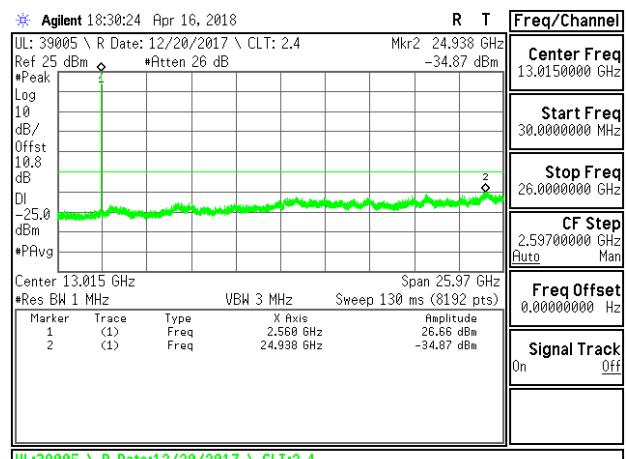




LTE B7 10MHz 16QAM High Channel RB1-0

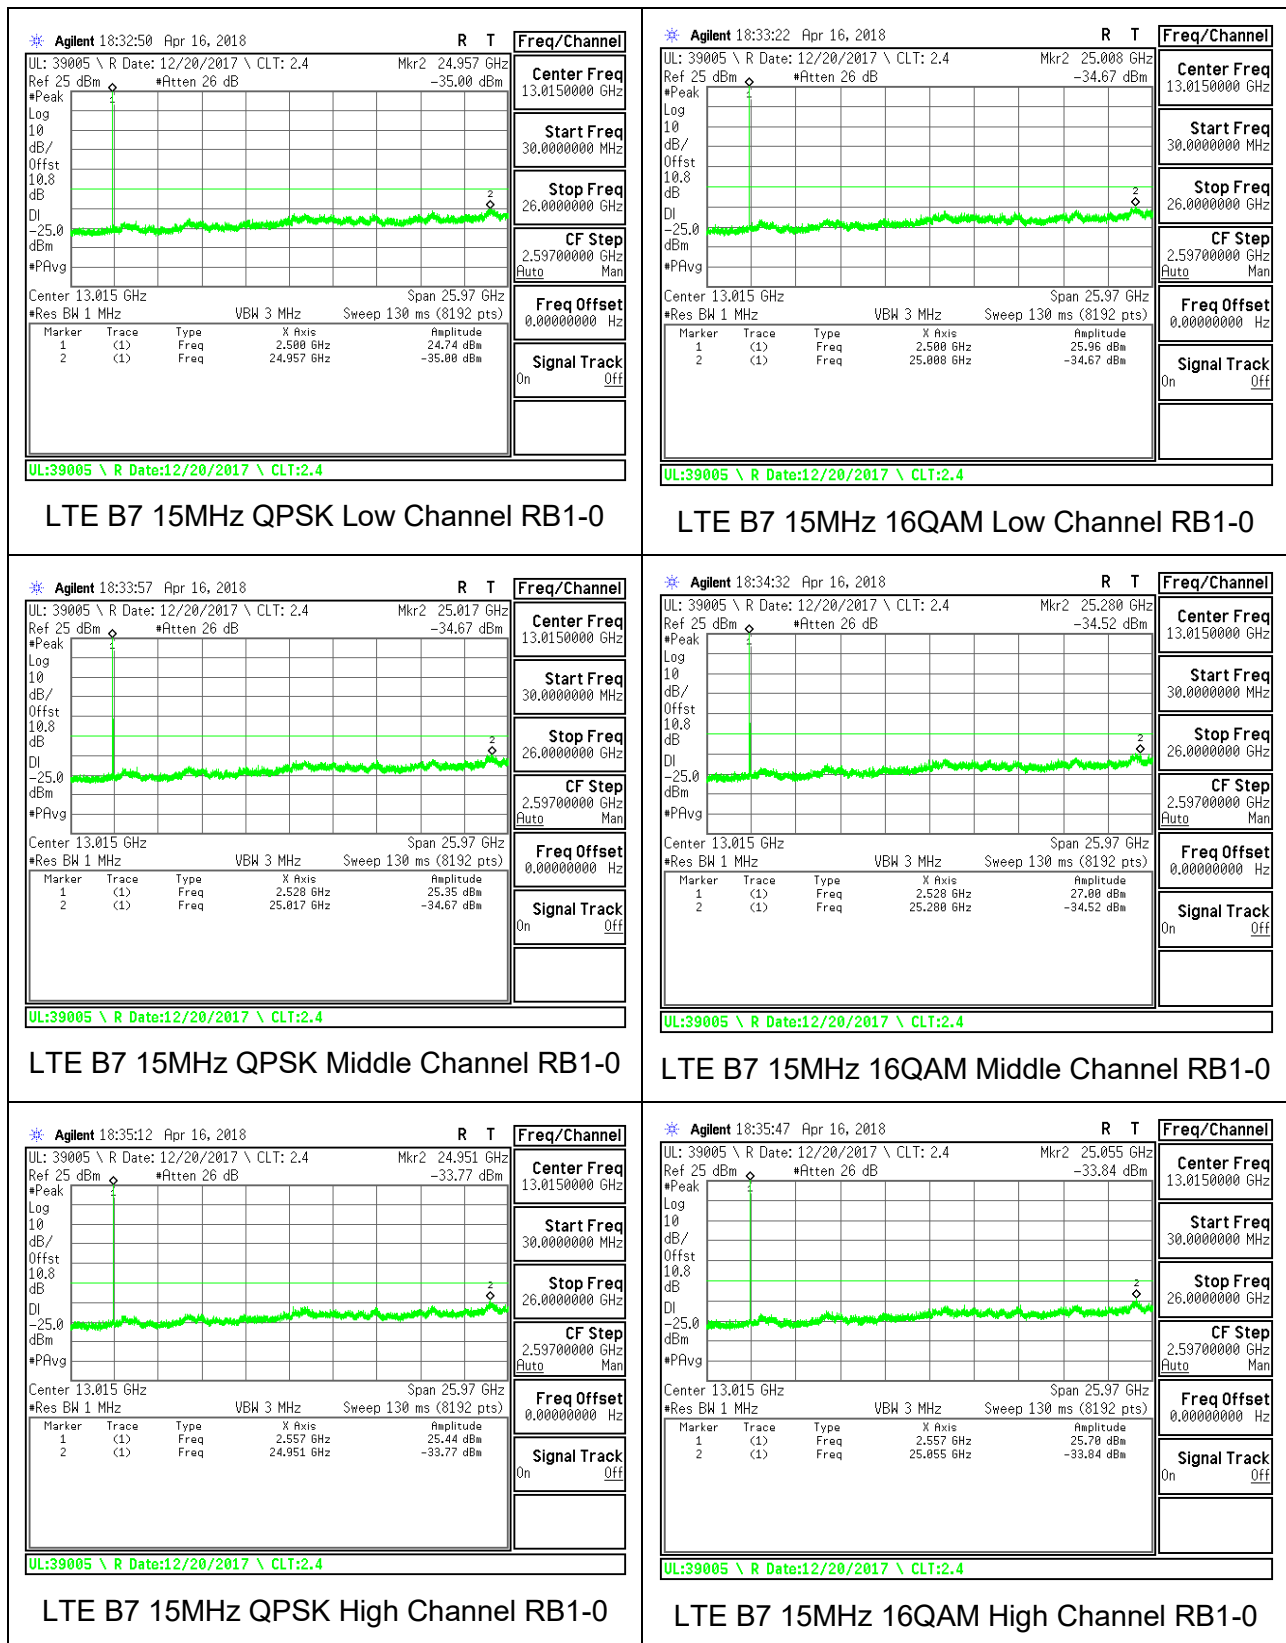

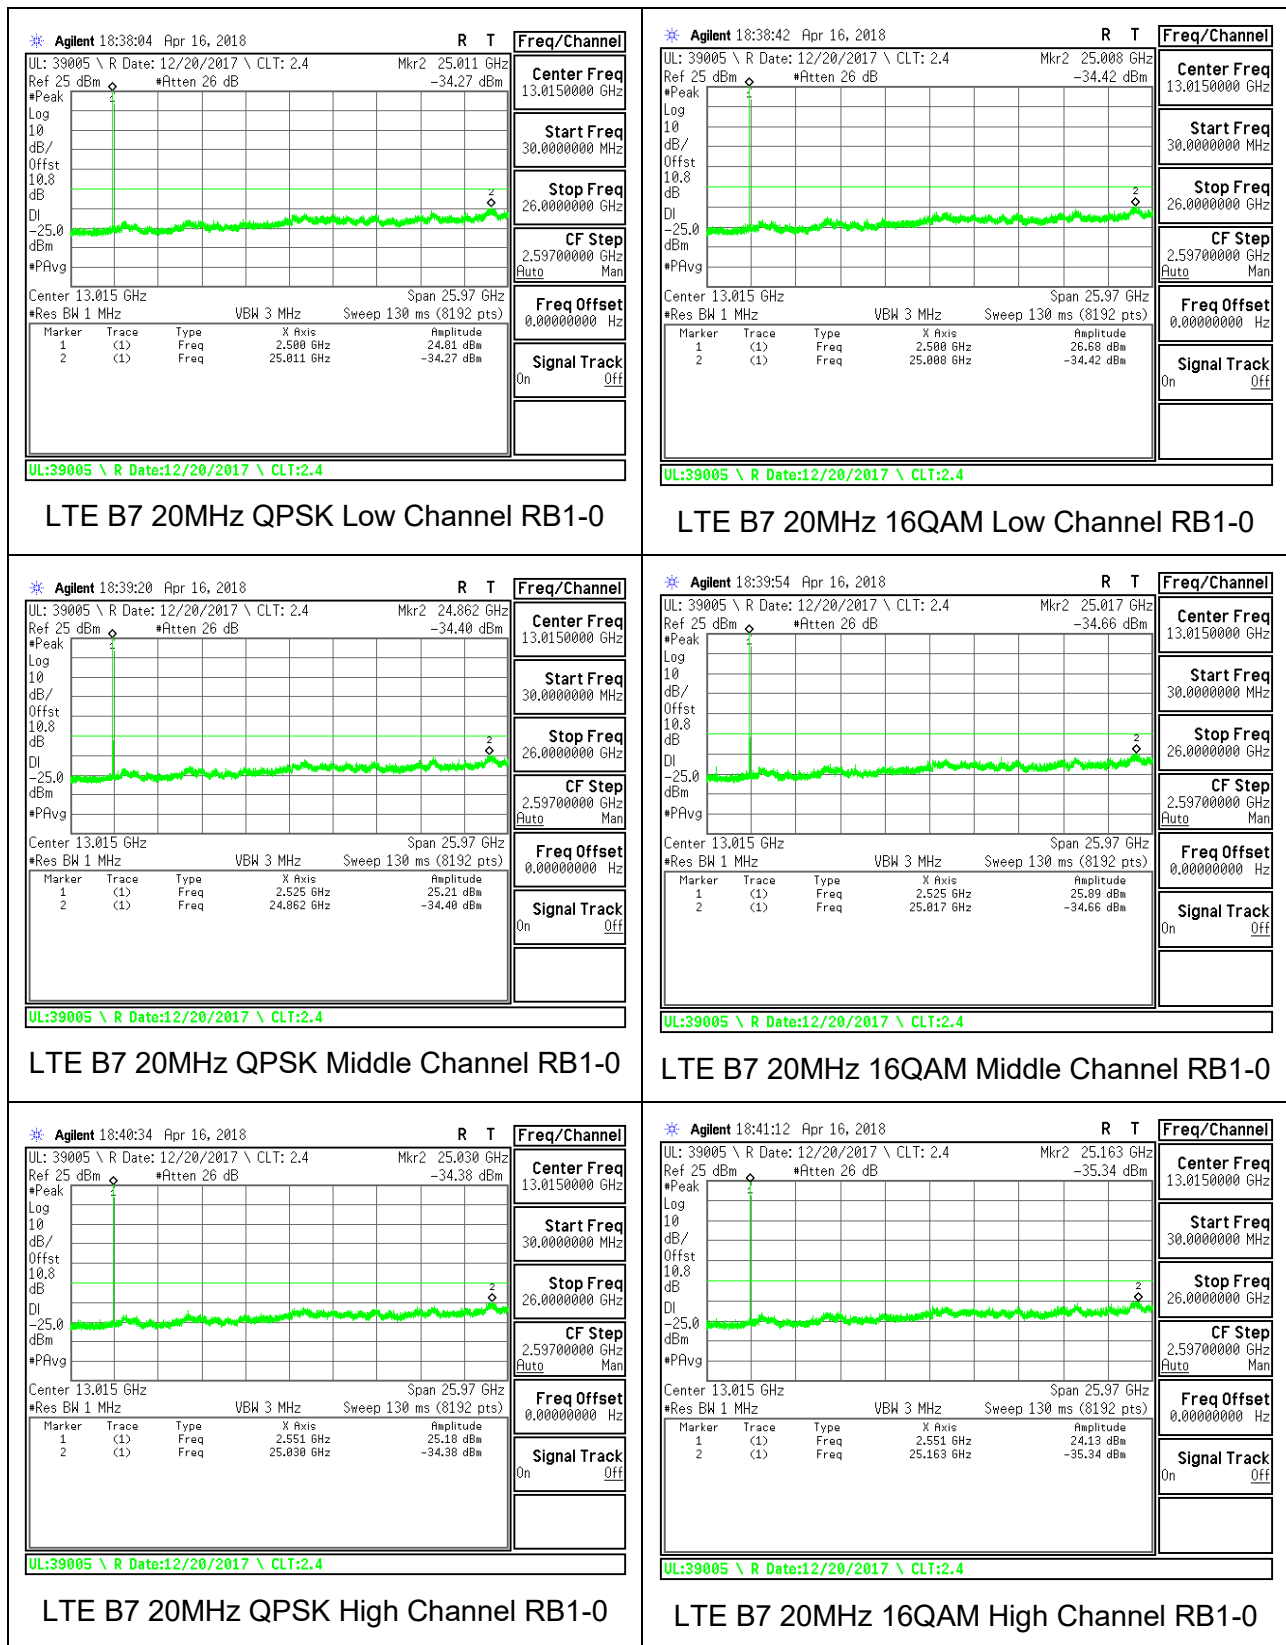


8.3.9. LTE BAND 13

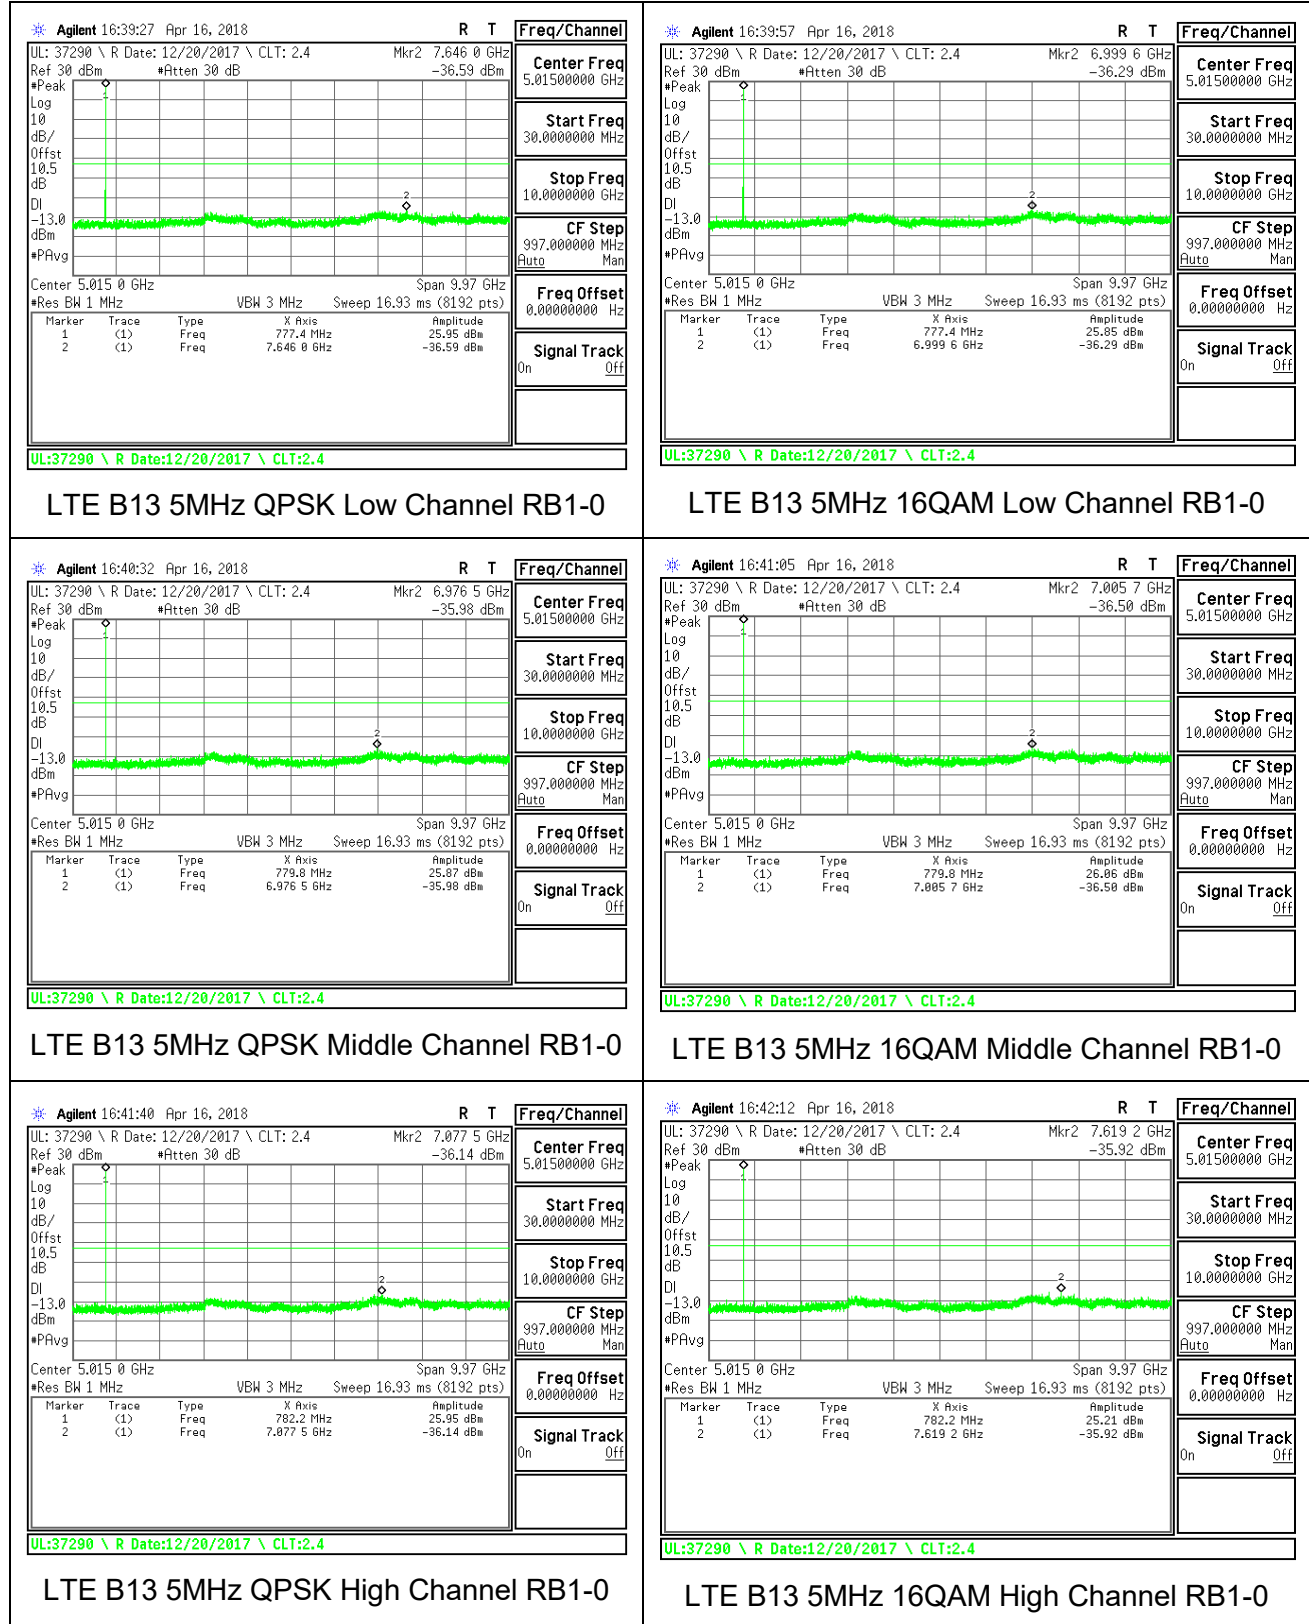


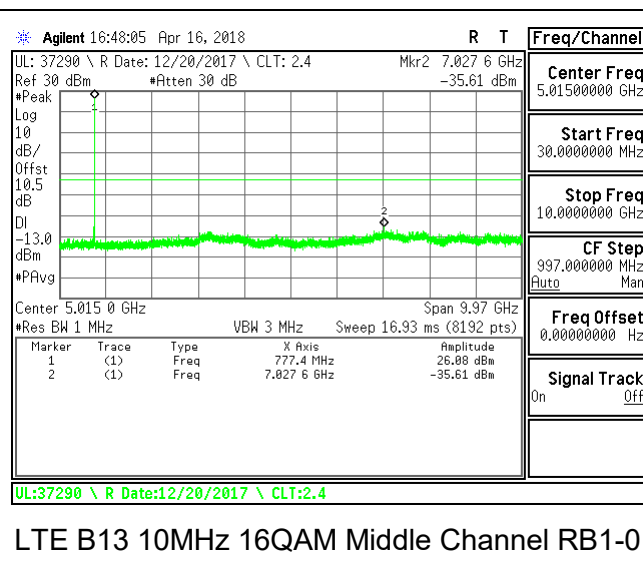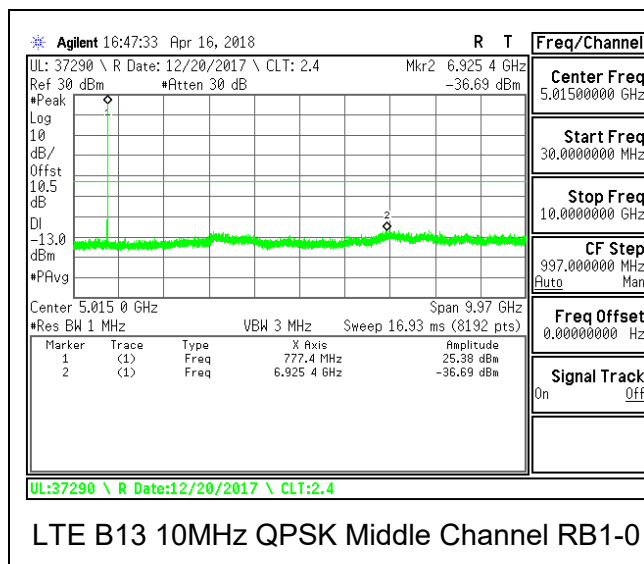


8.3.10. LTE BAND 17

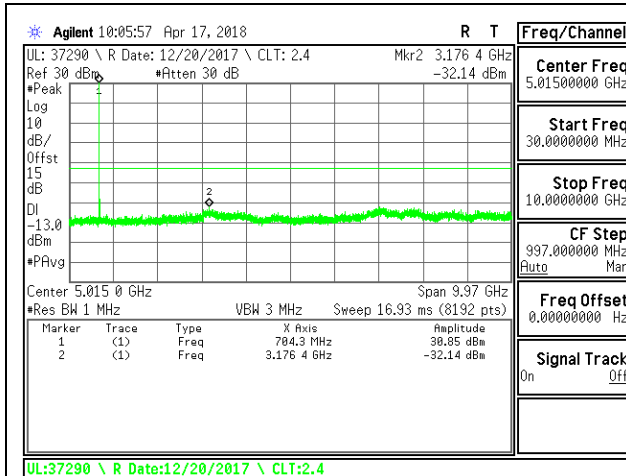


LTE B17 5MHz QPSK Low Channel RB1-0

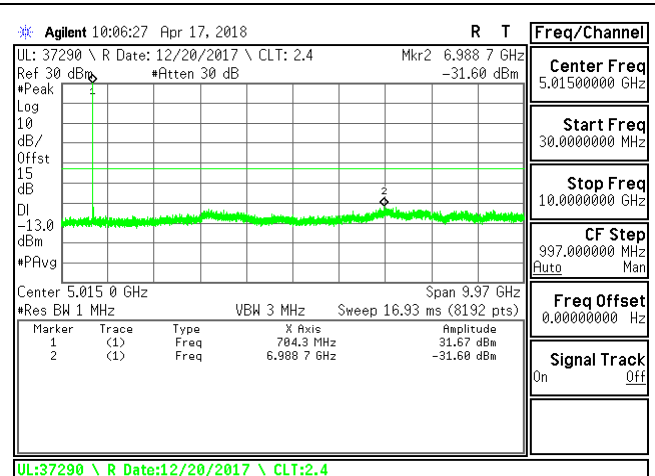


LTE B17 5MHz 16QAM Low Channel RB1-0

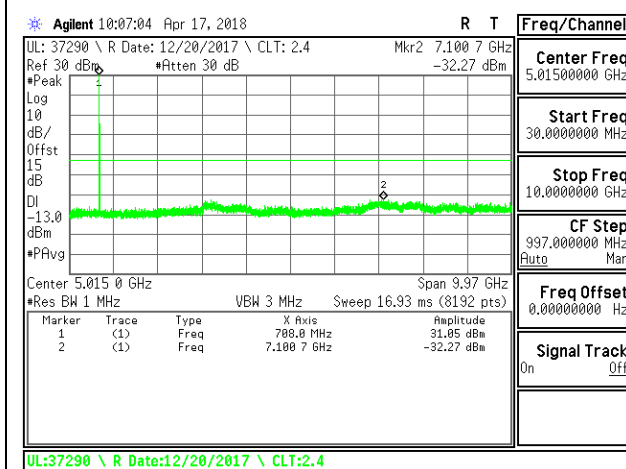


LTE B17 5MHz QPSK Middle Channel RB1-0

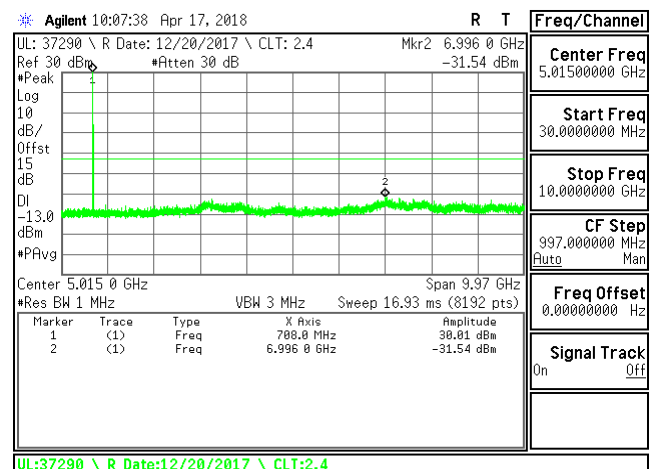


LTE B17 5MHz 16QAM Middle Channel RB1-0

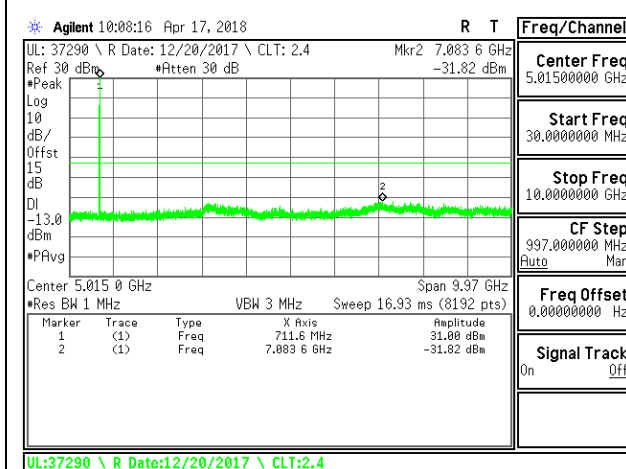


LTE B17 5MHz QPSK High Channel RB1-0

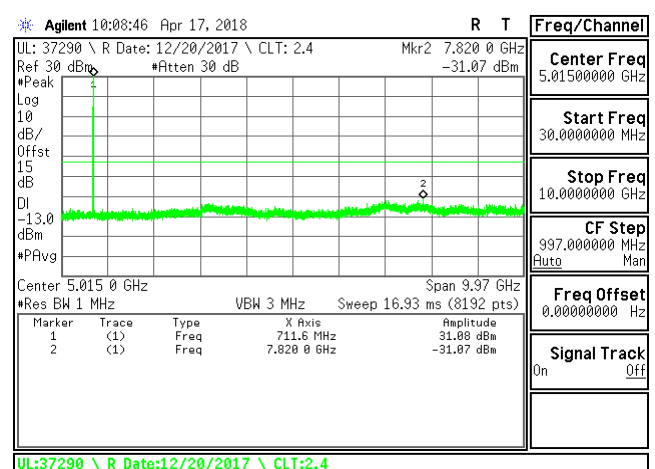


LTE B17 5MHz 16QAM High Channel RB1-0

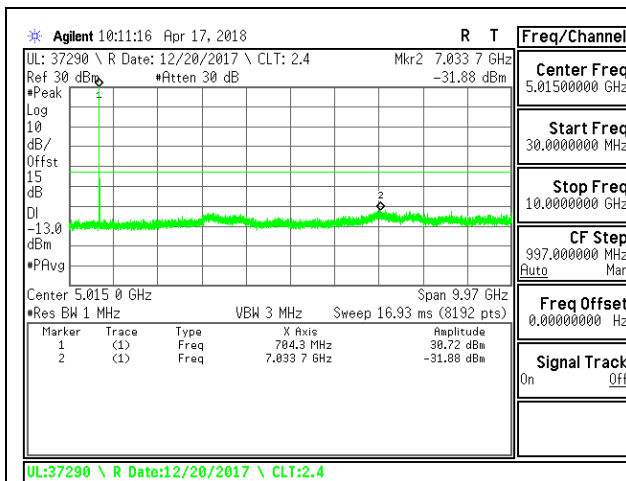


LTE B17 10MHz QPSK Low Channel RB1-0

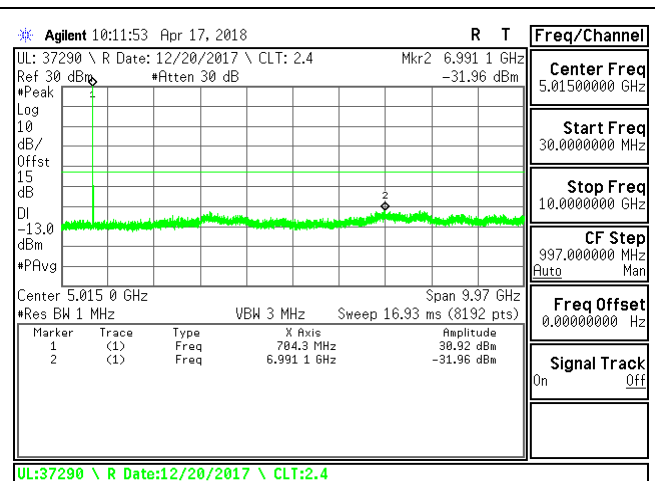


LTE B17 10MHz 16QAM Low Channel RB1-0

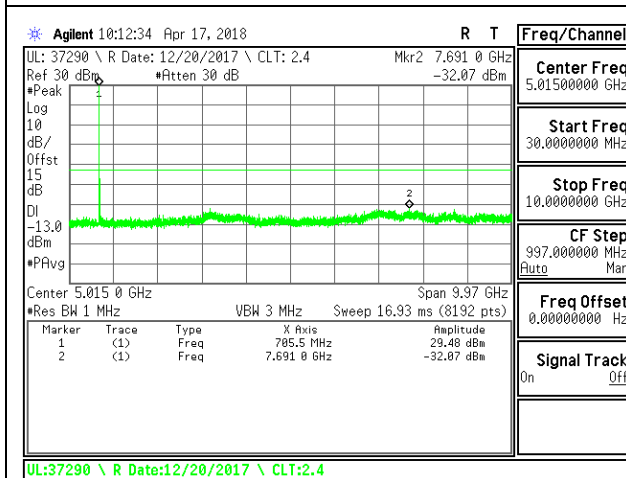


LTE B17 10MHz QPSK Middle Channel RB1-0

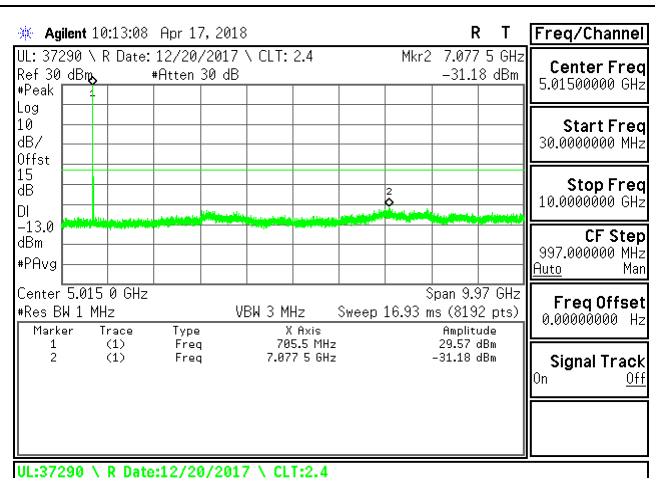

LTE B17 10MHz 16QAM Middle Channel RB1-0

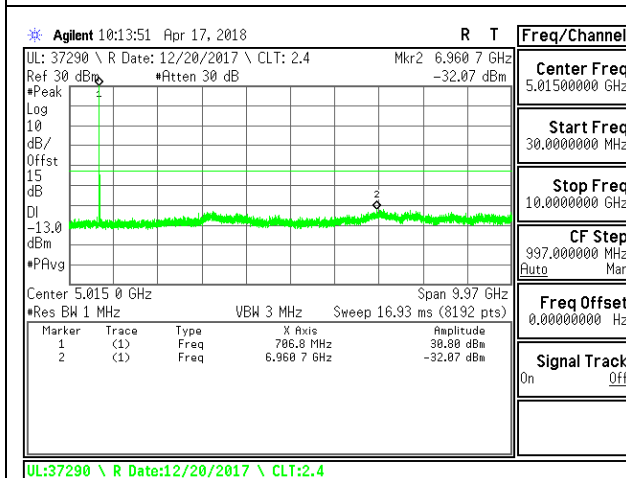


LTE B17 10MHz QPSK High Channel RB1-0

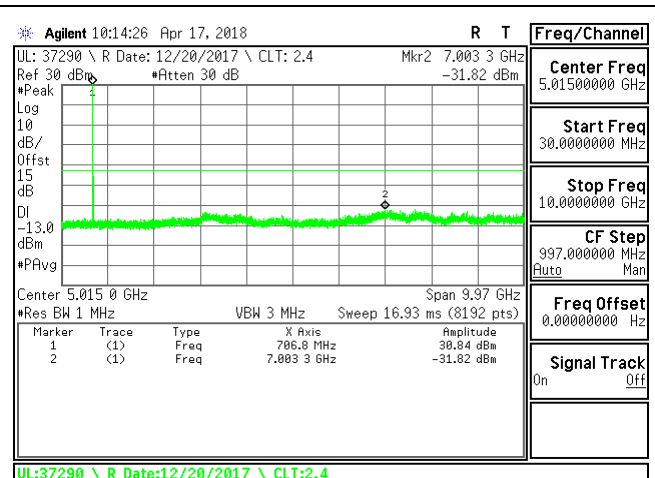


LTE B17 10MHz 16QAM High Channel RB1-0


8.3.11. LTE BAND 41

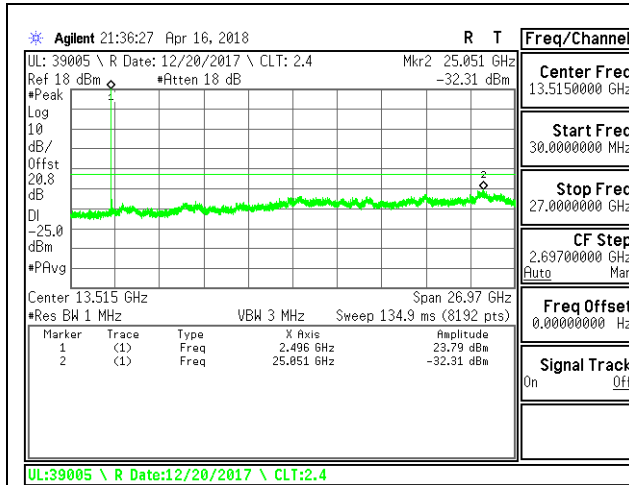


LTE B41 5MHz QPSK Low Channel RB1-0

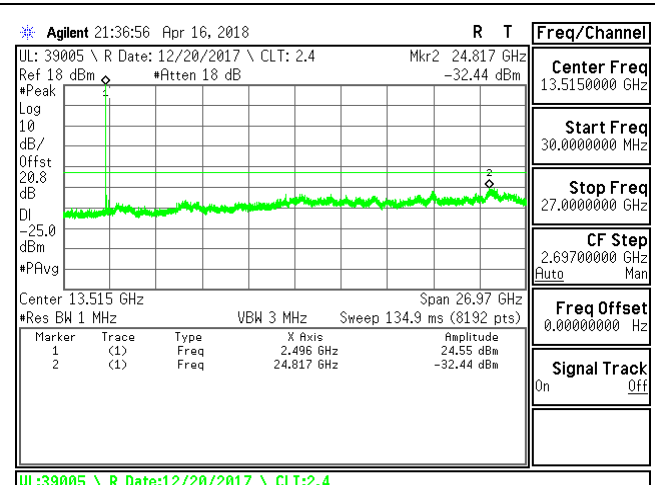


LTE B41 5MHz 16QAM Low Channel RB1-0

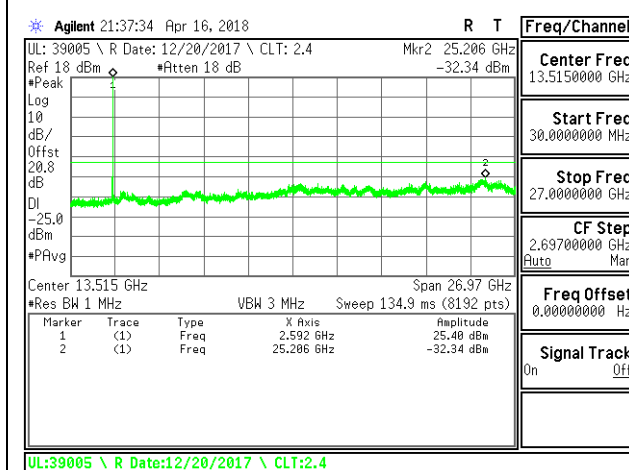


LTE B41 5MHz QPSK Middle Channel RB1-0

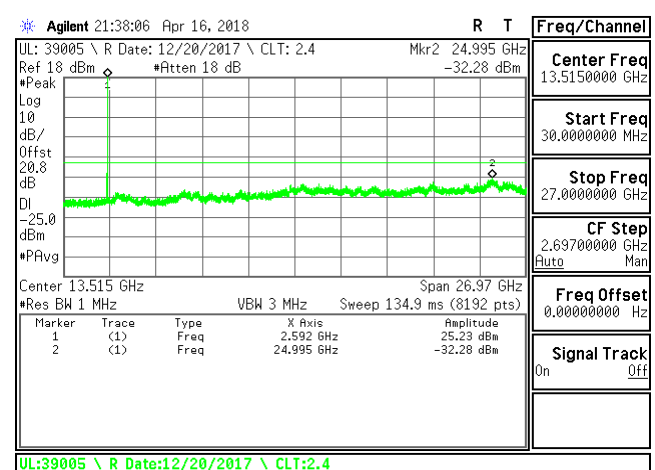


LTE B41 5MHz 16QAM Middle Channel RB1-0

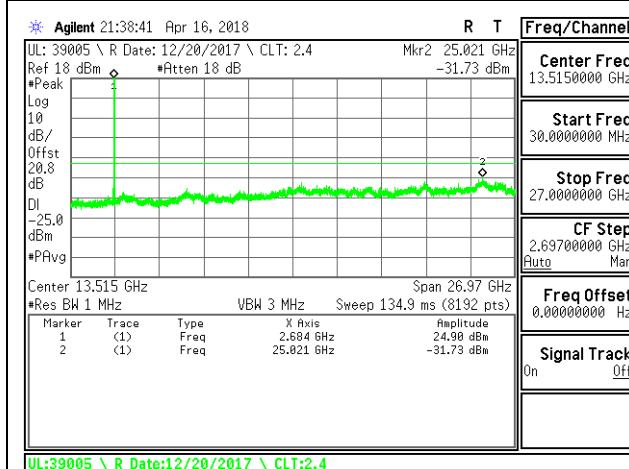


LTE B41 5MHz QPSK High Channel RB1-0

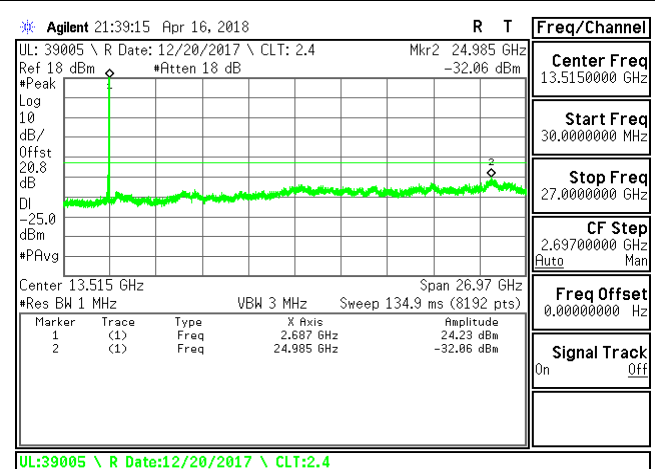


LTE B41 5MHz 16QAM High Channel RB1-0

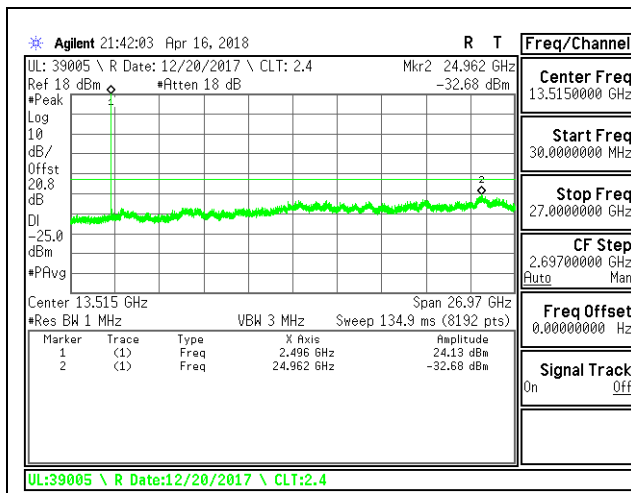


LTE B41 10MHz QPSK Low Channel RB1-0

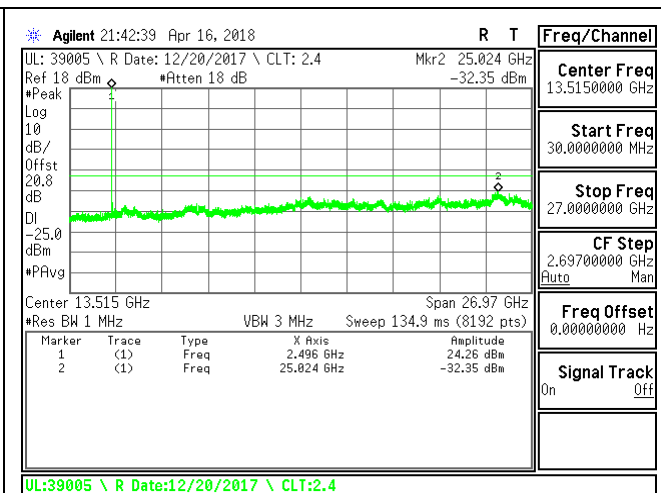


LTE B41 10MHz 16QAM Low Channel RB1-0

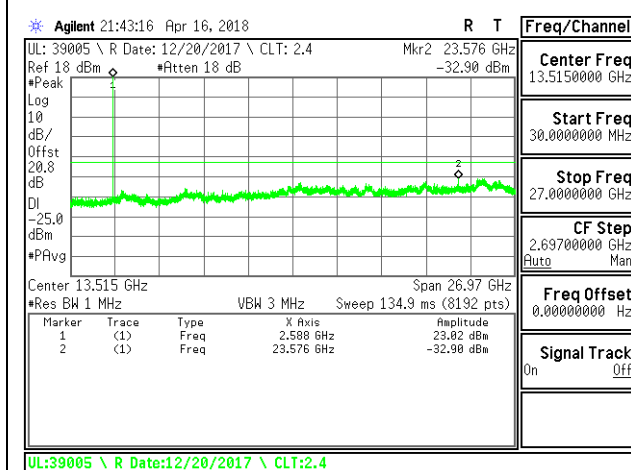


LTE B41 10MHz QPSK Middle Channel RB1-0

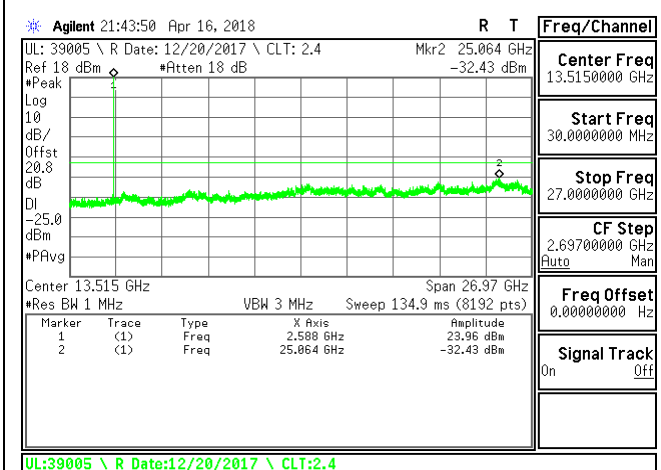


LTE B41 10MHz 16QAM Middle Channel RB1-0

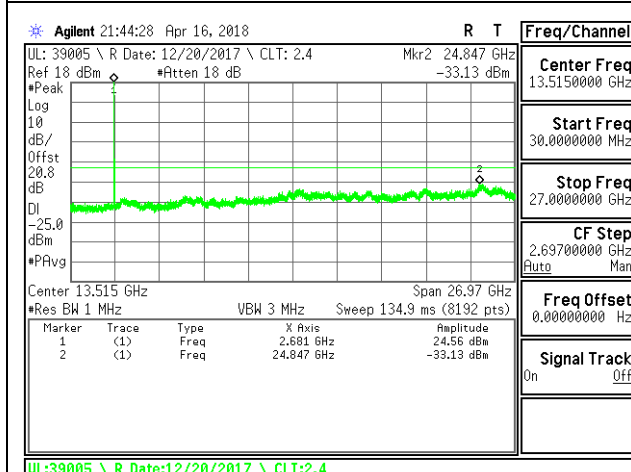


LTE B41 10MHz QPSK High Channel RB1-0

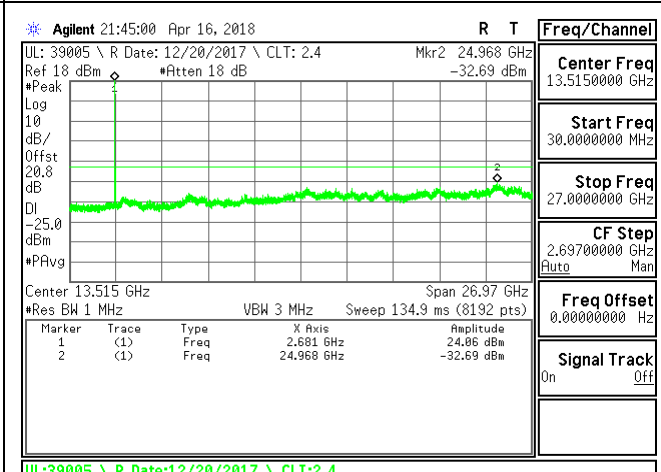


LTE B41 10MHz 16QAM High Channel RB1-0

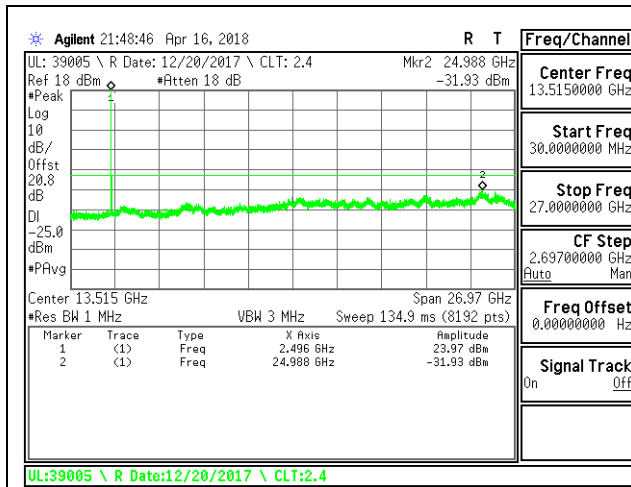


LTE B41 15MHz QPSK Low Channel RB1-0

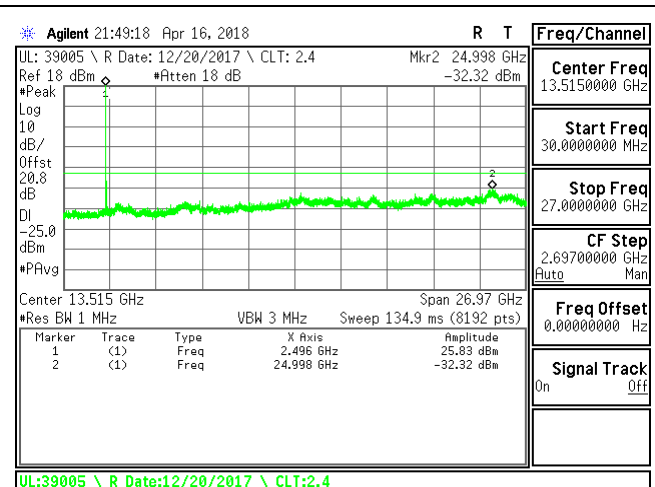


LTE B41 15MHz 16QAM Low Channel RB1-0

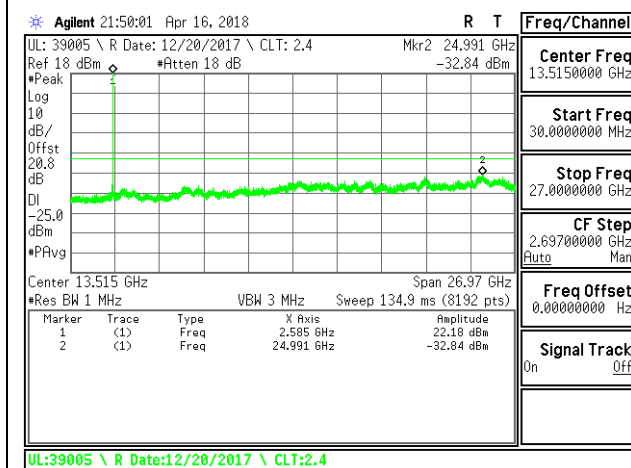


LTE B41 15MHz QPSK Middle Channel RB1-0

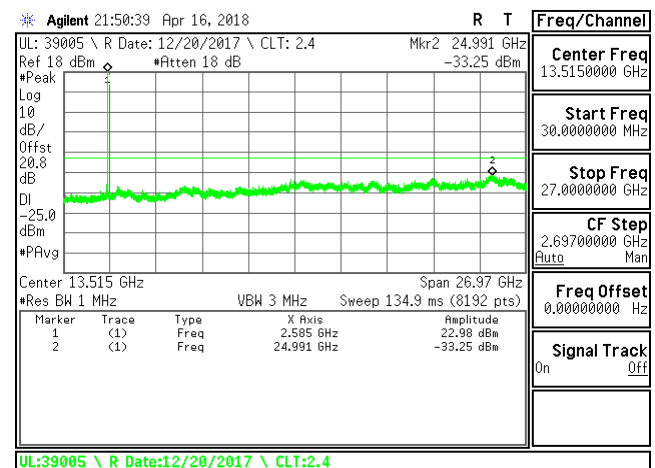


LTE B41 15MHz 16QAM Middle Channel RB1-0

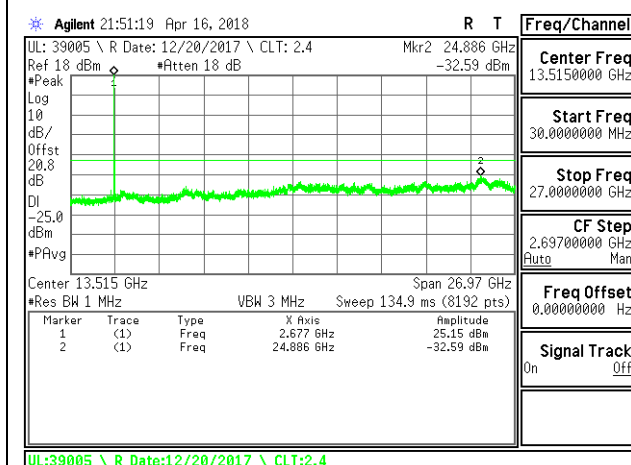


LTE B41 15MHz QPSK High Channel RB1-0

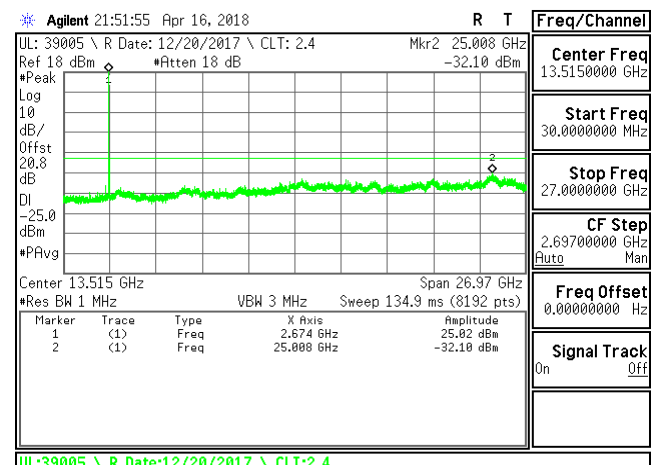


LTE B41 15MHz 16QAM High Channel RB1-0

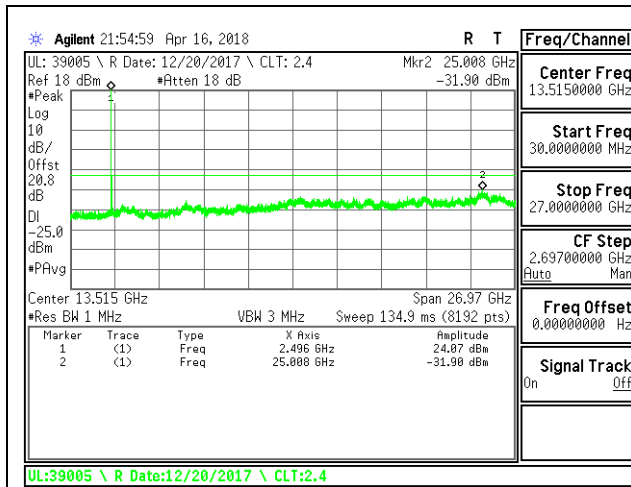


LTE B41 20MHz QPSK Low Channel RB1-0

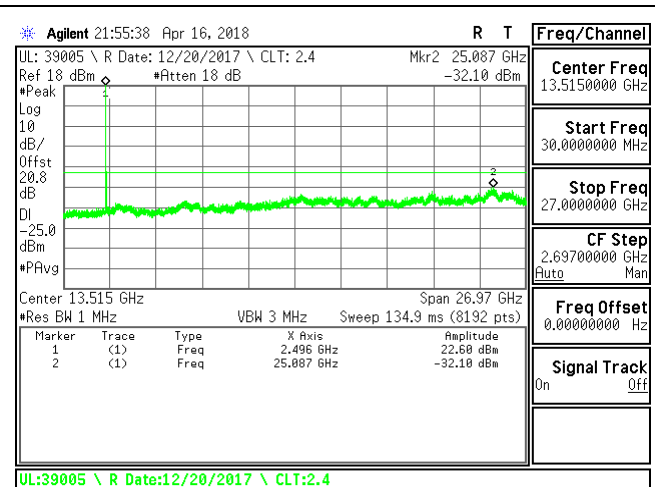


LTE B41 20MHz 16QAM Low Channel RB1-0

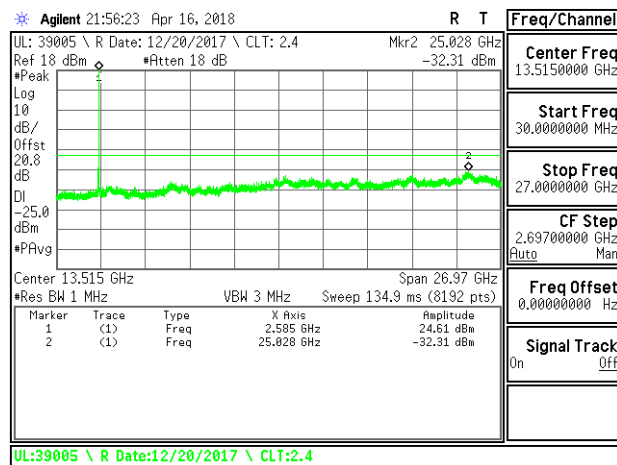


LTE B41 20MHz QPSK Middle Channel RB1-0

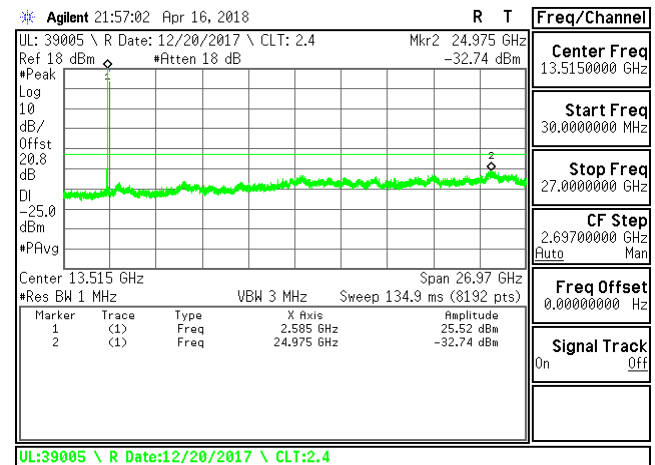

LTE B41 20MHz 16QAM Middle Channel RB1-0

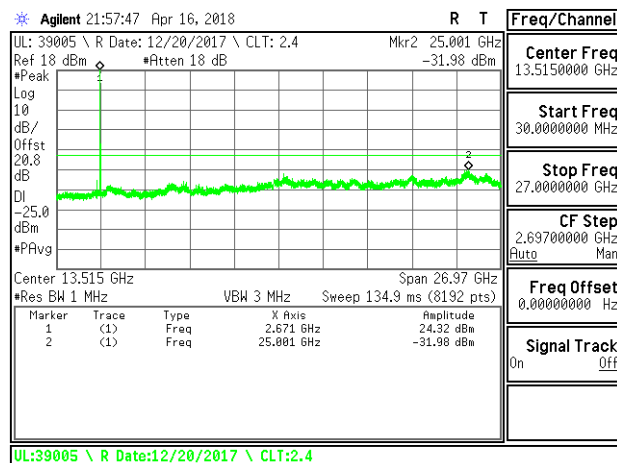

LTE B41 20MHz QPSK High Channel RB1-0

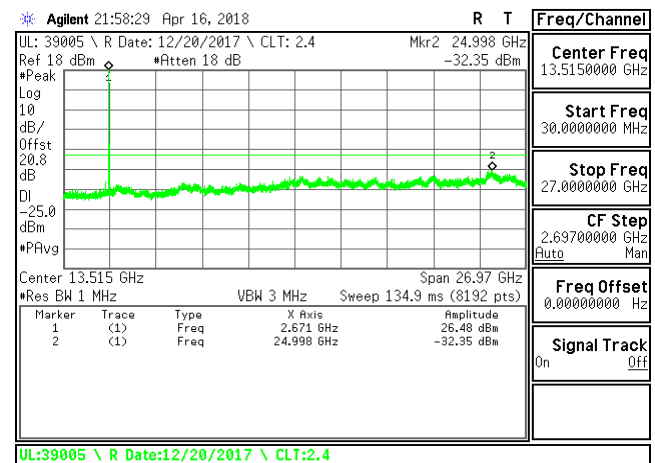

LTE B41 20MHz 16QAM High Channel RB1-0

8.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

FCC §22.355

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)
- Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC. End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 41

RESULTS

See the following pages.

8.4.1. GSM 850

GPRS 850MHz

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.0235	848.9764		
Extreme (50C)		824.0235	848.9764	10.1	0.01
Extreme (40C)		824.0235	848.9764	12.1	0.01
Extreme (30C)		824.0235	848.9764	12.1	0.01
Extreme (10C)		824.0235	848.9764	9.8	0.01
Extreme (0C)		824.0235	848.9764	14.2	0.02
Extreme (-10C)		824.0235	848.9764	12.4	0.01
Extreme (-20C)		824.0235	848.9764	12.6	0.02
Extreme (-30C)		824.0235	848.9764	12.2	0.01
20C	15%	824.0235	848.9764	11.8	0.01
	-15%	824.0235	848.9764	10.5	0.01
	End Point	824.0235	848.9764	12.2	0.01

8.4.2. GSM 1900

GPRS 1900MHz

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1850.0251	1909.9741		
Extreme (50C)		1850.0251	1909.9741	15.6	0.01
Extreme (40C)		1850.0251	1909.9741	16.5	0.01
Extreme (30C)		1850.0251	1909.9741	16.5	0.01
Extreme (10C)		1850.0251	1909.9741	12.4	0.01
Extreme (0C)		1850.0251	1909.9741	11.5	0.01
Extreme (-10C)		1850.0251	1909.9741	25.0	0.01
Extreme (-20C)		1850.0251	1909.9741	16.5	0.01
Extreme (-30C)		1850.0251	1909.9741	16.8	0.01
20C	15%	1850.0251	1909.9741	15.5	0.01
	-15%	1850.0251	1909.9741	14.9	0.01
	End Point	1850.0251	1909.9741	15.7	0.01

8.4.3. WCDMA BAND 2

UMTS REL99 BAND 2

Limit		1850	1910	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1850.1500	1909.8500		
Extreme (50C)		1850.1500	1909.8500	8.3	0.00
Extreme (40C)		1850.1500	1909.8500	8.6	0.00
Extreme (30C)		1850.1500	1909.8500	10.3	0.01
Extreme (10C)		1850.1500	1909.8500	13.3	0.01
Extreme (0C)		1850.1500	1909.8500	16.3	0.01
Extreme (-10C)		1850.1500	1909.8500	18.6	0.01
Extreme (-20C)		1850.1500	1909.8500	16.4	0.01
Extreme (-30C)		1850.1500	1909.8500	15.7	0.01
20C	15%	1850.1500	1909.8500	15.4	0.01
	-15%	1850.1500	1909.8500	12.6	0.01
	End Point	1850.1500	1909.8500	13.6	0.01

8.4.4. WCDMA BAND 4

UMTS REL99 BAND 4

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1710.1170	1754.8830		
Extreme (50C)		1710.1170	1754.8830	-6.2	0.00
Extreme (40C)		1710.1170	1754.8830	-5.3	0.00
Extreme (30C)		1710.1170	1754.8830	-4.9	0.00
Extreme (10C)		1710.1170	1754.8830	-5.4	0.00
Extreme (0C)		1710.1170	1754.8830	-4.3	0.00
Extreme (-10C)		1710.1170	1754.8830	-5.3	0.00
Extreme (-20C)		1710.1170	1754.8830	-4.2	0.00
Extreme (-30C)		1710.1170	1754.8830	-4.2	0.00
20C	15%	1710.1170	1754.8830	-5.2	0.00
	-15%	1710.1170	1754.8830	-4.9	0.00
	End Point	1710.1170	1754.8830	-3.8	0.00

8.4.5. WCDMA BAND 5

UMTS REL99 BAND 5

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.1130	848.8750		
Extreme (50C)		824.1130	848.8750	10.5	0.01
Extreme (40C)		824.1130	848.8750	11.3	0.01
Extreme (30C)		824.1130	848.8750	9.6	0.01
Extreme (10C)		824.1130	848.8750	9.5	0.01
Extreme (0C)		824.1130	848.8750	9.3	0.01
Extreme (-10C)		824.1130	848.8750	8.9	0.01
Extreme (-20C)		824.1130	848.8750	9.5	0.01
Extreme (-30C)		824.1130	848.8750	7.2	0.01
20C	15%	824.1130	848.8750	7.2	0.01
	-15%	824.1130	848.8750	8.6	0.01
	End Point	824.1130	848.8750	10.6	0.01

8.4.6. LTE BAND 4

QPSK, (20MHz BANDWIDTH)

Limit		1710	1755	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	1710.8300	1754.1700		
Extreme (50C)		1710.8300	1754.1700	12.3	0.007
Extreme (40C)		1710.8300	1754.1700	13.5	0.008
Extreme (30C)		1710.8300	1754.1700	11.5	0.007
Extreme (10C)		1710.8300	1754.1700	14.1	0.008
Extreme (0C)		1710.8300	1754.1700	14.2	0.008
Extreme (-10C)		1710.8300	1754.1700	13.1	0.008
Extreme (-20C)		1710.8300	1754.1700	14.6	0.008
Extreme (-30C)		1710.8300	1754.1700	15.5	0.009
20C	15%	1710.8300	1754.1700	14.0	0.008
	-15%	1710.8300	1754.1700	15.0	0.009
	End Point	1710.8300	1754.1700	14.0	0.008

8.4.7. LTE BAND 5

QPSK, (10MHz BANDWIDTH)

Limit		824	849	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	824.4000	848.5900		
Extreme (50C)		824.4000	848.5900	-9.5	-0.011
Extreme (40C)		824.4000	848.5900	-20.2	-0.024
Extreme (30C)		824.4000	848.5900	-13.3	-0.016
Extreme (10C)		824.4000	848.5900	-13.4	-0.016
Extreme (0C)		824.4000	848.5900	-9.2	-0.011
Extreme (-10C)		824.4000	848.5900	-7.0	-0.008
Extreme (-20C)		824.4000	848.5900	-9.3	-0.011
Extreme (-30C)		824.4000	848.5900	-7.5	-0.009
20C	15%	824.4000	848.5900	-13.0	-0.016
	-15%	824.4000	848.5900	-8.6	-0.010
	End Point	824.4000	848.5900	-9.2	-0.011

8.4.8. LTE BAND 7

QPSK, (20MHz BANDWIDTH)

Limit		2500	2570	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2500.8400	2569.1600		
Extreme (50C)		2500.8400	2569.1600	-5.7	-0.002
Extreme (40C)		2500.8400	2569.1600	-6.0	-0.002
Extreme (30C)		2500.8400	2569.1600	-4.6	-0.002
Extreme (10C)		2500.8400	2569.1600	6.7	0.003
Extreme (0C)		2500.8400	2569.1600	6.6	0.003
Extreme (-10C)		2500.8400	2569.1600	5.4	0.002
Extreme (-20C)		2500.8400	2569.1600	6.6	0.003
Extreme (-30C)		2500.8400	2569.1600	8.5	0.003
20C	15%	2500.8400	2569.1600	8.6	0.003
	-15%	2500.8400	2569.1600	8.3	0.003
	End Point	2500.8400	2569.1600	8.5	0.003

8.4.9. LTE BAND 13

QPSK, (10MHz BANDWIDTH)

Limit		777	787	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	777.1550	786.8500		
Extreme (50C)		777.1550	786.8500	-10.2	-0.013
Extreme (40C)		777.1550	786.8500	-12.8	-0.016
Extreme (30C)		777.1550	786.8500	-9.0	-0.011
Extreme (10C)		777.1550	786.8500	-8.2	-0.010
Extreme (0C)		777.1550	786.8500	-9.3	-0.012
Extreme (-10C)		777.1550	786.8500	-7.7	-0.010
Extreme (-20C)		777.1550	786.8500	-8.0	-0.010
Extreme (-30C)		777.1550	786.8500	-7.0	-0.009
20C	15%	777.1550	786.8500	-8.3	-0.011
	-15%	777.1550	786.8500	-9.1	-0.012
	End Point	777.1550	786.8500	-8.6	-0.011

8.4.10. LTE BAND 13

QPSK, (10MHz BANDWIDTH)

Limit		704	716	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	704.4050	715.5850		
Extreme (50C)		704.4050	715.5850	14.5	0.020
Extreme (40C)		704.4050	715.5850	15.3	0.022
Extreme (30C)		704.4050	715.5850	9.2	0.013
Extreme (10C)		704.4050	715.5850	10.3	0.014
Extreme (0C)		704.4050	715.5850	9.9	0.014
Extreme (-10C)		704.4050	715.5850	9.9	0.014
Extreme (-20C)		704.4050	715.5850	10.4	0.015
Extreme (-30C)		704.4050	715.5850	11.5	0.016
20C	15%	704.4050	715.5850	7.2	0.010
	-15%	704.4050	715.5850	7.9	0.011
	End Point	704.4050	715.5850	8.1	0.011

8.4.11. LTE BAND 41

QPSK, (20MHz BANDWIDTH)

Limit		2496	2690	Delta (Hz)	Frequency Stability (ppm)
Condition		F low @ -13dBm (MHz)	F high @ -13dBm (MHz)		
Temperature	Voltage				
Normal (20C)	Normal	2496.7200	2689.3000		
Extreme (50C)		2496.7200	2689.3000	10.3	0.004
Extreme (40C)		2496.7200	2689.3000	9.3	0.004
Extreme (30C)		2496.7200	2689.3000	10.4	0.004
Extreme (10C)		2496.7200	2689.3000	11.9	0.005
Extreme (0C)		2496.7200	2689.3000	10.3	0.004
Extreme (-10C)		2496.7200	2689.3000	10.4	0.004
Extreme (-20C)		2496.7200	2689.3000	11.4	0.004
Extreme (-30C)		2496.7200	2689.3000	11.3	0.004
20C	15%	2496.7200	2689.3000	11.3	0.004
	-15%	2496.7200	2689.3000	11.6	0.004
	End Point	2496.7200	2689.3000	12.0	0.005

8.5. PEAK TO AVERAGE RATIO


LIMITS

In addition, the peak to average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.


RESULT

Full resource block (FRB) for each bandwidth was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average power ratio criteria..


8.5.1. GSM

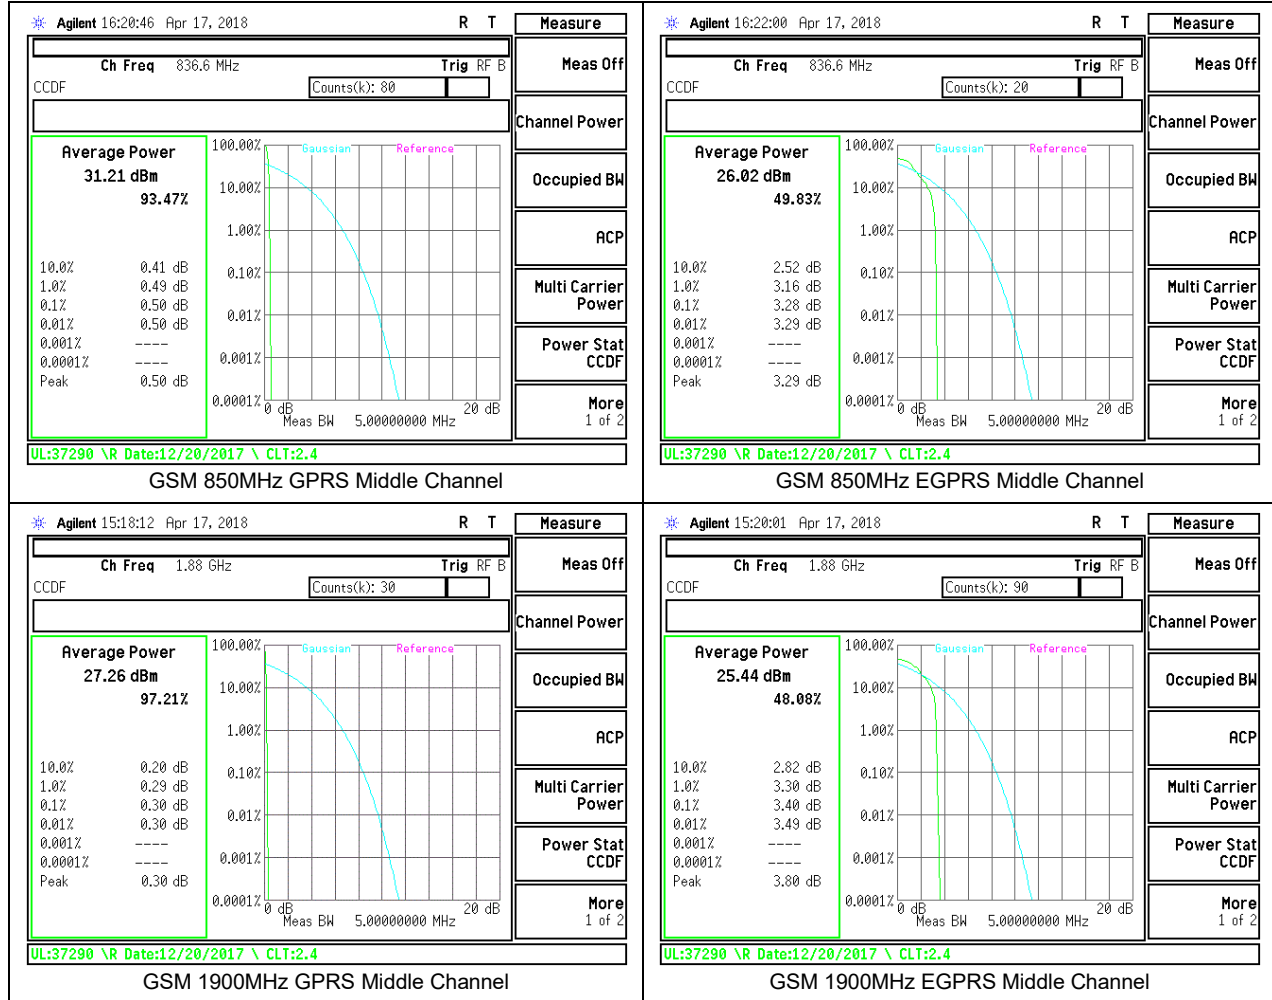


8.5.2. WCDMA

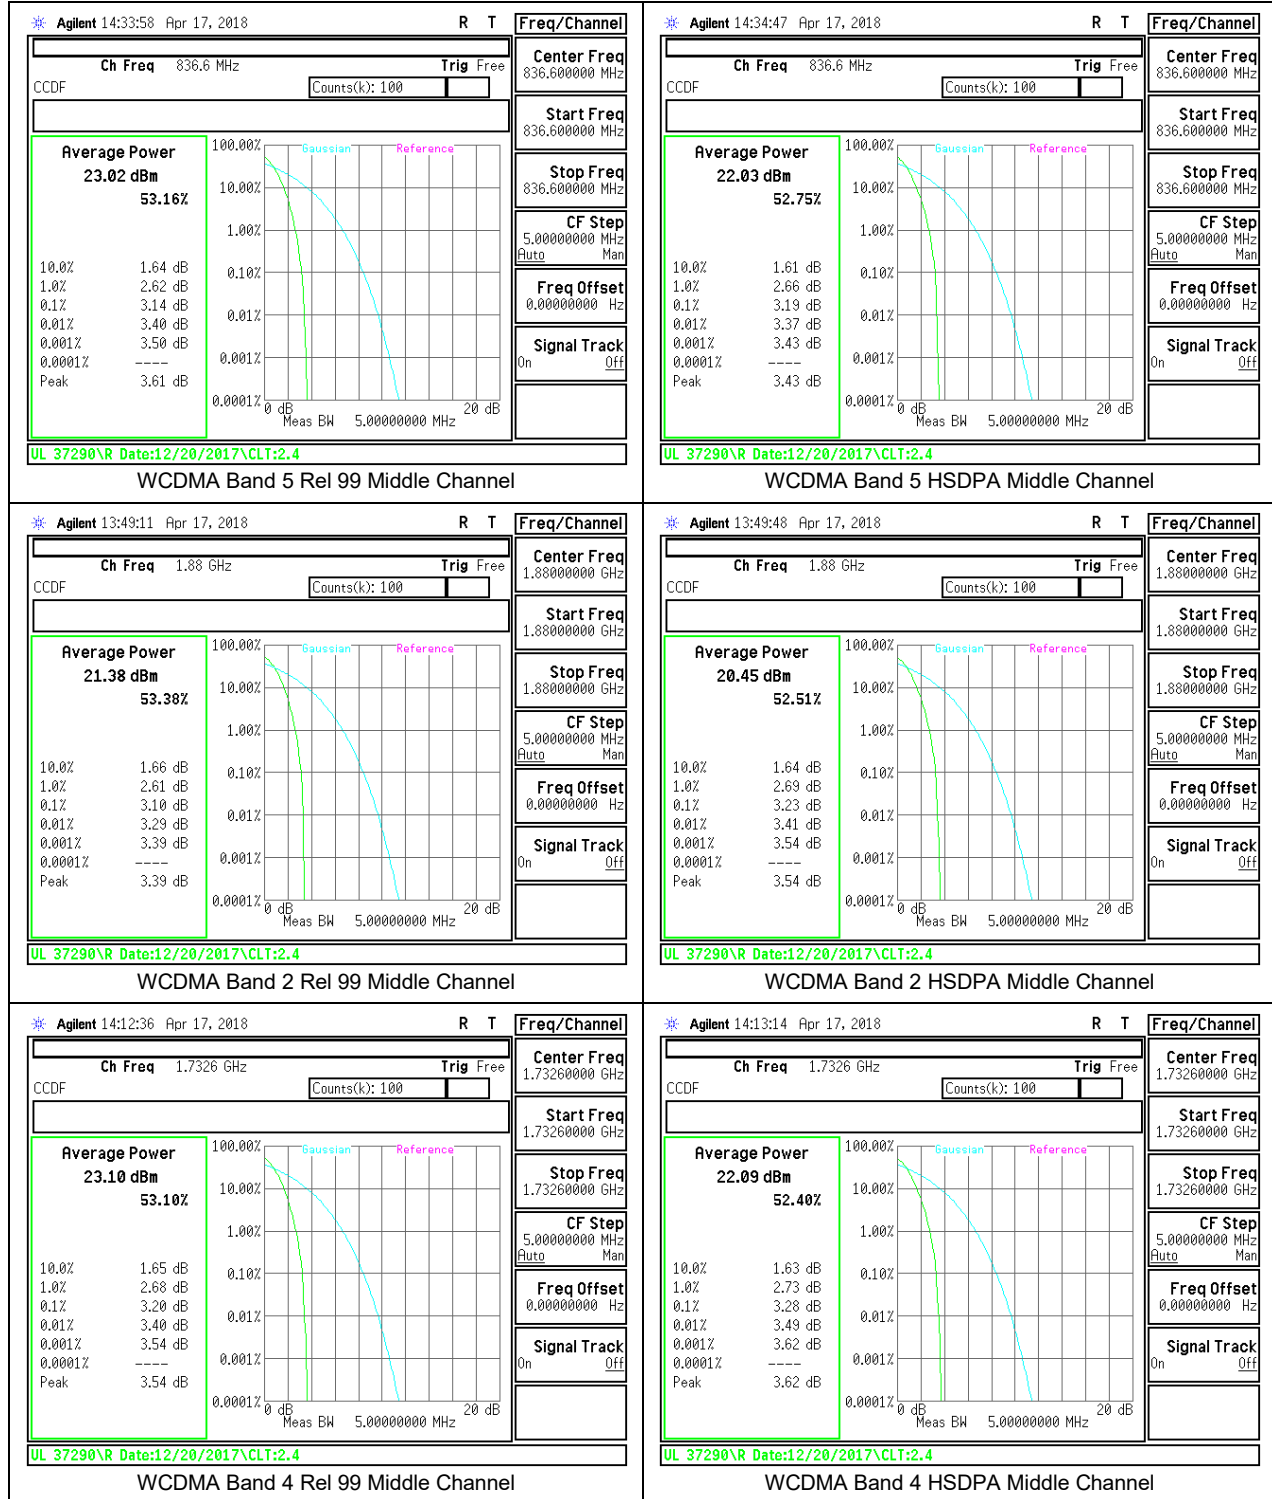



8.5.3. LTE BAND 4

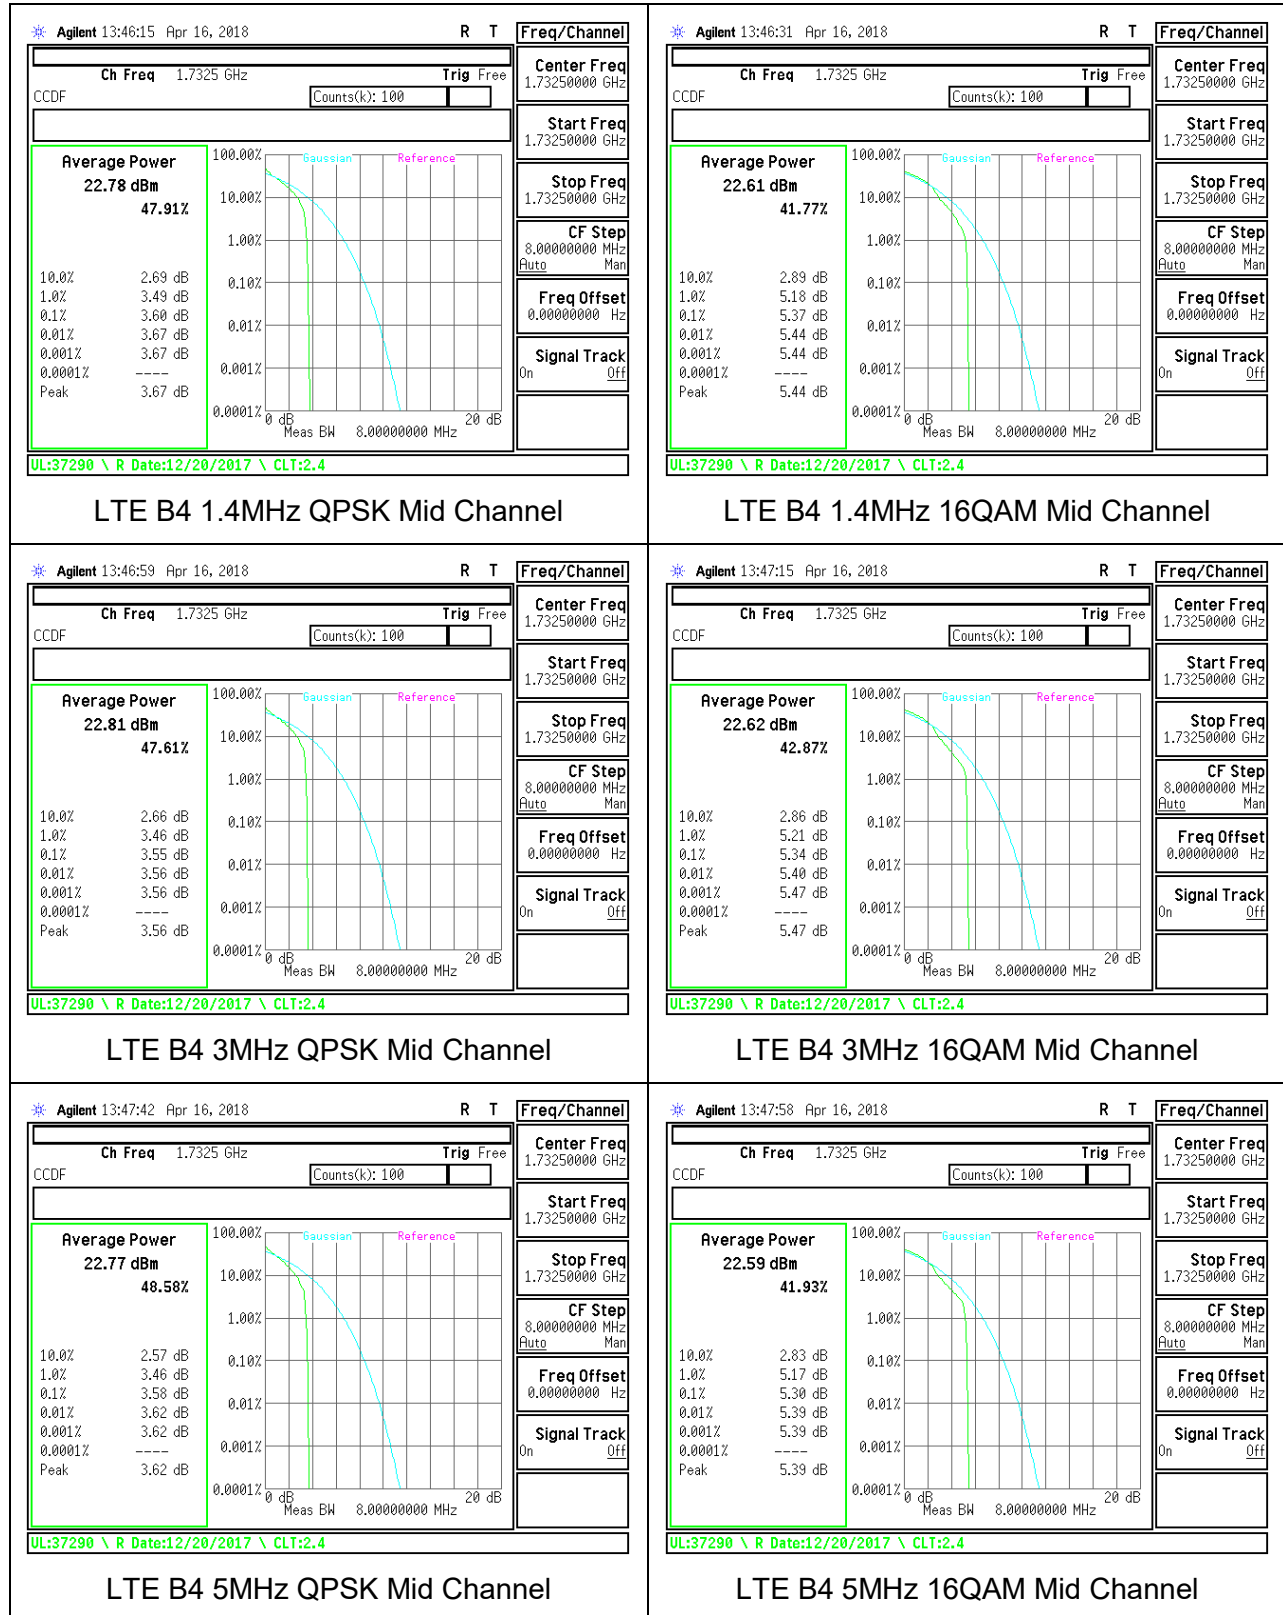

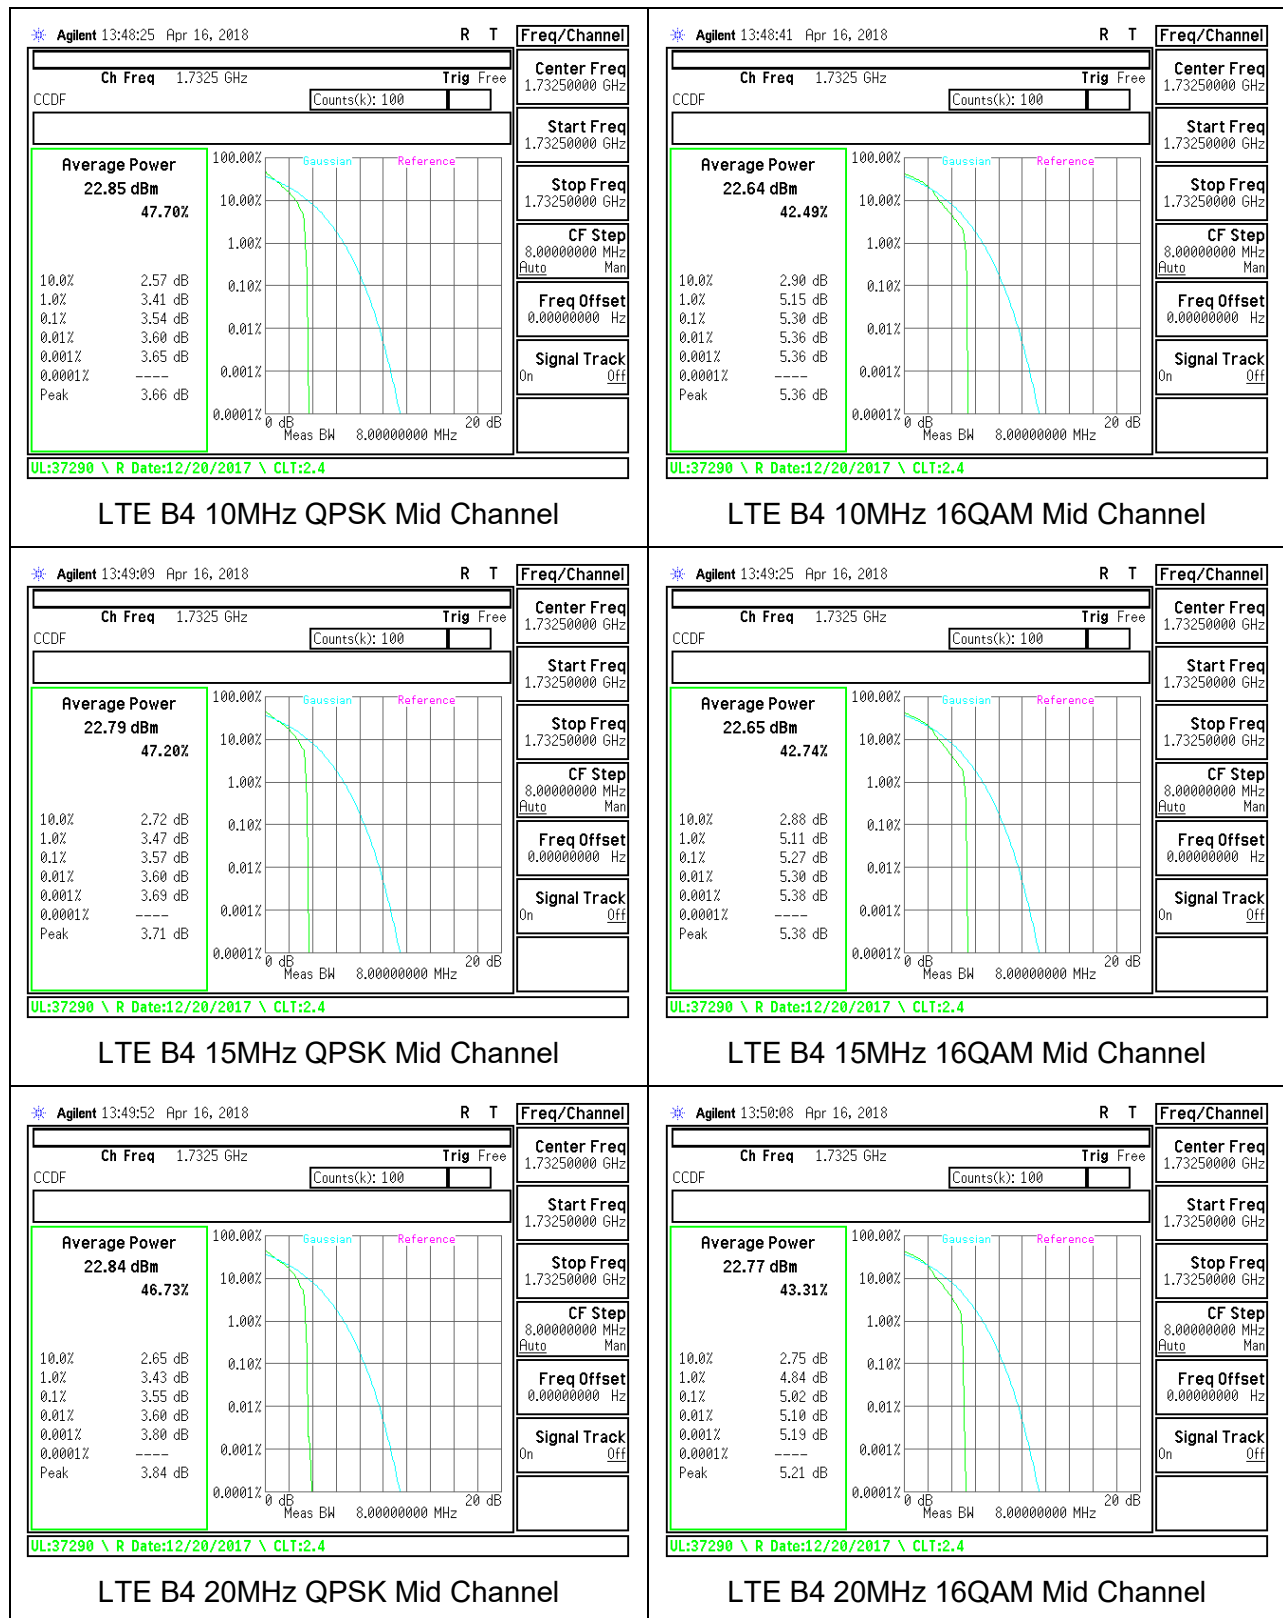



8.5.4. LTE BAND 5

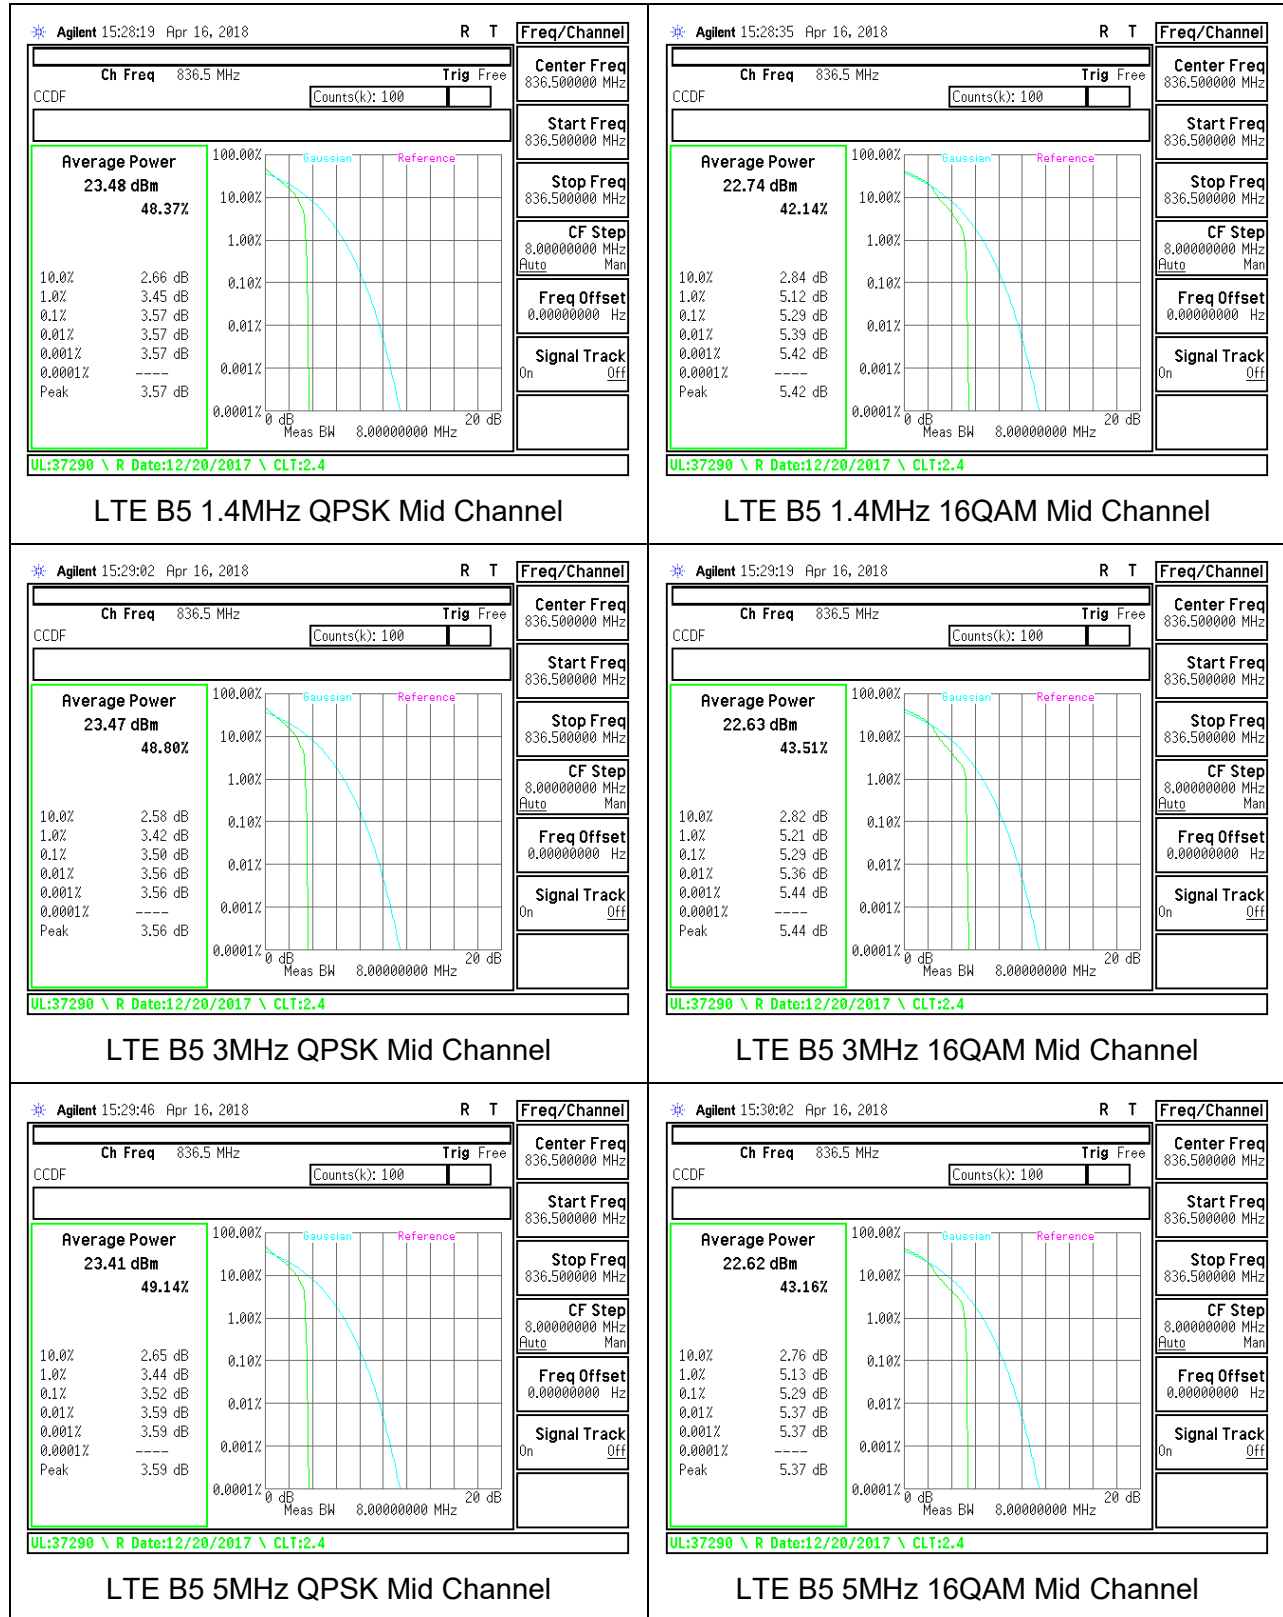

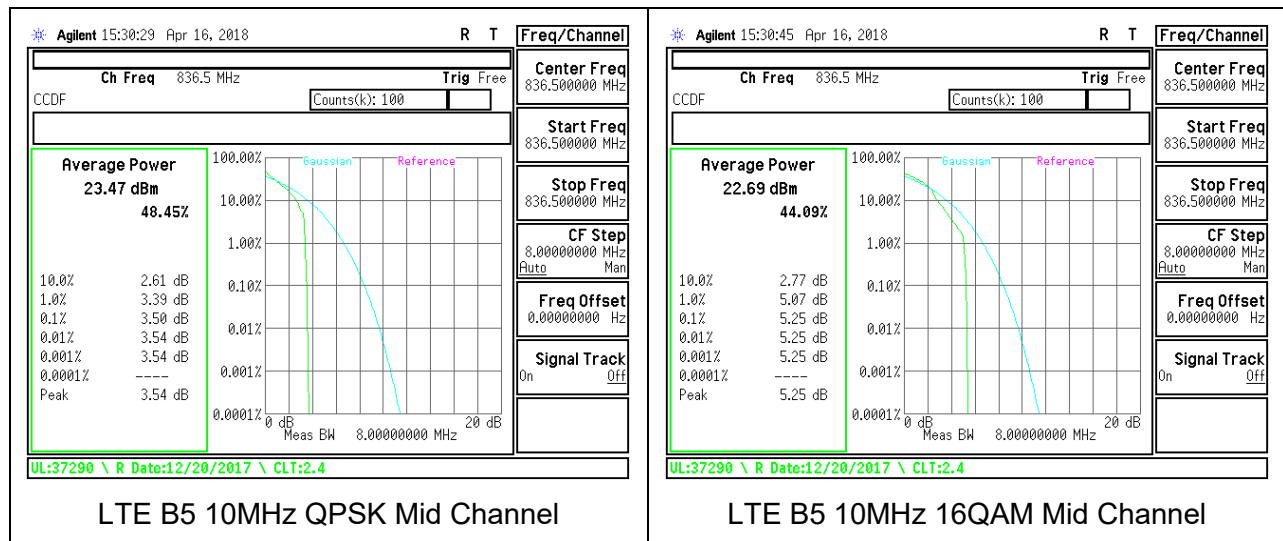


8.5.5. LTE BAND 7

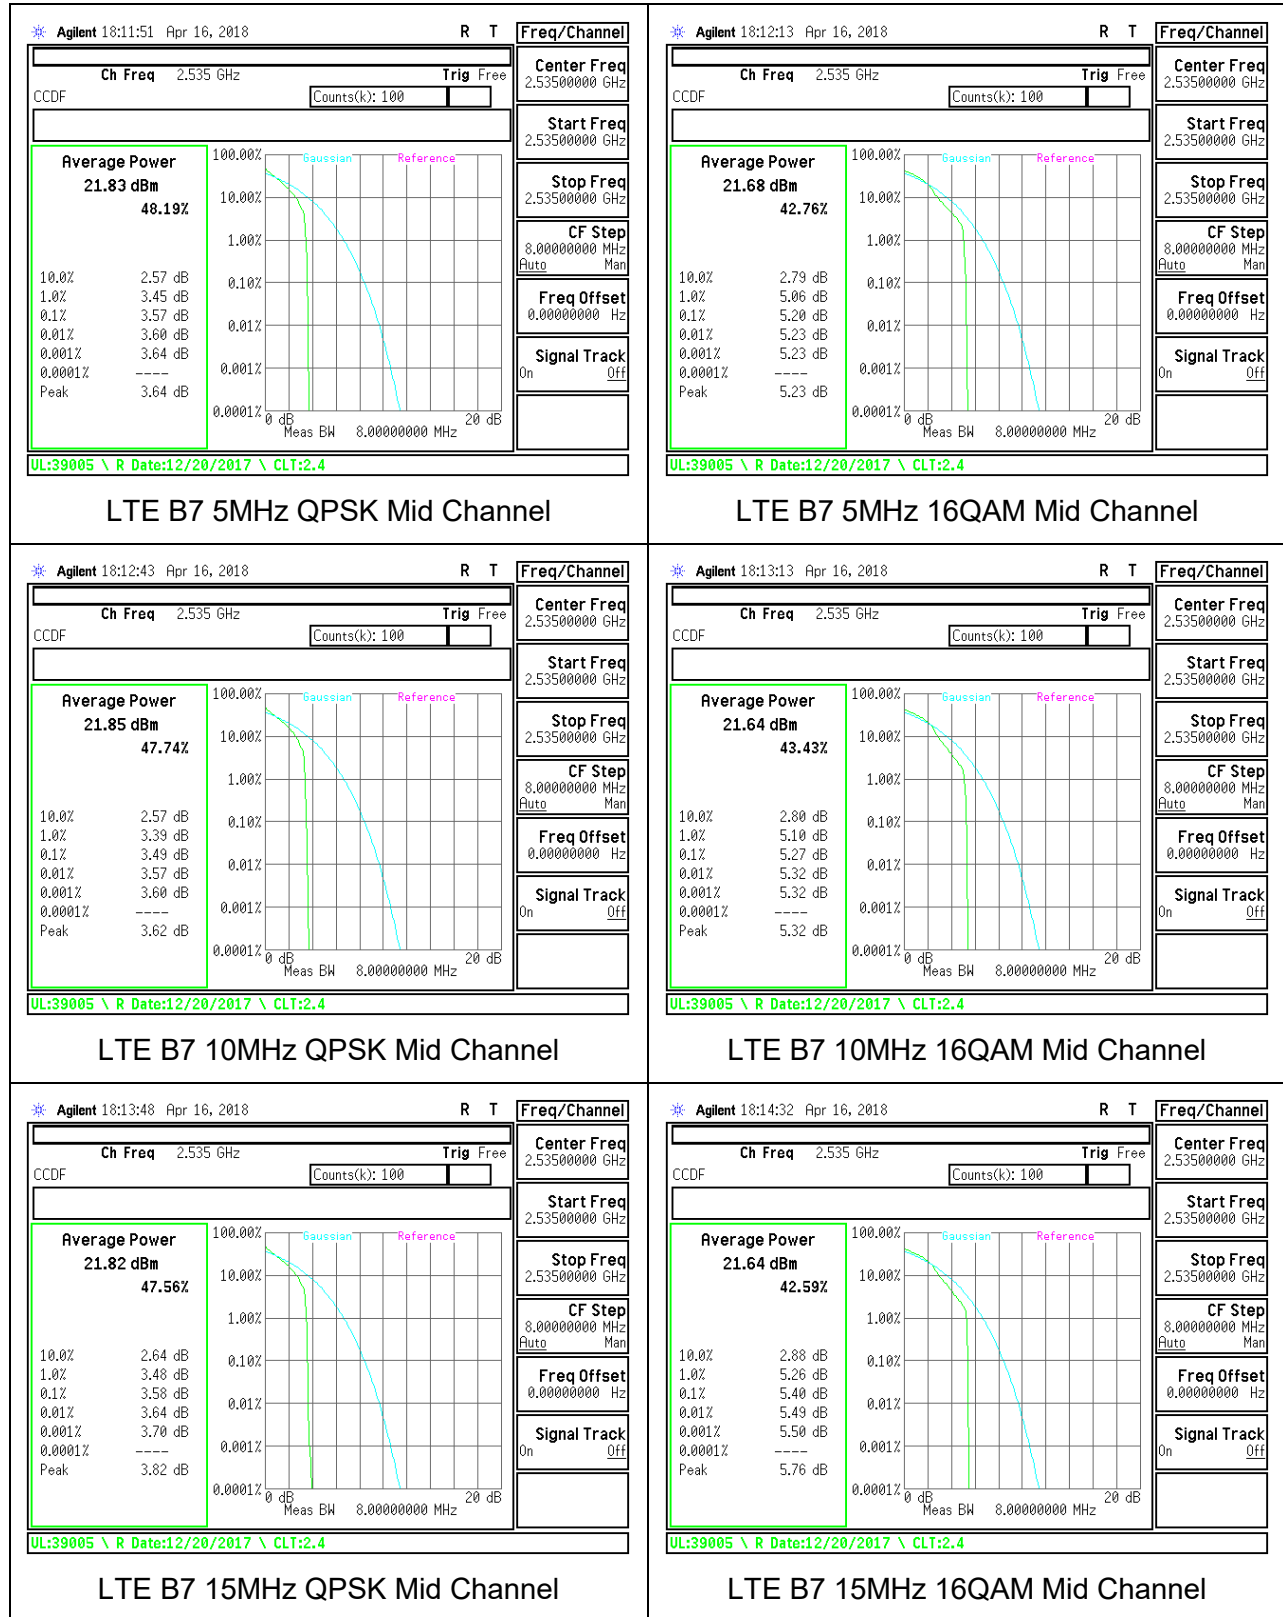


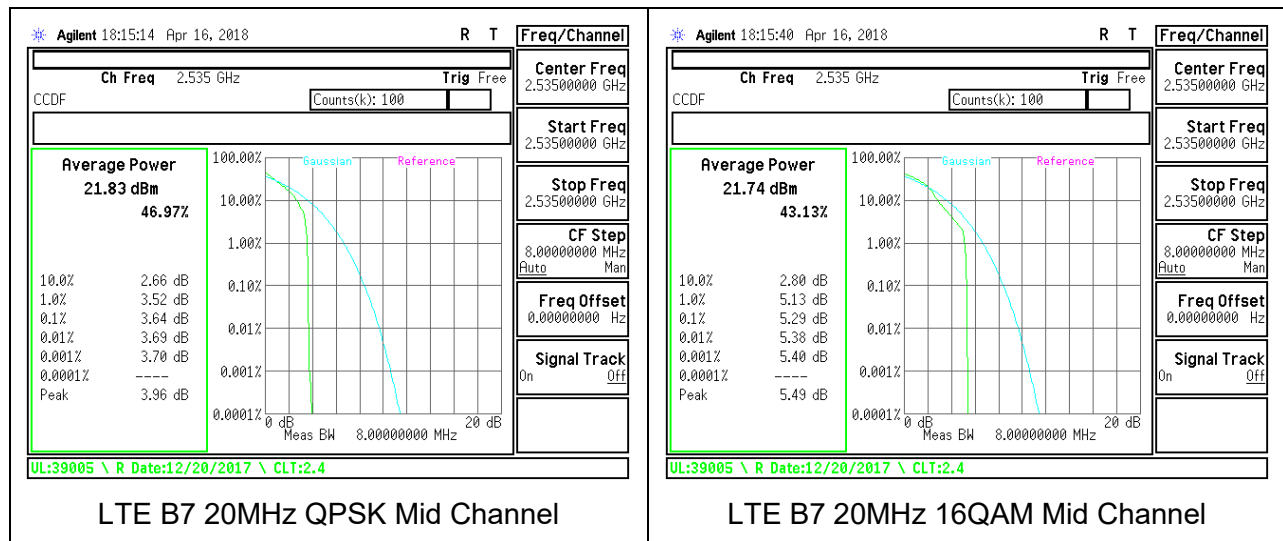


8.5.6. LTE BAND 13

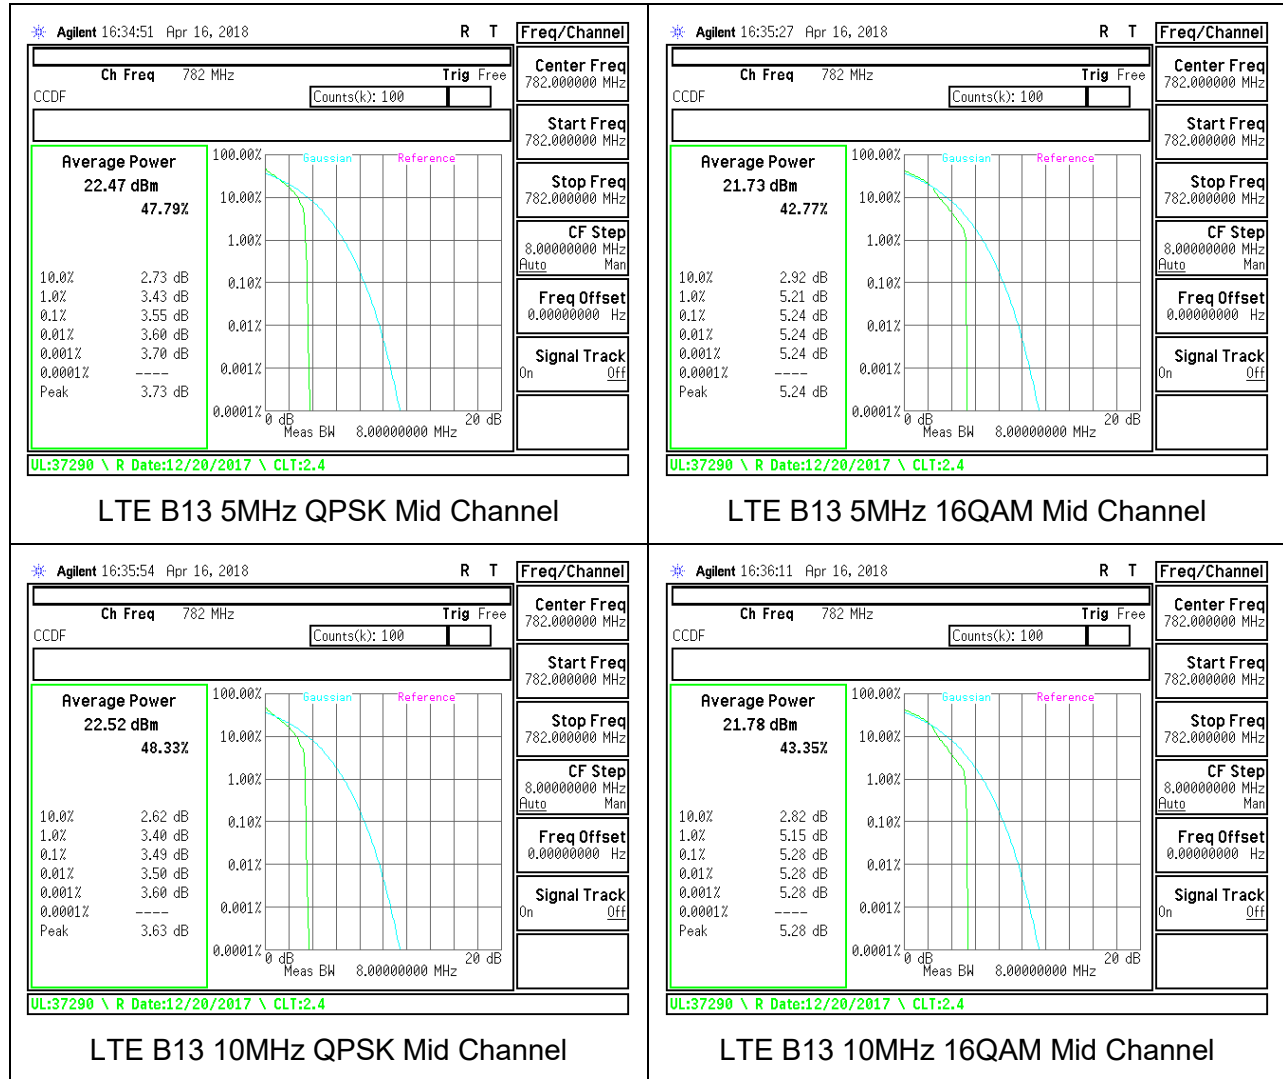


8.5.7. LTE BAND 17

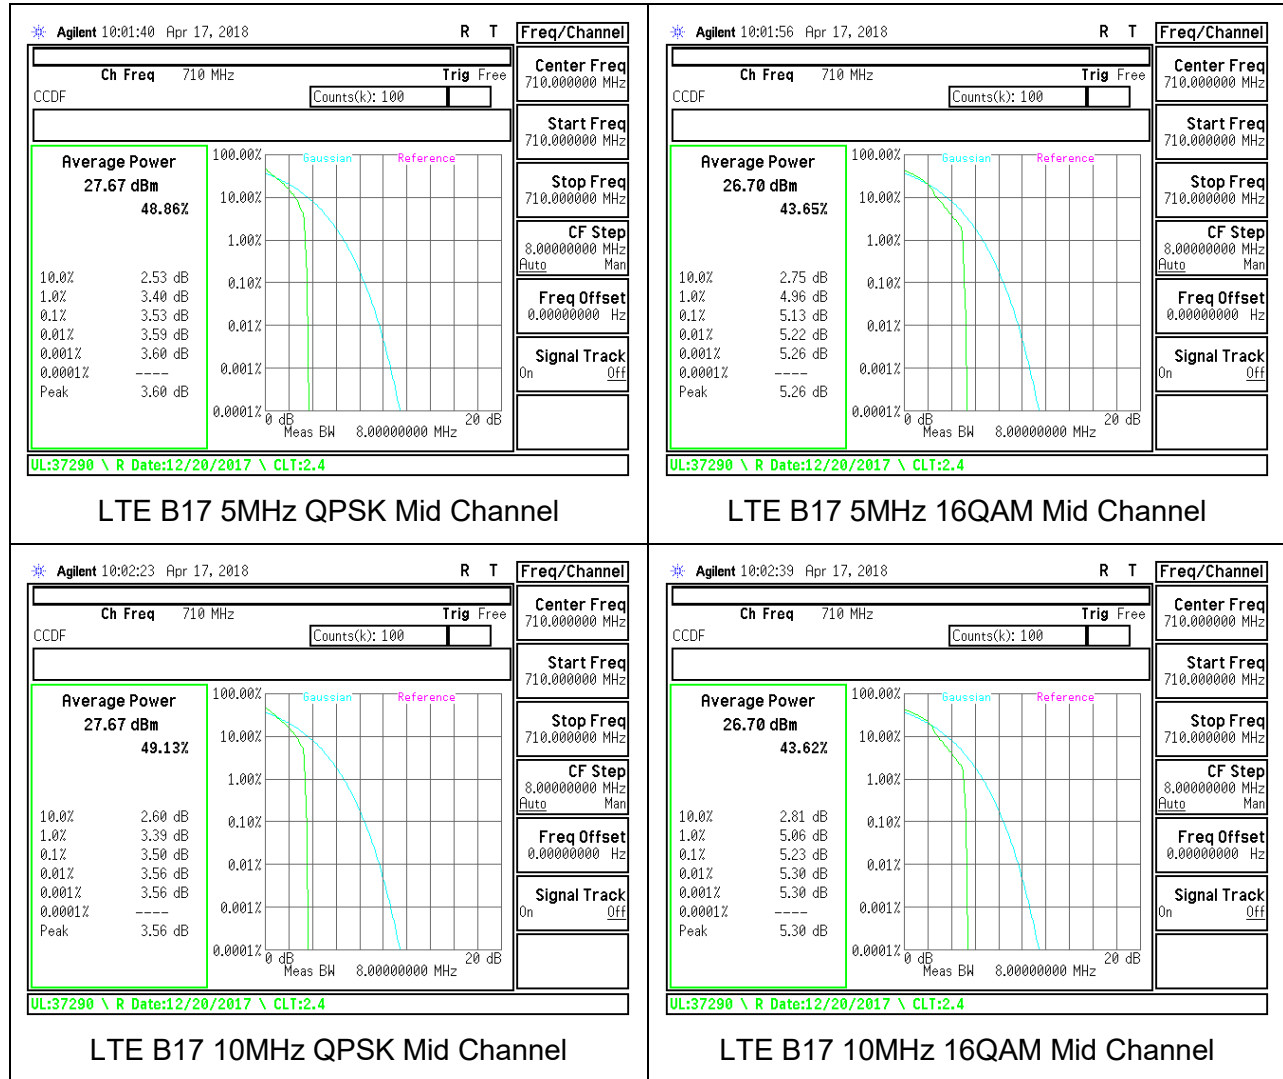

8.5.8. LTE BAND 41

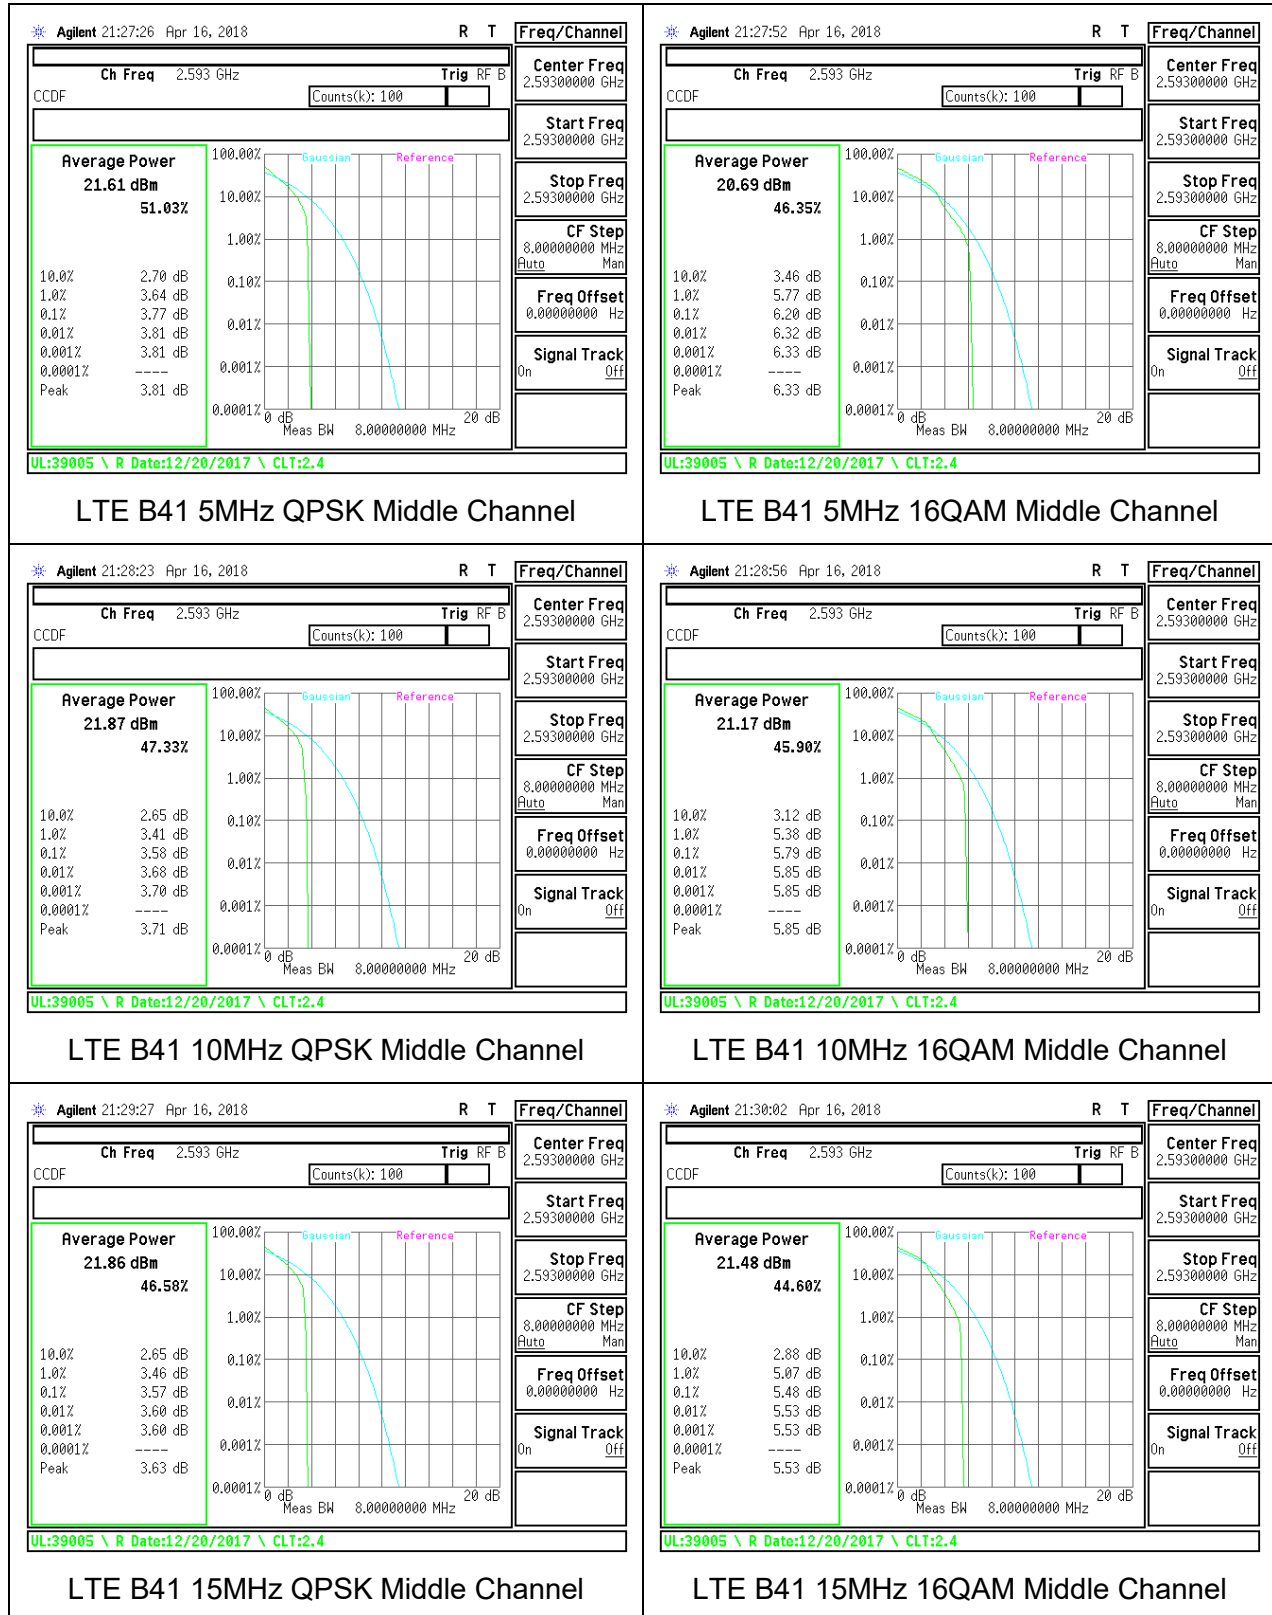

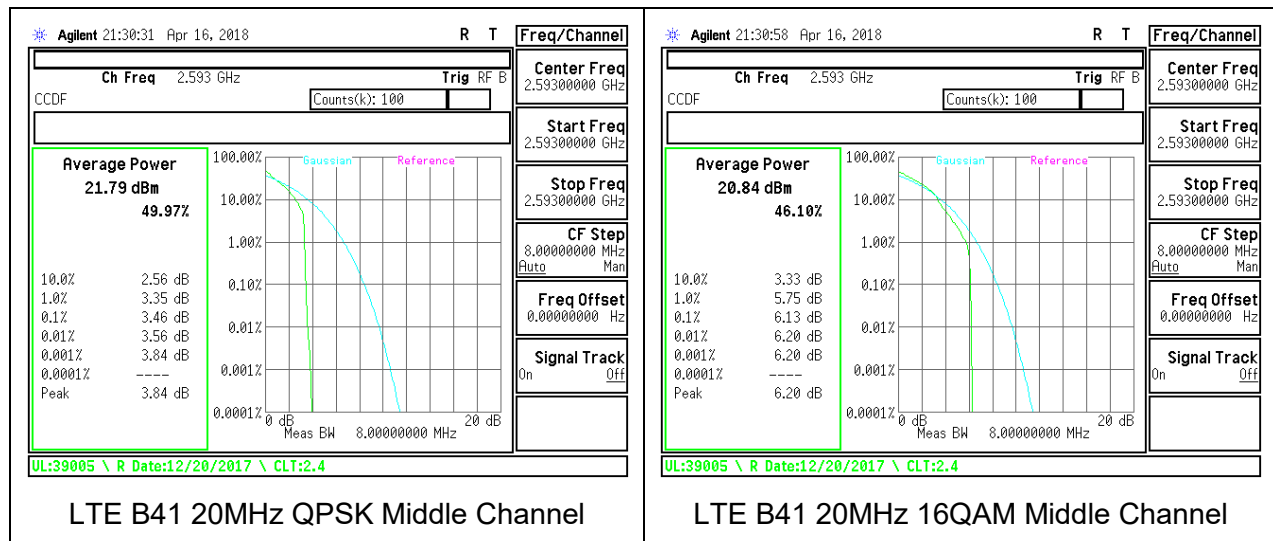

9. RADIATED TEST RESULTS

9.1. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, and §27.53

LIMITS

FCC: §22.917(a), §24.238(a), §27.53 (g), (h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (Band 13)

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40dBm/MHz).

FCC: §27.53 (m) (Band 7, 41)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

TEST PROCEDURE

KDB 971168 D01 v02r02/D02 v01

MODES TESTED

- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 41

RESULTS

9.1.1. GSM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/20/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: GPRS 850 MHz Harmonics										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch. 824.2MHz										
1648.40	-29.4	V	3.0	37.0	1.0	-65.5	-13.0	-52.5		
2472.60	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7		
3296.80	-20.5	V	3.0	36.2	1.0	-55.6	-13.0	-42.6		
1648.40	-30.2	H	3.0	37.0	1.0	-66.2	-13.0	-51.2		
2472.60	-25.4	H	3.0	36.4	1.0	-60.8	-13.0	-47.8		
3296.80	-18.8	H	3.0	36.2	1.0	-54.0	-13.0	-41.0		
Mid Ch. 836.6MHz										
1673.20	-28.7	V	3.0	37.0	1.0	-64.7	-13.0	-51.7		
2509.80	-24.1	V	3.0	36.4	1.0	-59.5	-13.0	-46.5		
3346.40	-21.3	V	3.0	36.1	1.0	-56.4	-13.0	-43.4		
1673.20	-28.9	H	3.0	37.0	1.0	-64.9	-13.0	-51.9		
2509.80	-25.8	H	3.0	36.4	1.0	-61.3	-13.0	-48.3		
3346.40	-19.6	H	3.0	36.1	1.0	-54.7	-13.0	-41.7		
High Ch. 848.8MHz										
1697.60	-29.5	V	3.0	37.0	1.0	-65.4	-13.0	-52.4		
2546.40	-24.2	V	3.0	36.4	1.0	-59.6	-13.0	-46.6		
3395.20	-20.3	V	3.0	36.1	1.0	-55.4	-13.0	-42.4		
1697.60	-29.6	H	3.0	37.0	1.0	-65.6	-13.0	-52.6		
2546.40	-26.3	H	3.0	36.4	1.0	-61.7	-13.0	-48.7		
3395.20	-20.8	H	3.0	36.1	1.0	-55.9	-13.0	-42.9		

GSM 850MHz GPRS

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12132753
Date: 4/20/2018
Test Engineer: 16069 OG
Configuration: EUT + Support Equipment
Location: Chamber C
Mode: EGPRS 850 MHz Harmonics

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 824.2MHz									
1648.40	-29.8	V	3.0	37.0	1.0	-65.8	-13.0	-52.8	
2472.60	-24.4	V	3.0	36.4	1.0	-59.8	-13.0	-46.8	
3296.80	-20.3	V	3.0	36.2	1.0	-55.4	-13.0	-42.4	
1648.40	-28.2	H	3.0	37.0	1.0	-64.2	-13.0	-51.2	
2472.60	-25.9	H	3.0	36.4	1.0	-61.4	-13.0	-48.4	
3296.80	-21.2	H	3.0	36.2	1.0	-56.3	-13.0	-43.3	
Mid Ch. 836.6MHz									
1673.20	-29.4	V	3.0	37.0	1.0	-65.4	-13.0	-52.4	
2509.80	-24.2	V	3.0	36.4	1.0	-59.6	-13.0	-46.6	
3346.40	-21.2	V	3.0	36.1	1.0	-56.3	-13.0	-43.3	
1673.20	-29.9	H	3.0	37.0	1.0	-65.9	-13.0	-52.9	
2509.80	-25.2	H	3.0	36.4	1.0	-60.6	-13.0	-47.6	
3346.40	-19.9	H	3.0	36.1	1.0	-55.0	-13.0	-42.0	
High Ch. 848.8MHz									
1697.60	-29.1	V	3.0	37.0	1.0	-65.0	-13.0	-52.0	
2546.40	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
3395.20	-20.2	V	3.0	36.1	1.0	-55.3	-13.0	-42.3	
1697.60	-29.3	H	3.0	37.0	1.0	-65.3	-13.0	-52.3	
2546.40	-26.2	H	3.0	36.4	1.0	-61.6	-13.0	-48.6	
3395.20	-21.3	H	3.0	36.1	1.0	-56.4	-13.0	-43.4	

GSM 850MHz EGPRS

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company: SOMC

Project #: 12132753

Date: 4/20/2018

Test Engineer: 16069 OG

Configuration: EUT + Support Equipment

Location: Chamber C

Mode: GPRS 1900 MHz Harmonics

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1850.2MHz									
3700.40	-19.9	V	3.0	35.9	1.0	-54.7	-13.0	-41.7	
5550.60	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4	
7400.80	-13.1	V	3.0	35.7	1.0	-47.8	-13.0	-34.8	
3700.40	-20.3	H	3.0	35.9	1.0	-55.2	-13.0	-42.2	
5550.60	-16.0	H	3.0	35.5	1.0	-50.5	-13.0	-37.5	
7400.80	-13.1	H	3.0	35.7	1.0	-47.8	-13.0	-34.8	
Mid Ch. 1880MHz									
3760.00	-18.6	V	3.0	35.8	1.0	-53.4	-13.0	-40.4	
5640.00	-15.2	V	3.0	35.5	1.0	-49.7	-13.0	-36.7	
7520.00	-13.1	V	3.0	35.7	1.0	-47.8	-13.0	-34.8	
3760.00	-18.6	H	3.0	35.8	1.0	-53.4	-13.0	-40.4	
5640.00	-16.6	H	3.0	35.5	1.0	-51.1	-13.0	-38.1	
7520.00	-11.6	H	3.0	35.7	1.0	-46.3	-13.0	-33.3	
High Ch. 1909.8MHz									
3819.60	-17.2	V	3.0	35.8	1.0	-51.9	-13.0	-38.9	
5729.40	-15.1	V	3.0	35.5	1.0	-48.6	-13.0	-35.6	
7639.20	-14.1	V	3.0	35.8	1.0	-48.8	-13.0	-35.8	
3819.60	-17.4	H	3.0	35.8	1.0	-52.1	-13.0	-39.1	
5729.40	-14.4	H	3.0	35.5	1.0	-48.9	-13.0	-35.9	
7639.20	-13.5	H	3.0	35.8	1.0	-48.3	-13.0	-35.3	

GSM 1900MHz GPRS

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12132753
Date: 4/20/2018
Test Engineer: 16069 OG
Configuration: EUT + Support Equipment
Location: Chamber C
Mode: EGPRS 1900 MHz Harmonics

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1850.2MHz									
3700.40	-18.8	V	3.0	35.9	1.0	-53.7	-13.0	-40.7	
5550.60	-15.8	V	3.0	35.5	1.0	-50.1	-13.0	-37.1	
7400.80	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	
3700.40	-20.9	H	3.0	35.9	1.0	-54.9	-13.0	-41.9	
5550.60	-15.7	H	3.0	35.5	1.0	-50.2	-13.0	-37.2	
7400.80	-12.5	H	3.0	35.7	1.0	-47.2	-13.0	-34.2	
Mid Ch. 1880MHz									
3760.00	-17.7	V	3.0	35.8	1.0	-52.5	-13.0	-39.5	
5640.00	-15.8	V	3.0	35.5	1.0	-50.3	-13.0	-37.3	
7520.00	-12.7	V	3.0	35.7	1.0	-47.4	-13.0	-34.4	
3760.00	-18.6	H	3.0	35.8	1.0	-53.4	-13.0	-40.4	
5640.00	-14.7	H	3.0	35.5	1.0	-49.2	-13.0	-36.2	
7520.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
High Ch. 1909.8MHz									
3819.60	-17.4	V	3.0	35.8	1.0	-52.1	-13.0	-39.1	
5729.40	-14.5	V	3.0	35.5	1.0	-48.0	-13.0	-35.0	
7639.20	-13.2	V	3.0	35.8	1.0	-48.0	-13.0	-35.0	
3819.60	-18.9	H	3.0	35.8	1.0	-52.8	-13.0	-39.8	
5729.40	-14.7	H	3.0	35.5	1.0	-49.2	-13.0	-36.2	
7639.20	-12.8	H	3.0	35.8	1.0	-47.5	-13.0	-34.5	

9.1.2. WCDMA

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12132753
Date: 4/20/2018
Test Engineer: 16069 OG
Configuration: EUT + Support Equipment
Location: Chamber C
Mode: Rel99 Band 5 Harmonics

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1652.80	-30.5	V	3.0	37.0	1.0	-66.5	-13.0	-53.5	
2479.20	-23.0	V	3.0	36.4	1.0	-58.5	-13.0	-45.5	
3305.60	-22.6	V	3.0	36.1	1.0	-57.8	-13.0	-44.8	
1652.80	-31.2	H	3.0	37.0	1.0	-67.2	-13.0	-54.2	
2479.20	-24.9	H	3.0	36.4	1.0	-60.4	-13.0	-47.4	
3305.60	-22.9	H	3.0	36.1	1.0	-58.0	-13.0	-45.0	
Mid Ch, 836.6MHz									
1673.20	-30.7	V	3.0	37.0	1.0	-66.7	-13.0	-53.7	
2509.80	-24.6	V	3.0	36.4	1.0	-60.0	-13.0	-47.0	
3346.40	-22.8	V	3.0	36.1	1.0	-57.9	-13.0	-44.9	
1673.20	-31.3	H	3.0	37.0	1.0	-67.2	-13.0	-54.2	
2509.80	-27.0	H	3.0	36.4	1.0	-62.4	-13.0	-49.4	
3346.40	-22.4	H	3.0	36.1	1.0	-57.5	-13.0	-44.5	
High Ch, 846.6MHz									
1693.20	-31.1	V	3.0	37.0	1.0	-67.0	-13.0	-54.0	
2539.80	-24.2	V	3.0	36.4	1.0	-59.6	-13.0	-46.6	
3386.40	-21.7	V	3.0	36.1	1.0	-56.8	-13.0	-43.8	
1693.20	-31.0	H	3.0	37.0	1.0	-66.9	-13.0	-53.9	
2539.80	-27.3	H	3.0	36.4	1.0	-62.8	-13.0	-49.8	
3386.40	-23.2	H	3.0	36.1	1.0	-58.3	-13.0	-45.3	

WCDMA Band 5 Rel 99

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132753									
Date:	4/20/2018									
Test Engineer:	16069 OG									
Configuration:	EUT + Support Equipment									
Location:	Chamber C									
Mode:	Rel99 Band 2 Harmonics									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1852.4MHz										
3704.80	-19.6	V	3.0	35.9	1.0	-54.4	-13.0	-41.4		
5557.20	-15.6	V	3.0	35.5	1.0	-50.0	-13.0	-37.0		
7409.60	-14.0	V	3.0	35.7	1.0	-48.7	-13.0	-35.7		
3704.80	-19.8	H	3.0	35.9	1.0	-54.4	-13.0	-41.4		
5557.20	-16.7	H	3.0	35.5	1.0	-51.2	-13.0	-38.2		
7409.60	-12.0	H	3.0	35.7	1.0	-46.8	-13.0	-33.8		
Mid Ch, 1860MHz										
3760.00	-18.6	V	3.0	35.8	1.0	-53.4	-13.0	-40.4		
5640.00	-16.1	V	3.0	35.5	1.0	-50.6	-13.0	-37.6		
7520.00	-12.9	V	3.0	35.7	1.0	-47.7	-13.0	-34.7		
3760.00	-19.1	H	3.0	35.8	1.0	-53.9	-13.0	-40.9		
5640.00	-15.5	H	3.0	35.5	1.0	-50.0	-13.0	-37.0		
7520.00	-11.1	H	3.0	35.7	1.0	-45.8	-13.0	-32.8		
High Ch, 1907.6MHz										
3815.20	-17.4	V	3.0	35.8	1.0	-52.2	-13.0	-39.2		
5722.80	-14.7	V	3.0	35.5	1.0	-48.2	-13.0	-36.2		
7630.40	-13.9	V	3.0	35.8	1.0	-46.6	-13.0	-33.6		
3815.20	-18.3	H	3.0	35.8	1.0	-53.1	-13.0	-40.1		
5722.80	-15.1	H	3.0	35.5	1.0	-49.6	-13.0	-36.6		
7630.40	-12.6	H	3.0	35.8	1.0	-47.3	-13.0	-34.3		

WCDMA Band 2 Rel 99

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12132753									
Date:	4/20/2018									
Test Engineer:	16069 OG									
Configuration:	EUT + Support Equipment									
Location:	Chamber C									
Mode:	Rel99 Band 4 Harmonics									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1712.4MHz										
3424.80	-22.5	V	3.0	36.1	1.0	-57.5	-13.0	-44.5		
5137.20	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0		
6849.60	-14.9	V	3.0	35.7	1.0	-49.5	-13.0	-36.5		
3424.80	-22.1	H	3.0	36.1	1.0	-57.2	-13.0	-44.2		
5137.20	-16.6	H	3.0	35.4	1.0	-51.1	-13.0	-38.1		
6849.60	-14.1	H	3.0	35.7	1.0	-48.8	-13.0	-35.8		
Mid Ch, 1732.6MHz										
3465.20	-21.3	V	3.0	36.0	1.0	-56.4	-13.0	-43.4		
5197.80	-14.9	V	3.0	35.4	1.0	-49.3	-13.0	-36.3		
6930.40	-14.0	V	3.0	35.7	1.0	-48.7	-13.0	-35.7		
3465.20	-22.1	H	3.0	36.0	1.0	-57.1	-13.0	-44.1		
5197.80	-16.1	H	3.0	35.4	1.0	-50.5	-13.0	-37.5		
6930.40	-12.8	H	3.0	35.7	1.0	-47.4	-13.0	-34.4		
High Ch, 1752.8MHz										
3505.20	-21.3	V	3.0	36.0	1.0	-56.3	-13.0	-43.3		
5257.80	-15.6	V	3.0	35.4	1.0	-50.0	-13.0	-37.0		
7010.40	-14.1	V	3.0	35.7	1.0	-48.8	-13.0	-35.8		
3505.20	-22.7	H	3.0	36.0	1.0	-57.7	-13.0	-44.7		
5257.80	-15.3	H	3.0	35.4	1.0	-49.8	-13.0	-36.8		
7010.40	-12.8	H	3.0	35.7	1.0	-47.5	-13.0	-34.5		

WCDMA Band 4 Rel 99

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12132753
Date: 4/20/2018
Test Engineer: 16069 OG
Configuration: EUT + Support Equipment
Location: Chamber C
Mode: HSDPA Band 5 Harmonics

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.4MHz									
1652.80	-30.5	V	3.0	37.0	1.0	-66.5	-13.0	-53.5	
2479.20	-23.8	V	3.0	36.4	1.0	-59.3	-13.0	-46.3	
3305.60	-22.3	V	3.0	36.1	1.0	-57.5	-13.0	-44.5	
1652.80	-31.4	H	3.0	37.0	1.0	-67.4	-13.0	-54.4	
2479.20	-26.2	H	3.0	36.4	1.0	-61.6	-13.0	-48.6	
3305.60	-22.3	H	3.0	36.1	1.0	-57.5	-13.0	-44.5	
Mid Ch, 836.6MHz									
1673.20	-30.8	V	3.0	37.0	1.0	-66.8	-13.0	-53.8	
2509.80	-24.6	V	3.0	36.4	1.0	-60.0	-13.0	-47.0	
3346.40	-22.8	V	3.0	36.1	1.0	-57.9	-13.0	-44.9	
1673.20	-31.9	H	3.0	37.0	1.0	-67.9	-13.0	-54.9	
2509.80	-27.0	H	3.0	36.4	1.0	-62.4	-13.0	-49.4	
3346.40	-23.4	H	3.0	36.1	1.0	-58.5	-13.0	-45.5	
High Ch, 846.6MHz									
1693.20	-30.1	V	3.0	37.0	1.0	-66.1	-13.0	-53.1	
2539.80	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1	
3386.40	-23.1	V	3.0	36.1	1.0	-58.2	-13.0	-45.2	
1693.20	-31.3	H	3.0	37.0	1.0	-67.3	-13.0	-54.3	
2539.80	-26.9	H	3.0	36.4	1.0	-62.3	-13.0	-49.3	
3386.40	-23.3	H	3.0	36.1	1.0	-58.4	-13.0	-45.4	

WCDMA Band 5 HSDPA

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement				
--	--	--	--	--

9.1.3. LTE BAND 4

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 4 Harmonics, 1.4MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1710.7MHz										
3421.40	-18.0	V	3.0	36.1	1.0	-53.1	-13.0	-40.1		
5132.10	-15.2	V	3.0	35.4	1.0	-49.7	-13.0	-36.7		
6842.80	-13.0	V	3.0	35.7	1.0	-47.7	-13.0	-34.7		
3421.40	-19.4	H	3.0	36.1	1.0	-54.5	-13.0	-41.5		
5132.10	-15.2	H	3.0	35.4	1.0	-49.8	-13.0	-36.8		
6842.80	-12.7	H	3.0	35.7	1.0	-47.3	-13.0	-34.3		
Mid Ch, 1732.5MHz										
3485.00	-19.5	V	3.0	36.0	1.0	-54.5	-13.0	-41.5		
5197.50	-14.5	V	3.0	35.4	1.0	-48.9	-13.0	-35.9		
6930.00	-13.1	V	3.0	35.7	1.0	-47.7	-13.0	-34.7		
3485.00	-19.6	H	3.0	36.0	1.0	-54.7	-13.0	-41.7		
5197.50	-15.2	H	3.0	35.4	1.0	-49.8	-13.0	-36.8		
6930.00	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4		
High Ch, 1754.3MHz										
3508.60	-19.5	V	3.0	36.0	1.0	-54.5	-13.0	-41.5		
5262.90	-14.7	V	3.0	35.4	1.0	-49.1	-13.0	-36.1		
7017.20	-13.1	V	3.0	35.7	1.0	-47.8	-13.0	-34.8		
3508.60	-19.6	H	3.0	36.0	1.0	-54.6	-13.0	-41.6		
5262.90	-15.0	H	3.0	35.4	1.0	-49.4	-13.0	-36.4		
7017.20	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1		

LTE B4 1.4MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_16QAM Band 4 Harmonics, 1.4MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1710.7MHz										
3421.40	-22.7	V	3.0	36.1	1.0	-57.8	-13.0	-44.8		
5132.10	-16.6	V	3.0	35.4	1.0	-51.1	-13.0	-38.1		
6842.80	-14.6	V	3.0	35.7	1.0	-49.3	-13.0	-36.3		
3421.40	-23.5	H	3.0	36.1	1.0	-58.5	-13.0	-45.5		
5132.10	-17.1	H	3.0	35.4	1.0	-51.5	-13.0	-38.5		
6842.80	-14.2	H	3.0	35.7	1.0	-48.8	-13.0	-35.8		
Mid Ch, 1732.5MHz										
3485.00	-21.6	V	3.0	36.0	1.0	-56.7	-13.0	-43.7		
5197.50	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0		
6930.00	-14.6	V	3.0	35.7	1.0	-49.3	-13.0	-36.3		
3485.00	-22.2	H	3.0	36.0	1.0	-57.3	-13.0	-44.3		
5197.50	-15.7	H	3.0	35.4	1.0	-50.1	-13.0	-37.1		
6930.00	-13.0	H	3.0	35.7	1.0	-47.7	-13.0	-34.7		
High Ch, 1754.3MHz										
3508.60	-21.3	V	3.0	36.0	1.0	-56.3	-13.0	-43.3		
5262.90	-16.8	V	3.0	35.4	1.0	-51.2	-13.0	-38.2		
7017.20	-14.6	V	3.0	35.7	1.0	-49.2	-13.0	-36.2		
3508.60	-22.1	H	3.0	36.0	1.0	-57.1	-13.0	-44.1		
5262.90	-16.7	H	3.0	35.4	1.0	-51.1	-13.0	-38.1		
7017.20	-13.6	H	3.0	35.7	1.0	-46.3	-13.0	-33.3		

LTE B4 1.4MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 4 Harmonics, 3MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1711.5MHz										
3423.00	-19.9	V	3.0	36.1	1.0	-55.0	-13.0	-42.0		
5134.50	-15.7	V	3.0	35.4	1.0	-50.1	-13.0	-37.1		
6846.00	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4		
3423.00	-18.7	H	3.0	36.1	1.0	-53.8	-13.0	-40.8		
5134.50	-14.3	H	3.0	35.4	1.0	-48.8	-13.0	-35.8		
6846.00	-13.0	H	3.0	35.7	1.0	-47.6	-13.0	-34.6		
Mid Ch, 1732.5MHz										
3485.00	-20.0	V	3.0	36.0	1.0	-55.1	-13.0	-42.1		
5197.50	-14.9	V	3.0	35.4	1.0	-49.3	-13.0	-36.3		
6930.00	-14.1	V	3.0	35.7	1.0	-48.8	-13.0	-35.8		
3485.00	-20.2	H	3.0	36.0	1.0	-55.2	-13.0	-42.2		
5197.50	-14.4	H	3.0	35.4	1.0	-48.8	-13.0	-35.8		
6930.00	-11.8	H	3.0	35.7	1.0	-46.5	-13.0	-33.5		
High Ch, 1753.5MHz										
3507.00	-20.2	V	3.0	36.0	1.0	-55.2	-13.0	-42.2		
5260.50	-15.6	V	3.0	35.4	1.0	-50.0	-13.0	-37.0		
7014.00	-13.1	V	3.0	35.7	1.0	-47.8	-13.0	-34.8		
3507.00	-19.4	H	3.0	36.0	1.0	-54.4	-13.0	-41.4		
5260.50	-15.0	H	3.0	35.4	1.0	-49.5	-13.0	-36.5		
7014.00	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4		

LTE B4 3MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 4 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1712.5MHz										
3425.00	-19.6	V	3.0	36.1	1.0	-54.7	-13.0	-41.7		
5137.50	-15.7	V	3.0	35.4	1.0	-50.1	-13.0	-37.1		
6850.00	-14.3	V	3.0	35.7	1.0	-48.0	-13.0	-35.0		
3425.00	-20.3	H	3.0	36.1	1.0	-55.4	-13.0	-42.4		
5137.50	-15.2	H	3.0	35.4	1.0	-49.8	-13.0	-36.8		
6850.00	-12.0	H	3.0	35.7	1.0	-46.7	-13.0	-33.7		
Mid Ch, 1732.5MHz										
3485.00	-20.0	V	3.0	36.0	1.0	-55.0	-13.0	-42.0		
5197.50	-15.6	V	3.0	35.4	1.0	-50.0	-13.0	-37.0		
6930.00	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4		
3485.00	-19.2	H	3.0	36.0	1.0	-54.3	-13.0	-41.3		
5197.50	-14.0	H	3.0	35.4	1.0	-48.4	-13.0	-35.4		
6930.00	-12.5	H	3.0	35.7	1.0	-47.2	-13.0	-34.2		
High Ch, 1752.5MHz										
3505.00	-19.8	V	3.0	36.0	1.0	-54.8	-13.0	-41.8		
5257.50	-15.8	V	3.0	35.4	1.0	-50.3	-13.0	-37.3		
7010.00	-12.8	V	3.0	35.7	1.0	-47.5	-13.0	-34.5		
3505.00	-20.9	H	3.0	36.0	1.0	-55.9	-13.0	-42.9		
5257.50	-14.9	H	3.0	35.4	1.0	-49.4	-13.0	-36.4		
7010.00	-12.2	H	3.0	35.7	1.0	-46.9	-13.			

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		12132753								
Date:		4/23/2018								
Test Engineer:		16069 OG								
Configuration:		EUT + Support Equipment								
Location:		Chamber C								
Mode:		LTE_QPSK Band 4 Harmonics, 10MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1715MHz										
3435.00	-20.2	V	3.0	36.1	1.0	-55.3	-13.0	-42.3		
5145.00	-16.2	V	3.0	35.4	1.0	-50.6	-13.0	-37.6		
6860.00	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4		
3435.00	-19.8	H	3.0	36.1	1.0	-54.9	-13.0	-41.9		
5145.00	-15.4	H	3.0	35.4	1.0	-49.8	-13.0	-36.8		
6860.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6		
Mid Ch, 1732.5MHz										
3465.00	-20.4	V	3.0	36.0	1.0	-55.5	-13.0	-42.5		
5197.50	-14.8	V	3.0	35.4	1.0	-49.3	-13.0	-36.3		
6930.00	-13.0	V	3.0	35.7	1.0	-47.7	-13.0	-34.7		
3465.00	-19.8	H	3.0	36.0	1.0	-54.9	-13.0	-41.9		
5197.50	-15.1	H	3.0	35.4	1.0	-49.8	-13.0	-36.8		
6930.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6		
High Ch, 1750MHz										
3500.00	-22.3	V	3.0	36.0	1.0	-57.3	-13.0	-44.3		
5250.00	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0		
7000.00	-14.6	V	3.0	35.7	1.0	-49.3	-13.0	-36.3		
3500.00	-22.3	H	3.0	36.0	1.0	-57.3	-13.0	-44.3		
5250.00	-14.1	H	3.0	35.4	1.0	-48.9	-13.0	-35.9		
7000.00	-13.0	H	3.0	35.7	1.0	-47.6	-13.0	-34.6		

LTE B4 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		12132753								
Date:		4/23/2018								
Test Engineer:		16069 OG								
Configuration:		EUT + Support Equipment								
Location:		Chamber C								
Mode:		LTE_16QAM Band 4 Harmonics, 10MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1715MHz										
3435.00	-22.2	V	3.0	36.1	1.0	-57.2	-13.0	-44.2		
5145.00	-16.6	V	3.0	35.4	1.0	-51.1	-13.0	-38.1		
6860.00	-15.2	V	3.0	35.7	1.0	-49.8	-13.0	-36.8		
3435.00	-22.5	H	3.0	36.1	1.0	-57.5	-13.0	-44.5		
5145.00	-16.7	H	3.0	35.4	1.0	-51.1	-13.0	-38.1		
6860.00	-13.6	H	3.0	35.7	1.0	-48.3	-13.0	-35.3		
Mid Ch, 1732.5MHz										
3465.00	-21.7	V	3.0	36.0	1.0	-56.7	-13.0	-43.7		
5197.50	-16.2	V	3.0	35.4	1.0	-50.6	-13.0	-37.6		
6930.00	-15.4	V	3.0	35.7	1.0	-50.1	-13.0	-37.1		
3465.00	-22.1	H	3.0	36.0	1.0	-57.2	-13.0	-44.2		
5197.50	-15.9	H	3.0	35.4	1.0	-50.3	-13.0	-37.3		
6930.00	-13.9	H	3.0	35.7	1.0	-48.6	-13.0	-35.6		
High Ch, 1750MHz										
3500.00	-21.2	V	3.0	36.0	1.0	-56.2	-13.0	-43.2		
5250.00	-16.1	V	3.0	35.4	1.0	-50.6	-13.0	-37.6		
7000.00	-15.2	V	3.0	35.7	1.0	-49.9	-13.0	-36.9		
3500.00	-22.3	H	3.0	36.0	1.0	-57.3	-13.0	-44.3		
5250.00	-15.3	H	3.0	35.4	1.0	-49.7	-13.0	-36.7		
7000.00	-12.6	H	3.0	35.7	1.0	-47.3	-13.0	-34.3		

LTE B4 10MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		12132753								
Date:		4/23/2018								
Test Engineer:		16069 OG								
Configuration:		EUT + Support Equipment								
Location:		Chamber C								
Mode:		LTE_QPSK Band 4 Harmonics, 15MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1717.5MHz										
3435.00	-21.9	V	3.0	36.1	1.0	-56.9	-13.0	-43.9		
5152.50	-17.0	V	3.0	35.4	1.0	-51.4	-13.0	-38.4		
6870.00	-16.1	V	3.0	35.7	1.0	-50.7	-13.0	-37.7		
3435.00	-22.2	H	3.0	36.1	1.0	-57.3	-13.0	-44.3		
5152.50	-16.5	H	3.0	35.4	1.0	-51.0	-13.0	-38.0		
6870.00	-13.5	H	3.0	35.7	1.0	-48.2	-13.0	-35.2		
Mid Ch, 1732.5MHz										
3465.00	-21.3	V	3.0	36.0	1.0	-56.3	-13.0	-43.3		
5197.50	-16.8	V	3.0	35.4	1.0	-51.2	-13.0	-38.2		
6930.00	-15.0	V	3.0	35.7	1.0	-49.7	-13.0	-36.7		
3465.00	-21.8	H	3.0	36.0	1.0	-56.8	-13.0	-43.8		
5197.50	-14.9	H	3.0	35.4	1.0	-49.3	-13.0	-36.3		
6930.00	-14.3	H	3.0	35.7	1.0	-49.0	-13.0	-36.0		
High Ch, 1747.5MHz										
3495.00	-21.5	V	3.0	36.0	1.0	-56.5	-13.0	-43.5		
5242.50	-16.6	V	3.0	35.4	1.0	-51.0	-13.0	-38.0		
6990.00	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4		
3495.00	-22.6	H	3.0	36.0	1.0	-57.6	-13.0	-44.6		
5242.50	-16.4	H	3.0	35.4	1.0	-50.8	-13.0	-37.8		
6990.00	-13.7	H	3.0	35.7	1.0	-48.4	-13.0	-35.4		

LTE B4 15MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:		SOMC								
Project #:		12132753								
Date:		4/23/2018								
Test Engineer:		16069 OG								
Configuration:		EUT + Support Equipment								
Location:		Chamber C								
Mode:		LTE_16QAM Band 4 Harmonics, 15MHz Bandwidth								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1717.5MHz										
3435.00	-21.8	V	3.0	36.1	1.0	-56.9	-13.0	-43.9		
5152.50	-17.3	V	3.0	35.4	1.0	-51.8	-13.0	-38.8		
6870.00	-14.7	V	3.0	35.7	1.0	-49.4	-13.0	-36.4		
3435.00	-22.1	H	3.0	36.1	1.0	-57.1	-13.0	-44.1		
5152.50	-15.5	H	3.0	35.4	1.0	-49.9	-13.0	-36.9		
6870.00	-14.3	H	3.0	35.7	1.0	-49.0	-13.0	-36.0		
Mid Ch, 1732.5MHz										
3465.00	-21.4	V	3.0	36.0	1.0	-56.4	-13.0	-43.4		
5197.50	-16.7	V	3.0	35.4	1.0	-51.1	-13.0	-38.1		
6930.00	-13.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2		
3465.00	-22.1	H	3.0	36.0	1.0	-57.1	-13.0	-44.1		
5197.50	-16.7	H	3.0	35.4	1.0	-51.1	-13.0	-38.1		
6930.00	-14.0	H	3.0	35.7	1.0	-48.7	-13.0	-35.7		
High Ch, 1747.5MHz										
3495.00	-22.1	V	3.0	36.0	1.0	-57.1	-13.0	-44.1		
5242.50	-16.8	V	3.0	35.4	1.0	-51.2	-13.0	-38.2		
6990.00	-14.8	V	3.0	35.7	1.0	-49.5	-13.0	-36.5		
3495.00	-21.4</									

9.1.4. LTE BAND 5

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 5 Harmonics, 3MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, B25.5MHz										
1651.00	-29.9	V	3.0	37.0	1.0	-66.0	-13.0	-53.0		
2476.50	-24.9	V	3.0	36.4	1.0	-60.2	-13.0	-47.2		
3302.00	-22.2	V	3.0	36.2	1.0	-57.4	-13.0	-44.4		
1651.00	-30.0	H	3.0	37.0	1.0	-66.0	-13.0	-53.0		
2476.50	-25.5	H	3.0	36.4	1.0	-61.0	-13.0	-48.0		
3302.00	-22.6	H	3.0	36.2	1.0	-57.7	-13.0	-44.7		
Mid Ch, B36.5MHz										
1673.00	-30.2	V	3.0	37.0	1.0	-66.2	-13.0	-53.2		
2509.50	-24.7	V	3.0	36.4	1.0	-60.2	-13.0	-47.2		
3346.00	-22.0	V	3.0	36.1	1.0	-57.1	-13.0	-44.1		
1673.00	-30.0	H	3.0	37.0	1.0	-66.0	-13.0	-53.0		
2509.50	-26.1	H	3.0	36.4	1.0	-61.8	-13.0	-48.8		
3346.00	-22.0	H	3.0	36.1	1.0	-57.1	-13.0	-44.1		
High Ch, B47.5MHz										
1695.00	-30.0	V	3.0	37.0	1.0	-65.9	-13.0	-52.9		
2542.50	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7		
3380.00	-22.7	V	3.0	36.1	1.0	-57.8	-13.0	-44.8		
1695.00	-30.0	H	3.0	37.0	1.0	-65.9	-13.0	-52.9		
2542.50	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2		
3380.00	-22.3	H	3.0	36.1	1.0	-57.3	-13.0	-44.3		

LTE B5 3MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 5 Harmonics, 3MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, B25.5MHz										
1651.00	-29.9	V	3.0	37.0	1.0	-66.0	-13.0	-53.0		
2476.50	-24.9	V	3.0	36.4	1.0	-60.2	-13.0	-47.2		
3302.00	-22.1	V	3.0	36.1	1.0	-57.3	-13.0	-44.3		
1651.00	-30.0	H	3.0	37.0	1.0	-66.0	-13.0	-53.0		
2476.50	-26.0	H	3.0	36.4	1.0	-61.5	-13.0	-48.5		
3302.00	-22.9	H	3.0	36.1	1.0	-58.0	-13.0	-45.0		
Mid Ch, B36.5MHz										
1673.00	-29.1	V	3.0	37.0	1.0	-65.1	-13.0	-52.1		
2509.50	-24.9	V	3.0	36.4	1.0	-60.3	-13.0	-47.3		
3346.00	-22.4	V	3.0	36.1	1.0	-57.5	-13.0	-44.5		
1673.00	-29.8	H	3.0	37.0	1.0	-65.8	-13.0	-52.8		
2509.50	-25.7	H	3.0	36.4	1.0	-61.1	-13.0	-48.1		
3346.00	-22.8	H	3.0	36.1	1.0	-58.9	-13.0	-45.9		
High Ch, B47.5MHz										
1693.00	-29.5	V	3.0	37.0	1.0	-65.5	-13.0	-52.5		
2539.50	-23.6	V	3.0	36.4	1.0	-60.0	-13.0	-47.0		
3386.00	-21.6	V	3.0	36.1	1.0	-56.6	-13.0	-43.6		
1693.00	-29.6	H	3.0	37.0	1.0	-65.6	-13.0	-52.6		
2539.50	-25.1	H	3.0	36.4	1.0	-60.5	-13.0	-47.5		
3386.00	-23.0	H	3.0	36.1	1.0	-58.1	-13.0	-45.1		

LTE B5 3MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 5 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, B26.5MHz										
1653.00	-29.9	V	3.0	37.0	1.0	-66.0	-13.0	-53.0		
2479.50	-24.9	V	3.0	36.4	1.0	-60.2	-13.0	-47.2		
3306.00	-22.4	V	3.0	36.1	1.0	-57.6	-13.0	-44.6		
1653.00	-30.3	H	3.0	37.0	1.0	-66.3	-13.0	-53.3		
2479.50	-26.1	H	3.0	36.4	1.0	-61.6	-13.0	-48.6		
3306.00	-23.1	H	3.0	36.1	1.0	-58.2	-13.0	-45.2		
Mid Ch, B36.5MHz										
1673.00	-30.1	V	3.0	37.0	1.0	-66.1	-13.0	-53.1		
2509.50	-24.4	V	3.0	36.4	1.0	-59.8	-13.0	-46.8		
3346.00	-22.6	V	3.0	36.1	1.0	-57.7	-13.0	-44.7		
1673.00	-30.0	H	3.0	37.0	1.0	-66.0	-13.0	-53.0		
2509.50	-24.8	H	3.0	36.4	1.0	-60.2	-13.0	-47.2		
3346.00	-22.5	H	3.0	36.1	1.0	-57.6	-13.0	-44.6		
High Ch, B46.5MHz										
1693.00	-29.8	V	3.0	37.0	1.0	-65.8	-13.0	-52.8		
2539.50	-24.8	V	3.0	36.4	1.0	-60.0	-13.0	-47.0		
3386.00	-22.2	V	3.0	36.1	1.0	-57.3	-13.0	-44.3		
1693.00	-29.9	H	3.0	37.0	1.0	-65.9	-13.0	-52.9		
2539.50	-25.0	H	3.0	36.4	1.0	-60.5	-13.0	-47.5		
3386.00	-22.8	H	3.0	36.1	1.0	-57.9	-13.0	-44.9		

LTE B5 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/23/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 5 Harmonics, 10MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, B20MHz										
1658.00	-29.4	V	3.0	37.0	1.0	-65.4	-13.0	-52.4		
2487.00	-24.6	V	3.0	36.4	1.0	-60.0	-13.0	-47.0		
3316.00	-22.9	V	3.0	36.1	1.0	-58.1	-13.0	-45.1		
1658.00	-28.9	H	3.0	37.0	1.0	-64.9	-13.0	-51.9		
2487.00	-25.8	H	3.0	36.4	1.0	-61.3	-13.0	-48.3		
3316.00	-22.6	H	3.0	36.1	1.0	-57.7	-13.0	-44.7		
Mid Ch, B36.5MHz										
1673.00	-29.5	V	3.0	37.0	1.0	-65.5	-13.0	-52.5		
2509.50	-24.8	V	3.0	36.4	1.0	-60.2	-13.0	-47.2		
3346.00	-22.1	V	3.0	36.1	1.0	-57.2	-13.0	-44.2		
1673.00	-29.7	H	3.0	37.0	1.0	-65.7	-13.0	-52.7		
2509.50	-26.3	H	3.0	36.4	1.0	-61.7	-13.0	-48.7		
3346.00	-23.2	H	3.0	36.1	1.0	-58.3	-13.0	-45.3		
High Ch, B44MHz										
1688.00	-29.6	V	3.0	37.0	1.0	-65.6	-13.0	-52.6		
2532.00	-24.8	V	3.0	36.4	1.0	-60.2	-13.0	-47.2		
3376.00	-23.0	V	3.0	36.1	1.0	-57.3	-13.0	-44.3		
1688.00	-29.6	H	3.0	37.0	1.0	-65.6	-13.0	-52.6		
2532.00	-25.8	H	3.0	36.4	1.0	-61.2	-13.0	-48.2		
3376.00	-23.0	H	3.0	36.1	1.0	-58.1	-13.0	-45.1		

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132753									
Date: 4/23/2018									
Test Engineer: 16090 CO									
Configuration: EUT + Support Equipment									
Location: Chamber C									
Mode: LTE_QPSK Band 5 Harmonics, 1.4MHz Bandwidth									
f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 824.7MHz									
1649.40	-29.8	V	3.0	37.0	1.0	-65.8	-13.0	-52.8	
2474.10	-25.3	V	3.0	36.4	1.0	-60.7	-13.0	-47.7	
3298.80	-22.4	V	3.0	36.2	1.0	-57.5	-13.0	-44.5	
1649.40	-29.3	H	3.0	37.0	1.0	-65.3	-13.0	-52.3	
2474.10	-25.9	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
3298.80	-23.5	H	3.0	36.2	1.0	-58.7	-13.0	-45.7	
Mid Ch, 836.5MHz									
1673.00	-29.2	V	3.0	37.0	1.0	-65.2	-13.0	-52.2	
2509.50	-24.5	V	3.0	36.4	1.0	-59.9	-13.0	-46.9	
3346.00	-22.7	V	3.0	36.1	1.0	-57.9	-13.0	-44.9	
1673.00	-29.6	H	3.0	37.0	1.0	-65.6	-13.0	-52.6	
2509.50	-25.7	H	3.0	36.4	1.0	-61.6	-13.0	-48.6	
3346.00	-23.1	H	3.0	36.1	1.0	-58.2	-13.0	-45.2	
High Ch, 848.3MHz									
1696.50	-30.1	V	3.0	37.0	1.0	-66.0	-13.0	-53.0	
2544.90	-24.4	V	3.0	36.4	1.0	-59.8	-13.0	-46.8	
3393.20	-22.3	V	3.0	36.1	1.0	-57.4	-13.0	-44.4	
1696.50	-30.2	H	3.0	37.0	1.0	-66.2	-13.0	-53.2	
2544.90	-24.6	H	3.0	36.4	1.0	-60.0	-13.0	-47.0	
3393.20	-22.1	H	3.0	36.1	1.0	-57.2	-13.0	-44.2	

LTE B5 1.4MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12132753									
Date: 4/23/2018									
Test Engineer: 16090 CO									
Configuration: EUT + Support Equipment									
Location: Chamber C									
Mode: LTE_16QAM Band 5 Harmonics, 1.4MHz Bandwidth									
f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 824.7MHz									
1649.40	-29.5	V	3.0	37.0	1.0	-65.5	-13.0	-52.5	
2474.10	-23.5	V	3.0	36.4	1.0	-58.9	-13.0	-45.9	
3298.80	-22.1	V	3.0	36.2	1.0	-57.2	-13.0	-44.2	
1649.40	-30.0	H	3.0	37.0	1.0	-66.0	-13.0	-53.0	
2474.10	-25.5	H	3.0	36.4	1.0	-60.9	-13.0	-47.9	
3298.80	-23.0	H	3.0	36.2	1.0	-58.1	-13.0	-45.1	
Mid Ch, 836.5MHz									
1673.00	-29.8	V	3.0	37.0	1.0	-65.8	-13.0	-52.8	
2509.50	-23.1	V	3.0	36.4	1.0	-58.6	-13.0	-45.6	
3346.00	-22.6	V	3.0	36.1	1.0	-57.7	-13.0	-44.7	
1673.00	-29.5	H	3.0	37.0	1.0	-65.4	-13.0	-52.4	
2509.50	-25.9	H	3.0	36.4	1.0	-61.3	-13.0	-48.3	
3346.00	-22.6	H	3.0	36.1	1.0	-57.7	-13.0	-44.7	
High Ch, 848.3MHz									
1696.50	-29.5	V	3.0	37.0	1.0	-65.5	-13.0	-52.5	
2544.90	-24.9	V	3.0	36.4	1.0	-60.3	-13.0	-47.3	
3393.20	-22.0	V	3.0	36.1	1.0	-57.1	-13.0	-44.1	
1696.50	-29.5	H	3.0	37.0	1.0	-65.5	-13.0	-52.5	
2544.90	-24.8	H	3.0	36.4	1.0	-60.2	-13.0	-47.2	
3393.20	-22.5	H	3.0	36.1	1.0	-57.6	-13.0	-44.6	

LTE B5 1.4MHz 16QAM

9.1.5. LTE BAND 7

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 7 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2502.5MHz										
5005.00	-17.9	V	3.0	35.5	1.0	-52.4	-25.0	-27.4		
7507.50	-14.7	V	3.0	35.7	1.0	-48.4	-25.0	-23.4		
10010.00	-11.9	V	3.0	36.0	1.0	-46.9	-25.0	-21.9		
5005.00	-17.6	H	3.0	35.5	1.0	-52.1	-25.0	-27.1		
7507.50	-11.2	H	3.0	35.7	1.0	-48.0	-25.0	-23.0		
10010.00	-9.6	H	3.0	36.0	1.0	-44.6	-25.0	-19.6		
Mid Ch, 2535MHz										
5070.00	-18.6	V	3.0	35.4	1.0	-53.0	-25.0	-28.0		
7605.00	-15.6	V	3.0	35.8	1.0	-49.3	-25.0	-24.3		
10140.00	-11.8	V	3.0	36.0	1.0	-46.8	-25.0	-21.8		
5070.00	-18.3	H	3.0	35.4	1.0	-52.8	-25.0	-27.8		
7605.00	-14.5	H	3.0	35.8	1.0	-49.2	-25.0	-24.2		
10140.00	-11.0	H	3.0	36.0	1.0	-46.0	-25.0	-21.0		
High Ch, 2567.5MHz										
5135.00	-19.3	V	3.0	35.4	1.0	-53.7	-25.0	-28.7		
7702.50	-13.6	V	3.0	35.8	1.0	-48.3	-25.0	-23.3		
10270.00	-10.5	V	3.0	35.9	1.0	-45.4	-25.0	-20.4		
5135.00	-18.7	H	3.0	35.4	1.0	-53.1	-25.0	-28.1		
7702.50	-14.1	H	3.0	35.8	1.0	-48.9	-25.0	-23.9		
10270.00	-10.3	H	3.0	35.9	1.0	-45.2	-25.0	-20.2		

LTE B7 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 7 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2502.5MHz										
5005.00	-16.8	V	3.0	35.5	1.0	-51.3	-25.0	-26.3		
7507.50	-13.6	V	3.0	35.7	1.0	-48.4	-25.0	-23.4		
10010.00	-12.4	V	3.0	36.0	1.0	-47.4	-25.0	-22.4		
5005.00	-17.7	H	3.0	35.5	1.0	-52.2	-25.0	-27.2		
7507.50	-12.8	H	3.0	35.7	1.0	-47.5	-25.0	-22.5		
10010.00	-10.4	H	3.0	36.0	1.0	-45.5	-25.0	-20.5		
Mid Ch, 2535MHz										
5070.00	-19.0	V	3.0	35.4	1.0	-53.5	-25.0	-28.5		
7605.00	-15.1	V	3.0	35.8	1.0	-48.9	-25.0	-23.9		
10140.00	-10.3	V	3.0	36.0	1.0	-45.3	-25.0	-20.3		
5070.00	-18.7	H	3.0	35.4	1.0	-53.2	-25.0	-28.2		
7605.00	-14.2	H	3.0	35.8	1.0	-49.0	-25.0	-24.0		
10140.00	-11.0	H	3.0	36.0	1.0	-46.8	-25.0	-21.0		
High Ch, 2567.5MHz										
5135.00	-18.0	V	3.0	35.4	1.0	-52.5	-25.0	-27.5		
7702.50	-13.0	V	3.0	35.8	1.0	-48.3	-25.0	-23.3		
10270.00	-12.1	V	3.0	35.9	1.0	-47.0	-25.0	-22.0		
5135.00	-18.2	H	3.0	35.4	1.0	-52.7	-25.0	-27.7		
7702.50	-14.0	H	3.0	35.8	1.0	-48.8	-25.0	-23.8		
10270.00	-10.0	H	3.0	35.9	1.0	-44.9	-25.0	-19.9		

LTE B7 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 7 Harmonics, 10MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2505MHz										
5010.00	-17.7	V	3.0	35.5	1.0	-52.1	-25.0	-27.1		
7515.00	-14.3	V	3.0	35.7	1.0	-49.0	-25.0	-24.0		
10020.00	-11.3	V	3.0	36.0	1.0	-46.4	-25.0	-21.4		
5010.00	-17.9	H	3.0	35.5	1.0	-52.4	-25.0	-27.4		
7515.00	-13.8	H	3.0	35.7	1.0	-48.5	-25.0	-23.5		
10020.00	-10.3	H	3.0	36.0	1.0	-45.3	-25.0	-20.3		
Mid Ch, 2535MHz										
5070.00	-19.0	V	3.0	35.4	1.0	-53.5	-25.0	-28.5		
7605.00	-14.6	V	3.0	35.8	1.0	-49.3	-25.0	-24.3		
10140.00	-11.6	V	3.0	36.0	1.0	-46.5	-25.0	-21.5		
5070.00	-18.1	H	3.0	35.4	1.0	-52.6	-25.0	-27.6		
7605.00	-12.9	H	3.0	35.8	1.0	-47.7	-25.0	-22.7		
10140.00	-10.9	H	3.0	36.0	1.0	-45.9	-25.0	-20.9		
High Ch, 2565MHz										
5130.00	-18.4	V	3.0	35.4	1.0	-52.8	-25.0	-27.8		
7695.00	-13.6	V	3.0	35.8	1.0	-48.4	-25.0	-23.4		
10260.00	-11.9	V	3.0	35.9	1.0	-46.8	-25.0	-21.8		
5130.00	-17.8	H	3.0	35.4	1.0	-52.2	-25.0	-27.2		
7695.00	-12.8	H	3.0	35.8	1.0	-47.6	-25.0	-22.6		
10260.00	-10.3	H	3.0	35.9	1.0	-45.2	-25.0	-20.2		

LTE B7 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 7 Harmonics, 15MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2507.5MHz										
5015.00	-17.7	V	3.0	35.5	1.0	-52.1	-25.0	-27.1		
7522.50	-14.3	V	3.0	35.7	1.0	-49.1	-25.0	-24.1		
10030.00	-11.1	V	3.0	36.0	1.0	-46.1	-25.0	-21.1		
5015.00	-17.8	H	3.0	35.5	1.0	-52.1	-25.0	-27.1		
7522.50	-12.5	H	3.0	35.7	1.0	-47.2	-25.0	-22.2		
10030.00	-10.6	H	3.0	36.0	1.0	-45.6	-25.0	-20.6		
Mid Ch, 2535MHz										
5070.00	-18.8	V	3.0	35.4	1.0	-53.2	-25.0	-28.2		
7605.00	-13.7	V	3.0	35.8	1.0	-48.4	-25.0	-23.4		
10140.00	-11.6	V	3.0	36.0	1.0	-46.5	-25.0	-21.6		
5070.00	-18.2	H	3.0	35.4	1.0	-52.6	-25.0	-27.6		
7605.00	-13.1	H	3.0	35.8	1.0	-47.8	-25.0	-22.8		
10140.00	-9.5	H	3.0	36.0	1.0	-44.5	-25.0	-19.5		
High Ch, 2562.5MHz										
5125.00	-17.7	V	3.0	35.4	1.0	-52.2	-25.0	-27.2		
7687.50	-13.9	V	3.0	35.8	1.0	-48.6	-25.0	-23.6		
10250.00	-11.3	V	3.0	35.9	1.0	-46.2	-25.0	-21.2		
5125.00	-19.0	H	3.0	35.4	1.0	-53.4	-25.0	-28.4		
7687.50	-14.5	H	3.0	35.8	1.0	-49.3	-25.0	-24.3		
10250.00	-10.5	H	3.0	35.9						

LTE B7 20MHz QPSK

LTE B7 20MHz 16QAM

9.1.6. LTE BAND 13

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

SOMC

12132753

4/20/2018

16069 OG

EUT + Support Equipment

Chamber C

LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-29.8	V	3.0	37.1	1.0	-65.9	-40.0	-25.9	
2338.50	-25.5	V	3.0	36.5	1.0	-61.0	-13.0	-48.0	
3118.00	-22.3	V	3.0	36.3	1.0	-57.6	-13.0	-44.6	
1559.00	-29.8	H	3.0	37.1	1.0	-65.9	-40.0	-25.9	
2338.50	-26.6	H	3.0	36.5	1.0	-62.1	-13.0	-49.1	
3118.00	-23.0	H	3.0	36.3	1.0	-58.2	-13.0	-45.2	
Mid Ch, 782MHz									
1564.00	-30.3	V	3.0	37.1	1.0	-66.4	-40.0	-26.4	
2346.00	-25.2	V	3.0	36.5	1.0	-60.7	-13.0	-47.7	
3128.00	-23.3	V	3.0	36.3	1.0	-58.6	-13.0	-45.6	
1564.00	-29.6	H	3.0	37.1	1.0	-65.7	-40.0	-25.7	
2346.00	-26.2	H	3.0	36.5	1.0	-61.7	-13.0	-48.7	
3128.00	-22.6	H	3.0	36.3	1.0	-57.9	-13.0	-44.9	
High Ch, 784.5MHz									
1569.00	-30.1	V	3.0	37.1	1.0	-66.3	-40.0	-26.3	
2353.50	-26.0	V	3.0	36.5	1.0	-61.5	-13.0	-48.5	
3138.00	-22.6	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
1569.00	-30.1	H	3.0	37.1	1.0	-66.3	-40.0	-26.3	
2353.50	-26.3	H	3.0	36.5	1.0	-61.8	-13.0	-48.8	
3138.00	-22.6	H	3.0	36.3	1.0	-57.8	-13.0	-44.8	

LTE B13 5MHz QPSK

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

SOMC

12132753

4/20/2018

16069 OG

EUT + Support Equipment

Chamber C

LTE_QPSK Band 13 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch, 782MHz									
1564.00	-30.0	V	3.0	37.1	1.0	-66.1	-40.0	-26.1	
2346.00	-25.5	V	3.0	36.5	1.0	-61.0	-13.0	-48.0	
3128.00	-22.8	V	3.0	36.3	1.0	-58.1	-13.0	-45.1	
1564.00	-29.9	H	3.0	37.1	1.0	-66.0	-40.0	-26.0	
2346.00	-27.1	H	3.0	36.5	1.0	-62.6	-13.0	-49.6	
3128.00	-23.2	H	3.0	36.3	1.0	-58.5	-13.0	-45.5	

LTE B13 10MHz QPSK

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

SOMC

12132753

4/20/2018

16069 OG

EUT + Support Equipment

Chamber C

LTE_16QAM Band 13 Harmonics, 5MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-30.5	V	3.0	37.1	1.0	-66.6	-40.0	-26.6	
2338.50	-26.1	V	3.0	36.5	1.0	-61.6	-13.0	-48.6	
3118.00	-23.1	V	3.0	36.3	1.0	-58.4	-13.0	-45.4	
1559.00	-30.4	H	3.0	37.1	1.0	-66.5	-40.0	-26.5	
2338.50	-26.9	H	3.0	36.5	1.0	-62.4	-13.0	-49.4	
3118.00	-23.2	H	3.0	36.3	1.0	-58.5	-13.0	-45.5	
Mid Ch, 782MHz									
1564.00	-30.3	V	3.0	37.1	1.0	-66.5	-40.0	-26.5	
2346.00	-25.9	V	3.0	36.5	1.0	-61.4	-13.0	-48.4	
3128.00	-23.0	V	3.0	36.3	1.0	-58.3	-13.0	-45.3	
1564.00	-30.5	H	3.0	37.1	1.0	-66.6	-40.0	-26.6	
2346.00	-26.5	H	3.0	36.5	1.0	-62.0	-13.0	-49.0	
3128.00	-23.1	H	3.0	36.3	1.0	-58.4	-13.0	-45.4	
High Ch, 784.5MHz									
1569.00	-30.1	V	3.0	37.1	1.0	-66.2	-40.0	-26.2	
2353.50	-25.4	V	3.0	36.5	1.0	-60.9	-13.0	-47.9	
3138.00	-22.1	V	3.0	36.3	1.0	-57.4	-13.0	-44.4	
1569.00	-30.2	H	3.0	37.1	1.0	-66.3	-40.0	-26.3	
2353.50	-26.5	H	3.0	36.5	1.0	-62.0	-13.0	-49.0	
3138.00	-23.1	H	3.0	36.3	1.0	-58.4	-13.0	-45.4	

LTE B13 5MHz 16QAM

UL Verification Services, Inc.

Above 1GHz High Frequency Substitution Measurement

Company:

Project #:

Date:

Test Engineer:

Configuration:

Location:

Mode:

SOMC

12132753

4/20/2018

16069 OG

EUT + Support Equipment

Chamber C

LTE_16QAM Band 13 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Mid Ch, 782MHz									
1564.00	-29.9	V	3.0	37.1	1.0	-66.0	-40.0	-26.0	
2346.00	-25.5	V	3.0	36.5	1.0	-61.0	-13.0	-48.0	
3128.00	-23.2	V	3.0	36.3	1.0	-58.5	-13.0	-45.5	
1564.00	-31.4	H	3.0	37.1	1.0	-67.5	-40.0	-27.5	
2346.00	-26.4	H	3.0	36.5	1.0	-61.9	-13.0	-48.9	
3128.00	-23.2	H	3.0	36.3	1.0	-58.4	-13.0	-45.4	

LTE B13 10MHz 16QAM

9.1.7. LTE BAND 17

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16099 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 17 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 706.5MHz										
1413.00	-32.3	V	3.0	37.4	1.0	-68.6	-13.0	-55.6		
2119.50	-24.5	V	3.0	36.6	1.0	-59.9	-13.0	-46.6		
2826.00	-24.5	V	3.0	36.4	1.0	-59.9	-13.0	-46.9		
1413.00	-30.7	H	3.0	37.4	1.0	-67.0	-13.0	-54.0		
2119.50	-23.3	H	3.0	36.6	1.0	-58.9	-13.0	-45.9		
2826.00	-24.5	H	3.0	36.4	1.0	-59.7	-13.0	-46.7		
Mid Ch, 710MHz										
1420.00	-32.1	V	3.0	37.3	1.0	-68.4	-13.0	-55.4		
2120.00	-25.7	V	3.0	36.6	1.0	-61.3	-13.0	-48.3		
2840.00	-24.2	V	3.0	36.4	1.0	-59.5	-13.0	-46.5		
1420.00	-31.0	H	3.0	37.3	1.0	-67.3	-13.0	-54.3		
2130.00	-26.5	H	3.0	36.6	1.0	-62.0	-13.0	-49.0		
2840.00	-23.9	H	3.0	36.4	1.0	-59.2	-13.0	-46.2		
High Ch, 713.5MHz										
1427.00	-31.3	V	3.0	37.3	1.0	-67.6	-13.0	-54.6		
2140.50	-25.1	V	3.0	36.6	1.0	-61.5	-13.0	-48.5		
2854.00	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1		
1427.00	-31.7	H	3.0	37.3	1.0	-68.1	-13.0	-55.1		
2140.50	-25.2	H	3.0	36.6	1.0	-60.8	-13.0	-47.8		
2854.00	-24.7	H	3.0	36.4	1.0	-60.1	-13.0	-47.1		

LTE B17 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16099 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_16QAM Band 17 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 706.5MHz										
1413.00	-31.3	V	3.0	37.4	1.0	-67.7	-13.0	-54.7		
2119.50	-23.6	V	3.0	36.6	1.0	-59.1	-13.0	-46.1		
2826.00	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1		
1413.00	-31.6	H	3.0	37.4	1.0	-68.0	-13.0	-55.0		
2119.50	-23.7	H	3.0	36.6	1.0	-59.8	-13.0	-46.8		
2826.00	-24.6	H	3.0	36.4	1.0	-60.0	-13.0	-47.0		
Mid Ch, 710MHz										
1420.00	-32.1	V	3.0	37.3	1.0	-68.4	-13.0	-55.4		
2120.00	-23.7	V	3.0	36.6	1.0	-59.3	-13.0	-46.3		
2840.00	-23.3	V	3.0	36.4	1.0	-58.7	-13.0	-45.7		
1420.00	-30.8	H	3.0	37.3	1.0	-67.1	-13.0	-54.1		
2130.00	-24.3	H	3.0	36.6	1.0	-60.8	-13.0	-47.8		
2840.00	-25.1	H	3.0	36.4	1.0	-60.5	-13.0	-47.5		
High Ch, 713.5MHz										
1427.00	-32.2	V	3.0	37.3	1.0	-68.6	-13.0	-55.6		
2140.50	-25.1	V	3.0	36.6	1.0	-60.7	-13.0	-47.7		
2854.00	-24.0	V	3.0	36.4	1.0	-59.3	-13.0	-46.3		
1427.00	-32.4	H	3.0	37.3	1.0	-68.7	-13.0	-55.7		
2140.50	-24.8	H	3.0	36.6	1.0	-60.4	-13.0	-47.4		
2854.00	-24.6	H	3.0	36.4	1.0	-60.0	-13.0	-47.0		

LTE B17 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16099 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 17 Harmonics, 10MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 709MHz										
1418.00	-32.0	V	3.0	37.4	1.0	-68.4	-13.0	-55.4		
2127.00	-25.2	V	3.0	36.6	1.0	-60.7	-13.0	-47.7		
2836.00	-24.3	V	3.0	36.4	1.0	-59.7	-13.0	-46.7		
1418.00	-31.6	H	3.0	37.4	1.0	-67.9	-13.0	-54.9		
2127.00	-24.3	H	3.0	36.6	1.0	-59.9	-13.0	-46.9		
2836.00	-25.1	H	3.0	36.4	1.0	-60.5	-13.0	-47.5		
Mid Ch, 710MHz										
1420.00	-31.7	V	3.0	37.3	1.0	-68.0	-13.0	-55.0		
2130.00	-23.5	V	3.0	36.6	1.0	-59.1	-13.0	-46.1		
2840.00	-24.6	V	3.0	36.4	1.0	-60.0	-13.0	-47.0		
1420.00	-30.8	H	3.0	37.3	1.0	-67.1	-13.0	-54.1		
2130.00	-25.0	H	3.0	36.6	1.0	-60.6	-13.0	-47.6		
2840.00	-25.3	H	3.0	36.4	1.0	-60.7	-13.0	-47.7		
High Ch, 711MHz										
1422.00	-32.1	V	3.0	37.3	1.0	-68.5	-13.0	-55.5		
2133.00	-22.7	V	3.0	36.6	1.0	-58.3	-13.0	-45.3		
2844.00	-23.8	V	3.0	36.4	1.0	-59.2	-13.0	-46.2		
1422.00	-31.9	H	3.0	37.3	1.0	-68.2	-13.0	-55.2		
2133.00	-24.5	H	3.0	36.6	1.0	-60.0	-13.0	-47.0		
2844.00	-24.7	H	3.0	36.4	1.0	-60.1	-13.0	-47.1		

LTE B17 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16099 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_16QAM Band 17 Harmonics, 10MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 709MHz										
1418.00	-31.6	V	3.0	37.4	1.0	-67.9	-13.0	-54.9		
2127.00	-24.9	V	3.0	36.6	1.0	-59.6	-13.0	-46.6		
2836.00	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1		
1418.00	-31.8	H	3.0	37.4	1.0	-68.1	-13.0	-55.1		
2127.00	-25.8	H	3.0	36.6	1.0	-61.4	-13.0	-48.4		
2836.00	-24.6	H	3.0	36.4	1.0	-60.0	-13.0	-47.0		
Mid Ch, 710MHz										
1420.00	-32.4	V	3.0	37.3	1.0	-68.7	-13.0	-55.7		
2130.00	-24.2	V	3.0	36.6	1.0	-59.8	-13.0	-46.8		
2840.00	-23.8	V	3.0	36.4	1.0	-59.2	-13.0	-46.2		
1420.00	-31.7	H	3.0	37.3	1.0	-68.1	-13.0	-55.1		
2130.00	-23.7	H	3.0	36.6	1.0	-59.3	-13.0	-46.3		
2840.00	-24.9	H	3.0	36.4	1.0	-60.3	-13.0	-47.3		
High Ch, 711MHz										
1422.00	-32.0	V	3.0	37.3	1.0	-68.4	-13.0	-55.4		
2133.00	-23.6	V	3.0	36.6	1.0	-59.2	-13.0	-46.2		
2844.00	-24.1	V	3.0	36.4	1.0	-59.4	-13.0	-46.4		
1422.00	-31.8	H	3.0	37.3	1.0	-68.0	-13.0	-55.0		

9.1.8. LTE BAND 41

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 41 Harmonics, 5MHz Bandwidth										
f	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2498.5MHz										
4997.00	-16.5	V	3.0	35.5	1.0	-50.9	-25.0	-25.9		
7495.50	-14.1	V	3.0	35.7	1.0	-48.9	-25.0	-23.9		
9994.00	-11.9	V	3.0	36.0	1.0	-46.1	-25.0	-21.1		
4997.00	-16.1	H	3.0	35.5	1.0	-50.6	-25.0	-25.6		
7495.50	-12.4	H	3.0	35.7	1.0	-47.1	-25.0	-22.1		
9994.00	-10.0	H	3.0	36.0	1.0	-45.1	-25.0	-20.1		
Mid Ch, 2593MHz										
5186.00	-15.9	V	3.0	35.4	1.0	-50.4	-25.0	-25.4		
7779.00	-13.6	V	3.0	35.8	1.0	-48.4	-25.0	-23.4		
10372.00	-9.9	V	3.0	35.8	1.0	-44.8	-25.0	-19.8		
5186.00	-16.2	H	3.0	35.4	1.0	-50.6	-25.0	-25.6		
7779.00	-11.1	H	3.0	35.8	1.0	-45.8	-25.0	-20.8		
10372.00	-8.6	H	3.0	35.8	1.0	-43.4	-25.0	-18.4		
High Ch, 2687.5MHz										
5375.00	-17.7	V	3.0	35.4	1.0	-52.1	-25.0	-27.1		
8062.50	-11.9	V	3.0	35.8	1.0	-46.9	-25.0	-21.9		
10750.00	-9.6	V	3.0	35.7	1.0	-44.2	-25.0	-19.2		
5375.00	-16.2	H	3.0	35.4	1.0	-50.6	-25.0	-25.6		
8062.50	-10.7	H	3.0	35.8	1.0	-45.5	-25.0	-20.5		
10750.00	-9.5	H	3.0	35.7	1.0	-44.2	-25.0	-19.2		

LTE B41 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_16QAM Band 41 Harmonics, 5MHz Bandwidth										
f	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2498.5MHz										
4997.00	-17.5	V	3.0	35.5	1.0	-52.0	-25.0	-27.0		
7495.50	-14.1	V	3.0	35.7	1.0	-48.9	-25.0	-23.9		
9994.00	-11.4	V	3.0	36.0	1.0	-46.5	-25.0	-21.5		
4997.00	-16.0	H	3.0	35.5	1.0	-50.5	-25.0	-25.5		
7495.50	-12.1	H	3.0	35.7	1.0	-46.8	-25.0	-21.8		
9994.00	-10.7	H	3.0	36.0	1.0	-45.7	-25.0	-20.7		
Mid Ch, 2593MHz										
5186.00	-17.1	V	3.0	35.4	1.0	-51.5	-25.0	-26.5		
7779.00	-12.8	V	3.0	35.8	1.0	-47.4	-25.0	-22.4		
10372.00	-9.7	V	3.0	35.8	1.0	-44.6	-25.0	-19.6		
5186.00	-15.9	H	3.0	35.4	1.0	-50.3	-25.0	-25.3		
7779.00	-13.9	H	3.0	35.8	1.0	-48.7	-25.0	-23.7		
10372.00	-9.7	H	3.0	35.8	1.0	-44.6	-25.0	-19.6		
High Ch, 2687.5MHz										
5375.00	-16.9	V	3.0	35.4	1.0	-51.3	-25.0	-26.3		
8062.50	-13.5	V	3.0	35.8	1.0	-48.3	-25.0	-23.3		
10750.00	-10.4	V	3.0	35.7	1.0	-45.1	-25.0	-20.1		
5375.00	-15.6	H	3.0	35.4	1.0	-50.0	-25.0	-25.0		
8062.50	-12.6	H	3.0	35.8	1.0	-47.4	-25.0	-22.4		
10750.00	-9.3	H	3.0	35.7	1.0	-44.0	-25.0	-19.0		

LTE B41 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_QPSK Band 41 Harmonics, 10MHz Bandwidth										
f	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2501MHz										
5002.00	-16.0	V	3.0	35.5	1.0	-51.0	-25.0	-26.0		
7503.00	-14.2	V	3.0	35.7	1.0	-48.9	-25.0	-23.9		
10004.00	-12.2	V	3.0	36.0	1.0	-47.2	-25.0	-22.2		
5002.00	-16.2	H	3.0	35.5	1.0	-50.7	-25.0	-25.7		
7503.00	-13.0	H	3.0	35.7	1.0	-47.8	-25.0	-22.8		
10004.00	-8.7	H	3.0	36.0	1.0	-44.7	-25.0	-19.7		
Mid Ch, 2593MHz										
5186.00	-17.2	V	3.0	35.4	1.0	-51.6	-25.0	-26.6		
7779.00	-14.5	V	3.0	35.8	1.0	-49.2	-25.0	-24.2		
10372.00	-7.5	V	3.0	35.8	1.0	-42.4	-25.0	-17.4		
5186.00	-15.5	H	3.0	35.4	1.0	-50.0	-25.0	-25.0		
7779.00	-12.2	H	3.0	35.8	1.0	-47.0	-25.0	-22.0		
10372.00	-9.3	H	3.0	35.8	1.0	-44.2	-25.0	-19.2		
High Ch, 2685MHz										
5370.00	-17.8	V	3.0	35.4	1.0	-52.2	-25.0	-27.2		
8055.00	-13.4	V	3.0	35.8	1.0	-48.2	-25.0	-23.2		
10740.00	-10.6	V	3.0	35.7	1.0	-45.2	-25.0	-20.2		
5370.00	-18.2	H	3.0	35.4	1.0	-52.7	-25.0	-27.7		
8055.00	-11.0	H	3.0	35.8	1.0	-45.8	-25.0	-20.8		
10740.00	-8.4	H	3.0	35.7	1.0	-44.0	-25.0	-19.0		

LTE B41 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC										
Project #: 12132753										
Date: 4/24/2018										
Test Engineer: 16069 OG										
Configuration: EUT + Support Equipment										
Location: Chamber C										
Mode: LTE_16QAM Band 41 Harmonics, 10MHz Bandwidth										
f	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 2501MHz										
5002.00	-16.6	V	3.0	35.5	1.0	-51.0	-25.0	-26.0		
7503.00	-13.5	V	3.0	35.7	1.0	-48.3	-25.0	-23.3		
10004.00	-11.6	V	3.0	36.0	1.0	-46.6	-25.0	-21.6		
5002.00	-16.1	H	3.0	35.5	1.0	-50.5	-25.0	-25.5		
7503.00	-12.5	H	3.0	35.7	1.0	-47.3	-25.0	-22.3		
10004.00	-10.8	H	3.0	36.0	1.0	-45.1	-25.0	-20.1		
Mid Ch, 2593MHz										
5186.00	-16.3	V	3.0	35.4	1.0	-50.8	-25.0	-25.8		
7779.00	-13.2	V	3.0	35.8	1.0	-48.0	-25.0	-23.0		
10372.00	-10.1	V	3.0	35.8	1.0	-45.0	-25.0	-20.0		
5186.00	-16.8	H	3.0	35.4	1.0	-51.0	-25.0	-26.0		
7779.00	-12.6	H	3.0	35.8	1.0	-47.3	-25.0	-22.3		
10372.00	-9.5	H	3.0	35.8	1.0	-44.3	-25.0	-19.3		
High Ch, 2685MHz										
5370.00	-17.4	V	3.0	35.4	1.0	-51.9	-25.0	-26.9		
8055.00	-12.1	V	3.0	35.8	1.0	-46.9	-25.0	-21.9		
10740.00	-9.3	V	3.0	35.7	1.0	-44.0	-25.0	-19.0		
5370.00	-17.3	H	3.0	35.4	1.0	-51.7	-25.0	-26.7		
8055.00	-10.8	H	3.0	35.8	1.0	-45.6	-25.0	-20.6		
10740.00	-10.2	H	3.0	35.7	1.0	-4				

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12132753
Date: 4/24/2018
Test Engineer: 16060 OG
Configuration: EUT + Support Equipment
Location: Chamber C
Mode: LTE_QPSK Band 41 Harmonics, 20MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2500MHz									
5012.00	-16.7	V	3.0	35.5	1.0	-51.1	-25.0	-26.1	
7518.00	-13.0	V	3.0	35.7	1.0	-47.8	-25.0	-22.8	
10024.00	-11.4	V	3.0	36.0	1.0	-46.4	-25.0	-21.4	
5012.00	-16.7	H	3.0	35.5	1.0	-51.2	-25.0	-26.2	
7518.00	-11.3	H	3.0	35.7	1.0	-48.0	-25.0	-23.1	
10024.00	-10.6	H	3.0	36.0	1.0	-45.7	-25.0	-20.7	
Mid Ch, 2593MHz									
5186.00	-17.1	V	3.0	35.4	1.0	-51.5	-25.0	-26.5	
7779.00	-13.9	V	3.0	35.8	1.0	-48.7	-25.0	-23.7	
10372.00	-9.7	V	3.0	35.8	1.0	-44.5	-25.0	-19.5	
5186.00	-16.7	H	3.0	35.4	1.0	-51.1	-25.0	-26.1	
7779.00	-12.8	H	3.0	35.8	1.0	-47.6	-25.0	-22.6	
10372.00	-9.5	H	3.0	35.8	1.0	-44.4	-25.0	-19.4	
High Ch, 2680MHz									
5360.00	-17.5	V	3.0	35.4	1.0	-51.9	-25.0	-26.9	
8040.00	-13.3	V	3.0	35.8	1.0	-48.1	-25.0	-23.1	
10720.00	-10.1	V	3.0	35.7	1.0	-44.8	-25.0	-19.8	
5360.00	-17.2	H	3.0	35.4	1.0	-51.7	-25.0	-26.7	
8040.00	-11.5	H	3.0	35.8	1.0	-46.3	-25.0	-21.3	
10720.00	-9.2	H	3.0	35.7	1.0	-43.9	-25.0	-18.9	

LTE B41 20MHz QPSK

UL Verification Services, Inc.
Above 1GHz High Frequency Substitution Measurement

Company: SOMC
Project #: 12132753
Date: 4/24/2018
Test Engineer: 16060 OG
Configuration: EUT + Support Equipment
Location: Chamber C
Mode: LTE_16QAM Band 41 Harmonics, 20MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2500MHz									
5012.00	-16.3	V	3.0	35.5	1.0	-50.7	-25.0	-25.7	
7518.00	-13.1	V	3.0	35.7	1.0	-47.8	-25.0	-22.8	
10024.00	-11.4	V	3.0	36.0	1.0	-46.4	-25.0	-21.4	
5012.00	-16.2	H	3.0	35.5	1.0	-50.6	-25.0	-25.6	
7518.00	-13.3	H	3.0	35.7	1.0	-48.1	-25.0	-23.1	
10024.00	-10.8	H	3.0	36.0	1.0	-45.9	-25.0	-20.9	
Mid Ch, 2593MHz									
5186.00	-17.3	V	3.0	35.4	1.0	-51.8	-25.0	-26.8	
7779.00	-13.9	V	3.0	35.8	1.0	-48.6	-25.0	-23.6	
10372.00	-10.5	V	3.0	35.8	1.0	-45.4	-25.0	-20.4	
5186.00	-16.3	H	3.0	35.4	1.0	-50.7	-25.0	-25.7	
7779.00	-13.0	H	3.0	35.8	1.0	-47.8	-25.0	-22.8	
10372.00	-9.2	H	3.0	35.8	1.0	-44.0	-25.0	-19.0	
High Ch, 2680MHz									
5360.00	-17.8	V	3.0	35.4	1.0	-52.3	-25.0	-27.3	
8040.00	-13.3	V	3.0	35.8	1.0	-48.1	-25.0	-23.1	
10720.00	-9.6	V	3.0	35.7	1.0	-44.3	-25.0	-19.3	
5360.00	-17.4	H	3.0	35.4	1.0	-51.8	-25.0	-26.8	
8040.00	-12.2	H	3.0	35.8	1.0	-47.0	-25.0	-22.0	
10720.00	-9.9	H	3.0	35.7	1.0	-44.6	-25.0	-19.6	

LTE B41 20MHz 16QAM