


1. Antenna Description:

Antenna type	PCB antenna
Model	ZX-M301
Frequency range	2400-2500MHz
Manufacturer	Zhongxin Electronic Technology Co. , Ltd.
ANT Peak Gain	-1.52 dBi

2. Antenna Photo:

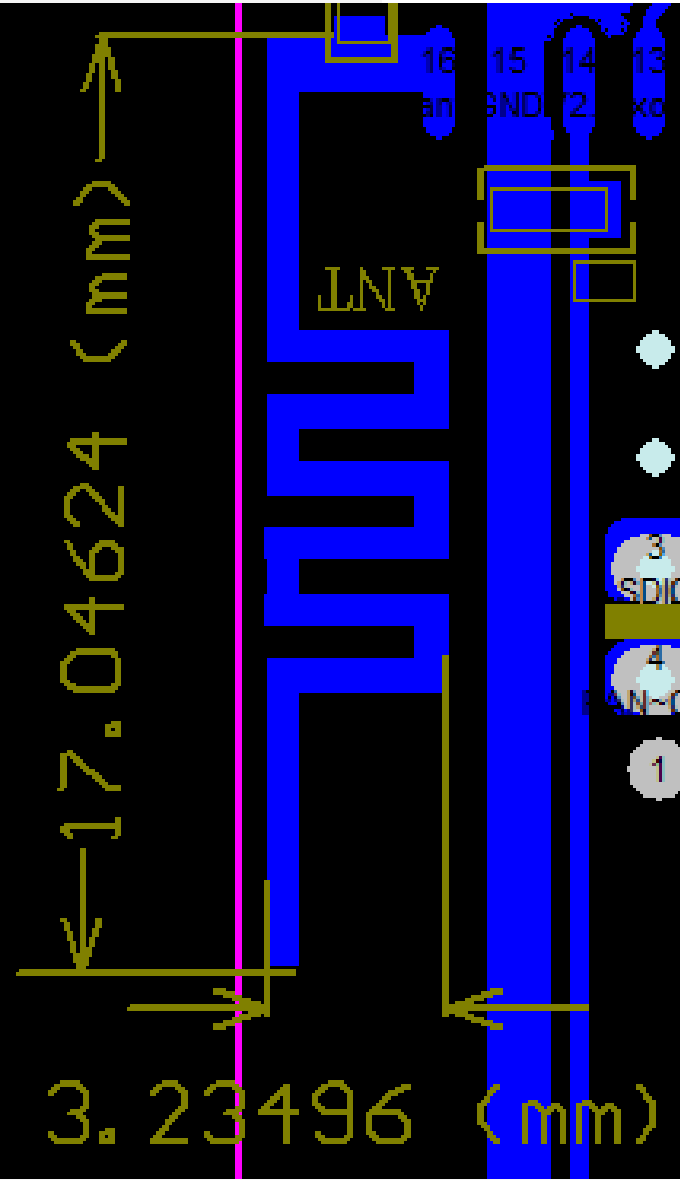

3. Test Equipment & Conditions

3.1 Test instrument

VSWR is tested using Agilent E5071B connected to a hand mechanism, and the status is free space.

3.2 Test environment and methods


Dark room specifications: ETS-743

TD-SCDMA test equipment: StarPoint SP6010/Agilent 8960

LTE-TDD/FDD-SCDMA test equipment: StarPoint SP8011/CMW500

WCDMA/GSM/CDMA test equipment: Agilent 8960


Passive efficiency testing equipment: Agilent Technologies E5071B

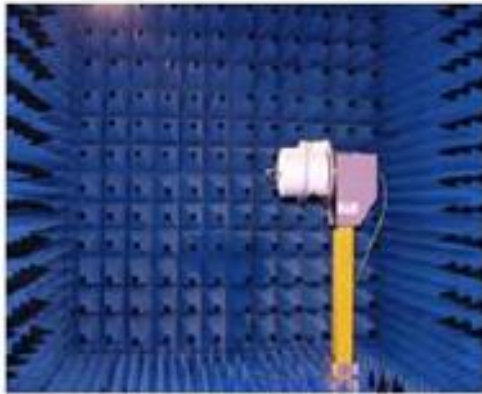

4 . Antenna Radiation Pattern

Main antenna : 2402 MHz
Horizontal


◆XY-plane

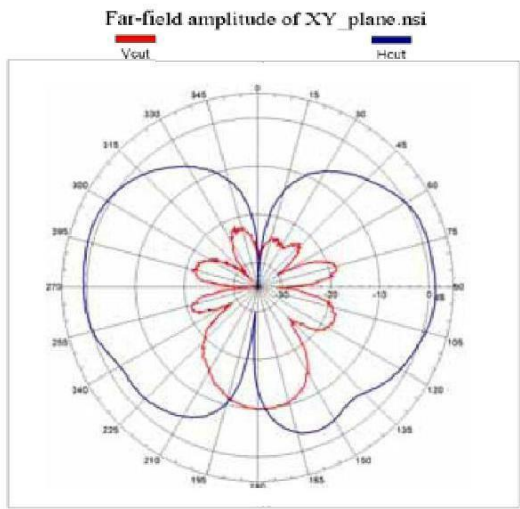

	Peak gain	Avg. gain
H cut	-2.93	-7.60
V cut	-6.85	-8.27
Total	-2.10	-5.33

Vertical

◆XZ-plane

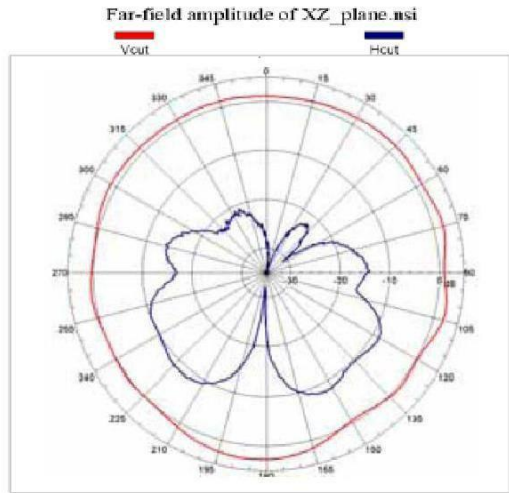


	Peak gain	Avg. gain
H cut	-5.83	-13.44
V cut	-7.04	-9.47
Total	-5.02	-7.25

Main antenna : 2441 MHz

Horizon

◆XY-plane

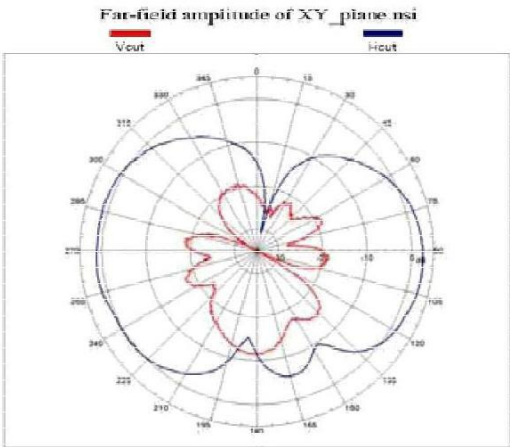


Unit : dBi

	Peak gain	Avg. gain
H cut	-2.36	-7.43
V cut	-11.01	-13.04
Total	-1.78	-8.05

Vertica

◆XZ-plane

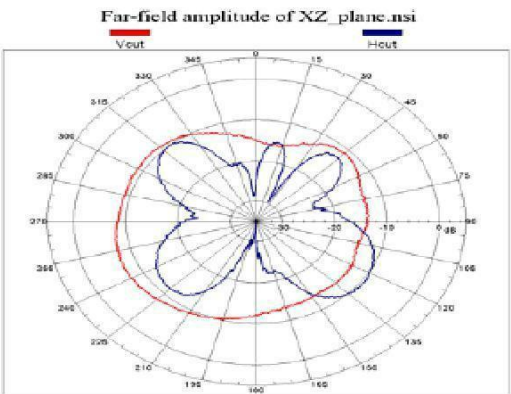


	Peak gain	Avg. gain
H cut	-7.85	-14.39
V cut	-7.02	-12.30
Total	-5.80	-8.78

Main antenna : 2480 MHz

Horizontal


◆YZ-plane

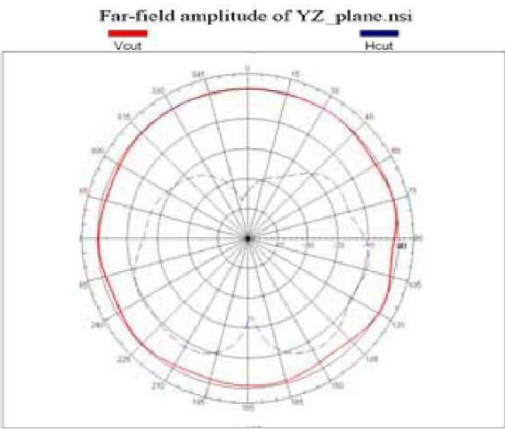

	Peak gain	Avg. gain
H cut	-4.74	-10.75
V cut	-6.47	-11.05
Total	-1.52	-7.49

Vertical

◆YZ-plane

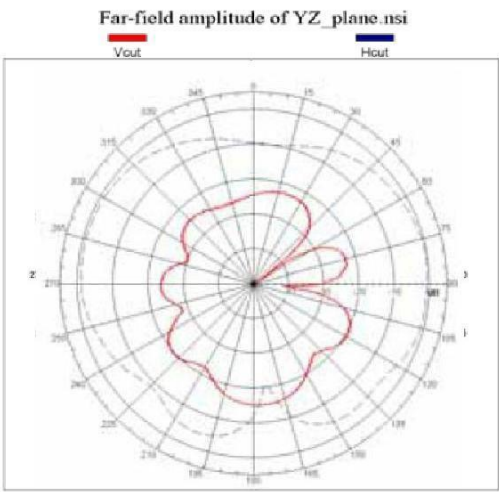

	Peak gain	Avg. gain
H cut	-5.75	-9.75
V cut	-12.47	-16.23
Total	-4.52	-8.72

