



**FCC 47 CFR PART 22 SUBPART H AND PART 24 SUBPART E
&
INDUSTRY CANADA RSS-132 & RSS-133**

TEST REPORT

For

Tablet Computer

Trade Name: Lenovo

**FCC Model: TP00064A
IC Model: TP00064AUC**

Issued to

**COMPAL ELECTRONICS, INC.
No.581, Ruiguang Rd., Neihu District, Taipei City 11492, Taiwan (R.O.C)**

Issued by

Compliance Certification Services Inc.

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)**

<http://www.ccsrf.com>

service@ccsrf.com

Issued Date: April 27, 2014



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 27, 2014	Initial Issue	ALL	Angel Cheng



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	7
3.1 EUT CONFIGURATION	7
3.2 EUT EXERCISE	7
3.3 GENERAL TEST PROCEDURES	7
3.4 DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION	9
4.2 MEASUREMENT EQUIPMENT USED	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS	11
5.1 FACILITIES	11
5.2 EQUIPMENT	11
5.3 LABORATORY ACCREDITATIONS AND LISTING	11
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	12
6. SETUP OF EQUIPMENT UNDER TEST	13
6.1 SETUP CONFIGURATION OF EUT	13
6.2 SUPPORT EQUIPMENT.....	13
7. FCC PART 22 & 24 REQUIREMENTS & INDUSTRY CANADA RSS-132 & RSS-133 ...	14
7.1 ERP & EIRP MEASUREMENT	14
7.2 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	20
APPENDIX II PHOTOGRAPHS OF TEST SETUP	82
APPENDIX 1 - PHOTOGRAPHS OF EUT	



1. TEST RESULT CERTIFICATION

Applicant: COMPAL ELECTRONICS, INC.
No.581, Ruiguang Rd., Neihu District, Taipei City 11492,
Taiwan (R.O.C)

Manufacturer: COMPAL ELECTRONICS, INC.
No.581, Ruiguang Rd., Neihu District, Taipei City 11492,
Taiwan (R.O.C)

Equipment Under Test: Tablet Computer

Trade Name: Lenovo

FCC Model Number: TP00064A

IC Model: TP00064AUC

Date of Test: April 14, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR PART 22 SUBPART H AND PART 24 SUBPART E & IC RSS-132 Issue 2: September 2005 and IC RSS-133 Issue 5: February 2009	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA-603-C and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC Rule FCC PART 22 Subpart H, PART 24 Subpart E, IC RSS-132 Issue 2 and IC RSS-133 Issue 4.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Miller Lee
Section Manager
Compliance Certification Services Inc.

Reviewed by:

Angel Cheng
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	Tablet Computer
Trade Name	Lenovo
FCC Model Number	TP00064A
FCC Model Number	TP00064AUC
Model Discrepancy	N/A
Received Date	March 31,2014
Power Supply	1. Power Adapter Lenovo / ADLX36NCt2B I/P: 100-240V 1.5A 50-60Hz O/P: 12V 3A 2. a). Trade: SIMPLO TECHNOLOGY (CHANGSHU) INC, SIMPLO TECHNOLOGY (CHONG QING) INC Model: 45N1728 Rating: 8800mAh, 33Wh, 3.75V b). Trade: SIMPLO TECHNOLOGY (CHANGSHU) INC, SIMPLO TECHNOLOGY (CHONG QING) INC Model: 45N1732 (for NEC) Rating: 8800mAh, 33Wh, 3.75V c). Trade: LG Chem (Nanjing) Model: 45N1730 (for NEC) Rating: 8920mAh, 33Wh, 3.7V d). Trade: LG Chem (Nanjing) Model: 45N1726 Rating: 8920mAh, 33Wh, 3.7V
Frequency Range	GPRS / EDGE: 850: 824.2 ~ 848.8 MHz GPRS / EDGE: 1900: 1850.2 ~ 1909.8 MHz WCDMA / HSDPA / HSUPA Band II: 1852.4 ~ 1907.6 MHz WCDMA / HSDPA / HSUPA Band V: 826.4 ~ 846.6MHz
Modulation Technique	GMSK
Antenna Gain	GPRS / EDGE 850MHz:-3.07dBi GPRS / EDGE: 1900MHz: -0.38dBi WCDMA Band II: -0.38dBi WCDMA Band V: -3.07dBi
Antenna Type	PIFA Antenna

Remark: The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.



Mode	ERP Power (dBm)
GPRS 850MHz	26.55
EDGE 850MHz	28.06
WCDMA Band V	21.42
WCDMA HSDPA Band V	21.75
WCDMA HSUPA Band V	21.58

Mode	ERP Power (dBm)
GPRS 1900MHz	28.37
EDGE 1900MHz	28.30
WCDMA Band II	25.37
WCDMA HSDPA Band II	26.12
WCDMA HSUPA Band II	25.88



3. TEST METHODOLOGY

Both conducted and radiated testing were performed according to the procedures document on chapter 13 of ANSI C63.4: 2009, TIA/EIA-603-C: 2004 and FCC CFR 47, Part 2 and Part 22 Subpart H & Part 24 Subpart E.

The tests documented in this report were performed in accordance with IC RSS-132, SPSR503, RSS-133, SPSR510 and ANSI C63.4 and TIA/EIA-603-C.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2009.



3.4 DESCRIPTION OF TEST MODES

The EUT (FCC model: TP00064A & IC model: TP00064AUC) had been tested under operating condition.

EUT staying in continuous transmitting mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz which worst case was in normal link mode.

GPRS / EDGE 850MHz:

Channel Low (CH128), Channel Mid (CH190) and Channel High (CH251) were chosen for full testing.

GPRS / EDGE 1900MHz:

Channel Low (CH512), Channel Mid (CH661) and Channel High (CH810) were chosen for full testing.

WCDMA Band II:

Channel Low (CH9262), Channel Mid (CH9400) and Channel High (CH9538) were chosen for full testing.

WCDMA Band V:

Channel Low (CH4132), Channel Mid (CH4182) and Channel High (CH4233) were chosen for full testing.

WCDMA / HSDPA Band II:

Channel Low (CH9262), Channel Mid (CH9400) and Channel High (CH9538) were chosen for full testing.

WCDMA / HSDPA Band V:

Channel Low (CH4132), Channel Mid (CH4182) and Channel High (CH4233) were chosen for full testing.

WCDMA / HSUPA Band II:

Channel Low (CH9262), Channel Mid (CH9400) and Channel High (CH9538) were chosen for full testing.

WCDMA / HSDPA Band V:

Channel Low (CH4132), Channel Mid (CH4182) and Channel High (CH4233) were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis).

The worst emission was found:

in lie-down (X axis) for WCDMA / HSDPA / HSUPA Band II &
WCDMA / HSDPA / HSUPA Band V

and lie-down (Y axis) for GPRS / EDGE 850MHz, GPRS / EDGE 1900MHz

Test items for conducted and radiated emission were performed for report. Other testing data please refer to module (Brand: Sierra, Model: EM7345, FCC ID: N7NEM7345 and IC: 2417C-EM7345)



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/19/2014
Power Meter	Anritsu	ML2495A	1012009	06/03/2015
Power Sensor	Anritsu	MA2411A	0917072	06/03/2015

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	11/05/2014
EMI Test Receiver	R&S	ESCI	100064	02/16/2015
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/11/2015
Bilog Antenna	Sunol Sciences	JB3	A030105	02/16/2015
Bilog Antenna	Sunol Sciences	JB3	A030205	10/01/2014
Horn Antenna	EMCO	3117	00055165	02/16/2015
Horn Antenna	EMCO	3117	00055167	01/27/2015
Horn Antenna	EMCO	3116	26370	01/06/2015
Loop Antenna	EMCO	6502	8905/2356	06/12/2014
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/21/2014
Test S/W	EZ-EMC (CCS-3A1RE)			



4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☐ No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4: 2009 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.


Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

**5.4 TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
	N/A						

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7. FCC PART 22 & 24 REQUIREMENTS & INDUSTRY CANADA RSS-132 & RSS-133

7.1 ERP & EIRP MEASUREMENT

LIMIT

According to FCC §2.1046

FCC 22.913(b): The Effective Radiated Power (ERP) of mobile transmitters must not exceed 7 Watts.


RSS-132 § 4.4 The maximum (ERP) shall be 6.3 Watts for mobile stations.

FCC 24.232(b): The equivalent Isotropic Radiated Power (EIRP) must not exceed 2 Watts.


RSS133 § 6.4: Mobile stations and hand-held portables are limited to 2 watts maximum (EIRP).

Test Configuration

Below 1 GHz

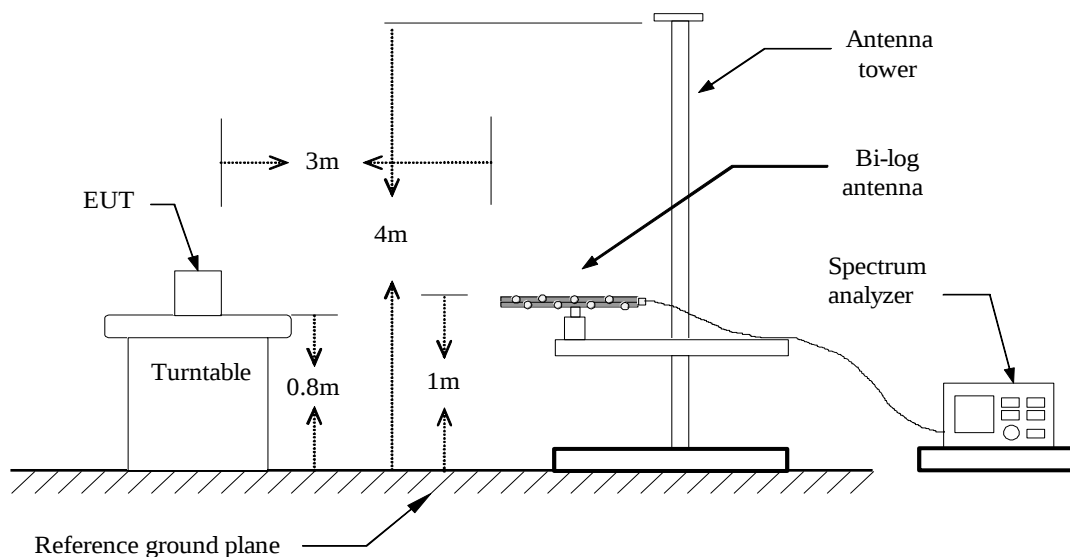


Above 1 GHz

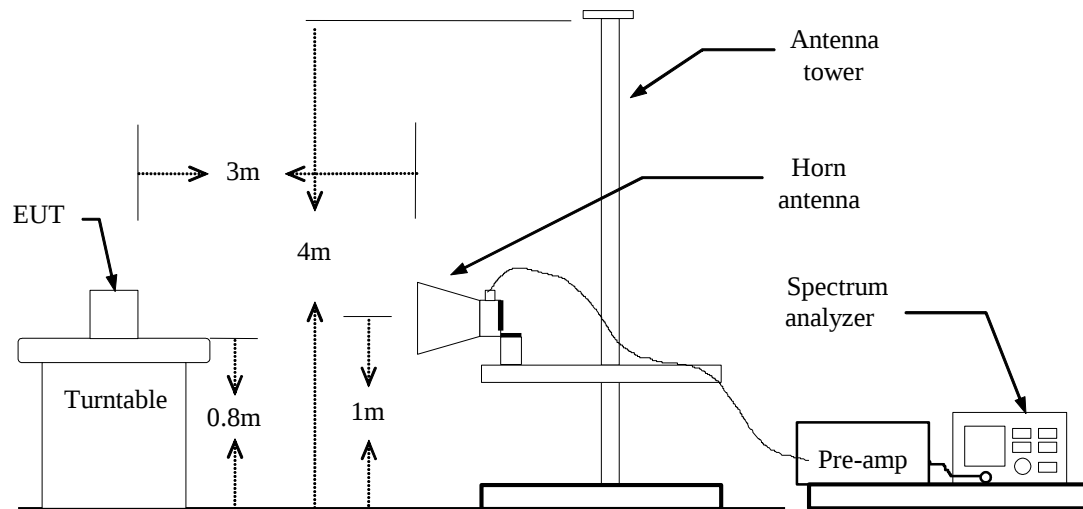



For Substituted Method Test Set-UP

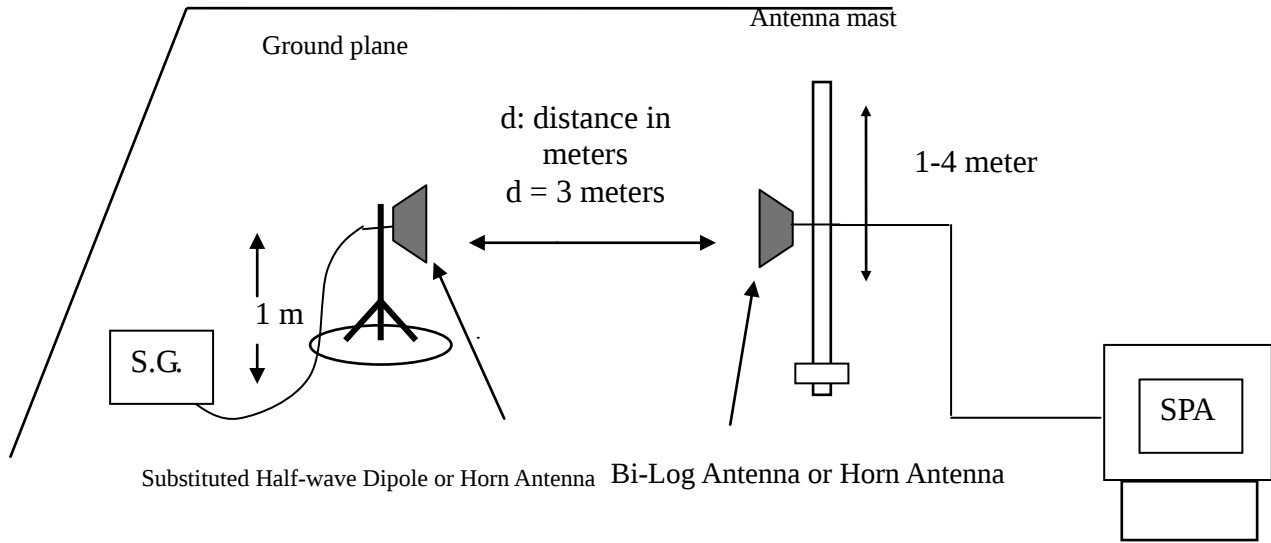

TEST PROCEDURE

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.

During the measurement of the EUT, the resolution bandwidth was set to 5MHz and the average bandwidth was set to 50MHz. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824-849MHz, and EIRP in frequency band 1851.25 –1910MHz were measured using a substitution method. The EUT was replaced by half-wave dipole (824-849MHz) or horn antenna (1851.25-1910MHz) connected to a signal generator. The spectrum analyzer reading was recorded and ERP/EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)} - 2.15$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

No non-compliance noted.

**GPRS 850 Test Data**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
128	824.20	V	22.18	3.39	6.24	25.03	38.45	-13.42
	824.20	H	23.7	3.39	6.24	*26.55	38.45	-11.90
190	836.60	V	6.37	3.4	6.36	9.33	38.45	-29.12
	836.60	H	3.87	3.4	6.37	6.84	38.45	-31.61
251	848.80	V	6.64	3.4	6.4	9.64	38.45	-28.81
	848.80	H	3.81	3.4	6.4	6.81	38.45	-31.64

GPRS 1900 Test Data

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
512	1850.20	V	28.07	5.37	5.67	*28.37	33.00	-4.63
	1850.20	H	23.51	5.37	5.67	23.81	33.00	-9.19
661	1880.00	V	25.21	5.42	5.62	25.41	33.00	-7.59
	1880.00	H	22.07	5.42	5.62	22.27	33.00	-10.73
810	1909.80	V	24.43	5.48	5.56	24.51	33.00	-8.49
	1909.80	H	19.58	5.48	5.56	19.66	33.00	-13.34

EDGE 850 Test Data

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
128	824.20	V	25.21	3.39	6.24	*28.06	38.45	-10.39
	824.20	H	22.2	3.39	6.24	25.05	38.45	-13.40
190	836.60	V	6.47	3.4	6.37	9.44	38.45	-29.01
	836.60	H	3.75	3.4	6.37	6.72	38.45	-31.73
251	848.80	V	6.64	3.4	6.4	9.64	38.45	-28.81
	848.80	H	3.76	3.4	6.4	6.76	38.45	-31.69

EDGE 1900 TEST DATA

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
512	1850.20	V	28	5.37	5.67	*28.30	33.00	-4.70
	1850.20	H	23.08	5.37	5.67	23.38	33.00	-9.62
661	1880.00	V	25.14	5.42	5.62	25.34	33.00	-7.66
	1880.00	H	21.89	5.42	5.62	22.09	33.00	-10.91
810	1909.80	V	24.52	5.48	5.56	24.60	33.00	-8.40
	1909.80	H	19.46	5.48	5.56	19.54	33.00	-13.46

**WCDMA BAND II Test Data**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
9262	1852.40	V	10.21	5.38	5.66	10.49	33.00	-22.51
	1852.40	H	24.8	5.38	5.66	25.08	33.00	-7.92
9400	1880.00	V	12.54	5.42	5.61	12.73	33.00	-20.27
	1880.00	H	25.18	5.42	5.61	*25.37	33.00	-7.63
9538	1907.60	V	8.99	5.47	5.57	9.09	33.00	-23.91
	1907.60	H	24.94	5.47	5.57	25.04	33.00	-7.96

WCDMA BAND V Test Data

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
4132	826.40	V	10.66	3.39	6.25	13.52	38.45	-24.93
	826.40	H	17.27	3.39	6.25	20.13	38.45	-18.32
4182	836.40	V	8.19	3.4	6.37	11.16	38.45	-27.29
	836.40	H	18.45	3.4	6.37	*21.42	38.45	-17.03
4233	846.60	V	9.59	3.4	6.4	12.59	38.45	-25.86
	846.60	H	18.02	3.4	6.4	21.02	38.45	-17.43

HSDPA BAND II Test Data

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
9262	1852.40	V	10.72	5.38	5.66	11.00	33.00	-22.00
	1852.40	H	25.68	5.38	5.66	25.96	33.00	-7.04
9400	1880.00	V	11.25	5.42	5.62	11.45	33.00	-21.55
	1880.00	H	25.92	5.42	5.62	*26.12	33.00	-6.88
9538	1907.60	V	8.99	5.47	5.57	9.09	33.00	-23.91
	1907.60	H	25.06	5.47	5.57	25.16	33.00	-7.84

HSDPA BAND V Test Data

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
4132	826.40	V	11	3.39	6.25	13.86	38.45	-24.59
	826.40	H	18.82	3.39	6.25	21.68	38.45	-16.77
4182	836.40	V	10.12	3.4	6.35	13.07	38.45	-25.38
	836.40	H	17.76	3.4	6.37	20.73	38.45	-17.72
4233	846.60	V	10.11	3.4	6.4	13.11	38.45	-25.34
	846.60	H	18.75	3.4	6.4	*21.75	38.45	-16.70

**WCDMA / HSUPA BAND II Test Data**

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
9262	1852.40	V	11	5.37	5.66	11.29	33.00	-21.71
	1852.40	H	25.57	5.38	5.66	25.85	33.00	-7.15
9400	1880.00	V	11.12	5.42	5.62	11.32	33.00	-21.68
	1880.00	H	25.68	5.42	5.62	*25.88	33.00	-7.12
9538	1907.60	V	9.05	5.47	5.57	9.15	33.00	-23.85
	1907.60	H	25.2	5.47	5.57	25.30	33.00	-7.70

WCDMA / HSUPA BAND V Test Data

Channel	Frequency (MHz)	Antenna Pol.	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)
4132	826.40	V	11.44	3.39	6.25	14.30	38.45	-24.15
	826.40	H	18.71	3.39	6.26	*21.58	38.45	-16.87
4182	836.40	V	10.35	3.4	6.35	13.30	38.45	-25.15
	836.40	H	18.02	3.4	6.37	20.99	38.45	-17.46
4233	846.60	V	10.26	3.4	6.4	13.26	38.45	-25.19
	846.60	H	18.53	3.4	6.4	21.53	38.45	-16.92




7.2 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

LIMIT


According to FCC §2.1053, RSS-132 (4.6) & RSS-133 (6.5).

Test Configuration

Below 1 GHz

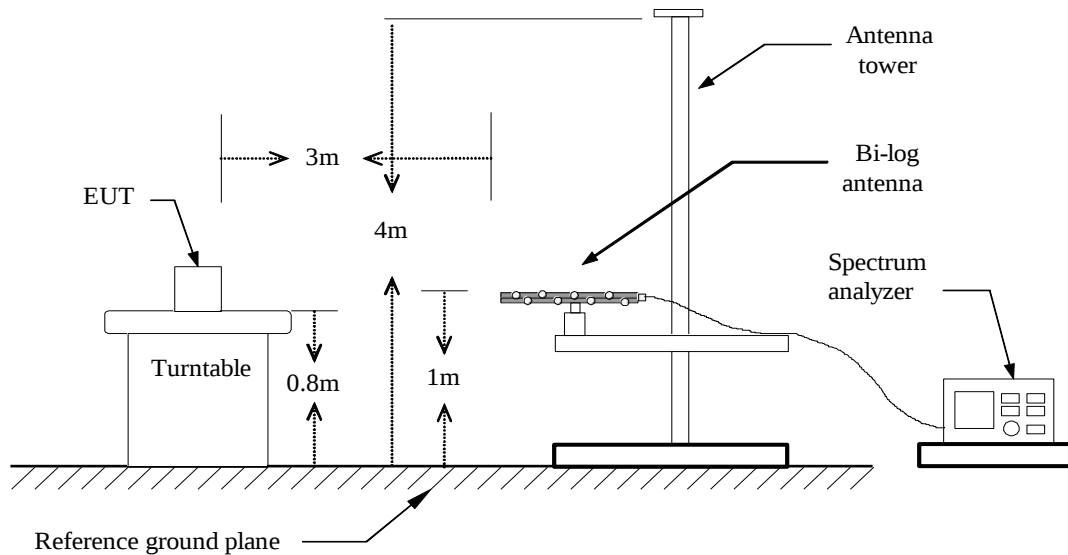


Above 1 GHz

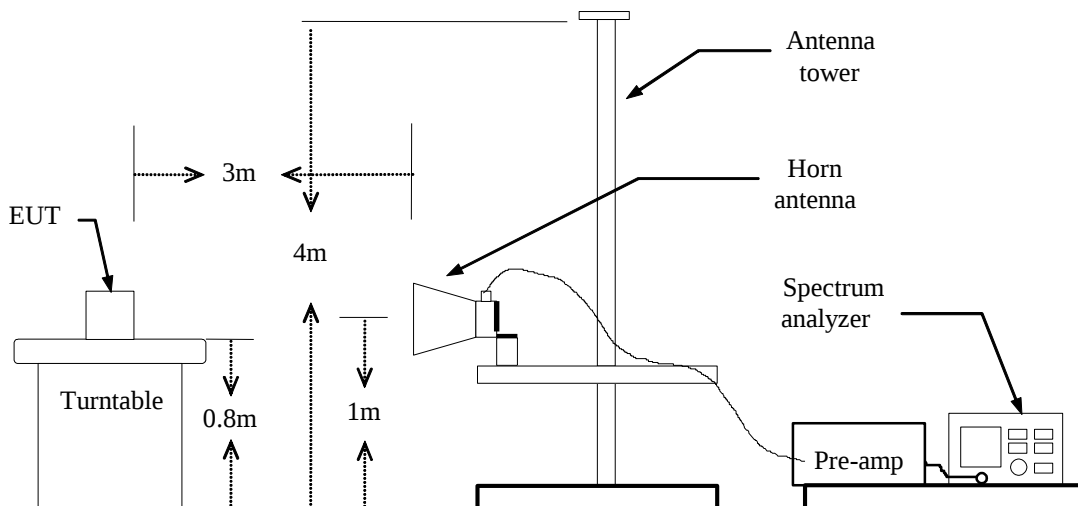



Substituted Method Test Set-up

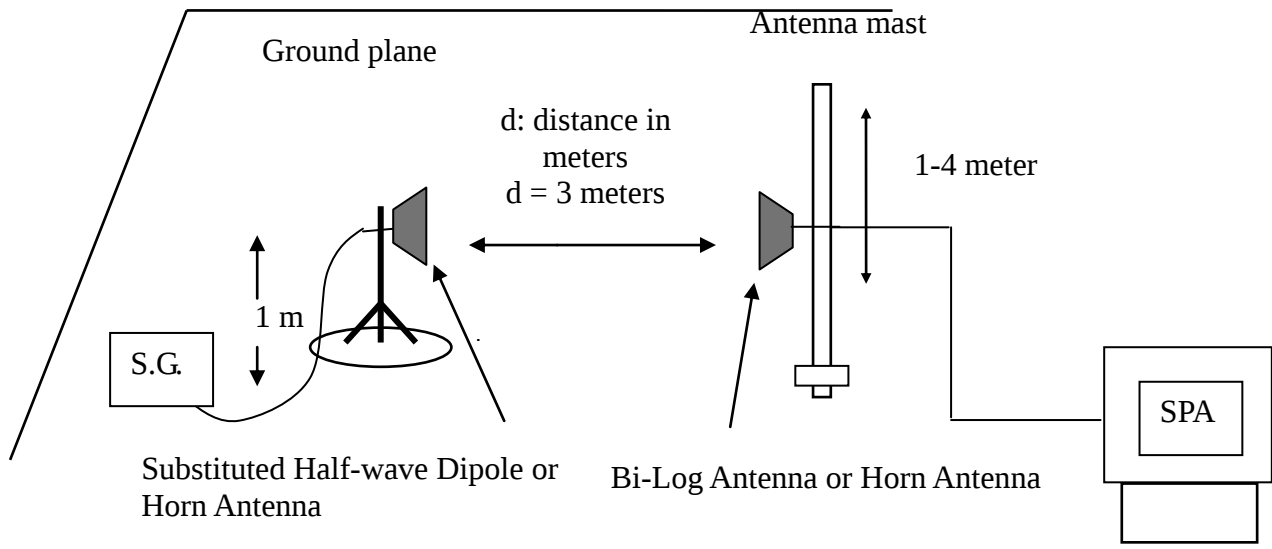

TEST PROCEDURE

The EUT was placed on a non-conductive, the measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission were identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable (dB)}$$

TEST RESULTS

Refer to the attached tabular data sheets.

**Radiated Spurious Emission Measurement Result / Below 1GHz****Operation Mode:** GPRS 850 / TX / CH 128**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-52.08	0.74	-11.1	-63.92	-13.00	-50.92	V
133.7900	-61.61	1.36	-0.95	-63.92	-13.00	-50.92	V
225.9400	-62.31	1.78	5.36	-58.73	-13.00	-45.73	V
418.0000	-72.33	2.46	5.83	-68.96	-13.00	-55.96	V
500.4500	-77.37	2.7	5.9	-74.17	-13.00	-61.17	V
717.7300	-80.47	3.16	6.44	-77.19	-13.00	-64.19	V
53.2800	-60.83	0.83	-3.94	-65.60	-13.00	-52.60	H
123.1200	-56.53	1.29	-1.87	-59.69	-13.00	-46.69	H
253.1000	-55.93	1.86	5.67	-52.12	-13.00	-39.12	H
403.4500	-67.44	2.41	5.96	-63.89	-13.00	-50.89	H
549.9200	-70.43	2.81	6.18	-67.06	-13.00	-54.06	H
617.8200	-72.11	2.94	6.14	-68.91	-13.00	-55.91	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 850 / TX / CH 190**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-53.95	0.74	-11.1	-65.79	-13.00	-52.79	V
133.7900	-65.36	1.36	-0.95	-67.67	-13.00	-54.67	V
223.0300	-62.95	1.77	5.35	-59.37	-13.00	-46.37	V
415.0900	-73.28	2.45	5.86	-69.87	-13.00	-56.87	V
529.5500	-78.33	2.75	6	-75.08	-13.00	-62.08	V
684.7500	-81.55	3.11	6.5	-78.16	-13.00	-65.16	V
123.1200	-58.81	1.29	-1.87	-61.97	-13.00	-48.97	H
256.0100	-59.62	1.88	5.63	-55.87	-13.00	-42.87	H
450.0100	-69.69	2.59	5.72	-66.56	-13.00	-53.56	H
549.9200	-70.18	2.81	6.18	-66.81	-13.00	-53.81	H
608.1200	-75.27	2.93	6.32	-71.88	-13.00	-58.88	H
748.7700	-76.62	3.2	6.1	-73.72	-13.00	-60.72	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 850 / TX / CH 251**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-54.18	0.74	-11.1	-66.02	-13.00	-53.02	V
136.7000	-65.9	1.38	-0.61	-67.89	-13.00	-54.89	V
224.9700	-63.65	1.78	5.36	-60.07	-13.00	-47.07	V
374.3500	-68.32	2.31	5.89	-64.74	-13.00	-51.74	V
549.9200	-79.17	2.81	6.18	-75.80	-13.00	-62.80	V
622.6700	-82.41	2.95	6.14	-79.22	-13.00	-66.22	V
54.2500	-64.78	0.83	-3.66	-69.27	-13.00	-56.27	H
123.1200	-60.64	1.29	-1.87	-63.80	-13.00	-50.80	H
223.0300	-61.58	1.77	5.35	-58.00	-13.00	-45.00	H
404.4200	-70.28	2.42	5.95	-66.75	-13.00	-53.75	H
549.9200	-73.85	2.81	6.18	-70.48	-13.00	-57.48	H
657.5900	-78.14	3.05	6.3	-74.89	-13.00	-61.89	H

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 512**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-54.35	0.74	-11.1	-66.19	-13.00	-53.19	V
148.3400	-69.08	1.42	0.53	-69.97	-13.00	-56.97	V
222.0600	-65.36	1.77	5.34	-61.79	-13.00	-48.79	V
404.4200	-74.88	2.42	5.95	-71.35	-13.00	-58.35	V
513.0600	-79.9	2.69	6.03	-76.56	-13.00	-63.56	V
562.5300	-81.92	2.85	6.01	-78.76	-13.00	-65.76	V
123.1200	-60.49	1.29	-1.87	-63.65	-13.00	-50.65	H
223.0300	-60.79	1.77	5.35	-57.21	-13.00	-44.21	H
405.3900	-70.72	2.42	5.94	-67.20	-13.00	-54.20	H
549.9200	-73.43	2.81	6.18	-70.06	-13.00	-57.06	H
730.3400	-78.08	3.18	6.39	-74.87	-13.00	-61.87	H
773.0200	-77.16	3.28	6.29	-74.15	-13.00	-61.15	H

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*

**Operation Mode:** GPRS 1900 / TX / CH 661**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
40.6700	-54.15	0.73	-11.85	-66.73	-13.00	-53.73	V
148.3400	-67.79	1.42	0.53	-68.68	-13.00	-55.68	V
228.8500	-66.75	1.79	5.38	-63.16	-13.00	-50.16	V
382.1100	-75.09	2.31	5.99	-71.41	-13.00	-58.41	V
618.7900	-82.21	2.94	6.12	-79.03	-13.00	-66.03	V
796.3000	-80.4	3.33	6.41	-77.32	-13.00	-64.32	V
123.1200	-60.62	1.29	-1.87	-63.78	-13.00	-50.78	H
228.8500	-62.21	1.79	5.38	-58.62	-13.00	-45.62	H
400.5400	-72.19	2.4	5.98	-68.61	-13.00	-55.61	H
500.4500	-73.68	2.7	5.9	-70.48	-13.00	-57.48	H
568.3500	-77.7	2.87	6.08	-74.49	-13.00	-61.49	H
730.3400	-77.35	3.18	6.39	-74.14	-13.00	-61.14	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 810**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
40.6700	-54.44	0.73	-11.85	-67.02	-13.00	-54.02	V
147.3700	-68.4	1.42	0.44	-69.38	-13.00	-56.38	V
222.0600	-65.59	1.77	5.34	-62.02	-13.00	-49.02	V
400.5400	-73.99	2.4	5.98	-70.41	-13.00	-57.41	V
635.2800	-81.76	2.99	6.17	-78.58	-13.00	-65.58	V
867.1100	-80.09	3.44	6.48	-77.05	-13.00	-64.05	V
123.1200	-61.05	1.29	-1.87	-64.21	-13.00	-51.21	H
222.0600	-61.42	1.77	5.34	-57.85	-13.00	-44.85	H
402.4800	-72.26	2.41	5.97	-68.70	-13.00	-55.70	H
549.9200	-74.61	2.81	6.18	-71.24	-13.00	-58.24	H
726.4600	-78	3.18	6.43	-74.75	-13.00	-61.75	H
803.0900	-77.84	3.33	6.48	-74.69	-13.00	-61.69	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 850 / TX / CH 128**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-55.17	0.74	-11.1	-67.01	-13.00	-54.01	V
137.6700	-70.48	1.38	-0.49	-72.35	-13.00	-59.35	V
256.0100	-70.01	1.88	5.63	-66.26	-13.00	-53.26	V
403.4500	-78.84	2.41	5.96	-75.29	-13.00	-62.29	V
655.6500	-82.4	3.04	6.3	-79.14	-13.00	-66.14	V
839.9500	-81.25	3.41	6.4	-78.26	-13.00	-65.26	V
46.4900	-63.37	0.78	-7.34	-71.49	-13.00	-58.49	H
123.1200	-63.13	1.29	-1.87	-66.29	-13.00	-53.29	H
222.0600	-65.57	1.77	5.34	-62.00	-13.00	-49.00	H
411.2100	-76.31	2.45	5.9	-72.86	-13.00	-59.86	H
549.9200	-75.93	2.81	6.18	-72.56	-13.00	-59.56	H
698.3300	-78.55	3.11	6.41	-75.25	-13.00	-62.25	H

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*

**Operation Mode:** EDGE 850 / TX / CH 190**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-61.7	0.74	-11.1	-73.54	-13.00	-60.54	V
176.4700	-70.7	1.59	3.21	-69.08	-13.00	-56.08	V
219.1500	-67.38	1.76	5.32	-63.82	-13.00	-50.82	V
397.6300	-77.34	2.37	5.99	-73.72	-13.00	-60.72	V
525.6700	-79.06	2.73	6.04	-75.75	-13.00	-62.75	V
702.2100	-81.88	3.12	6.37	-78.63	-13.00	-65.63	V
123.1200	-62.23	1.29	-1.87	-65.39	-13.00	-52.39	H
256.9800	-63.23	1.89	5.62	-59.50	-13.00	-46.50	H
337.4900	-68.86	2.17	5.77	-65.26	-13.00	-52.26	H
402.4800	-73.05	2.41	5.97	-69.49	-13.00	-56.49	H
549.9200	-71.53	2.81	6.18	-68.16	-13.00	-55.16	H
675.0500	-77.3	3.08	6.4	-73.98	-13.00	-60.98	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 850 / TX / CH 251**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
62.0100	-69.39	0.89	-2.1	-72.38	-13.00	-59.38	V
176.4700	-72.63	1.59	3.21	-71.01	-13.00	-58.01	V
221.0900	-67.72	1.77	5.33	-64.16	-13.00	-51.16	V
417.0300	-75.77	2.46	5.84	-72.39	-13.00	-59.39	V
549.9200	-78.12	2.81	6.18	-74.75	-13.00	-61.75	V
703.1800	-81.78	3.12	6.36	-78.54	-13.00	-65.54	V
46.4900	-62.93	0.78	-7.34	-71.05	-13.00	-58.05	H
123.1200	-62.01	1.29	-1.87	-65.17	-13.00	-52.17	H
255.0400	-63.6	1.87	5.65	-59.82	-13.00	-46.82	H
405.3900	-73.01	2.42	5.94	-69.49	-13.00	-56.49	H
549.9200	-73.14	2.81	6.18	-69.77	-13.00	-56.77	H
623.6400	-76.35	2.95	6.14	-73.16	-13.00	-60.16	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 1900 / TX / CH 512**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** Jerry Lin**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-55.13	0.74	-11.1	-66.97	-13.00	-53.97	V
135.7300	-70.41	1.37	-0.72	-72.50	-13.00	-59.50	V
224.9700	-70.52	1.78	5.36	-66.94	-13.00	-53.94	V
425.7600	-79.23	2.48	5.8	-75.91	-13.00	-62.91	V
637.2200	-82.62	3	6.15	-79.47	-13.00	-66.47	V
773.0200	-81.18	3.28	6.29	-78.17	-13.00	-65.17	V
47.4600	-63.31	0.78	-6.58	-70.67	-13.00	-57.67	H
123.1200	-63.22	1.29	-1.87	-66.38	-13.00	-53.38	H
224.9700	-66.59	1.78	5.36	-63.01	-13.00	-50.01	H
416.0600	-76.09	2.46	5.85	-72.70	-13.00	-59.70	H
613.9400	-78.23	2.94	6.21	-74.96	-13.00	-61.96	H
773.0200	-76.72	3.28	6.29	-73.71	-13.00	-60.71	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 1900 / TX / CH 661**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-55.05	0.74	-11.1	-66.89	-13.00	-53.89	V
138.6400	-70.25	1.39	-0.38	-72.02	-13.00	-59.02	V
258.9200	-69.54	1.9	5.6	-65.84	-13.00	-52.84	V
401.5100	-78.86	2.4	5.98	-75.28	-13.00	-62.28	V
525.6700	-80.34	2.73	6.04	-77.03	-13.00	-64.03	V
629.4600	-82.45	2.97	6.19	-79.23	-13.00	-66.23	V
41.6400	-59.48	0.74	-11.1	-71.32	-13.00	-58.32	H
123.1200	-62.15	1.29	-1.87	-65.31	-13.00	-52.31	H
221.0900	-66.04	1.77	5.33	-62.48	-13.00	-49.48	H
392.7800	-74.24	2.33	5.99	-70.58	-13.00	-57.58	H
439.3400	-78.81	2.53	5.9	-75.44	-13.00	-62.44	H
742.9500	-78.01	3.21	6.1	-75.12	-13.00	-62.12	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 1900 / TX / CH 810**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-54.37	0.74	-11.1	-66.21	-13.00	-53.21	V
145.4300	-71.5	1.41	0.26	-72.65	-13.00	-59.65	V
239.5200	-69.26	1.81	5.35	-65.72	-13.00	-52.72	V
400.5400	-78.04	2.4	5.98	-74.46	-13.00	-61.46	V
549.9200	-81.37	2.81	6.18	-78.00	-13.00	-65.00	V
675.0500	-81.63	3.08	6.4	-78.31	-13.00	-65.31	V
123.1200	-63.06	1.29	-1.87	-66.22	-13.00	-53.22	H
227.8800	-66.11	1.79	5.38	-62.52	-13.00	-49.52	H
394.7200	-74.29	2.35	5.99	-70.65	-13.00	-57.65	H
549.9200	-75.38	2.81	6.18	-72.01	-13.00	-59.01	H
634.3100	-77.97	2.99	6.18	-74.78	-13.00	-61.78	H
853.5300	-77.19	3.41	6.4	-74.20	-13.00	-61.20	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band II / TX / CH 9262**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
225.9400	-71.8	1.78	5.36	-68.22	-13.00	-55.22	V
251.1600	-71.43	1.84	5.69	-67.58	-13.00	-54.58	V
350.1000	-75.59	2.23	5.8	-72.02	-13.00	-59.02	V
415.0900	-69.84	2.45	5.86	-66.43	-13.00	-53.43	V
493.6600	-75.89	2.68	5.83	-72.74	-13.00	-59.74	V
549.9200	-77.73	2.81	6.18	-74.36	-13.00	-61.36	V
123.1200	-61.49	1.29	-1.87	-64.65	-13.00	-51.65	H
251.1600	-55.58	1.84	5.69	-51.73	-13.00	-38.73	H
383.0800	-66.27	2.31	5.99	-62.59	-13.00	-49.59	H
446.1300	-69.58	2.57	5.78	-66.37	-13.00	-53.37	H
549.9200	-69.76	2.81	6.18	-66.39	-13.00	-53.39	H
563.5000	-73.68	2.85	6.02	-70.51	-13.00	-57.51	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band II / TX / CH 9400**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
123.1200	-77.19	1.29	-1.87	-80.35	-13.00	-67.35	V
224.9700	-72.3	1.78	5.36	-68.72	-13.00	-55.72	V
415.0900	-71.43	2.45	5.86	-68.02	-13.00	-55.02	V
492.6900	-76.25	2.68	5.82	-73.11	-13.00	-60.11	V
549.9200	-77.96	2.81	6.18	-74.59	-13.00	-61.59	V
N/A							
42.6100	-60.08	0.74	-10.34	-71.16	-13.00	-58.16	H
123.1200	-64.65	1.29	-1.87	-67.81	-13.00	-54.81	H
250.1900	-61.02	1.84	5.68	-57.18	-13.00	-44.18	H
390.8400	-70.5	2.32	6	-66.82	-13.00	-53.82	H
455.8300	-73.25	2.6	5.82	-70.03	-13.00	-57.03	H
549.9200	-71.93	2.81	6.18	-68.56	-13.00	-55.56	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band II / TX / CH 9538**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
182.2900	-79.59	1.61	3.7	-77.50	-13.00	-64.50	V
219.1500	-72.87	1.76	5.32	-69.31	-13.00	-56.31	V
253.1000	-72.2	1.86	5.67	-68.39	-13.00	-55.39	V
415.0900	-71.85	2.45	5.86	-68.44	-13.00	-55.44	V
431.5800	-75.82	2.5	5.81	-72.51	-13.00	-59.51	V
549.9200	-78.04	2.81	6.18	-74.67	-13.00	-61.67	V
123.1200	-64.65	1.29	-1.87	-67.81	-13.00	-54.81	H
250.1900	-60.97	1.84	5.68	-57.13	-13.00	-44.13	H
382.1100	-70.5	2.31	5.99	-66.82	-13.00	-53.82	H
463.5900	-75.59	2.61	5.84	-72.36	-13.00	-59.36	H
549.9200	-72.36	2.81	6.18	-68.99	-13.00	-55.99	H
600.3600	-77.07	2.9	6.4	-73.57	-13.00	-60.57	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band V / TX / CH 4132**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
177.4400	-79.72	1.6	3.31	-78.01	-13.00	-65.01	V
226.9100	-74.67	1.79	5.37	-71.09	-13.00	-58.09	V
415.0900	-76.14	2.45	5.86	-72.73	-13.00	-59.73	V
549.9200	-79.36	2.81	6.18	-75.99	-13.00	-62.99	V
700.2700	-81.99	3.11	6.39	-78.71	-13.00	-65.71	V
808.9100	-81.23	3.34	6.27	-78.30	-13.00	-65.30	V
123.1200	-64.34	1.29	-1.87	-67.50	-13.00	-54.50	H
242.4300	-63.91	1.81	5.39	-60.33	-13.00	-47.33	H
391.8100	-70.06	2.32	6	-66.38	-13.00	-53.38	H
493.6600	-74.89	2.68	5.83	-71.74	-13.00	-58.74	H
549.9200	-76.14	2.81	6.18	-72.77	-13.00	-59.77	H
703.1800	-77.77	3.12	6.36	-74.53	-13.00	-61.53	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band V / TX / CH 4182**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
62.0100	-73.69	0.89	-2.1	-76.68	-13.00	-63.68	V
205.5700	-80.33	1.66	4.45	-77.54	-13.00	-64.54	V
253.1000	-75.5	1.86	5.67	-71.69	-13.00	-58.69	V
403.4500	-74.75	2.41	5.96	-71.20	-13.00	-58.20	V
450.0100	-79.29	2.59	5.72	-76.16	-13.00	-63.16	V
521.7900	-79.93	2.71	6.08	-76.56	-13.00	-63.56	V
123.1200	-64.25	1.29	-1.87	-67.41	-13.00	-54.41	H
247.2800	-64.7	1.83	5.57	-60.96	-13.00	-47.96	H
381.1400	-69.49	2.31	5.98	-65.82	-13.00	-52.82	H
460.6800	-76.23	2.6	5.87	-72.96	-13.00	-59.96	H
549.9200	-77.75	2.81	6.18	-74.38	-13.00	-61.38	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band V / TX / CH 4233**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
123.1200	-77.12	1.29	-1.87	-80.28	-13.00	-67.28	V
242.4300	-76.1	1.81	5.39	-72.52	-13.00	-59.52	V
317.1200	-82	2.16	5.73	-78.43	-13.00	-65.43	V
396.6600	-74.88	2.36	5.99	-71.25	-13.00	-58.25	V
549.9200	-79.61	2.81	6.18	-76.24	-13.00	-63.24	V
635.2800	-81.89	2.99	6.17	-78.71	-13.00	-65.71	V
123.1200	-64.69	1.29	-1.87	-67.85	-13.00	-54.85	H
182.2900	-72.63	1.61	3.7	-70.54	-13.00	-57.54	H
245.3400	-65.23	1.82	5.5	-61.55	-13.00	-48.55	H
321.0000	-71.14	2.18	5.7	-67.62	-13.00	-54.62	H
400.5400	-70.05	2.4	5.98	-66.47	-13.00	-53.47	H
524.7000	-77.56	2.73	6.05	-74.24	-13.00	-61.24	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band II /
TX / CH 9262**Test Date:** April 14, 2014**Temperature:** 24°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
123.1200	-77.16	1.29	-1.87	-80.32	-13.00	-67.32	V
225.9400	-72.35	1.78	5.36	-68.77	-13.00	-55.77	V
251.1600	-70.57	1.84	5.69	-66.72	-13.00	-53.72	V
391.8100	-71.24	2.32	6	-67.56	-13.00	-54.56	V
449.0400	-77.14	2.59	5.72	-74.01	-13.00	-61.01	V
549.9200	-77.25	2.81	6.18	-73.88	-13.00	-60.88	V
123.1200	-62.28	1.29	-1.87	-65.44	-13.00	-52.44	H
160.9500	-64.05	1.49	1.5	-64.04	-13.00	-51.04	H
252.1300	-58.1	1.85	5.68	-54.27	-13.00	-41.27	H
366.5900	-67.39	2.29	5.77	-63.91	-13.00	-50.91	H
549.9200	-71.03	2.81	6.18	-67.66	-13.00	-54.66	H
749.7400	-73.42	3.2	6.1	-70.52	-13.00	-57.52	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band II /
TX / CH 9400**Test Date:** April 14, 2014**Temperature:** 24°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
62.0100	-69.87	0.89	-2.1	-72.86	-13.00	-59.86	V
174.5300	-80.2	1.59	3	-78.79	-13.00	-65.79	V
251.1600	-72.59	1.84	5.69	-68.74	-13.00	-55.74	V
415.0900	-71.92	2.45	5.86	-68.51	-13.00	-55.51	V
493.6600	-76.74	2.68	5.83	-73.59	-13.00	-60.59	V
554.7700	-81.26	2.82	6.11	-77.97	-13.00	-64.97	V
123.1200	-64.14	1.29	-1.87	-67.30	-13.00	-54.30	H
253.1000	-60.15	1.86	5.67	-56.34	-13.00	-43.34	H
391.8100	-70.37	2.32	6	-66.69	-13.00	-53.69	H
431.5800	-71.14	2.5	5.81	-67.83	-13.00	-54.83	H
549.9200	-71.49	2.81	6.18	-68.12	-13.00	-55.12	H
700.2700	-76.41	3.11	6.39	-73.13	-13.00	-60.13	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band II /
TX / CH 9538**Test Date:** April 14, 2014**Temperature:** 24°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
123.1200	-76.97	1.29	-1.87	-80.13	-13.00	-67.13	V
226.9100	-72.73	1.79	5.37	-69.15	-13.00	-56.15	V
253.1000	-71.61	1.86	5.67	-67.80	-13.00	-54.80	V
419.9400	-71.5	2.46	5.81	-68.15	-13.00	-55.15	V
549.9200	-78.88	2.81	6.18	-75.51	-13.00	-62.51	V
600.3600	-82.81	2.9	6.4	-79.31	-13.00	-66.31	V
123.1200	-64.54	1.29	-1.87	-67.70	-13.00	-54.70	H
132.8200	-67.45	1.36	-1.07	-69.88	-13.00	-56.88	H
250.1900	-60.09	1.84	5.68	-56.25	-13.00	-43.25	H
390.8400	-69.66	2.32	6	-65.98	-13.00	-52.98	H
477.1700	-74.81	2.63	5.61	-71.83	-13.00	-58.83	H
549.9200	-73.26	2.81	6.18	-69.89	-13.00	-56.89	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band V / TX / CH 4132**Test Date:** April 14, 2014**Temperature:** 24°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-61.28	0.74	-11.1	-73.12	-13.00	-60.12	V
253.1000	-74.61	1.86	5.67	-70.80	-13.00	-57.80	V
415.0900	-76.45	2.45	5.86	-73.04	-13.00	-60.04	V
549.9200	-80.54	2.81	6.18	-77.17	-13.00	-64.17	V
692.5100	-82.9	3.12	6.47	-79.55	-13.00	-66.55	V
723.5500	-82.49	3.17	6.47	-79.19	-13.00	-66.19	V
123.1200	-64.74	1.29	-1.87	-67.90	-13.00	-54.90	H
241.4600	-63.71	1.81	5.36	-60.16	-13.00	-47.16	H
357.8600	-70.08	2.26	5.72	-66.62	-13.00	-53.62	H
415.0900	-71.22	2.45	5.86	-67.81	-13.00	-54.81	H
524.7000	-76.5	2.73	6.05	-73.18	-13.00	-60.18	H
637.2200	-77.87	3	6.15	-74.72	-13.00	-61.72	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band V / TX / CH 4182**Test Date:** April 14, 2014**Temperature:** 24°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-61.28	0.74	-11.1	-73.12	-13.00	-60.12	V
196.8400	-79.15	1.63	3.26	-77.52	-13.00	-64.52	V
252.1300	-75.81	1.85	5.68	-71.98	-13.00	-58.98	V
413.1500	-75.15	2.45	5.88	-71.72	-13.00	-58.72	V
549.9200	-78.97	2.81	6.18	-75.60	-13.00	-62.60	V
820.5500	-80.26	3.39	6.2	-77.45	-13.00	-64.45	V
250.1900	-65.1	1.84	5.68	-61.26	-13.00	-48.26	H
357.8600	-69.27	2.26	5.72	-65.81	-13.00	-52.81	H
476.2000	-75.33	2.63	5.63	-72.33	-13.00	-59.33	H
622.6700	-77.96	2.95	6.14	-74.77	-13.00	-61.77	H
731.3100	-77.94	3.18	6.37	-74.75	-13.00	-61.75	H
801.1500	-77.53	3.33	6.55	-74.31	-13.00	-61.31	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band V / TX / CH 4233**Test Date:** December 11, 2008**Temperature:** 24°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
41.6400	-61.65	0.74	-11.1	-73.49	-13.00	-60.49	V
123.1200	-77.82	1.29	-1.87	-80.98	-13.00	-67.98	V
230.7900	-75.71	1.8	5.4	-72.11	-13.00	-59.11	V
417.0300	-74.49	2.46	5.84	-71.11	-13.00	-58.11	V
549.9200	-79.74	2.81	6.18	-76.37	-13.00	-63.37	V
776.9000	-81.75	3.29	6.18	-78.86	-13.00	-65.86	V
45.5200	-61.49	0.77	-8.09	-70.35	-13.00	-57.35	H
123.1200	-64.76	1.29	-1.87	-67.92	-13.00	-54.92	H
248.2500	-64.87	1.83	5.61	-61.09	-13.00	-48.09	H
259.8900	-69.51	1.91	5.59	-65.83	-13.00	-52.83	H
387.9300	-70.44	2.32	6	-66.76	-13.00	-53.76	H
471.3500	-75.95	2.62	5.74	-72.83	-13.00	-59.83	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band II /
TX / CH 9262**Temperature:** 25°C**Humidity:** 50 % RH**Test Date:** April 14, 2014**Tested by:** David Shu**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
251.1600	-71.86	1.84	5.69	-68.01	-13.00	-55.01	V
417.0300	-70.41	2.46	5.84	-67.03	-13.00	-54.03	V
515.9700	-76.05	2.7	6.06	-72.69	-13.00	-59.69	V
549.9200	-77.55	2.81	6.18	-74.18	-13.00	-61.18	V
782.7200	-79.55	3.31	6.14	-76.72	-13.00	-63.72	V
N/A							
123.1200	-63.8	1.29	-1.87	-66.96	-13.00	-53.96	H
248.2500	-60.08	1.83	5.61	-56.30	-13.00	-43.30	H
366.5900	-69.14	2.29	5.77	-65.66	-13.00	-52.66	H
411.2100	-69.16	2.45	5.9	-65.71	-13.00	-52.71	H
549.9200	-70.25	2.81	6.18	-66.88	-13.00	-53.88	H
749.7400	-74.22	3.2	6.1	-71.32	-13.00	-58.32	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band II /
TX / CH 9400**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
173.5600	-80.77	1.58	2.9	-79.45	-13.00	-66.45	V
226.9100	-71.94	1.79	5.37	-68.36	-13.00	-55.36	V
253.1000	-72.53	1.86	5.67	-68.72	-13.00	-55.72	V
417.0300	-70.82	2.46	5.84	-67.44	-13.00	-54.44	V
426.7300	-73.29	2.48	5.8	-69.97	-13.00	-56.97	V
549.9200	-78.85	2.81	6.18	-75.48	-13.00	-62.48	V
123.1200	-65.43	1.29	-1.87	-68.59	-13.00	-55.59	H
253.1000	-60.7	1.86	5.67	-56.89	-13.00	-43.89	H
404.4200	-70.25	2.42	5.95	-66.72	-13.00	-53.72	H
549.9200	-71.21	2.81	6.18	-67.84	-13.00	-54.84	H
709.9700	-77.69	3.14	6.32	-74.51	-13.00	-61.51	H
809.8800	-77.07	3.34	6.24	-74.17	-13.00	-61.17	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band II /
TX / CH 9538**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
123.1200	-77.32	1.29	-1.87	-80.48	-13.00	-67.48	V
203.6300	-76.66	1.65	3.94	-74.37	-13.00	-61.37	V
253.1000	-70.89	1.86	5.67	-67.08	-13.00	-54.08	V
415.0900	-72.39	2.45	5.86	-68.98	-13.00	-55.98	V
493.6600	-76.99	2.68	5.83	-73.84	-13.00	-60.84	V
549.9200	-77.47	2.81	6.18	-74.10	-13.00	-61.10	V
123.1200	-63.7	1.29	-1.87	-66.86	-13.00	-53.86	H
217.2100	-70.52	1.74	5.35	-66.91	-13.00	-53.91	H
250.1900	-59.92	1.84	5.68	-56.08	-13.00	-43.08	H
389.8700	-69.45	2.32	6	-65.77	-13.00	-52.77	H
439.3400	-74.1	2.53	5.9	-70.73	-13.00	-57.73	H
549.9200	-73	2.81	6.18	-69.63	-13.00	-56.63	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band V /
TX / CH 4132**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
253.1000	-74.32	1.86	5.67	-70.51	-13.00	-57.51	V
357.8600	-78.25	2.26	5.72	-74.79	-13.00	-61.79	V
401.5100	-74.46	2.4	5.98	-70.88	-13.00	-57.88	V
500.4500	-79.73	2.7	5.9	-76.53	-13.00	-63.53	V
636.2500	-82.32	3	6.16	-79.16	-13.00	-66.16	V
792.4200	-81.24	3.33	6.3	-78.27	-13.00	-65.27	V
123.1200	-64.36	1.29	-1.87	-67.52	-13.00	-54.52	H
216.2400	-69.6	1.74	5.36	-65.98	-13.00	-52.98	H
248.2500	-65.35	1.83	5.61	-61.57	-13.00	-48.57	H
379.2000	-69.82	2.31	5.98	-66.15	-13.00	-53.15	H
549.9200	-77.31	2.81	6.18	-73.94	-13.00	-60.94	H
636.2500	-78.46	3	6.16	-75.30	-13.00	-62.30	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band V /
TX / CH 4182**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
182.2900	-79.97	1.61	3.7	-77.88	-13.00	-64.88	V
250.1900	-75.2	1.84	5.68	-71.36	-13.00	-58.36	V
331.6700	-77.8	2.16	5.72	-74.24	-13.00	-61.24	V
416.0600	-74.97	2.46	5.85	-71.58	-13.00	-58.58	V
524.7000	-80.09	2.73	6.05	-76.77	-13.00	-63.77	V
549.9200	-78.98	2.81	6.18	-75.61	-13.00	-62.61	V
123.1200	-64.55	1.29	-1.87	-67.71	-13.00	-54.71	H
247.2800	-65.02	1.83	5.57	-61.28	-13.00	-48.28	H
370.4700	-70.07	2.3	5.82	-66.55	-13.00	-53.55	H
482.0200	-76.01	2.64	5.55	-73.10	-13.00	-60.10	H
549.9200	-77.54	2.81	6.18	-74.17	-13.00	-61.17	H
774.9600	-77.04	3.29	6.24	-74.09	-13.00	-61.09	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band V /
TX / CH 4233**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
62.0100	-72.95	0.89	-2.1	-75.94	-13.00	-62.94	V
205.5700	-78.56	1.66	4.45	-75.77	-13.00	-62.77	V
242.4300	-75.03	1.81	5.39	-71.45	-13.00	-58.45	V
357.8600	-77.52	2.26	5.72	-74.06	-13.00	-61.06	V
416.0600	-75	2.46	5.85	-71.61	-13.00	-58.61	V
549.9200	-78.24	2.81	6.18	-74.87	-13.00	-61.87	V
46.4900	-61.49	0.78	-7.34	-69.61	-13.00	-56.61	H
123.1200	-64.35	1.29	-1.87	-67.51	-13.00	-54.51	H
242.4300	-64.66	1.81	5.39	-61.08	-13.00	-48.08	H
380.1700	-70.48	2.31	5.98	-66.81	-13.00	-53.81	H
519.8500	-77.38	2.7	6.1	-73.98	-13.00	-60.98	H
656.6200	-78.17	3.05	6.3	-74.92	-13.00	-61.92	H

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Above 1GHz****Operation Mode:** GPRS 850 / TX / CH 128**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1651.000	-54.25	5.05	6.03	-53.27	-13.00	-40.27	V
2470.000	-37.12	6.3	6.06	-37.36	-13.00	-24.36	V
N/A							
1651.000	-42.65	5.05	6.03	-41.67	-13.00	-28.67	H
2470.000	-33.65	6.3	6.06	-33.89	-13.00	-20.89	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 850 / TX / CH 190**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1672.000	-55.95	5.07	5.99	-55.03	-13.00	-42.03	V
2512.000	-39.81	6.37	6.13	-40.05	-13.00	-27.05	V
N/A							
1672.000	-45.3	5.07	5.99	-44.38	-13.00	-31.38	H
2512.000	-39.22	6.37	6.13	-39.46	-13.00	-26.46	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 850 / TX / CH 251**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1700.000	-56.05	5.11	5.94	-55.22	-13.00	-42.22	V
2547.000	-45.68	6.42	6.22	-45.88	-13.00	-32.88	V
N/A							
1700.000	-49.35	5.11	5.94	-48.52	-13.00	-35.52	H
2547.000	-43.88	6.42	6.22	-44.08	-13.00	-31.08	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 512**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1847.000	-57.71	5.37	5.68	-57.40	-13.00	-44.40	V
3702.000	-46.87	8.2	9.1	-45.97	-13.00	-32.97	V
N/A							
1847.000	-56.23	5.37	5.68	-55.92	-13.00	-42.92	H
3702.000	-43.35	8.2	9.1	-42.45	-13.00	-29.45	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 661**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-46.19	8.23	9.16	-45.26	-13.00	-32.26	V
5641.000	-49.01	10.18	10.83	-48.36	-13.00	-35.36	V
N/A							
3758.000	-41.05	8.23	9.16	-40.12	-13.00	-27.12	H
5641.000	-46.41	10.18	10.83	-45.76	-13.00	-32.76	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** GPRS 1900 / TX / CH 810**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3821.000	-44.06	8.29	9.22	-43.13	-13.00	-30.13	V
5732.000	-46.81	10.24	10.85	-46.20	-13.00	-33.20	V
N/A							
3821.000	-38.9	8.29	9.22	-37.97	-13.00	-24.97	H
5732.000	-45.05	10.24	10.85	-44.44	-13.00	-31.44	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 850 / TX / CH 128**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1952.000	-52.85	5.59	5.49	-52.95	-13.00	-39.95	V
2470.000	-50.77	6.3	6.06	-51.01	-13.00	-38.01	V
N/A							
1651.000	-53.81	5.05	6.03	-52.83	-13.00	-39.83	H
1952.000	-53.53	5.59	5.49	-53.63	-13.00	-40.63	H
2435.000	-52.05	6.24	6.01	-52.28	-13.00	-39.28	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 850 / TX / CH 190**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2260.000	-57.28	6.02	5.76	-57.54	-13.00	-44.54	V
2435.000	-53.56	6.24	6.01	-53.79	-13.00	-40.79	V
N/A							
1672.000	-58.84	5.07	5.99	-57.92	-13.00	-44.92	H
2435.000	-51.02	6.24	6.01	-51.25	-13.00	-38.25	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 850 / TX / CH 251**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
1945.000	-57.35	5.57	5.5	-57.42	-13.00	-44.42	V
3884.000	-53.61	8.37	9.28	-52.70	-13.00	-39.70	V
N/A							
1700.000	-57.83	5.11	5.94	-57.00	-13.00	-44.00	H
2547.000	-53.09	6.42	6.22	-53.29	-13.00	-40.29	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 1900 / TX / CH 512**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-53.67	8.2	9.1	-52.77	-13.00	-39.77	V
5550.000	-49.45	10.06	10.81	-48.70	-13.00	-35.70	V
N/A							
3702.000	-49.05	8.2	9.1	-48.15	-13.00	-35.15	H
5550.000	-47.13	10.06	10.81	-46.38	-13.00	-33.38	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 1900 / TX / CH 661**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-51.57	8.23	9.16	-50.64	-13.00	-37.64	V
5641.000	-49.77	10.18	10.83	-49.12	-13.00	-36.12	V
N/A							
2435.000	-51.48	6.24	6.01	-51.71	-13.00	-38.71	H
3758.000	-46.51	8.23	9.16	-45.58	-13.00	-32.58	H
5641.000	-48.65	10.18	10.83	-48.00	-13.00	-35.00	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** EDGE 1900 / TX / CH 810**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2435.000	-54.71	6.24	6.01	-54.94	-13.00	-41.94	V
3821.000	-49.11	8.29	9.22	-48.18	-13.00	-35.18	V
N/A							
3821.000	-44.51	8.29	9.22	-43.58	-13.00	-30.58	H
5732.000	-50.65	10.24	10.85	-50.04	-13.00	-37.04	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band II / TX / CH 9262**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-52.14	8.2	9.1	-51.24	-13.00	-38.24	V
5564.000	-46.23	10.1	10.81	-45.52	-13.00	-32.52	V
N/A							
3702.000	-50.72	8.2	9.1	-49.82	-13.00	-36.82	H
5557.000	-49.73	10.08	10.81	-49.00	-13.00	-36.00	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band II / TX / CH 9400**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-51.51	8.23	9.16	-50.58	-13.00	-37.58	V
5641.000	-51.59	10.18	10.83	-50.94	-13.00	-37.94	V
N/A							
3758.000	-51.47	8.23	9.16	-50.54	-13.00	-37.54	H
5641.000	-48.05	10.18	10.83	-47.40	-13.00	-34.40	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band II / TX / CH 9538**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-51.82	8.23	9.16	-50.89	-13.00	-37.89	V
5634.000	-49.31	10.18	10.83	-48.66	-13.00	-35.66	V
N/A							
3814.000	-48.94	8.28	9.21	-48.01	-13.00	-35.01	H
6376.000	-50.22	11.11	11.2	-50.13	-13.00	-37.13	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band V / TX / CH 4132**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
4731.000	-54.28	9.19	10.17	-53.30	-13.00	-40.30	V
6208.000	-52.06	11.18	11.07	-52.17	-13.00	-39.17	V
N/A							
3142.000	-55.68	7.21	7.83	-55.06	-13.00	-42.06	H
5389.000	-53.41	9.8	10.76	-52.45	-13.00	-39.45	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band V / TX / CH 4182**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2512.000	-48.03	6.37	6.13	-48.27	-13.00	-35.27	V
5424.000	-53.65	9.85	10.77	-52.73	-13.00	-39.73	V
N/A							
1679.000	-52.48	5.08	5.98	-51.58	-13.00	-38.58	H
5333.000	-53.47	9.71	10.73	-52.45	-13.00	-39.45	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA Band V / TX / CH 4233**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2540.000	-49	6.41	6.2	-49.21	-13.00	-36.21	V
5081.000	-52.74	9.44	10.63	-51.55	-13.00	-38.55	V
N/A							
1693.000	-44.35	5.1	5.95	-43.50	-13.00	-30.50	H
2540.000	-49.38	6.41	6.2	-49.59	-13.00	-36.59	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band II / TX / CH 9262**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3205.000	-56.63	7.27	8.02	-55.88	-13.00	-42.88	V
5557.000	-46.53	10.08	10.81	-45.80	-13.00	-32.80	V
N/A							
3702.000	-52.05	8.2	9.1	-51.15	-13.00	-38.15	H
5557.000	-50.18	10.08	10.81	-49.45	-13.00	-36.45	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band II / TX / CH 9400**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-51.64	8.23	9.16	-50.71	-13.00	-37.71	V
5634.000	-51.6	10.18	10.83	-50.95	-13.00	-37.95	V
N/A							
3765.000	-51.43	8.24	9.16	-50.51	-13.00	-37.51	H
5830.000	-48.96	10.41	10.87	-48.50	-13.00	-35.50	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band II / TX / CH 9538**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3814.000	-50	8.28	9.21	-49.07	-13.00	-36.07	V
5641.000	-50.94	10.18	10.83	-50.29	-13.00	-37.29	V
N/A							
3814.000	-48.64	8.28	9.21	-47.71	-13.00	-34.71	H
5095.000	-53.05	9.45	10.64	-51.86	-13.00	-38.86	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band V / TX / CH 4132**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3352.000	-56.47	7.52	8.46	-55.53	-13.00	-42.53	V
4780.000	-53.77	9.28	10.25	-52.80	-13.00	-39.80	V
N/A							
4472.000	-53.09	8.83	9.78	-52.14	-13.00	-39.14	H
5424.000	-52.94	9.85	10.77	-52.02	-13.00	-39.02	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.



Operation Mode: WCDMA / HSDPA Band V / TX / CH 4182 **Test Date:** April 14, 2014
Temperature: 25°C **Tested by:** David Shu
Humidity: 50 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2512.000	-41.15	6.37	6.13	-41.39	-13.00	-28.39	V
4822.000	-54.15	9.31	10.32	-53.14	-13.00	-40.14	V
N/A							
-52.96	9.19	10.17	-51.98	-13.00	-38.98	-52.96	H
-51.91	10.66	10.97	-51.60	-13.00	-38.60	-51.91	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSDPA Band V / TX / CH 4233**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2540.000	-50.67	6.41	6.2	-50.88	-13.00	-37.88	V
3380.000	-54.57	7.55	8.54	-53.58	-13.00	-40.58	V
N/A							
1693.000	-46.18	5.1	5.95	-45.33	-13.00	-32.33	H
2533.000	-50.39	6.4	6.19	-50.60	-13.00	-37.60	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band II /
TX / CH 9262**Temperature:** 25°C**Humidity:** 50 % RH**Test Date:** April 14, 2014**Tested by:** David Shu**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3702.000	-52.67	8.2	9.1	-51.77	-13.00	-38.77	V
5557.000	-51.43	10.08	10.81	-50.70	-13.00	-37.70	V
N/A							
3702.000	-52.21	8.2	9.1	-51.31	-13.00	-38.31	H
5557.000	-49.65	10.08	10.81	-48.92	-13.00	-35.92	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band II /
TX / CH 9400**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3758.000	-51.66	8.23	9.16	-50.73	-13.00	-37.73	V
5634.000	-51.96	10.18	10.83	-51.31	-13.00	-38.31	V
N/A							
3765.000	-50.86	8.24	9.16	-49.94	-13.00	-36.94	H
5634.000	-48.9	10.18	10.83	-48.25	-13.00	-35.25	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band II /
TX / CH 9538**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3821.000	-48.58	8.29	9.22	-47.65	-13.00	-34.65	V
6264.000	-50.16	10.92	11.11	-49.97	-13.00	-36.97	V
N/A							
3814.000	-48.94	8.28	9.21	-48.01	-13.00	-35.01	H
6376.000	-50.22	11.11	11.2	-50.13	-13.00	-37.13	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band V /
TX / CH 4132**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
3345.000	-55.17	7.51	8.44	-54.24	-13.00	-41.24	V
5214.000	-54.39	9.57	10.69	-53.27	-13.00	-40.27	V
N/A							
4416.000	-53.35	8.68	9.73	-52.30	-13.00	-39.30	H
5039.000	-52.67	9.43	10.62	-51.48	-13.00	-38.48	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band V /
TX / CH 4182**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2736.000	-56.9	6.76	6.71	-56.95	-13.00	-43.95	V
4388.000	-53.99	8.64	9.71	-52.92	-13.00	-39.92	V
N/A							
4339.000	-53.32	8.62	9.67	-52.27	-13.00	-39.27	H
5732.000	-52.93	10.24	10.85	-52.32	-13.00	-39.32	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.

**Operation Mode:** WCDMA / HSUPA Band V /
TX / CH 4233**Test Date:** April 14, 2014**Temperature:** 25°C**Tested by:** David Shu**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dBi)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Antenna Polarization (V/H)
2540.000	-50.23	6.41	6.2	-50.44	-13.00	-37.44	V
4108.000	-53.69	8.46	9.49	-52.66	-13.00	-39.66	V
N/A							
1693.000	-46.24	5.1	5.95	-45.39	-13.00	-32.39	H
2540.000	-51.54	6.41	6.2	-51.75	-13.00	-38.75	H
N/A							

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.