

亞 驪 企 業 有 限 公 司
ARISTOTLE ENTERPRISES

承 認 申 請 書

客戶名稱: 捷超通訊科技股份有限公司
Customer
廠商料號: RFA-02-C2M2
Part No.
品名: RFA-02-C2M2
Description
圖號: RFA-02-C2M2.DWG
Drawing No.
客戶料號:
Drawing No.

出廠簽章:

檢 查 TEST BY	核 對 CHECK BY	承 認 APPROVE BY
周沂珮	黃秋芳	廖煥文

承認簽章:

檢 查 TEST BY	核 對 CHECK BY	承 認 APPROVE BY

地址:台北縣中和市連城路 246 號 3 樓

電話:02-2225-8209

傳真:02-2225-7523

I N D E X

RFA-02-C2M2

- 1. Specification**
- 2. Radiation Pattern**
 - 2.1 E-plane pattern**
 - 2.2 H-plane pattern**
- 3. VSWR Test Data**

1. Specification

DESCRIPTION : Swivel Access Point Antenna

MODEL NO : RFA-02-C2M2

1.1 ELECTRICAL

Frequency Range: 2400~2500 MHZ
Gain: 2.5dBi (min.)
VSWR: ≤ 2
Polarization: Linear, Vertical
Impedance : 50 Ω
Connector: RP-SMA PLUG



1.2 MECHANICAL

Condition : Non operating during test.

Material : PCABS(UL94V-0)

Endurance

Number of 90° rotation of the connector : 1000 cycles (min.)

Mandatory : Guaranty of functionalities after test.

Bending: Number of 90° at the hinge parts and bending on one direction with 1 kg force : 1000 cycles

Mandatory : No mechanical damage tolerated. Guaranty of functionalities after test.

Antenna resistance

Tests are applicable to all parts and both sides.

Traction: Tractions force applied 3 times on plugs during 15 second : 5 kg

Mandatory : No mechanical damage tolerated. Guaranty of functionalities after test.

1.3 ENVIROMENTAL

Storage

Condition : Non operating during test.

Cold: -40°C during 72h (IEC 68-2-1 standard Ab/Ad test)

Dry heat: +80°C during 96h (IEC 68-2-2 standard Bb/Bd test)

Humidity: +40°C at 95%R.H. during 4 days (IEC 68-2-56 standard Cb test)

Mandatory : No mechanical or visible damage tolerated. Guaranty of functionalities after test.

Operation

Condition : Operating during test.


Cold: -10°C during 48h (IEC 68-2-1 standard Ab/Ad test)

Dry heat: +55°C during 48h (IEC 68-2-2 standard Bb/Bd test)

Composite: -10°C to +55°C 95%R.H 4 cycles (IEC 68-2-30 standard Nb test)

Mandatory : No mechanical or visible damage tolerated. Guaranty of functionalities during and after test.

NO.	NAME	FINISH	Q'TY	MEMO
1.	Connector	RP-SMA PLUG	1	
2.	Hinge	BLACK	1	
3.	Tube	BLACK	1	

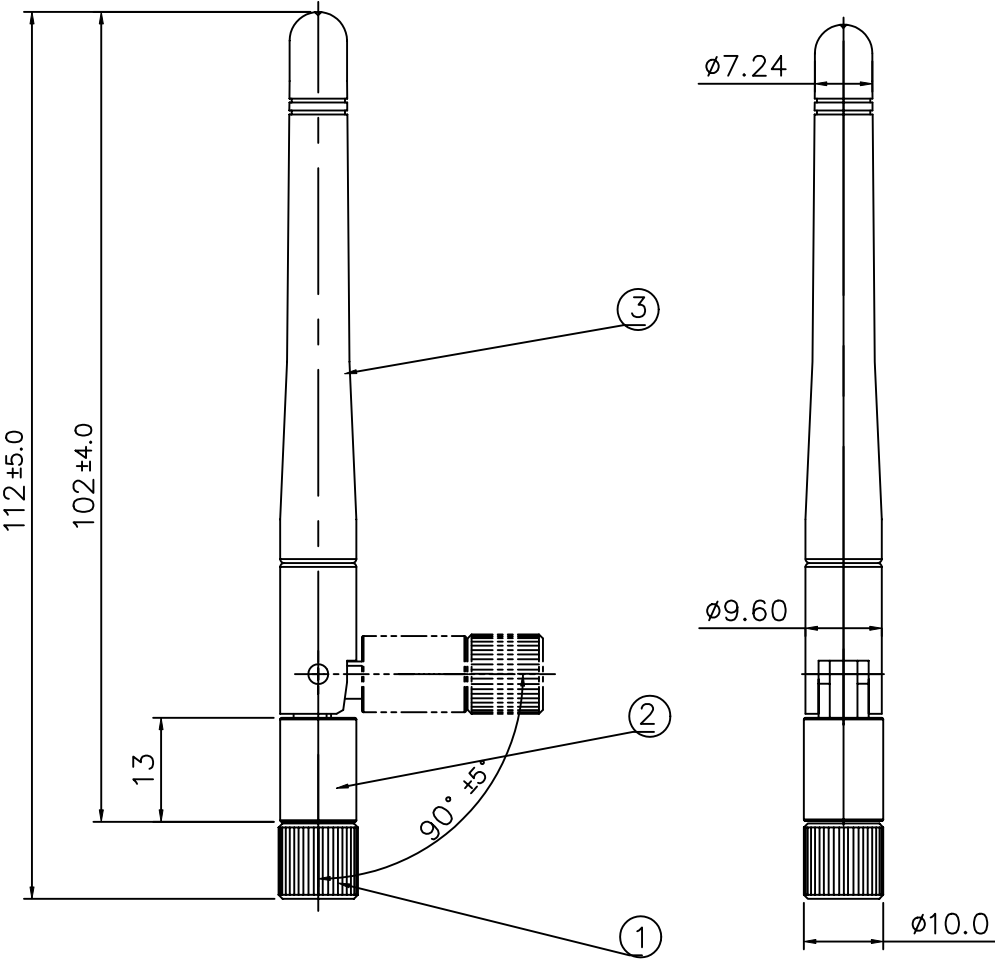


PROJECTION UNITS MM	TOLERANCE UNLESS OTHERWISE SPECIFIED		TITLE	
	LINEAR	ANGLE	RFA-02-C2M2	
	.0 ± 0.10	X° REF ± 0.5		
REV.	APPD.	DWG NO.		SHEET
	CHKD			1/1
SIZE	SCALE	RFA-02-C2M2.DWG		REV.
DESIGN	DRAW			B
ECN	NAME	J.W.Lee 91/01/07		
DATE				


3.				REV.			
2.							
1.				SIZE	SCALE		
REV	ECN	NAME	DATE	A4	1/1	DRAW	J.W.Lee 91/01/07

2. Radiation Pattern


2.1 E-plane pattern

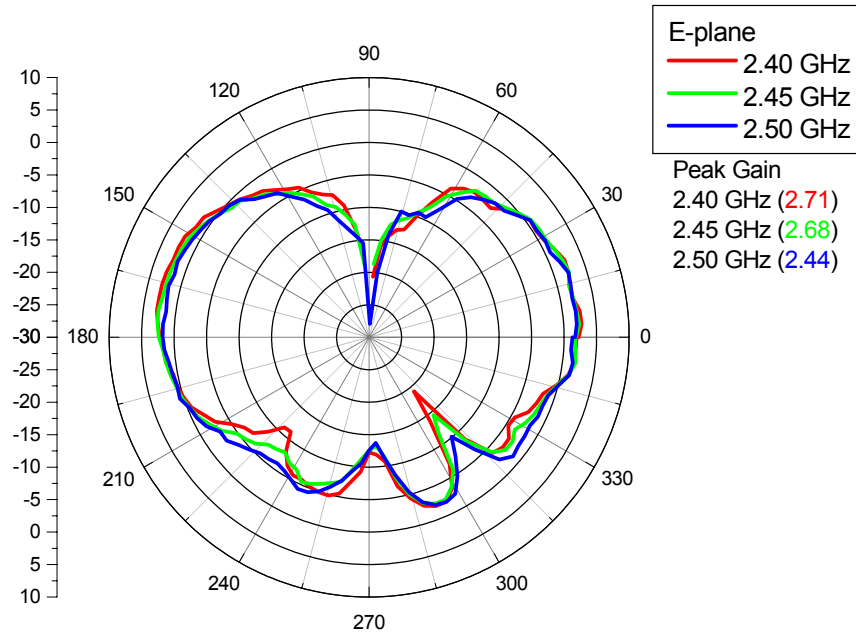

2.2 H-plane pattern

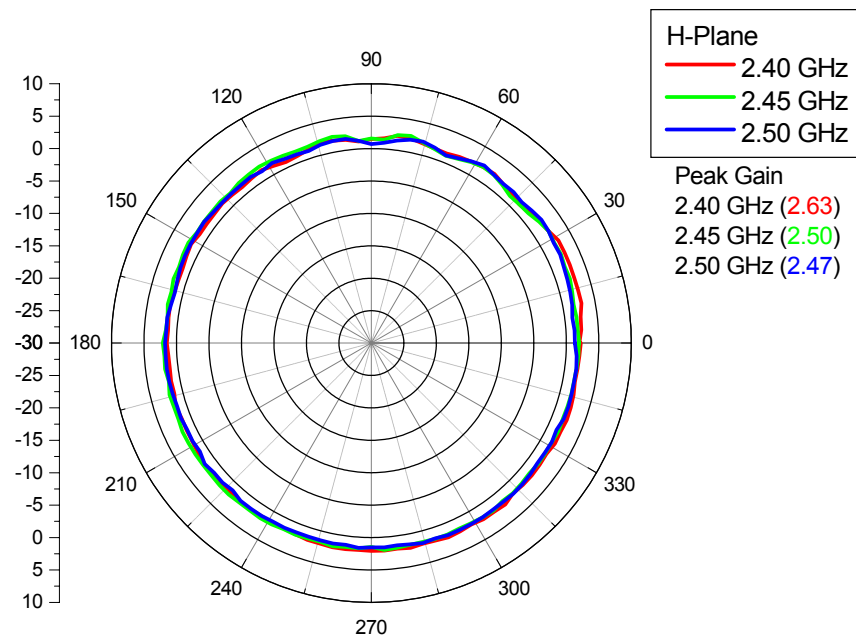

3.VSWR Test Data

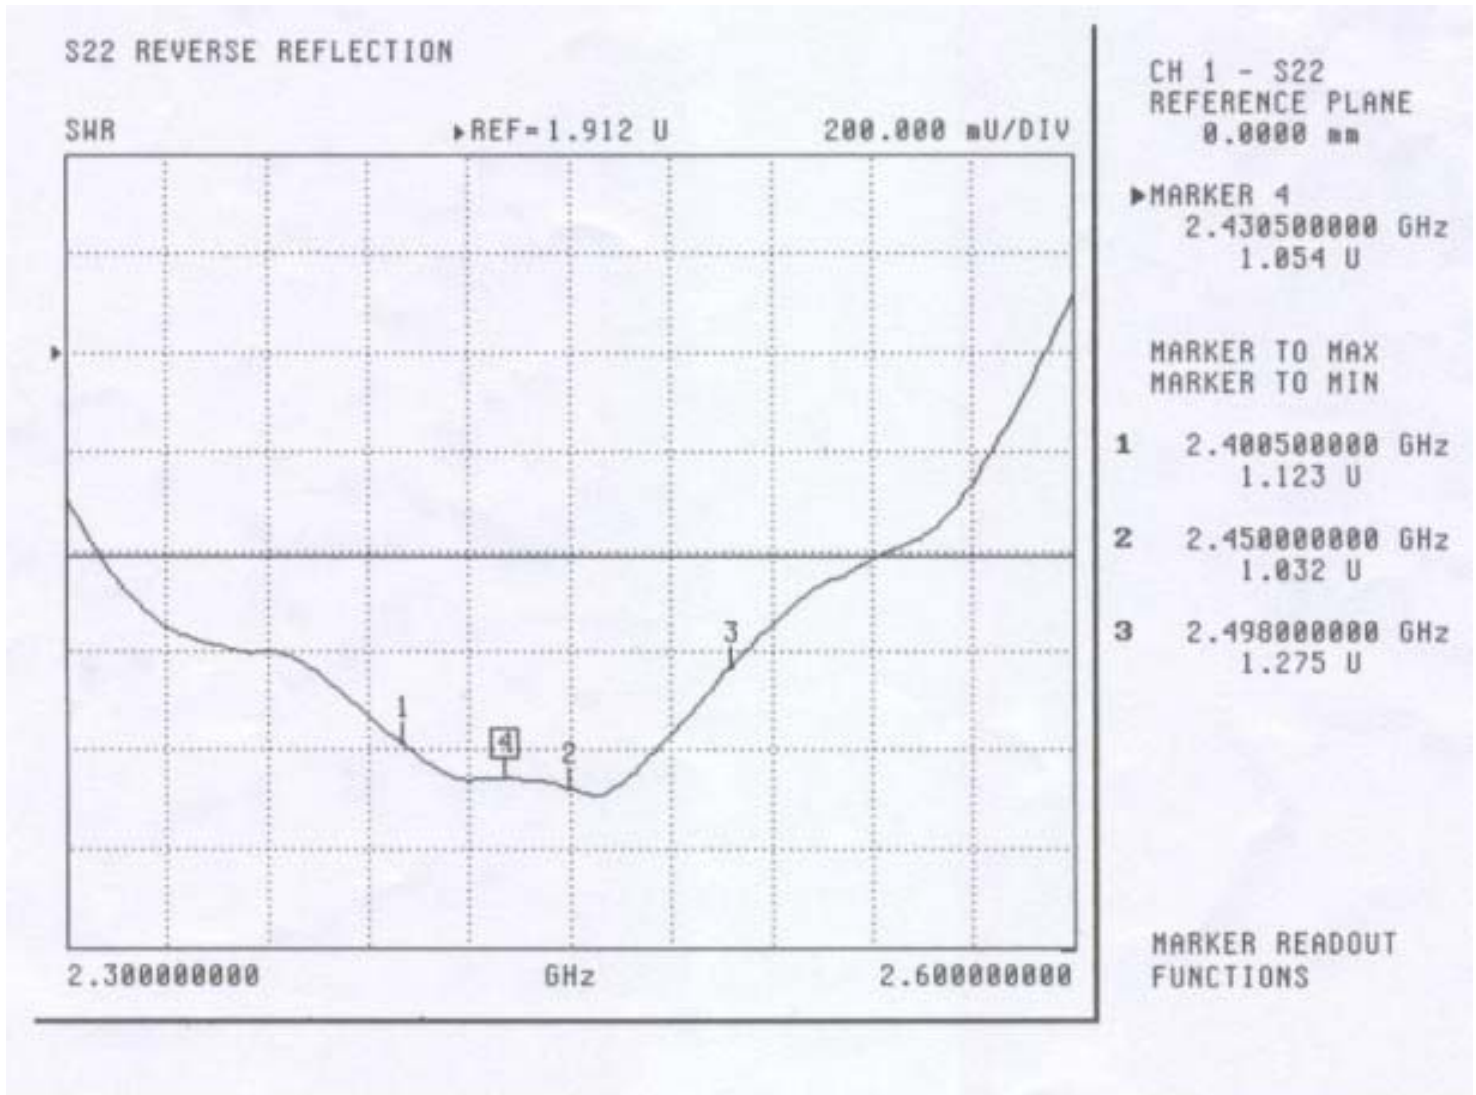

SPECIFICATION FOR APPROVAL

DOCUMENT: A30178B001

STYLE : 200°C 30V
RG-178B/U

SIZE: 7/0.102 SCCS

RECOGNIZED:

WONDERFUL WIRE CABLE CO.,LTD

OFFICE : 72WU KONG 6TH ROAD,
WU KU IND. DISTRICT
TAIPEI HSIEN,TAIWAN


TEL : (02)22988033
FAX : (02)22988031-2

FACTORY : 17 PEI YUAN ROAD,
CHUNG-LI IND. PARK
TAIWAN, R.O.C.

TEL : (03)4527777
FAX : (03)4517214

WONDERFUL WIRE CABLE CO., LTD

SPECIFICATION

STYLE	200℃ 30V COAXIAL	DOCUMENT NO : A30178B001
SIZE	RG-178B/U	ESTABLISHED DATE: 2000/06/29
STANDARD : MIL-C-17		
Conductor	Size	AWG 30
	Material	----- Silver-Coated Copper Clad Steel
	Conductors No.	----- 7
	Conductors Size	mm 0.102
	O.D.	mm 0.30
Insulation	Average Thickness	mm 0.28
	Diameter	mm 0.86
	Material	----- FEP
	Color	----- Clear
Braid	Material	----- Silver-Coated Copper
	Construction	mm 16 / 3 / 0.10
	Coverage	% 95
Jacket	Average Thickness	mm 0.25
	Diameter	mm 1.80 ±0.05
	Material	----- FEP
	Color	----- Brown
Marking	M17/93-RG178B/U WONDERFUL	
Drawing		

AK001/210X297/1.0

PAGE : 1

EDITION : 1.0

REVISED DATE :

MAKER :

CONFIRM :

APPROVAL :

WONDERFUL WIRE CABLE CO., LTD

SPECIFICATION

Electrical & Physical Properties							
Item				RG-178B/U			
Rating Temp Voltage				200℃ 30V			
Conductor Resistance				838.0 OHM/KM/20℃ MAX.			
Insulation Resistance				100 MEGA OHM/KM MIN.			
Dielectric Strength				AC 1.0 KV/Minute			
Spark Test				0.5 KV			
Insulation	Unaged	Tensile Strength		2500 PSI MIN.(1.76 Kg / m m²)			
		Elongation		200% MIN.			
	Aged	Tensile Strength		UNAGED MIN.75%(168HRS×232℃)			
		Elongation		UNAGED MIN.75%(168HRS×232℃)			
Jacket	Unaged	Tensile Strength		2500 PSI MIN.(1.76 Kg / m m²)			
		Elongation		200% MIN.			
	Aged	Tensile Strength		UNAGED MIN.75%(168HRS×232℃)			
		Elongation		UNAGED MIN.75%(168HRS×232℃)			
Nom. Impedance				50 Ohms			
VSWR				MAX. 1.3 at 0.4G~3GHz			
Nom. Vel. of Prop.				69.5%			
Flame Test				VW-1 OK			
Attenuation (dB/100m)	50MHz	100MHz	400MHz	900MHz	1.8GHz	3GHz	
	34.4	45.9	91.8	139.4	207.5	308.2	

AK001/210X297/1.0

PAGE : 2

EDITION : 1.0

REVISED DATE :

MAKER :

CONFIRM :

APPROVAL :



奇美實業股份有限公司

台灣省台南縣仁德鄉三甲村59-1號 電話: 886-6-266-5000, 傳真: 886-6-266-5555~7

1/2(A-GHE)

物質安全資料表

VIW

1. 物品及廠商資料

產品名稱	Polylac®	PA-707 PA-757 PA-757N PA-717C PA-727 PA-747 PA-709
製造商	奇美實業股份有限公司	
地址	台灣省台南縣仁德鄉三甲村59-1號	
電話	886-6-2663000	Ext. 1361 (產品推廣課)
緊急電話	886-6-2663000	Ext. 1361 (產品推廣課)
傳真電話	886-6-2667981	

2. 成品辨識資料

單一產品或混合物	單一產品
化學名稱	Acrylonitrile-Butadiene-Styrene Copolymer
含量	>98% (添加劑≤2%)
化學式	(C ₃ H ₃ N, C ₄ H ₆ , C ₈ H ₈) _x
CAS No.	9003-56-9
危害性不純物	無

3. 危害性分類

健康危害效應	無
環境影響	無
物理性及化學性危害	無
特殊危害	無

4. 急救措施

吸入	若吸入熔融樹脂逸出之氣體，將患者移至通風處，立即送醫。
皮膚接觸	若接觸到塑膠粒或塑膠粉末，以清水沖洗。
	若接觸到熔膠，以大量(肥皂)水沖洗患部及衣物，立即送醫。
眼睛接觸	若接觸到塑膠粒或塑膠粉末，以大量清水至少沖洗15分鐘。
	若有不適，立即送醫。
	若接觸到高溫熔融樹脂逸出之氣體，以大量清水至少沖洗15分鐘。
	若有不適，立即送醫。
吞食	催吐，以清水漱口，若有不適，立即送醫。

5. 消防措施

適用滅火劑	水、泡沫、乾粉
滅火時可能遭遇之特殊危害	無
特殊滅火程序	移除可燃物
消防人員之特殊防護設備	使用供氧式呼吸防護具

6. 洩漏處理方法

個人應注意事項	若塑膠粒或塑膠粉末殘留於地面上，可能會導致人員滑倒。
環境注意事項	為防止鳥類或魚類由排水系統中攝食，須徹底回收
清理方法	回收或廢棄

7. 安全處置與儲存方法

處置	操作處所須嚴禁煙火，做好整理整頓以避免粉塵累積。為防止塵爆，空氣輸送管路、袋濾器及儲槽須加裝靜電消除裝置，並確實接地。袋濾器之濾材採導電性材質。
儲存	存放於陰涼處所，避免直射陽光、雨淋及急速之溫差。儲存處嚴禁煙火



CHI MEI CORPORATION

59-1 SAN CHIA, JEN TE, TAINAN COUNTY, TAIWAN R.O.C.

TEL: 886-6-266-5000,

FAX: 886-6-266-5555~7

泛用級 *ABS, POLYLAC[®] PA-757*

V1W

材料特性

特性(Properties)	測試方法(Test Method)	測試條件(Test Condition)	單位(Unit)	PA-757
引張強度 Tensile Strength	ASTM D638	1/8", 6 mm/min	Kg/cm ² (lb/in ²)	480(6800)
延伸率 Tensile Elongation	ASTM D638	1/8", 6 mm/min	%	20
彎曲強度 Flexural Strength	ASTM D790	1/4", 2.8 mm/min	Kg/cm ² (lb/in ²)	820(11660)
彎曲彈性率 Flexural Modulus	ASTM D790	1/4", 2.8 mm/min	Kg/cm ² (lb/in ²)	27000(380000)
IZOD 衝擊強度 Izod Impact Strength	ASTM D256(Notched)	1/4", 23°C 1/8", 23°C	Kg-cm/cm(ft-lb/in) Kg-cm/cm(ft-lb/in)	18(3.3) 20(3.7)
流動係數 Melt Flow Index	ASTM D1238	200°C, 5Kg	g/10min	1.8
硬度 Hardness	ASTM D785	1/2"	R Scale	116
比重 Specific Gravity	ASTM D792	23°C	-	1.05
軟化點 Vicat Softening Temp	ASTM D1525	1/8", 50°C/hr	°C (°F)	105(221)
熱變形溫度 H.D.T Annealed(85°C, 8hr) Unannealed	ASTM D648	1/4", 120°C/hr	°C (°F)	99(210) 88(190)
燃燒率 Flammability	UL 94	-	-	1/16"HB

以上數據僅代表一般通用數據，不代表每一產品的規格值

若有任何疑問請洽產品推廣課 06-2665000, 06-2663000

QMF22 Component - Pla

Wednesday, August 29, 2001

E56070

CHI MEI CORPORATION

59-1 SAN CHIA JEN TE TAINAN HSIEN TAIWAN

Material Designation: PA-757 (+)

Product Description: Acrylonitrile Butadiene Styrene (ABS), designated "Polylac" furnished as pellets.

Color	Min. Thick.	Flame Class	HWI	HAI	RTI Elec	RTI Imp	RTI Str	IEC GWIT	IEC GWFI
(mm)									
ALL	1.5	HB	4	0	85	80	85	-	-
	3	HB	3	0	85	80	85	-	-
CTI: 0									
HVTR: 1									
D495: 1									
IEC BP: -									
(+) Optional prefix or suffix may be used to denote 0-0.5% acid scavengers.									

Report Date: 06/23/1983

Underwriters Laboratories Inc®

267295002

UL94 small-scale test data does not pertain to building materials, furnishings and related contents. UL 94 small-scale test data is intended solely for determining the flammability of plastic materials used in components and parts of end-product devices and appliances, where the acceptability of the combination is determined by ULI.