

FCC Part 15C Compliance Test Report

Test Report no.:	Tre_FCC_0626_05.doc	Date of Report:	5.7.2006
Number of pages:	42	Customer's Contact person:	Anders Nielsen
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Client:	Nokia Corporation Frederikskaj 1790 COPENHAGEN V DENMARK Tel. +45 33 292929 Fax. +45 33 292934
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	GSM phone RM-200 / Battery BP-6M, AC charger AC-4, Headset HDS-3, Dummy battery SF-67R		
FCC ID:	QTKRM-200	IC:	661AD-RM200
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), IC standards RSS-GEN and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			
	Juho Tuohino, System Manager		

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	27.6.2006
Testing completed	30.6.2006
The customer's contact person	Anders Nielsen
Test Plan referred to	\\EMC\\TESTPLAN\\
Notes	-
Document name	T:\\Projects\\RM-200\\EMC\\Results\\FCC\\Tre_FCC_0626_05.doc

1.1. EUT and Accessory Information

The EUT is a quadri band (GSM900/1800/1900 and WCDMA2100) mobile phone with GPRS, EGPRS and Bluetooth. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
GSM phone	RM-200	004400951780582	0400	-	3.36	40734
GSM phone	RM-200	004400951780400	0400	-	3.36	40735
Battery	BP-6M	-	-	-	-	40736
Headset	HDS-3	-	-	-	-	40739
AC charger	AC-4	-	-	-	-	40706
Dummy Battery	SF-67R	-	-	-	-	40738

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Peak output power	PASSED
15.247(c)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(c)	A8.5	Spurious RF conducted emissions	PASSED
15.247(c), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	PASSED
15.247(a)(1)	A8.1 (1)	20 dB bandwidth	PASSED
15.247(a)(1)	A8.1 (2)	Carrier frequency separation	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Number of hopping frequencies	PASSED
15.247(a)(1)(iii)	A8.1 (4)	Time of occupancy	PASSED

PASSED

FAILED

NP

The EUT complies with the essential requirements in the standard.

The EUT does not comply with the essential requirements in the standard.

The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Test setups.....	5
2.1. Conducted RF test setup	5
2.2. AC powerline conducted emissions test setup.....	5
2.3. Spurious radiated emissions test setup	5
3. Peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2)).....	6
3.1. Test method and limit.....	6
3.2. Bluetooth Test results	7
4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)	10
4.1. Test method and limit.....	10
4.2. Bluetooth Test results	11
5. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5).....	16
5.1. Test method and limit.....	16
5.2. Bluetooth Test results	17
6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5).....	20
6.1. Test method and limit.....	20
6.2. Bluetooth Test results	21
7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)	24
7.1. Test method and limit.....	24
7.2. Bluetooth Test results	25
8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))	27
8.1. Test method and limit.....	27
8.2. Bluetooth Test results	28
9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))	32
9.1. Test method and limit.....	32
9.2. Bluetooth Test results	33
10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	35
10.1. Test method and limit.....	35
10.2. Bluetooth Test results	36
11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))	38


11.1.	Test method and limit	38
11.2.	Bluetooth test results	39
12.	Test Equipment	42
12.1.	Conducted measurements	42
12.2.	Radiated measurements	42

2. Test setups


2.1. Conducted RF test setup

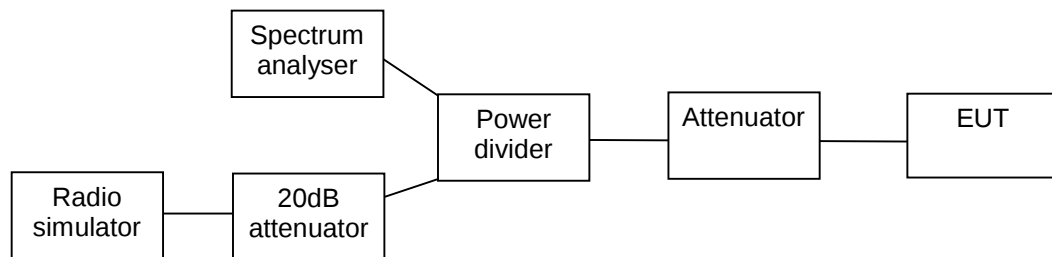

2.2. AC powerline conducted emissions test setup



2.3. Spurious radiated emissions test setup

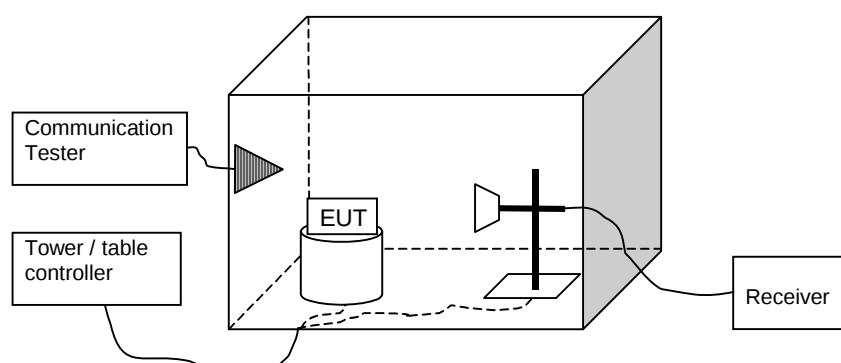

3. Peak output power (FCC §15.247(b)(1), RSS-210 A8.4 (2))

EUT with DUT number	RM-200 DUT 40734
Accessories with DUT numbers	SF-67R DUT 40738
Operation Voltage [V] / [Hz]	3.9 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 44-45 / 101.5-102.7
Date of measurements	29-30.6.2006
Measured by	Jari Jantunen

3.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for peak output power measurements


Frequency range [MHz]	Limit [W]	Limit [dBm]
2400 – 2483.5	≤ 1	≤ 30

3.2. Bluetooth Test results


3.2.1 GSKF modulation, PRBS packet type

Channel / f _c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	0.00	1.000	PASSED
40 / 2442	-0.10	0.977	PASSED
78 / 2480	-0.10	0.977	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

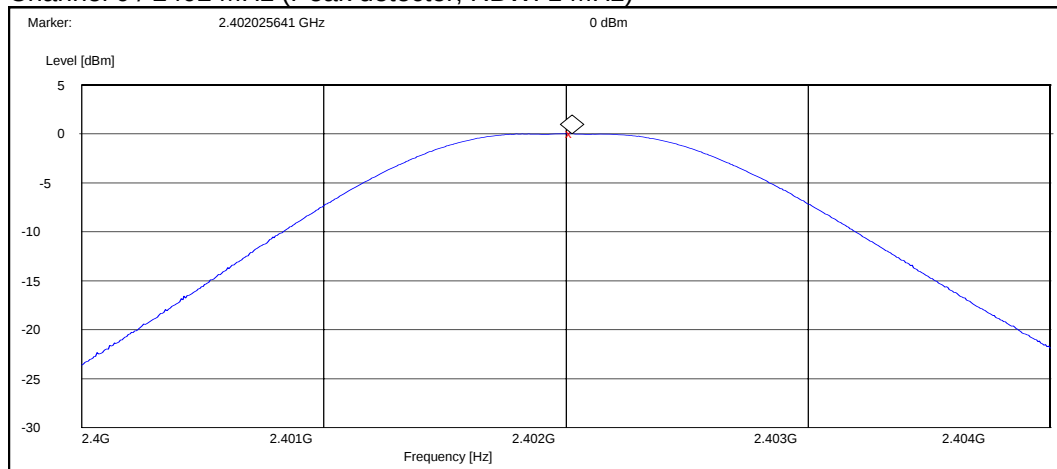

Channel 40 / 2442 MHz (Peak detector, RBW: 1 MHz)

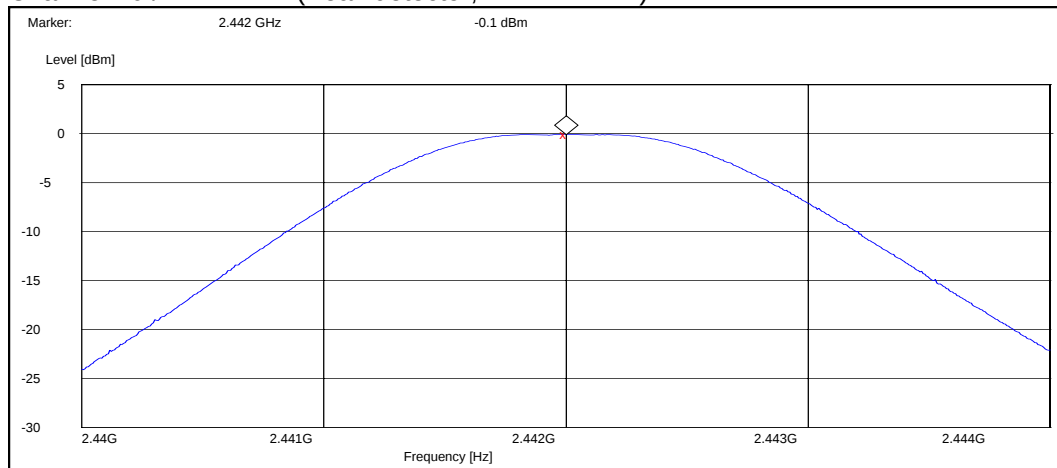


Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

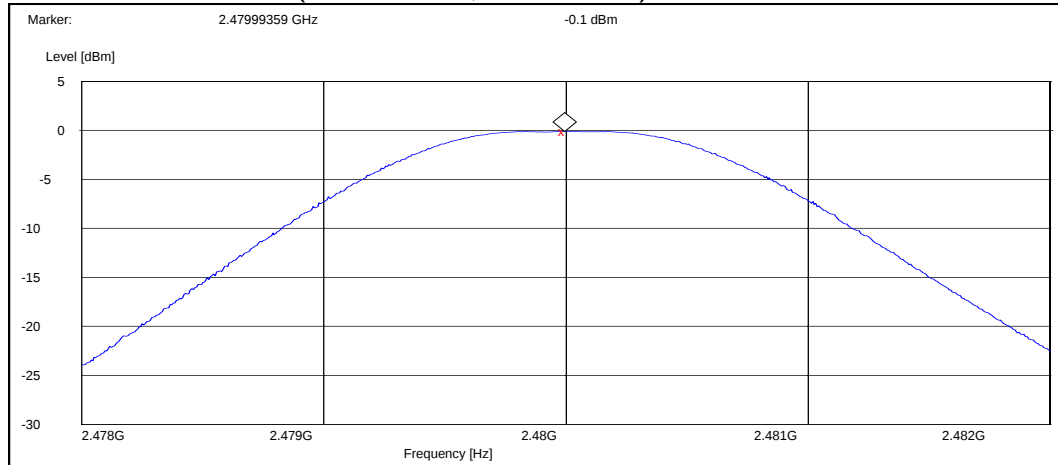


3.2.2 8DPSK modulation, PRBS packet type

Channel / f_c [MHz]	P [dBm]	P [mW]	Result
0 / 2402	0.20	1.047	PASSED
39 / 2441	-0.20	0.955	PASSED
78 / 2480	-0.60	0.871	PASSED


Channel 0 / 2402 MHz (Peak detector, RBW: 1 MHz)

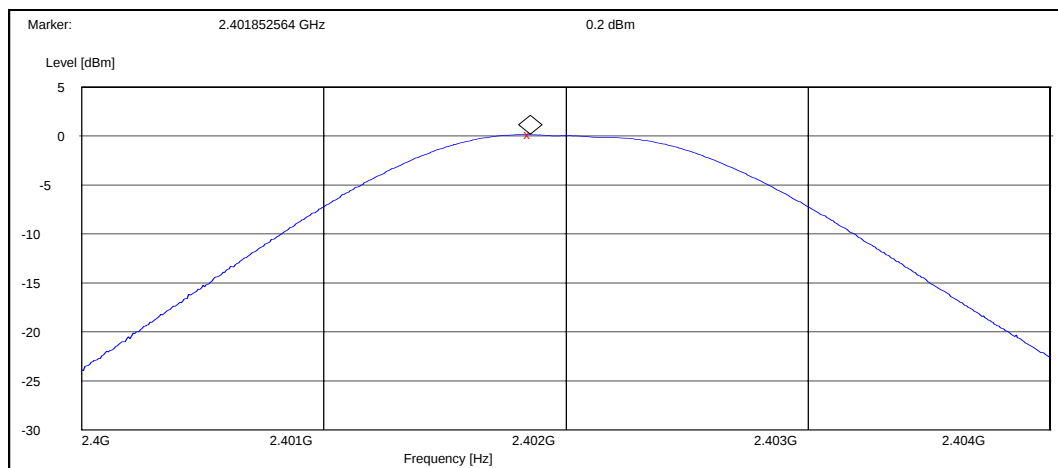

Channel 39 / 2441 MHz (Peak detector, RBW: 1 MHz)

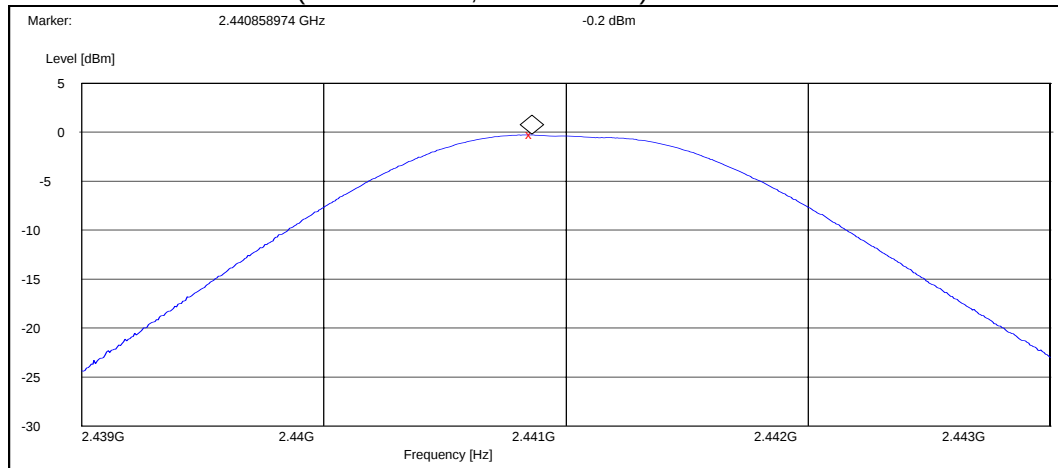

Channel 78 / 2480 MHz (Peak detector, RBW: 1 MHz)

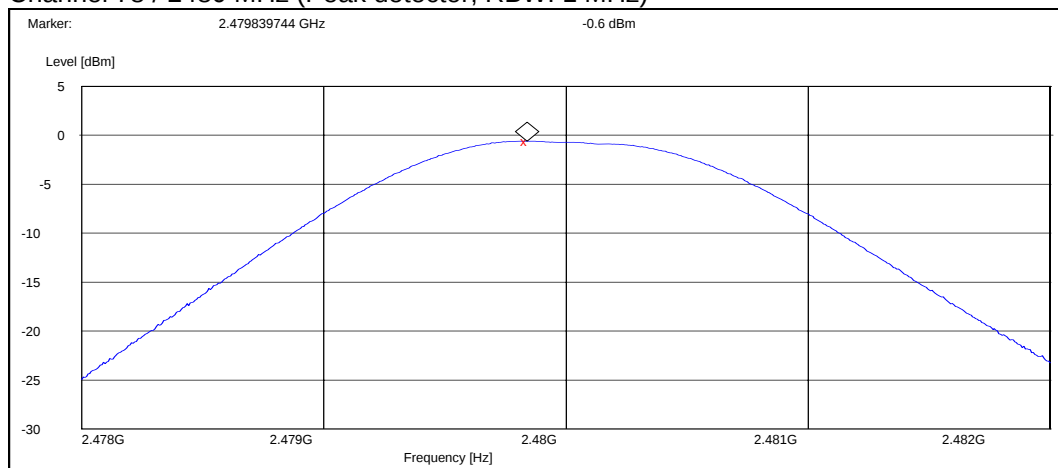

4. Band edge compliance of RF emissions (FCC §15.247(c), RSS-210 A8.5)

EUT with DUT number	RM-200 DUT 40735
Accessories with DUT numbers	BP-6M DUT 40736, AC-4 DUT 40706, HDS-3 DUT 40739
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22 / 44 / 101.5
Date of measurements	29.6.2006
Measured by	Jari Jantunen

4.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	≤ 54	≤ 74

4.2. Bluetooth Test results

4.2.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	31.82	PASSED
78 / 2480	39.53	PASSED
Hopping on, low end	28.59	PASSED
Hopping on, high end	31.32	PASSED


Peak (RBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	Result
0 / 2402	44.86	PASSED
78 / 2480	54.89	PASSED
Hopping on, low end	44.72	PASSED
Hopping on, high end	54.37	PASSED


Channel 0 / 2402 MHz

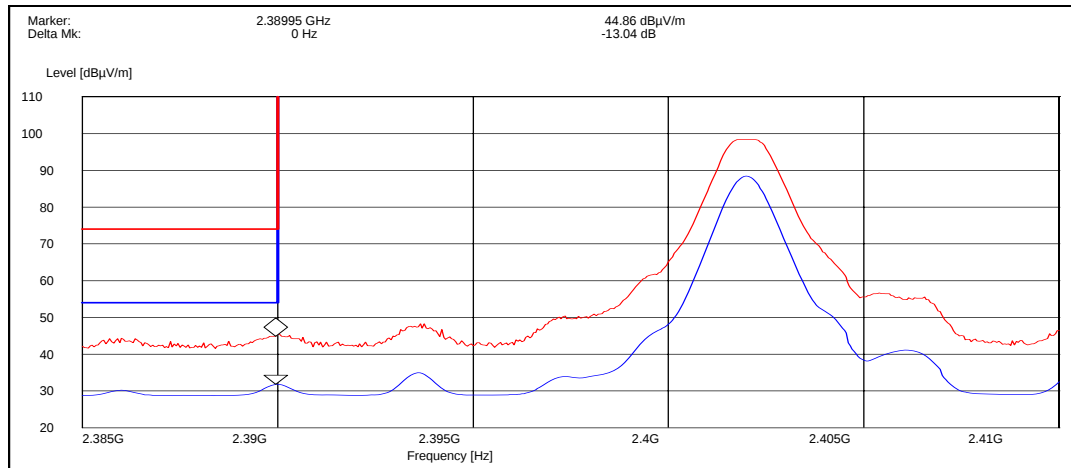


Channel 78 / 2480 MHz

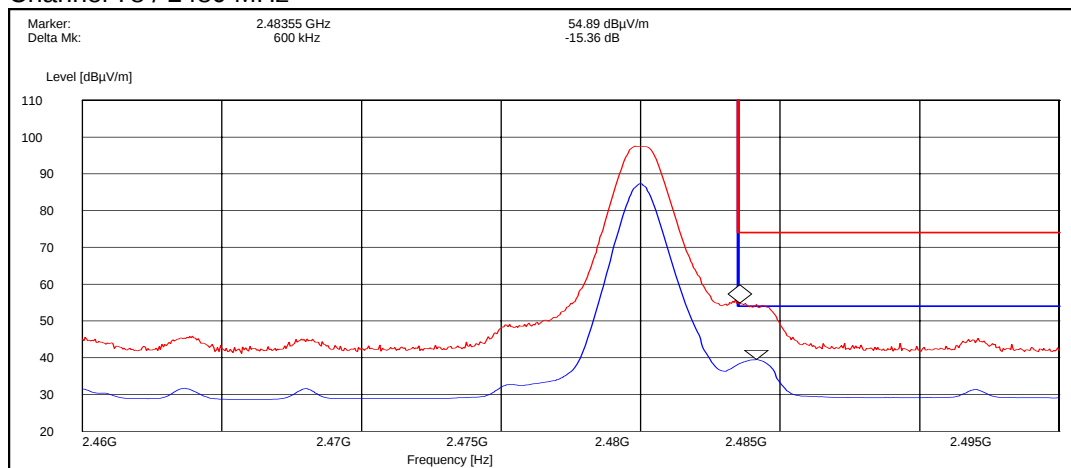

Hopping on, low end

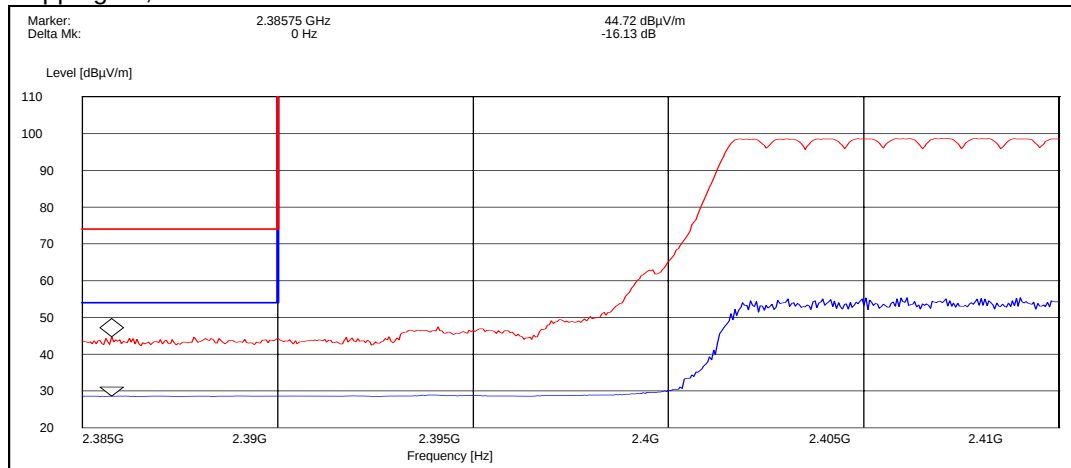

Hopping on, high end

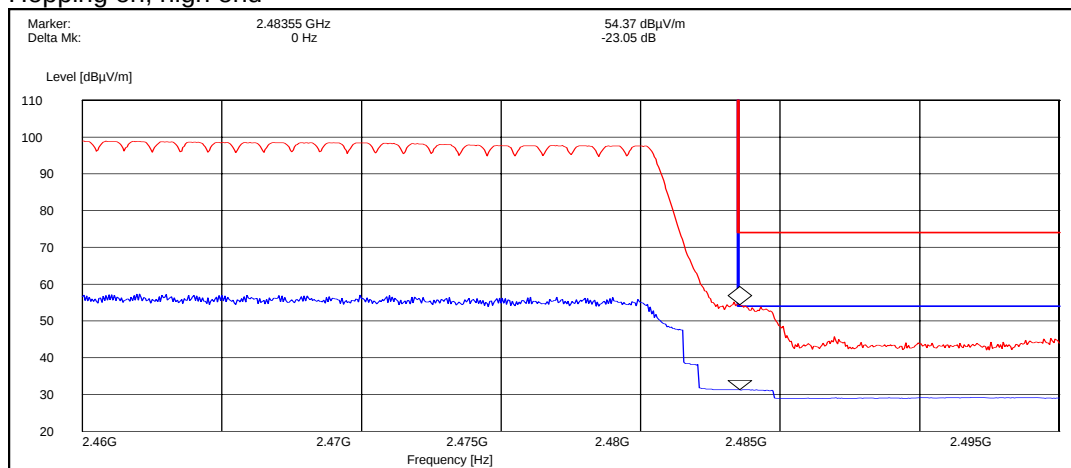

4.2.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz)

Channel / f_c [MHz]	E [dBμV/m]	Result
0 / 2402	35.14	PASSED
78 / 2480	33.06	PASSED
Hopping on, low end	28.57	PASSED
Hopping on, high end	31.17	PASSED


Peak (RBW: 1 MHz)

Channel / f_c [MHz]	E [dBμV/m]	Result
0 / 2402	45.51	PASSED
78 / 2480	49.49	PASSED
Hopping on, low end	44.95	PASSED
Hopping on, high end	53.70	PASSED


Channel 0 / 2402 MHz

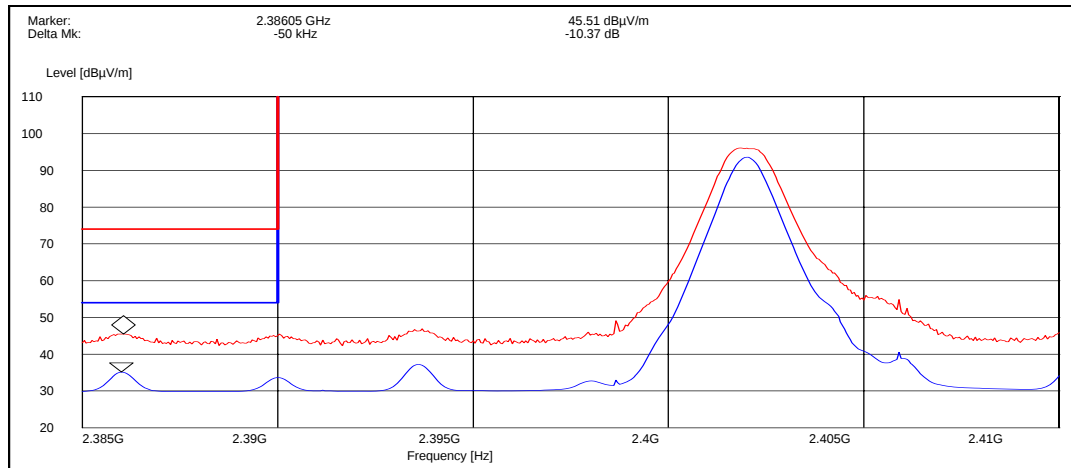


Channel 78 / 2480 MHz

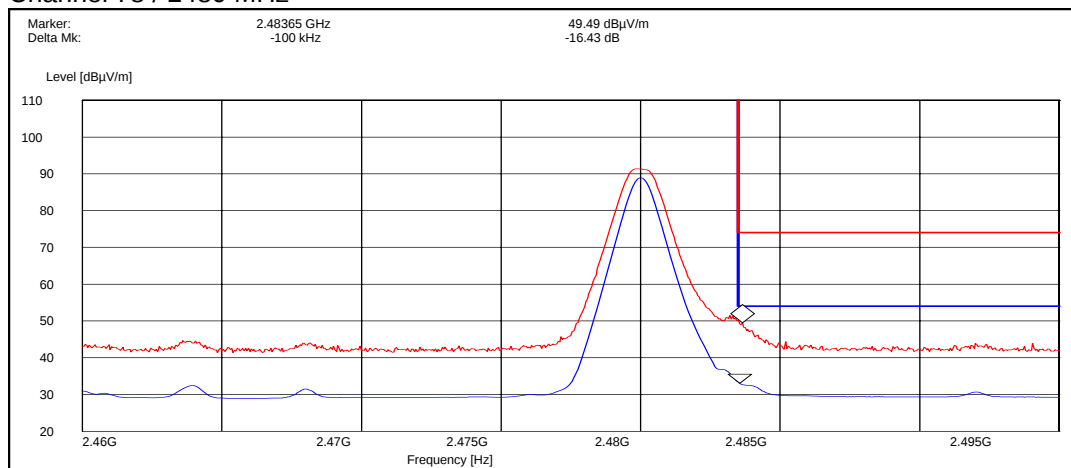

Hopping on, low end

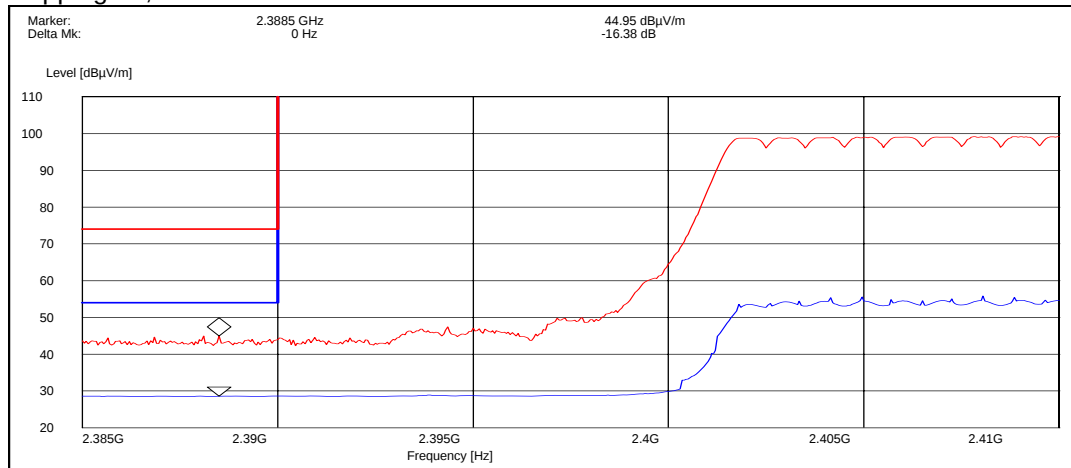

Hopping on, high end

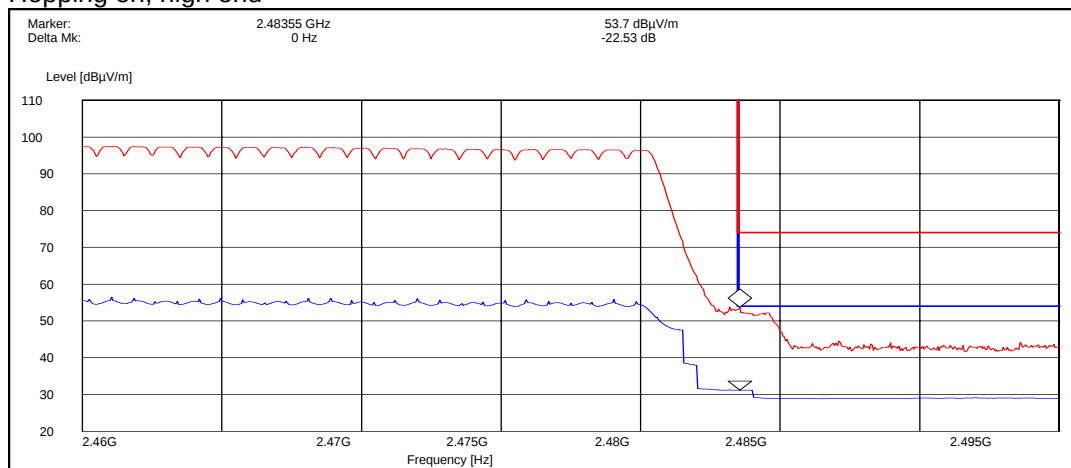

5. Spurious RF conducted emissions (FCC §15.247(c), RSS-A8.5)

EUT with DUT number	RM-200 DUT 40734
Accessories with DUT numbers	SF-67R DUT 40738
Operation Voltage [V] / [Hz]	3.9 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 44-45 / 101.5-102.7
Date of measurements	29-30.6.2006
Measured by	Jari Jantunen

5.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.


Limits for spurious RF conducted emissions measurements

Frequency range [MHz]	Limit [dBc]
1 – 25000	≤ -20

5.2. Bluetooth Test results


5.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

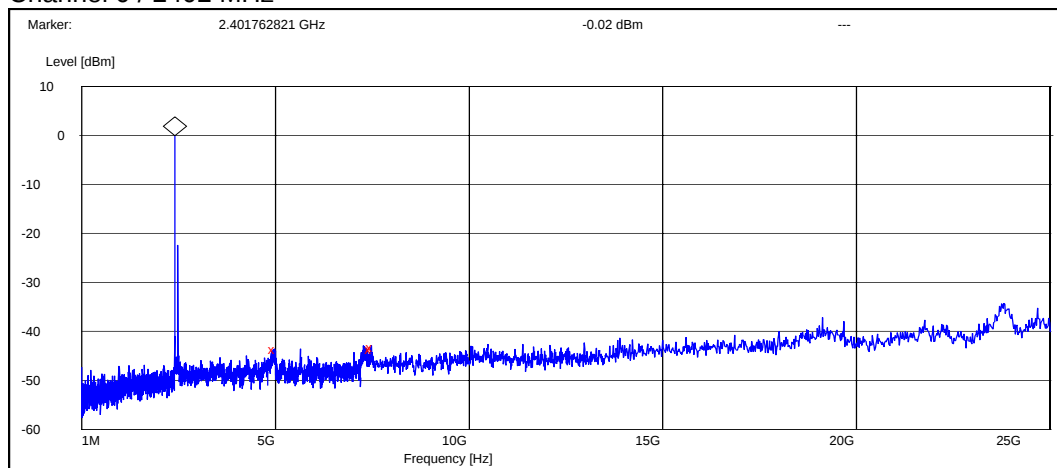


Frequency [MHz]	P [dBc]	Result
4979.807692	-43.683077	PASSED
7484.134615	-43.583077	PASSED
7500.000000	-43.283077	PASSED

Channel 40 / 2442 MHz

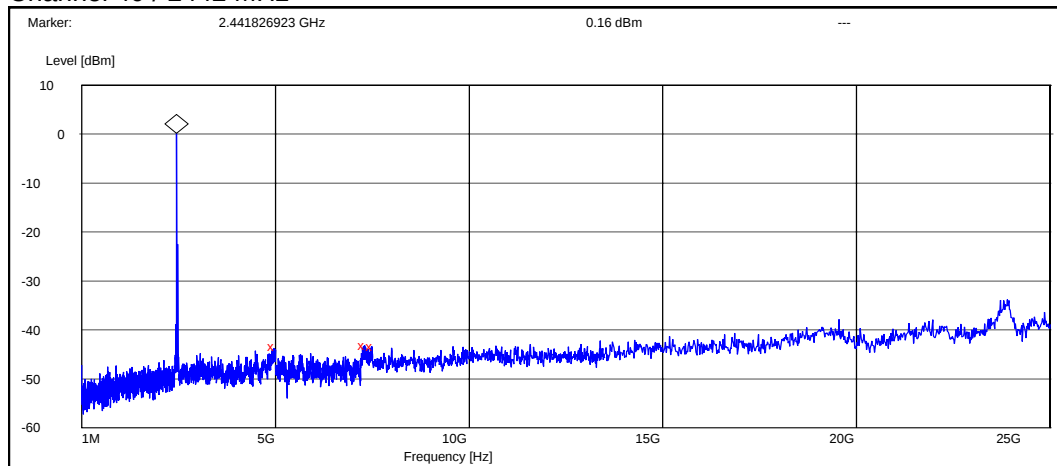

Frequency [MHz]	P [dBc]	Result
4966.346154	-43.557979	PASSED
7296.634615	-43.257979	PASSED
7500.000000	-43.557979	PASSED


Channel 78 / 2480 MHz

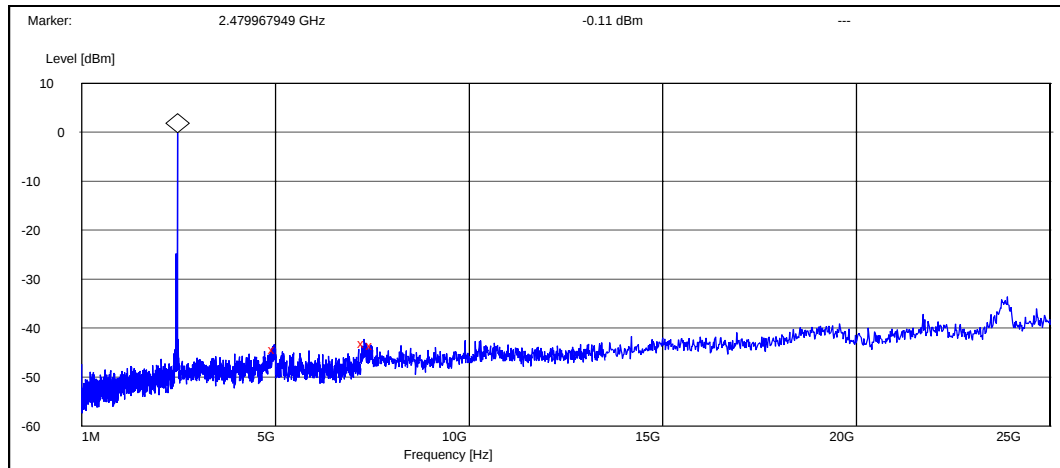

Frequency [MHz]	P [dBc]	Result
4977.564103	-44.291347	PASSED
7292.307692	-42.991347	PASSED
7500.000000	-43.491347	PASSED


5.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

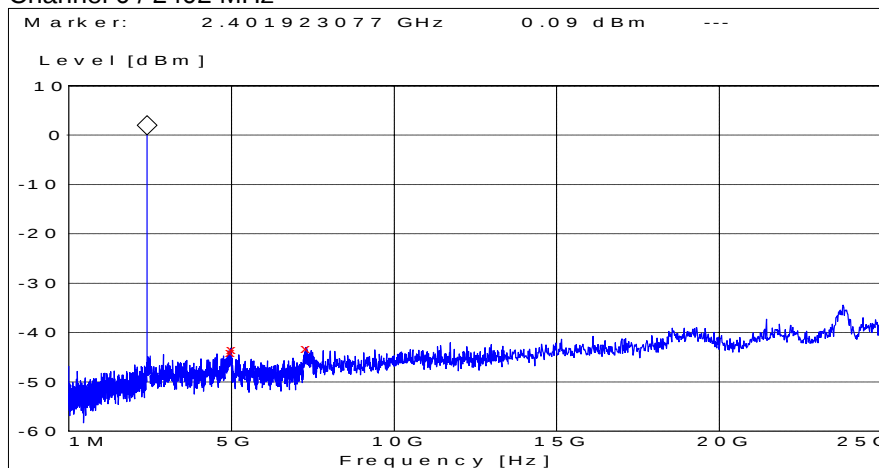


Frequency [MHz]	P [dBc]	Result
4975.000000	-43.986765	PASSED
5000.000000	-43.586765	PASSED
7286.057692	-43.386765	PASSED

Channel 39 / 2441 MHz

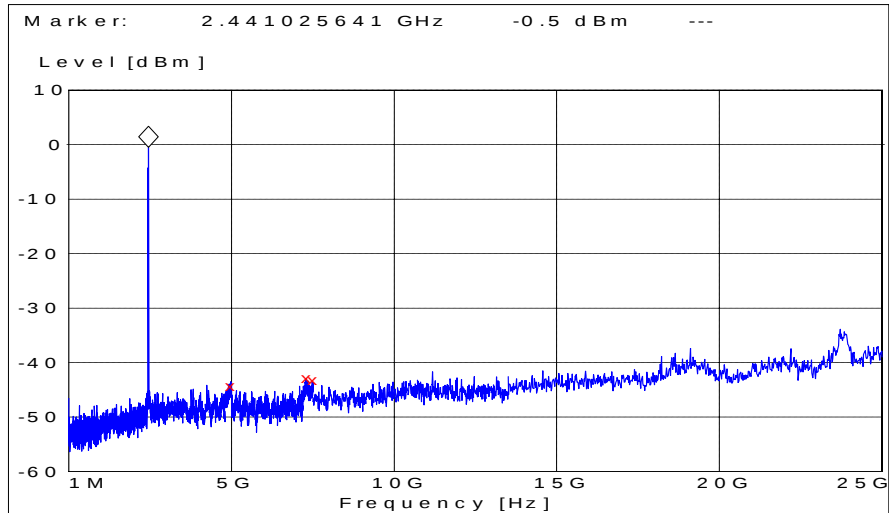

Frequency [MHz]	P [dBc]	Result
4980.769231	-43.899067	PASSED
7304.326923	-42.299067	PASSED
7500.000000	-42.799067	PASSED

Channel 78 / 2480 MHz

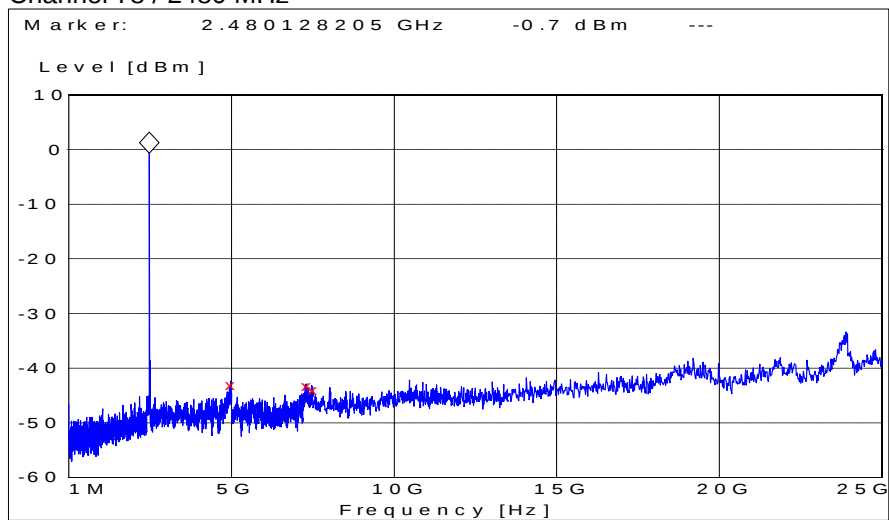

Frequency [MHz]	P [dBc]	Result
4969.871795	-42.401042	PASSED
7302.884615	-42.501042	PASSED
7500.000000	-43.301042	PASSED

6. Spurious radiated emissions (FCC §15.247(c), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-200 DUT 40735
Accessories with DUT numbers	BP-6M DUT 40736, AC-4 DUT 40706, HDS-3 DUT 40739
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 44-45 / 101.5-102.7
Date of measurements	29-30.6.2006
Measured by	Jari Jantunen

6.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
30 – 88	100	40	Quasi peak
88 – 216	150	43.5	Quasi peak
216 – 960	200	46	Quasi peak
960 – 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

6.2. Bluetooth Test results

6.2.1 GFSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	56.00	630.96	57.30	-1.30	HORIZONTAL	PASSED
7206.000000	48.50	266.07	46.50	2.00	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	46.50	211.35	47.80	-1.30	HORIZONTAL	PASSED
7206.000000	36.90	69.98	34.90	2.00	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	55.80	616.60	57.40	-1.60	HORIZONTAL	PASSED
7325.653307	48.70	272.27	46.00	2.70	HORIZONTAL	PASSED
17493.995992	51.90	393.55	33.80	18.10	HORIZONTAL	PASSED
17983.973948	55.10	568.85	33.60	21.50	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4883.769539	45.60	190.55	47.20	-1.60	HORIZONTAL	PASSED
7325.153307	32.70	43.15	30.00	2.70	HORIZONTAL	PASSED
17495.995992	39.00	89.13	20.90	18.10	HORIZONTAL	PASSED
17987.973948	42.80	138.04	21.30	21.50	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dB $\mu\text{V/m}$]	E [$\mu\text{V/m}$]	U _{RX} [dB μV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	53.70	484.17	54.70	-1.00	HORIZONTAL	PASSED

7440.000000 43.90 156.68 40.70 3.20 HORIZONTAL PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	42.40	131.83	43.40	-1.00	HORIZONTAL	PASSED
7440.000000	33.20	45.71	30.00	3.20	HORIZONTAL	PASSED

6.2.2 8DPSK modulation, PRBS packet type

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	49.10	285.10	50.40	-1.30	VERTICAL	PASSED
7206.000000	42.90	139.64	40.90	2.00	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	39.80	97.72	41.10	-1.30	VERTICAL	PASSED
7206.000000	30.90	35.08	28.90	2.00	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4881.765531	48.80	275.42	50.40	-1.60	HORIZONTAL	PASSED
7323.145291	44.10	160.32	41.40	2.70	HORIZONTAL	PASSED
17939.375752	55.60	602.56	34.30	21.30	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
3968.439880	27.00	22.39	29.00	-2.00	HORIZONTAL	PASSED
4882.265531	39.50	94.41	41.10	-1.60	HORIZONTAL	PASSED
7323.145291	31.10	35.89	28.40	2.70	HORIZONTAL	PASSED
17935.375752	42.40	131.83	21.10	21.30	HORIZONTAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	48.60	269.15	49.60	-1.00	HORIZONTAL	PASSED
7440.000000	44.20	162.18	41.00	3.20	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	31.10	35.89	32.10	-1.00	HORIZONTAL	PASSED

7440.000000	33.60	47.86	30.40	3.20	HORIZONTAL	PASSED
-------------	-------	-------	-------	------	------------	--------

7. AC powerline conducted emissions (FCC §15.207, RSS-GEN 7.2.2)

EUT with DUT number	RM-200 DUT 40735
Accessories with DUT numbers	BP-6M DUT 40736, AC-4 DUT 40706, HDS-3 DUT 40739
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	19 / 51 / 102.7
Date of measurements	30.6.2006
Measured by	Jari Jantunen

7.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-GEN as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.


CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

7.2. Bluetooth Test results

7.2.1 GFSK modulation, PRBS packet type

Channel 40 / 2442 MHz

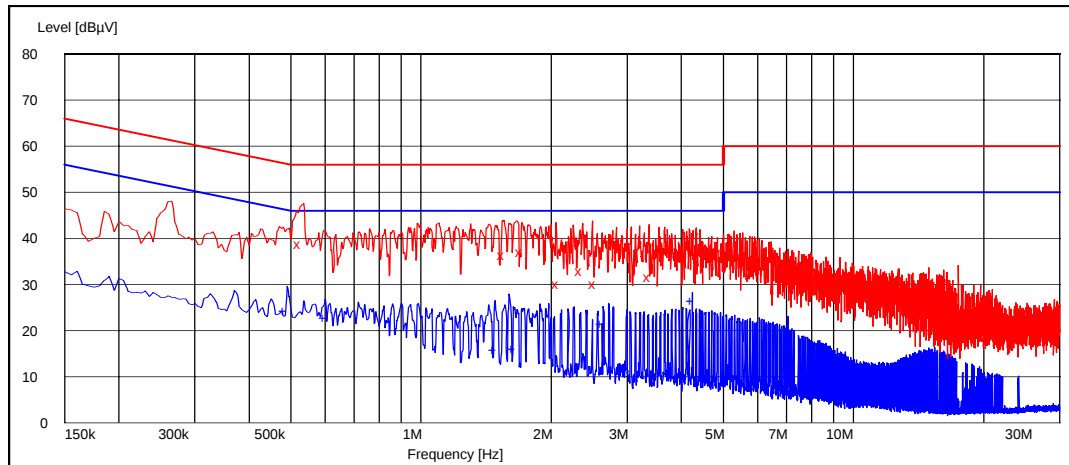

Quasi peak (RBW: 9 kHz)


Frequency [MHz]	U [dBμV]	Line	Result
0.525000	38.80	L1	PASSED
1.555000	36.50	L1	PASSED
1.710000	37.10	L1	PASSED
2.075000	30.20	L1	PASSED
2.345000	32.90	L1	PASSED
2.525000	30.10	L1	PASSED
3.375000	31.60	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.485000	24.20	L1	PASSED
0.600000	22.80	L1	PASSED
1.480000	15.90	N	PASSED
1.640000	16.00	N	PASSED
2.625000	21.40	L1	PASSED
4.240000	26.50	L1	PASSED

7.2.2 8DPSK modulation, PRBS packet type

Channel 39 / 2441 MHz

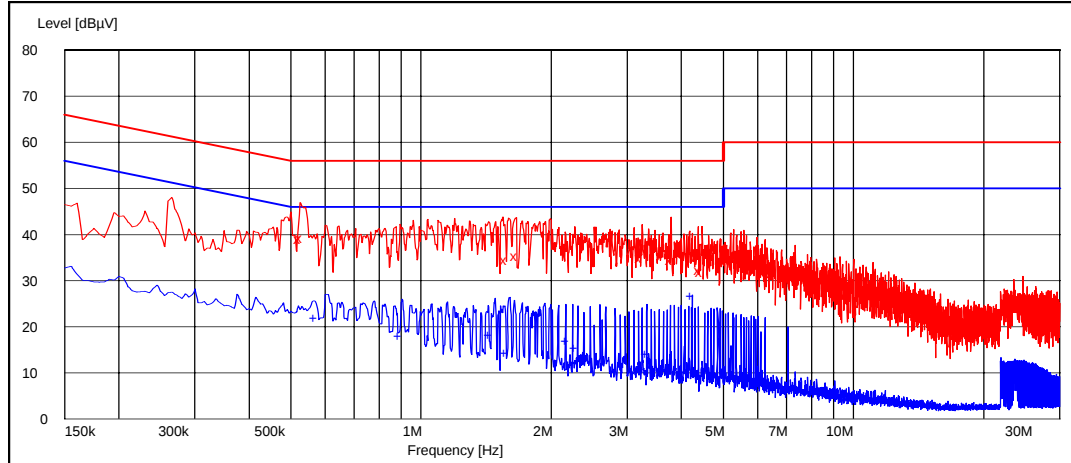

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.525000	39.10	L1	PASSED
0.530000	39.30	L1	PASSED
1.575000	34.40	L1	PASSED
1.665000	35.30	L1	PASSED
3.235000	34.80	L1	PASSED
3.795000	34.50	L1	PASSED
4.425000	32.30	L1	PASSED
4.450000	31.90	L1	PASSED

Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.570000	21.90	L1	PASSED
0.895000	18.00	N	PASSED
1.445000	18.10	L1	PASSED
1.575000	14.30	N	PASSED
2.180000	16.80	L1	PASSED
2.280000	15.40	L1	PASSED
3.340000	14.10	N	PASSED
4.240000	26.60	N	PASSED

8. 20 dB bandwidth (FCC §15.247(a)(1), RSS-210 A8.1 (1))

EUT with DUT number	RM-200 DUT 40734
Accessories with DUT numbers	SF-67R DUT 40738
Operation Voltage [V] / [Hz]	3.9 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 44-45 / 101.5-102.7
Date of measurements	29-30.6.2006
Measured by	Jari Jantunen

8.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for 20 dB bandwidth measurements


Limit [MHz]
N/A

8.2. Bluetooth Test results


8.2.1 GFSK modulation, PRBS packet type

Channel / f_c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	794.872	PASSED
40 / 2442	791.667	PASSED
78 / 2480	798.077	PASSED


Channel 0 / 2402 MHz

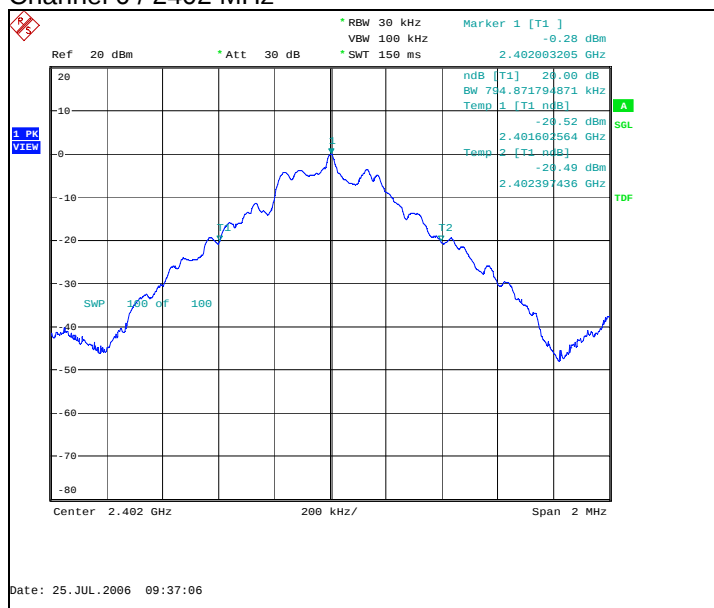

Channel 40 / 2442 MHz

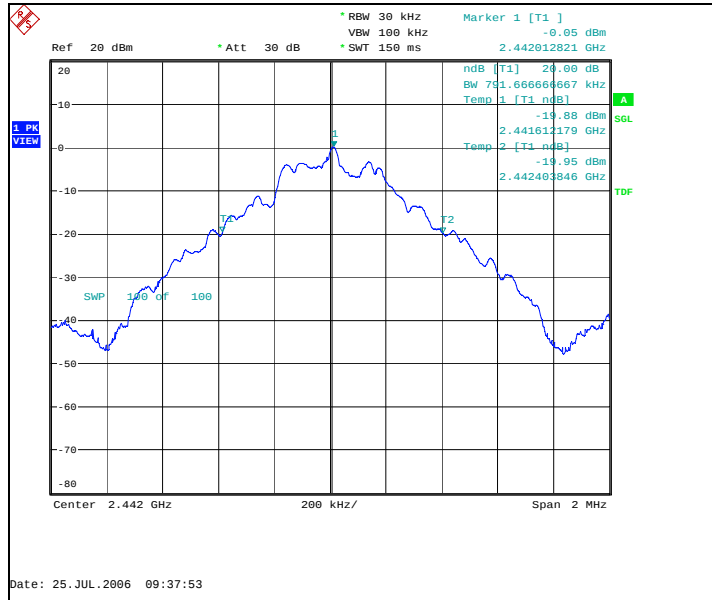


Channel 78 / 2480 MHz

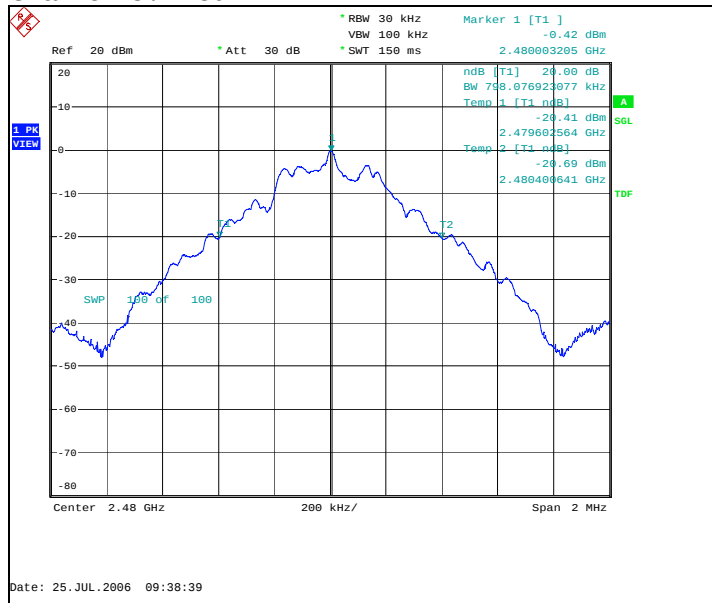


8.2.2 8DPSK modulation, PRBS packet type

Channel / f _c [MHz]	20 dB bandwidth [kHz]	Result
0 / 2402	1259.615	PASSED
40 / 2442	1259.615	PASSED
78 / 2480	1262.821	PASSED


Channel 0 / 2402 MHz

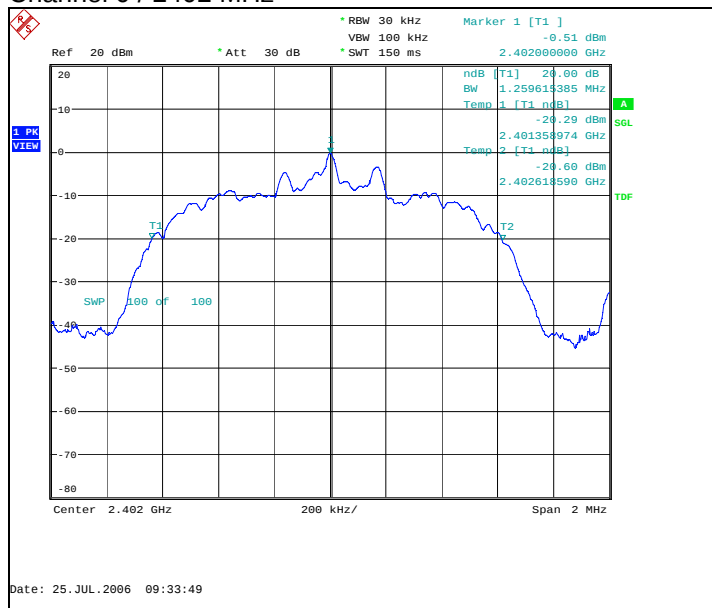

Channel 40 / 2442 MHz

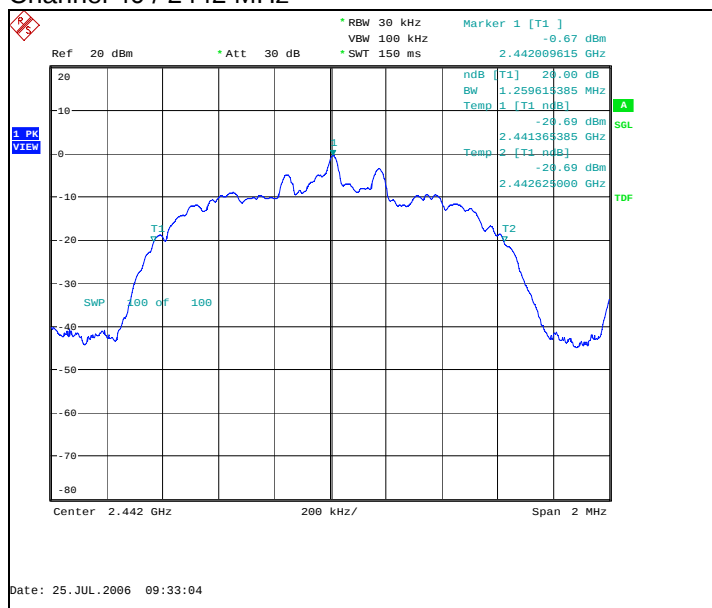

Channel 78 / 2480 MHz

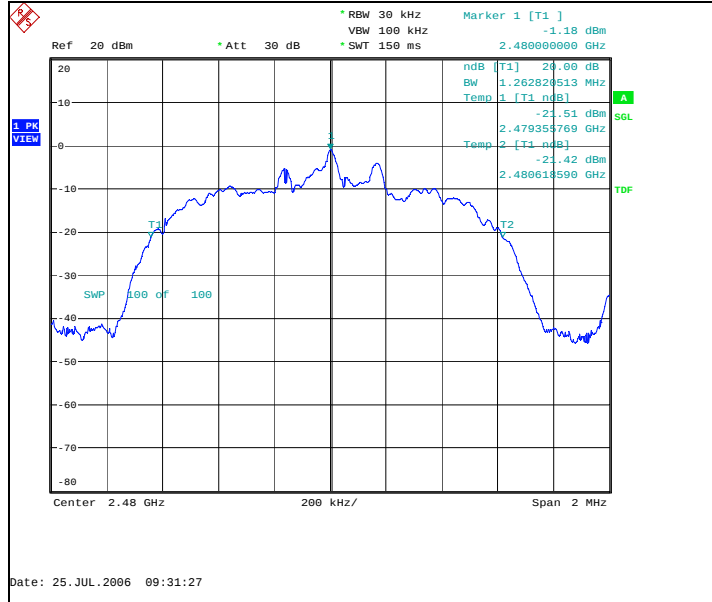

9. Carrier frequency separation (FCC §15.247(a)(1), RSS-210 A8.1 (2))

EUT with DUT number	RM-200 DUT 40734
Accessories with DUT numbers	SF-67R DUT 40738
Operation Voltage [V] / [Hz]	3.9 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 44-45 / 101.5-102.7
Date of measurements	29-30.6.2006
Measured by	Jari Jantunen

9.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for carrier frequency separation measurements


Limit [MHz]
≥ 0.025 or $2/3$ of the 20 dB bandwidth

9.2. Bluetooth Test results

9.2.1 GFSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1033.654	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

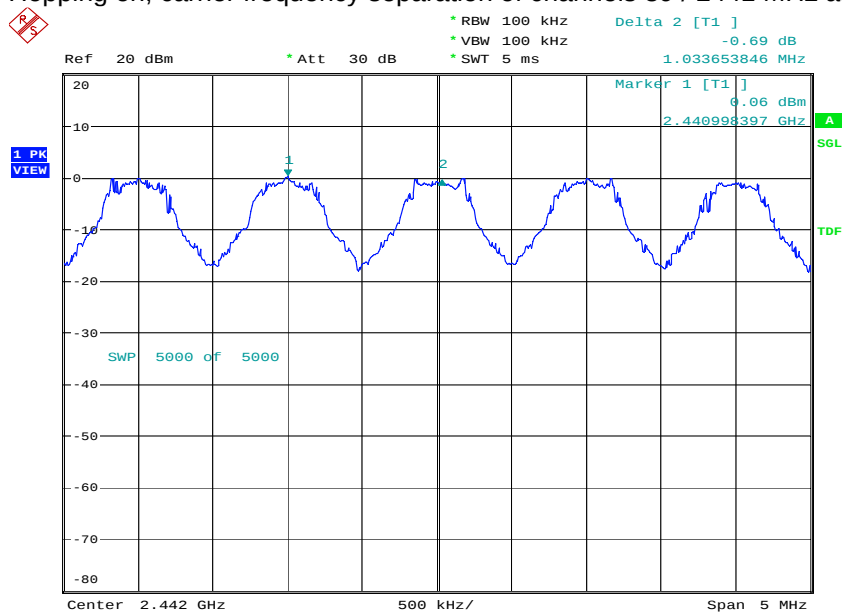


Date: 29.JUN.2006 12:23:42

9.2.2 8DPSK modulation, PRBS packet type

Carrier frequency separation [kHz]	Result
1009.615	PASSED

Hopping on, carrier frequency separation of channels 39 / 2441 MHz and 40 / 2442 MHz

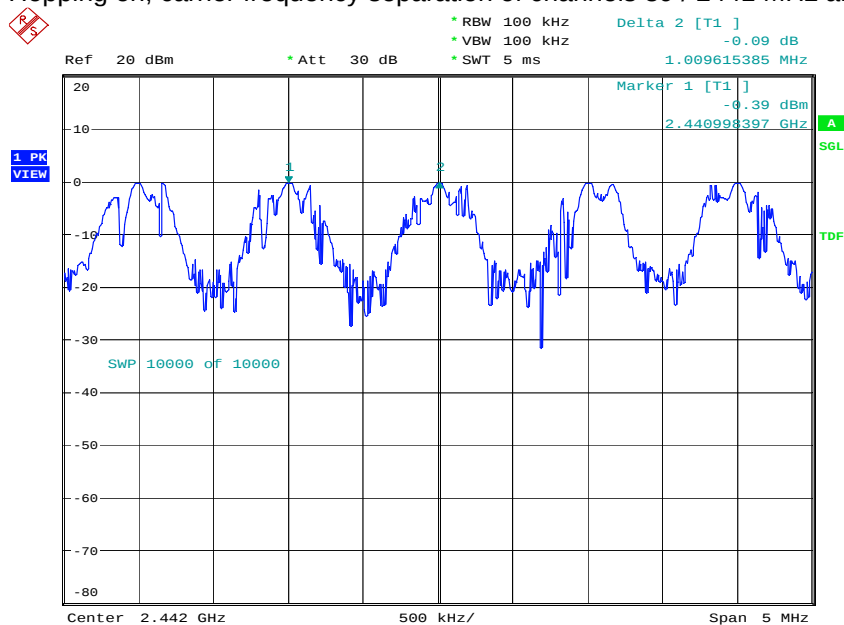

Date: 30.JUN.2006 12:29:45

10. Number of hopping frequencies (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-200 DUT 40734
Accessories with DUT numbers	SF-67R DUT 40738
Operation Voltage [V] / [Hz]	3.9 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 44-45 / 101.5-102.7
Date of measurements	29-30.6.2006
Measured by	Jari Jantunen

10.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210.

Limits for number of hopping frequencies measurements


Limit [number]
≥ 15

10.2. Bluetooth Test results

10.2.1 GFSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED

Hopping on, number of hopping frequencies

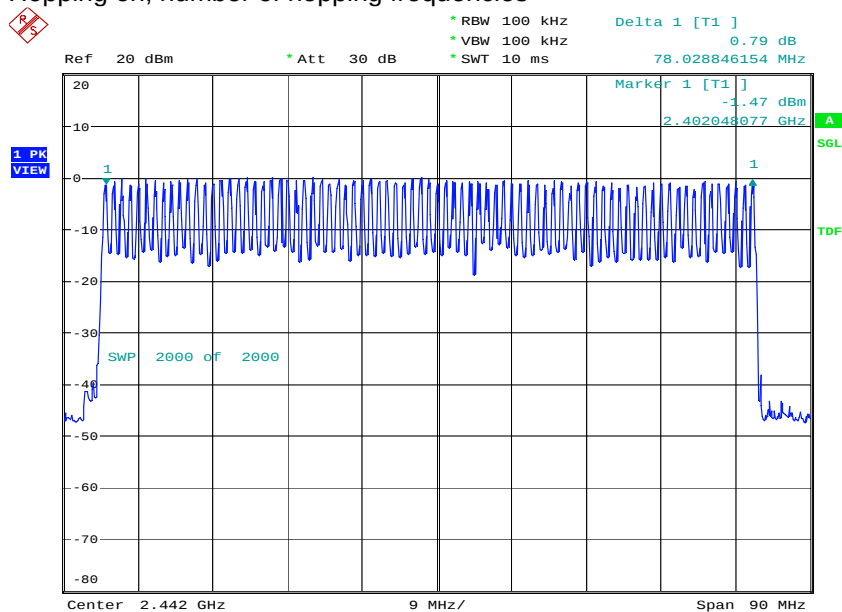


Date: 29.JUN.2006 12:19:00

10.2.2 8DPSK modulation, PRBS packet type

Measured number of hopping frequencies	Result
79	PASSED

Hopping on, number of hopping frequencies

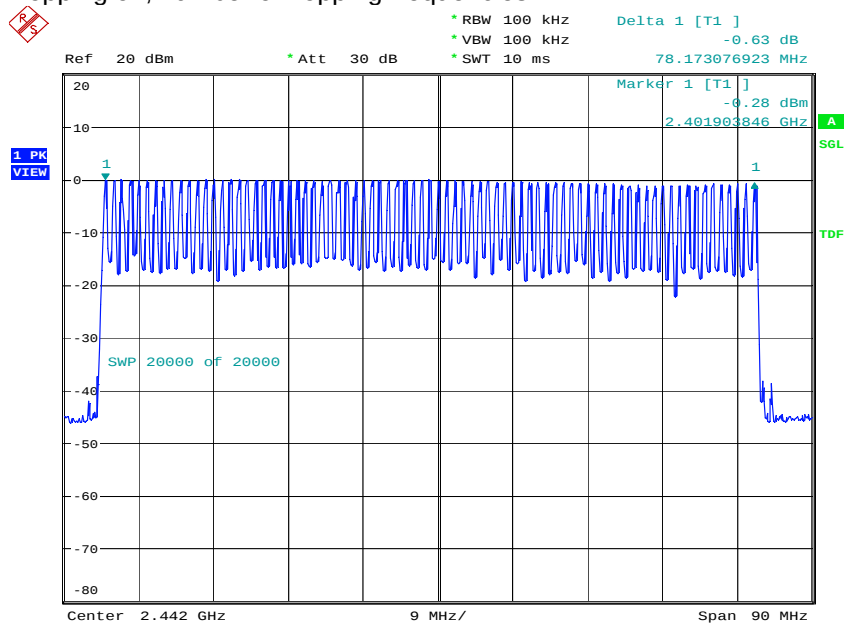

Date: 30.JUN.2006 12:18:34

11. Time of occupancy (FCC §15.247(a)(1)(iii), RSS-210 A8.1 (4))

EUT with DUT number	RM-200 DUT 40734
Accessories with DUT numbers	SF-67R DUT 40738
Operation Voltage [V] / [Hz]	3.9 VDC
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	21-22 / 44-45 / 101.5-102.7
Date of measurements	29-30.6.2006
Measured by	Jari Jantunen

11.1. Test method and limit

The measurement is made according to FCC rules part 15.247 and IC standard RSS-210 as follows:

The total time of occupancy is get by multiplying the measured number of transmissions occurred during 31.6 second period with the duration of one transmission.

Limits for time of occupancy measurements


Limit [s]
≤ 0.4

11.2. Bluetooth test results

11.2.1 GFSK modulation, PRBS packet type


Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
55	2967.949	0.163237	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

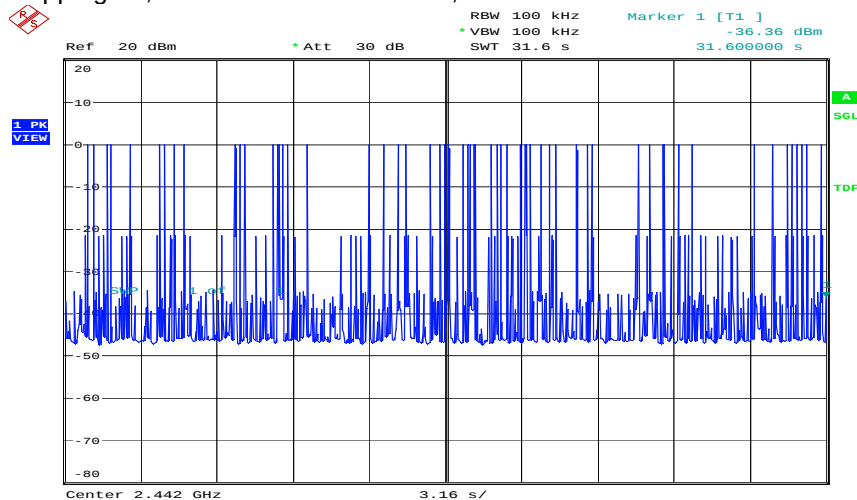

Date: 29.JUN.2006 12:20:13

Hopping on, duration of one transmission, channel 40 / 2442 MHz

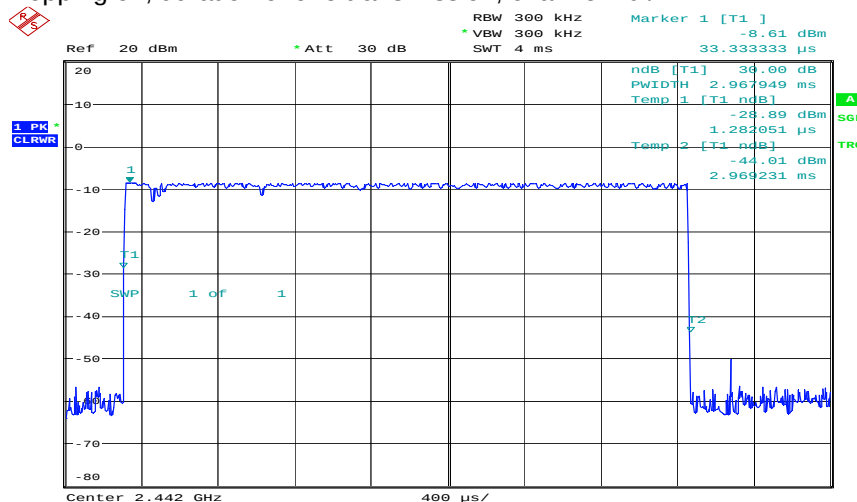


Date: 29.JUN.2006 12:20:23

11.2.2 8DPSK modulation, PRBS packet type


Measured number of transmissions	Duration of one transmission [μ s]	Time of occupancy [s]	Result
107	2967.949	0.317571	PASSED

Hopping on, number of transmissions, channel 40 / 2442 MHz

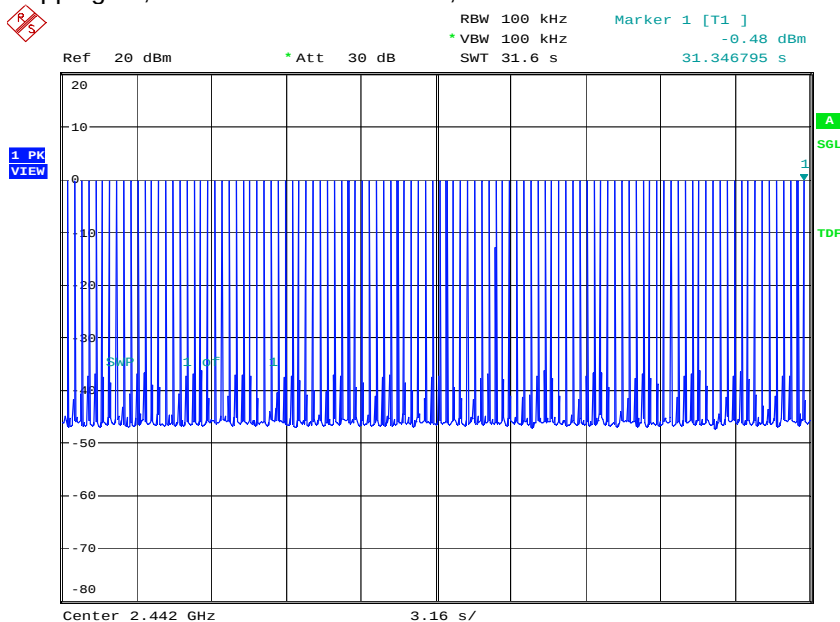

Date: 30.JUN.2006 12:33:22

Hopping on, duration of one transmission, channel 40 / 2442 MHz

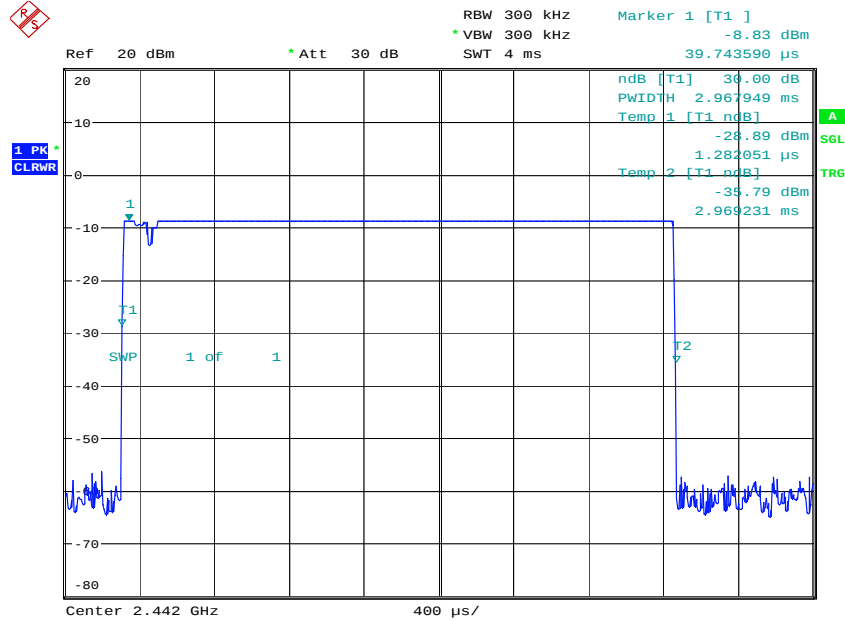

Date: 30.JUN.2006 12:33:32

12. Test Equipment

12.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	15C,22/24
TM37678	Radio communication tester	CMU-200	R&S	15C,22/24
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	15C,22/24
TM22901	Step attenuator 110dB	8496A	Agilent	15C,22/24
TM37499	Power splitter	11667A	Agilent	15C,22/24
	Temperature chamber	VT4002	Vötsch	15C,22/24
TM38112	DC power supply	6632A	Agilent	15C,22/24
TM38111	Multimeter	34401A	Agilent	15C,22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C
TM37773	Radio communication tester	CMU-200	R&S	15B,15C
TM38631	Signal generator	83640L	Agilent	15B,15C
TM38114	DC power supply	6632A	Agilent	15B,15C
TM22835	Multimeter	87	Fluke	15B,15C
TM30600	Pulse Limiter	ESH3-Z2	R&S	15B,15C
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15B,15C
TM30636	LISN 50 µH	L2-16/	PMM	15B,15C

12.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	15B,15C, 22/24
TM38845	EMI receiver	ESI 40	R&S	15B,15C, 22/24
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	15B,15C, 22/24
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	15B,15C, 22/24
TM37516	Biconilog antenna	HL562	R&S	15B,15C, 22/24
TM26496	Double ridged waveguide antenna	3115	EMCO	15B,15C, 22/24
TM39158	Horn antenna	3116	EMCO	15B,15C, 22/24
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	15B,15C, 22/24
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	15B,15C, 22/24
TM38631	Signal generator	83640L	Agilent	15B,15C, 22/24
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	15B,15C, 22/24
	High pass filter	WHK2010-10SS	Trilithic	15B,15C, 22/24
	Low pass filter	WLK1750-10SS	Trilithic	15B,15C, 22/24
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	15B,15C, 22/24
TM26500	Turntable	DS412	Deisel	15B,15C, 22/24
TM38842	Antenna mast controller	2090	EMCO	15B,15C, 22/24
TM38843	Antenna mast	2075	EMCO	15B,15C, 22/24
TM38114	DC power supply	6632A	Agilent	15B,15C, 22/24
TM22835	Multimeter	87	Fluke	15B,15C, 22/24