

Report No.: T201222W02-RP5

UNII-2c IEEE 802.11ac VHT80 mode- chain 0

Low CH



High CH



138 CH (U-NII 2C)



138 CH (U-NII 3)



Report No.: T201222W02-RP5

UNII-2c IEEE 802.11a mode- chain 1


Low CH



Mid CH



High CH

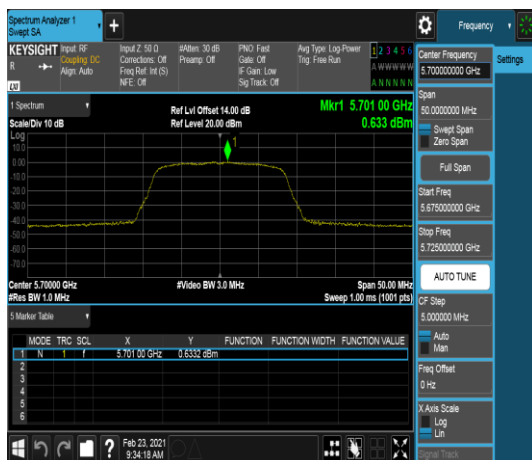

144 CH (U-NII 2C)



144 CH (U-NII 3)



Report No.: T201222W02-RP5

UNII-2c IEEE 802.11n HT20 mode- chain 1

Low CH



Mid CH



High CH



144 CH (U-NII 2C)



144 CH (U-NII 3)



UNII-2c IEEE 802.11n HT40 mode- chain 1

Low CH



Mid CH



High CH



142 CH (U-NII 2C)



142 CH (U-NII 3)



Report No.: T201222W02-RP5

UNII-2c IEEE 802.11ac VHT80 mode- chain 1

Low CH



High CH



138 CH (U-NII 2C)



138 CH (U-NII 3)



Report No.: T201222W02-RP5

4.5 RADIATION BANDEDGE AND SPURIOUS EMISSION

4.5.1 Test Limit

According to §15.407, §15.209 and §15.205,
According to RSS-247 section 6.2.1.2 and section 6.2.4.2

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

RSS-Gen Table 3 and Table 5 – General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz ^(Note)

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Note: Measurements for compliance with the limits in table 3 may be performed at distances other than 3 metres, in accordance with Section 6.6.

RSS-Gen Table 6: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement Distance (m)
9-490 kHz ^{Note}	6.37/F (F in kHz)	300
490-1,705 kHz	63.7/F (F in kHz)	30
1.705-30 MHz	0.08	30

Note: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector..

UNII-1 :

For transmitters operating in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, any unwanted emissions that fall into the band 5250-5350 MHz must be 26 dBc, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth, above 5.25 GHz. Otherwise, the transmission is considered as intentional and the devices shall implement dynamic frequency selection (DFS) and transmitter power control (TPC) as per the requirements for the band 5250-5350 MHz

UNII-2a and 2c :

For devices with operating frequencies in the band 5250-5350 MHz but having a channel bandwidth that overlaps the band 5150-5250 MHz, the devices' unwanted emission shall not exceed -27 dBm/MHz e.i.r.p. outside the band 5150-5350 MHz and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device shall be labelled "for indoor use only." Emissions outside the band 5470-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

UNII-3:

For the band 5725-5850 MHz, emissions at frequencies from the band edges to 10 MHz above or below the band edges shall not exceed -17 dBm/MHz e.i.r.p.

For emissions at frequencies more than 10 MHz above or below the band edges, the emissions power shall not exceed -27 dBm/MHz

Report No.: T201222W02-RP5


4.5.2 Test Procedure

Test method Refer as KDB 789033 D02.


1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)
5. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW $\geq 3 \times$ RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW ≥ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - 'If Duty Cycle $\geq 98\%$, VBW=10Hz.
 - 'If Duty Cycle $< 98\%$, VBW=1/T.


4.5.3 Test Setup

9kHz ~ 30MHz

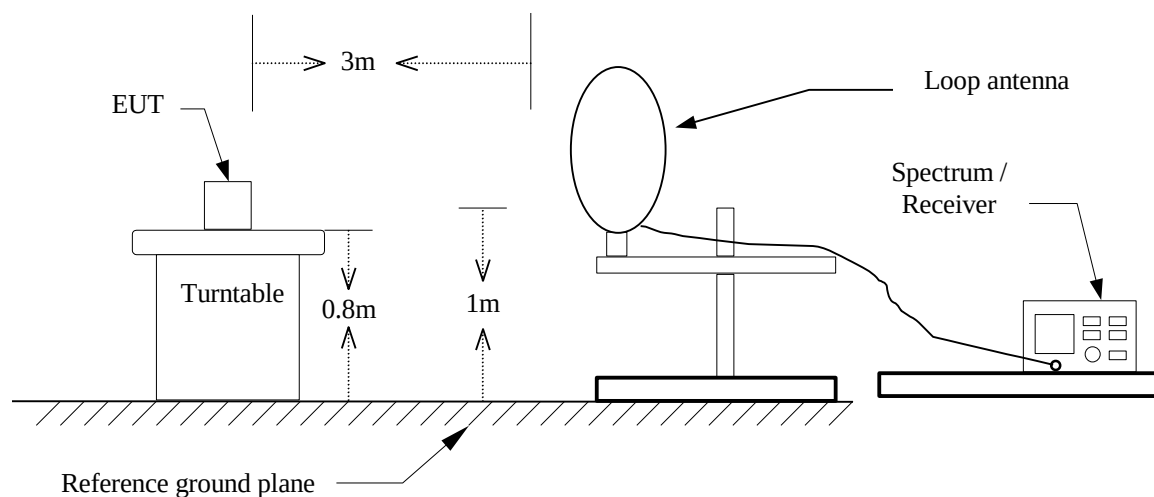

30MHz ~ 1GHz

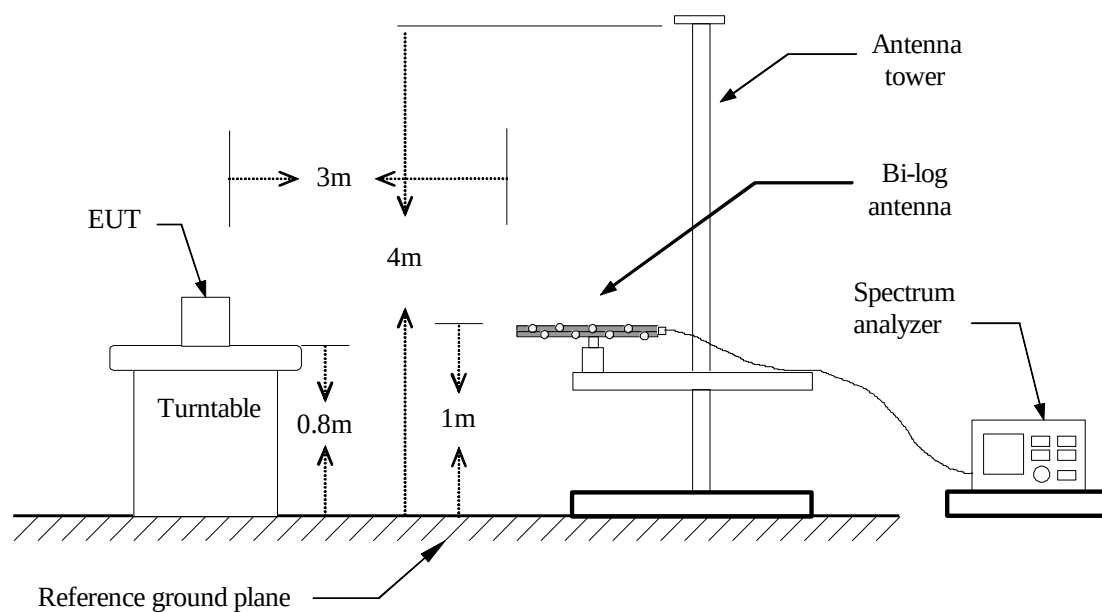


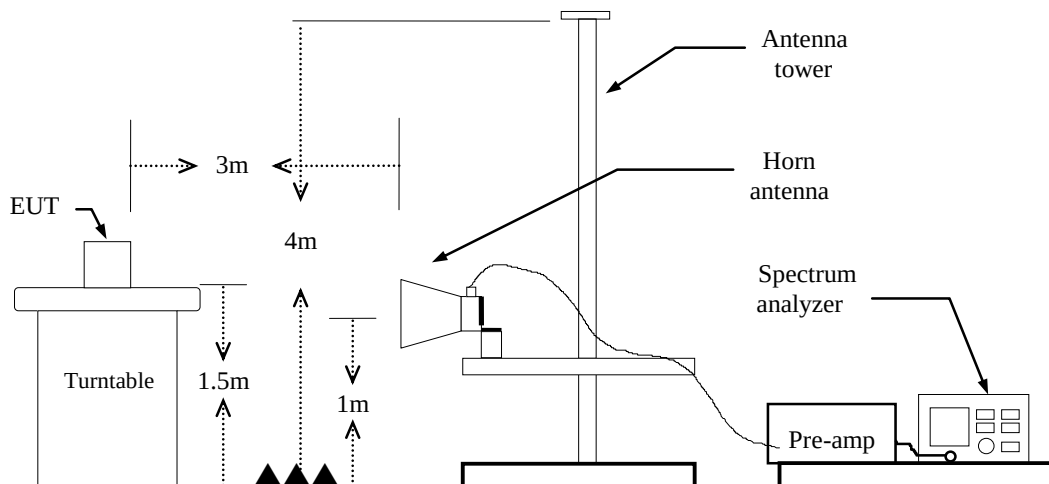Above 1 GHz

4.5.4 Test Result


Band Edge Test Data**Test Data for UNII-2a**

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

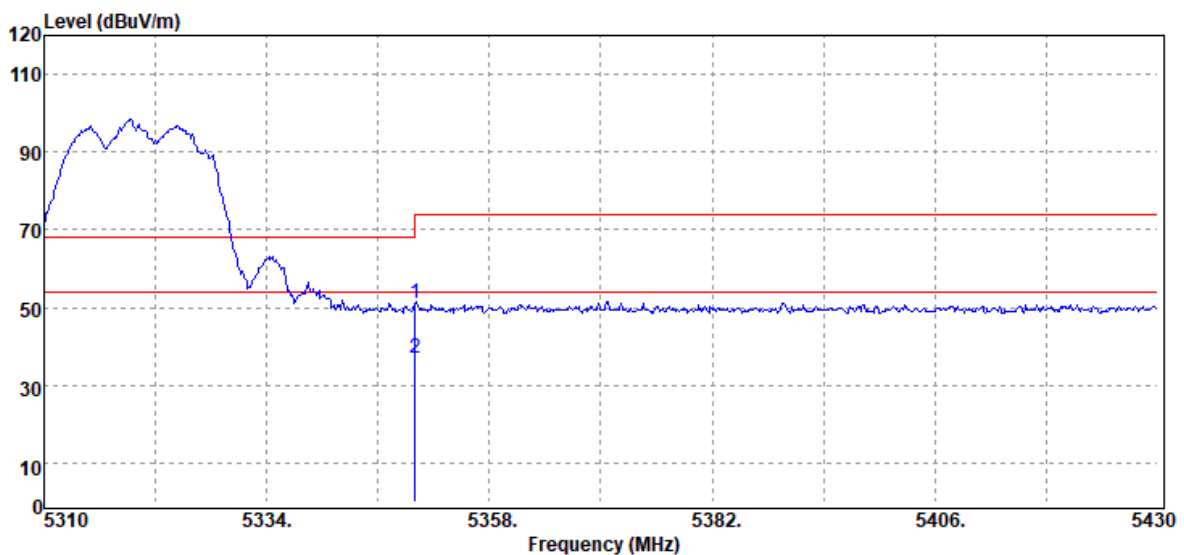


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5350.00	Peak	43.37	7.85	51.22	74.00	-22.78
5350.00	Average	29.25	7.85	37.10	54.00	-16.90

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

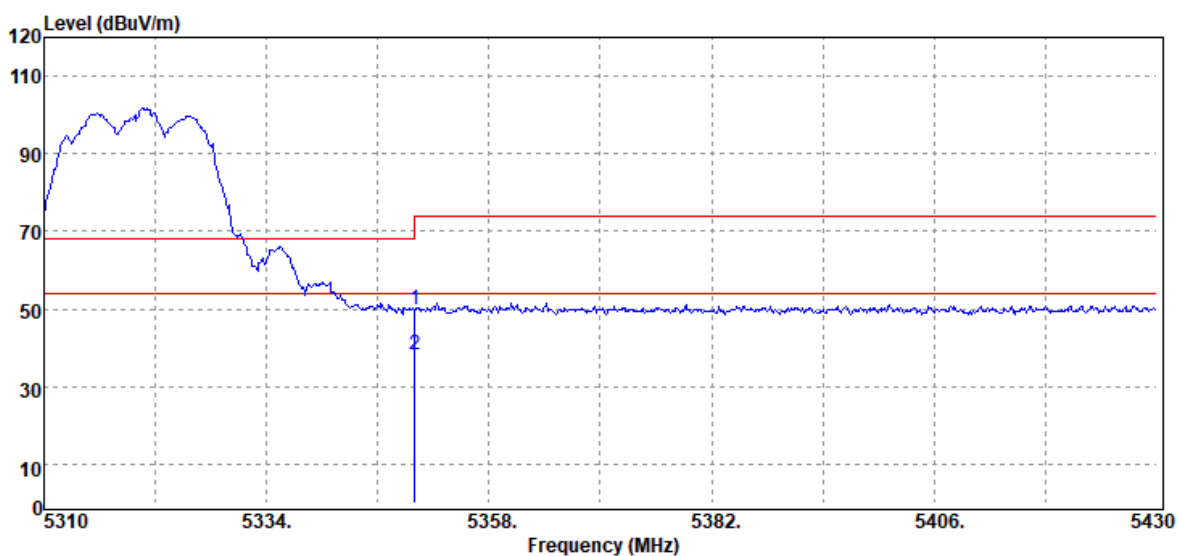


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5350.00	Peak	41.79	7.85	49.64	74.00	-24.36
5350.00	Average	30.25	7.85	38.10	54.00	-15.90

Test Mode	IEEE 802.11n 20 MHz / 5320MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

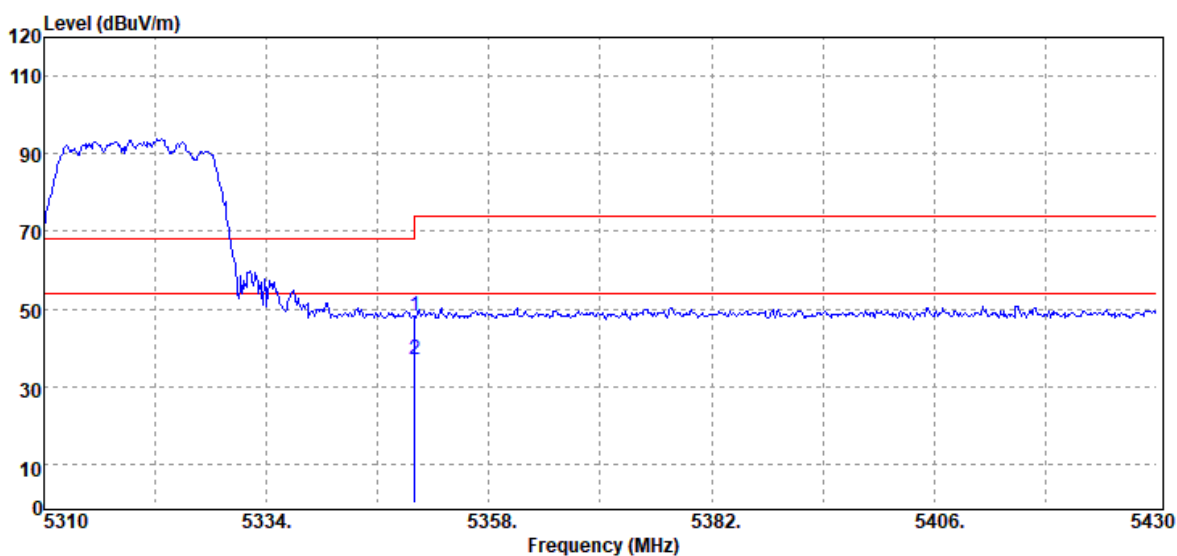

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5350.00	Peak	40.21	7.85	48.06	74.00	-25.94
5350.00	Average	29.18	7.85	37.03	54.00	-16.97


Test Mode	IEEE 802.11n 20 MHz / 5320MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

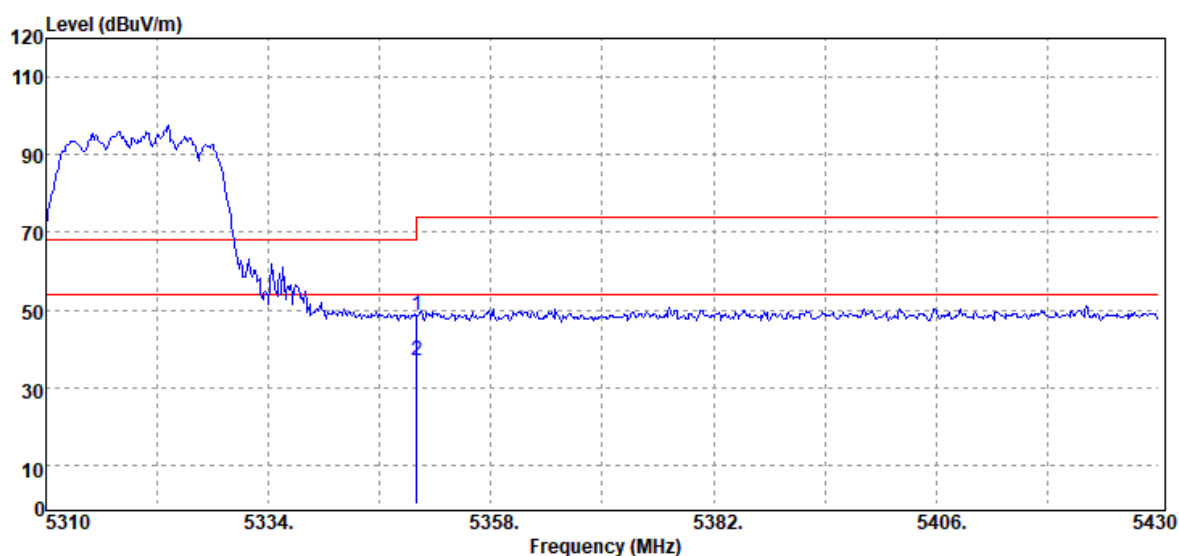

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5350.00	Peak	40.72	7.85	48.57	74.00	-25.43
5350.00	Average	29.21	7.85	37.06	54.00	-16.94


Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5310MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

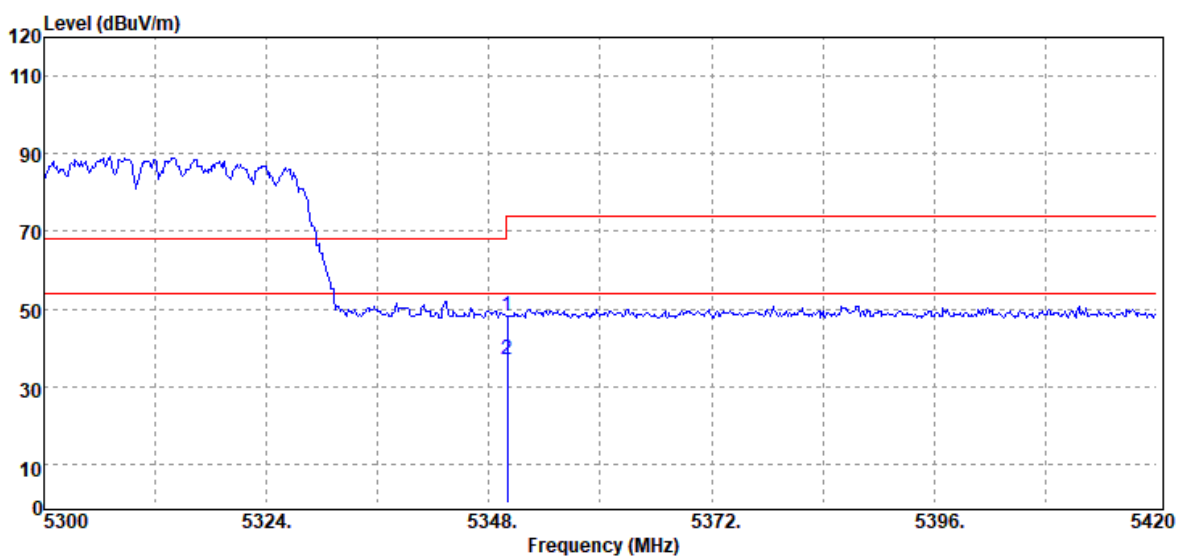


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5350.00	Peak	40.44	7.85	48.29	74.00	-25.71
5350.00	Average	29.01	7.85	36.86	54.00	-17.14

Test Mode	IEEE 802.11n 40 MHz / 5310MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

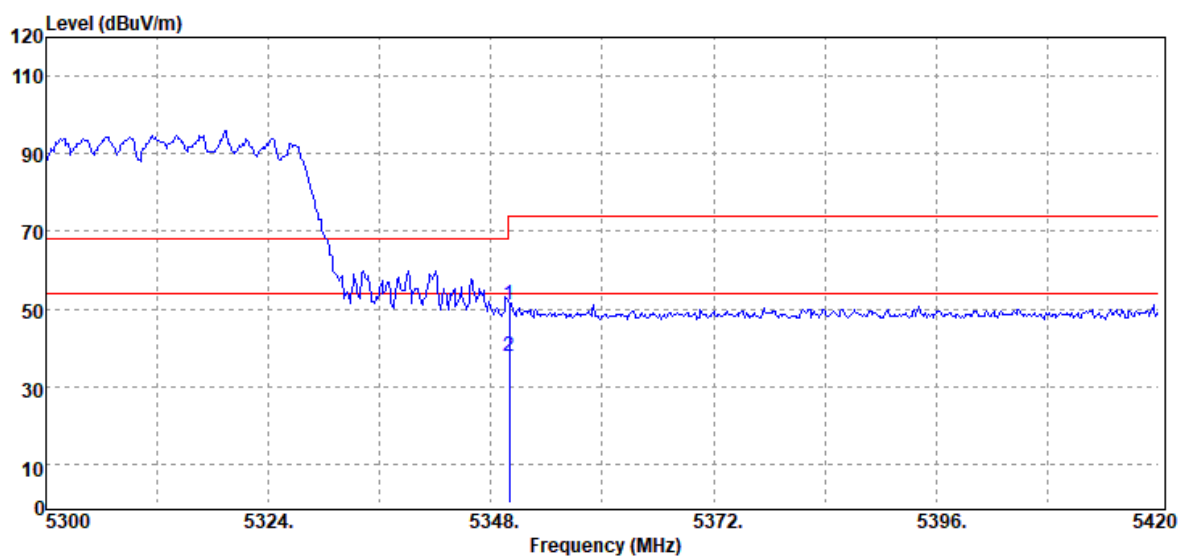


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5350.00	Peak	43.32	7.85	51.17	74.00	-22.83
5350.00	Average	30.03	7.85	37.88	54.00	-16.12

Test Mode	IEEE 802.11ac VHT80 / 5290MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

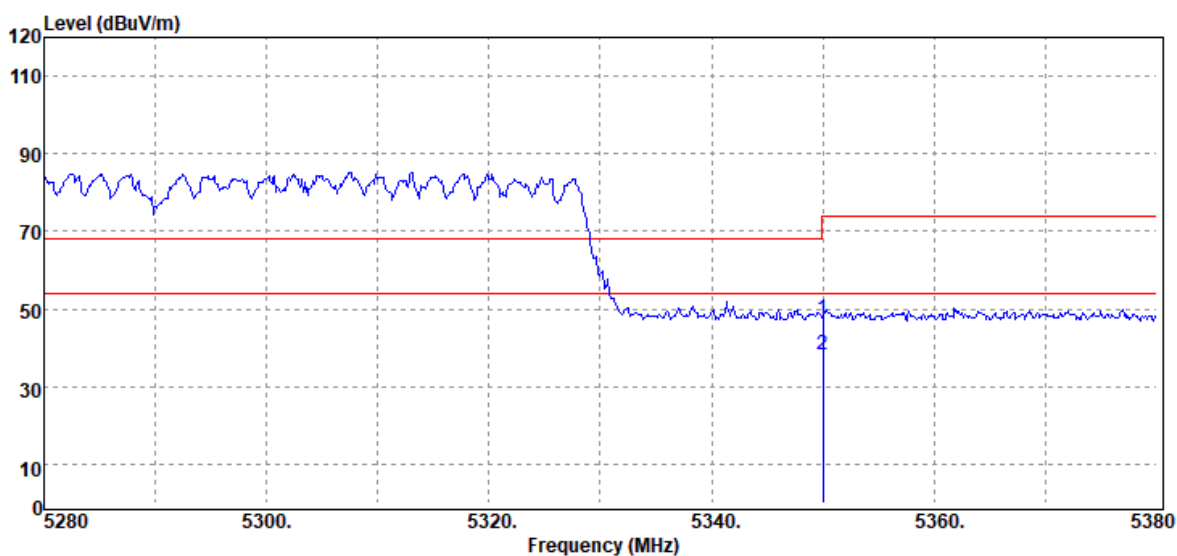

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5350.00	Peak	39.51	7.85	47.36	74.00	-26.64
5350.00	Average	30.29	7.85	38.14	54.00	-15.86

Test Mode	IEEE 802.11ac VHT80 / 5290MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

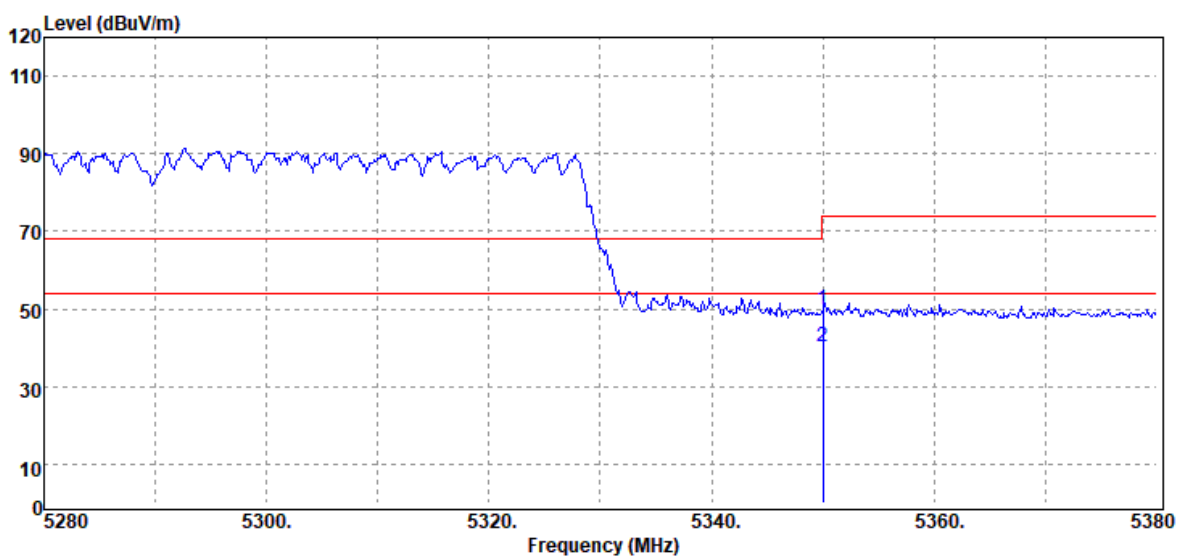


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5350.00	Peak	42.04	7.85	49.89	74.00	-24.11
5350.00	Average	32.28	7.85	40.13	54.00	-13.87

Report No.: T201222W02-RP5

Test Data for UNII-2c


Test Mode	IEEE 802.11a / 5500MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

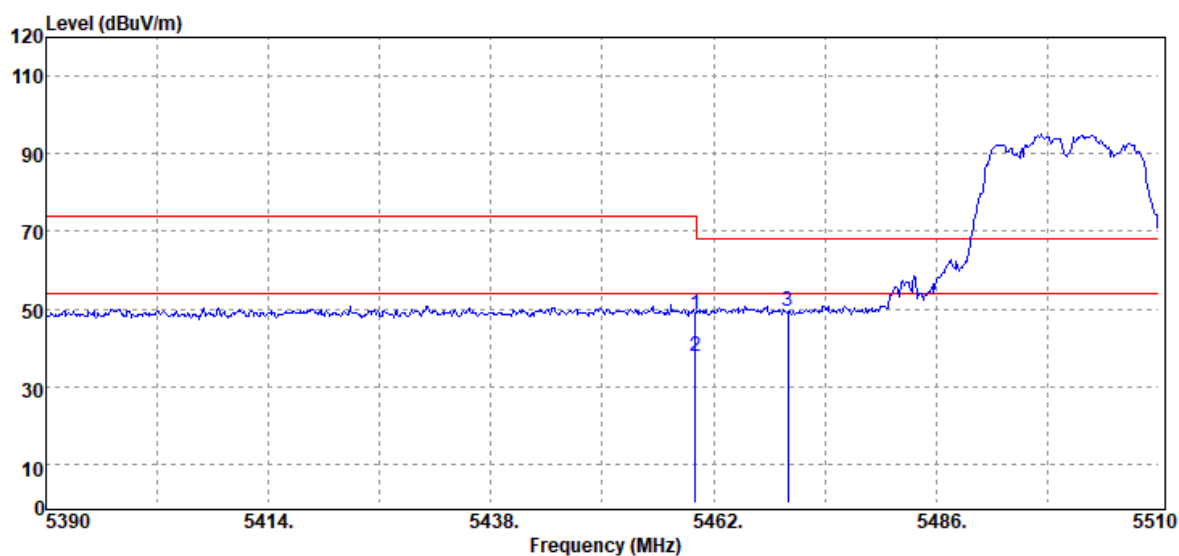

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Peak	40.34	8.08	48.42	74.00	-25.58
5460.00	Average	29.63	8.08	37.71	54.00	-16.29
5470.00	Peak	41.27	8.12	49.39	68.20	-18.81

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11a / 5500MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

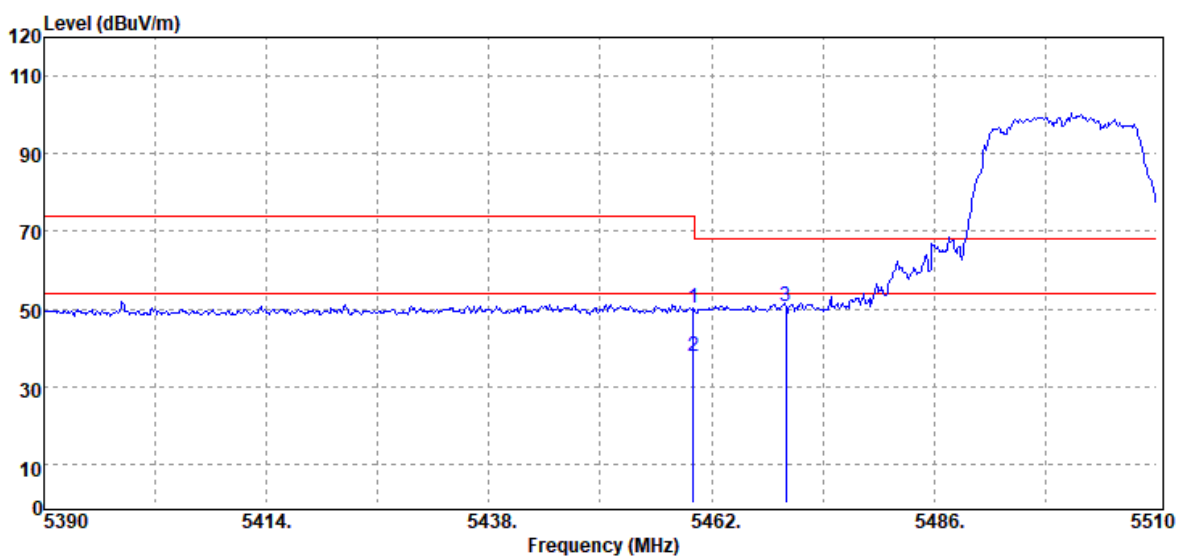


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5460.00	Peak	42.18	8.08	50.26	74.00	-23.74
5460.00	Average	29.77	8.08	37.85	54.00	-16.15
5470.00	Peak	42.63	8.12	50.75	68.20	-17.45

Report No.: T201222W02-RP5

Page: 89 / 148

Rev.: 01

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

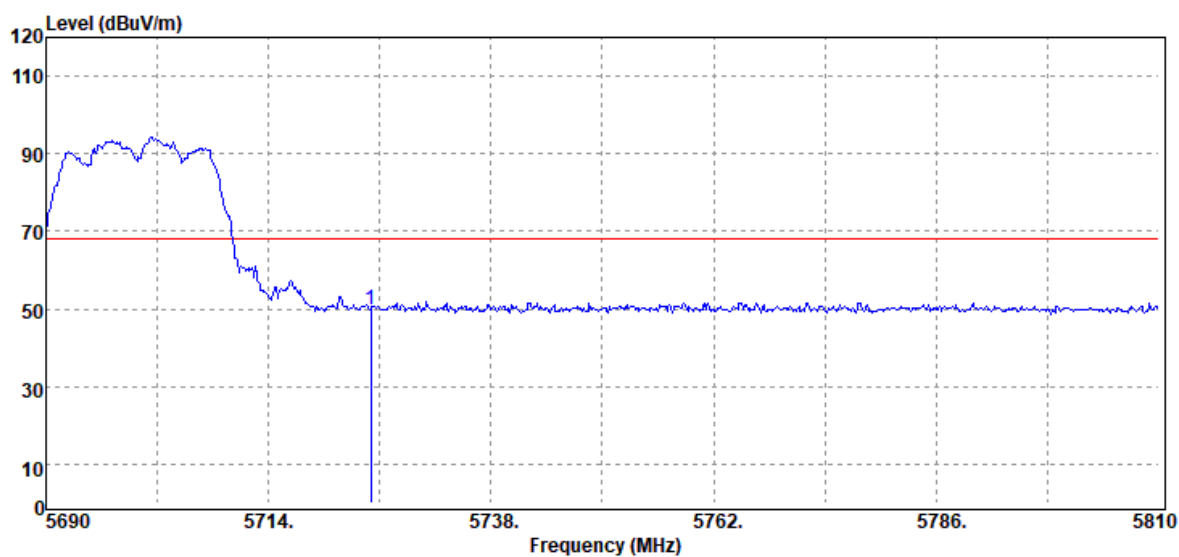


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5725.00	Peak	40.43	9.29	49.72	68.20	-18.48

Report No.: T201222W02-RP5

Page: 90 / 148


Rev.: 01

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

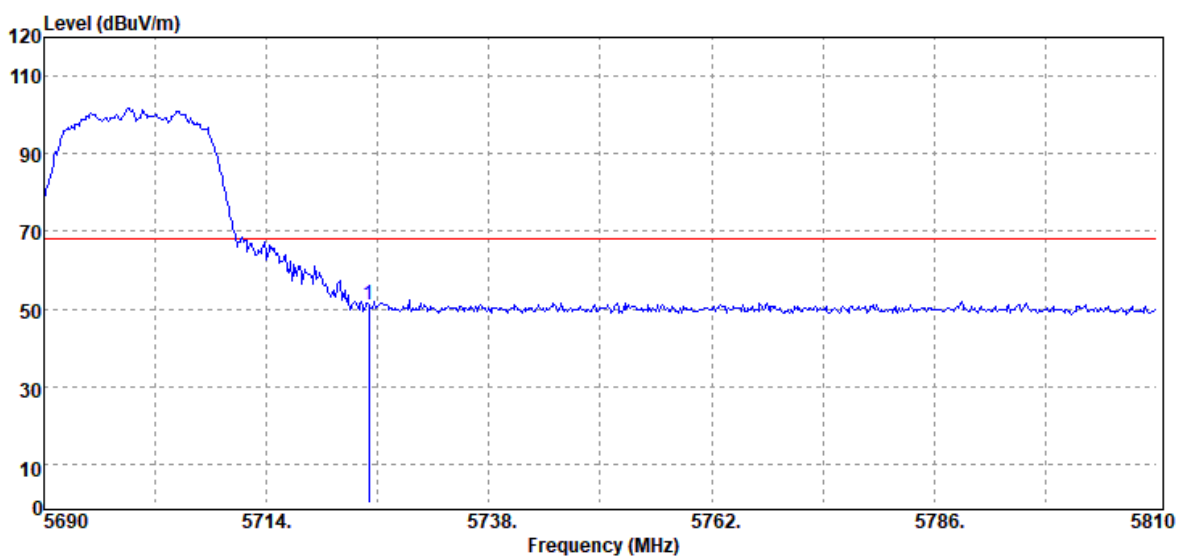

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5725.00	Peak	41.94	9.29	51.23	68.20	-16.97


Test Mode	IEEE 802.11n 20 MHz / 5500MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

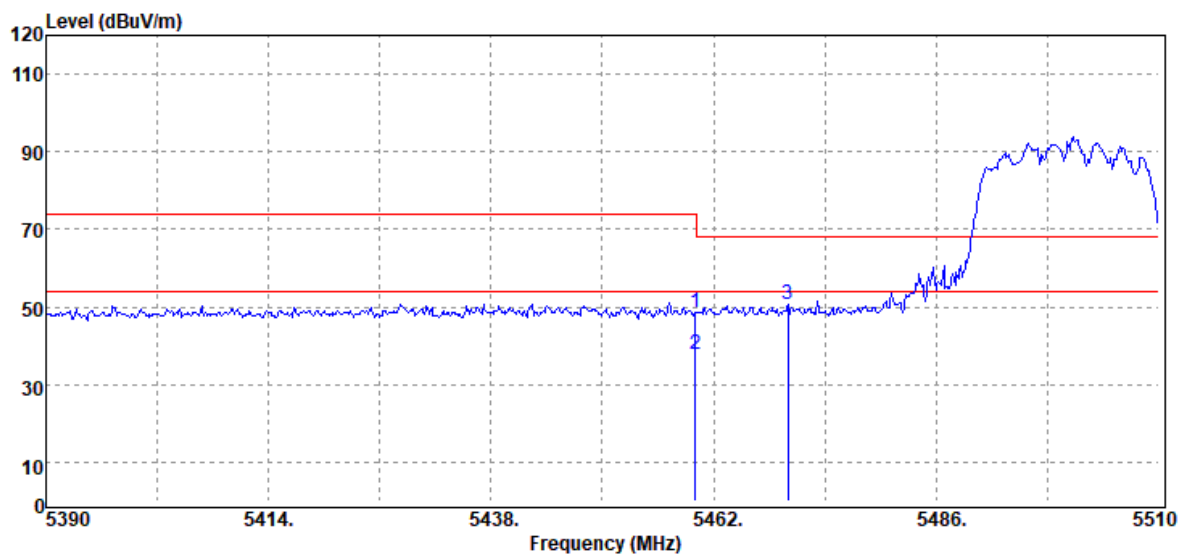

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Peak	40.45	8.08	48.53	74.00	-25.47
5460.00	Average	29.54	8.08	37.62	54.00	-16.38
5470.00	Peak	42.53	8.12	50.65	68.20	-17.55


Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5500MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

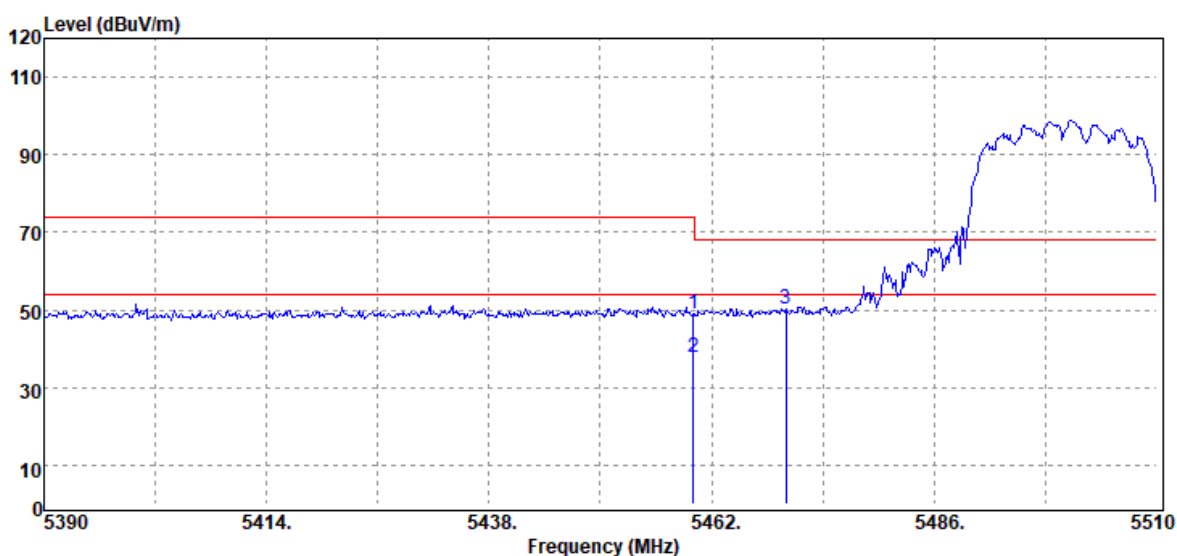

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5460.00	Peak	40.97	8.08	49.05	74.00	-24.95
5460.00	Average	29.71	8.08	37.79	54.00	-16.21
5470.00	Peak	42.23	8.12	50.35	68.20	-17.85

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temperature	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

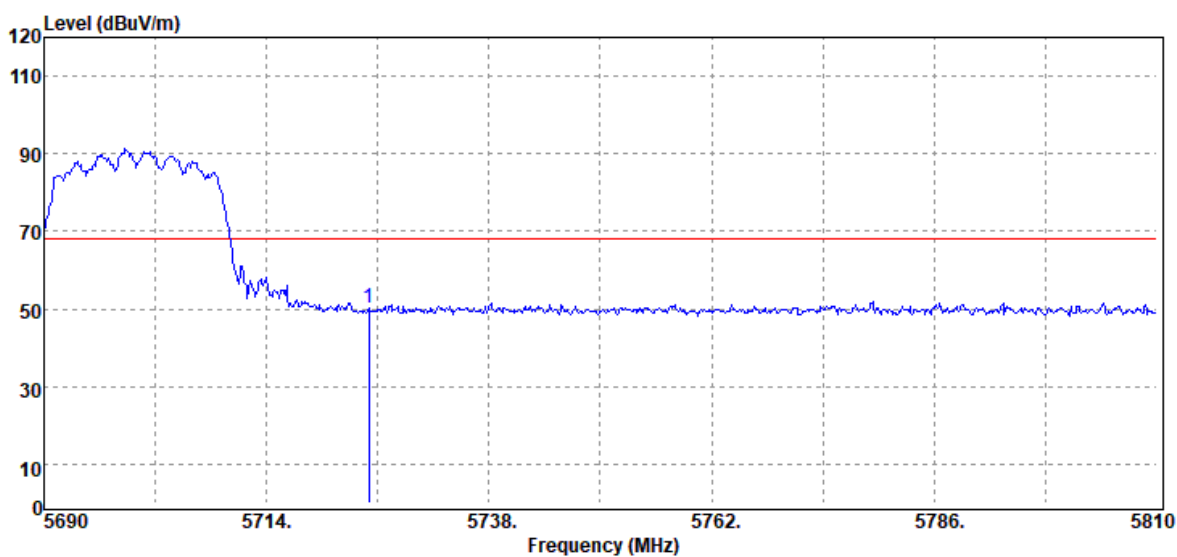


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5725.00	Peak	40.92	9.29	50.21	68.20	-17.99

Report No.: T201222W02-RP5

Page: 94 / 148

Rev.: 01


Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temperature	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

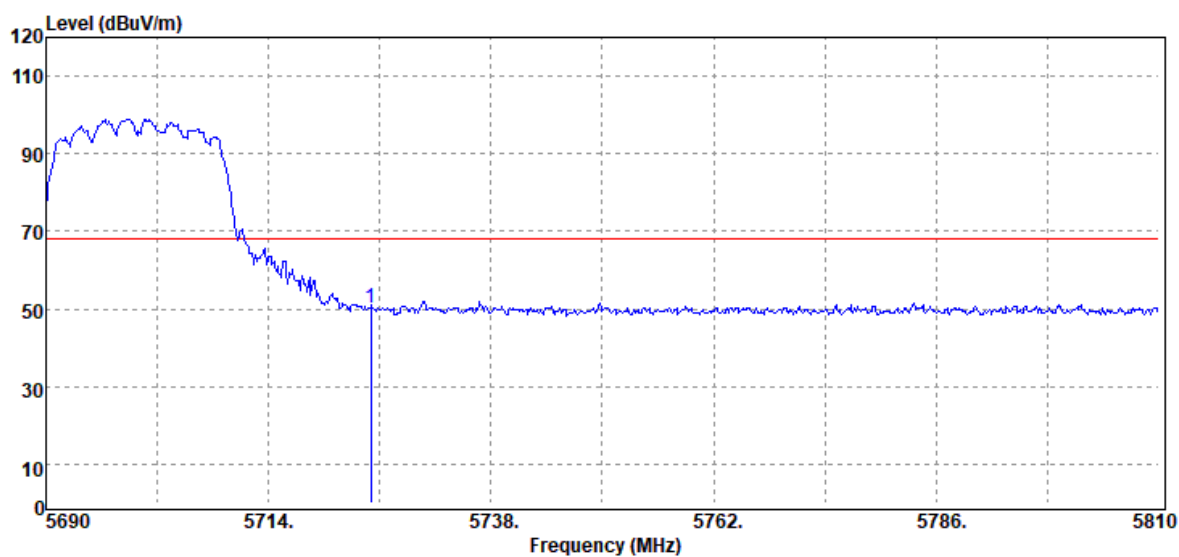

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5725.00	Peak	40.75	9.29	50.04	68.20	-18.16

Report No.: T201222W02-RP5


Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

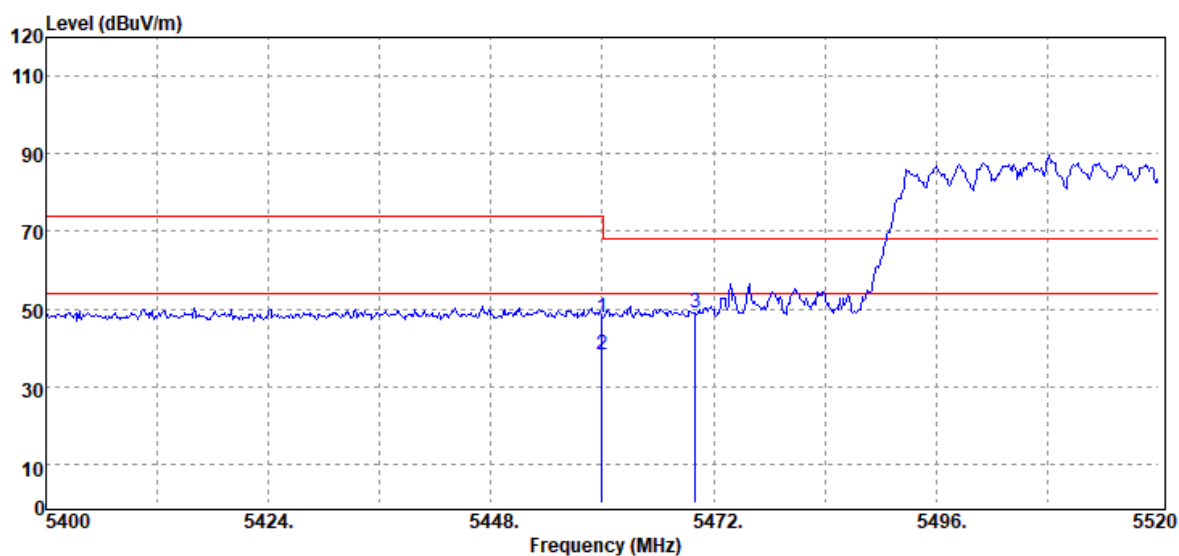

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Peak	39.56	8.08	47.64	74.00	-26.36
5460.00	Average	30.16	8.08	38.24	54.00	-15.76
5470.00	Peak	40.83	8.12	48.95	68.20	-19.25


Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

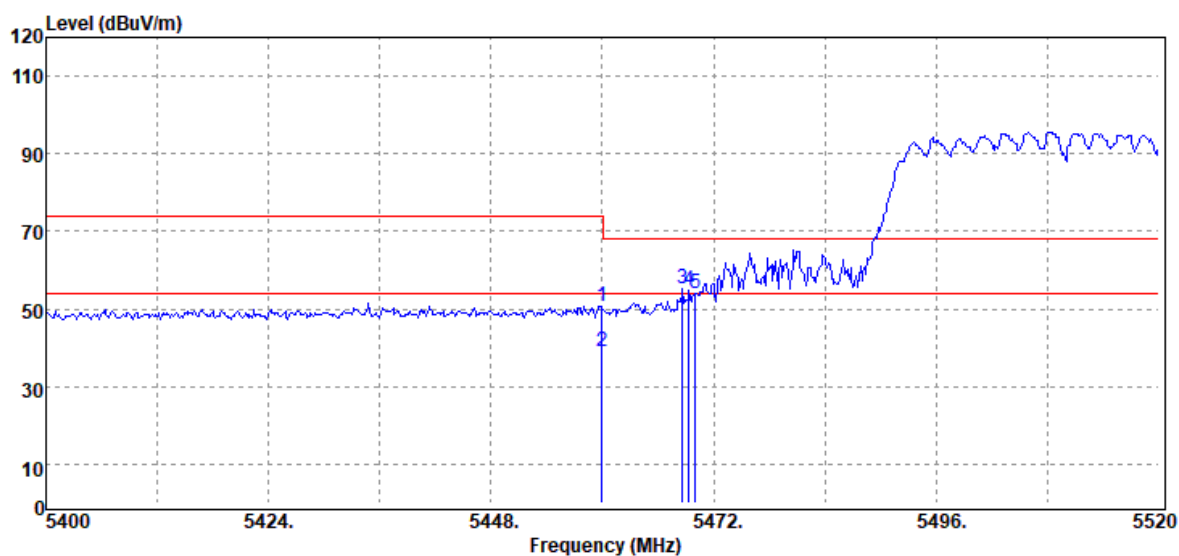

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Peak	42.37	8.08	50.45	74.00	-23.55
5460.00	Average	30.93	8.08	39.01	54.00	-14.99
5468.64	Peak	46.91	8.12	55.03	68.20	-13.17
5469.36	Peak	46.55	8.12	54.67	68.20	-13.53
5470.00	Peak	45.70	8.12	53.82	68.20	-14.38


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

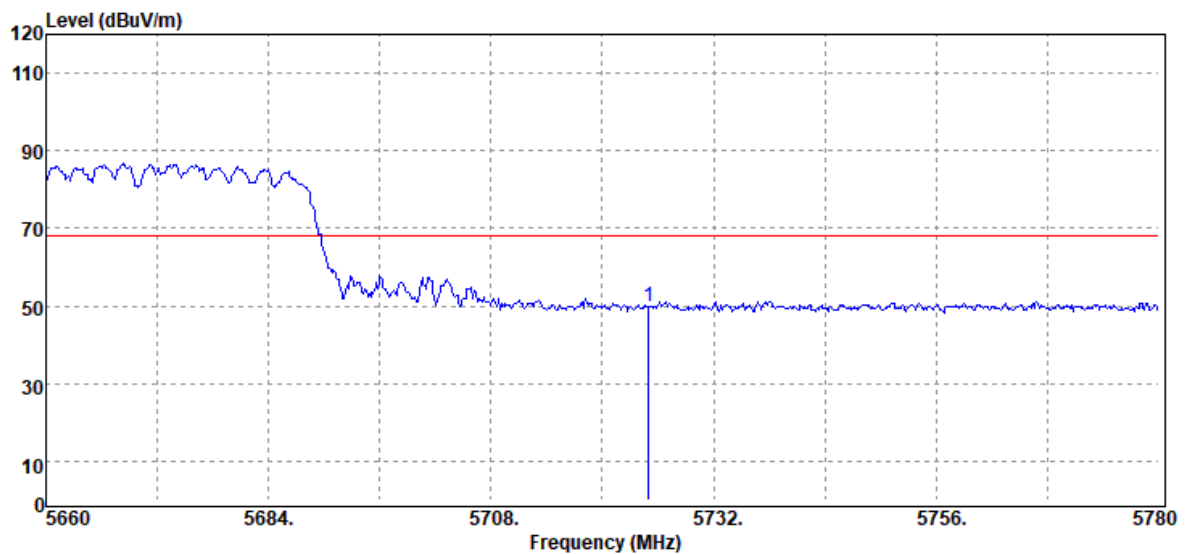

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5725.00	Peak	40.66	9.29	49.95	68.20	-18.25

Report No.: T201222W02-RP5


Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

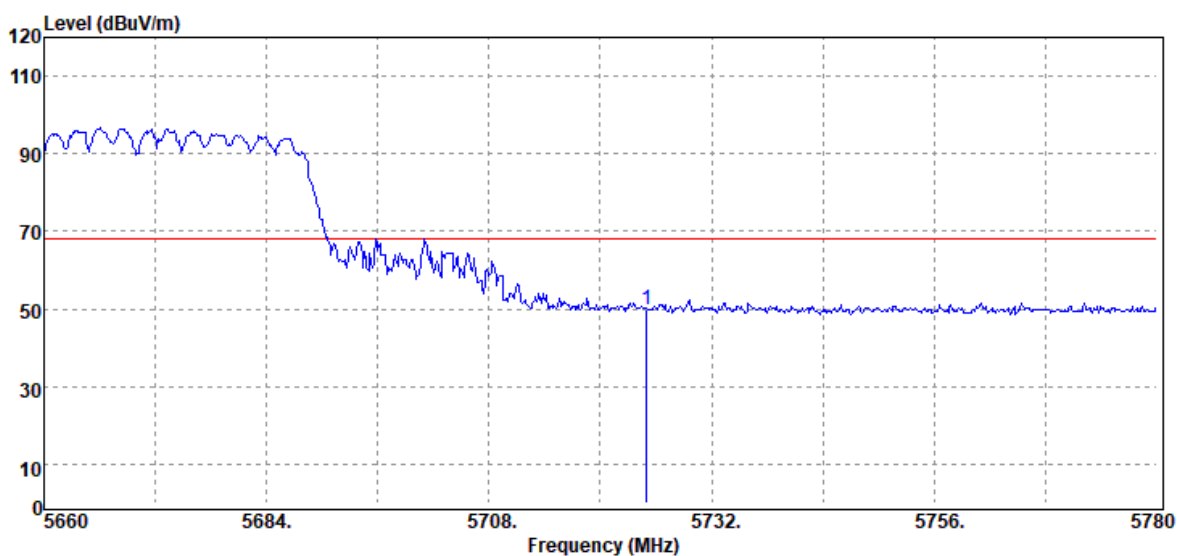

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5725.00	Peak	40.56	9.29	49.85	68.20	-18.35

Report No.: T201222W02-RP5


Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak / Average		

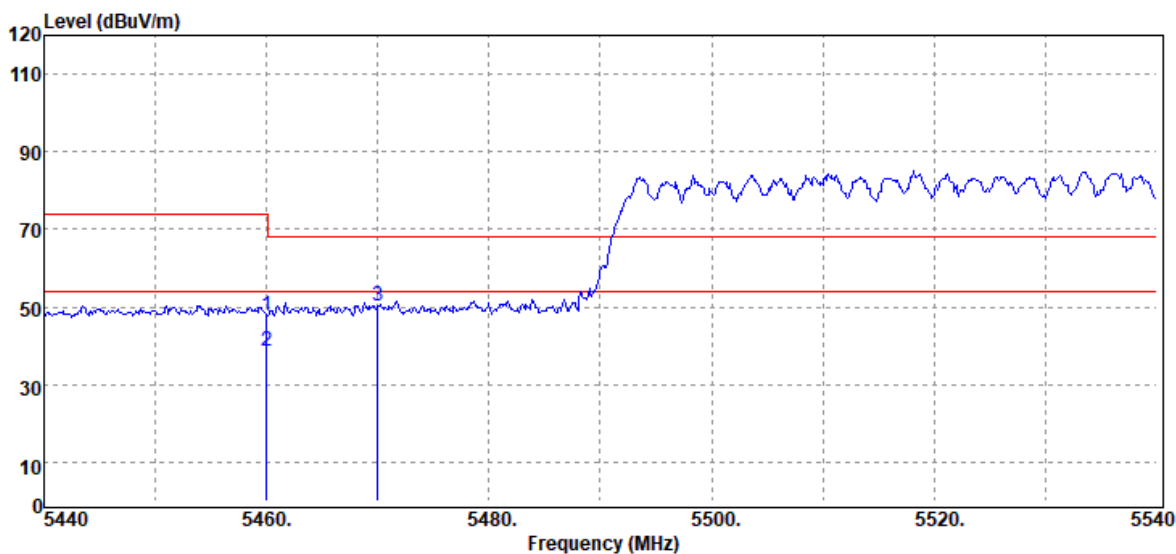

Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
5460.00	Peak	39.75	8.08	47.83	74.00	-26.17
5460.00	Average	30.59	8.08	38.67	54.00	-15.33
5470.00	Peak	42.20	8.12	50.32	68.20	-17.88

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Band Edge	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak / Average		

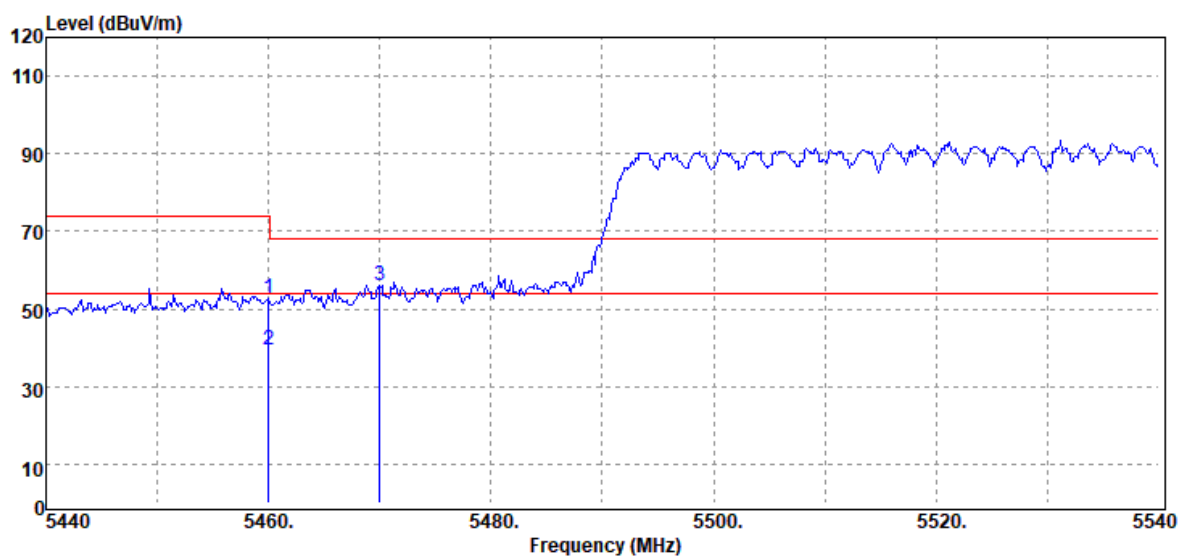


Frequency (MHz)	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
5460.00	Peak	44.72	8.08	52.80	74.00	-21.20
5460.00	Average	31.41	8.08	39.49	54.00	-14.51
5470.00	Peak	47.92	8.12	56.04	68.20	-12.16

Report No.: T201222W02-RP5

Below 1G Test Data


Test Mode	Mode 1	Temp/Hum	21.5(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	January 6, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

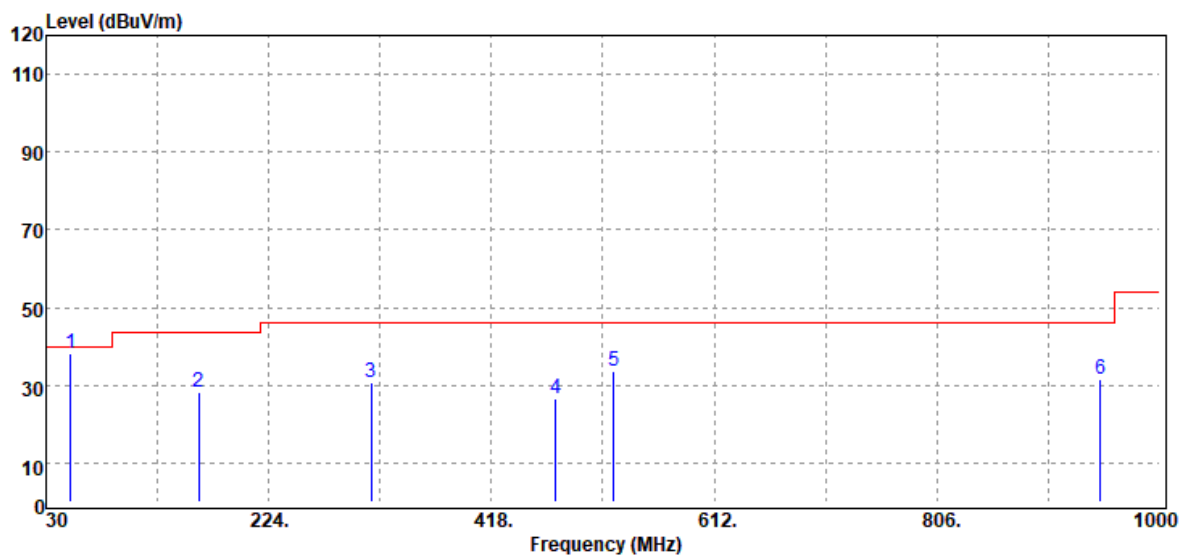

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
51.34	Peak	53.85	-15.68	38.17	40.00	-1.83
162.89	Peak	38.64	-10.42	28.22	43.50	-15.28
313.24	Peak	38.93	-8.05	30.88	46.00	-15.12
474.26	Peak	30.26	-3.51	26.75	46.00	-19.25
524.70	Peak	36.59	-3.04	33.55	46.00	-12.45
948.59	Peak	27.19	4.34	31.53	46.00	-14.47

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	Mode 1	Temp/Hum	21.5(°C)/ 63%RH
Test Item	30MHz-1GHz	Test Date	January 6, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

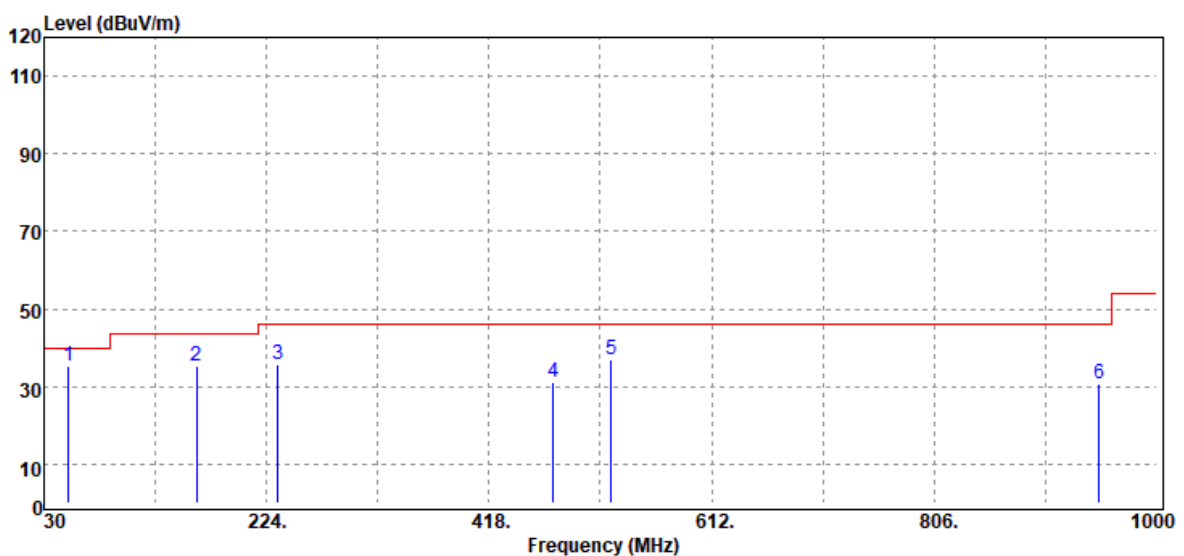

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
51.34	Peak	51.02	-15.68	35.34	40.00	-4.66
162.89	Peak	45.64	-10.42	35.22	43.50	-8.28
233.70	Peak	46.60	-11.04	35.56	46.00	-10.44
474.26	Peak	34.59	-3.51	31.08	46.00	-14.92
524.70	Peak	40.15	-3.04	37.11	46.00	-8.89
949.56	Peak	26.15	4.44	30.59	46.00	-15.41

Note: 1. No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)
 2. For below 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Above 1G**Test Data for UNII-2a**

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10520.00	Peak	30.92	18.30	49.22	68.20	-18.98
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11a / 5260 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10520.00	Peak	30.52	18.30	48.82	68.20	-19.38
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10560.00	Peak	29.93	18.35	48.28	68.20	-19.92
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11a / 5280 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10560.00	Peak	29.57	18.35	47.92	68.20	-20.28
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10640.00	Peak	29.75	18.39	48.14	74.00	-25.86
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5320 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

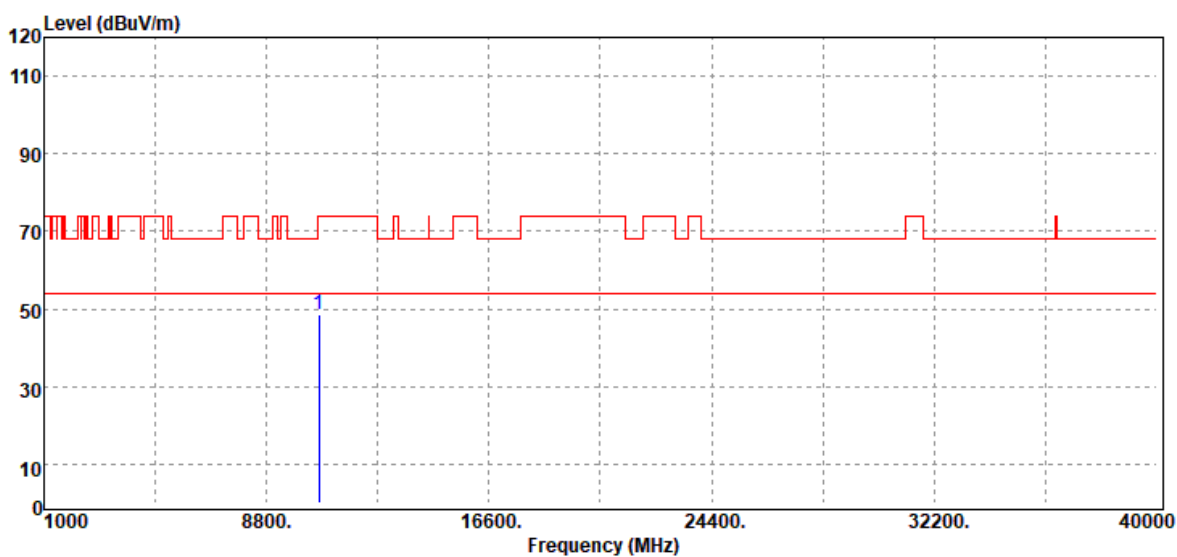

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10640.00	Peak	30.02	18.39	48.41	74.00	-25.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10520.00	Peak	30.19	18.30	48.49	68.20	-19.71
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5260 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10520.00	Peak	29.96	18.30	48.26	68.20	-19.94
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10560.00	Peak	29.95	18.35	48.30	68.20	-19.90
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz / 5280 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10560.00	Peak	29.71	18.35	48.06	68.20	-20.14
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10640.00	Peak	29.53	18.39	47.92	74.00	-26.08
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5320 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

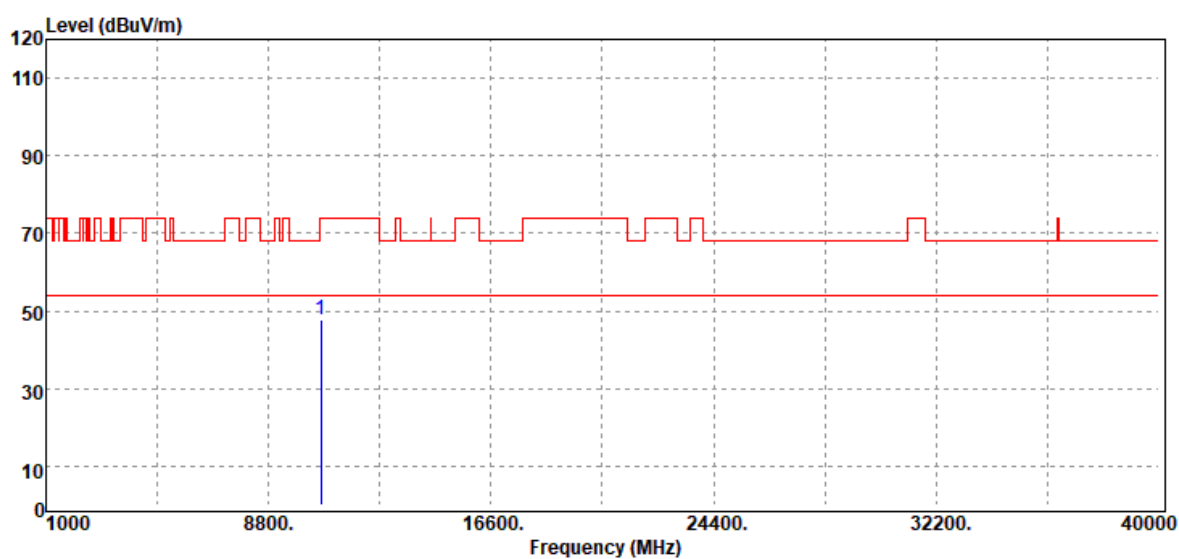


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10640.00	Peak	29.26	18.39	47.65	74.00	-26.35
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

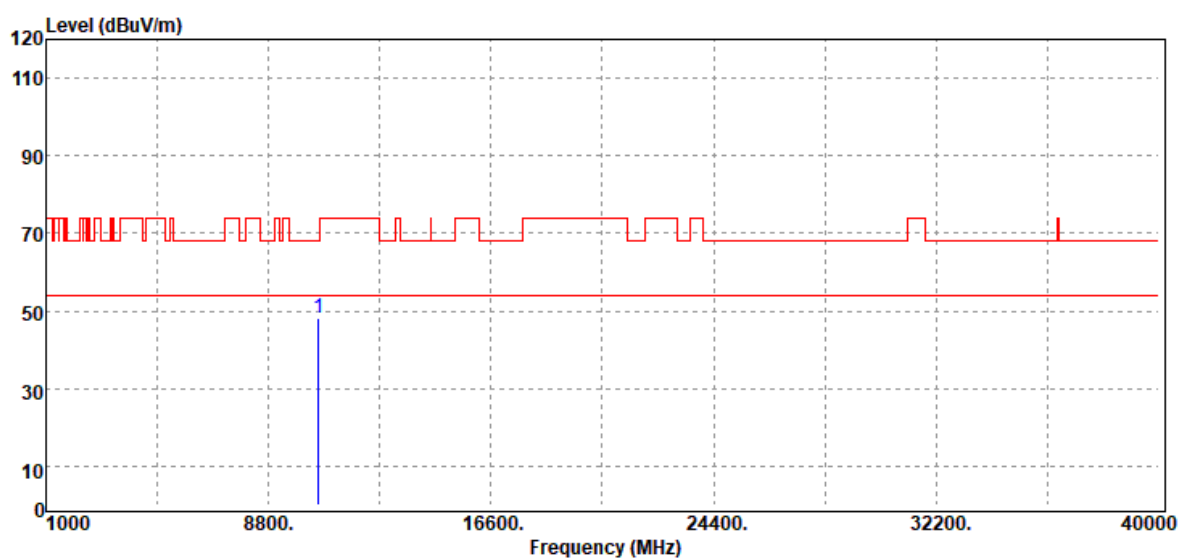

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10540.00	Peak	29.63	18.34	47.97	68.20	-20.23
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5270 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10540.00	Peak	30.39	18.34	48.73	68.20	-19.47
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
10620.00	Peak	28.97	18.35	47.32	74.00	-26.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5310 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10620.00	Peak	29.64	18.35	47.99	74.00	-26.01
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

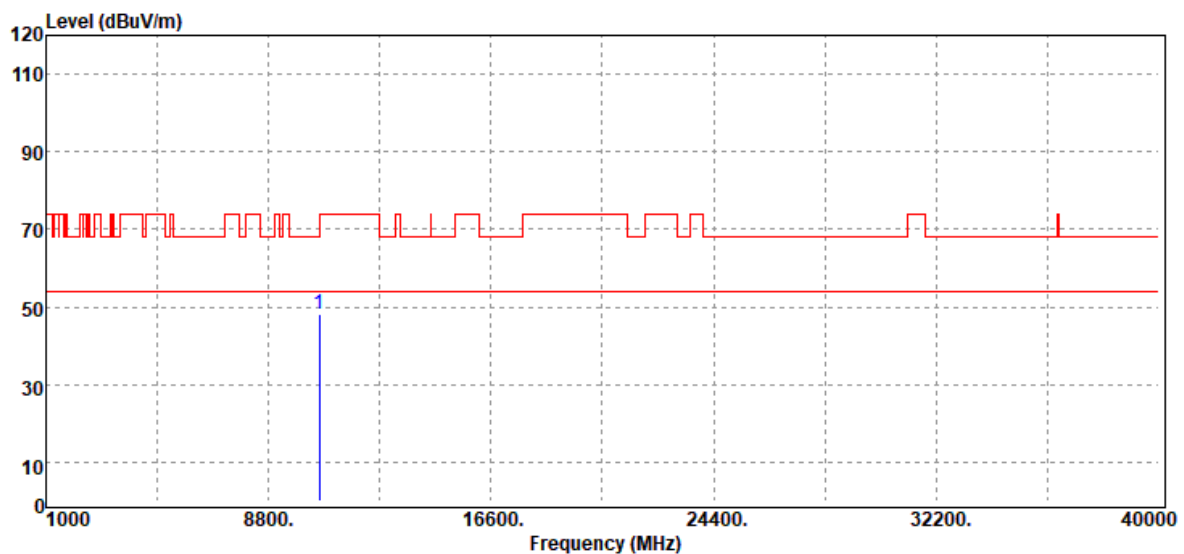


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10580.00	Peak	29.99	18.34	48.33	68.20	-19.87
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11ac VHT80 / 5290 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

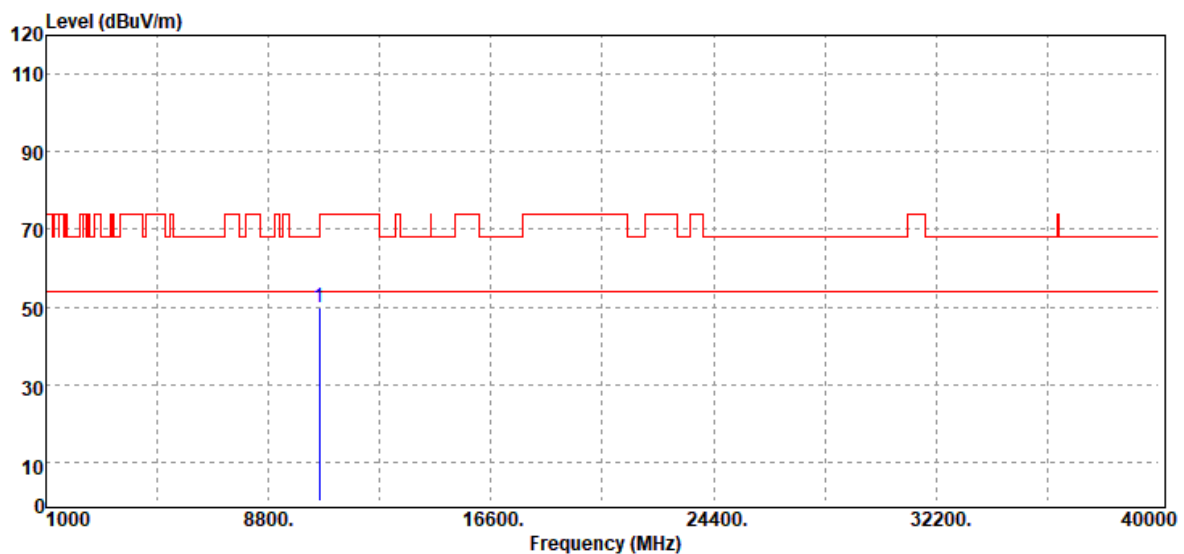

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
10580.00	Peak	31.69	18.34	50.03	68.20	-18.17
N/A						


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Data for UNII-2c

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

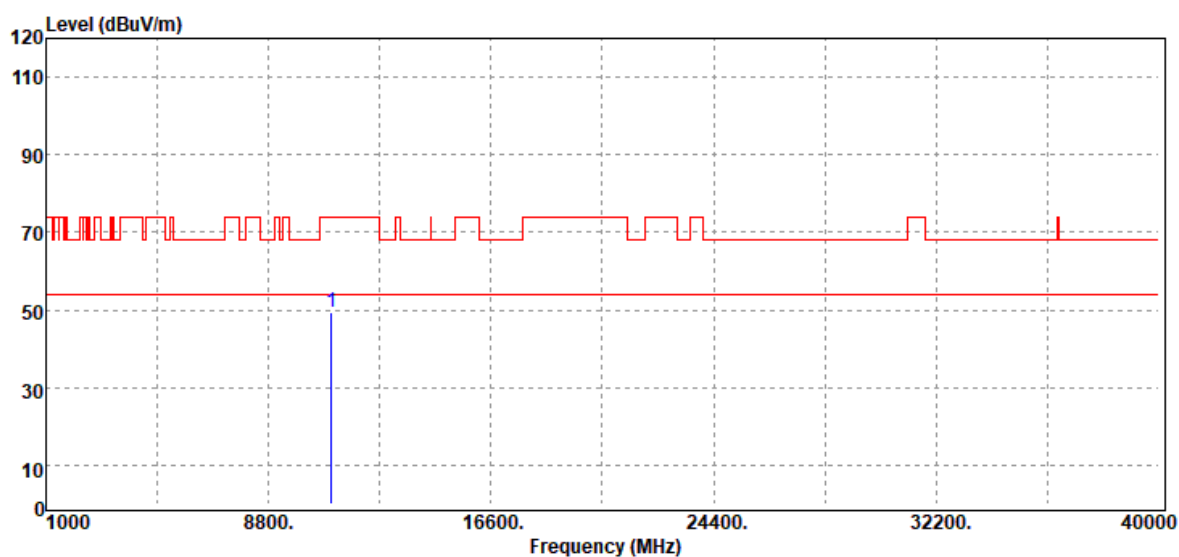


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11000.00	Peak	30.17	19.20	49.37	74.00	-24.63
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5500 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

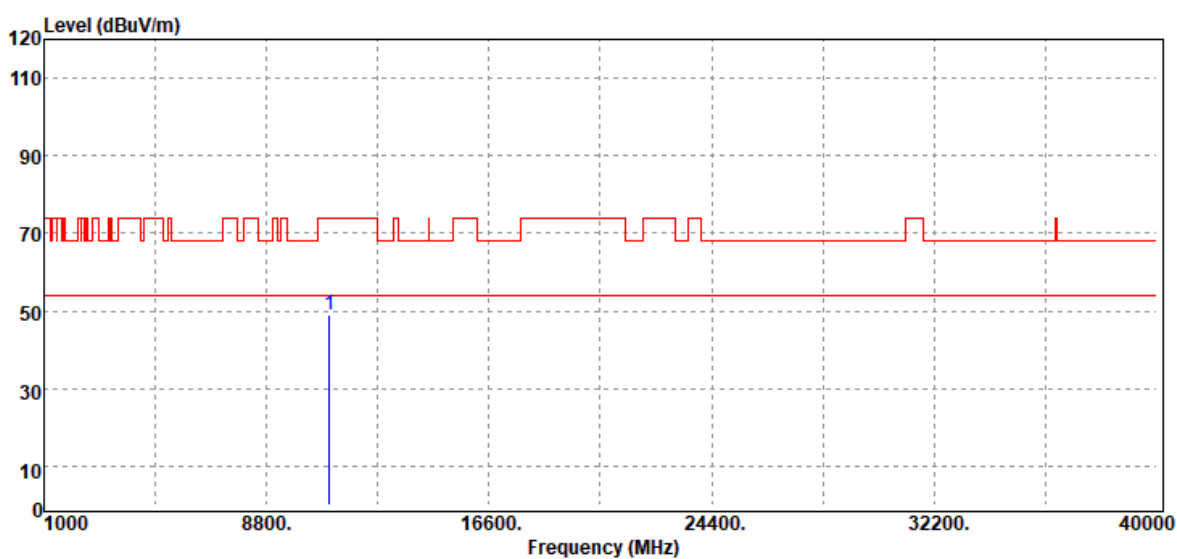

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11000.00	Peak	29.96	19.20	49.16	74.00	-24.84
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11160.00	Peak	30.45	19.54	49.99	74.00	-24.01
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5580 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

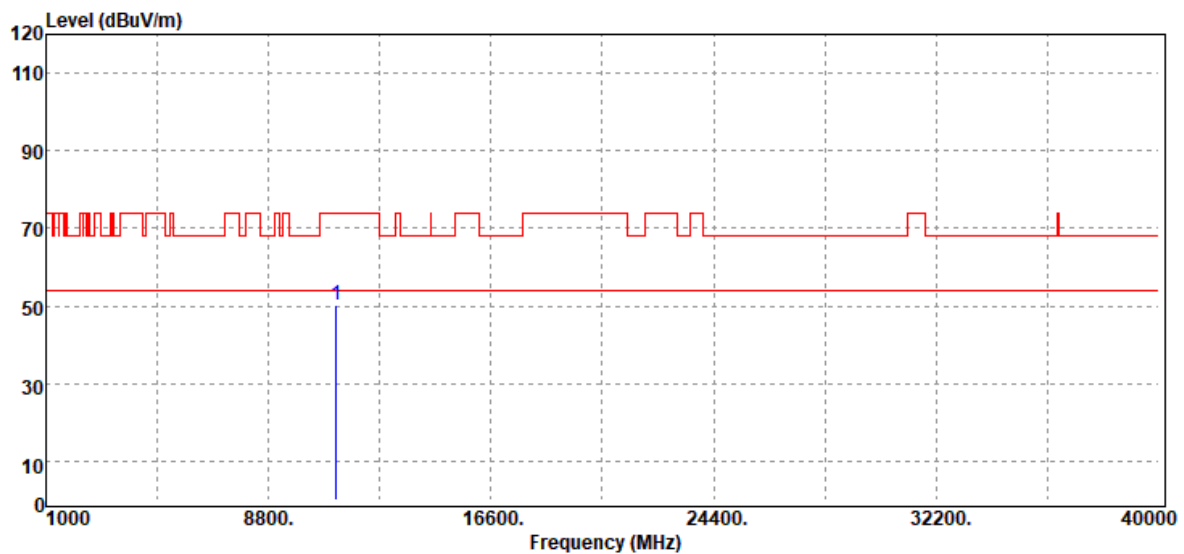


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11160.00	Peak	30.65	19.54	50.19	74.00	-23.81
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

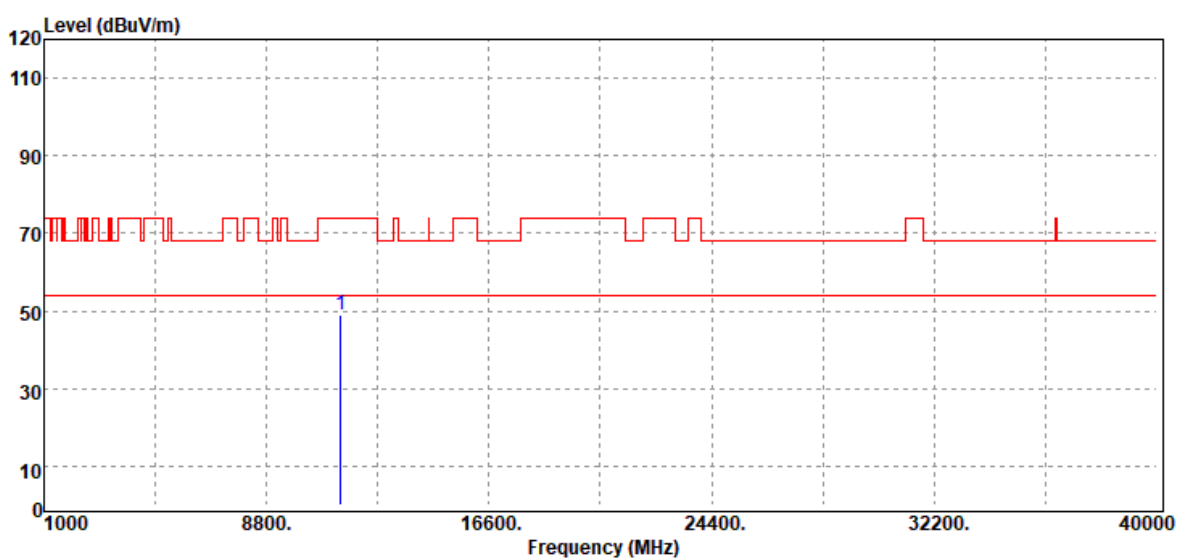

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11400.00	Peak	30.09	19.03	49.12	74.00	-24.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5700 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11400.00	Peak	30.73	19.03	49.76	74.00	-24.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5720 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

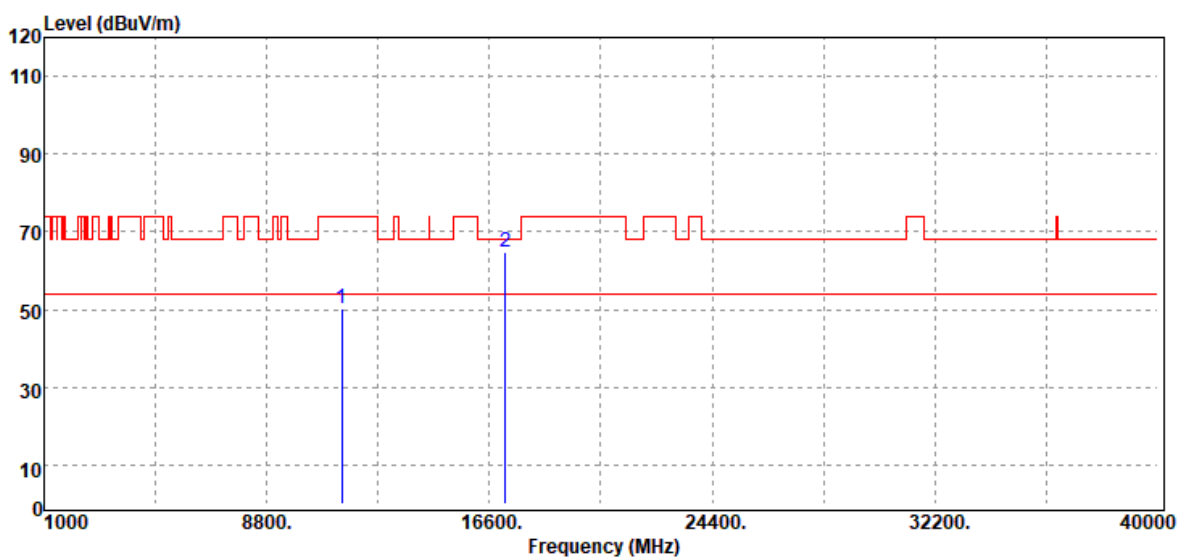


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11440.00	Peak	31.32	19.05	50.37	74.00	-23.63
17160.00	Peak	30.56	34.05	64.61	68.20	-3.59
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11a / 5720 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

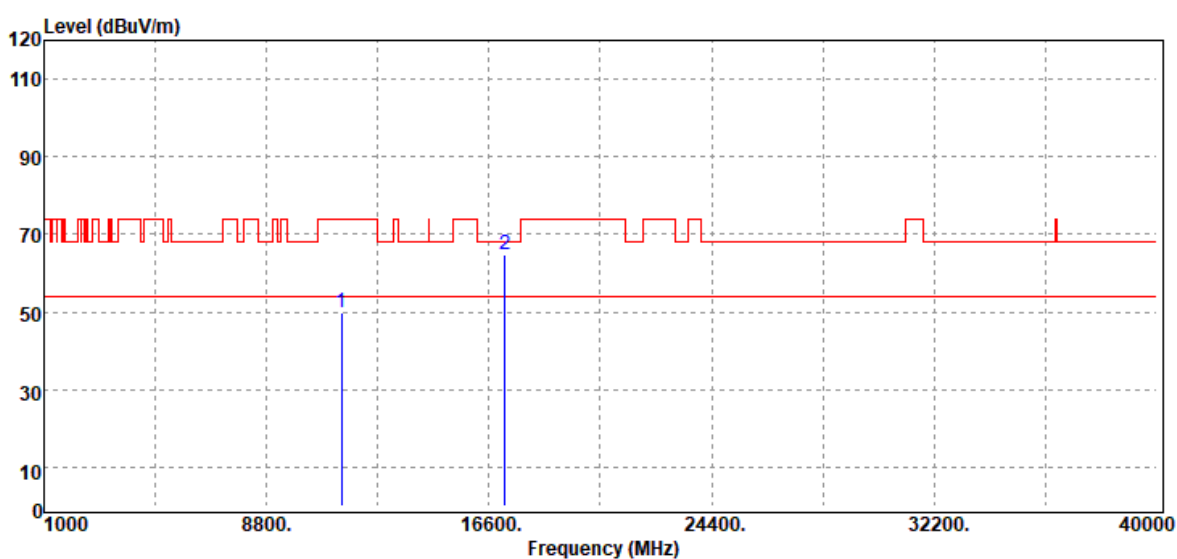

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11440.00	Peak	30.76	19.05	49.81	74.00	-24.19
17160.00	Peak	30.66	34.05	64.71	68.20	-3.49
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11000.00	Peak	29.81	19.20	49.01	74.00	-24.99
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5500 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11000.00	Peak	30.19	19.20	49.39	74.00	-24.61
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11160.00	Peak	31.58	19.54	51.12	74.00	-22.88
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5580 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11160.00	Peak	31.01	19.54	50.55	74.00	-23.45
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

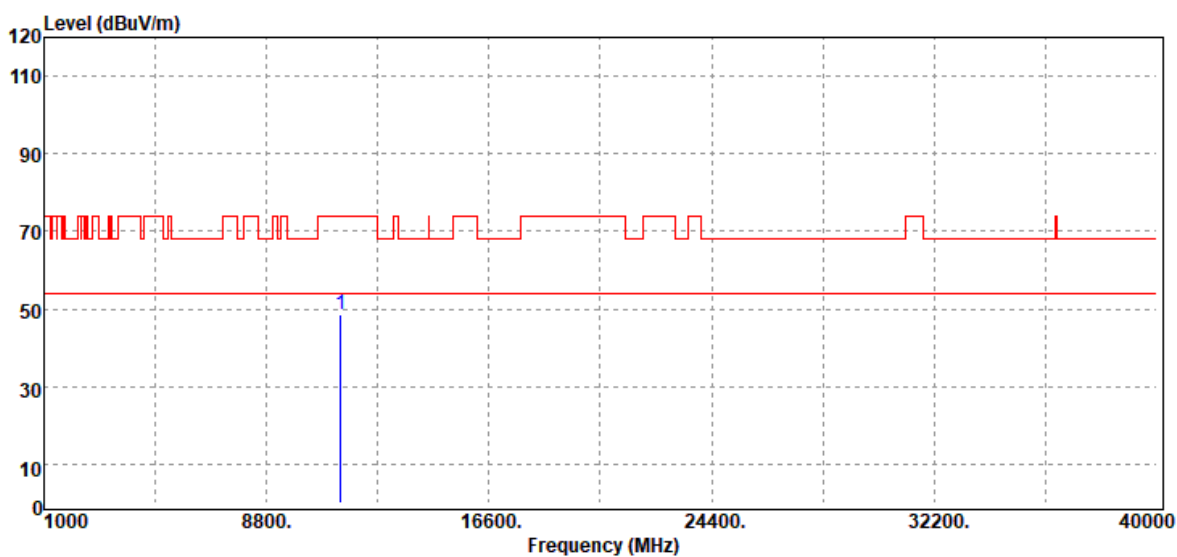


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11400.00	Peak	29.56	19.03	48.59	74.00	-25.41
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 20 MHz / 5700 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

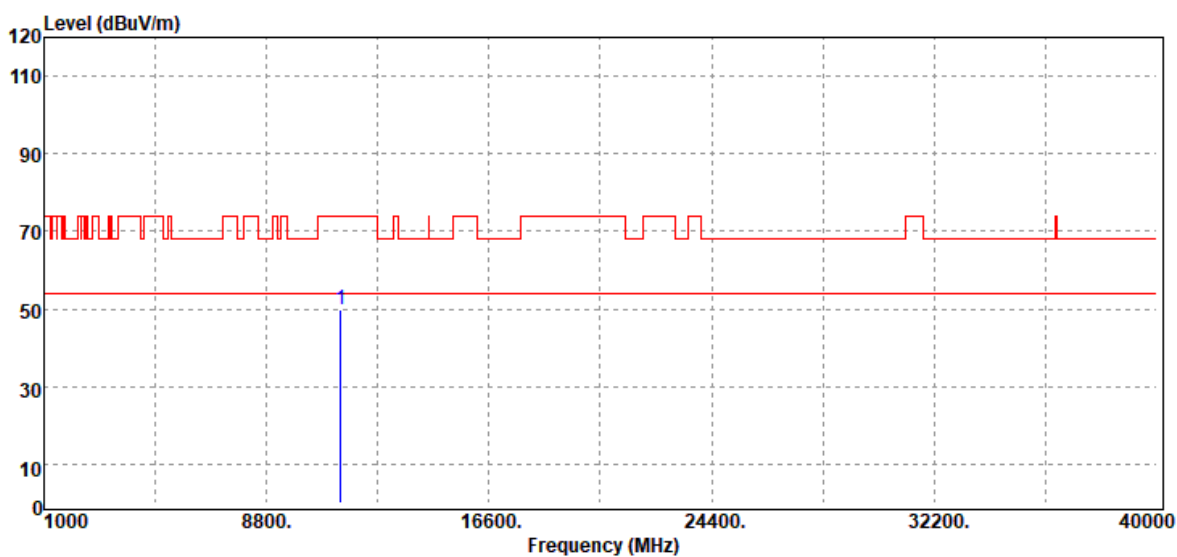


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11400.00	Peak	30.73	19.03	49.76	74.00	-24.24
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz / 5720 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

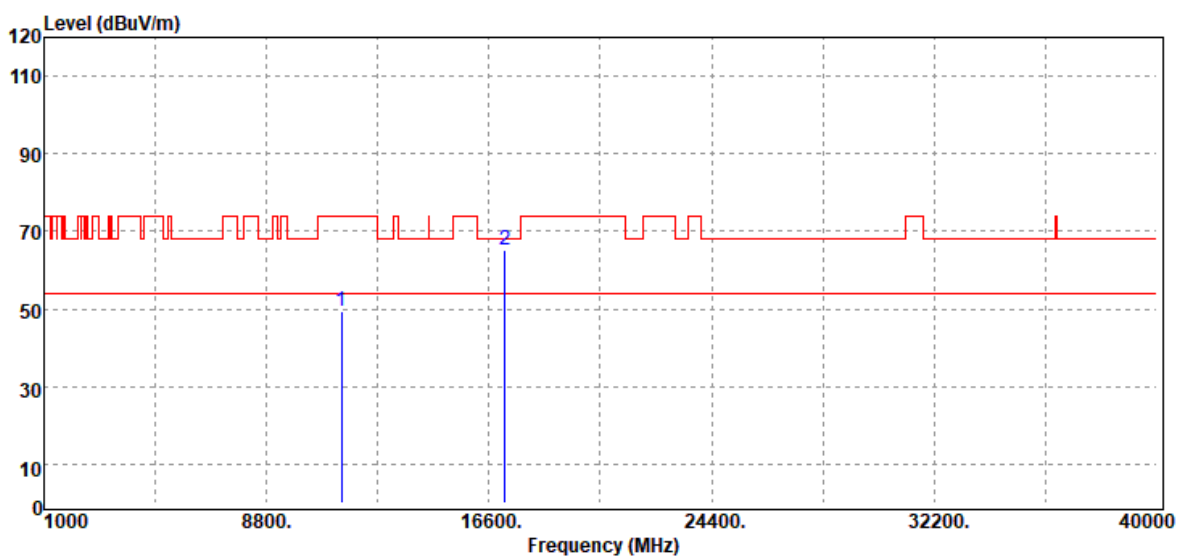

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11440.00	Peak	30.49	19.05	49.54	74.00	-24.46
17160.00	Peak	31.30	34.05	65.35	68.20	-2.85
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 20 MHz / 5720 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11440.00	Peak	30.31	19.05	49.36	74.00	-24.64
17160.00	Peak	32.03	34.05	66.08	68.20	-2.12
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11020.00	Peak	30.72	19.26	49.98	74.00	-24.02
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5510 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11020.00	Peak	30.65	19.26	49.91	74.00	-24.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11100.00	Peak	30.67	19.58	50.25	74.00	-23.75
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5550 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

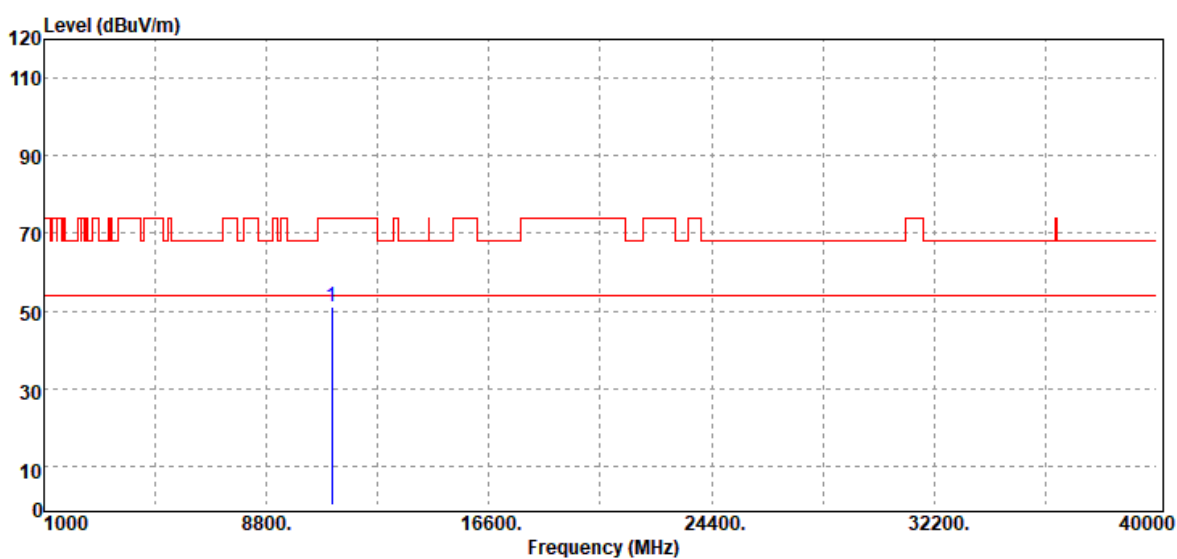

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11100.00	Peak	31.39	19.58	50.97	74.00	-23.03
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11340.00	Peak	29.77	19.28	49.05	74.00	-24.95
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5670 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		



Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11340.00	Peak	29.94	19.28	49.22	74.00	-24.78
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11n 40 MHz / 5710 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		




Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11420.00	Peak	30.51	19.04	49.55	74.00	-24.45
17130.00	Peak	31.41	34.05	65.46	68.20	-2.74
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11n 40 MHz / 5710 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

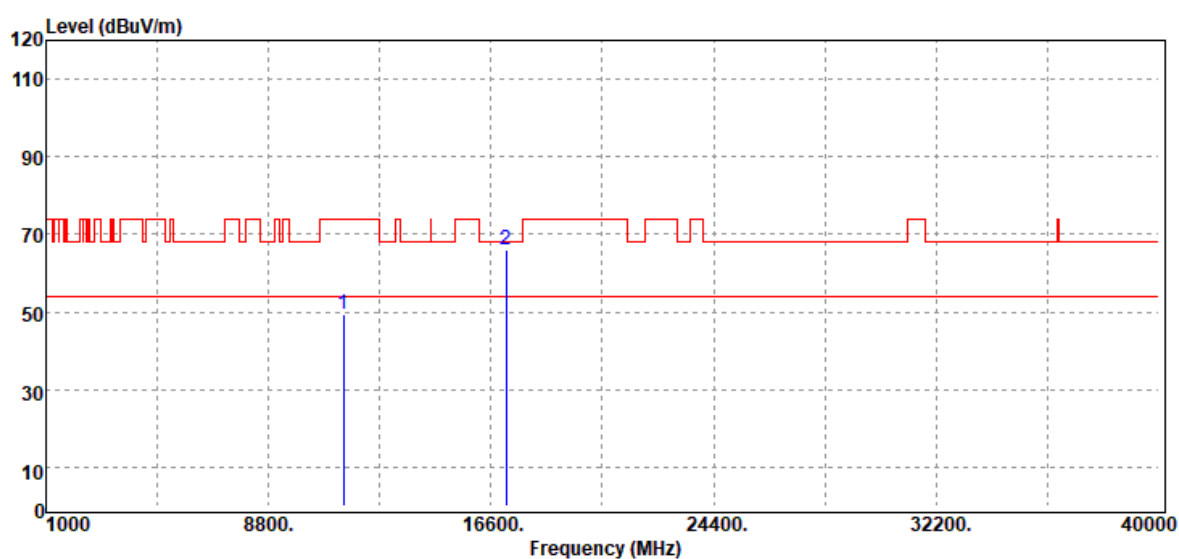


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11420.00	Peak	30.55	19.04	49.59	74.00	-24.41
17130.00	Peak	32.06	34.05	66.11	68.20	-2.09
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Vertical	Test Engineer	Jerry Chang
Detector	Peak		

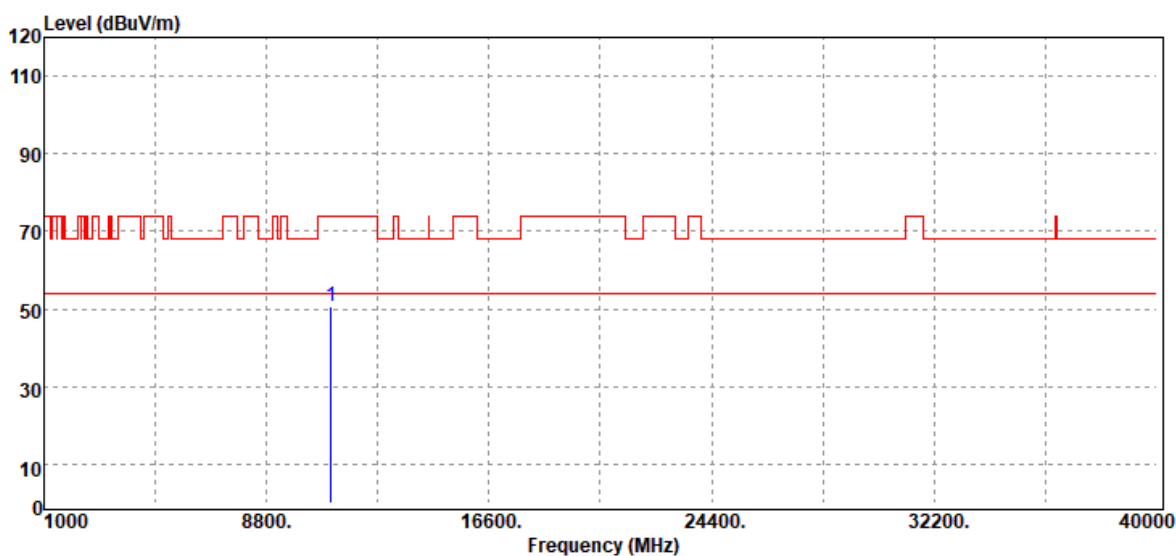


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11060.00	Peak	31.14	19.40	50.54	74.00	-23.46
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11ac VHT80 / 5530 MHz	Temp/Hum	21.1(°C)/ 54%RH
Test Item	Harmonic	Test Date	February 9, 2021
Polarize	Horizontal	Test Engineer	Jerry Chang
Detector	Peak		

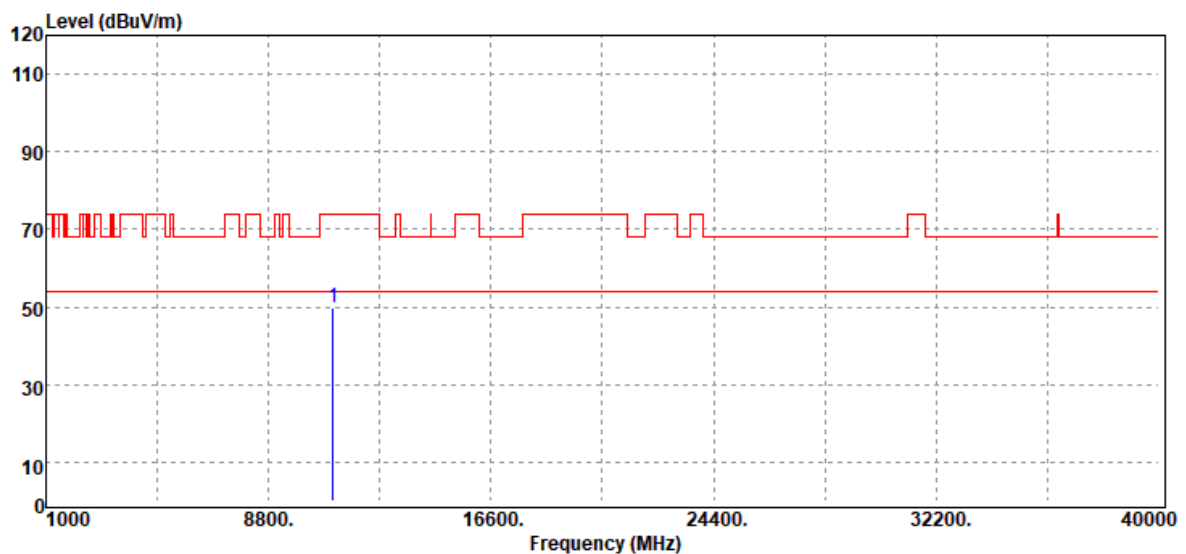


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11060.00	Peak	30.29	19.40	49.69	74.00	-24.31
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Test Mode	IEEE 802.11ac VHT80 / 5690 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Vertical	Test Engineer	Ray Li
Detector	Peak		

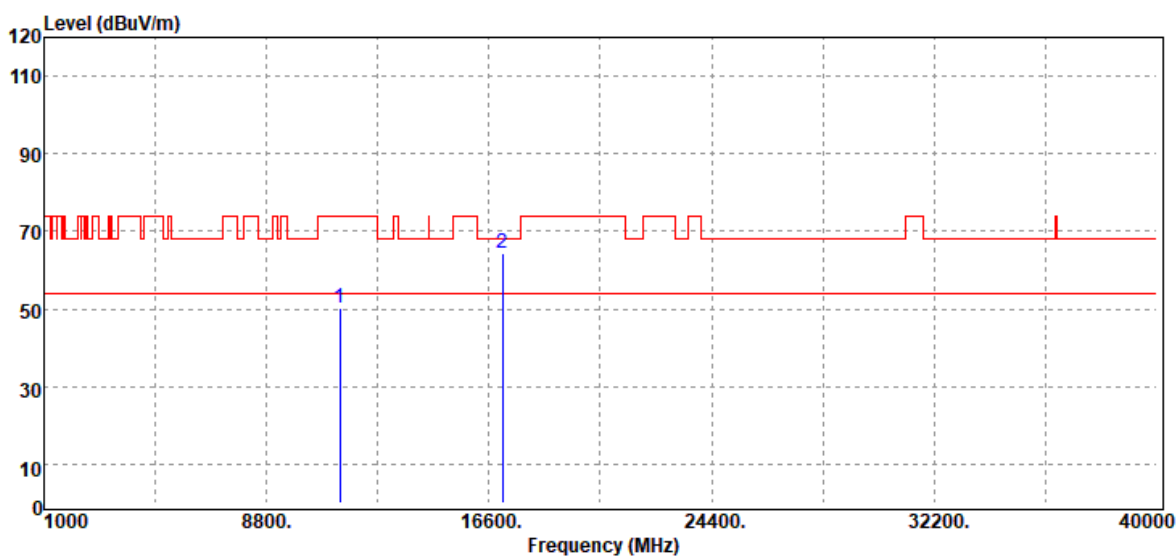


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dB μ V	Factor dB	Actual FS dB μ V/m	Limit @3m dB μ V/m	Margin dB
11380.00	Peak	30.92	19.12	50.04	74.00	-23.96
17070.00	Peak	30.48	33.92	64.40	68.20	-3.80
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

Report No.: T201222W02-RP5

Test Mode	IEEE 802.11ac VHT80 / 5690 MHz	Temp/Hum	23.4(°C)/ 53%RH
Test Item	Harmonic	Test Date	April 8, 2021
Polarize	Horizontal	Test Engineer	Ray Li
Detector	Peak		

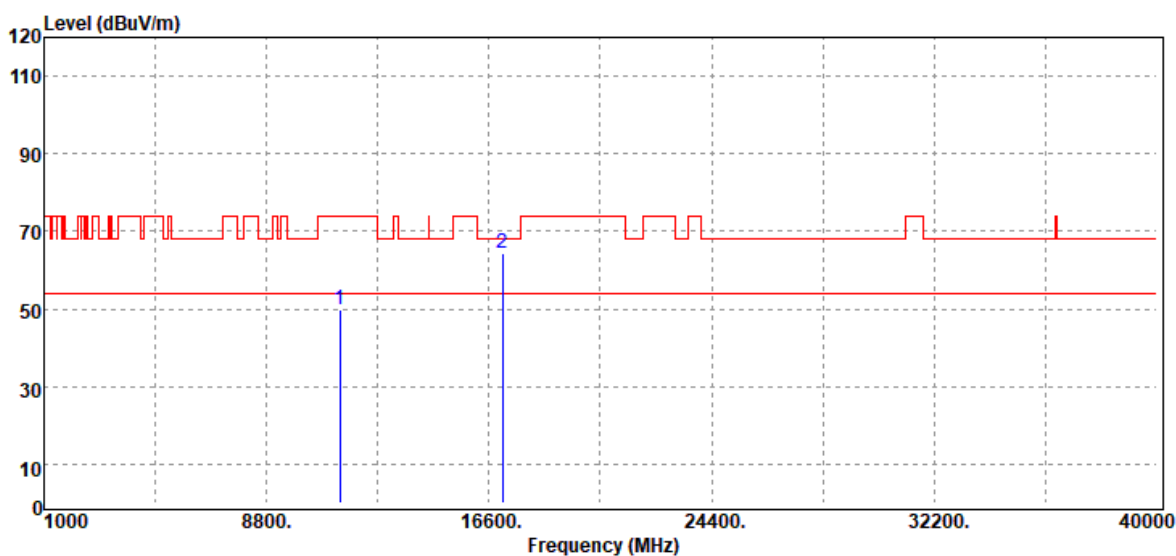

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB
11380.00	Peak	30.74	19.12	49.86	74.00	-24.14
17070.00	Peak	30.60	33.92	64.52	68.20	-3.68
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit.

- End of Test Report -