

EMC TEST REPORT

Report No. : EME-031072

Model No. : B-120

Issued Date : Sep. 25, 2003

Applicant : ZyXEL Communications Corporation
No. 6, Innovation Rd II, Science-Based Industrial Park,
Hsin-Chu, Taiwan

Test By : Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

This test report consists of 42 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result in this report only applies to the tested sample.

Project Engineer



Jerry Liu

Reviewed By



Elton Chen

Table of Contents

Summary of Tests.....	3
1. General information	4
1.1 Identification of the EUT	4
1.2 Additional information about the EUT	4
1.3 Antenna description	5
1.4 Peripherals equipment.....	5
2. Test specifications	6
2.1 Test standard	6
2.2 Operation mode	6
2.3 Test equipment.....	7
3. Minimum 6dB Bandwidth test.....	8
3.1 Operating environment	8
3.2 Test setup & procedure.....	8
3.3 Measured data of Minimum 6dB Bandwidth test results.....	8
4. Maximum Output Power test.....	12
4.1 Operating environment	12
4.2 Test setup & procedure.....	12
4.3 Measured data of Maximum Output Power test results.....	12
5. Radiated Emission test	13
5.1 Operating environment	13
5.2 Test setup & procedure.....	13
5.3 Emission limits	14
5.4 Radiated spurious emission test data	15
5.4.1 Measurement results: frequencies equal to or less than 1 GHz.....	15
5.4.2 Measurement results: frequency above 1GHz.....	18
6. Power Spectrum Density test.....	21
6.1 Operating environment	21
6.2 Test setup & procedure.....	21
6.3 Measured data of Power Spectrum Density test results.....	21
7. Emission on the band edge §FCC 15.247(C)	25
7.1 Band-edge (Conducted method).....	26
7.2 Band-edge (Radiated method).....	28
8. Power Line Conducted Emission test §FCC 15.207	32
8.1 Operating environment	32
8.2 Test setup & procedure.....	32
8.3 Power Line Conducted Emission test data.....	34

Summary of Tests**Wireless Lan PC Card -Model: B-120
FCC ID: I88B-120**

Test	Reference	Results
Minimum 6dB Bandwidth test	15.247(a)(2)	Complies
Maximum Output Power test	15.247(b)	Complies
Radiated Spurious Emission test	15.205, 15.209	Complies
Power Spectrum Density test	15.247(d)	Complies
Power Line Conducted Emission test	15.207	Complies

1. General information

1.1 Identification of the EUT

Applicant	: ZyXEL Communications Corp.
Product	: Wireless Lan PC Card
Model No.	: B-120
FCC ID.	: I88B-120
Frequency Range	: 2412MHz to 2462MHz
Channel Number	: 11
Frequency of Each Channel	: 2412MHz, 2417MHz, 2422MHz, 2427MHz, 2432MHz, 2437MHz, 2442MHz, 2447MHz, 2452MHz, 2457MHz, 2462MHz
Type of Modulation	: CCK (11Mps, 5.5Mbps), DQPSK (2Mbps), DBPSK (1Mbps)
Power Supply	: 5Vdc from Notebook
Power Cord	: N/A
Sample Received	: Sep. 18, 2003
Test Date(s)	: Sep. 18, 2003 ~ Sep. 22, 2003

A FCC DoC report has been generated for the client.

1.2 Additional information about the EUT

The ZyAIR is an IEEE 802.11b compliant wireless PCMCIA card that fits into any type II PCMCIA slot. Its maximum 11 Mbps data rate, which gives Ethernet equivalent speed, is ideal in the corporate or home environment. Users enjoy the wireless mobility within the coverage area.

The EUT meets special requirements for full modular approval on FCC Public Notice DA 00-1407 and the device is only for OEM integrator, please refer the test result in this report.

The model ZyAIR B-120 and Telefonica B-120 are identical to model B-120 (EUT), the different model number serves as marketing strategy.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

1.3 Antenna description

The EUT uses a permanently connected antenna.

Antenna Gain : 2.5dBi

Antenna Type : Ceramic antenna

Connector Type : N/A

1.4 Peripherals equipment

Peripherals	Manufacturer	Product No.	Serial No.	FCC ID
Notebook	IBM	2662-K1T	FX-BP820	FCC DoC Approved
Printer	HP	C2642A	TH86K1N2ZB	FCC DoC Approved
Modem	Dynalink	V1456VQE	00V230A00051494	FCC DoC Approved

2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Section § 15.205 、 §15.207 、 §15.209 、 §15.247 and ANSI C63.4/1992.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

2.2 Operation mode

Plug the EUT into Notebook via extend card, and turn on the power, then run the test program “ZDConfig” under Window OS.

The EUT was transmitted continuously during the test.

After verifying the maximum output power, we found the maximum output power was occurred at 11Mbps data rate. The final test was executed under this condition and recorded in this report individually.

2.3 Test equipment

Equipment	Brand	Frequency range	Model No.	Series No.	Last Cal.Date
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS 30	825788/014	Feb. 18, 2003
EMI Test Receiver	Rohde & Schwarz	20Hz~26.5GHz	ESMI	825428/005	June 10, 2003
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP 30	100137	July 10, 2003
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK 30	100186	Oct. 9, 2002
Horn Antenna	EMCO	1GHz~18GHz	3115	9906-5890	Sep. 19, 2002
Horn Antenna	SCHWARZBECK	14GHz~40GHz	BBHA 9170	159	June 21, 2003
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9160	3133	Feb. 21, 2003
Turn Table	HDGmbH	N/A	DS 420S	420/669/01	N/A
Antenna Tower	HDGmbH	N/A	MA 240	240/573	N/A
Microwave Amplifier	Agilent	2GHz~26.5GHz	8348A	3111A00567	Dec. 20, 2002
Crystal Detector	Agilent	10MHz~18GHz	8472B	MY42240243	N/A
Signal Generator	Rohde & Schwarz	20MHz~27GHz	SMR27	100036	Aug. 15, 2003
Two Channel Digital Storage Oscilloscope	Tektronix	N/A	TDS1012	C031679	Aug. 16, 2003

Note:

1. The calibration interval of the above instruments is 12 months.

3. Minimum 6dB Bandwidth test

3.1 Operating environment

Temperature: 22 °C
Relative Humidity: 60 %
Atmospheric Pressure 1023 hPa


3.2 Test setup & procedure

The minimum 6dB bandwidth per FCC §15.247(a)(2) was measured using a 50 ohm spectrum analyzer with the resolutions bandwidth set at 100kHz, the video bandwidth set at 100kHz, and the SPAN>>RBW. The test was performed at 3 channels (lowest, middle and highest channel). The minimum 6-dB modulation bandwidth is in the following Table.


3.3 Measured data of Minimum 6dB Bandwidth test results

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit
Low	2412	10.12	> 500kHz
Middle	2437	10.12	> 500kHz
High	2462	10.12	> 500kHz


Please see the plot below.

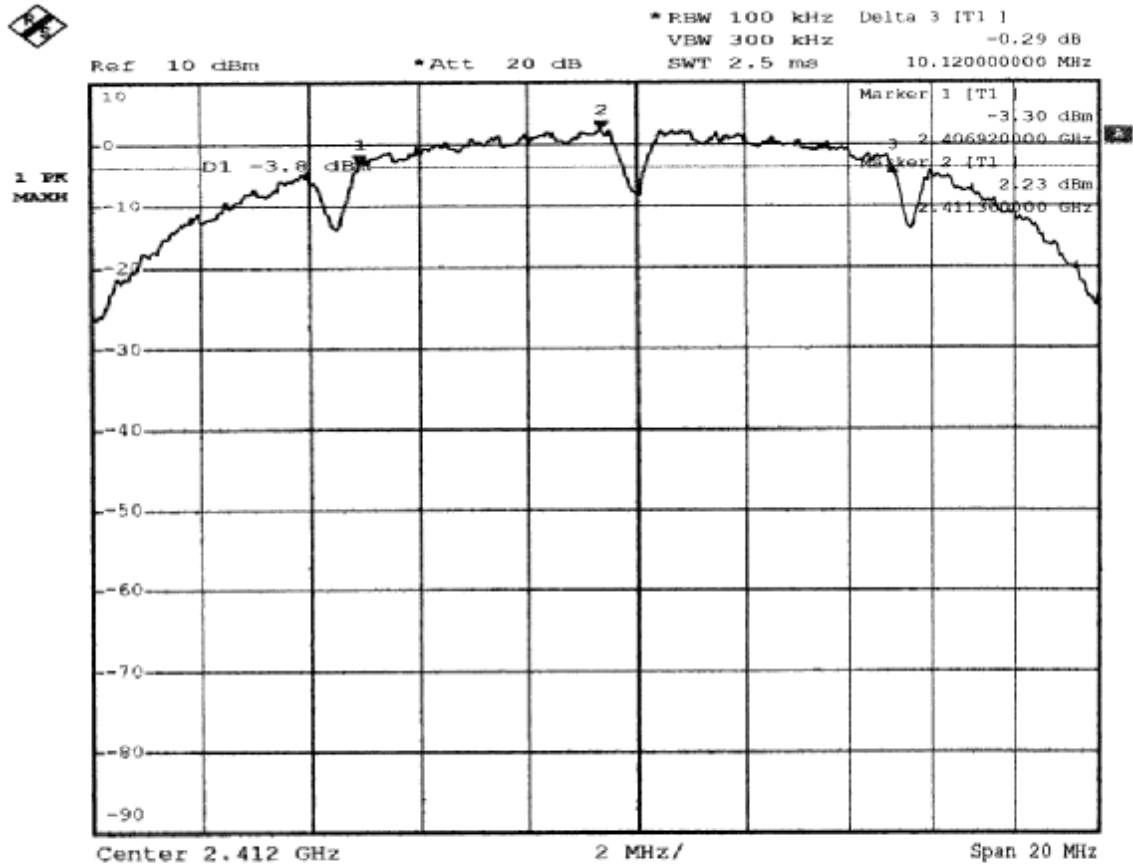

Comment A: 6dB bandwidth at low channel

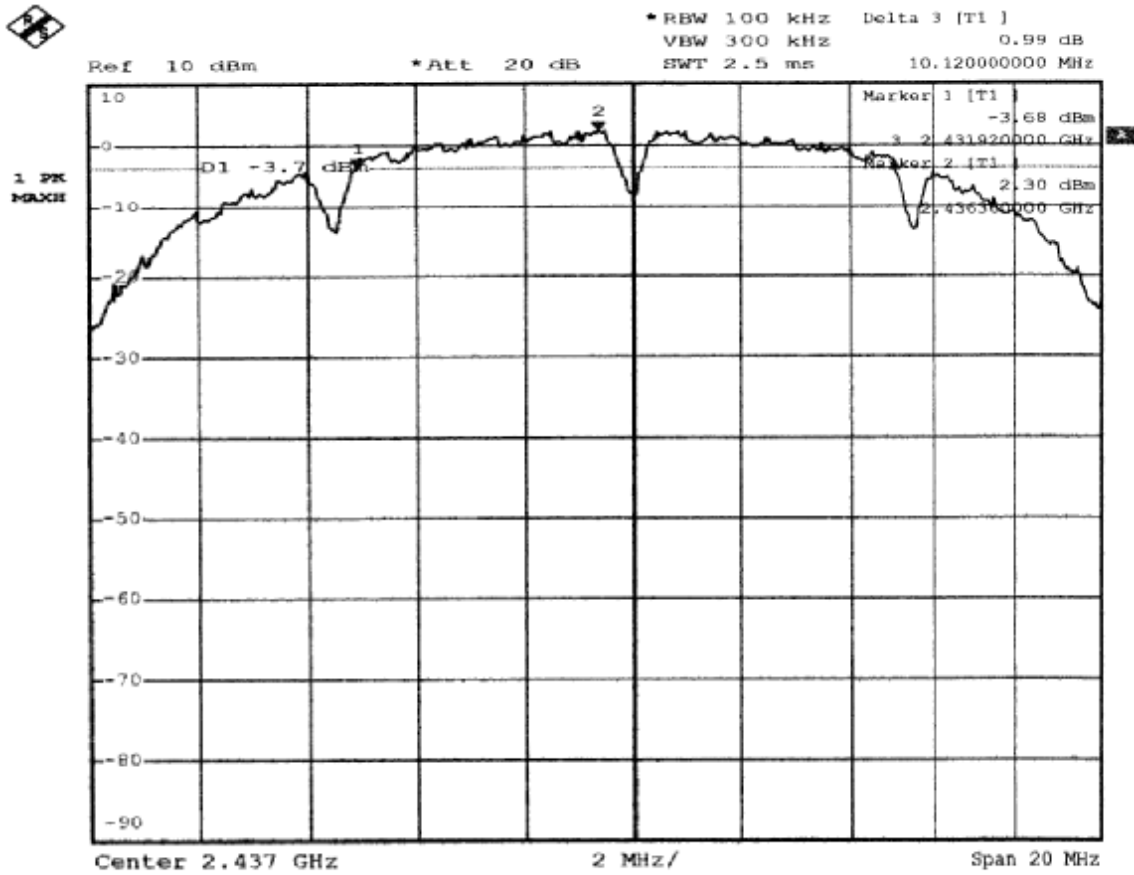

Comment A: 6dB bandwidth at middle channel

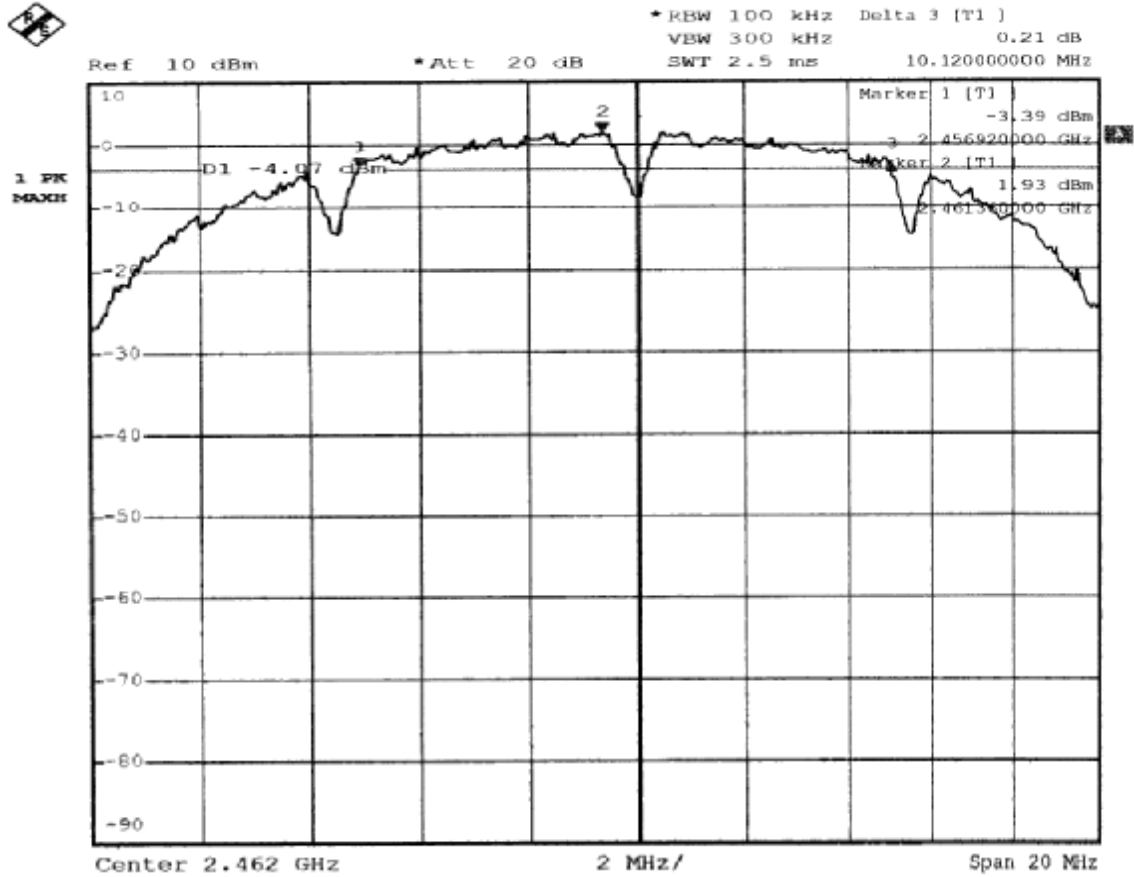

Comment A: 6dB bandwidth at high channel


4. Maximum Output Power test

4.1 Operating environment


Temperature: 22 °C
 Relative Humidity: 60 %
 Atmospheric Pressure 1023 hPa

4.2 Test setup & procedure

A:



B:



1. The output of the transmitter via a 10 dB attenuator and coupled to a diode detector.
2. The output of the diode detector connected to the vertical channel of an oscilloscope. The observed trace of the oscilloscope shall be recorded as “A”.
3. The transmitter replaced by a signal generator. The output frequency of the signal made equal to the center of the frequency range occupied by the transmitter and unmodulated.
4. The output of the signal generator raised to reach the peak of trace “A” named X.
5. The signal generator output level X (dBm) is the transmitter peak output power.

4.3 Measured data of Maximum Output Power test results

Channel	Frequency (MHz)	Reading (dBm)	Output Power		Limit (W)
			(dBm)	(mW)	
Lowest	2412	17.12	17.12	51.523	1
Middle	2437	17.38	17.38	54.702	1
Highest	2462	16.99	16.99	50.003	1


5. Radiated Emission test

5.1 Operating environment

Temperature:	22	°C	(10-40°C)
Relative Humidity:	60	%	(10-90%)
Atmospheric Pressure	1023	hPa	(860-1060hPa)

5.2 Test setup & procedure

The Diagram below shows the test setup, which is utilized to make these measurements.

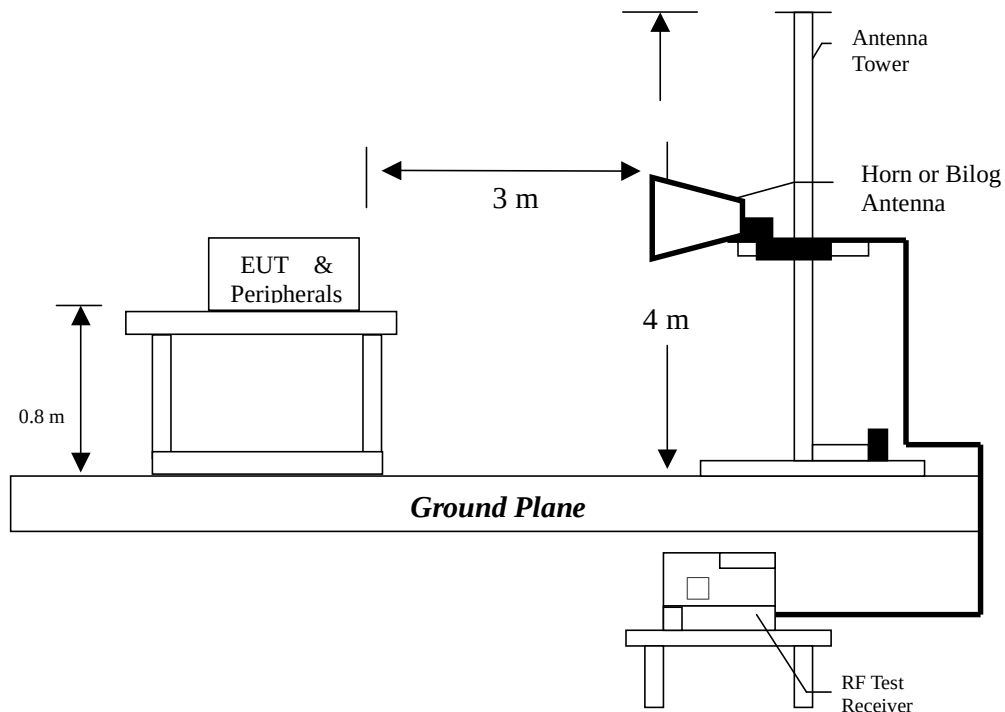

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1MHz RBW/VBW) recorded also on the report.

The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

5.3 Emission limits

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dB μ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Uncertainty was calculated in accordance with NAMAS NIS 81.

Expanded uncertainty (k=2) of radiated emission measurement is ± 4.98 dB.

Expanded uncertainty (k=2) of conducted emission measurement is ± 2.02 dB.

5.4 Radiated spurious emission test data

5.4.1 Measurement results: frequencies equal to or less than 1 GHz

EUT : B-120

Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
133.10000	QP	V	13.36	16.94	30.30	43.50	-13.20
265.40000	QP	V	13.32	18.58	31.90	46.00	-14.10
299.50000	QP	V	14.39	19.61	34.00	46.00	-12.00
332.20000	QP	V	15.30	15.10	30.40	46.00	-15.60
498.80000	QP	V	18.90	11.20	30.10	46.00	-15.90
720.00000	QP	V	22.56	7.44	30.00	46.00	-16.00
199.60000	QP	H	12.03	25.17	37.20	43.50	-6.30
233.00000	QP	H	12.35	24.65	37.00	46.00	-9.00
263.80000	QP	H	13.32	23.08	36.40	46.00	-9.60
332.20000	QP	H	15.30	17.10	32.40	46.00	-13.60
398.00000	QP	H	16.67	15.53	32.20	46.00	-13.80
528.20000	QP	H	19.17	11.63	30.80	46.00	-15.20

Remark:

1. Corrected Level = Reading Level + Correction Factor
2. Correction Factor = Antenna Factor + Cable Loss

EUT : B-120

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
108.80000	QP	V	10.95	17.05	28.00	43.50	-15.50
240.10000	QP	V	12.86	16.74	29.60	46.00	-16.40
300.00000	QP	V	14.47	19.23	33.70	46.00	-12.30
399.40000	QP	V	16.67	14.43	31.10	46.00	-14.90
497.40000	QP	V	18.90	9.80	28.70	46.00	-17.30
720.00000	QP	V	22.56	8.44	31.00	46.00	-15.00
133.10000	QP	H	13.36	15.54	28.90	43.50	-14.60
199.60000	QP	H	12.03	23.07	35.10	43.50	-8.40
233.00000	QP	H	12.35	24.65	37.00	46.00	-9.00
263.80000	QP	H	13.32	23.48	36.80	46.00	-9.20
332.20000	QP	H	15.30	16.60	31.90	46.00	-14.10
665.40000	QP	H	21.70	10.80	32.50	46.00	-13.50

Remark:

1. Corrected Level = Reading Level + Correction Factor

2. Correction Factor = Antenna Factor + Cable Loss

EUT : B-120

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
132.60000	QP	V	13.36	16.64	30.00	43.50	-13.50
199.60000	QP	V	12.03	15.07	27.10	43.50	-16.40
220.10000	QP	V	11.82	16.48	28.30	46.00	-17.70
264.90000	QP	V	13.32	17.98	31.30	46.00	-14.70
300.00000	QP	V	14.47	16.73	31.20	46.00	-14.80
720.00000	QP	V	22.56	9.04	31.60	46.00	-14.40
133.10000	QP	H	13.36	16.34	29.70	43.50	-13.80
198.50000	QP	H	12.03	24.37	36.40	43.50	-7.10
220.10000	QP	H	11.82	22.48	34.30	46.00	-11.70
263.80000	QP	H	13.32	24.28	37.60	46.00	-8.40
332.20000	QP	H	15.30	18.70	34.00	46.00	-12.00
399.40000	QP	H	16.67	16.43	33.10	46.00	-12.90

Remark:

1. Corrected Level = Reading Level + Correction Factor

2. Correction Factor = Antenna Factor + Cable Loss

5.4.2 Measurement results: frequency above 1GHz

The radiated spurious emissions at

Frequency(MHz)	Margin
9648	-2.688
9748	-2.678
9848	-0.119

are less than uncertainty. This is within the stated measurement uncertainty, this may affect compliance determined in other test arrangements.

EUT : B-120
Test Condition : Tx at low channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
7236	PK	V	34.32	38.42	51.41	55.51	74	-18.49
7236	AV	V	34.32	38.42	39.58	43.68	54	-10.32
9648	PK	V	35.808	41.35	52.76	58.302	74	-15.698
9648	AV	V	35.808	41.35	45.77	51.312	54	-2.688
7236	PK	H	34.32	38.42	50.27	54.37	74	-19.63
7236	AV	H	34.32	38.42	37.65	41.75	54	-12.25
9648	PK	H	35.808	41.35	51.02	56.562	74	-17.438
9648	AV	H	35.808	41.35	42.88	48.422	54	-5.578

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

For PK:

1GHz-3GHz: 50dBuV
3GHz-14GHz: 54dBuV
14GHz-26.5GHz: 60dBuV

For AV:

1GHz-3GHz: 41.5dBuV
3GHz-14GHz: 46dBuV
14GHz-26.5GHz: 46.5dBuV

EUT : B-120

Test Condition : Tx at middle channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamplifier (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
7311	PK	V	34.32	38.42	51.12	55.22	74	-18.78
7311	AV	V	34.32	38.42	39.25	43.35	54	-10.65
9748	PK	V	35.808	41.35	52.37	57.912	74	-16.088
9748	AV	V	35.808	41.35	45.78	51.322	54	-2.678
7311	PK	H	34.32	38.42	50.16	54.26	74	-19.74
7311	AV	H	34.32	38.42	38.27	42.37	54	-11.63
9748	PK	H	35.808	41.35	50.83	56.372	74	-17.628
9748	AV	H	35.808	41.35	41.02	46.562	54	-7.438

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

For PK:

1GHz-3GHz: 50dBuV

3GHz-14GHz: 54dBuV

14GHz-26.5GHz: 60dBuV

For AV:

1GHz-3GHz: 41.5dBuV

3GHz-14GHz: 46dBuV

14GHz-26.5GHz: 46.5dBuV

EUT : B-120

Test Condition : Tx at high channel

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV)	Limit @ 3 m (dBuV)	Margin (dB)
7386	PK	V	34.32	38.42	53.29	57.39	74	-16.61
7386	AV	V	34.32	38.42	40.99	45.09	54	-8.91
9848	PK	V	35.919	41.55	54.35	59.981	74	-14.019
9848	AV	V	35.919	41.55	48.25	53.881	54	-0.119
7386	PK	H	34.32	38.42	52.25	56.35	74	-17.65
7386	AV	H	34.32	38.42	40.22	44.32	54	-9.68
9848	PK	H	35.919	41.55	51	56.631	74	-17.369
9848	AV	H	35.919	41.55	44.3	49.931	54	-4.069

Remark:

1. Corrected Level = Reading Level + Correction Factor – Preamp
2. Correction Factor = Antenna Factor + Cable Loss
3. “-“ means the emission is below the noise floor. The frequency measured ranges from 1GHz to 25GHz. The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

For PK:

1GHz-3GHz: 50dBuV

3GHz-14GHz: 54dBuV

14GHz-26.5GHz: 60dBuV

For AV:

1GHz-3GHz: 41.5dBuV

3GHz-14GHz: 46dBuV

14GHz-26.5GHz: 46.5dBuV

6. Power Spectrum Density test

6.1 Operating environment

Temperature: 22 °C
Relative Humidity: 60 %
Atmospheric Pressure 1023 hPa


6.2 Test setup & procedure

The power spectrum density per FCC §15.247(d) was measured from the antenna port of the EUT using a 50ohm spectrum analyzer with the resolution bandwidth set at 3kHz, the video bandwidth set at 10kHz, a span of 1.5 MHz, and the sweep time set at 500 seconds. Power Density was read directly and cable loss (2dB)/external attenuator (3dB) correction was added to the reading to obtain power at the EUT antenna terminals. The test was performed at 3 channels (lowest, middle and highest channel). The Power Spectral Density measured result is in the following table.


6.3 Measured data of Power Spectrum Density test results

Channel	Frequency (MHz)	Measured level (dBm)	Limit (dBm)
Low	2412.498	-6.21	8
Middle	2437.495	-6.53	8
High	2462.495	-7.00	8


Please see the plot below.

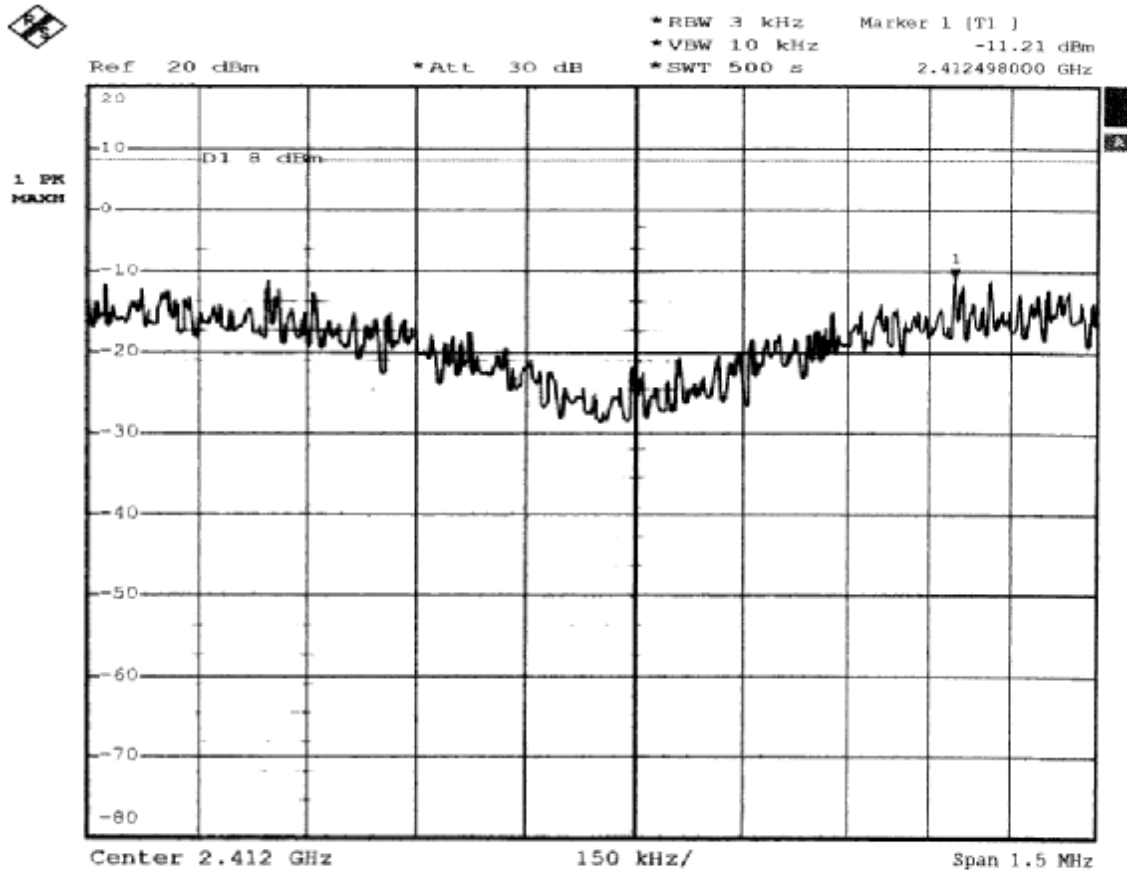

Comment A: Power spectrum density at low channel J(ATT=3dB CL=2dB

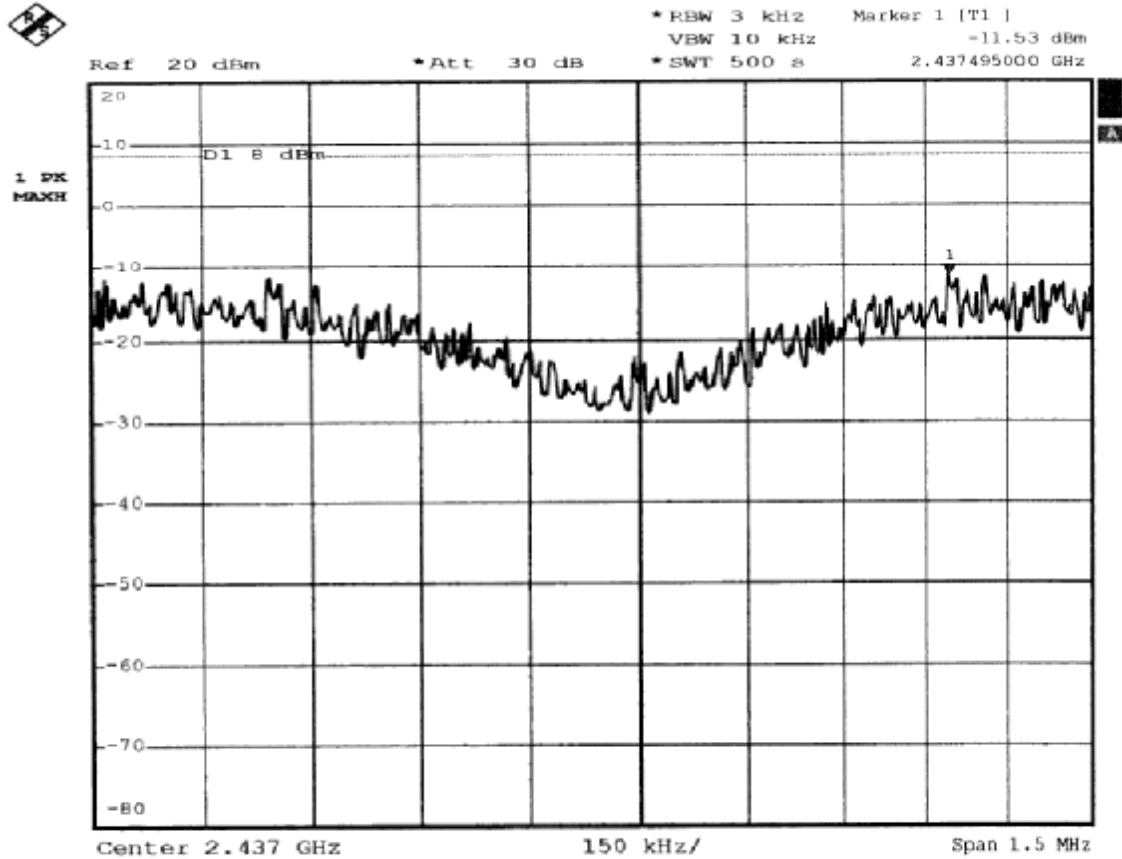

Comment A: Power spectrum density at middle channel\ Rohde&Schwarz\FSE
 ATT=3dB CL=2dB

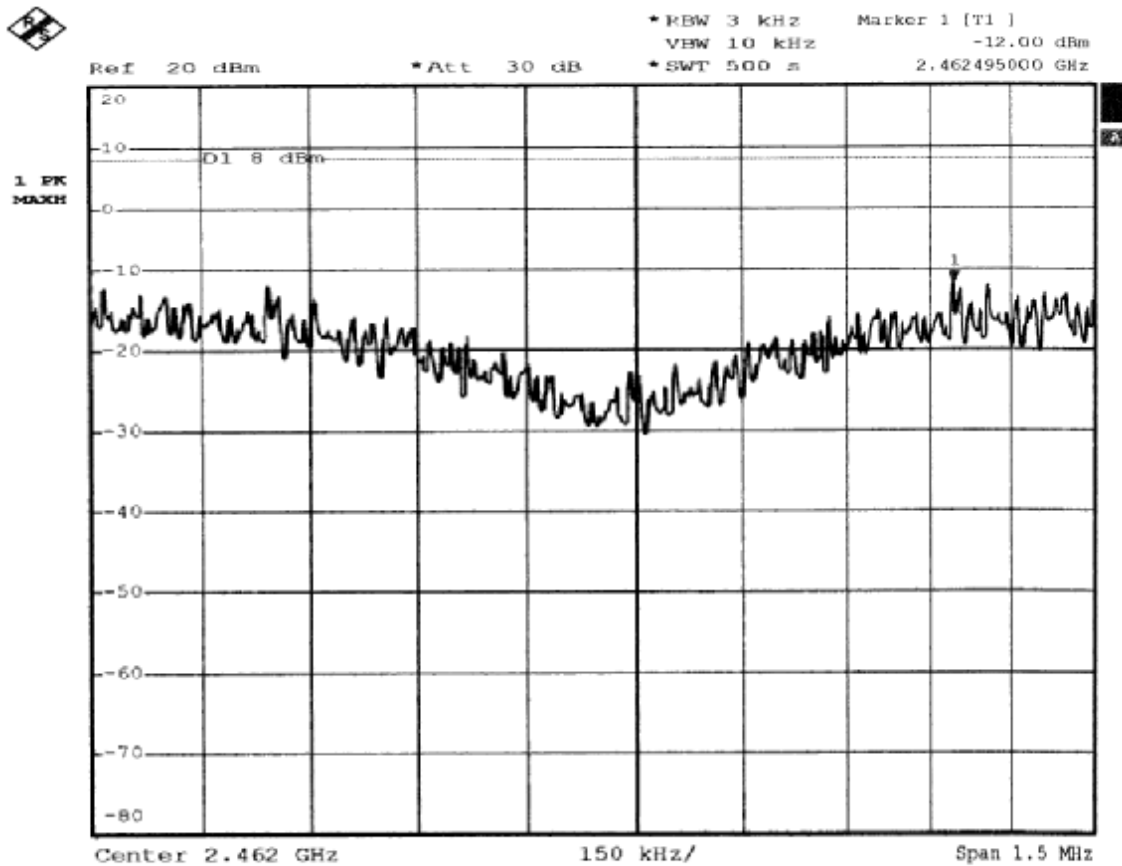


Comment A: Power spectrum density at high channel J1
 ATT=3dB CL=2dB

7. Emission on the band edge §FCC 15.247(C)


In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Please see the plot below.

7.1 Band-edge (Conducted method)

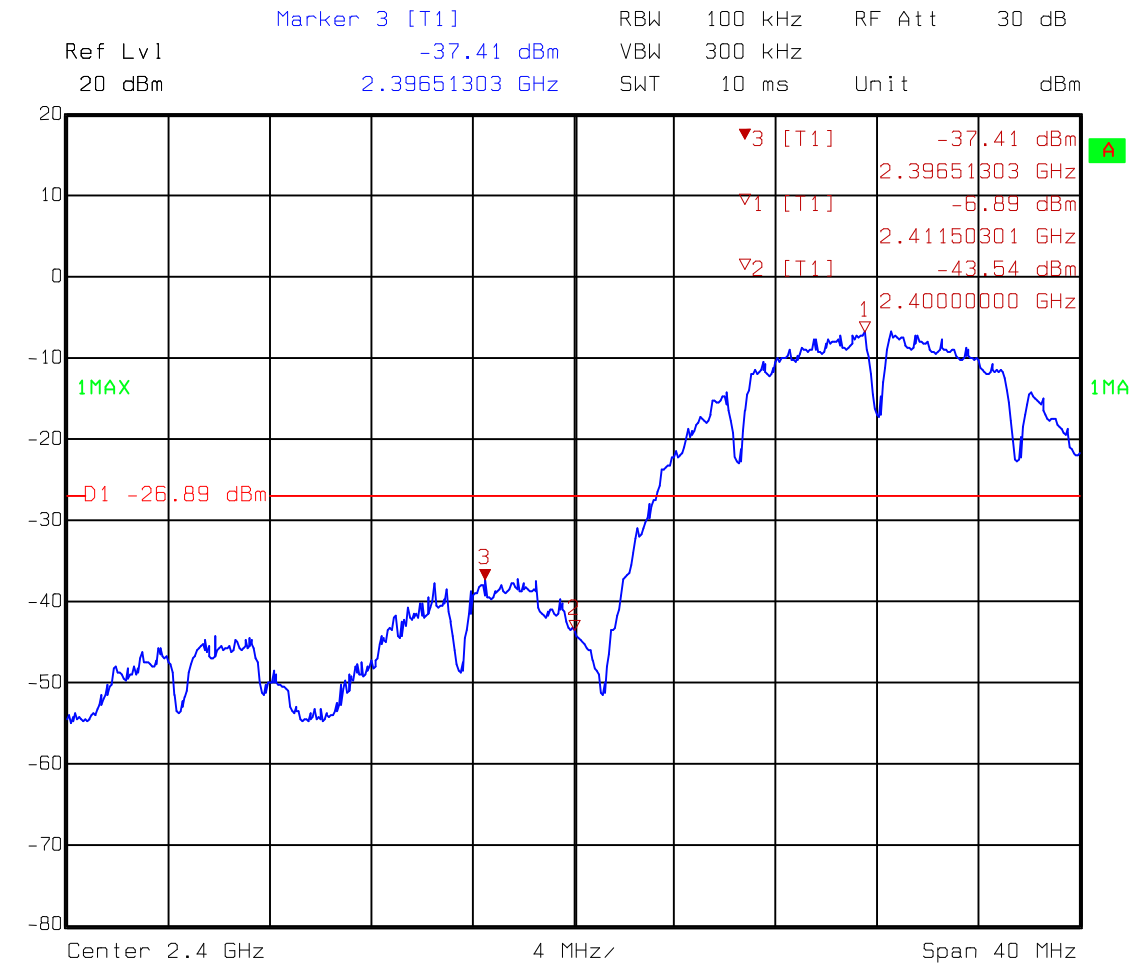


Comment A: Band-edge at low channel

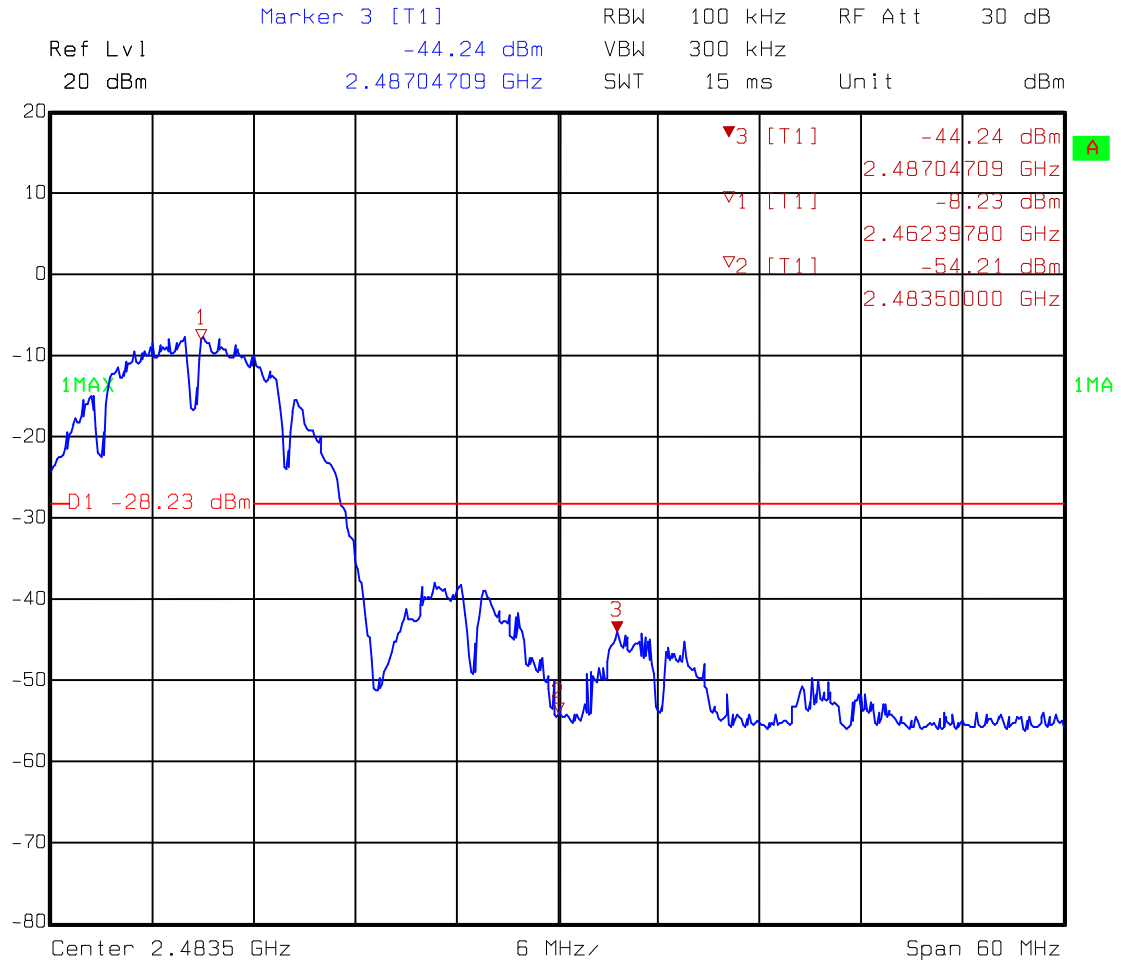


Comment A: Band-edge at high channel


7.2 Band-edge (Radiated method)

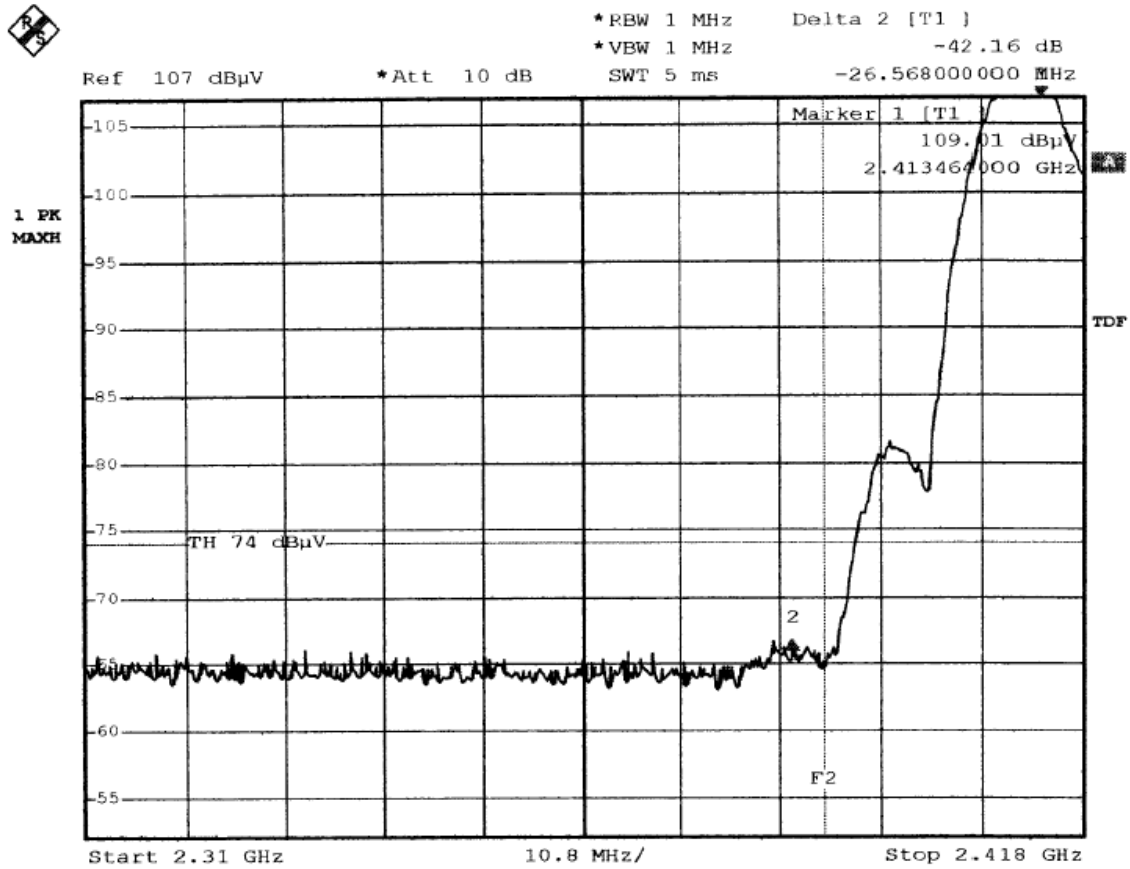


Comment A: Band-edge test at low channel0
 Peak detector F2=2390MHz

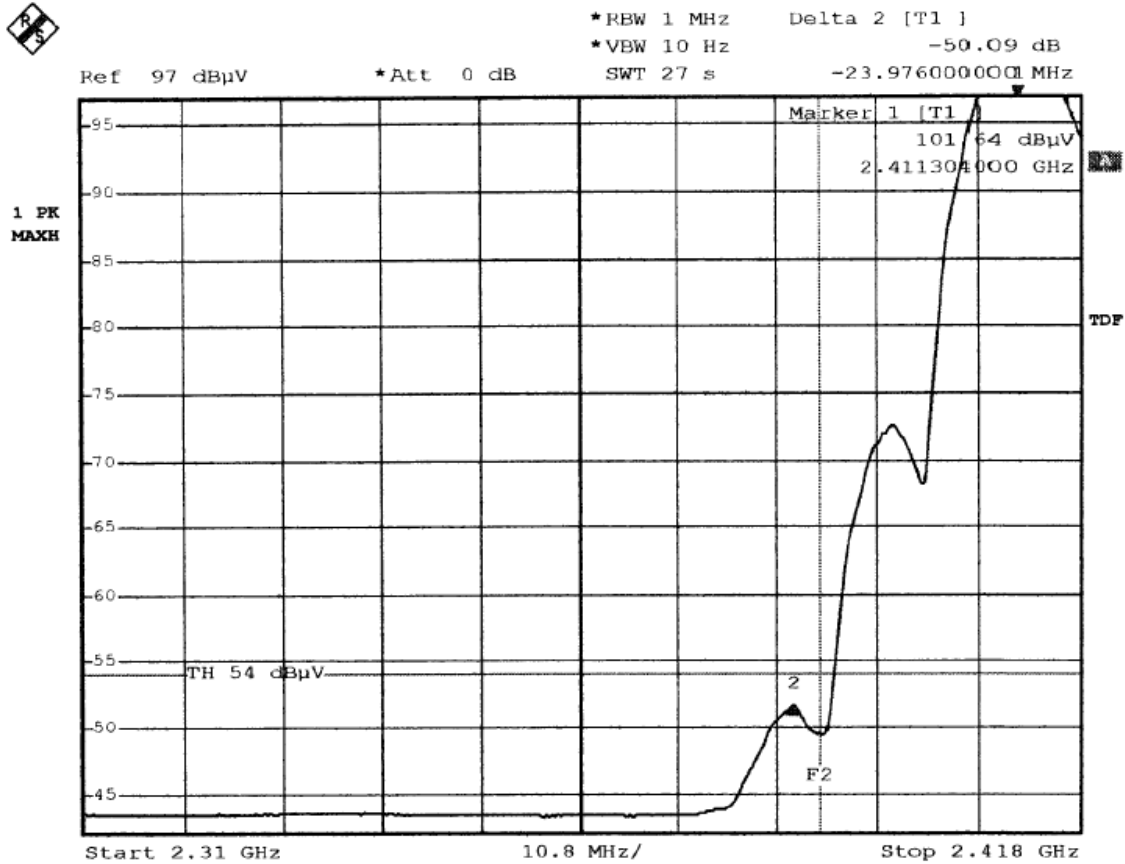

Comment A: Band-edge test at low channel EN B
Average detector F2=2390MHz

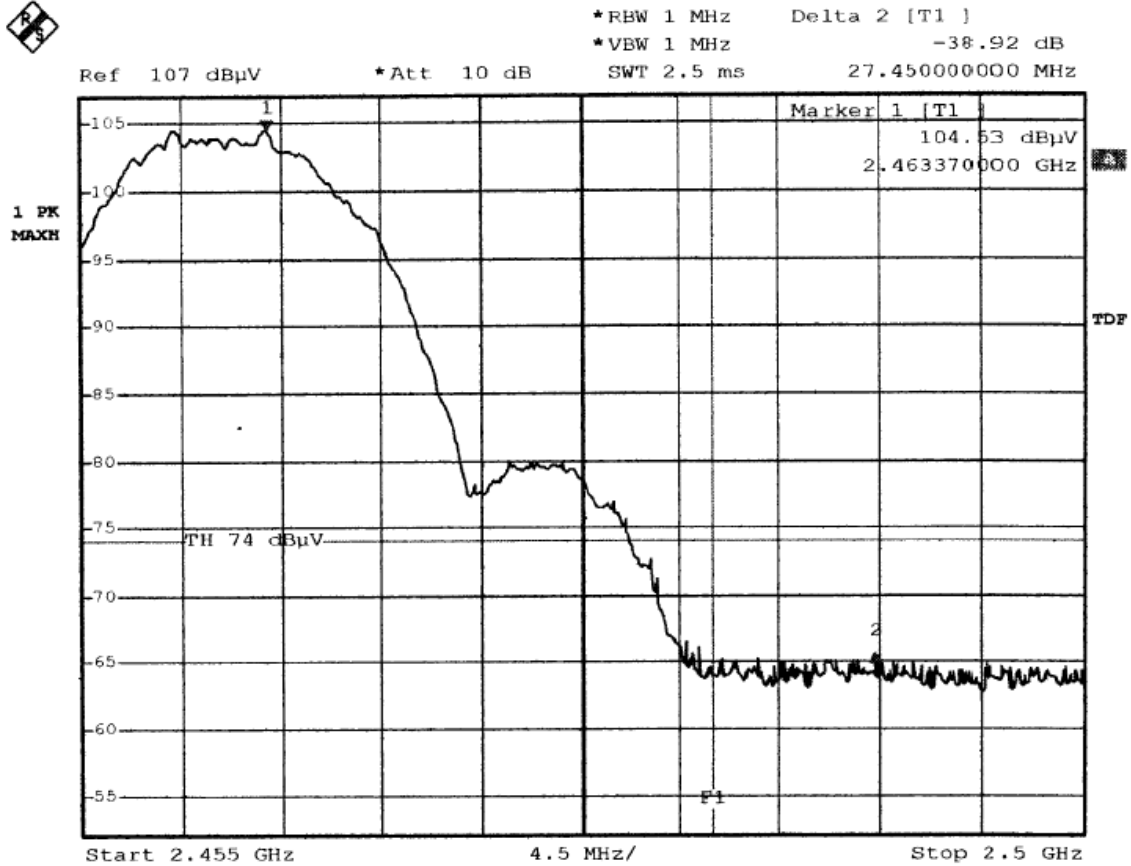

Comment A: Band-edge test at high channel
 Peak detector F1=2483.5MHz

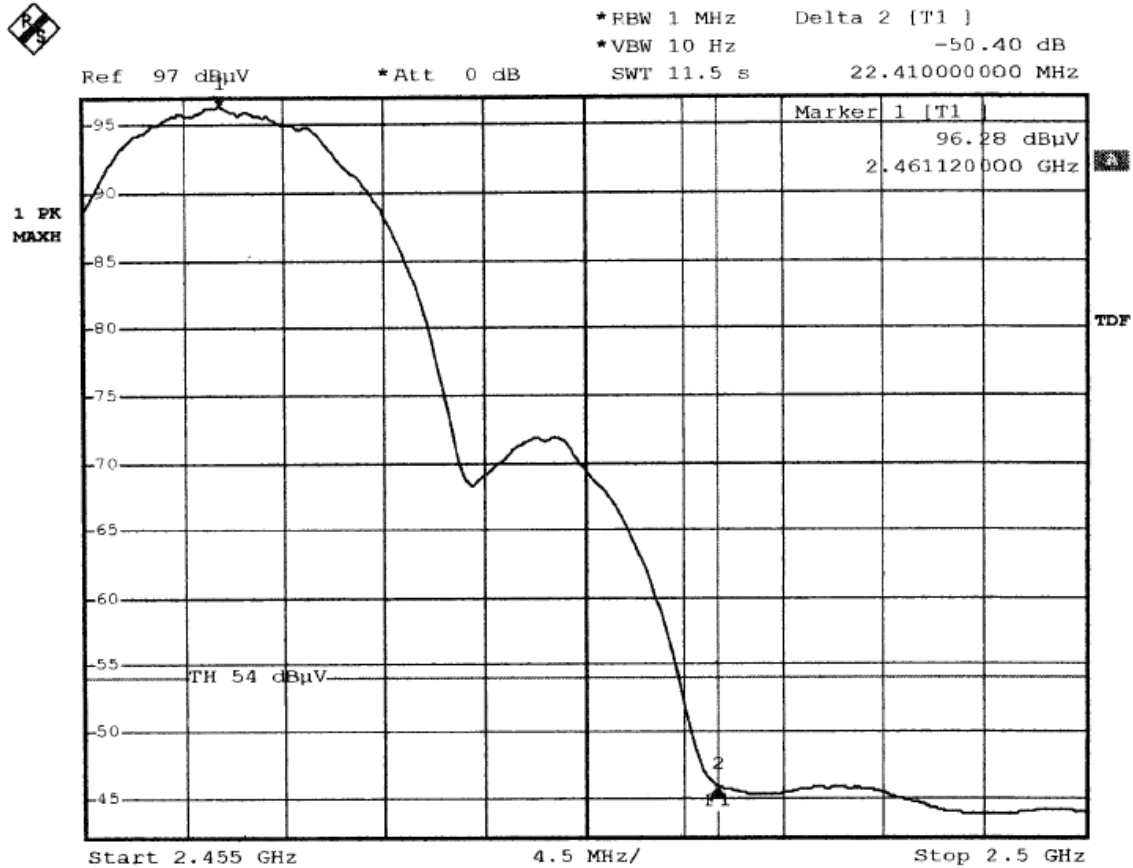


Comment A: Band-edge test at high channel F1=2483.5MHz
 Average detector F1=2483.5MHz

8. Power Line Conducted Emission test §FCC 15.207

8.1 Operating environment

Temperature:	22	°C	(10-40°C)
Relative Humidity:	60	%	(10-90%)
Atmospheric Pressure	1023	hPa	(860-1061hPa)

8.2 Test setup & procedure

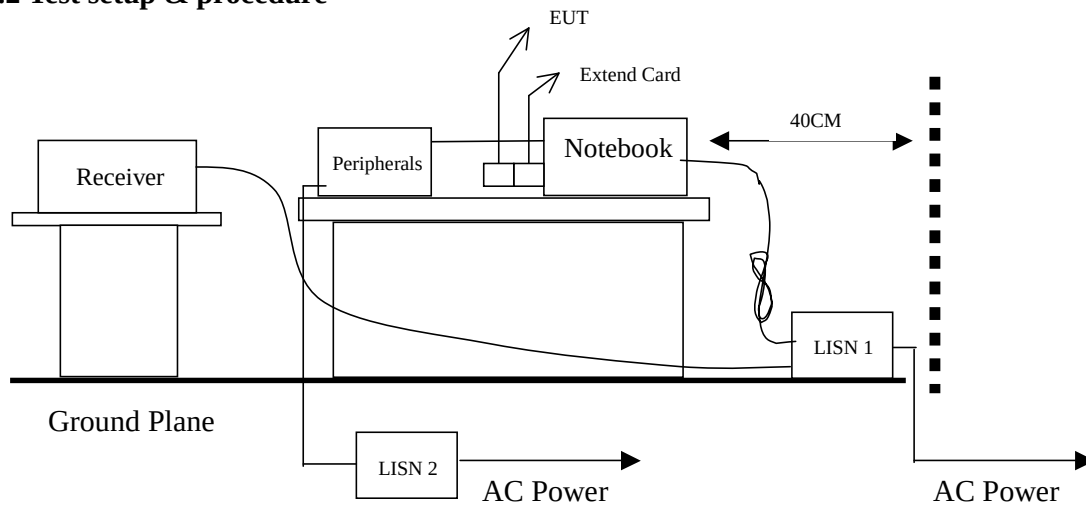

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/1992 on conducted measurement. The AC power conducted emissions was investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz. (15.207 paragraph)

The EUT configuration please refer to the “Conducted set-up photo.pdf”.

Emission Limit

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

*Decreases with the logarithm of the frequency.

8.3 Power Line Conducted Emission test data

(1) Line

EUT : B-120

Test Condition : Tx at low channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.15800	38.7	65.57	22.9	55.57	-26.87	-32.67
0.21400	41.6	63.05	30.0	53.05	-21.45	-23.05
0.35000	33.7	58.96	26.8	48.96	-25.26	-22.16
0.45400	27.3	56.81	24.6	46.81	-29.51	-22.21
1.27000	27.1	56.00	25.4	46.00	-28.90	-20.60
21.50200	34.8	60.00	34.8	50.00	-25.20	-15.20

(2) Neutral

EUT : B-120

Test Condition : Tx at low channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.15800	38.7	65.57	22.9	55.57	-26.87	-32.67
0.21400	41.6	63.05	30.0	53.05	-21.45	-23.05
0.35000	33.7	58.96	26.8	48.96	-25.26	-22.16
0.45400	27.3	56.81	24.6	46.81	-29.51	-22.21
1.27000	27.1	56.00	25.4	46.00	-28.90	-20.60
21.50200	34.8	60.00	34.8	50.00	-25.20	-15.20

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.
Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.

(1) Line

EUT : B-120

Test Condition : Tx at middle channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.15000	41.9	66.00	27.0	56.00	-24.10	-29.00
0.20600	42.8	63.37	30.4	53.37	-20.57	-22.97
0.45400	27.2	56.81	24.9	46.81	-29.61	-21.91
0.81400	25.6	56.00	20.4	46.00	-30.40	-25.60
1.37400	26.5	56.00	24.9	46.00	-29.50	-21.10
21.50200	37.3	60.00	37.3	50.00	-22.70	-12.70

(2) Neutral

EUT : B-120

Test Condition : Tx at middle channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.21400	39.9	63.05	28.0	53.05	-23.15	-25.05
0.35000	34.4	58.96	26.9	48.96	-24.56	-22.06
0.45400	25.9	56.81	23.7	46.81	-30.91	-23.11
0.70200	23.7	56.00	20.7	46.00	-32.30	-25.30
1.26200	24.4	56.00	20.0	46.00	-31.60	-26.00
21.50200	38.6	60.00	38.5	50.00	-21.40	-11.50

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.
Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.

(1) Line

EUT : B-120

Test Condition : Tx at high channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.23000	35.2	62.45	21.0	52.45	-27.25	-31.45
0.35000	33.5	58.96	28.1	48.96	-25.46	-20.86
0.45400	27.8	56.81	24.8	46.81	-29.01	-22.01
0.79800	19.6	56.00	10.1	46.00	-36.40	-35.90
1.26200	26.7	56.00	20.8	46.00	-29.30	-25.20
21.50200	39.0	60.00	38.8	50.00	-21.00	-11.20

(2) Neutral

EUT : B-120

Test Condition : Tx at high channel

Freq. (MHz)	Reading (dB μ V) QP	Limit (dB μ V) QP	Reading (dB μ V) AV	Limit (dB μ V) AV	Margin (dB)	
					QP	AV
0.23000	37.3	62.45	29.7	52.45	-25.15	-22.75
0.31000	28.1	59.97	10.0	49.97	-31.87	-39.97
0.35000	34.0	58.96	24.4	48.96	-24.96	-24.56
0.45400	28.1	56.81	25.1	46.81	-28.71	-21.71
1.26200	25.8	56.00	22.8	46.00	-30.20	-23.20
21.50200	38.7	60.00	38.6	50.00	-21.30	-11.40

Remark:

1. The reading value included cable loss and LISN factor.
2. Uncertainty was calculated in accordance with NAMAS NIS 81.
Expanded uncertainty (k=2) of conducted emission measurement is ± 2.6 dB.

Please see the plot below.


Intertek Testing Services RF VOLTAGE

EUT: B-120
Manuf: ZyXEL Communications Corp.
Op Cond: AMN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 22'c 60%RH tx at low channel
Date: 11. Feb 03 10:06

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s

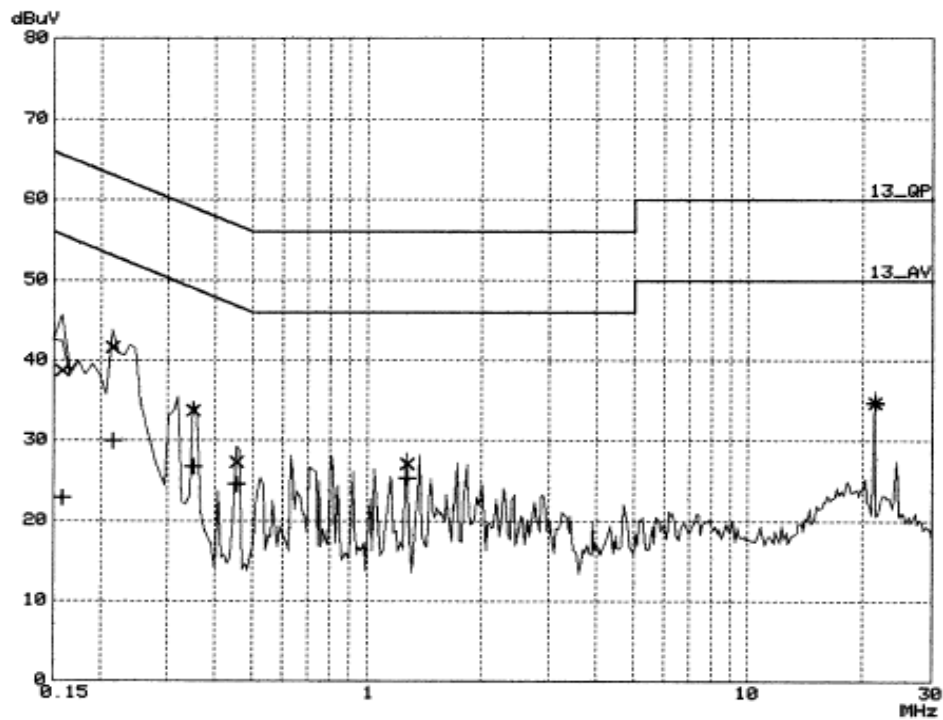


Intertek Testing Services RF VOLTAGE

EUT: B-120
Manuf: ZyXEL Communications Corp.
Op Cond: AMN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 22'c 60%RH tx at low channel
Date: 11. Feb 03 09:51

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s

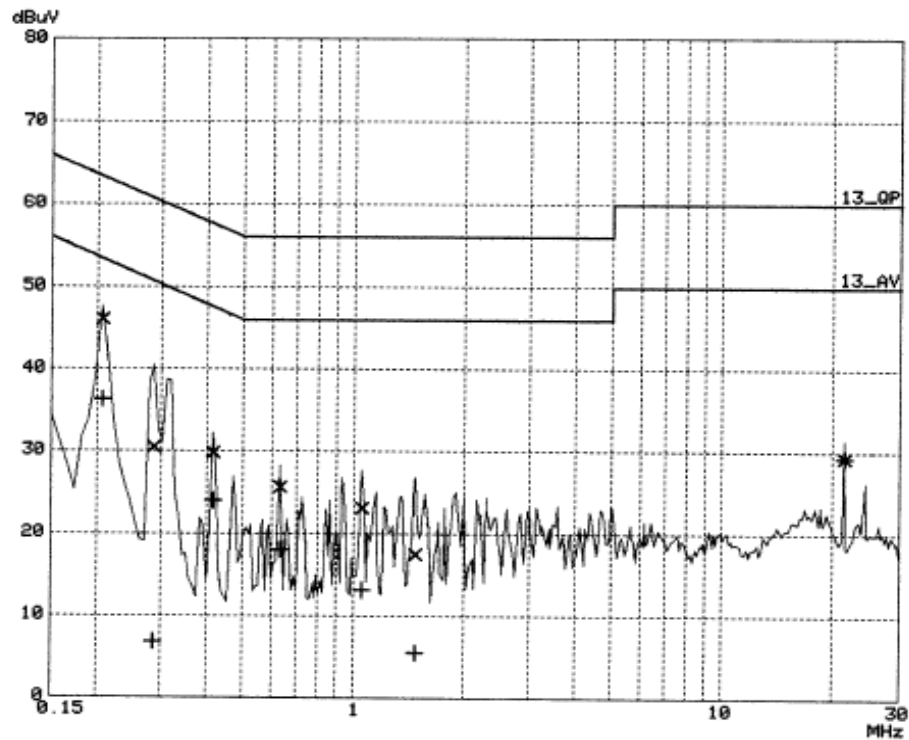


Intertek Testing Services RF VOLTAGE

EUT: B-120
Manuf: ZyXEL Communications Corp.
Op Cond: AMN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 22'c 60%RH tx at middle channel
Date: 11. Feb 03 10:37

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s

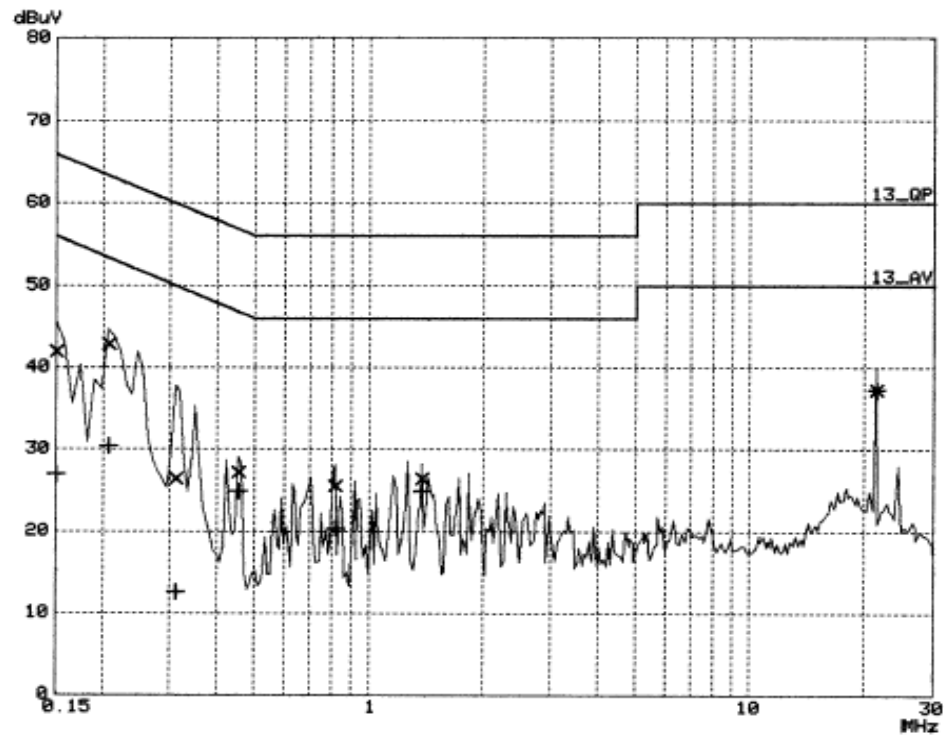


Intertek Testing Services RF VOLTAGE

EUT: B-120
Manuf: ZyXEL Communications Corp.
Op Cond: AMN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 22'c 60%RH tx at middle channel
Date: 11. Feb 03 10:57

Scan Settings (1 Range)

Frequencies			Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten Preamp
150k	30M	8k	9k	PK	20ms AUTO	LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s

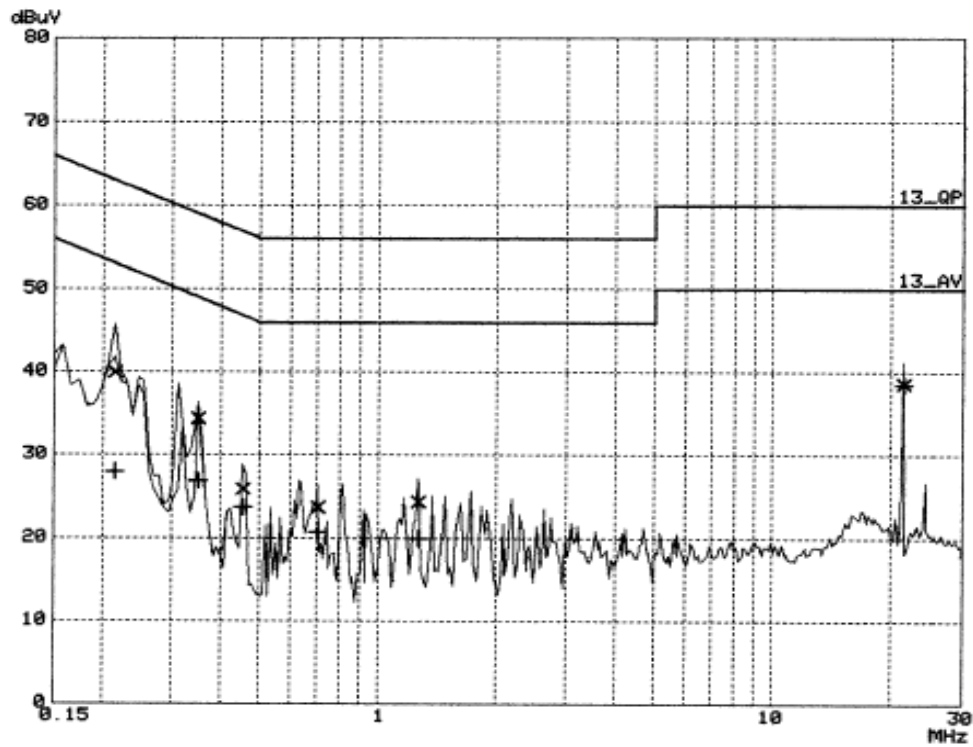


Intertek Testing Services RF VOLTAGE

EUT: B-120
Manuf: ZyXEL Communications Corp.
Op Cond: AMN-L
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 22'c 60%RH tx at high channel
Date: 11. Feb 03 11:17

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s

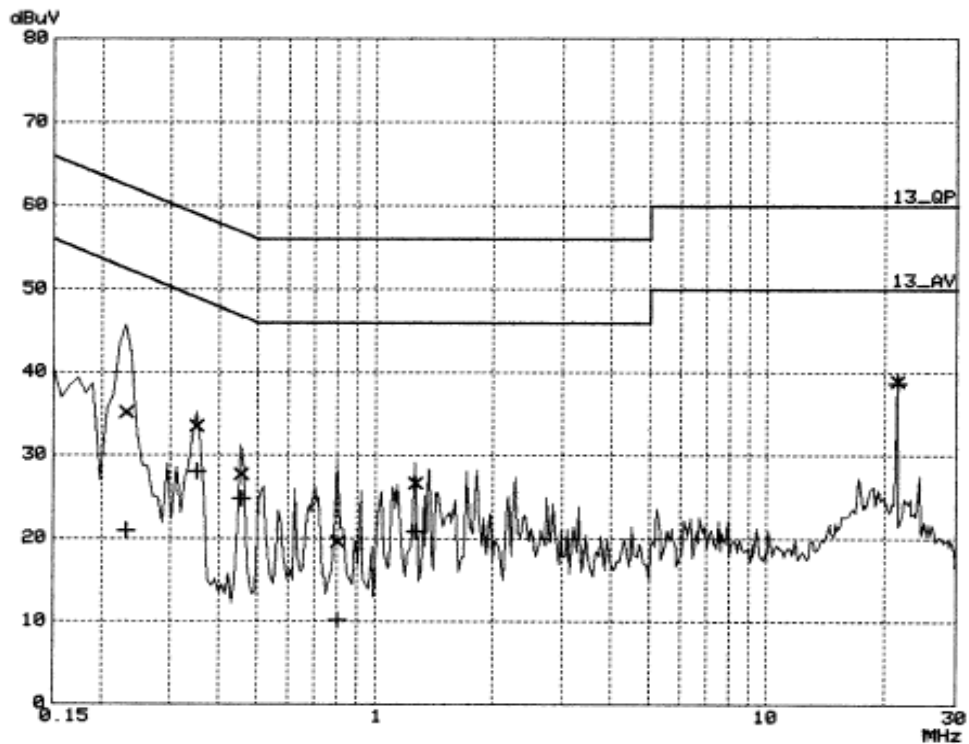

Intertek Testing Services RF VOLTAGE

EUT: B-120
Manuf: ZyXEL Communications Corp.
Op Cond: AMN-N
Operator: kaysi
Test Spec: FCC Class B
Comment: EMI RCV:825788/015
120V 60Hz 22°C 60%RH tx at high channel
Date: 11. Feb 03 11:09

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	30M	8k	9k	PK	20ms	AUTO	LN OFF

Final Measurement: x QP / + AV
Meas Time: 1 s

