



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : M2101K6G
FCC ID : 2AFZZK6G
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 28, 2020 and testing was completed on Dec. 25, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB Bandwidth Measurement	12
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	17
3.5 Radiated Band Edges and Spurious Emission Measurement	30
3.6 AC Conducted Emission Measurement.....	34
3.7 Antenna Requirements.....	36
4 LIST OF MEASURING EQUIPMENT	37
5 UNCERTAINTY OF EVALUATION	38
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR0N2803C	Rev. 01	Initial issue of report	Dec. 30, 2020

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.06 dB at 2483.500 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.81 dB at 0.215 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Redmi
Model Name	M2101K6G
FCC ID	2AFZZK6G
EUT supports Radios application	GSM/WCDMA/LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE FM Reciever and GNSS
IMEI Code	Conducted: 861489050004665/861489050004673 Conduction: 861489050007288/861489050007296 Radiation: 861489050005944/861489050005941
HW Version	P2
SW Version	MIUI 12
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three types of EUT, the sample 1 is 6+64GB capacity, the sample 2 is 6+128GB capacity and the sample 3 is 8+128GB capacity. According to the difference, we choose the sample 1 to full test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 20.69 dBm (0.1172 W) 802.11g : 19.22 dBm (0.0836 W) 802.11n HT20 : 18.22 dBm (0.0664 W) 802.11n HT40 : 18.69 dBm (0.0740 W)
Antenna Type / Gain	PIFA Antenna type with gain -0.17 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH05-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		


2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

Test Cases	
AC Conducted Emission	Mode 1 :GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable 1(Charging from Adapter) + Earphone
Remark: For Radiated Test Cases, The tests were performed with Adapter, Earphone and USB Cable 1.	

2.3 Connection Diagram of Test System

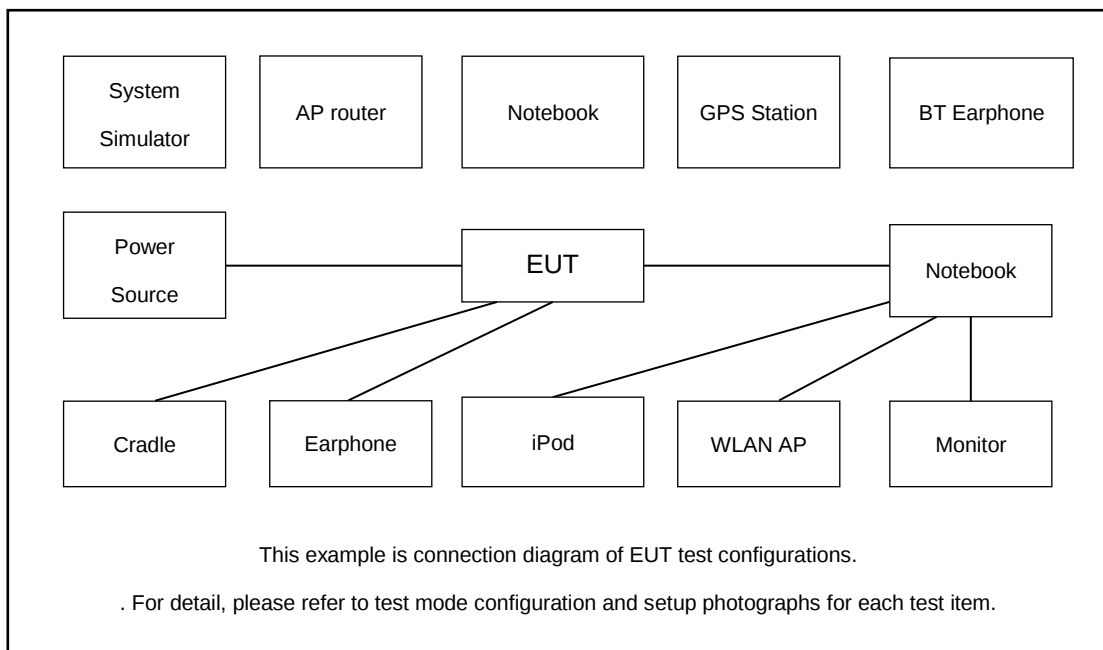

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} \\ &= 5.8 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB Bandwidth Measurement

3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz..
5. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

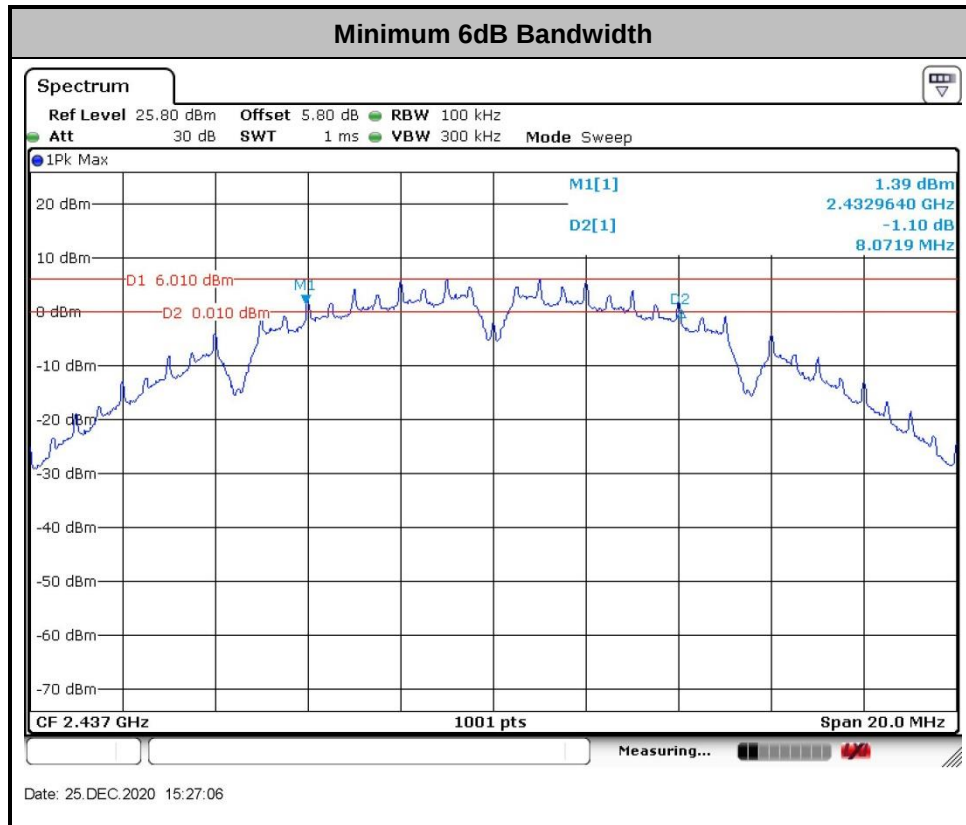

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.2 Method AVGPM-G method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

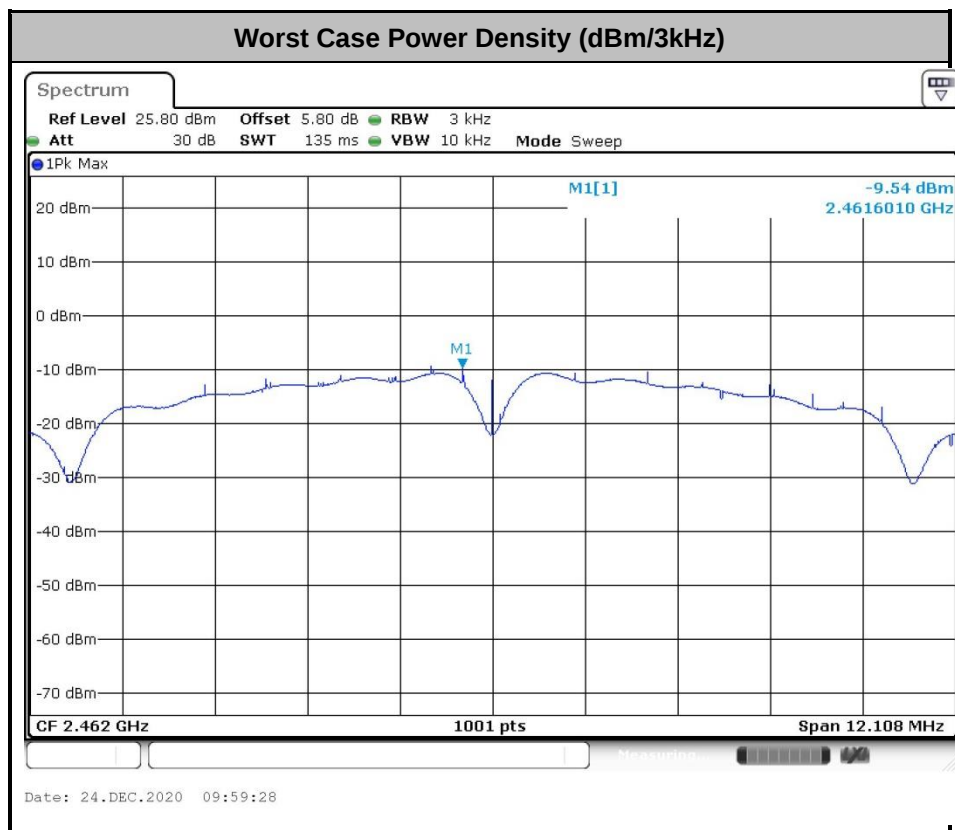

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Rise liu	Temperature :	21~25°C
		Relative Humidity :	51~54%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

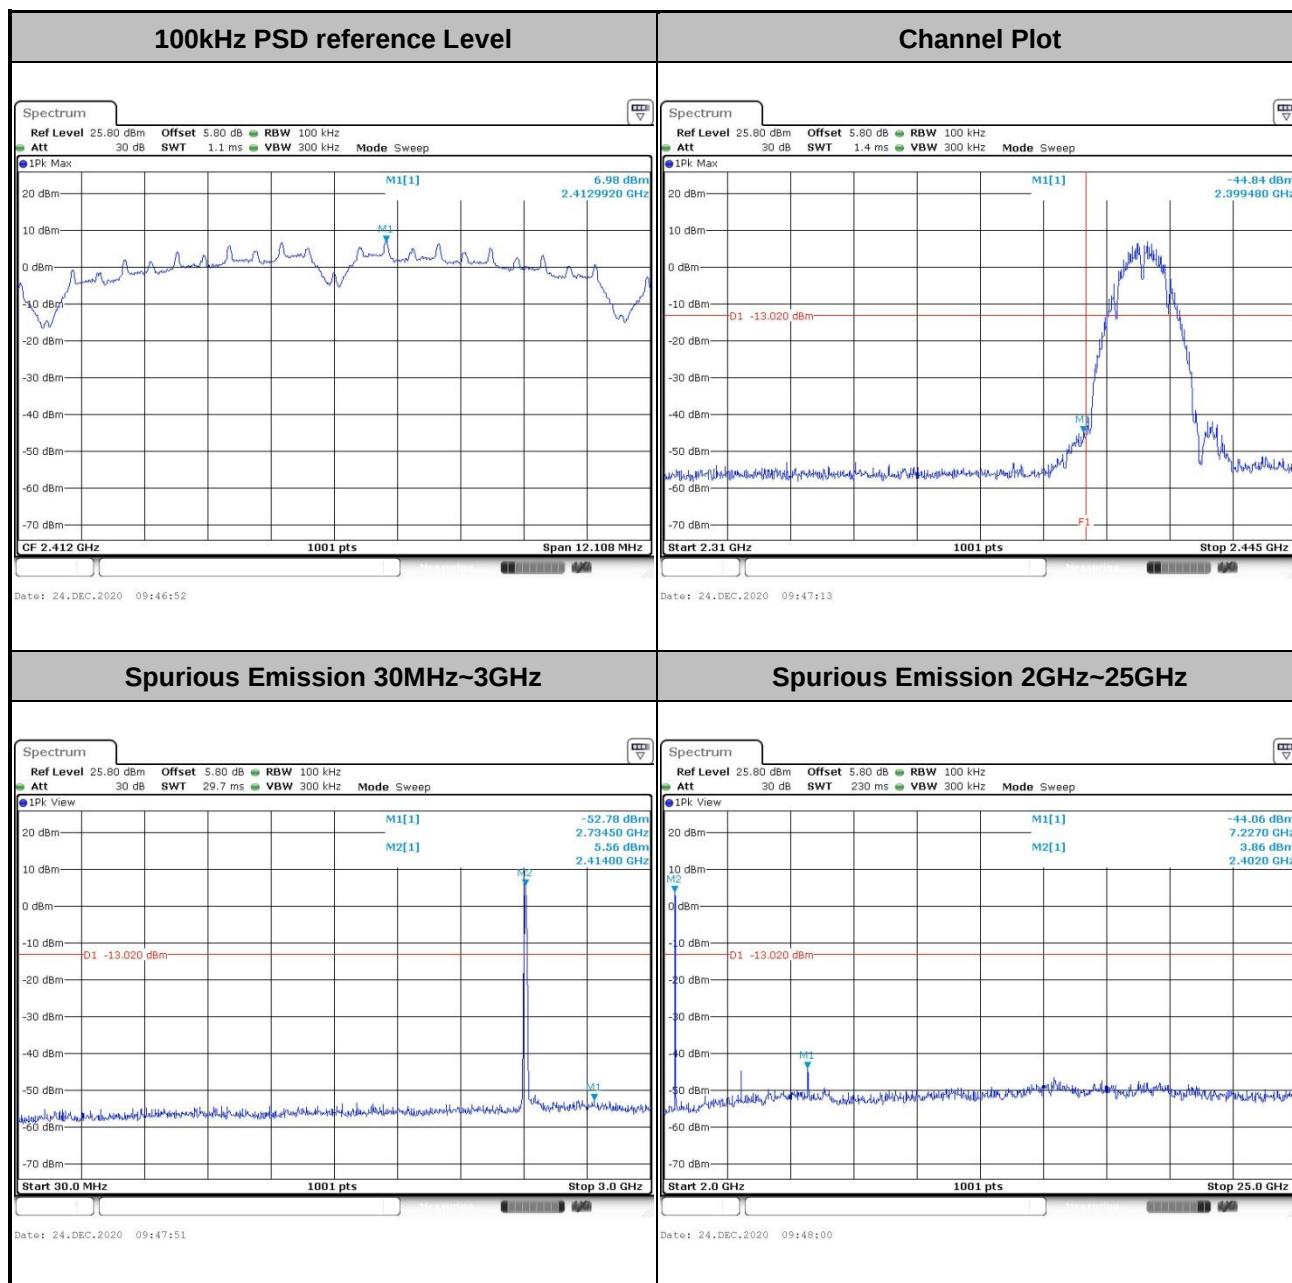




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

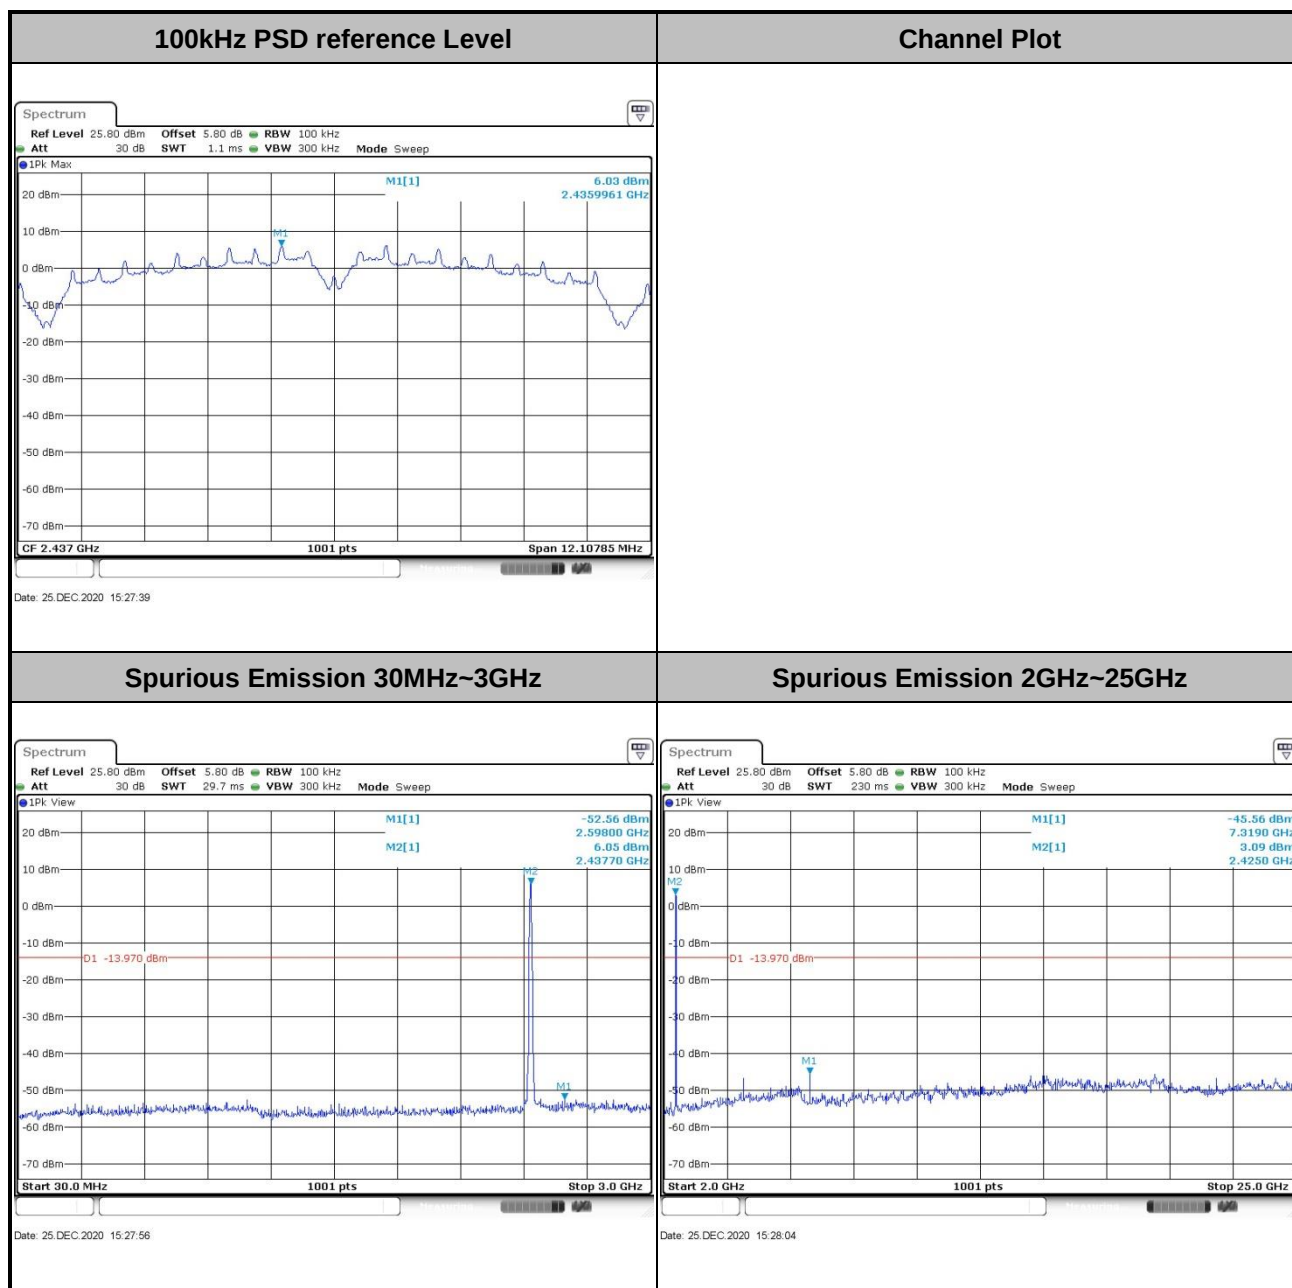




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

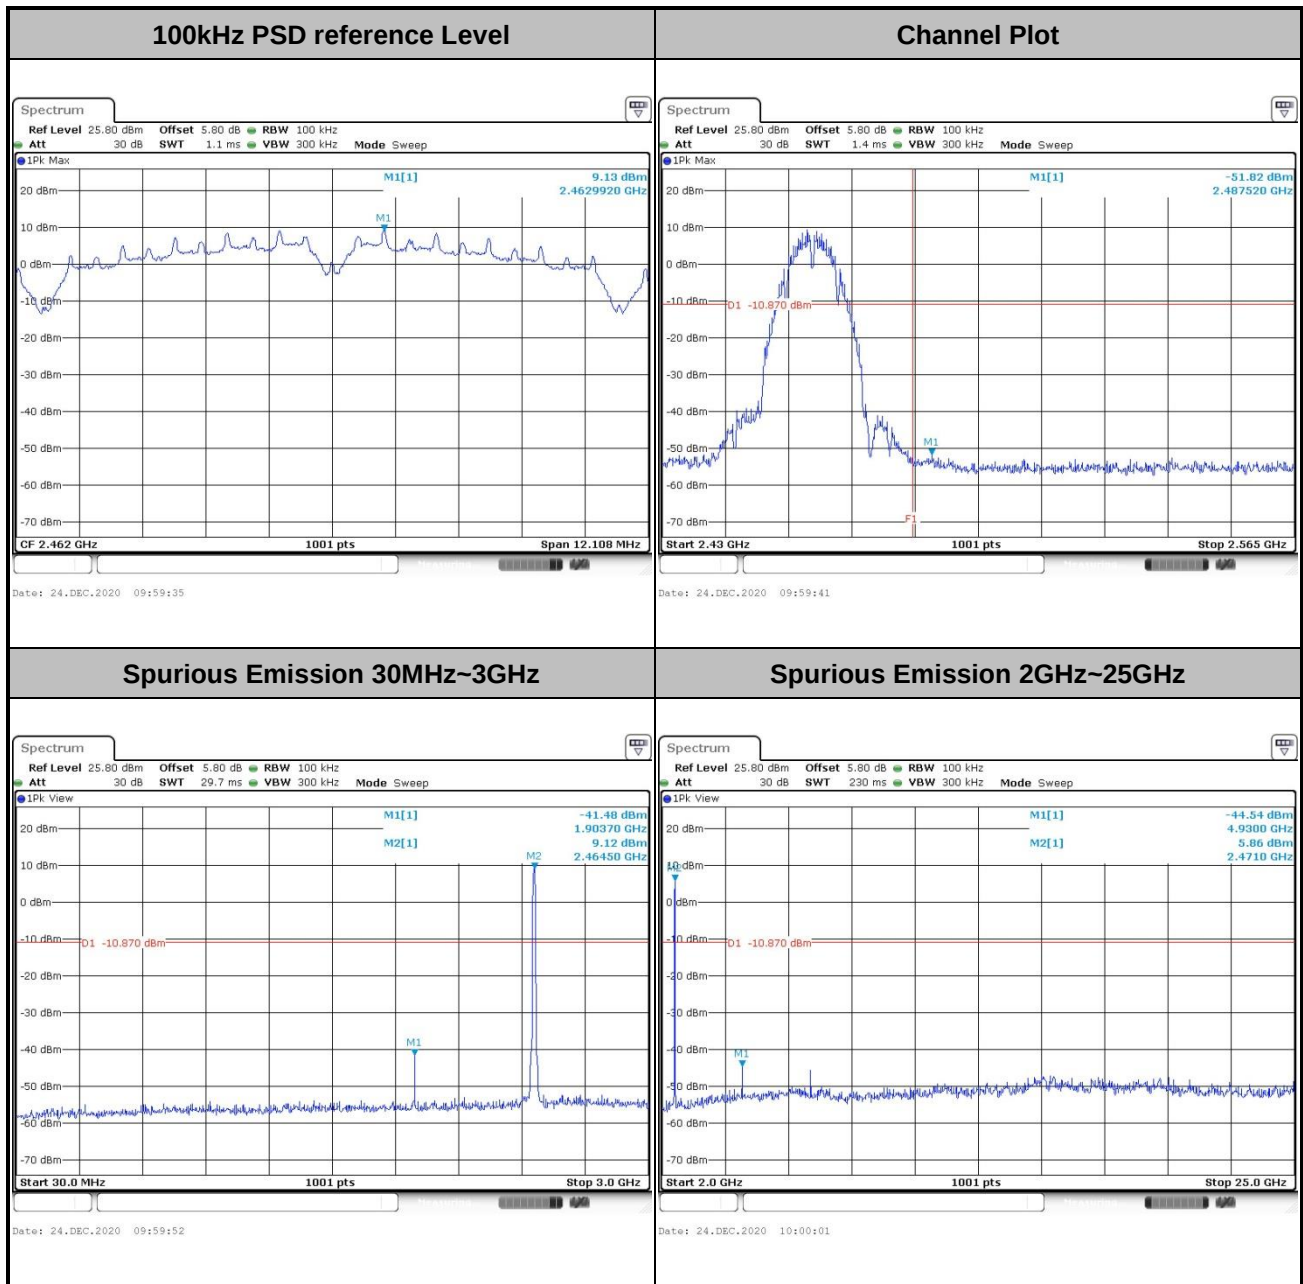




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

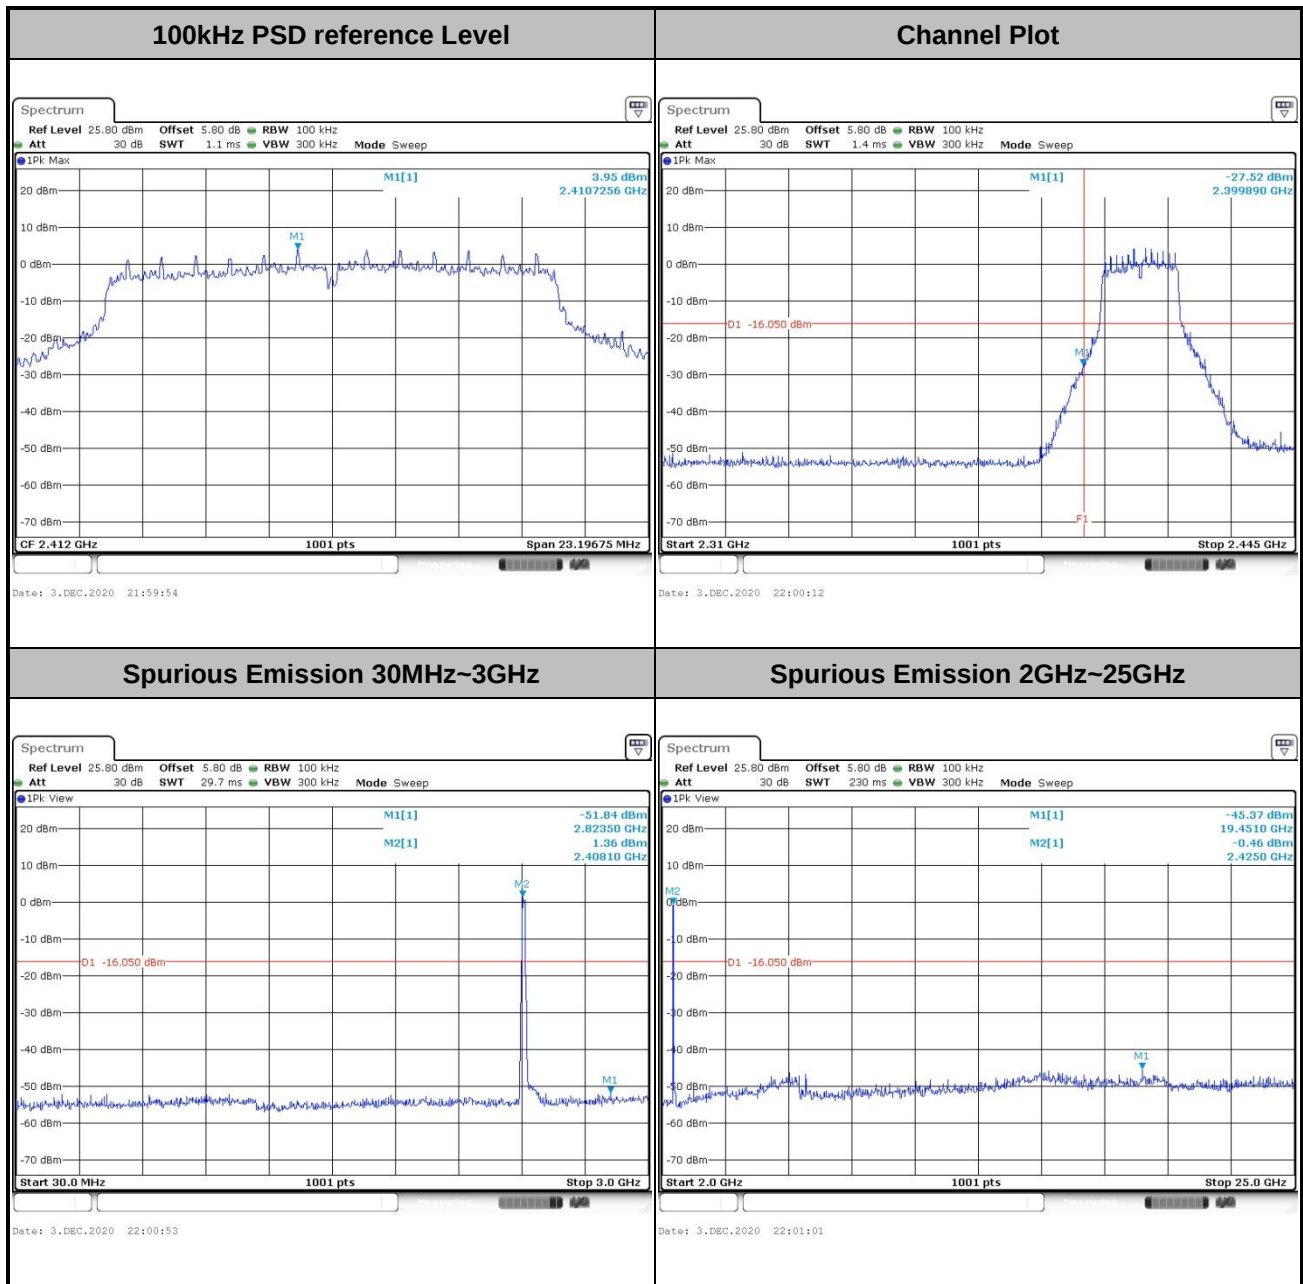




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

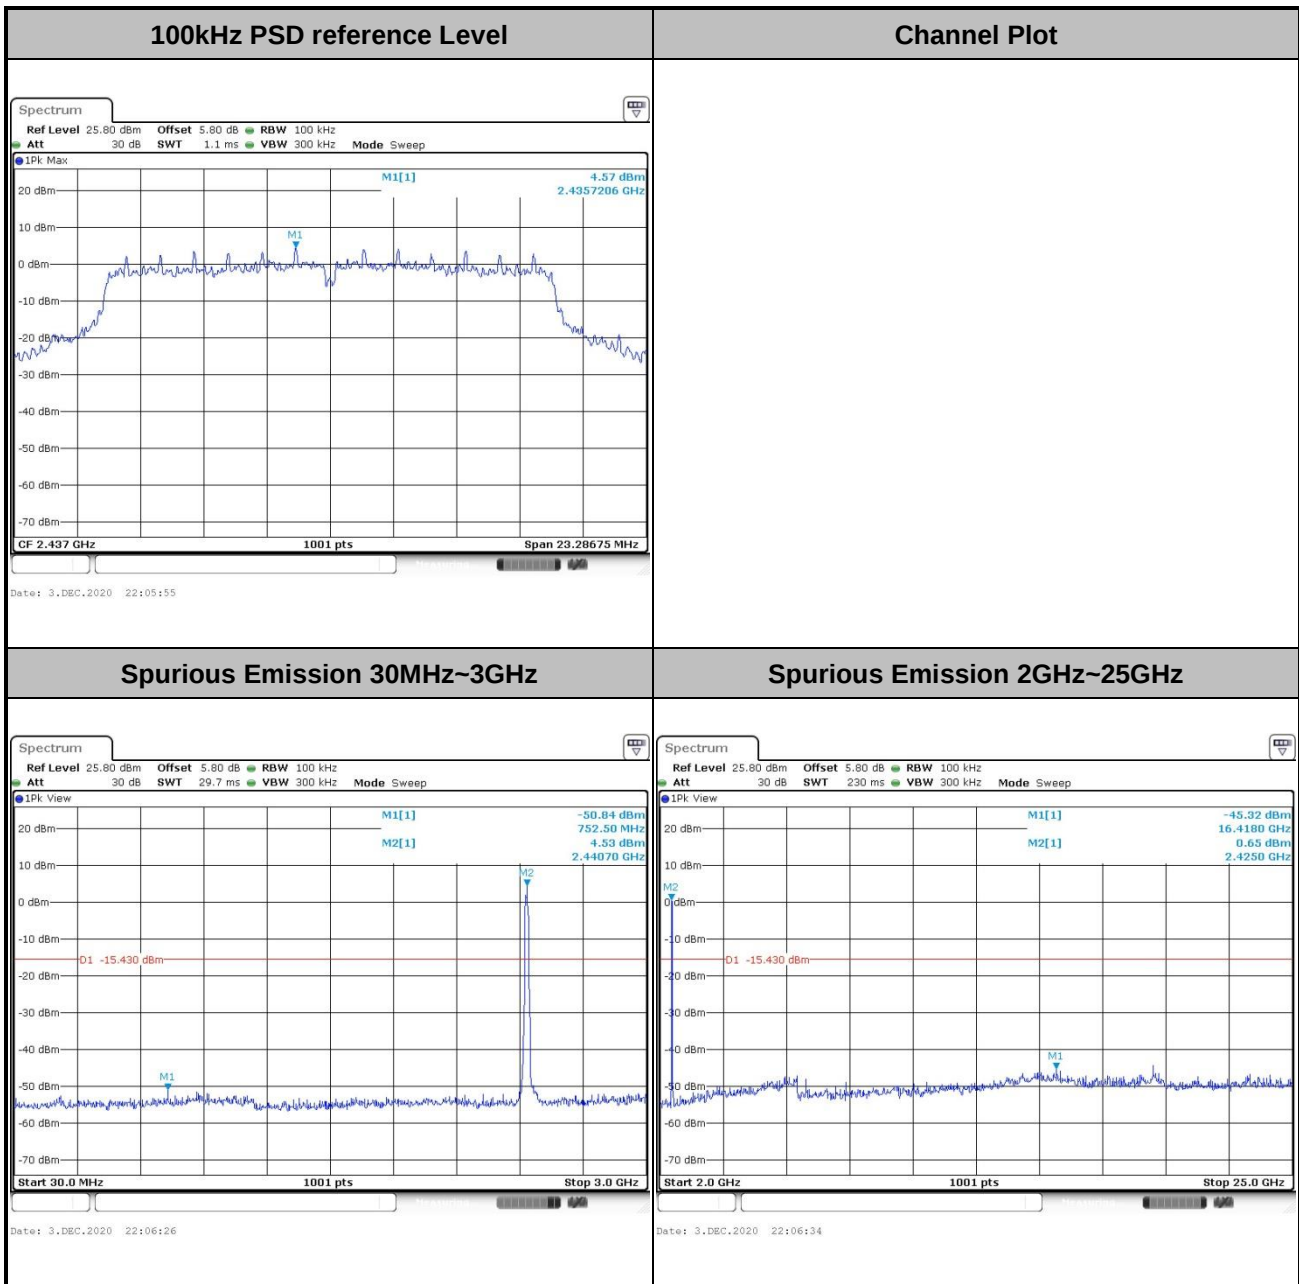





Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

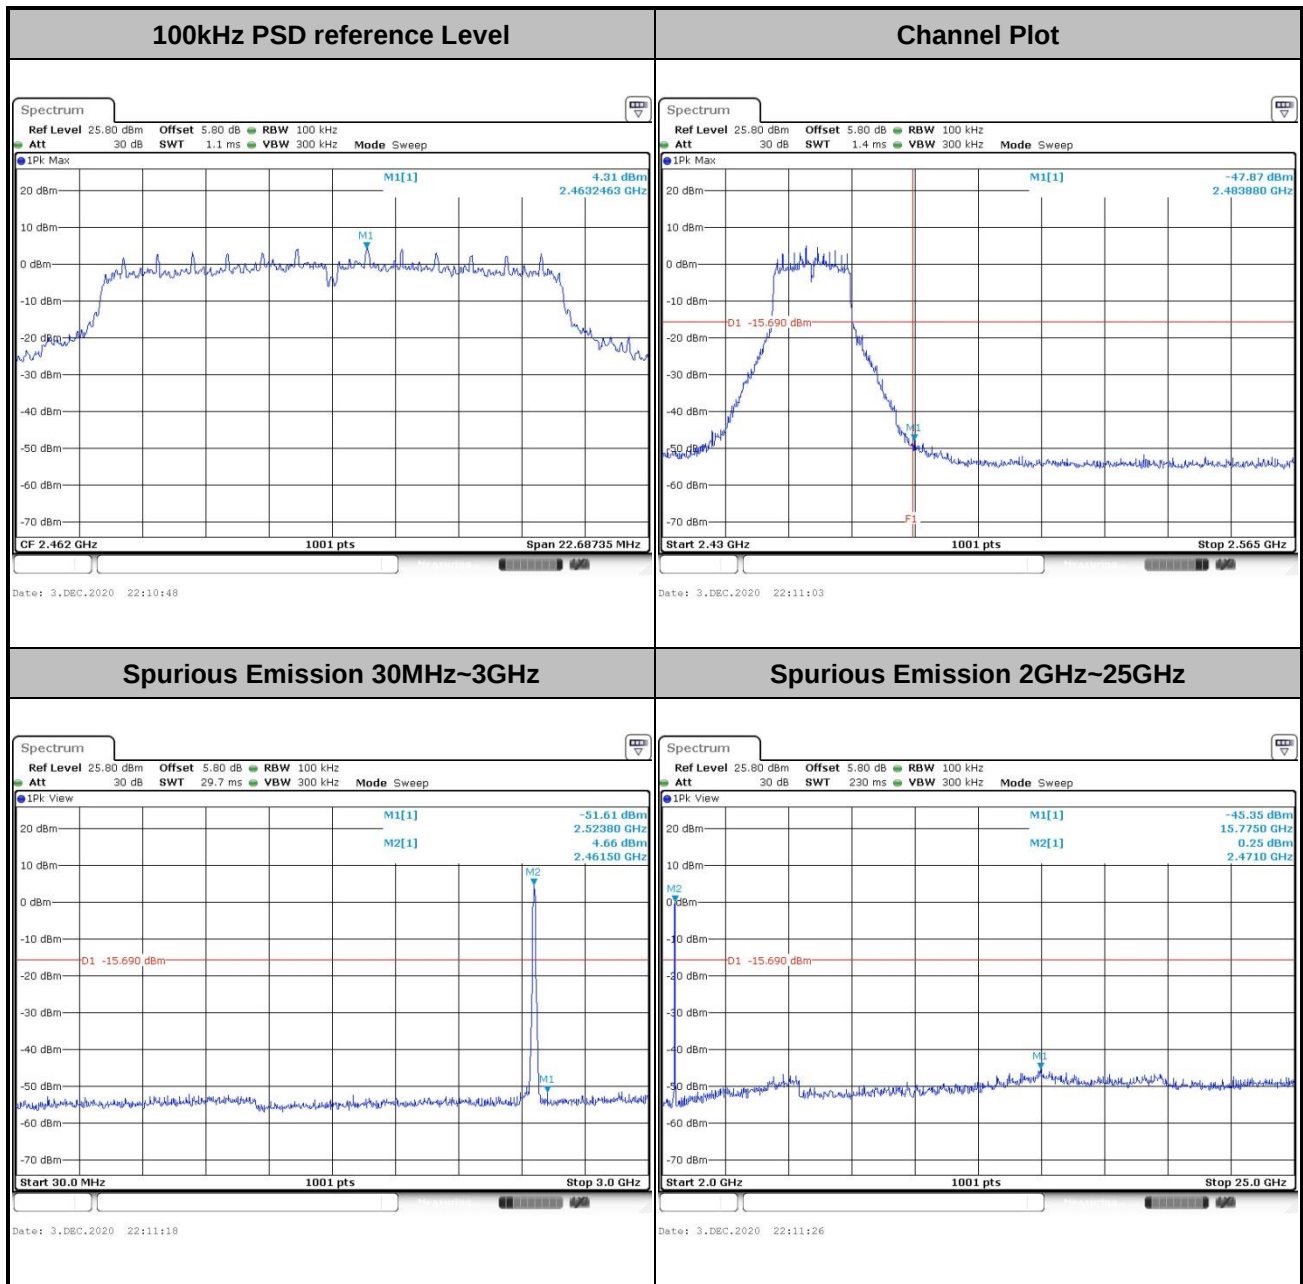




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

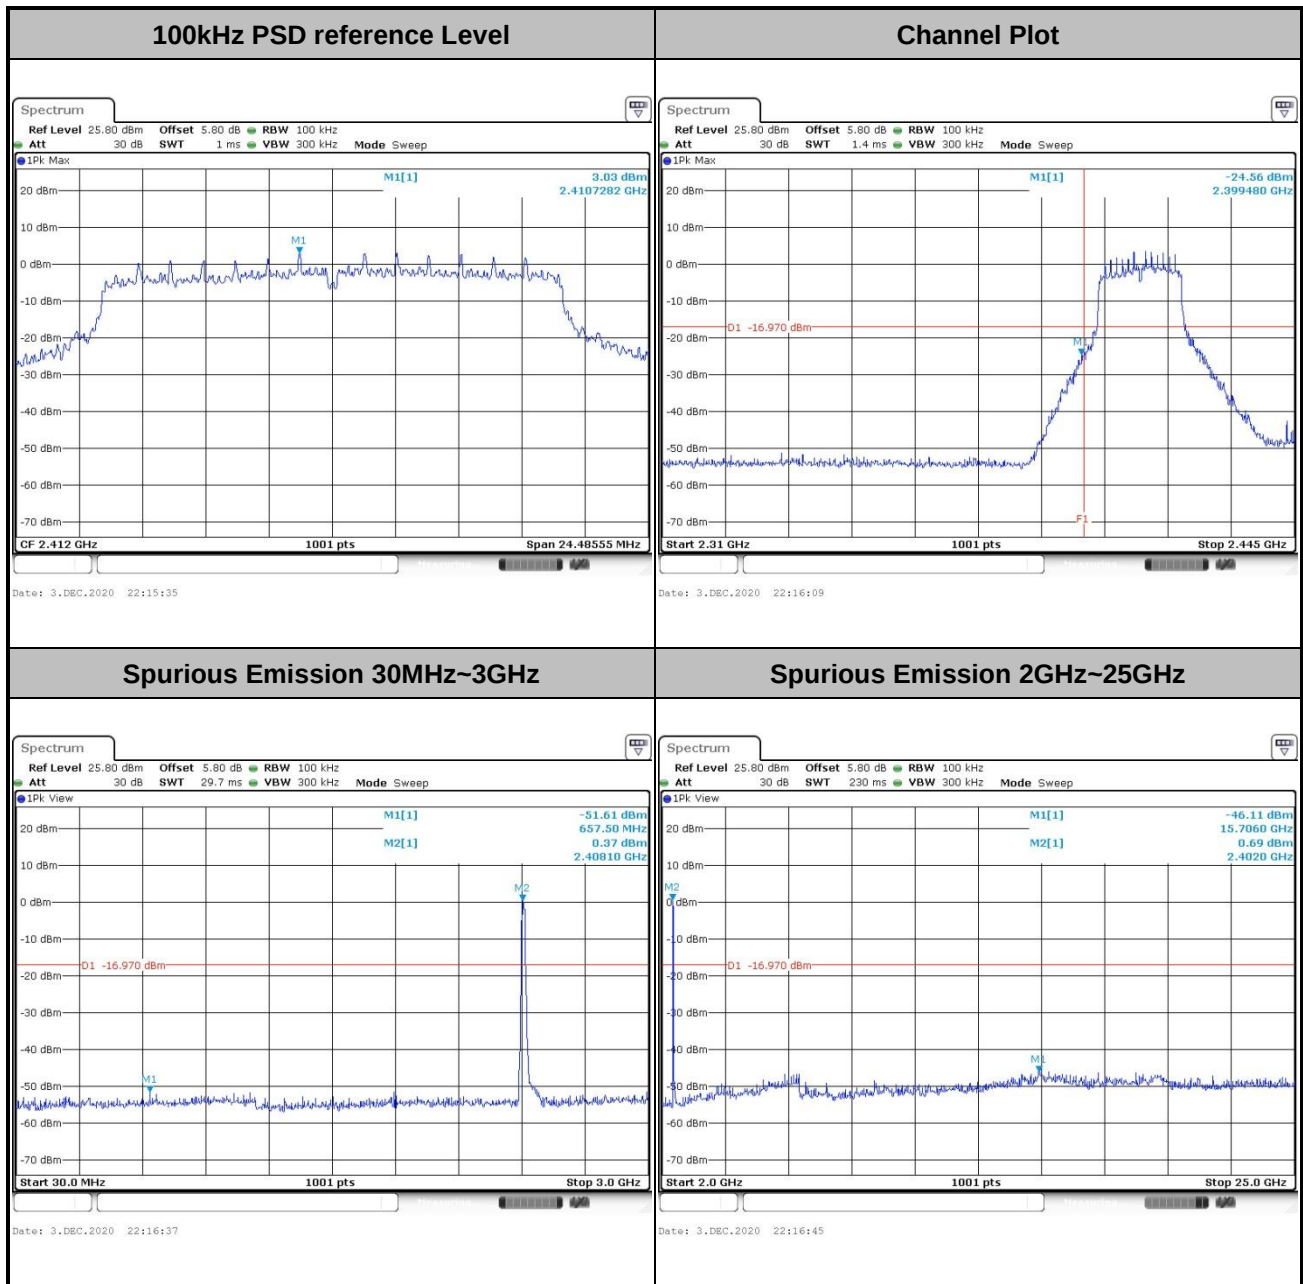

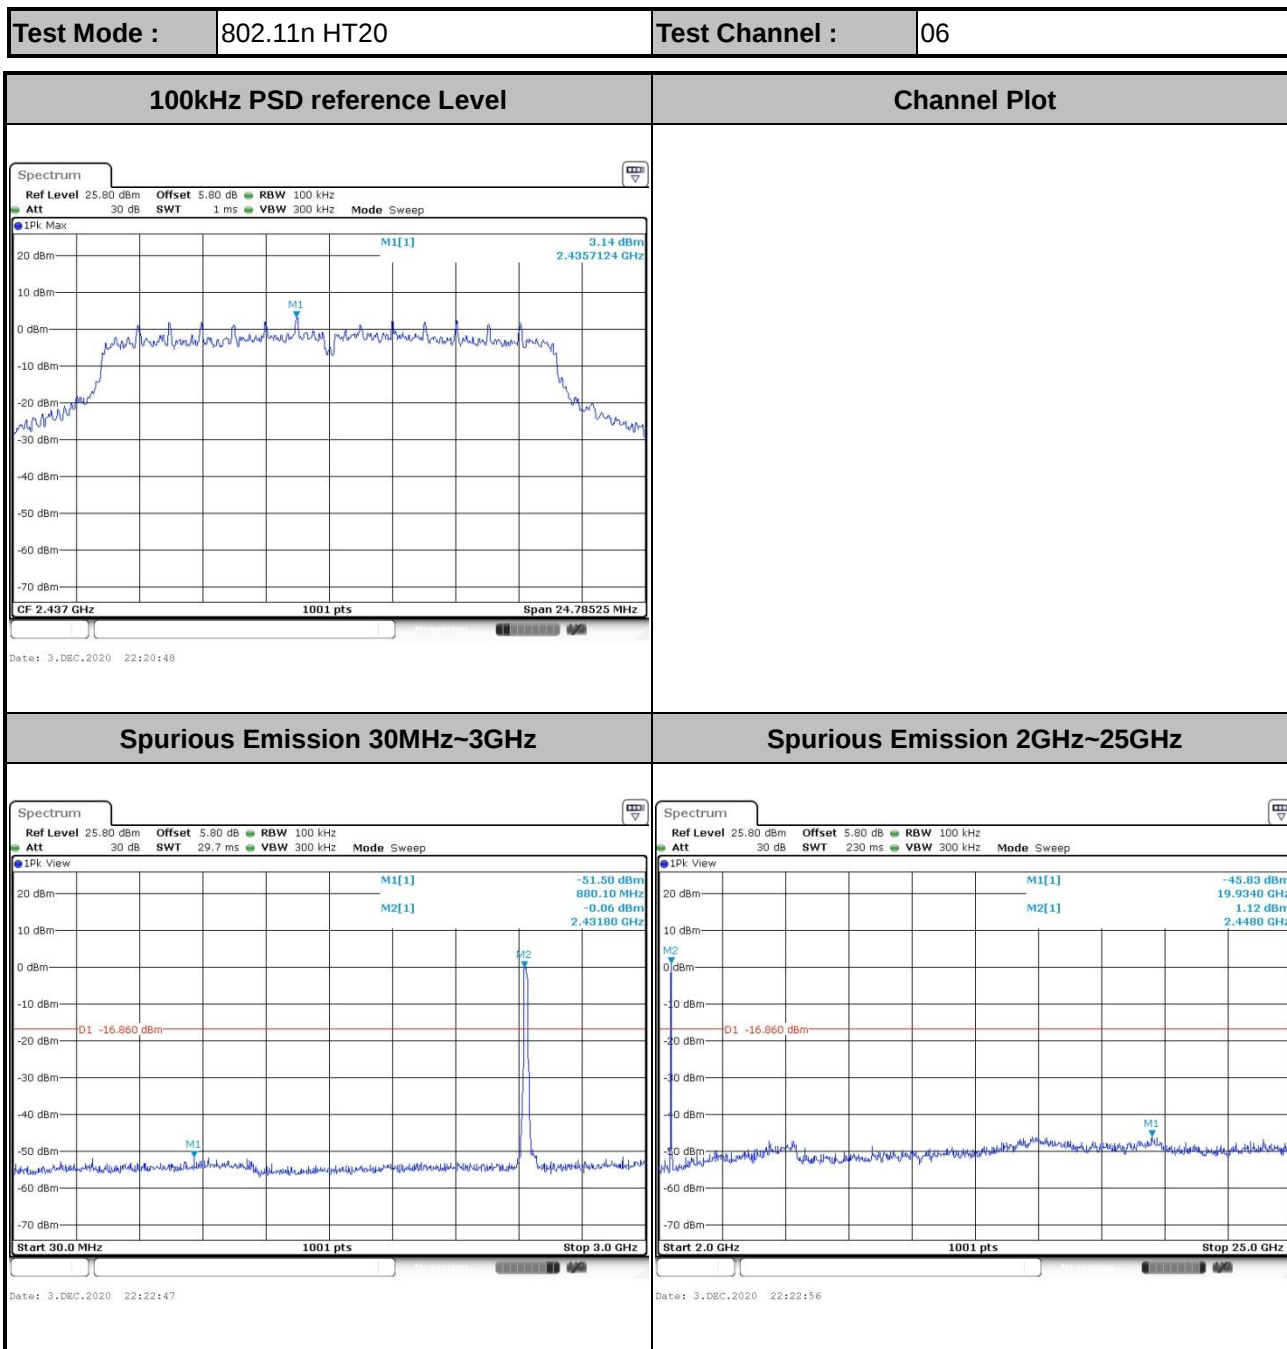



Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

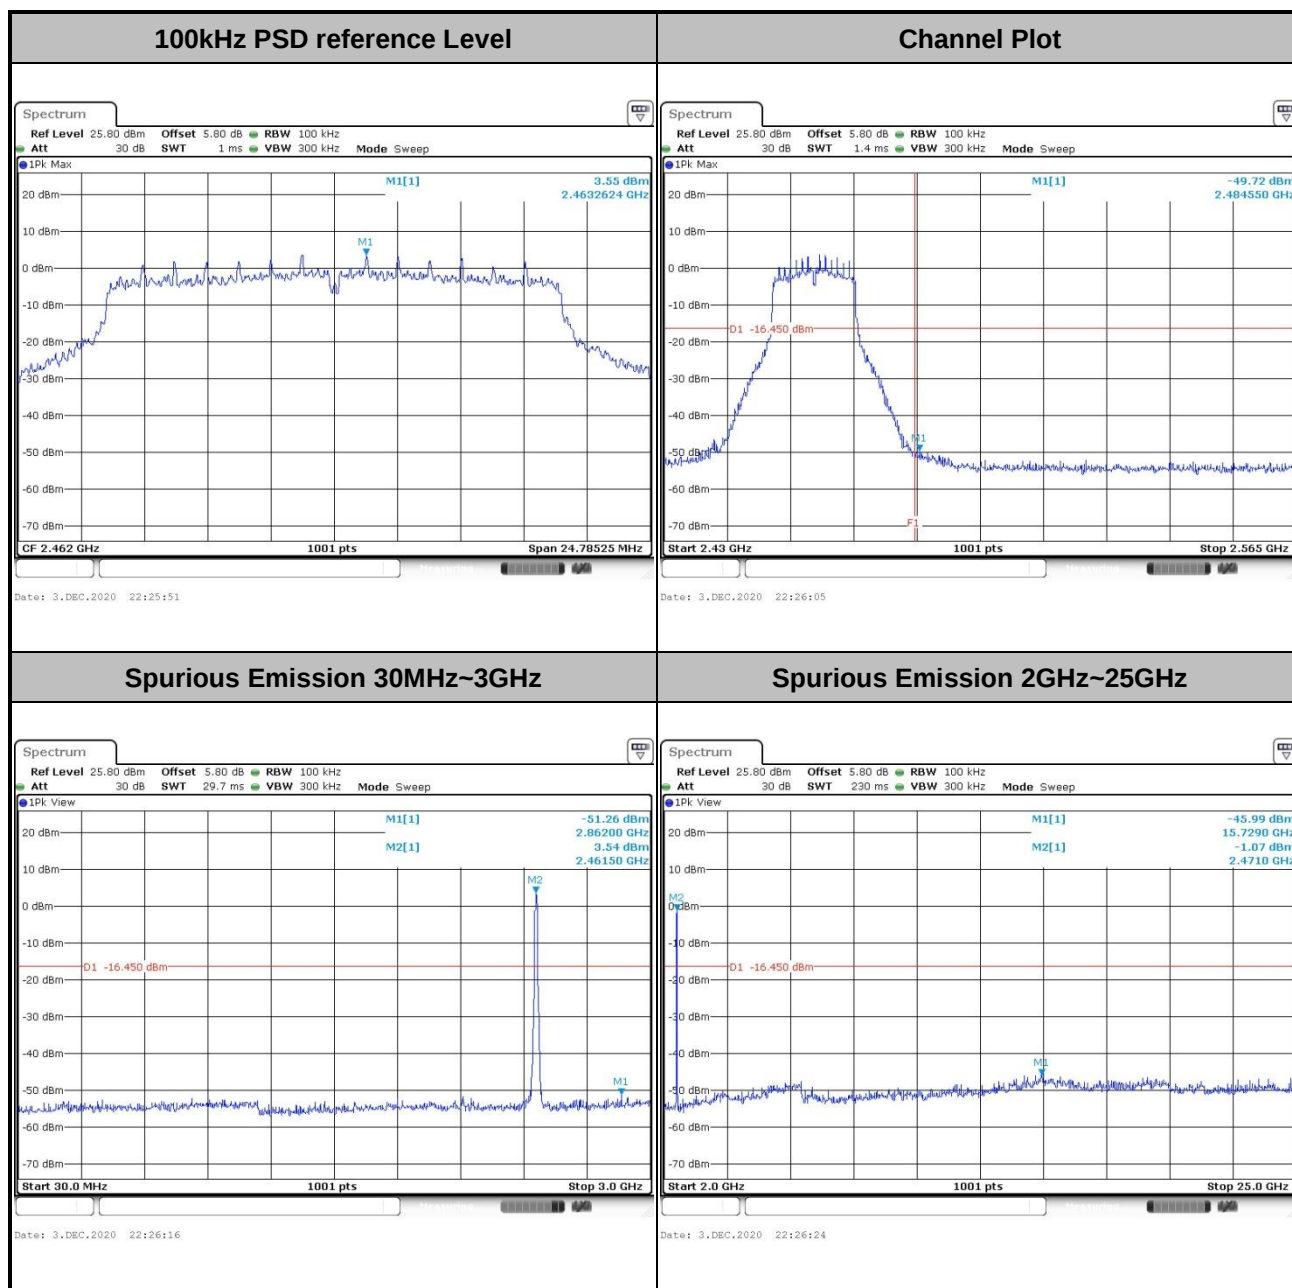





Test Mode : 802.11n HT40

Test Channel : 03


100kHz PSD reference Level

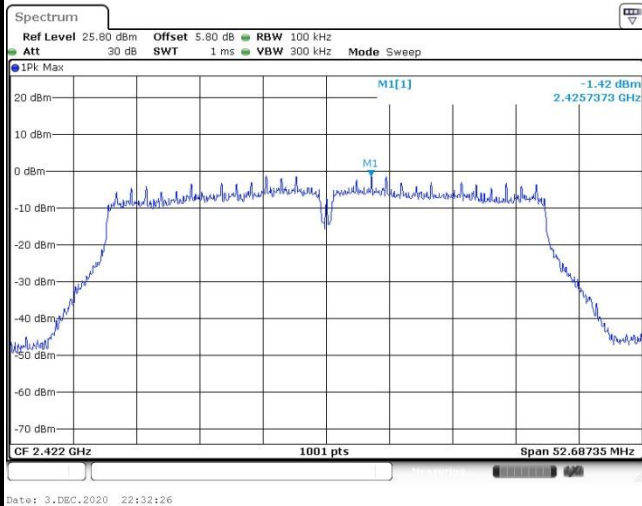


Channel Plot

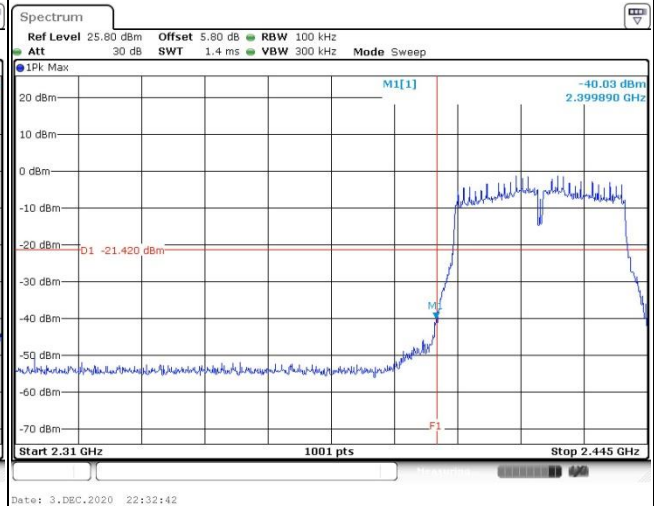

Spurious Emission 30MHz~3GHz

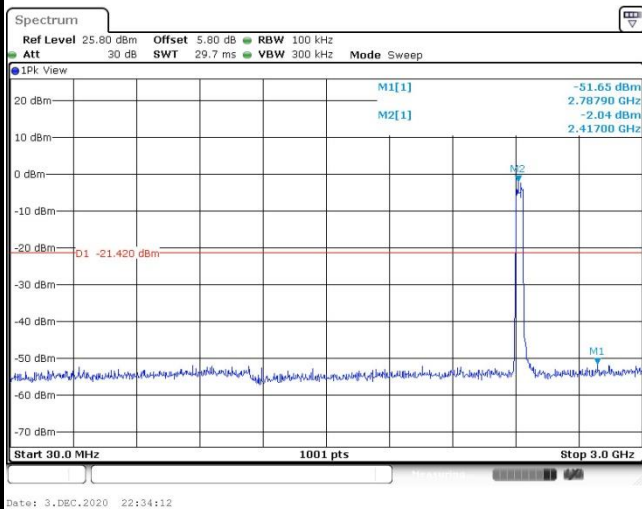


Spurious Emission 2GHz~25GHz

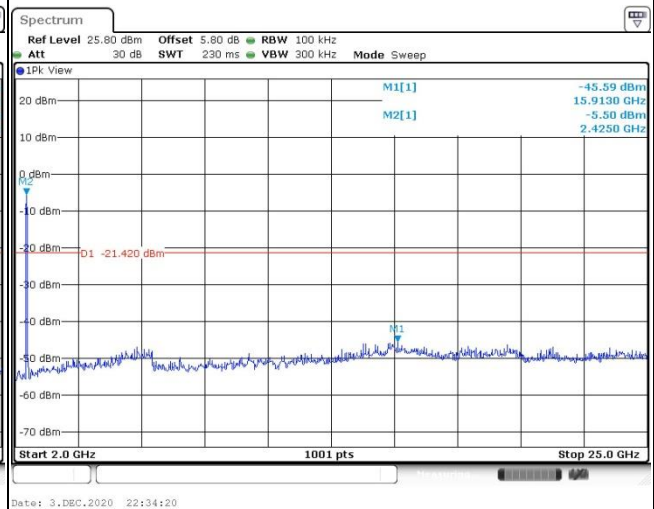



Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

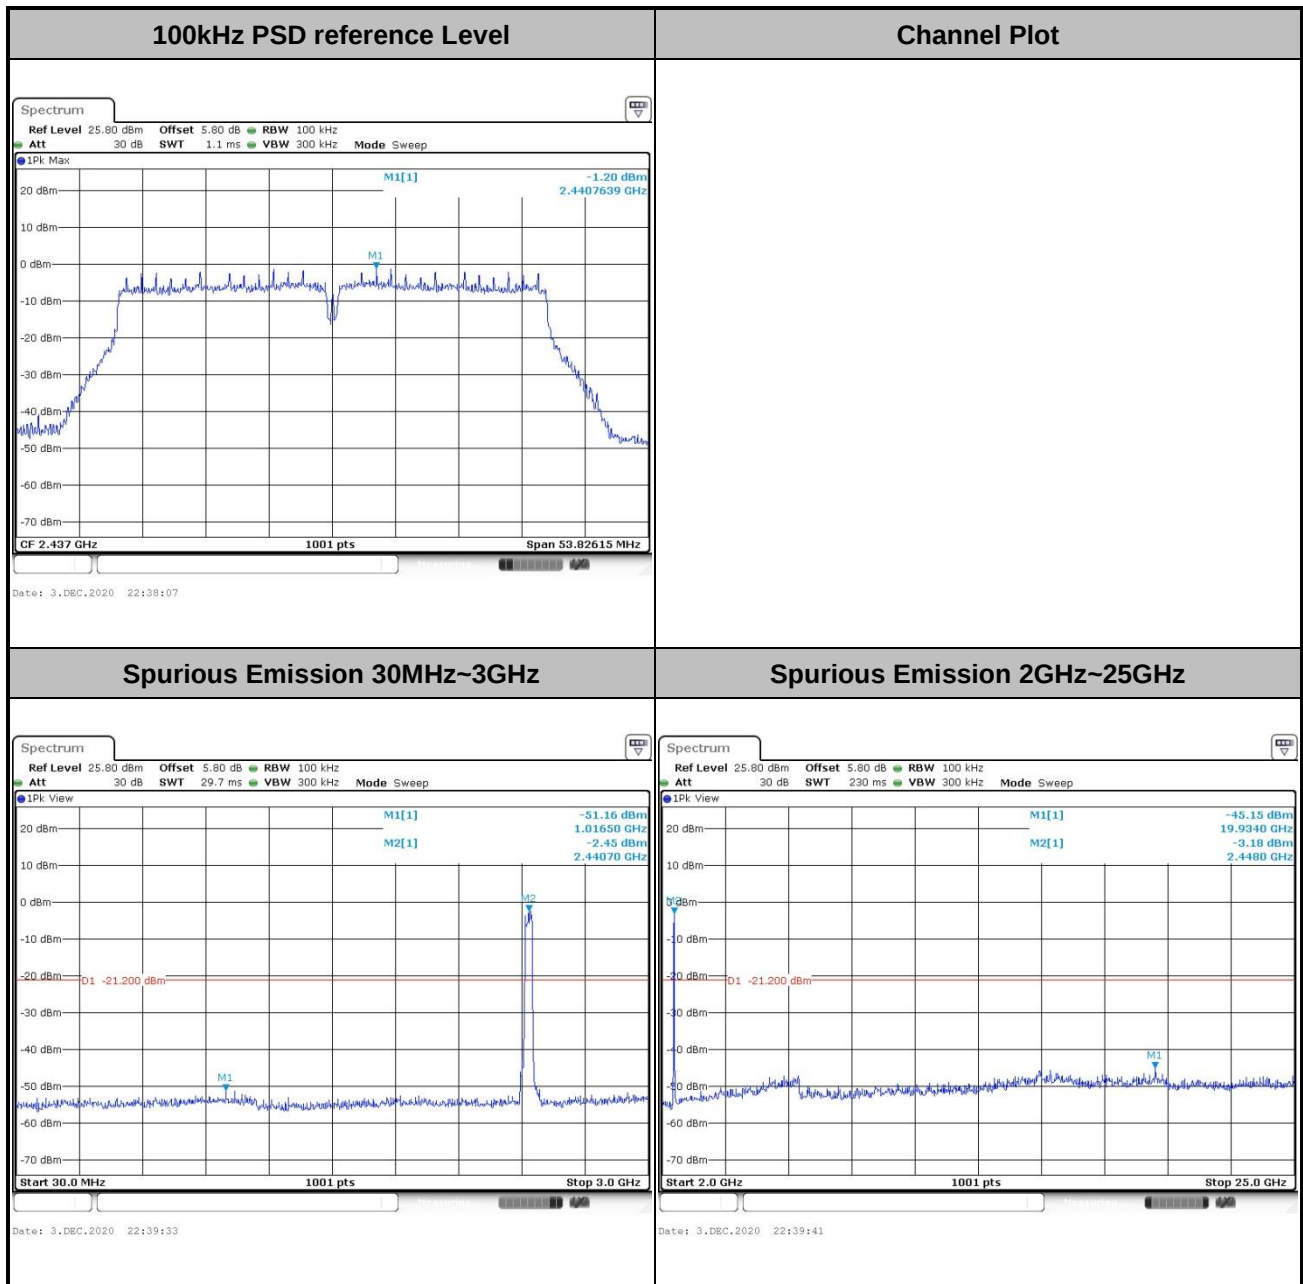





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

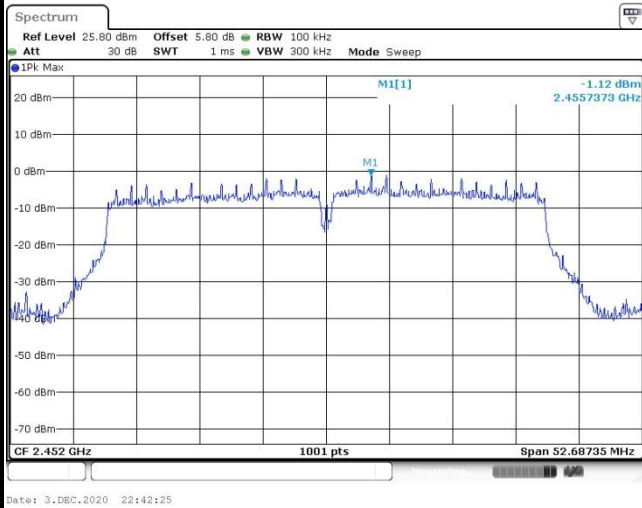


Channel Plot

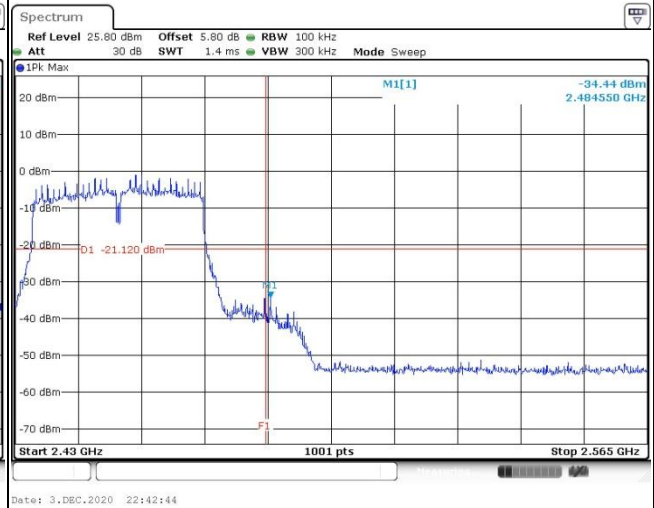

Spurious Emission 30MHz~3GHz

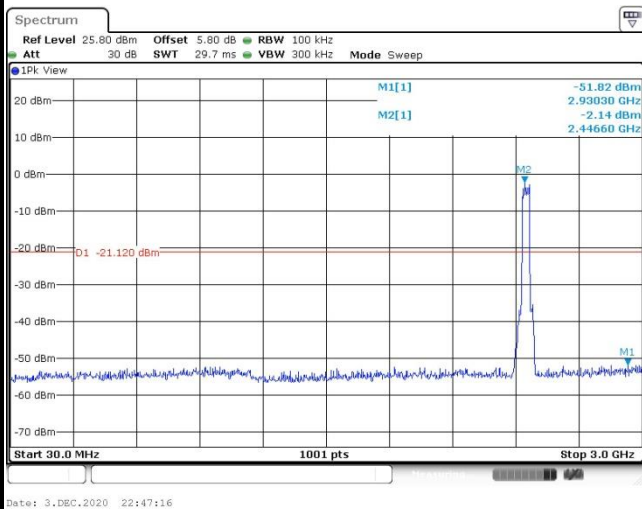

Spurious Emission 2GHz~25GHz

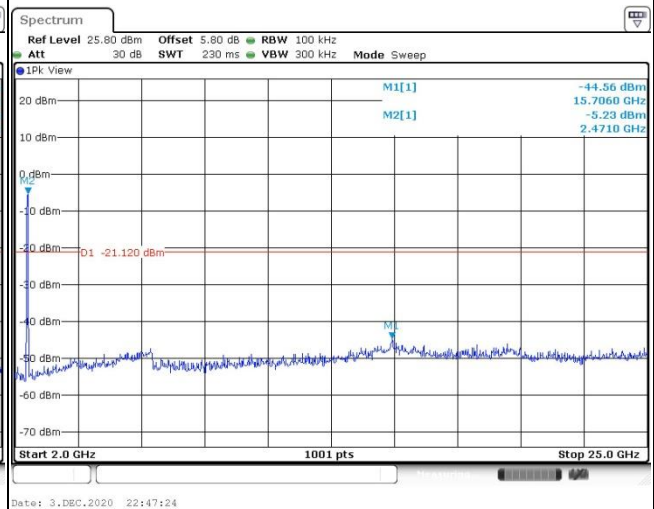

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

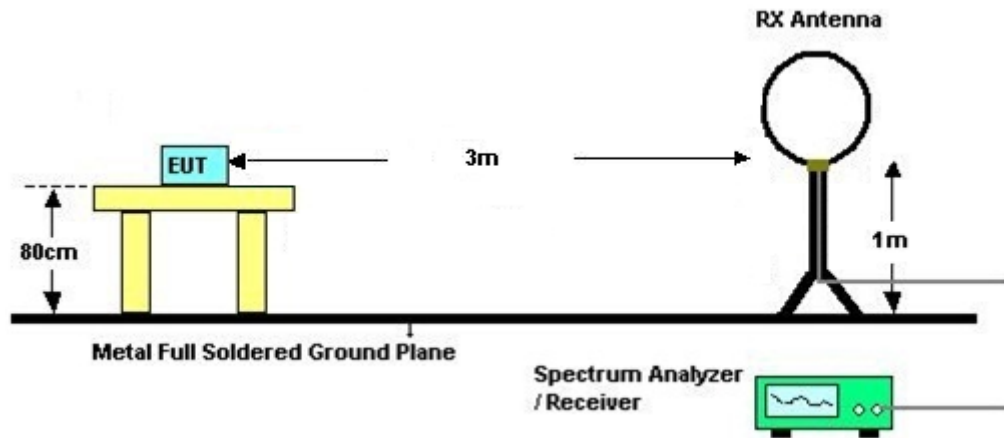

For radiated emissions from 30MHz to 1GHz

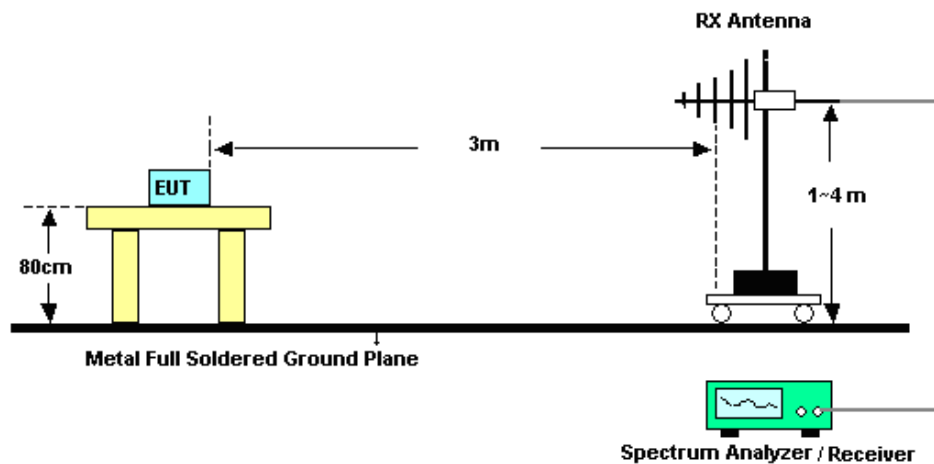

For radiated emissions above 1GHz

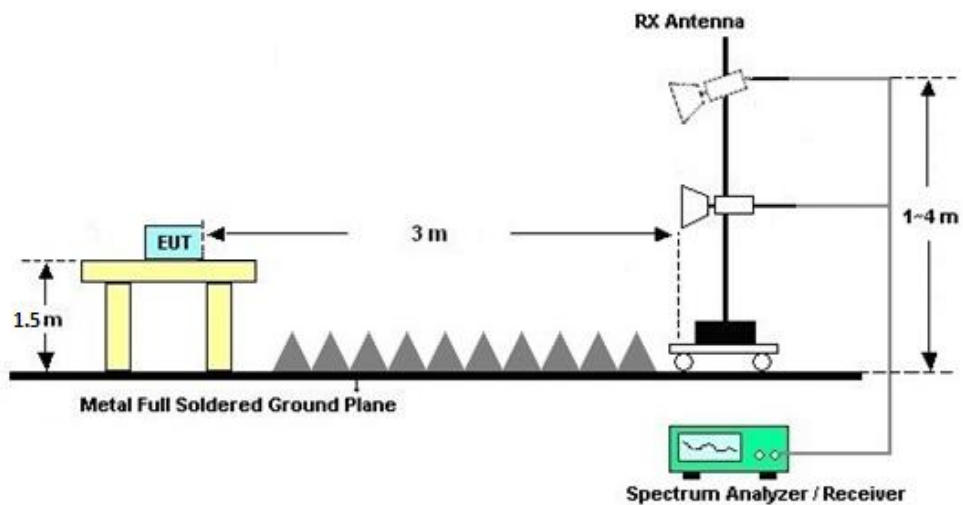

**3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

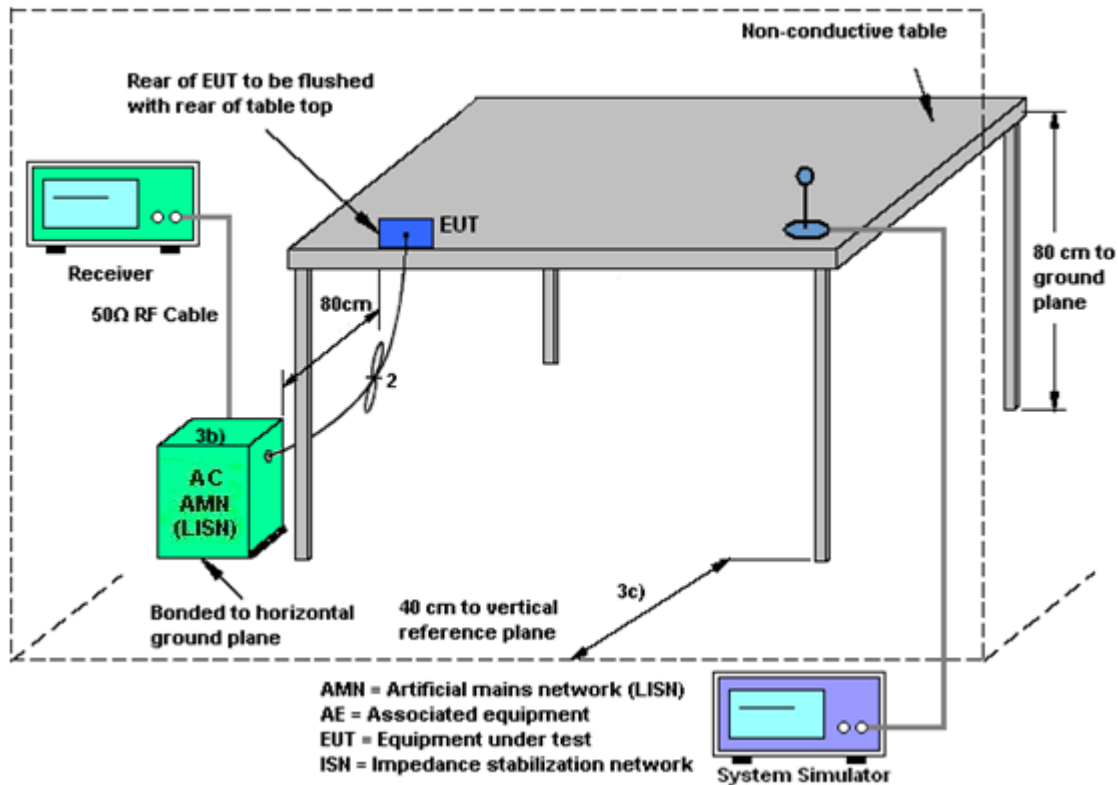

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Nov. 01, 2020	Dec. 03, 2020~ Dec. 25, 2020	Oct. 31, 2021	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 15, 2020	Dec. 03, 2020~ Dec. 25, 2020	Jan. 14, 2021	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 08, 2020	Dec. 03, 2020~ Dec. 25, 2020	Jan. 07, 2021	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 17, 2020	Dec. 22, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz, MAX 30dB	Apr. 15, 2020	Dec. 22, 2020	Apr. 14, 2021	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 01, 2020	Dec. 22, 2020	Oct. 31, 2021	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 30, 2020	Dec. 22, 2020	May 29, 2021	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 26, 2020	Dec. 22, 2020	Apr. 25, 2021	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jun. 05, 2020	Dec. 22, 2020	Jun. 04, 2021	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 14, 2020	Dec. 22, 2020	Apr. 13, 2021	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Dec. 22, 2020	Jan. 07, 2021	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2012228	1GHz-18GHz	Oct. 17, 2020	Dec. 22, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 17, 2020	Dec. 22, 2020	Oct. 16, 2021	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 22, 2020	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 22, 2020	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 22, 2020	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 14, 2020	Dec. 14, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 17, 2020	Dec. 14, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 17, 2020	Dec. 14, 2020	Oct. 16, 2021	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 17, 2020	Dec. 14, 2020	Oct. 16, 2021	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Rise liu	Temperature:	21~25	°C
Test Date:	2020/12/03~2020/12/25	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.89	8.07	0.50	Pass
11b	1Mbps	1	6	2437	13.94	8.07	0.50	Pass
11b	1Mbps	1	11	2462	13.89	8.07	0.50	Pass
11g	6Mbps	1	1	2412	17.53	15.46	0.50	Pass
11g	6Mbps	1	6	2437	17.58	15.52	0.50	Pass
11g	6Mbps	1	11	2462	17.43	15.12	0.50	Pass
HT20	MCS0	1	1	2412	18.88	16.32	0.50	Pass
HT20	MCS0	1	6	2437	18.83	16.52	0.50	Pass
HT20	MCS0	1	11	2462	18.68	16.52	0.50	Pass
HT40	MCS0	1	3	2422	36.46	35.12	0.50	Pass
HT40	MCS0	1	6	2437	36.56	35.88	0.50	Pass
HT40	MCS0	1	9	2452	36.56	35.12	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	17.65	30.00	-0.17	17.48	36.00	Pass
11b	1Mbps	1	6	2437	17.72	30.00	-0.17	17.55	36.00	Pass
11b	1Mbps	1	11	2462	20.69	30.00	-0.17	20.52	36.00	Pass
11g	6Mbps	1	1	2412	19.18	30.00	-0.17	19.01	36.00	Pass
11g	6Mbps	1	6	2437	19.22	30.00	-0.17	19.05	36.00	Pass
11g	6Mbps	1	11	2462	18.83	30.00	-0.17	18.66	36.00	Pass
HT20	MCS0	1	1	2412	18.03	30.00	-0.17	17.86	36.00	Pass
HT20	MCS0	1	6	2437	18.22	30.00	-0.17	18.05	36.00	Pass
HT20	MCS0	1	11	2462	17.91	30.00	-0.17	17.74	36.00	Pass
HT40	MCS0	1	3	2422	18.02	30.00	-0.17	17.85	36.00	Pass
HT40	MCS0	1	6	2437	18.69	30.00	-0.17	18.52	36.00	Pass
HT40	MCS0	1	9	2452	18.18	30.00	-0.17	18.01	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.00	15.06
11b	1Mbps	1	6	2437	0.00	15.30
11b	1Mbps	1	11	2462	0.00	17.35
11g	6Mbps	1	1	2412	0.06	14.52
11g	6Mbps	1	6	2437	0.06	14.88
11g	6Mbps	1	11	2462	0.06	14.47
HT20	MCS0	1	1	2412	0.06	13.32
HT20	MCS0	1	6	2437	0.06	13.57
HT20	MCS0	1	11	2462	0.06	13.44
HT40	MCS0	1	3	2422	0.23	11.85
HT40	MCS0	1	6	2437	0.23	12.49
HT40	MCS0	1	9	2452	0.23	12.11


TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-12.11	-0.17	8.00	Pass
11b	1Mbps	1	6	2437	-12.29	-0.17	8.00	Pass
11b	1Mbps	1	11	2462	-9.54	-0.17	8.00	Pass
11g	6Mbps	1	1	2412	-9.76	-0.17	8.00	Pass
11g	6Mbps	1	6	2437	-10.68	-0.17	8.00	Pass
11g	6Mbps	1	11	2462	-10.01	-0.17	8.00	Pass
HT20	MCS0	1	1	2412	-11.47	-0.17	8.00	Pass
HT20	MCS0	1	6	2437	-11.68	-0.17	8.00	Pass
HT20	MCS0	1	11	2462	-11.79	-0.17	8.00	Pass
HT40	MCS0	1	3	2422	-11.42	-0.17	8.00	Pass
HT40	MCS0	1	6	2437	-12.07	-0.17	8.00	Pass
HT40	MCS0	1	9	2452	-13.25	-0.17	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

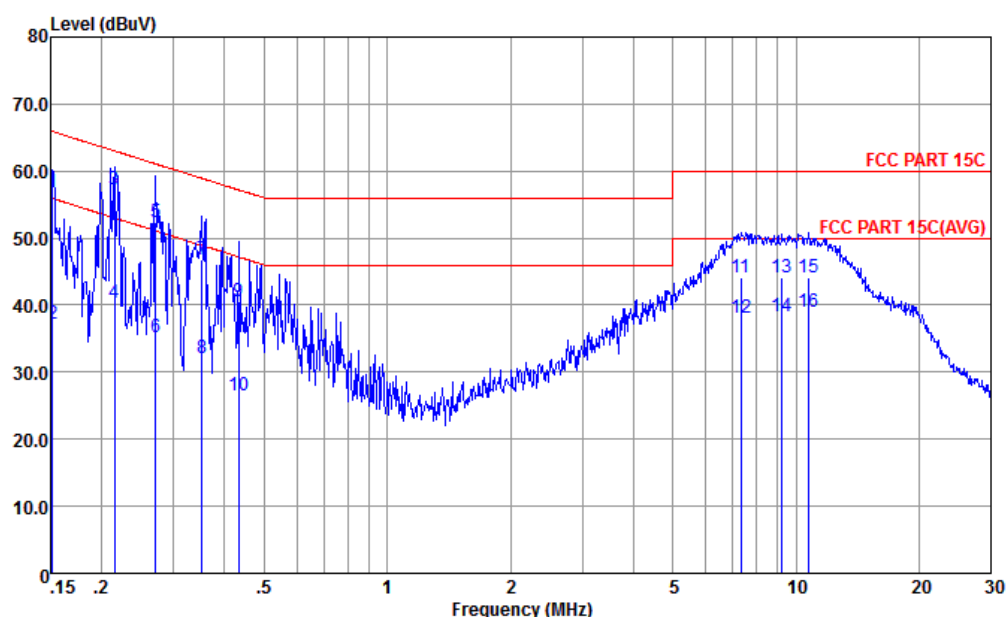


Site : CO01-KS
Condition : FCC PART 15C TWO-LISN-CN02-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	56.91	-9.00	65.91	36.79	9.64	10.48	QP
2	0.152	37.31	-18.60	55.91	17.19	9.64	10.48	Average
3 *	0.215	57.20	-5.81	63.01	37.21	9.64	10.35	QP
4	0.215	40.30	-12.71	53.01	20.31	9.64	10.35	Average
5	0.272	52.46	-8.61	61.07	32.50	9.64	10.32	QP
6	0.272	35.26	-15.81	51.07	15.30	9.64	10.32	Average
7	0.352	46.83	-12.08	58.91	26.91	9.64	10.28	QP
8	0.352	32.13	-16.78	48.91	12.21	9.64	10.28	Average
9	0.433	40.50	-16.70	57.20	20.59	9.65	10.26	QP
10	0.433	26.50	-20.70	47.20	6.59	9.65	10.26	Average
11	7.329	44.21	-15.79	60.00	23.50	10.40	10.31	QP
12	7.329	38.01	-11.99	50.00	17.30	10.40	10.31	Average
13	9.253	44.11	-15.89	60.00	23.31	10.47	10.33	QP
14	9.253	38.41	-11.59	50.00	17.61	10.47	10.33	Average
15	10.733	44.21	-15.79	60.00	23.30	10.56	10.35	QP
16	10.733	39.01	-10.99	50.00	18.10	10.56	10.35	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

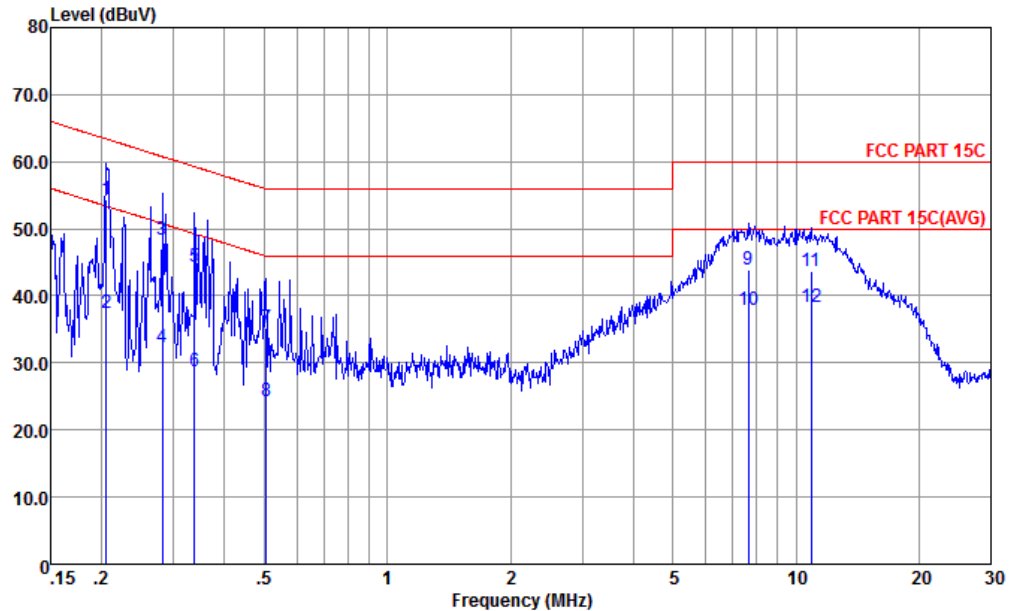

Site : CO01-KS
Condition : FCC PART 15C TWO-LISN-CN02-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
			dB	dBμV	dBμV	dB	dB	
1 *	0.205	54.45	-8.95	63.40	34.20	9.89	10.36	QP
2	0.205	37.55	-15.85	53.40	17.30	9.89	10.36	Average
3	0.282	48.32	-12.44	60.76	28.20	9.80	10.32	QP
4	0.282	32.42	-18.34	50.76	12.30	9.80	10.32	Average
5	0.337	44.27	-15.00	59.27	24.20	9.78	10.29	QP
6	0.337	28.67	-20.60	49.27	8.60	9.78	10.29	Average
7	0.505	35.16	-20.84	56.00	15.19	9.73	10.24	QP
8	0.505	24.26	-21.74	46.00	4.29	9.73	10.24	Average
9	7.646	43.96	-16.04	60.00	23.20	10.45	10.31	QP
10	7.646	37.96	-12.04	50.00	17.20	10.45	10.31	Average
11	10.905	43.60	-16.40	60.00	22.60	10.65	10.35	QP
12	10.905	38.30	-11.70	50.00	17.30	10.65	10.35	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2364.47	56.12	-17.88	74	48.23	32.11	7.44	31.66	113	109	P	H
		2389.95	45.15	-8.85	54	37.1	32.2	7.5	31.65	113	109	A	H
	*	2412	109.15	-	-	101.09	32.18	7.53	31.65	113	109	P	H
	*	2414	105.76	-	-	97.7	32.18	7.53	31.65	113	109	A	H
		2353.29	56.12	-17.88	74	48.24	32.11	7.44	31.67	309	55	P	V
		2389.95	44.98	-9.02	54	36.93	32.2	7.5	31.65	309	55	A	V
	*	2412	105.84	-	-	97.78	32.18	7.53	31.65	309	55	P	V
	*	2414	102.66	-	-	94.6	32.18	7.53	31.65	309	55	A	V
802.11b CH 11 2462MHz	*	2462	108.87	-	-	100.73	32.13	7.61	31.6	105	110	P	H
	*	2460	105.37	-	-	97.23	32.13	7.61	31.6	105	110	A	H
		2492.38	57.21	-16.79	74	49	32.1	7.67	31.56	105	110	P	H
		2487.64	46.04	-7.96	54	37.85	32.1	7.67	31.58	105	110	A	H
	*	2462	105.24	-	-	97.1	32.13	7.61	31.6	295	53	P	V
	*	2460	101.81	-	-	93.67	32.13	7.61	31.6	295	53	A	V
		2485.24	57.04	-16.96	74	48.86	32.12	7.64	31.58	295	53	P	V
		2487.58	45.54	-8.46	54	37.35	32.1	7.67	31.58	295	53	A	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b		4824	52.5	-21.5	74	67.43	34.31	10.8	60.04	100	245	P	H
CH 01		4824	50.42	-3.58	54	65.35	34.31	10.8	60.04	100	245	A	H
2412MHz		4824	45.01	-28.99	74	59.94	34.31	10.8	60.04	300	360	P	V
802.11b		4872	52.34	-21.66	74	67.16	34.34	10.87	60.03	105	248	P	H
CH 06		4872	50.55	-3.45	54	65.37	34.34	10.87	60.03	105	248	A	H
2437MHz		7308	43.08	-30.92	74	54.27	35.94	13.38	60.51	300	0	P	H
		4872	46.32	-27.68	74	61.14	34.34	10.87	60.03	300	360	P	V
		7308	43.14	-30.86	74	54.33	35.94	13.38	60.51	300	360	P	V
802.11b		4926	52.93	-21.07	74	67.65	34.36	10.94	60.02	106	257	P	H
CH 11		4926	50.74	-3.26	54	65.46	34.36	10.94	60.02	106	257	A	H
2462MHz		7386	44.24	-29.76	74	55.39	35.92	13.46	60.53	300	0	P	H
		4926	45.06	-28.94	74	59.78	34.36	10.94	60.02	300	360	P	V
		7386	44.24	-29.76	74	55.39	35.92	13.46	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2387.87	56.55	-17.45	74	48.5	32.2	7.5	31.65	115	112	P	H
		2389.95	45.86	-8.14	54	37.81	32.2	7.5	31.65	115	112	A	H
	*	2414	109.91	-	-	101.85	32.18	7.53	31.65	115	112	P	H
	*	2414	101.81	-	-	93.75	32.18	7.53	31.65	115	112	A	H
		2379.55	56.35	-17.65	74	48.38	32.15	7.47	31.65	390	71	P	V
		2389.95	45.45	-8.55	54	37.4	32.2	7.5	31.65	390	71	A	V
	*	2414	106.67	-	-	98.61	32.18	7.53	31.65	390	71	P	V
	*	2414	98.21	-	-	90.15	32.18	7.53	31.65	390	71	A	V
802.11g CH 11 2462MHz	*	2456	107.03	-	-	98.89	32.13	7.61	31.6	100	108	P	H
	*	2456	98.59	-	-	90.45	32.13	7.61	31.6	100	108	A	H
		2483.56	58.52	-15.48	74	50.34	32.12	7.64	31.58	100	108	P	H
		2483.5	48.03	-5.97	54	39.85	32.12	7.64	31.58	100	108	A	H
	*	2462	102.01	-	-	93.87	32.13	7.61	31.6	295	55	P	V
	*	2460	94.02	-	-	85.88	32.13	7.61	31.6	295	55	A	V
		2483.98	57.39	-16.61	74	49.21	32.12	7.64	31.58	295	55	P	V
		2483.5	46.61	-7.39	54	38.43	32.12	7.64	31.58	295	55	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11g (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4824	48.73	-25.27	74	63.66	34.31	10.8	60.04	300	0	P	H
		4824	44.94	-29.06	74	59.87	34.31	10.8	60.04	300	360	P	V
802.11g CH 06 2437MHz		4872	47.77	-26.23	74	62.59	34.34	10.87	60.03	300	0	P	H
		7308	43.14	-30.86	74	54.33	35.94	13.38	60.51	300	0	P	H
		4872	44.42	-29.58	74	59.24	34.34	10.87	60.03	300	360	P	V
		7308	43.26	-30.74	74	54.45	35.94	13.38	60.51	300	360	P	V
802.11g CH 11 2462MHz		4926	45.88	-28.12	74	60.6	34.36	10.94	60.02	300	0	P	H
		7386	43.66	-30.34	74	54.81	35.92	13.46	60.53	300	0	P	H
		4926	42.39	-31.61	74	57.11	34.36	10.94	60.02	300	360	P	V
		7386	43.61	-30.39	74	54.76	35.92	13.46	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2347.31	56.21	-17.79	74	48.41	32.06	7.41	31.67	173	135	P	H
		2389.95	45.37	-8.63	54	37.32	32.2	7.5	31.65	173	135	A	H
	*	2414	106.76	-	-	98.7	32.18	7.53	31.65	173	135	P	H
	*	2414	98.53	-	-	90.47	32.18	7.53	31.65	173	135	A	H
		2374.74	56.39	-17.61	74	48.43	32.15	7.47	31.66	307	56	P	V
		2389.95	45.34	-8.66	54	37.29	32.2	7.5	31.65	307	56	A	V
	*	2412	104.12	-	-	96.06	32.18	7.53	31.65	307	56	P	V
	*	2414	96.06	-	-	88	32.18	7.53	31.65	307	56	A	V
802.11n HT20 CH 11 2462MHz		2484.1	58.6	-15.4	74	50.42	32.12	7.64	31.58	104	110	P	H
		2483.5	47.45	-6.55	54	39.27	32.12	7.64	31.58	104	110	A	H
	*	2460	105.33	-	-	97.19	32.13	7.61	31.6	104	110	P	H
	*	2460	96.93	-	-	88.79	32.13	7.61	31.6	104	110	A	H
		2483.56	56.37	-17.63	74	48.19	32.12	7.64	31.58	339	59	P	V
		2483.5	46.07	-7.93	54	37.89	32.12	7.64	31.58	339	59	A	V
	*	2458	101.45	-	-	93.31	32.13	7.61	31.6	339	59	P	V
	*	2456	93.22	-	-	85.08	32.13	7.61	31.6	339	59	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20		4824	46.86	-27.14	74	61.79	34.31	10.8	60.04	300	0	P	H
CH 01 2412MHz		4824	42.19	-31.81	74	57.12	34.31	10.8	60.04	300	360	P	V
802.11n		4872	46.5	-27.5	74	61.32	34.34	10.87	60.03	300	0	P	H
HT20		7308	42.49	-31.51	74	53.68	35.94	13.38	60.51	300	0	P	H
CH 06		4872	41.75	-32.25	74	56.57	34.34	10.87	60.03	300	360	P	V
2437MHz		7308	43.02	-30.98	74	54.21	35.94	13.38	60.51	300	360	P	V
802.11n		4926	44.28	-29.72	74	59	34.36	10.94	60.02	300	0	P	H
HT20		7386	43.82	-30.18	74	54.97	35.92	13.46	60.53	300	0	P	H
CH 11		4926	41.36	-32.64	74	56.08	34.36	10.94	60.02	300	360	P	V
2462MHz		7386	42.97	-31.03	74	54.12	35.92	13.46	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2326.12	57.06	-16.94	74	49.33	32.02	7.38	31.67	118	111	P	H
		2389.95	46.5	-7.5	54	38.45	32.2	7.5	31.65	118	111	A	H
	*	2420	104.04	-	-	95.94	32.17	7.56	31.63	118	111	P	H
	*	2420	96.27	-	-	88.17	32.17	7.56	31.63	118	111	A	H
		2486.74	56.75	-17.25	74	48.57	32.12	7.64	31.58	118	111	P	H
		2488.84	46.26	-7.74	54	38.07	32.1	7.67	31.58	118	111	A	H
		2345.88	56.24	-17.76	74	48.44	32.06	7.41	31.67	307	57	P	V
		2389.69	45.89	-8.11	54	37.84	32.2	7.5	31.65	307	57	A	V
	*	2420	99.86	-	-	91.76	32.17	7.56	31.63	307	57	P	V
	*	2420	91.42	-	-	83.32	32.17	7.56	31.63	307	57	A	V
		2496.1	56.43	-17.57	74	48.22	32.1	7.67	31.56	307	57	P	V
		2488.84	45.95	-8.05	54	37.76	32.1	7.67	31.58	307	57	A	V
802.11n HT40 CH 09 2452MHz		2389.56	56.97	-17.03	74	48.92	32.2	7.5	31.65	100	111	P	H
		2389.3	45.72	-8.28	54	37.67	32.2	7.5	31.65	100	111	A	H
	*	2456	104.06	-	-	95.92	32.13	7.61	31.6	100	111	P	H
	*	2454	95.55	-	-	87.41	32.13	7.61	31.6	100	111	A	H
		2484.1	62.42	-11.58	74	54.24	32.12	7.64	31.58	100	111	P	H
		2483.86	46.85	-7.15	54	38.67	32.12	7.64	31.58	100	111	A	H
		2370.32	56.08	-17.92	74	48.12	32.15	7.47	31.66	336	62	P	V
		2389.69	45.67	-8.33	54	37.62	32.2	7.5	31.65	336	62	A	V
	*	2456	99.62	-	-	91.48	32.13	7.61	31.6	336	62	P	V
	*	2454	91.32	-	-	83.18	32.13	7.61	31.6	336	62	A	V
		2499.52	56.91	-17.09	74	48.7	32.1	7.67	31.56	336	62	P	V
		2483.86	46.12	-7.88	54	37.94	32.12	7.64	31.58	336	62	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4842	41.96	-32.04	74	56.85	34.32	10.82	60.03	300	0	P	H
HT40		7266	42.61	-31.39	74	53.83	35.94	13.35	60.51	300	0	P	H
CH 03		4842	42.89	-31.11	74	57.78	34.32	10.82	60.03	300	360	P	V
2422MHz		7266	43.1	-30.9	74	54.32	35.94	13.35	60.51	300	360	P	V
802.11n		4872	42.18	-31.82	74	57	34.34	10.87	60.03	100	360	P	H
HT40		7308	42.73	-31.27	74	53.92	35.94	13.38	60.51	100	360	P	H
CH 06		4872	41.84	-32.16	74	56.66	34.34	10.87	60.03	100	296	P	V
2437MHz		7308	42.97	-31.03	74	54.16	35.94	13.38	60.51	100	296	P	V
802.11n		4902	41.8	-32.2	74	56.56	34.35	10.91	60.02	300	0	P	H
HT40		7356	43.01	-30.99	74	54.17	35.93	13.43	60.52	300	0	P	H
CH 09		4902	40.35	-33.65	74	55.11	34.35	10.91	60.02	300	360	P	V
2452MHz		7356	44.14	-29.86	74	55.3	35.93	13.43	60.52	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11b (LF)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11b LF		30	19.1	-20.9	40	25.39	25.1	0.81	32.2	-	-	P	H
		86.26	19.34	-20.66	40	35.54	14.32	1.62	32.14	-	-	P	H
		180.35	25.08	-18.42	43.5	39.74	15.1	2.34	32.1	-	-	P	H
		259.89	34.9	-11.1	46	43.87	20.4	2.81	32.18	100	0	P	H
		288.99	34.74	-11.26	46	44.71	19.18	2.97	32.12	-	-	P	H
		830.25	29.62	-16.38	46	28.1	28.87	5.01	32.36	-	-	P	H
		38.73	29.6	-10.4	40	40.37	20.33	1.04	32.14	100	0	P	V
		54.25	27.09	-12.91	40	44.62	13.4	1.27	32.2	-	-	P	V
		132.82	22.47	-21.03	43.5	35.02	17.57	2.01	32.13	-	-	P	V
		266.68	25.6	-20.4	46	34.99	19.93	2.85	32.17	-	-	P	V
		847.71	27.44	-18.56	46	25.53	29.26	5.05	32.4	-	-	P	V
		957.32	28.96	-17.04	46	24.84	30.94	5.37	32.19	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-Location

2.4GHz 2400~2483.5MHz

WIFI 802.11b& Part 27M TE Band 7- BW=20M (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 11 2462MHz	*	2487.28	56.79	-17.21	74	48.61	32.12	7.64	31.58	128	109	P	H
	*	2486.98	45.27	-8.73	54	37.09	32.12	7.64	31.58	128	109	A	H
		2462	108.43	-	-	100.29	32.13	7.61	31.6	128	109	P	H
		2460	105.05	-	-	96.91	32.13	7.61	31.6	128	109	A	H
	*	2491	56.27	-17.73	74	48.08	32.1	7.67	31.58	294	72	P	V
	*	2487.1	45.11	-8.89	54	36.93	32.12	7.64	31.58	294	72	A	V
		2462	103.92	-	-	95.78	32.13	7.61	31.6	294	72	P	V
		2460	100.33	-	-	92.19	32.13	7.61	31.6	294	72	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b& Part 27M TE Band 7- BW=20M (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz		4926	49.3	-24.7	74	64.02	34.36	10.94	60.02	300	0	P	H
		7386	42.92	-31.08	74	54.07	35.92	13.46	60.53	300	0	P	H
		4926	44.49	-29.51	74	59.21	34.36	10.94	60.02	300	360	P	V
		7386	43	-31	74	54.15	35.92	13.46	60.53	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE& Part 27M TE Band 7- BW=20M (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 39 2480MHz		2483.5	58.4	-15.6	74	50.22	32.12	7.64	31.58	109	108	P	H
		2483.5	50.94	-3.06	54	42.76	32.12	7.64	31.58	109	108	A	H
		2480	103.56	-	-	95.38	32.12	7.64	31.58	109	108	P	H
		2480	101.95	-	-	93.77	32.12	7.64	31.58	109	108	A	H
		2484.76	56.24	-17.76	74	48.06	32.12	7.64	31.58	368	75	P	V
		2483.5	48.79	-5.21	54	40.61	32.12	7.64	31.58	368	75	A	V
		2480	99.8	-	-	91.62	32.12	7.64	31.58	368	75	P	V
		2480	98.21	-	-	90.03	32.12	7.64	31.58	368	75	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

BLE&Part 27M TE Band 7- BW=20M (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4962	40.07	-33.93	74	54.72	34.38	10.98	60.01	300	0	P	H
		7440	41.33	-32.67	74	52.45	35.91	13.51	60.54	300	0	P	H
		4962	38.69	-35.31	74	53.34	34.38	10.98	60.01	300	0	P	V
		7440	42.04	-31.96	74	53.16	35.91	13.51	60.54	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	98.62	-	-	10Hz
802.11n HT20	98.52	-	-	10Hz
802.11n HT40	94.93	0.949	1.053	1.1KHz

802.11b

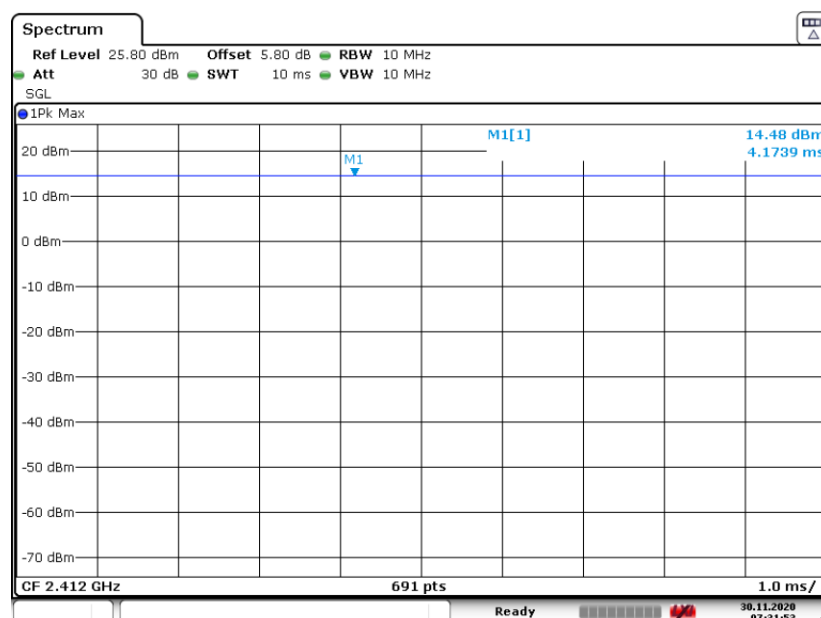




802.11g

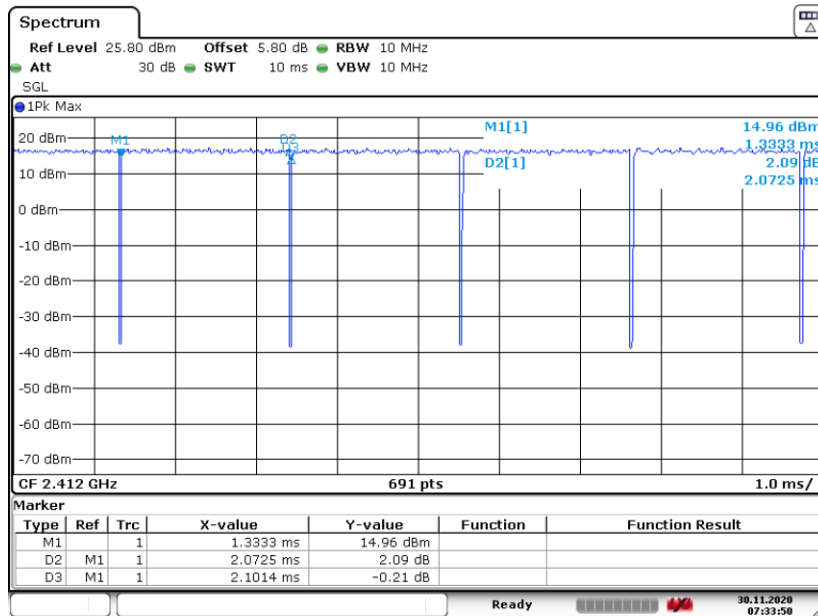

802.11n HT20

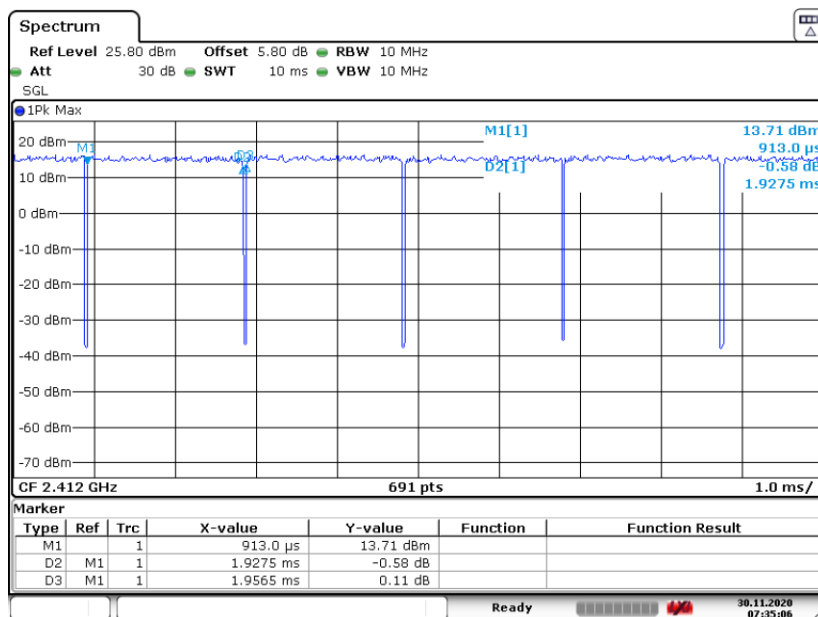



802.11n HT40

