

Page: 1 of 320

ELECTROMAGNETIC EMISSIONS CLASS II PERMISSIVE CHANGE REPORT





FCC Applicant: Acer Incorporated

8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi, New Taipei Citv

22181, Taiwan (R.O.C)

FCC Manufacturer: Compal Electronics, Inc.

No. 581 & 581-1, Ruiguang Road Neihu District Taipei, 11492

Product Name: WiFi 6E BT 5.2 M.2 2230 Module

Brand Name: acer

Model No.: QCNFA765

Report Number: E2/2022/30010

FCC ID **HLZQCNFA765**

Issue Date: Apr. 15, 2022

Date of Test: Mar. 08, 2022~Mar. 28, 2022

Date of EUT Received: Dec. 17, 2021

Approved By

Jav Lin

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.407.

The results of this report relate only to the sample identified in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.sgs.com.tw



Page: 2 of 320

| Revision History | | | | | |
|------------------|--|-----------|---------------|--------------|--|
| Report Number | Number Revision Description Issue Date Revised B | | Revised By | Remark | |
| E2/2022/30010 | 00 | Original. | Apr. 15, 2022 | Yi-Shan Tsai | |

Note:

1 . The remark "*" indicates modification of the report upon requests from certification body.



Page: 3 of 320

Contents

| 1 | GENERAL INFORMATION | 4 |
|---|---|----|
| 2 | SYSTEM TEST CONFIGURATION | 8 |
| 3 | SUMMARY OF TEST RESULT | 11 |
| 4 | DESCRIPTION OF TEST MODES | 12 |
| 5 | MEASUREMENT UNCERTAINTY | 18 |
| 6 | MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT | 19 |
| 7 | LINDESIRARI E RADIATED EMISSION MEASUREMENT | 27 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 4 of 320

GENERAL INFORMATION

1.1 **Product Description**

| Product Name: | WiFi 6E BT 5.2 M.2 2230 Module | |
|---|--------------------------------|--|
| Brand Name: acer | | |
| Model No.: QCNFA765 | | |
| EUT Series No.: WCBN813AR6122000010 (Conducted) N8QGYWW003206067443400 (Radiated) | | |
| Power Supply: 15.4Vdc from Rechargeable Lithium Ion Battery Pack 19.5Vdc from AC/DC Adapter | | |

1.2 **Modulation & Data Rate**

| | 64QAM, 16QAM, QPSK, BPSK for OFDM |
|------------------|--------------------------------------|
| Modulation type: | 256QAM for OFDM in 802.11ac only |
| | 1024QAM for OFDMA in 802.11ax only |
| | 802.11 a: 6.5 - 54 Mbps |
| | 802.11 n_20MHz: 6.5 - 144.4 Mbps |
| | 802.11 n_40MHz: 13.5 - 300 Mbps |
| | 802.11 ac_20MHz: 6.5 - 173.4 Mbps |
| | 802.11 ac_40MHz: 13.5 - 400 Mbps |
| Transition Rate: | 802.11 ac_80MHz: 29.3 - 866.6 Mbps |
| | 802.11 ac_160MHz: 58.5 - 1733.4 Mbps |
| | 802.11 ax_20MHz: 8.6 - 286.8 Mbps |
| | 802.11 ax_40MHz: 17.2 - 573.6 Mbps |
| | 802.11 ax_80MHz: 36 - 1201 Mbps |
| | 802.11 ax_160MHz: 68 - 2402 Mbps |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 5 of 320

1.3 **Antenna Designation**

| Antenna Type | Supplier | Main / Aux | Antenna Part No. | Freq. (MHz) | Peak Antenna Gain (dBi) | Direction Gain (dBi) |
|-----------------|------------|---------------|--------------------------------|----------------|----------------------------|-------------------------|
| | | | | 5150~5250 | 2.92 | 6.02 |
| | Main | Main | 81EABS15.G07 | 5250~5350 | 2.50 | 5.38 |
| | | (DC33002NJ00) | 5470~5725 | 3.39 | 6.19 | |
| PIFA | WNC | | | 5725~5850 | 3.39 | 6.17 |
| PIFA | PIFA VVINC | | | 5150~5250 | 3.09 | 6.02 |
| | | | Aux 81EABS15.G08 (DC33002NJ10) | 5250~5350 | 2.23 | 5.38 |
| | | | | 5470~5725 | 2.97 | 6.19 |
| | | | | 5725~5850 | 2.92 | 6.17 |

Note:

- Pre-scanned was done on the above antennas, measurements were demonstrated by using the antenna with the highest gain as the worst case scenarios.
- Antenna information is provided by the applicant.



Page: 6 of 320

1.4 **FCC**

| Wi-Fi | Frequency Range | Channels | Rated Power(Avg) (dBm) (Worst Case) | Modulation Technology |
|------------------|-----------------|----------|--|--------------------------|
| a/ | 5180~5240 | 4 | 21.81 dBm | OFDM |
| n_HT/ | 5260~5320 | 4 | 21.81 dBm | OFDM |
| ac_VHT/ ax_HE | 5500~5720 | 12 | 21.71 dBm | OFDM |
| 20M | 5745-5825 | 5 | 21.76 dBm | OFDM |
| n UT | 5190~5230 | 2 | 18.21 dBm | OFDMA |
| n_HT ac_VHT/ | 5270~5310 | 2 | 18.34 dBm | OFDMA |
| ax_HE 40M | 5510~5710 | 6 | 18.31 dBm | OFDMA |
| 40101 | 5755-5795 | 2 | 18.26 dBm | OFDMA |
| | 5210 | 1 | 14.21 dBm | OFDM |
| ac_VHT/ | 5290 | 1 | 14.56 dBm | OFDMA |
| ax_HE 80M | 5530~5690 | 3 | 17.67 dBm | OFDMA |
| | 5775 | 1 | 17.71 dBm | OFDMA |
| ac_VHT/ | 5250 | 1 | 12.07 dBm | OFDMA |
| ax_HE 160M | 5570 | 1 | 15.57 dBm | OFDMA |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 7 of 320

1.5 **Test Methodology of Applied Standards**

FCC Part 15, Subpart E §15.407 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01 ANSI C63.10:2013

Test Facility 1.6

| Laboratory | Test Site Address | Test Site Name | FCC Designa- tion number | IC CAB identifier |
|-----------------|---|----------------|-----------------------------|-------------------|
| | | SAC 1 | | |
| | | SAC 3 | | |
| | | Conduction 1 | | |
| | No.134, Wu Kung Road, New Taipei | Conducted 1 | | |
| | Industrial Park, Wuku District, New | Conducted 2 | TW0027 | |
| | Taipei City, Taiwan. | Conducted 3 | | TW3702 |
| | | Conducted 4 | | |
| | | Conducted 5 | | |
| SGS Taiwan Ltd. | | Conducted 6 | | |
| Central RF Lab. | | Conduction C | TW0028 | |
| (TAF code 3702) | | SAC C | | |
| (1A1 Code 3702) | | SAC D | | |
| | | SAC G | | |
| | No 2 Koji 1et Pd. Gujeban Dietriet | Conducted A | | |
| | No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333 | Conducted B | | |
| | Taoyuan City, Taiwan 333 | Conducted C | | |
| | | Conducted D | | |
| | | Conducted E | | |
| | | Conducted F | | |
| | | Conducted G | | |

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.7 **Special Accessories**

There are no special accessories used while test was conducted.

Equipment Modifications 1.8

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnirections of the content of the conte



Page: 8 of 320

SYSTEM TEST CONFIGURATION

EUT Configuration 2.1

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.2 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz. the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Termselectronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemni-

fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

www.sgs.com.tw



Page: 9 of 320

2.4 **Measurement Results Explanation Example**

Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz 2.4.1

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.



Page: 10 of 320

Test Configuration 2.5

| Conducted Setup | Radiated Setup | |
|-----------------|----------------|--|
| EUT | EUT | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 11 of 320

SUMMARY OF TEST RESULT

| FCC Rules | Description Of Test | Result |
|----------------------------------|--------------------------------|-----------|
| §15.407(a) | Maximum Conducted Output Power | Compliant |
| §15.205 §15.209 §15.407(b) | Undesirable Radiated Emissions | Compliant |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279



Page: 12 of 320

DESCRIPTION OF TEST MODES

4.1 **Operating Frequencies**

Operated band

| 2 | | 4 | |
|----|---------------|---|----|
| СН | Freq (MHz) | | CH |
| 36 | 5180 | | 38 |
| 40 | 5200 | | 46 |
| 44 | 5220 | | |
| 48 | 5240 | | |

| t | in 5150 MHz ~5250 MHz: | | | | |
|---|------------------------|---------------|------|---------------|--|
| | 40 M | | 80 M | | |
| | CH | Freq (MHz) | СН | Freq (MHz) | |
| | 38 | 5190 | 42 | 5210 | |
| | 46 | 5230 | | | |

Operated band in 5250 MHz ~5350 MHz:

| operated by | | |
|---------------|--|--|
| 20 M | | |
| Freq (MHz) | | |
| 5260 | | |
| 5280 | | |
| 5300 | | |
| 5320 | | |
| | | |

| 110 111 0200 111 | | | | | | | |
|------------------|----|---------------|--|--|--|--|--|
| | 4 | 0 M | | | | | |
| | СН | Freq (MHz) | | | | | |
| | 54 | 5270 | | | | | |
| | 62 | 5310 | | | | | |
| | | | | | | | |

| _ | J | JU WII IZ | | | | |
|---|----|---------------|-------|---------------|--|--|
| | _ | 0 M | 160 M | | | |
| | СН | Freq (MHz) | СН | Freq (MHz) | | |
| | 58 | 5290 | 50 | 5250 | | |
| | | | | | | |

Operated band in 5470 MHz ~5725 MHz:

| 2 | 20 M | | | | | | |
|-----|---------------|--|--|--|--|--|--|
| СН | Freq (MHz) | | | | | | |
| 100 | 5500 | | | | | | |
| 104 | 5520 | | | | | | |
| 108 | 5540 | | | | | | |
| 112 | 5560 | | | | | | |
| 116 | 5580 | | | | | | |
| 120 | 5600 | | | | | | |
| 124 | 5620 | | | | | | |
| 128 | 5640 | | | | | | |
| 132 | 5660 | | | | | | |
| 136 | 5680 | | | | | | |
| 140 | 5700 | | | | | | |
| 144 | 5720 | | | | | | |

| ш | u III • | J41 U 1911 | IIZ ~J | IZJ IVII | 14 | | |
|---|---------|---------------|--------|---------------|----|--|--|
| | 4 | 0 M | 80 M | | | | |
| | СН | Freq (MHz) | СН | Freq (MHz) | | | |
| | 400 | ` ' | 400 | ` ' | | | |
| | 102 | 5510 | 106 | 5530 | | | |
| | 110 | 5550 | 122 | 5610 | | | |
| | 118 | 5590 | 138 | 5690 | | | |
| | 126 | 5630 | | | - | | |
| | 134 | 5670 | | | | | |
| | 142 | 5710 | | | | | |

160 M Freq (MHz)

5570

Operated band in 5725 MHz ~5850 MHz:

| 20 M | | | | | | |
|------|---------------|--|--|--|--|--|
| СН | Freq (MHz) | | | | | |
| 149 | 5745 | | | | | |
| 153 | 5765 | | | | | |
| 157 | 5785 | | | | | |
| 161 | 5805 | | | | | |
| 165 | 5825 | | | | | |

| 1 | 4 | 0 M | 8 | 0 M |
|-----------|-----|---------------|-----|---------------|
| eq Hz) | СН | Freq (MHz) | СН | Freq (MHz) |
| 45 | 151 | 5755 | 155 | 5775 |
| 65 | 159 | 5795 | | |
| 25 | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 13 of 320

4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The given UE is pre-scanned among below modes.

| Modulation | Tı | ransmiss | sion Chaiı | n | Single Transmission Spatial | Multiple Transmission Spatial |
|-------------|-------|----------|------------|-------|-----------------------------------|-------------------------------------|
| ⊠ 802.11 a | ⊠ Ch0 | ⊠ Ch1 | ☐ Ch2 | □ Ch3 | □ 1TX | ⊠ 2TX |
| ⊠ 802.11 ac | ⊠ Ch0 | ⊠ Ch1 | ☐ Ch2 | □ Ch3 | □ SISO | ⊠ MIMO |
| ⊠ 802.11 ax | ⊠ Ch0 | ⊠ Ch1 | ☐ Ch2 | □ Ch3 | □ SISO | ⊠ MIMO |



Page: 14 of 320

4. Observations have been done for 802.11 ax available RU configurations below and found that the lowest, heighest and Full RU results higher emissions.

| Only one RU can be enabled at any given time. | | | | | | | | | | |
|---|-------|------------------|------|-------------------|------------------|--------------|-------|--------------|------|--------------------|
| 8 02.11ax | 20MHz | | | | 8 02.11ax | | 40MHz | | | |
| RU type | 26 | 6-tone RU | 5 | 2-tone RU | | RU type | 26- | tone RU | : | 52-tone RU |
| | RU0 | [-121: -96] | RU37 | [-121: -70] | | | RU0 | [-243: -218] | RU37 | [-243: -192] |
| | RU1 | [-95: -70] | RU38 | [-68: -17] | | | RU1 | [-217: -192] | RU38 | [-189: -138] |
| | RU2 | [-68: -43] | RU39 | [17: 68] | | | RU2 | [-189: -164] | RU39 | [-109: -58] |
| | RU3 | [-42: -17] | RU40 | [70: 121] | | | RU3 | [-163: -138] | RU40 | [-55: -4] |
| | RU4 | [-16: -4, 4: 16] | RU41 | N/A | | | RU4 | [-136: -111] | RU41 | [4: 55] |
| | RU5 | [17: 42] | RU42 | N/A | | | RU5 | [-109: -84] | RU42 | [58: 109] |
| | RU6 | [43: 68] | RU43 | N/A | | | RU6 | [-83: -58] | RU43 | [138: 189] |
| | RU7 | [70: 95] | RU44 | N/A | | | RU7 | [-55: -30] | RU44 | [192: 243] |
| | RU8 | [96: 121] | RU45 | N/A | | | RU8 | [-29: -4] | RU45 | N/A |
| | RU9 | N/A | RU46 | N/A | | | RU9 | [4: 29] | RU46 | N/A |
| | RU10 | N/A | RU47 | N/A | | | RU10 | [30: 55] | RU47 | N/A |
| | RU11 | N/A | RU48 | N/A | | | RU11 | [58: 83] | RU48 | N/A |
| | RU12 | N/A | RU49 | N/A | | | RU12 | [84: 109] | RU49 | N/A |
| | RU13 | N/A | RU50 | N/A | | | RU13 | [111: 136] | RU50 | N/A |
| | RU14 | N/A | RU51 | N/A | | | RU14 | [138: 163] | RU51 | N/A |
| | RU15 | N/A | RU52 | N/A | | | RU15 | [164: 189] | RU52 | N/A |
| | RU16 | N/A | | | | | RU16 | [192: 217] | | |
| RU index and | RU17 | N/A | 10 | 06-tone RU | | RU index and | RU17 | [218: 243] | 1 | 06-tone RU |
| subcarrier | RU18 | N/A | RU53 | [-122: -17] | | subcarrier | RU18 | N/A | RU53 | [-243: -138] |
| range | RU19 | N/A | RU54 | [17: 122] | | range | RU19 | N/A | RU54 | [-109: -4] |
| | RU20 | N/A | RU55 | N/A | | | RU20 | N/A | RU55 | [4: 109] |
| | RU21 | N/A | RU56 | N/A | | | RU21 | N/A | RU56 | [138: 243] |
| | RU22 | N/A | RU57 | N/A | | | RU22 | N/A | RU57 | N/A |
| | RU23 | N/A | RU58 | N/A | | | RU23 | N/A | RU58 | N/A |
| | RU24 | N/A | RU59 | N/A | | | RU24 | N/A | RU59 | N/A |
| | RU25 | N/A | RU60 | N/A | | | RU25 | N/A | RU60 | N/A |
| | RU26 | N/A | | | | | RU26 | N/A | | |
| | RU27 | N/A | 2 | 42-tone RU | | | RU27 | N/A | 2 | 42-tone RU |
| | RU28 | N/A | RU61 | [-122: -2, 2:122] | | | RU28 | N/A | RU61 | [-244: -3] |
| | RU29 | N/A | RU62 | N/A | | | RU29 | N/A | RU62 | [3: 244] |
| | RU30 | N/A | RU63 | N/A | | | RU30 | N/A | RU63 | N/A |
| | RU31 | N/A | RU64 | N/A | | | RU31 | N/A | RU64 | N/A |
| | RU32 | N/A | | | | | RU32 | N/A | | |
| | RU33 | N/A | | | | | RU33 | N/A | 4 | 84-tone RU |
| | RU34 | N/A | | | | | RU34 | N/A | RU65 | [-244: -3, 3: 244] |
| | RU35 | N/A | | | | | RU35 | N/A | RU66 | N/A |
| | RU36 | N/A | | | | | RU36 | N/A | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 15 of 320

| RU type | | 6-tone RU | | | | |
|--------------|------|------------------|------------|--------------------|--|--|
| | DUA | tono ito | 52-tone RU | | | |
| | RU0 | [-499: -474] | RU37 | [-499: -448] | | |
| • | RU1 | [-473: -448] | RU38 | [-445: -394] | | |
| | RU2 | [-445: -420] | RU39 | [-365: -314] | | |
| | RU3 | [-419: -394] | RU40 | [-311: -260] | | |
| | RU4 | [-392: -367] | RU41 | [-257: -206] | | |
| | RU5 | [-365: -340] | RU42 | [-203: -152] | | |
| | RU6 | [-339: -314] | RU43 | [-123: -72] | | |
| | RU7 | [-311: -286] | RU44 | [-69: -18] | | |
| | RU8 | [-285: -260] | RU45 | [18: 69] | | |
| · [| RU9 | [-257: -232] | RU46 | [72: 123] | | |
| · [| RU10 | [-231: -206] | RU47 | [152: 203] | | |
| | RU11 | [-203: -178] | RU48 | [206: 257] | | |
| | RU12 | [-177: -152] | RU49 | [260: 311] | | |
| | RU13 | [-150: -125] | RU50 | [314: 365] | | |
| | RU14 | [-123: -98] | RU51 | [394: 445] | | |
| | RU15 | [-97: -72] | RU52 | [448: 499] | | |
| | RU16 | [-69: -44] | 1 | 06-tone RU | | |
| RU index and | RU17 | [-43: -18] | RU53 | [-499: -394] | | |
| subcarrier | RU18 | [-16: -4, 4: 16] | RU54 | [-365: -260] | | |
| range | RU19 | [18: 43] | RU55 | [-257: -152] | | |
| | RU20 | [44: 69] | RU56 | [-123: -18] | | |
| | RU21 | [72: 97] | RU57 | [18: 123] | | |
| | RU22 | [98: 123] | RU58 | [152: 257] | | |
| | RU23 | [125: 150] | RU59 | [260: 365] | | |
| | RU24 | [152: 177] | RU60 | [394: 499] | | |
| | RU25 | [178: 203] | 2 | 42-tone RU | | |
| | RU26 | [206: 231] | RU61 | [-500: -259] | | |
| | RU27 | [232: 257] | RU62 | [-258: -17] | | |
| ı | RU28 | [260: 285] | RU63 | [17: 258] | | |
| ı | RU29 | [286: 311] | RU64 | [259: 500] | | |
| ı | RU30 | [314: 339] | 4 | 84-tone RU | | |
| ı | RU31 | [340: 365] | RU65 | [-500: -17] | | |
| ı | RU32 | [367: 392] | RU66 | [17: 500] | | |
| | RU33 | [394: 419] | 9 | 96-tone RU | | |
| ı | RU34 | [420: 445] | RU67 | [-500: -3, 3: 500] | | |
| | RU35 | [448: 473] | | | | |
| | RU36 | [474: 499] | | | | |

5. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 320

| | | RADIA | TED EMISSION TES | I (BELOW 1 G | Hz) | | | |
|--|--|--|---|---------------|---|-----------|-----------------|--|
| MODE | FREQUENCY BAND (MHz) | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION | DATA (Mb | | ANTENNA PORT | |
| | 5180~5240 | 36 to 48 | 44 | | \ | / | | |
| 802.11a | 5260~5320 | 52 to 64 | 60 | OFDM | | | | |
| | 5500~5720 | 100 to 144 | 116 | OFDM | 6 | 1 | 2TX | |
| | 5745~5825 | 149 to 165 | 157 | | | | | |
| | | RADIA | TED EMISSION TES | ST (ABOVE 1 G | Hz) | | | |
| MODE | FREQUENCY | AVAILABLE | TESTED | MODULATION | DATA | RATE | ANTENNA | |
| MODE | BAND (MHz) | CHANNEL | CHANNEL | MODULATION | (Mb | ps) | PORT | |
| | 5180~5240 | 36 to 48 | 36,44 | | , | , | | |
| 000.44 | 5260~5320 | 52 to 64 | 60,64 | OFPM | | | OT) | |
| 802.11a | 5500~5720 | 100 to 144 | 100,116,140,144 | OFDM | 6 | 2TX | | |
| | 5745~5825 | 149 to 165 | 149,157,165 | | | | | |
| | 5180~5240 | 36 to 48 | 36 | | | | | |
| 000 44 \/LIT00 | 5260~5320 | 52 to 64 | 64 | OFDM | MO | 00 | MINAO | |
| 302.11ac VHT20 | 5500~5700 | 100 to 140 | 100,140,144 | OFDM | MC | 58 | MIMO | |
| | 5745~5825 | 149 to 165 | 149,165 | | | | | |
| | 5190~5230 | 38 to 46 | 38 | | | | | |
| 000 44 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ | 5270~5310 | 54 to 62 | 62 | OFPM | | | | |
| 302.11ac VHT40 | 5510~5670 | 102 to 134 | 102,134 | OFDM | MCS8 | | MIMO | |
| | 5755~5795 | 151 to 159 | 151,159 | | | | | |
| 802.11ac_VHT80 | 5210 | 42 | 42 | | | | | |
| | 5290 | 58 | 58 | 05014 | | 00 | MIMO | |
| | 5530~5610 | 106 to 138 | 106,122,138 | OFDM | MC | S0 | | |
| | 5775 | 155 | 155 | | | | | |
| | 5250 | 50 | 50 | 05014 | | | 140.40 | |
| 02.11ac_VHT160 | 5570 | 114 | 114 | OFDM | MC | Su | MIMO | |
| | | RADIA | TED EMISSION TES | ST (ABOVE 1 G | Hz) | | | |
| MODE | FREQUENCY | AVAILABLE | TESTED | MODULATION | RU | DATA RATE | ANTENNA | |
| MODE | BAND (MHz) | CHANNEL | CHANNEL | MODEL (NOI | CONFIGURATIO | (Mbps) | PORT | |
| | 5180~5240 | 36 to 48 | 36 | | | | | |
| - | | | | | FULL RU | | | |
| | 5260~5320 | 52 to 64 | 64 | | FULL RU 26/0,26/8 | | | |
| 802.11ax_HE20 | | | | OFDMA | | MCS0 | MIMO | |
| 802.11ax_HE20 | 5260~5320 | 52 to 64 | 64 | OFDMA | 26/0,26/8 | MCS0 | MIMO | |
| 802.11ax_HE20 | 5260~5320 5500~5720 5745~5825 | 52 to 64 100 to 144 149 to 165 | 64 100,140,144 | OFDMA | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 | MCS0 | MIMO | |
| 802.11ax_HE20 | 5260~5320 5500~5720 5745~5825 5190~5230 | 52 to 64 100 to 144 149 to 165 38 to 46 | 64 100,140,144 149,165 | OFDMA | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU | MCS0 | MIMO | |
| | 5260~5320 5500~5720 5745~5825 | 52 to 64 100 to 144 149 to 165 38 to 46 54 to 62 | 64 100,140,144 149,165 38 62 | _ | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU 26/9,26/27 | | МІМО | |
| | 5260~5320 5500~5720 5745~5825 5190~5230 5270~5310 | 52 to 64 100 to 144 149 to 165 38 to 46 | 64 100,140,144 149,165 38 | OFDMA OFDMA | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU | MCS0 | MIMO | |
| 802.11ax_HE20 802.11ax_HE40 | 5260~5320 5500~5720 5745~5825 5190~5230 5270~5310 5510~5670 5755~5795 | 52 to 64 100 to 144 149 to 165 38 to 46 54 to 62 102 to 142 | 64 100,140,144 149,165 38 62 102,134 | _ | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU 26/9,26/27 52/41,52/48 106/55,106/58 242/61,242/63 | | | |
| 802.11ax_HE40 | 5260~5320 5500~5720 5745~5825 5190~5230 5270~5310 5510~5670 | 52 to 64 100 to 144 149 to 165 38 to 46 54 to 62 102 to 142 151 to 159 | 64 100,140,144 149,165 38 62 102,134 151,159 | OFDMA | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU 26/9,26/27 52/41,52/48 106/55,106/58 242/61,242/63 | MCS0 | MIMO | |
| 802.11ax_HE40 | 5260~5320 5500~5720 5745~5825 5190~5230 5270~5310 5510~5670 5755~5795 | 52 to 64 100 to 144 149 to 165 38 to 46 54 to 62 102 to 142 151 to 159 | 64 100,140,144 149,165 38 62 102,134 151,159 42 58 | _ | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU 26/9,26/27 52/41,52/48 106/55,106/58 242/61,242/63 484/65 | | | |
| 802.11ax_HE40 | 5260~5320 5500~5720 5745~5825 5190~5230 5270~5310 5510~5670 5755~5795 5210 5290 | 52 to 64 100 to 144 149 to 165 38 to 46 54 to 62 102 to 142 151 to 159 42 58 | 64 100,140,144 149,165 38 62 102,134 151,159 | OFDMA | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU 26/9,26/27 52/41,52/48 106/55,106/58 242/61,242/63 484/65 | MCS0 | MIMO | |
| | 5260~5320 5500~5720 5745~5825 5190~5230 5270~5310 5510~5670 5755~5795 5210 5290 5530~5610 | 52 to 64 100 to 144 149 to 165 38 to 46 54 to 62 102 to 142 151 to 159 42 58 106 to 138 | 64 100,140,144 149,165 38 62 102,134 151,159 42 58 106,122,138 | OFDMA | 26/0,26/8 52/37,52/40 106/53,106/54 242/61 FULL RU 26/9,26/27 52/41,52/48 106/55,106/58 242/61,242/63 484/65 | MCS0 | MIMO | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 17 of 320

| | | | CONDUCTED | TEST | | | |
|-----------------|------------|------------|-----------------|-------------|-------------------------|-----------|----------|
| MODE | FREQUENCY | AVAILABLE | TESTED | MODULATION | DATA | RATE | ANTENNA |
| WODL | BAND (MHz) | CHANNEL | CHANNEL | WODULATION | (Mb | ps) | PORT |
| | 5180~5240 | 36 to 48 | 36,44,48 | | | | |
| 802.11a | 5260~5320 | 52 to 64 | 52,60,64 | OFDM | | : | 2TX |
| | 5500~5720 | 100 to 144 | 100,116,140,144 | OI DIVI | | 217 | |
| | 5745~5825 | 149 to 165 | 149,157,165 | | | | |
| | 5180~5240 | 36 to 48 | 36,44,48 | | | | |
| 802.11ac VHT20 | 5260~5320 | 52 to 64 | 52,60,64 | OFDM | MC | °C 0 | MIMO |
| 002.11ac VIII20 | 5500~5700 | 100 to 140 | 100,116,140 | OI DIVI | IVIC | IVIIIVIO | |
| | 5745~5825 | 149 to 165 | 149,157,165 | | | | |
| | 5190~5230 | 38 to 46 | 38,46 | | | | |
| 802.11ac VHT40 | 5270~5310 | 54 to 62 | 54,62 | OFDM | MCS8 | | MIMO |
| 002.11aC VI1140 | 5510~5670 | 102 to 134 | 102,110,134 | OFDIVI | | | |
| | 5755~5795 | 151 to 159 | 151,159 | | | | |
| | 5210 | 42 | 42 | | | | |
| 802.11ac_VHT80 | 5290 | 58 | 58 | OFDM | MC | 200 | MIMO |
| 002.11aC_VH100 | 5530~5610 | 106 to 138 | 106,122,138 | OFDIVI | MCS0 | | IVIIIVIO |
| | 5775 | 155 | 155 | | | | |
| 802.11ac_VHT160 | 5250 | 50 | 50 | OFDM | MC | 200 | MIMO |
| 002.11aC_VH1100 | 5570 | 114 | 114 | OFDIVI | MCS0 | | IVIIIVIO |
| | | | CONDUCTED | TEST | | | |
| MODE | FREQUENCY | AVAILABLE | TESTED | MODULATION | RU | DATA RATE | ANTENNA |
| MODE | BAND (MHz) | CHANNEL | CHANNEL | WIODULATION | CONFIGURATIO | (Mbps) | PORT |
| | 5180~5240 | 36 to 48 | 36,44,48 | | FULL RU | MCS0 | |
| | 5260~5320 | 52 to 64 | 52,60,64 | | 26/0,26/8 | | |
| 802.11ax_HE20 | 5500~5720 | 100 to 144 | 100,116,140,144 | OFDMA | 52/37,52/40 | | MIMO |
| | 5745~5825 | 149 to 165 | 149,157,165 | | 106/53,106/54 242/61 | | |
| | 5190~5230 | 38 to 46 | 38,46 | | FULL RU | | |
| | 5270~5310 | 54 to 62 | 54,62 | | 26/9,26/27 | | |
| 000 44 11540 | 5510~5670 | 102 to 142 | 102,110,134,142 | 05044 | 52/41,52/48 | | 141140 |
| 802.11ax_HE40 | | | | OFDMA | 106/55,106/58 | MCS0 | MIMO |
| | 5755~5795 | 151 to 159 | 151,159 | | 242/61,242/63 | | |
| | | | | | 484/65 | | |
| | 5210 | 42 | 42 | | | | |
| 802.11ax_HE80 | 5290 | 58 | 58 | OFDMA | FULL RU | MCS0 | MIMO |
| 002.11aX_NE0U | 5530~5610 | 106 to 138 | 106,122,138 | OFDIVIA | 996/67 | IVICOU | IVIIIVIU |
| | 5775 | 155 | 155 | | | | |
| 802.11ax_HE160 | 5290 | 58 | 58 | OFDMA | FULL RU | MCS0 | MIMO |
| 00∠.118X_⊓⊏100 | 5530~5610 | 106 to 138 | 106,122,138 | OFDIVIA | 1992/68 MCS0 | | IVIIIVIO |

Note:

The field strength of radiated emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 18 of 320

MEASUREMENT UNCERTAINTY

| Test Items | Un | certain | ty |
|--|-----|---------|----|
| Output Power measurement | +/- | 1 | dB |
| Undesignable radiated emission measurement | +/- | 1.68 | dB |
| Temperature | +/- | 0.4 | °C |
| Humidity | +/- | 3.5 | % |
| DC / AC Power Source | +/- | 1 | % |

| Radiated Spur | ious Emi | ssion Me | asurer | ment Uncertainty |
|--------------------------|----------|----------|--------|------------------|
| | +/- | 2.57 | dB | 9kHz~30MHz |
| Polarization: Vertical | +/- | 4.85 | dB | 30MHz - 1000MHz |
| Polarization. Vertical | +/- | 4.45 | dB | 1GHz - 18GHz |
| | +/- | 4.24 | dB | 18GHz - 40GHz |
| | +/- | 2.57 | dB | 9kHz~30MHz |
| Polarization: Horizontal | +/- | 4.37 | dB | 30MHz - 1000MHz |
| Polarization: Horizontal | +/- | 4.45 | dB | 1GHz - 18GHz |
| | +/- | 4.24 | dB | 18GHz - 40GHz |

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 19 of 320

MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

6.1 **Standard Applicable**

6.1.1 **Output Power**

| | | itput i owei | | | 4-04-40- | |
|----------|---------------------------|--------------------------|--------------------------------------|--|---|---|
| | | | | e-CRF Title | 47 §15.407 | |
| Band | (| EUT CATEGORY | Conducted Output Power | EIRP | TPC | Antenna Directional Gain Requirements |
| | | Fixed point-to- point | 1 Watt(30dBm) | Not required | Not required | 23dBi |
| U-NII-1 | Out door AP 1 Watt(30dBm) | | 1 Watt(30dBm) | Elevation angle above 30 degrees 125mW (21dBm) | Not required | 6dBi |
| | Indoor AP | | 1 Watt(30dBm) | Not required | Not required | 6dBi |
| | ٧ | Other | 250mW(23.98dBm) | Not required | Not required | 6dBi |
| U-NII-2A | ٧ | Other | 250mW(23.98dBm) or 11dBm+10 log B | Not required | When EIRP >500mW At least 6dB below EIRP | 6dBi |
| U-NII-2C | ٧ | Other | 250mW(23.98dBm) or 11dBm+10 log B | Not required | 1W (30dBm) | 6dBi |
| | ٧ | Other | 1 Watt(30dBm) | Not required | Not required | 6dBi |
| U-NII-3 | | Fixed point-to-point | 1 Watt(30dBm) | Not required | Not required | Not required |

^{1.} If transmitting antennas of directional gain greater than the antenna requirements column, the Maximum transmit power shall be reduced by the amount in dB that the direction-al gain of the antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnielectronic cornal occuments, subject to Terris and Conditions for Electronic Documents at https://www.sgs.com.tw/ lerms-and-Conditions.
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

^{2.} For the 10 log B, B is the 26 dB emission bandwidth.



Page: 20 of 320


6.2 Measurement Equipment Used:

| | Conducted E | mission Test | Site: Conducte | ed D | |
|-------------------|-----------------|------------------------|--------------------|------------|------------|
| EQUIPMENT TYPE | MFR | MODEL NUMBER | SERIAL NUM- BER | LAST CAL. | CAL DUE. |
| Spectrum Analyzer | KEYSIGHT | N9010B | MY59071574 | 06/25/2021 | 06/24/2022 |
| Power Meter | Anritsu | ML2496A | 2138002 | 11/12/2021 | 11/11/2022 |
| Power Sensor | Anritsu | MA2411B | 1911390 | 09/20/2021 | 09/19/2022 |
| Power Sensor | Anritsu | MA2411B | 1911398 | 09/22/2021 | 09/21/2022 |
| Test Software | SGS Taiwan | Radio Test Software | Ver.21 | N.C.R | N.C.R |
| Attenuator | Marvelous | MVE2213- 10 | RF13 | 11/18/2021 | 11/17/2022 |
| Attenuator | Marvelous | WATT- 218FS-10 | RF15 | 11/18/2021 | 11/17/2022 |
| Attenuator | Marvelous | WATT- 218FS-10 | RF16 | 11/18/2021 | 11/17/2022 |
| DC Block | PASTER- NACK | PE8210 | RF158 | 11/18/2021 | 11/17/2022 |

NOTE: N.C.R refers to Not Calibrated Required.

6.3 **Test Setup**

6.3.1 **Output Power**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 21 of 320

6.4 Measurement Procedure

6.4.1 **Output Power Measurements**

- 1. Place the EUT on the table and set it in transmitting mode.
- The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules .
- Remove the antenna from the EUT and then connect a low loss RF cable from the an-3. tenna port to the power meter
- Power Meter is used as the auxiliary test equipment to conduct the output power meas-4. urement.
- Record the max. reading and add 10 log(1/duty cycle).
- Repeat above procedures until all frequency (low, middle, and high channel) measured were complete.
- 7. MIMO mode: offset is set with "measure and add 10 Log (N)" to measurement for MIMO mode. Offset = cable loss + 10 log (N), where N is number of transmitting antenna, cable loss is specified below.

Note:

As per section F. 2). e). (ii) of FCC KDB 662911 D01

If antenna gains are not equal and each transmit antenna is driven by only one spatial stream, directional gain may be calculated by either of the following formulas.

• Directional Gain =
$$10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^{2}}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

NSS = the number of independent spatial streams of data;

NANT = the total number of antennas

 $g_{i,k} = /20$ 10Gk if the kth antenna is being fed by spatial stream i, or zero if it is not;

 \hat{G}_k is the gain in dBi of the kth antenna.

The antenna gain is not greater than 6 dBi. Therefore, reduction of power is not required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 22 of 320

6.5 Output Power Measurement Result

6.5.1 FCC Output power

802.11a 2TX

| | Frequency | Data | Power | Avg. POW | /ER (dBm) | TOTAL | TOTAL | REQUIRED | |
|-----|----------------|------|-------|----------|-----------|----------------|---------------|----------------|--------|
| СН | (MHz) | Rate | set | Ch0 | Ch1 | POWER (dBm) | POWER (mW) | LIMIT (dBm) | RESULT |
| 36 | 5180 | 6 | 14.5 | 14.72 | 14.31 | 18.79 | 75.683 | 23.96 | PASS |
| 40 | 5200 | 6 | 18 | 17.71 | 17.35 | 21.81 | 151.705 | 23.96 | PASS |
| 48 | 5240 | 6 | 15.5 | 15.89 | 15.77 | 20.10 | 102.329 | 23.96 | PASS |
| 52 | 5260 | 6 | 18 | 17.73 | 17.34 | 21.81 | 151.705 | 23.98 | PASS |
| 60 | 5300 | 6 | 18 | 17.68 | 17.3 | 21.77 | 150.314 | 23.98 | PASS |
| 64 | 5320 | 6 | 15 | 15.05 | 14.67 | 19.14 | 82.035 | 23.98 | PASS |
| 100 | 5500 | 6 | 14 | 13.95 | 13.62 | 18.06 | 63.973 | 23.79 | PASS |
| 116 | 5580 | 6 | 18 | 17.62 | 17.25 | 21.71 | 148.252 | 23.79 | PASS |
| 140 | 5700 | 6 | 13.5 | 13.64 | 13.31 | 17.75 | 59.566 | 23.79 | PASS |
| 144 | 5720(U-NII 2C) | 6 | 18.5 | 15.79 | 15.46 | 19.90 | 97.684 | 23.79 | PASS |
| 144 | 5720 (U-NII 3) | 6 | 18.5 | 12.78 | 12.45 | 16.89 | 48.818 | 29.83 | PASS |
| 149 | 5745 | 6 | 18.5 | 17.56 | 17.29 | 21.70 | 147.911 | 29.83 | PASS |
| 157 | 5785 | 6 | 18.5 | 17.63 | 17.33 | 21.76 | 149.968 | 29.83 | PASS |
| 165 | 5825 | 6 | 18.5 | 17.53 | 17.29 | 21.68 | 147.231 | 29.83 | PASS |

802.11ac_VHT20_MIMO

| СН | Frequency | Data | Power | Avg. POW | /ER (dBm) | TOTAL POWER | TOTAL POWER | REQUIRED LIMIT | RESULT |
|-----|----------------|------|-------|----------|-----------|----------------|----------------|-------------------|--------|
| СП | (MHz) | Rate | set | Ch0 | Ch1 | (dBm) | (mW) | (dBm) | RESULT |
| 36 | 5180 | MCS0 | 14.5 | 14.63 | 14.32 | 18.62 | 72.778 | 23.96 | PASS |
| 40 | 5200 | MCS0 | 14.5 | 14.75 | 14.49 | 18.77 | 75.336 | 23.96 | PASS |
| 48 | 5240 | MCS0 | 14.5 | 14.62 | 14.38 | 18.65 | 73.282 | 23.96 | PASS |
| 52 | 5260 | MCS0 | 14.5 | 14.77 | 14.52 | 18.79 | 75.683 | 23.98 | PASS |
| 60 | 5300 | MCS0 | 14.5 | 14.64 | 14.42 | 18.68 | 73.790 | 23.98 | PASS |
| 64 | 5320 | MCS0 | 14.5 | 14.7 | 14.41 | 18.70 | 74.131 | 23.98 | PASS |
| 100 | 5500 | MCS0 | 14 | 13.66 | 13.52 | 17.74 | 59.429 | 23.79 | PASS |
| 116 | 5580 | MCS0 | 14.5 | 14.65 | 14.35 | 18.65 | 73.282 | 23.79 | PASS |
| 140 | 5700 | MCS0 | 13.5 | 13.65 | 13.33 | 17.64 | 58.076 | 23.79 | PASS |
| 144 | 5720(U-NII 2C) | MCS0 | 15 | 13.37 | 13.20 | 17.42 | 55.259 | 23.79 | PASS |
| 144 | 5720 (U-NII 3) | MCS0 | 15 | 8.95 | 8.32 | 12.79 | 19.004 | 29.83 | PASS |
| 149 | 5745 | MCS0 | 15 | 14.68 | 14.37 | 18.67 | 73.621 | 29.83 | PASS |
| 157 | 5785 | MCS0 | 15 | 14.68 | 14.4 | 18.69 | 73.961 | 29.83 | PASS |
| 165 | 5825 | MCS0 | 15 | 14.62 | 14.36 | 18.64 | 73.114 | 29.83 | PASS |

802.11ac VHT40 MIMO

| СН | Frequency | Data | Power | Avg. POW | /ER (dBm) | TOTAL POWER | TOTAL POWER | REQUIRED LIMIT | RESULT |
|-----|----------------|------|-------|----------|-----------|----------------|----------------|-------------------|--------|
| СП | (MHz) | Rate | set | Ch0 | Ch1 | (dBm) | (mW) | (dBm) | KESULI |
| 38 | 5190 | MCS0 | 12.5 | 12.82 | 12.46 | 16.24 | 42.073 | 23.96 | PASS |
| 46 | 5230 | MCS0 | 14 | 14.56 | 14.27 | 18.01 | 63.241 | 23.96 | PASS |
| 54 | 5270 | MCS0 | 14 | 14.85 | 14.51 | 18.28 | 67.298 | 23.98 | PASS |
| 62 | 5310 | MCS0 | 14 | 14.42 | 14.18 | 17.90 | 61.660 | 23.98 | PASS |
| 102 | 5510 | MCS0 | 13 | 12.94 | 12.79 | 16.46 | 44.259 | 23.79 | PASS |
| 110 | 5550 | MCS0 | 14 | 14.65 | 14.33 | 18.09 | 64.417 | 23.79 | PASS |
| 134 | 5670 | MCS0 | 14 | 14.7 | 14.42 | 18.16 | 65.464 | 23.79 | PASS |
| 142 | 5710(U-NII 2C) | MCS0 | 14 | 13.78 | 13.52 | 17.25 | 53.127 | 23.79 | PASS |
| 142 | 5710 (U-NII 3) | MCS0 | 14 | 7.76 | 7.50 | 11.23 | 13.282 | 29.83 | PASS |
| 151 | 5755 | MCS0 | 15 | 14.72 | 14.44 | 18.18 | 65.766 | 29.83 | PASS |
| 159 | 5795 | MCS0 | 15 | 14.68 | 14.35 | 18.11 | 64.714 | 29.83 | PASS |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 23 of 320

802.11ac_VHT80_MIMO

| СН | Frequency | Data | Power | Avg. POW | Avg. POWER (dBm) | | TOTAL POWER | REQUIRED LIMIT | RESULT |
|-----|----------------|------|-------|----------|------------------|----------------|----------------|-------------------|--------|
| Сп | (MHz) | Rate | set | Ch0 | Ch1 | POWER (dBm) | (mW) | (dBm) | RESULI |
| 42 | 5210 | MCS0 | 10 | 10.81 | 10.62 | 14.21 | 26.363 | 23.96 | PASS |
| 58 | 5290 | MCS0 | 10.5 | 11.12 | 10.77 | 14.44 | 27.797 | 23.98 | PASS |
| 106 | 5530 | MCS0 | 13 | 12.15 | 11.86 | 15.50 | 35.481 | 23.79 | PASS |
| 122 | 5610 | MCS0 | 15 | 14.15 | 13.93 | 17.53 | 56.624 | 23.79 | PASS |
| 138 | 5690(U-NII 2C) | MCS0 | 15 | 13.75 | 13.50 | 17.12 | 51.489 | 23.79 | PASS |
| 138 | 5690 (U-NII 3) | MCS0 | 15 | 4.70 | 5.37 | 8.53 | 7.136 | 29.83 | PASS |
| 155 | 5775 | MCS0 | 15 | 14.28 | 14.14 | 17.70 | 58.884 | 29.83 | PASS |

802.11ac_VHT160_MIMO

| СН | Frequency | Data | Power set | Avg. POW | /ER (dBm) | TOTAL POWER (dBm) | TOTAL POWER (mW) | REQUIRED LIMIT | RESULT |
|-----|-----------|------|-----------|----------|-----------|-------------------------|------------------------|-------------------|--------|
| OH | (MHz) | Rate | | Ch0 | Ch1 | | | (dBm) | KESULI |
| 50 | 5250 | MCS0 | 9.5 | 7.23 | 6.97 | 10.46 | 11.117 | 23.98 | PASS |
| 114 | 5570 | MCS0 | 11 | 10.48 | 10.21 | 13.70 | 23.442 | 23.79 | PASS |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號



Page: 24 of 320

| 202 | 11 av | HEON | MIMO |
|-----|-------|------|------|

| 011 | Frequency | Data | | Power | Avg. POV | VER (dBm) | TOTAL | TOTAL | REQUIRED | D=c |
|-----|----------------|--------------|-----------------|----------|----------------|----------------|----------------|------------------|---|--------------|
| СН | (MHz) | Rate | RU config. | set | Ch0 | Ch1 | POWER (dBm) | POWER (mW) | LIMIT (dBm) | RESUL |
| | | MCS0 | full | 14 | 14.92 | 14.71 | 18.72 | 74.473 | 23.96 | PASS |
| | | MCS0 | 26/0 | 11.5 | 11.71 | 11.38 | 15.45 | 35.075 | 23.96 | PASS |
| 36 | 5180 | MCS0 | 52/37 | 12.5 | 12.53 | 12.29 | 16.31 | 42.756 | 23.96 | PASS |
| | | MCS0 | 106/53 | 12 | 12.07 | 11.84 | 15.86 | 38.548 | 23.96 | PASS |
| | | MCS0 | 242/61 | 10.5 | 10.41 | 10.19 | 14.20 | 26.303 | 23.96 | PASS |
| | | MCS0 | full | 14 | 15.12 | 14.84 | 18.88 | 77.268 | • | PASS |
| 40 | 5000 | MCS0 | 26/0 | 11 | 11.65 | 11.34 | 15.40 | 34.674 | _ | PASS |
| 40 | 5200 | MCS0 | 52/37 | 13 | 13.66 | 13.27 | 17.37 | 54.576 | | PASS |
| | | MCS0 | 106/53 | 13 | 13.71 | 13.32 | 17.42 | 55.208 | | PASS |
| | | MCS0 | 242/61 full | 13 14 | 13.61 15.06 | 13.23 14.73 | 17.33 | 54.075 | | PASS PASS |
| | | MCS0 MCS0 | 26/8 | 11 | 11.41 | 11.16 | 18.80 15.19 | 75.858 33.037 | • | PASS |
| 48 | 5240 | MCS0 | 52/40 | 13 | 13.54 | 13.22 | 17.28 | 53.456 | • | PASS |
| 40 | 3240 | MCS0 | 106/54 | 13 | 13.5 | 13.32 | 17.20 | 53.827 | • | PASS |
| | | MCS0 | 242/61 | 13 | 13.33 | 13.18 | 17.16 | 52.000 | • | PASS |
| | | MCS0 | full | 14 | 14.97 | 14.67 | 18.72 | 74.473 | _ | PASS |
| | | MCS0 | 26/0 | 10 | 10.84 | 10.53 | 14.59 | 28.774 | • | PASS |
| 52 | 5260 | MCS0 | 52/37 | 13 | 13.61 | 13.28 | 17.35 | 54.325 | | PASS |
| | | MCS0 | 106/53 | 13 | 13.54 | 13.21 | 17.28 | 53.456 | | PASS |
| | | MCS0 | 242/61 | 13 | 13.62 | 13.35 | 17.39 | 54.828 | 23.96 | PASS |
| | | MCS0 | full | 14 | 14.92 | 14.63 | 18.68 | 73.790 | 23.96 | PASS |
| | | MCS0 | 26/8 | 11 | 11.15 | 10.85 | 14.90 | 30.903 | 23.96 | PASS |
| 60 | 5300 | MCS0 | 52/40 | 13 | 13.48 | 13.25 | 17.27 | 53.333 | 23.96 | PASS |
| | | MCS0 | 106/54 | 13 | 13.44 | 13.19 | 17.22 | 52.723 | 23.96 | PASS |
| | | MCS0 | 242/61 | 13 | 13.4 | 13.18 | 17.19 | 52.360 | 23.96 | PASS |
| | | MCS0 | full | 14 | 15.13 | 14.84 | 18.89 | 77.446 | 23.96 | PASS |
| | | MCS0 | 26/8 | 10 | 10.89 | 10.62 | 14.66 | 29.242 | 23.96 | PASS |
| 64 | 5320 | MCS0 | 52/40 | 12.5 | 12.34 | 12.15 | 16.15 | 41.210 | 23.96 | PASS |
| | | MCS0 | 106/54 | 12 | 11.94 | 11.75 | 15.75 | 37.584 | | PASS |
| | | MCS0 | 242/61 | 11.5 | 11.62 | 11.33 | 15.38 | 34.514 | • | PASS |
| | | MCS0 | full | 14 | 14.25 | 14.02 | 18.04 | 63.680 | • | PASS |
| | | MCS0 | 26/0 | 10.5 | 9.53 | 9.32 | 13.33 | 21.528 | | PASS |
| 100 | 5500 | MCS0 | 52/37 | 11 | 9.85 | 9.65 | 13.65 | 23.174 | | PASS |
| | | MCS0 | 106/53 | 10.5 | 9.52 | 9.27 | 13.30 | 21.380 | 23.96 | PASS |
| | | MCS0 | 242/61 | 10.5 | 9.48 | 9.22 | 13.25 | 21.135 | • | PASS |
| | | MCS0 | full | 15 | 15.04 | 14.83 | 18.84 | 76.560 | • | PASS |
| 440 | 5500 | MCS0 | 26/0 | 10 | 9.74 | 9.41 | 13.48 | 22.284 | | PASS |
| 116 | 5580 | MCS0 | 52/37 106/53 | 12 13 | 11.89 13.44 | 11.63 | 15.66 | 36.813 | | PASS PASS |
| | | MCS0 MCS0 | 242/61 | 13 | 13.44 | 13.26 13.22 | 17.25 17.22 | 53.088 52.723 | | PASS |
| | | MCS0 | full | 14 | 13.95 | 13.68 | 17.72 | 59.156 | | PASS |
| | | MCS0 | 26/8 | 8.5 | 8.02 | 7.89 | 11.86 | 15.346 | | PASS |
| 140 | 5700 | MCS0 | 52/40 | 8 | 7.17 | 6.82 | 10.90 | 12.303 | | PASS |
| 140 | 3700 | MCS0 | 106/54 | 8 | 7.12 | 6.76 | 10.85 | 12.162 | | PASS |
| | | MCS0 | 242/61 | 7.5 | 6.35 | 6.13 | 10.14 | 10.328 | | PASS |
| | 5720(U-NII 2C) | MCS0 | full | 14 | 12.58 | 12.42 | 16.40 | 43.636 | _ | PAS |
| | 5720 (U-NII 3) | MCS0 | full | 14 | 7.89 | 7.70 | 11.70 | 14.791 | | PASS |
| | | MCS0 | 26/0 | 12 | 9.20 | 8.98 | 18.81 | 76.033 | | PASS |
| | | MCS0 | 26/8 | 12 | 9.13 | 8.86 | 12.90 | 19.487 | | PASS |
| 144 | | MCS0 | 52/37 | 15 | 11.52 | 11.27 | 15.30 | 33.862 | | PASS |
| | 5720 | MCS0 | 52/40 | 15 | 11.59 | 11.35 | 15.37 | 34.451 | 29.83 | PAS |
| | | MCS0 | 106/53 | 16 | 13.42 | 13.23 | 17.23 | 52.800 | 29.83 | PAS |
| | | MCS0 | 106/54 | 16 | 13.48 | 13.27 | 17.28 | 53.414 | 29.83 | PAS |
| | | MCS0 | 242/61 | 14 | 13.53 | 13.36 | 17.35 | 54.277 | 29.83 | PAS |
| | | MCS0 | full | 15 | 15.07 | 14.74 | 18.81 | 76.033 | 29.83 | PAS |
| | | MCS0 | 26/0 | 13 | 12.34 | 12.21 | 16.18 | 41.495 | 29.83 | PAS |
| 149 | 5745 | MCS0 | 52/37 | 13 | 12.38 | 12.25 | 16.22 | 41.879 | | PAS |
| | | MCS0 | 106/53 | 13 | 12.29 | 12.15 | 16.12 | 40.926 | | PAS |
| | | MCS0 | 242/61 | 13.5 | 12.96 | 12.78 | 16.77 | 47.534 | | PAS |
| | | MCS0 | full | 15 | 15.12 | 14.79 | 18.86 | 76.913 | | PAS |
| | | MCS0 | 26/8 | 14 | 13.43 | 13.22 | 17.23 | 52.845 | | PAS |
| 157 | 5785 | MCS0 | 52/40 | 14 | 13.25 | 13.08 | 17.07 | 50.933 | | PAS |
| | | MCS0 | 106/54 | 14 | 13.38 | 13.15 | 17.17 | 52.119 | | PAS |
| | | MCS0 | 242/61 | 14 | 13.47 | 13.29 | 17.28 | 53.456 | | PASS |
| | | MCS0 | full | 15 | 14.97 | 14.63 | 18.70 | 74.131 | | PAS |
| 405 | ==== | MCS0 | 26/8 | 13.5 | 12.89 | 12.67 | 16.68 | 46.559 | | PASS |
| 165 | 5825 | MCS0 | 52/40 | 13.5 | 13.34 | 13.09 | 17.12 | 51.523 | | PASS |
| | | MCS0 | 106/54 | 13.5 | 13.41 | 13.17 | 17.19 | 52.360 | 29.83 | PASS |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 25 of 320

802.11ax HE40 MIMO

| СН | Frequency | Data | RU config. | Power | Avg. POV | /ER (dBm) | TOTAL POWER | TOTAL POWER | REQUIRED LIMIT | RESUL |
|-----|------------------|------|------------------|----------|----------------|----------------|----------------|------------------|--|--------------|
| | (MHz) | Rate | | set | Ch0 | Ch1 | (dBm) | (mW) | (dBm) | |
| | | MCS0 | full | 12.5 | 12.94 | 12.77 | 16.39 | 43.551 | 23.96 | PASS |
| | | MCS0 | 26/9 | 11 | 8.24 | 7.93 | 14.56 | 28.576 | 23.96 | PASS |
| 38 | 5190 | MCS0 | 52/41 | 11 | 6.98 | 6.85 | 14.62 | 28.973 | 23.96 | PASS |
| | | MCS0 | 106/55 | 11 | 14.83 | 14.52 | 15.02 | 31.769 | 23.96 | PASS |
| | | MCS0 | 242/61 | 9 | 11.95 | 11.74 | 11.62 | 14.521 | 23.96 | PASS |
| | | MCS0 | 484/65 full | 8 15 | 13.72 13.65 | 13.55 13.47 | 10.45 18.21 | 11.092 66.222 | 23.96 | PASS PASS |
| | | MCS0 | 26/27 | 12 | 13.69 | 13.47 | 15.38 | 34.514 | 23.96 23.96 | PASS |
| | | MCS0 | 52/48 | 14 | 13.85 | 13.65 | 17.17 | 52.119 | 23.96 | PASS |
| 46 | 5230 | MCS0 | 106/58 | 14 | 14.93 | 14.67 | 17.17 | 51.286 | 23.96 | PASS |
| | | MCS0 | 242/63 | 14 | 12.51 | 12.24 | 17.13 | 51.642 | 1 | PASS |
| | | MCS0 | 484/65 | 14 | 13.92 | 13.64 | 17.13 | 53.580 | | PASS |
| | | MCS0 | full | 15 | 13.82 | 13.59 | 18.34 | 68.234 | | PASS |
| | | MCS0 | 26/9 | 12.5 | 13.84 | 13.55 | 15.91 | 38.994 | | PASS |
| | | MCS0 | 52/41 | 14 | 13.78 | 13.49 | 17.32 | 53.951 | | PASS |
| 54 | 5270 | MCS0 | 106/55 | 14 | 13.25 | 13.03 | 17.24 | 52.966 | | PASS |
| | | MCS0 | 242/62 | 14 | 10.81 | 10.57 | 17.23 | 52.845 | | PASS |
| | | MCS0 | 484/65 | 14 | 10.74 | 10.51 | 17.17 | 52.119 | 23.96 | PASS |
| | | MCS0 | full | 13.5 | 10.85 | 10.61 | 16.68 | 46.559 | 23.96 | PASS |
| | | MCS0 | 26/27 | 11 | 10.34 | 10.18 | 14.23 | 26.485 | 23.96 | PASS |
| 00 | 5040 | MCS0 | 52/48 | 11 | 6.17 | 5.82 | 14.16 | 26.062 | 23.96 | PASS |
| 62 | 5310 | MCS0 | 106/58 | 11 | 13.14 | 12.85 | 14.27 | 26.730 | 23.96 | PASS |
| | | MCS0 | 242/62 | 11 | 6.3 | 6.06 | 13.80 | 23.988 | 23.96 | PASS |
| | | MCS0 | 484/65 | 10 | 8.95 | 8.62 | 9.53 | 8.974 | 23.96 23.96 23.96 23.96 3 23.96 | PASS |
| | | MCS0 | full | 13.5 | 8.71 | 8.45 | 16.53 | 44.978 | 23.96 | PASS |
| | | MCS0 | 26/9 | 10 | 8.53 | 8.27 | 9.72 | 9.376 | 23.96 | PASS |
| 102 | 5510 | MCS0 | 52/41 | 10 | 7.52 | 7.33 | 12.32 | 17.061 | 23.96 | PASS |
| 102 | 3310 | MCS0 | 106/55 | 10 | 14.89 | 14.55 | 12.12 | 16.293 | 23.96 | PASS |
| | | MCS0 | 242/61 | 9.5 | 10.11 | 9.85 | 11.94 | 15.631 | 23.96 | PASS |
| | | MCS0 | 484/65 | 8 | 12.79 | 12.56 | 10.96 | 12.474 | 23.96 | PASS |
| | | MCS0 | full | 15 | 13.76 | 13.59 | 18.26 | 66.988 | | PASS |
| | | MCS0 | 26/27 | 10.5 | 14.15 | 13.82 | 13.52 | 22.491 | | PASS |
| 110 | 5550 | MCS0 | 52/48 | 13 | 12.67 | 12.67 | 16.21 | 41.783 | | PASS |
| | | MCS0 | 106/58 | 14 | 14.92 | 14.62 | 17.21 | 52.602 | | PASS |
| | | MCS0 | 242/63 | 14.5 | 8.46 | 8.25 | 17.52 | 56.494 | | PASS |
| | | MCS0 | 484/65 | 13 | 9.21 | 8.89 | 16.21 | 41.783 | | PASS |
| | | MCS0 | full | 15 | 9.08 | 8.86 | 18.31 | 67.764 | | PASS |
| | | MCS0 | 26/9 | 9 | 8.25 | 8.07 | 11.89 | 15.453 | | PASS |
| 134 | 5670 | MCS0 | 52/41 | 9.5 | 6.87 | 6.64 | 12.59 | 18.155 | | PASS |
| | | MCS0 | 106/55 | 9.5 | 14.76 | 14.47 | 12.51 | 17.824 | | PASS |
| | | MCS0 | 242/62 484/65 | 9 7.5 | 10.32 12.2 | 10.09 11.92 | 11.70 10.29 | 14.791 10.691 | | PASS PASS |
| | 5710(U-NII 2C) | MCS0 | 484/65 full | 15 | 14.17 | 13.90 | 17.58 | 57.287 | 23.96 23.96 23.96 23.96 23.96 23.96 23.96 23.96 23.96 23.96 23.96 23.96 | PASS |
| | 5710(U-NII 2C) | MCS0 | full | 15 | 5.77 | 5.35 | 9.11 | 8.142 | | PASS |
| | 37 TO (U-INII 3) | MCS0 | 26/27 | 11 | 10.32 | 10.09 | 13.74 | 23.659 | | PASS |
| 142 | | MCS0 | 52/48 | 12 | 12.20 | 11.92 | 15.60 | 36.308 | | PASS |
| | 5710 | MCS0 | 106/58 | 12 | 11.33 | 11.05 | 14.73 | 29.717 | | PASS |
| | 0,10 | MCS0 | 242/63 | 12 | 10.86 | 10.63 | 14.28 | 26.792 | | PASS |
| | | MCS0 | 484/65 | 13 | 11.28 | 11.07 | 14.71 | 29.580 | | PASS |
| | | MCS0 | full | 15.5 | 14.82 | 14.53 | 18.21 | 66.222 | | PASS |
| | | MCS0 | 26/9 | 12.5 | 11.84 | 11.62 | 15.27 | 33.651 | • | PASS |
| 454 | -7 | MCS0 | 52/41 | 12 | 11.27 | 11.08 | 14.71 | 29.580 | | PASS |
| 151 | 5755 | MCS0 | 106/55 | 12.5 | 11.7 | 11.57 | 15.17 | 32.885 | | PASS |
| | | MCS0 | 242/61 | 12 | 11.23 | 11.04 | 14.67 | 29.309 | • | PASS |
| | | MCS0 | 484/65 | 11.5 | 10.66 | 10.45 | 14.09 | 25.645 | | PASS |
| | | MCS0 | full | 15.5 | 14.87 | 14.58 | 18.26 | 66.988 | 29.83 | PASS |
| | | MCS0 | 26/27 | 13 | 12.47 | 12.22 | 15.88 | 38.726 | 29.83 | PASS |
| 450 | | MCS0 | 52/41 | 13 | 12.25 | 12.08 | 15.70 | 37.154 | 29.83 | PASS |
| 159 | 5795 | MCS0 | 106/58 | 13.5 | 12.73 | 12.55 | 16.18 | 41.495 | 29.83 | PASS |
| | | MCS0 | 242/62 | 12.5 | 11.88 | 11.68 | 15.32 | 34.041 | 29.83 | PASS |
| | | MCS0 | 484/65 | 12.5 | 11.85 | 11.62 | 15.27 | 33.651 | 29.83 | PASS |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非另有說明,此報告結果僅對測試之權品負責,同時此樣品僅保留例大。本報告未經本公司書面評可,不可部份復製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 26 of 320

802.11ax_HE80_MIMO

| СН | Frequency | Data | RU config. | Power | Avg. POW | /ER (dBm) | TOTAL POWER | TOTAL POWER | REQUIRED LIMIT | RESULT |
|-----|----------------|------|-------------|-------|----------|-----------|----------------|----------------|-------------------|--------|
| 011 | (MHz) | Rate | itto comig. | set | Ch0 | Ch1 | (dBm) | (mW) | (dBm) | KEGGET |
| 42 | 5210 | MCS0 | full | 11 | 10.81 | 10.62 | 14.21 | 26.363 | 23.96 | PASS |
| 42 | 3210 | MCS0 | 996/67 | 7 | 7.53 | 7.25 | 10.88 | 12.246 | 23.96 | PASS |
| 58 | 5290 | MCS0 | full | 11 | 11.19 | 10.94 | 14.56 | 28.576 | 23.98 | PASS |
| 36 | 5290 | MCS0 | 996/67 | 8 | 9.48 | 9.15 | 12.81 | 19.099 | 23.98 | PASS |
| 106 | 5530 | MCS0 | full | 12.5 | 12.13 | 11.82 | 15.47 | 35.237 | 23.79 | PASS |
| 100 | 3330 | MCS0 | 996/67 | 8 | 7.97 | 7.81 | 11.38 | 13.740 | 23.79 | PASS |
| 122 | 5610 | MCS0 | full | 15 | 14.31 | 14.05 | 17.67 | 58.479 | 23.79 | PASS |
| 122 | 3010 | MCS0 | 996/67 | 9.5 | 9.74 | 9.39 | 13.06 | 20.230 | 23.79 | PASS |
| | 5690(U-NII 2C) | MCS0 | full | 15 | 13.95 | 13.61 | 17.27 | 53.371 | 23.79 | PASS |
| 138 | 5690 (U-NII 3) | MCS0 | full | 15 | 2.48 | 2.33 | 5.90 | 3.888 | 29.83 | PASS |
| | 5690 | MCS0 | 996/67 | 10 | 9.24 | 9.06 | 12.64 | 18.365 | 29.83 | PASS |
| 155 | 5775 | MCS0 | full | 15 | 14.37 | 14.06 | 17.71 | 59.020 | 29.83 | PASS |
| 100 | 3//5 | MCS0 | 996/67 | 9 | 8.44 | 8.22 | 11.82 | 15.205 | 29.83 | PASS |

802.11ax_HE160_MIMO

| СН | Frequency | Data RU config. | | Power | Avg. POWER (dBm) | | TOTAL POWER | TOTAL POWER | REQUIRED LIMIT | RESULT |
|------|-----------|-----------------|-----------|-------|------------------|-------|----------------|----------------|-------------------|--------|
| On . | (MHz) | Rate | KO comig. | set | Ch0 | Ch1 | (dBm) | (mW) | (dBm) | RESULI |
| 50 | 50 5250 | MCS0 | full | 9 | 8.81 | 8.66 | 12.07 | 16.106 | 23.98 | PASS |
| 50 | | MCS0 | 1992/68 | 6.5 | 5.38 | 5.14 | 8.60 | 7.244 | 23.98 | PASS |
| 114 | 5570 | MCS0 | full | 11 | 10.62 | 10.1 | 13.70 | 23.442 | 23.79 | PASS |
| | 5570 | MCS0 | 1992/68 | 12.5 | 12.35 | 12.11 | 15.57 | 36.058 | 23.79 | PASS |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 27 of 320

UNDESIRABLE RADIATED EMISSION MEASUREMENT

7.1 Standard Applicable

 $EIRP = ((E*d)^2) / 30$, where E is the field strength in V/m, d is the measurement distance (3m), EIRP is the equivalent isotropically radiated power in Watts.

7.1.1 5150~5850 MHz

| Applicable | Operation | EIRP | | Field Strength | |
|-------------------------------------|-----------|--|---------------------|-------------------|--|
| to Freq. (MHz) | | Freq. (MHz) | Limits (dBm/MHz) | @ 3m | |
| 15.407(b)(1) RSS-247 §6.2.1.2 | 5150~5250 | f ≤ 5150 | | | |
| 15.407(b)(2) RSS-247 §6.2.2.2 | 5250~5350 | f ≥ 5350 | PK: -27 | PK: 68.2 | |
| 15.407(b)(3) RSS-247 §6.2.3.2 | 5475~5725 | f ≤ 5470 f ≥ 5725 | | | |
| | | at 75 MHz or more above or be- low the band edge | PK:-27 | PK: 68.2 | |
| 15.407(b)(4)(i) RSS-247 §6.2.4.2 | 5725~5850 | increasing linearly from 75~25MHz above or below the band edge | | PK: 68.2~105.2 | |
| KSS-247 90.2.4.2 | | increasing linearly from 25~5MHz above or below the band edge | PK:10~15.6 | PK: 105.2~110.8 | |
| | | increasing linearly from 5~0 MHz above or below the band edge | PK: 15.6~27 | PK:110.8~122.2 | |

7.1.2 **Spurious Emission**

Unwanted spurious emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

| Frequency (MHz) | Field strength (microvolts/meter) | Distance (meters) |
|--------------------|-----------------------------------|----------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note:

The lower limit shall apply at the transition frequencies. 1.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnirections of the content of the conte



Page: 28 of 320

7.2 Measurement Equipment Used:

| Radiated Emission Test Site: SAC G | | | | | | | | | |
|------------------------------------|----------------------|--|--------------------------------|------------|------------|--|--|--|--|
| EQUIPMENT TYPE | MFR | MODEL NUM- BER | SERIAL NUM- BER | LAST CAL. | CAL DUE. | | | | |
| Broadband Antenna | SCHWARZ- BECK | VULB 9168 | 1206 | 02/15/2022 | 02/14/2023 | | | | |
| Horn Antenna | Schwarzbeck | BBHA9170 | 184 | 12/16/2021 | 12/15/2022 | | | | |
| Horn Antenna | RF SPIN | DRH18-E | 210105A18E | 04/09/2021 | 04/08/2022 | | | | |
| Loop Antenna | ETS.LIND- GREN | 6502 | 143303 | 05/07/2021 | 05/06/2022 | | | | |
| 3m Site NSA | SGS | 966 chamber G | N/A | 03/30/2021 | 03/29/2022 | | | | |
| 3m Site NSA | SGS | 966 chamber G | N/A | 03/30/2022 | 03/29/2023 | | | | |
| Spectrum Analyzer | KEYSIGHT | N9010A | MY51440113 | 07/13/2021 | 07/12/2022 | | | | |
| Test Software | audix | e3 | E3 20923 SGS Ver.9 (C) | N.C.R | N.C.R | | | | |
| Pre-Amplifier | EMC Instru- ments | EMC184045B | 980135 | 10/27/2021 | 10/26/2022 | | | | |
| Pre-Amplifier | EMC Instru- ments | EMC330N | 980781 | 03/15/2021 | 03/14/2022 | | | | |
| Pre-Amplifier | EMC Instru- ments | EMC330N | 980781 | 03/15/2022 | 03/14/2023 | | | | |
| Pre-Amplifier | EMC Instru- ments | EMC118A45SE | 980815 | 03/15/2021 | 03/14/2022 | | | | |
| Pre-Amplifier | EMC Instru- ments | EMC118A45SE | 980815 | 03/15/2022 | 03/14/2023 | | | | |
| Attenuator | Marvelous | MVE2213-10 | RF05 | 11/18/2021 | 11/17/2022 | | | | |
| Highpass Filter | WI | WHKX10-2624- 3200-1800- 80SS | 1 | 05/10/2021 | 05/09/2022 | | | | |
| Highpass Filter | WI | WHKX10-6090- 7000-17000- 80SS | 1 | 05/10/2021 | 05/09/2022 | | | | |
| Coaxial Cable | EMC Instru- ments | EMCCFD400- NM-NM-8000- 5000-2000 | 210216 · 210217 · 210218 | 03/15/2021 | 03/14/2022 | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 29 of 320

| Coaxial Cable | EMC Instru- ments | EMCCFD400- NM-NM-8000- 5000-2000 | 210216 · 210217 · 210218 | 03/15/2022 | 03/14/2023 |
|---------------|----------------------|--|--------------------------------|------------|------------|
| Coaxial Cable | EMC Instru- ments | EMC104-SM- SM-8000-5000- 5000 | 210219 \ 210220 \ 210221 | 03/15/2021 | 03/14/2022 |
| Coaxial Cable | EMC Instru- ments | EMC104-SM- SM-8000-5000- 5000 | 210219 \ 210220 \ 210221 | 03/15/2022 | 03/14/2023 |
| Coaxial Cable | EMC Instru- ments | EMC105-NM- NM-5000- 15000 | 210224 \ 210306 | 03/15/2021 | 03/14/2022 |
| Coaxial Cable | EMC Instru- ments | EMC105-NM- NM-5000- 15000 | 210224 \ 210306 | 03/15/2022 | 03/14/2023 |


NOTE: N.C.R refers to Not Calibrated Required.




Page: 30 of 320

7.3 **Test Setup**

(A) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz

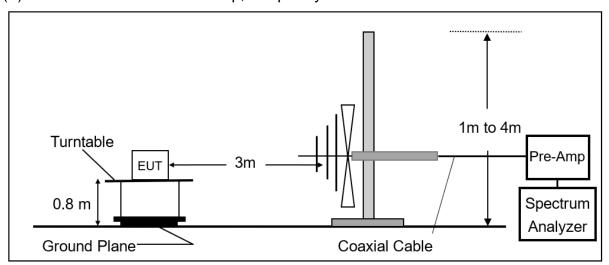

(B) Radiated Emission Test Set-Up, Frequency Above 1GHz

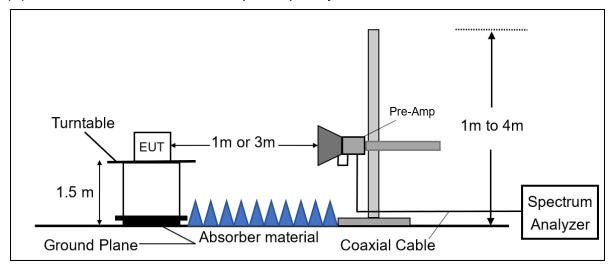

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnirections formed accuments, subject to Pernis and Conductors in Electrome December 2012 (Fig. 2012). Attended to the initiation of Indianity, inclining fication and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 31 of 320

7.4 **Measurement Procedure**

- 1. The testing follows FCC KDB 789033 D02.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission
- EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz
- Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Maximum Emission Measure-7. ments at frequency above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T 8. (Duty cycle < 98%) for Average Emission Measurements at frequency above 1 GHz.
- When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- **12.** Repeat above procedures until all frequency measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 32 of 320

7.5 **Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual $FS(dB\mu V/m) = SPA$. Reading level(dB μV) + Factor(dB)

 $Factor(dB) = Antenna\ Factor(dB\mu V/m) + Cable\ Loss(dB) - Pre\ Amplifier\ Gain(dB)$

7.6 Test Results of Radiated Spurious Emissions from 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

Pre-scan was done at frequency 5.47 GHz and 5.85 GHz for bandedge measurement of straddle channels 138, 142 and 144 which was 20dB lower than the limit per 15.31(o) was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製

台灣檢驗科技股份有限公司

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw

Member of SGS Group



Page: 33 of 320

7.7 **Radiated Spurious Emission Measurement Result**


7.7.1 **Spurious Emission**

Test Site :SAC G Report Number :E2/2022/30010

Test Date :2022-03-23 Operation Mode :802.11a

Test Frequency :5200 MHz Temp./Humi. :20.5/70 Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

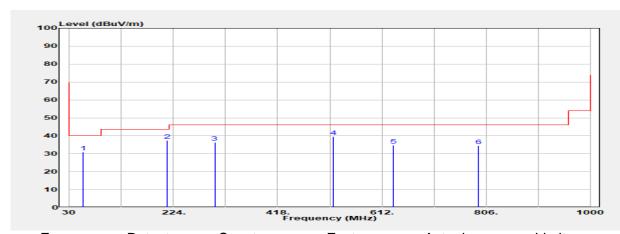

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμ̈V | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 56.190 | Peak | 44.28 | -13.32 | 30.96 | 40.00 | -9.04 |
| 211.390 | Peak | 53.84 | -16.35 | 37.49 | 43.50 | -6.01 |
| 300.630 | Peak | 48.67 | -12.49 | 36.18 | 46.00 | -9.82 |
| 520.820 | Peak | 47.07 | -7.53 | 39.54 | 46.00 | -6.46 |
| 634.310 | Peak | 39.36 | -4.72 | 34.64 | 46.00 | -11.36 |
| 791.450 | Peak | 36.61 | -2.31 | 34.30 | 46.00 | -11.70 |
| | | | | | | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 34 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5200 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

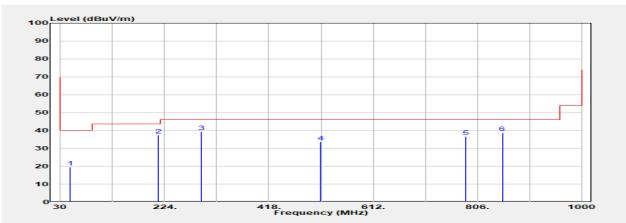

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 47.460 | Peak | 32.46 | -12.89 | 19.57 | 40.00 | -20.43 |
| 212.360 | Peak | 53.79 | -16.35 | 37.44 | 43.50 | -6.06 |
| 291.900 | Peak | 51.79 | -12.63 | 39.16 | 46.00 | -6.84 |
| 515.000 | Peak | 40.94 | -7.42 | 33.52 | 46.00 | -12.48 |
| 783.690 | Peak | 39.15 | -2.50 | 36.64 | 46.00 | -9.36 |
| 852.560 | Peak | 40.16 | -1.35 | 38.81 | 46.00 | -7.19 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 35 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5300 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

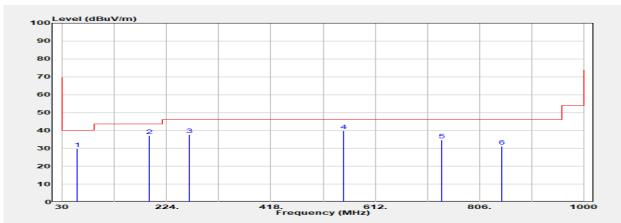

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 57.160 | Peak | 43.10 | -13.41 | 29.69 | 40.00 | -10.31 |
| 191.020 | Peak | 53.00 | -15.79 | 37.21 | 43.50 | -6.29 |
| 265.710 | Peak | 51.44 | -13.71 | 37.73 | 46.00 | -8.27 |
| 552.830 | Peak | 46.80 | -6.90 | 39.90 | 46.00 | -6.10 |
| 735.190 | Peak | 37.79 | -3.00 | 34.79 | 46.00 | -11.21 |
| 847.710 | Peak | 33.05 | -1.78 | 31.27 | 46.00 | -14.73 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5300 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

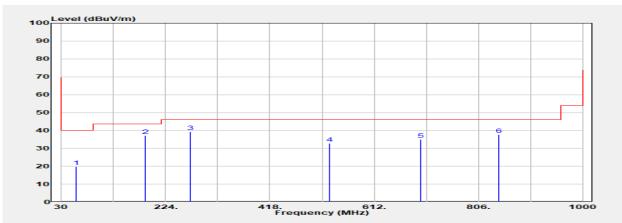

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBμV/m | dΒμV/m | dB |
| | | | | | | |
| 58.130 | Peak | 33.34 | -13.44 | 19.90 | 40.00 | -20.10 |
| 186.170 | Peak | 52.24 | -15.19 | 37.05 | 43.50 | -6.45 |
| 270.560 | Peak | 52.58 | -13.30 | 39.28 | 46.00 | -6.72 |
| 529.550 | Peak | 40.03 | -7.37 | 32.66 | 46.00 | -13.34 |
| 699.300 | Peak | 38.86 | -3.97 | 34.90 | 46.00 | -11.10 |
| 844.800 | Peak | 39.35 | -1.77 | 37.58 | 46.00 | -8.42 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 37 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5580 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

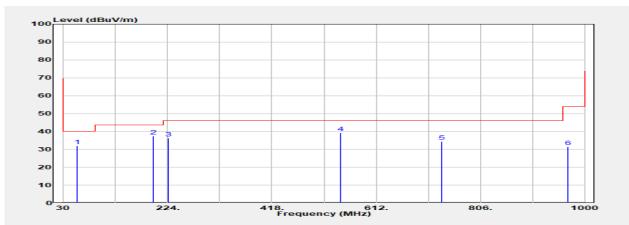

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 56.190 | Peak | 45.17 | -13.32 | 31.85 | 40.00 | -8.15 |
| 197.810 | Peak | 53.69 | -16.22 | 37.47 | 43.50 | -6.03 |
| 225.940 | Peak | 52.38 | -16.05 | 36.33 | 46.00 | -9.67 |
| 545.070 | Peak | 46.54 | -7.13 | 39.41 | 46.00 | -6.59 |
| 734.220 | Peak | 37.27 | -2.96 | 34.31 | 46.00 | -11.69 |
| 969.930 | Peak | 31.47 | -0.01 | 31.46 | 54.00 | -22.54 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 38 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5580 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

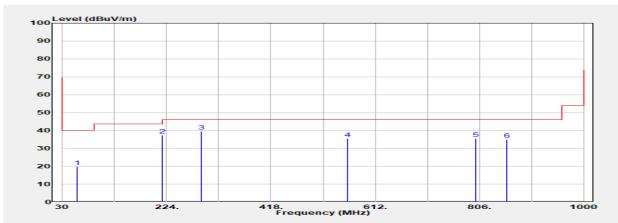

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 58.130 | Peak | 33.15 | -13.44 | 19.70 | 40.00 | -20.30 |
| 215.270 | Peak | 53.61 | -16.34 | 37.27 | 43.50 | -6.23 |
| 288.020 | Peak | 52.36 | -12.70 | 39.66 | 46.00 | -6.34 |
| 560.590 | Peak | 41.90 | -6.39 | 35.51 | 46.00 | -10.49 |
| 799.210 | Peak | 37.58 | -2.19 | 35.39 | 46.00 | -10.61 |
| 857.410 | Peak | 35.93 | -0.99 | 34.94 | 46.00 | -11.06 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 39 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5720 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

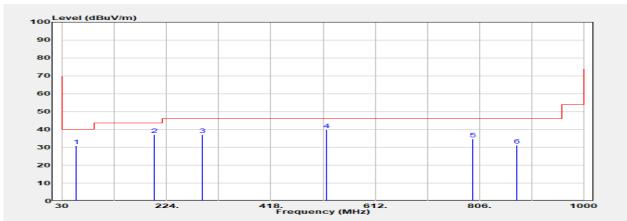

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 55.220 | Peak | 44.05 | -13.29 | 30.76 | 40.00 | -9.24 |
| 201.690 | Peak | 53.27 | -16.25 | 37.02 | 43.50 | -6.48 |
| 290.930 | Peak | 49.77 | -12.65 | 37.12 | 46.00 | -8.88 |
| 521.790 | Peak | 47.23 | -7.49 | 39.74 | 46.00 | -6.26 |
| 794.360 | Peak | 37.09 | -2.40 | 34.69 | 46.00 | -11.31 |
| 875.840 | Peak | 31.87 | -0.83 | 31.04 | 46.00 | -14.96 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 40 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5720 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

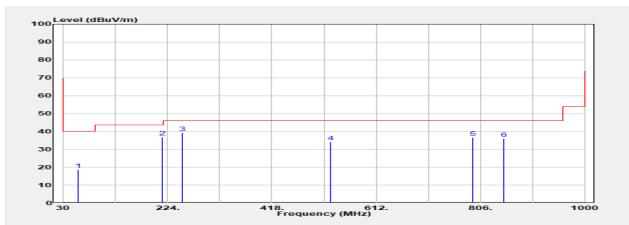

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 57.160 | Peak | 32.05 | -13.41 | 18.64 | 40.00 | -21.36 |
| 214.300 | Peak | 53.08 | -16.35 | 36.73 | 43.50 | -6.77 |
| 251.160 | Peak | 53.37 | -14.21 | 39.16 | 46.00 | -6.84 |
| 527.610 | Peak | 41.47 | -7.37 | 34.10 | 46.00 | -11.90 |
| 791.450 | Peak | 38.91 | -2.31 | 36.60 | 46.00 | -9.40 |
| 850.620 | Peak | 37.70 | -1.69 | 36.01 | 46.00 | -9.99 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 41 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5785 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

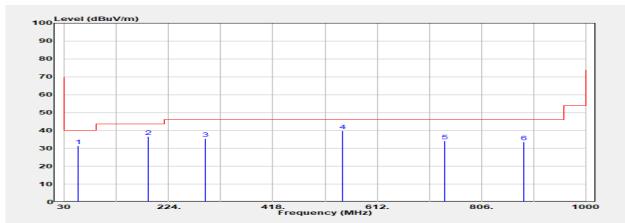

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---------|----------|---------------|--------|--------|--------|--------|
| • | Mode | Reading Level | | FS | @3m | 9 |
| | | • | | _ | _ | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | • | - | |
| | | | | | | |
| 56.190 | Peak | 44.67 | -13.32 | 31.35 | 40.00 | -8.65 |
| 185.200 | Peak | 51.70 | -15.06 | 36.63 | 43.50 | -6.87 |
| | | | | | | |
| 292.870 | Peak | 48.05 | -12.62 | 35.43 | 46.00 | -10.57 |
| 547.010 | Peak | 46.92 | -6.98 | 39.95 | 46.00 | -6.05 |
| | | | | | | |
| 738.100 | Peak | 37.56 | -3.31 | 34.25 | 46.00 | -11.75 |
| 885.540 | Peak | 35.41 | -1.75 | 33.66 | 46.00 | -12.34 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 42 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5785 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

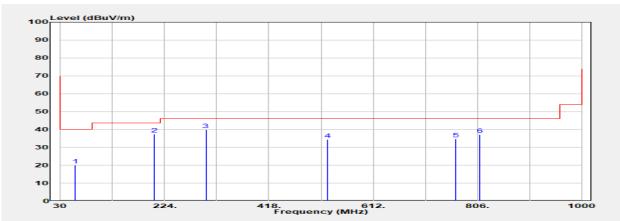

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 58.130 | Peak | 33.50 | -13.44 | 20.06 | 40.00 | -19.94 |
| 204.600 | Peak | 53.68 | -16.28 | 37.41 | 43.50 | -6.09 |
| 300.630 | Peak | 52.24 | -12.49 | 39.75 | 46.00 | -6.25 |
| 527.610 | Peak | 41.75 | -7.37 | 34.38 | 46.00 | -11.62 |
| 765.260 | Peak | 37.87 | -3.26 | 34.61 | 46.00 | -11.39 |
| 810.850 | Peak | 39.34 | -2.10 | 37.24 | 46.00 | -8.76 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 43 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5200 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

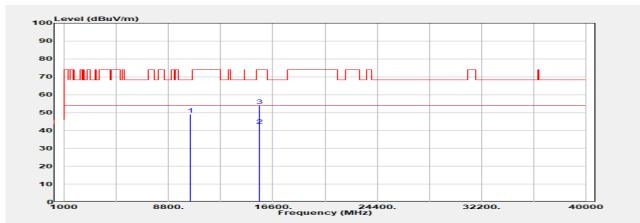

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBμV/m | dBµV/m | dB |
| | | | | | | |
| 10400.000 | Peak | 40.84 | 8.23 | 49.07 | 68.20 | -19.13 |
| 15600.000 | Average | 31.64 | 11.27 | 42.91 | 54.00 | -11.09 |
| 15600.000 | Peak | 42.59 | 11.27 | 53.86 | 74.00 | -20.14 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 44 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5200 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

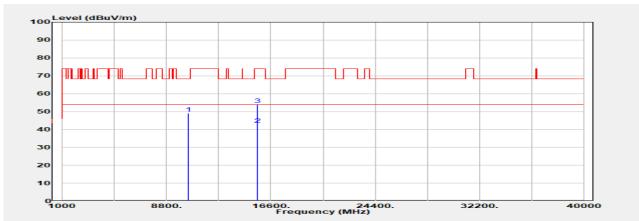

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---|-----------|----------|---------------|--------|--------|--------|--------|
| | • | Mode | Reading Level | | FS | @3m | J |
| | | | • | | _ | | |
| | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| _ | | | • | | • | • | |
| | | | | | | | |
| | 10400.000 | Peak | 40.75 | 8.23 | 48.98 | 68.20 | -19.22 |
| | 15600.000 | Average | 31.63 | 11.27 | 42.90 | 54.00 | -11.10 |
| | | • | | | | | _ |
| | 15600.000 | Peak | 42.60 | 11.27 | 53.87 | 74.00 | -20.13 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 45 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5300 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

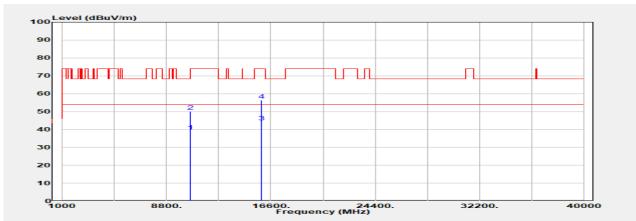

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 10600.000 | Average | 30.03 | 8.99 | 39.02 | 54.00 | -14.98 |
| 10600.000 | Peak | 41.18 | 8.99 | 50.17 | 74.00 | -23.83 |
| 15900.000 | Average | 32.09 | 12.01 | 44.10 | 54.00 | -9.90 |
| 15900.000 | Peak | 44.34 | 12.01 | 56.35 | 74.00 | -17.65 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 46 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5300 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

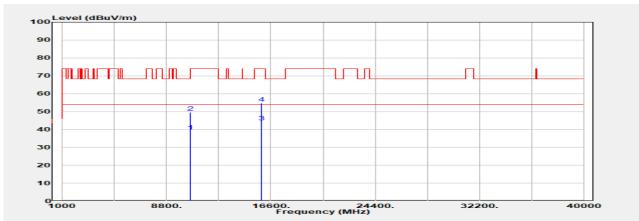

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 10600.000 | Average | 30.01 | 8.99 | 39.00 | 54.00 | -15.00 |
| 10600.000 | Peak | 40.68 | 8.99 | 49.67 | 74.00 | -24.33 |
| 15900.000 | Average | 32.07 | 12.01 | 44.08 | 54.00 | -9.92 |
| 15900.000 | Peak | 42.69 | 12.01 | 54.70 | 74.00 | -19.30 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 47 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5580 MHz Temp./Humi. :20.5/70

Test Mode Antenna Pol. :Vertical :TX CH MID

EUT Pol :NB Plane Engineer :Quentin Liu

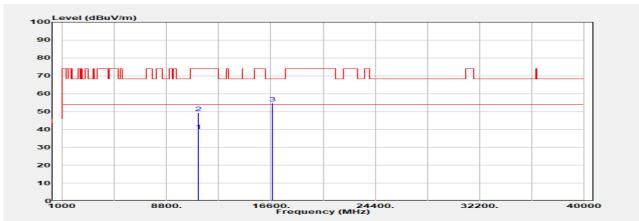

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|-----------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 11160.000 | Average | 29.92 | 9.36 | 39.28 | 54.00 | -14.72 |
| 11160.000 | Peak | 39.98 | 9.36 | 49.34 | 74.00 | -24.66 |
| 16740.000 | Peak | 43.51 | 11.29 | 54.80 | 68.20 | -13.40 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 48 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5580 MHz Temp./Humi. :20.5/70

Test Mode Antenna Pol. :Horizontal :TX CH MID

EUT Pol :NB Plane Engineer :Quentin Liu

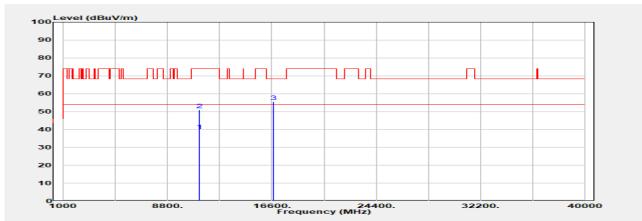

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dΒμV/m | dBµV/m | dB |
| | | | | | | |
| 11160.000 | Average | 29.97 | 9.36 | 39.33 | 54.00 | -14.67 |
| 11160.000 | Peak | 41.50 | 9.36 | 50.86 | 74.00 | -23.14 |
| 16740.000 | Peak | 44.35 | 11.29 | 55.64 | 68.20 | -12.56 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 49 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5720 MHz Temp./Humi. :20.5/70

Test Mode Antenna Pol. :Vertical :TX CH MID

EUT Pol :NB Plane Engineer :Quentin Liu

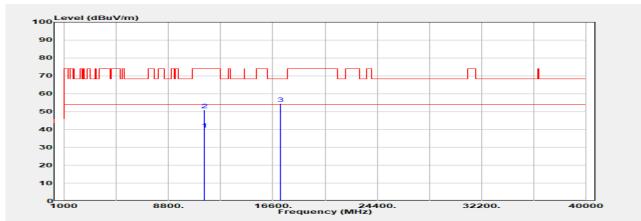

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|-----------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 11440.000 | Average | 29.96 | 10.18 | 40.14 | 54.00 | -13.86 |
| 11440.000 | Peak | 40.79 | 10.18 | 50.97 | 74.00 | -23.03 |
| 17160.000 | Peak | 43.37 | 11.02 | 54.40 | 68.20 | -13.80 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 50 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5720 MHz Temp./Humi. :20.5/70

Test Mode Antenna Pol. :TX CH MID :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

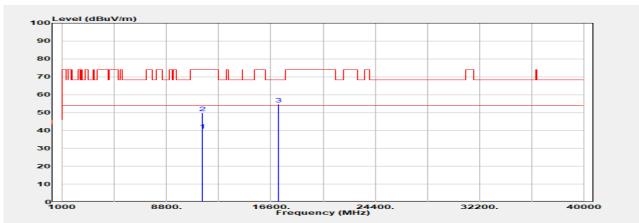

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|-----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBμV/m | dBµV/m | dB |
| | | | | | | |
| 11440.000 | Average | 29.90 | 10.18 | 40.08 | 54.00 | -13.92 |
| 11440.000 | Peak | 39.67 | 10.18 | 49.85 | 74.00 | -24.15 |
| 17160.000 | Peak | 43.70 | 11.02 | 54.72 | 68.20 | -13.48 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 51 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5785 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin Liu

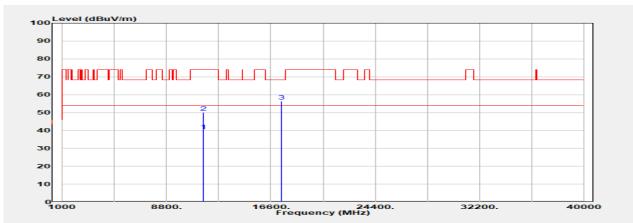

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---|-----------|----------|---------------|----------|-----------------|-----------|--------|
| | · | Mode | Reading Level | | FS | @3m | • |
| | MHz | PK/QP/AV | dBuV | dB | dBµV/m | dBµV/m | dB |
| - | | | 45 p v | <u> </u> | α υ μ τ/ | α.Σμ. ν / | 4.5 |
| | | | | | | | |
| | 11570.000 | Average | 29.81 | 10.00 | 39.80 | 54.00 | -14.20 |
| | 11570.000 | Peak | 40.18 | 10.00 | 50.18 | 74.00 | -23.82 |
| | 17355.000 | Peak | 45.40 | 10.90 | 56.30 | 68.20 | -11.90 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 52 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-23

Test Frequency :5785 MHz Temp./Humi. :20.5/70

Test Mode :TX CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin Liu

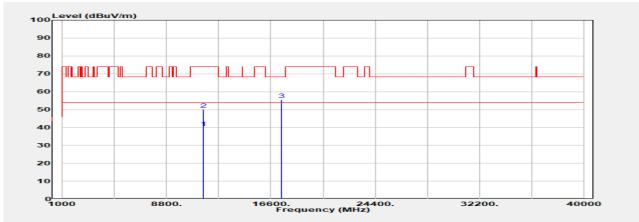

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|-----------|------------------|-----------------------|--------|--------------|---------------|--------|
| MHz | Mode PK/QP/AV | Reading Level dBµV | dB | FS dBµV/m | @3m dBµV/m | dB |
| | | | | | | |
| 11570.000 | Average | 29.77 | 10.00 | 39.77 | 54.00 | -14.23 |
| 11570.000 | Peak | 40.23 | 10.00 | 50.23 | 74.00 | -23.77 |
| 17355.000 | Peak | 44.74 | 10.90 | 55.64 | 68.20 | -12.56 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 53 of 320

7.7.2 Band edge falling to restricted band


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency Temp./Humi. :21.7/69 :5180 MHz

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :Quentin :NB Plane Engineer

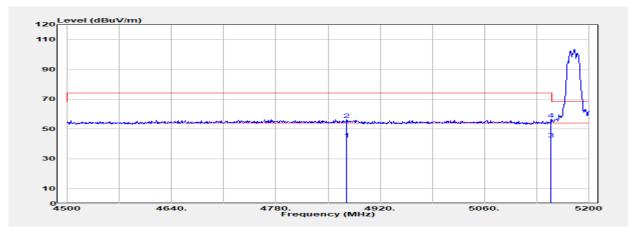

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 4875.200 | Average | 39.99 | 3.25 | 43.24 | 54.00 | -10.76 |
| 4875.200 | Peak | 53.04 | 3.25 | 56.29 | 74.00 | -17.71 |
| 5150.000 | Average | 40.12 | 3.03 | 43.15 | 54.00 | -10.85 |
| 5150.000 | Peak | 53.44 | 3.03 | 56.47 | 74.00 | -17.53 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 f (886-2) 2298-0488 www.sgs.com.tw



Page: 54 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5180 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

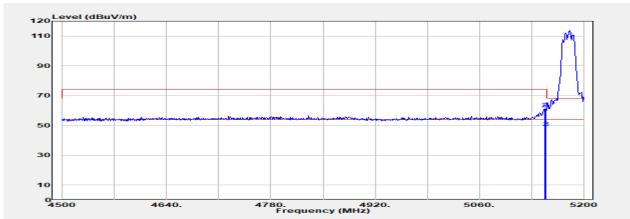

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5147.500 | Average | 44.08 | 2.97 | 47.05 | 54.00 | -6.95 |
| 5147.500 | Peak | 58.25 | 2.97 | 61.22 | 74.00 | -12.78 |
| 5150.000 | Average | 45.29 | 3.03 | 48.32 | 54.00 | -5.68 |
| 5150.000 | Peak | 58.32 | 3.03 | 61.35 | 74.00 | -12.65 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Test Mode

Report No.: E2/2022/30010

Page: 55 of 320

:Vertical

Antenna Pol.


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5320 MHz Temp./Humi. :21.7/69

EUT Pol :NB Plane Engineer :Quentin

:BE CH HIGH

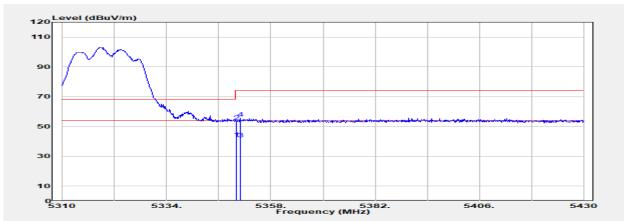

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5350.000 | Average | 39.67 | 2.21 | 41.88 | 54.00 | -12.12 |
| 5350.000 | Peak | 51.13 | 2.21 | 53.34 | 74.00 | -20.66 |
| 5350.920 | Average | 39.50 | 2.21 | 41.71 | 54.00 | -12.29 |
| 5350.920 | Peak | 53.50 | 2.21 | 55.72 | 74.00 | -18.28 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 56 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5320 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

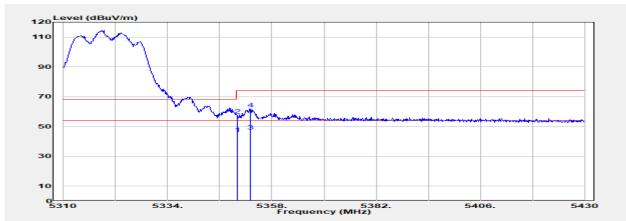

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5350.000 | Average | 42.91 | 2.21 | 45.12 | 54.00 | -8.88 |
| 5350.000 | Peak | 55.24 | 2.21 | 57.45 | 74.00 | -16.55 |
| 5352.960 | Average | 44.78 | 2.21 | 46.99 | 54.00 | -7.01 |
| 5352.960 | Peak | 59.67 | 2.21 | 61.89 | 74.00 | -12.11 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 57 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-13

Test Frequency :5500 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

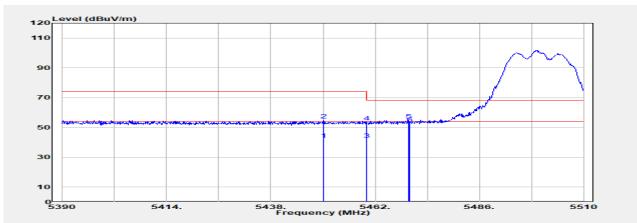

| Fr | eq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|------|-------|------------------|---------------------------|--------|--------------|--------------|--------|
| M | Hz | PK/QP/AV | dΒμ̈V | dB | dBµV/m | dBμV/m | dB |
| | | | | | | | |
| 5450 | 0.120 | Average | 39.39 | 2.60 | 41.99 | 54.00 | -12.01 |
| 5450 | 0.120 | Peak | 52.21 | 2.60 | 54.81 | 74.00 | -19.19 |
| 5460 | 0.000 | Average | 39.29 | 2.64 | 41.93 | 54.00 | -12.07 |
| 5460 | 0.000 | Peak | 50.99 | 2.64 | 53.63 | 74.00 | -20.37 |
| 5469 | 9.680 | Peak | 52.23 | 2.77 | 54.99 | 68.20 | -13.21 |
| 5470 | 0.000 | Peak | 50.02 | 2.77 | 52.79 | 68.20 | -15.41 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488 www.sgs.com.tw



Page: 58 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-13

Test Frequency :5500 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

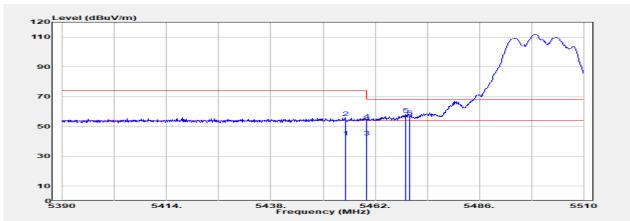

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5455.160 | Average | 40.20 | 2.62 | 42.82 | 54.00 | -11.18 |
| 5455.160 | Peak | 53.44 | 2.62 | 56.06 | 74.00 | -17.94 |
| 5460.000 | Average | 40.21 | 2.64 | 42.85 | 54.00 | -11.15 |
| 5460.000 | Peak | 51.64 | 2.64 | 54.28 | 74.00 | -19.72 |
| 5468.960 | Peak | 55.51 | 2.76 | 58.27 | 68.20 | -9.93 |
| 5470.000 | Peak | 53.69 | 2.77 | 56.46 | 68.20 | -11.74 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 59 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-13

Test Frequency :5700 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

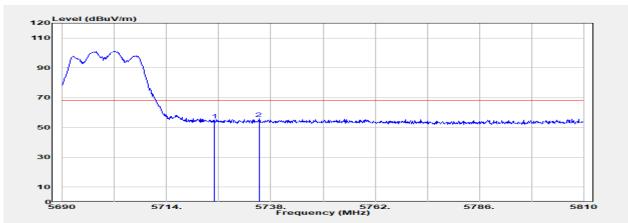

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5725.000 | Peak | 50.73 | 4.21 | 54.94 | 68.20 | -13.26 |
| 5735.240 | Peak | 51.67 | 4.30 | 55.96 | 68.20 | -12.24 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 60 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-13

Test Frequency :5700 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

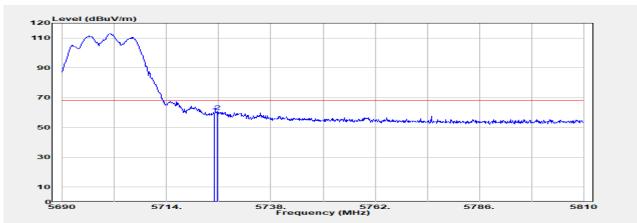

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5725.000 | Peak | 54.91 | 4.21 | 59.12 | 68.20 | -9.08 |
| 5725.760 | Peak | 56.44 | 4.22 | 60.65 | 68.20 | -7.55 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



:BE CH MID

Test Mode

Report No.: E2/2022/30010

Page: 61 of 320

:Vertical


Antenna Pol.

Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5720 MHz Temp./Humi. :21.7/69

EUT Pol :NB Plane Engineer :Quentin

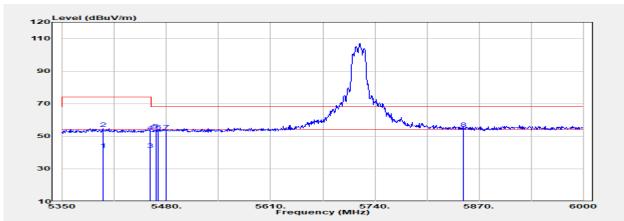

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|----------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5400.700 | Average | 39.48 | 2.54 | 42.02 | 54.00 | -11.98 |
| 5400.700 | Peak | 52.28 | 2.54 | 54.83 | 74.00 | -19.17 |
| 5460.000 | Average | 39.14 | 2.64 | 41.78 | 54.00 | -12.22 |
| 5460.000 | Peak | 50.25 | 2.64 | 52.89 | 74.00 | -21.11 |
| 5466.350 | Peak | 51.19 | 2.72 | 53.91 | 68.20 | -14.29 |
| 5470.000 | Peak | 50.52 | 2.77 | 53.29 | 68.20 | -14.91 |
| 5480.000 | Peak | 50.57 | 2.76 | 53.33 | 68.20 | -14.87 |
| 5850.000 | Peak | 50.37 | 4.31 | 54.68 | 68.20 | -13.52 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 62 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5720 MHz Temp./Humi. :21.7/69

Test Mode :BE CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

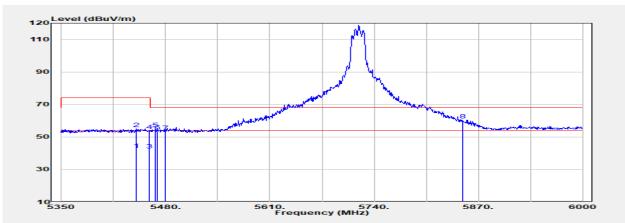

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5443.600 | Average | 39.70 | 2.41 | 42.11 | 54.00 | -11.89 |
| 5443.600 | Peak | 52.73 | 2.41 | 55.15 | 74.00 | -18.85 |
| 5460.000 | Average | 39.35 | 2.64 | 41.99 | 54.00 | -12.01 |
| 5460.000 | Peak | 51.33 | 2.64 | 53.97 | 74.00 | -20.03 |
| 5467.000 | Peak | 52.27 | 2.73 | 55.00 | 68.20 | -13.20 |
| 5470.000 | Peak | 50.81 | 2.77 | 53.58 | 68.20 | -14.62 |
| 5480.000 | Peak | 50.51 | 2.76 | 53.27 | 68.20 | -14.93 |
| 5850.000 | Peak | 56.11 | 4.31 | 60.42 | 68.20 | -7.78 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 63 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5745 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

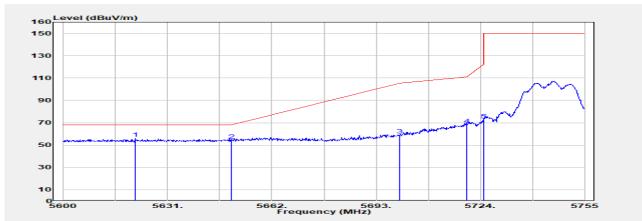

| | Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---|---------|------------------|---------------------------|--------|--------------|--------------|--------|
| | MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | | |
| 5 | 621.390 | Peak | 52.34 | 3.45 | 55.78 | 68.20 | -12.42 |
| 5 | 650.000 | Peak | 50.58 | 3.60 | 54.18 | 68.20 | -14.02 |
| 5 | 700.000 | Peak | 55.55 | 3.31 | 58.86 | 105.20 | -46.34 |
| 5 | 720.000 | Peak | 63.99 | 4.17 | 68.16 | 110.80 | -42.64 |
| 5 | 725.000 | Peak | 68.22 | 4.21 | 72.43 | 122.20 | -49.77 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 64 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5745 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

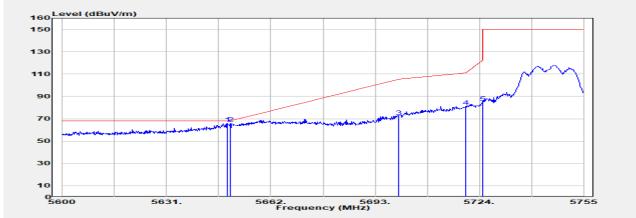

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBμ̈V | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5648.980 | Peak | 62.13 | 3.58 | 65.71 | 68.20 | -2.49 |
| 5650.000 | Peak | 62.12 | 3.60 | 65.72 | 68.20 | -2.48 |
| 5700.000 | Peak | 68.57 | 3.31 | 71.88 | 105.20 | -33.32 |
| 5720.000 | Peak | 76.78 | 4.17 | 80.95 | 110.80 | -29.85 |
| 5725.000 | Peak | 80.23 | 4.21 | 84.44 | 122.20 | -37.76 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 www.sgs.com.tw



Page: 65 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5825 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

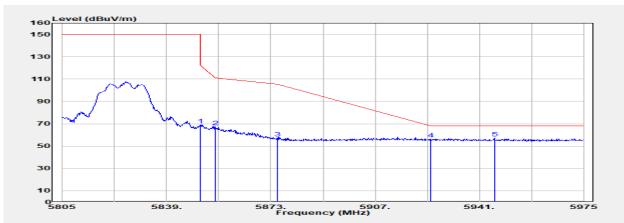

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5850.000 | Peak | 64.43 | 4.31 | 68.74 | 122.20 | -53.46 |
| 5855.000 | Peak | 62.88 | 4.21 | 67.09 | 110.80 | -43.71 |
| 5875.000 | Peak | 53.26 | 3.90 | 57.16 | 105.20 | -48.04 |
| 5925.000 | Peak | 51.81 | 4.36 | 56.17 | 68.20 | -12.03 |
| 5945.930 | Peak | 53.04 | 4.08 | 57.12 | 68.20 | -11.08 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 66 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11a **Test Date** :2022-03-17

Test Frequency :5825 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

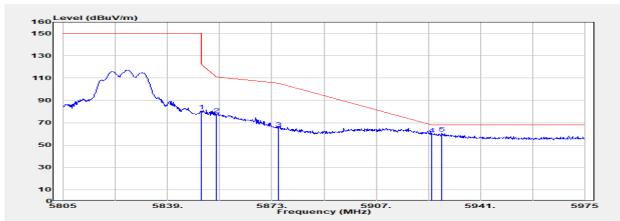

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBμ̈V | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5850.000 | Peak | 76.52 | 4.31 | 80.83 | 122.20 | -41.37 |
| 5855.000 | Peak | 73.50 | 4.21 | 77.71 | 110.80 | -33.09 |
| 5875.000 | Peak | 61.25 | 3.90 | 65.15 | 105.20 | -40.05 |
| 5925.000 | Peak | 55.27 | 4.36 | 59.62 | 68.20 | -8.58 |
| 5928.420 | Peak | 56.37 | 4.34 | 60.72 | 68.20 | -7.48 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 67 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5180 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

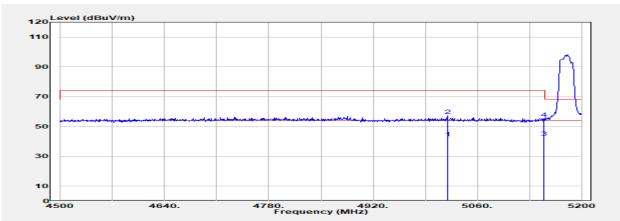

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5020.100 | Average | 39.00 | 3.18 | 42.18 | 54.00 | -11.82 |
| 5020.100 | Peak | 54.12 | 3.18 | 57.30 | 74.00 | -16.70 |
| 5150.000 | Average | 39.46 | 3.03 | 42.49 | 54.00 | -11.51 |
| 5150.000 | Peak | 52.11 | 3.03 | 55.14 | 74.00 | -18.86 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 68 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5180 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

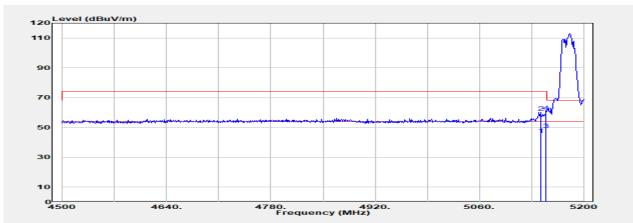

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5142.600 | Average | 42.34 | 2.85 | 45.19 | 54.00 | -8.81 |
| 5142.600 | Peak | 57.33 | 2.85 | 60.18 | 74.00 | -13.82 |
| 5150.000 | Average | 45.27 | 3.03 | 48.30 | 54.00 | -5.70 |
| 5150.000 | Peak | 57.45 | 3.03 | 60.48 | 74.00 | -13.52 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 69 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5320 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

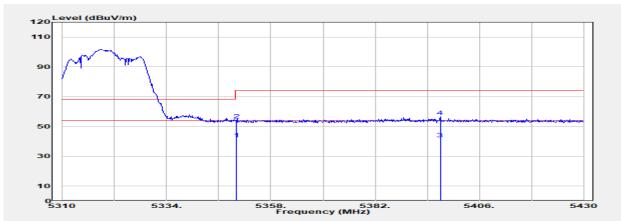

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5350.000 | Average | 39.57 | 2.21 | 41.78 | 54.00 | -12.22 |
| 5350.000 | Peak | 51.97 | 2.21 | 54.18 | 74.00 | -19.82 |
| 5397.000 | Average | 39.18 | 2.56 | 41.75 | 54.00 | -12.25 |
| 5397.000 | Peak | 53.96 | 2.56 | 56.53 | 74.00 | -17.47 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 70 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5320 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

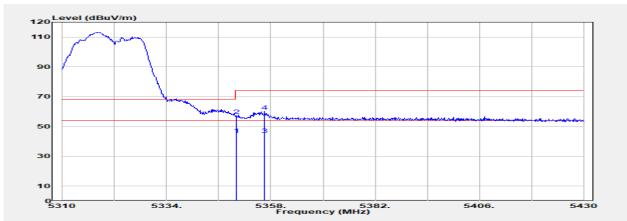

| | Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|---|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| _ | MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | | |
| | 5350.000 | Average | 42.35 | 2.21 | 44.56 | 54.00 | -9.44 |
| | 5350.000 | Peak | 55.12 | 2.21 | 57.33 | 74.00 | -16.67 |
| | 5356.560 | Average | 42.26 | 2.22 | 44.47 | 54.00 | -9.53 |
| | 5356.560 | Peak | 57.88 | 2.22 | 60.10 | 74.00 | -13.90 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 71 of 320


:SAC G Report Number :E2/2022/30010 Test Site

Operation Mode :802.11ac20 **Test Date** :2022-03-13

Test Frequency :5500 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

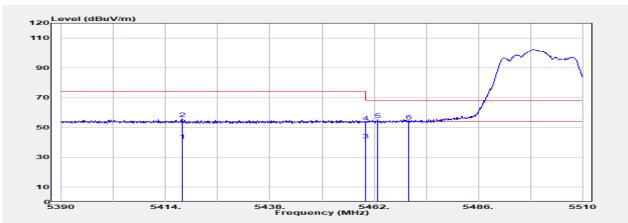

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|----------|------------------|-----------------------|----------|--------------|---------------|----------|
| MHz | Mode PK/QP/AV | Reading Level dBuV | dB | FS dBµV/m | @3m dBµV/m | dB |
| 171112 | 11001770 | σομν | <u> </u> | <u> </u> | αυμ ν/ιιι | <u> </u> |
| 5417.720 | Average | 38.94 | 2.44 | 41.39 | 54.00 | -12.61 |
| 5417.720 | Peak | 53.36 | 2.44 | 55.80 | 74.00 | -18.20 |
| 5460.000 | Average | 39.11 | 2.64 | 41.75 | 54.00 | -12.25 |
| 5460.000 | Peak | 51.06 | 2.64 | 53.70 | 74.00 | -20.30 |
| 5462.840 | Peak | 52.68 | 2.68 | 55.36 | 68.20 | -12.84 |
| 5470.000 | Peak | 51.42 | 2.77 | 54.19 | 68.20 | -14.01 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 72 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-13

Test Frequency :5500 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

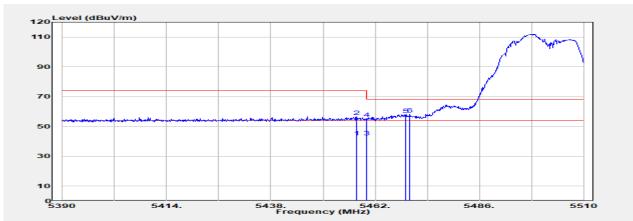

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5457.680 | Average | 40.46 | 2.63 | 43.09 | 54.00 | -10.91 |
| 5457.680 | Peak | 53.83 | 2.63 | 56.46 | 74.00 | -17.54 |
| 5460.000 | Average | 40.28 | 2.64 | 42.92 | 54.00 | -11.08 |
| 5460.000 | Peak | 52.56 | 2.64 | 55.20 | 74.00 | -18.80 |
| 5468.960 | Peak | 55.16 | 2.76 | 57.91 | 68.20 | -10.29 |
| 5470.000 | Peak | 55.31 | 2.77 | 58.08 | 68.20 | -10.12 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 t (886-2) 2299-3279 www.sgs.com.tw



Page: 73 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-13

Test Frequency :5700 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

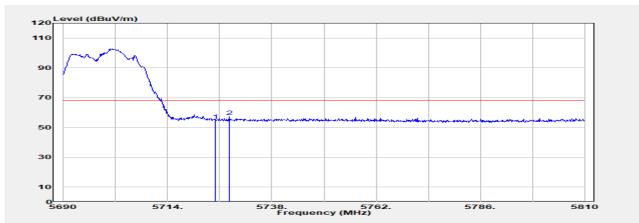

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5725.000 | Peak | 50.56 | 4.21 | 54.77 | 68.20 | -13.43 |
| 5728.160 | Peak | 52.87 | 4.24 | 57.10 | 68.20 | -11.10 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 74 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-13

Test Frequency :5700 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

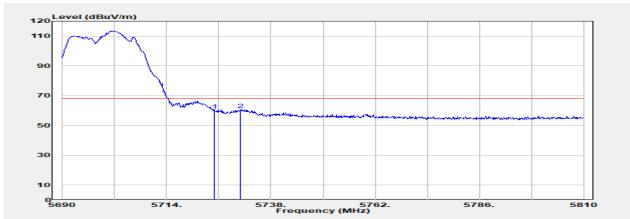

| | Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|---|----------|----------|---------------|--------|--------|--------|--------|
| | | Mode | Reading Level | | FS | @3m | |
| | MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| _ | | | • | | • | • | |
| | F70F 000 | Daale | FC 0F | 4.04 | 00.00 | 00.00 | 7.04 |
| | 5725.000 | Peak | 56.05 | 4.21 | 60.26 | 68.20 | -7.94 |
| | 5730.920 | Peak | 56.38 | 4.26 | 60.64 | 68.20 | -7.56 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 75 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5720 MHz Temp./Humi. :21.7/69

Test Mode :BE CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

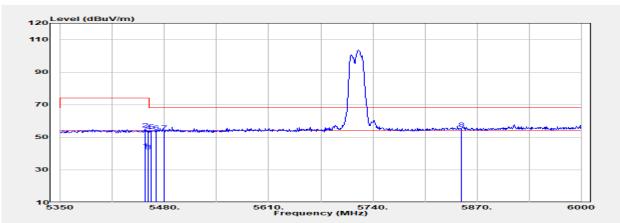

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5455.300 | Average | 39.96 | 2.62 | 42.58 | 54.00 | -11.42 |
| 5455.300 | Peak | 52.30 | 2.62 | 54.92 | 74.00 | -19.08 |
| 5460.000 | Average | 39.00 | 2.64 | 41.64 | 54.00 | -12.36 |
| 5460.000 | Peak | 51.06 | 2.64 | 53.70 | 74.00 | -20.30 |
| 5463.100 | Peak | 51.51 | 2.68 | 54.19 | 68.20 | -14.01 |
| 5470.000 | Peak | 50.68 | 2.77 | 53.45 | 68.20 | -14.75 |
| 5480.000 | Peak | 50.68 | 2.76 | 53.44 | 68.20 | -14.76 |
| 5850.000 | Peak | 50.98 | 4.31 | 55.29 | 68.20 | -12.91 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 76 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5720 MHz Temp./Humi. :21.7/69

Test Mode :BE CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

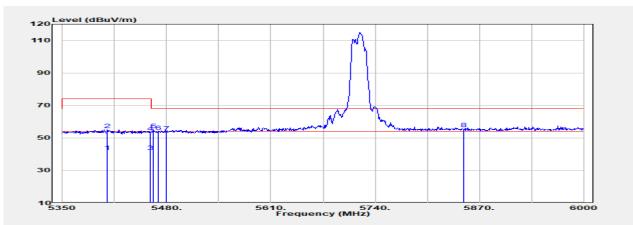

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5405.900 | Average | 38.95 | 2.57 | 41.52 | 54.00 | -12.48 |
| 5405.900 | Peak | 52.57 | 2.57 | 55.14 | 74.00 | -18.86 |
| 5460.000 | Average | 38.94 | 2.64 | 41.58 | 54.00 | -12.42 |
| 5460.000 | Peak | 51.02 | 2.64 | 53.66 | 74.00 | -20.34 |
| 5463.750 | Peak | 52.35 | 2.69 | 55.03 | 68.20 | -13.17 |
| 5470.000 | Peak | 51.01 | 2.77 | 53.78 | 68.20 | -14.42 |
| 5480.000 | Peak | 50.87 | 2.76 | 53.63 | 68.20 | -14.57 |
| 5850.000 | Peak | 51.28 | 4.31 | 55.59 | 68.20 | -12.61 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 77 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5745 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

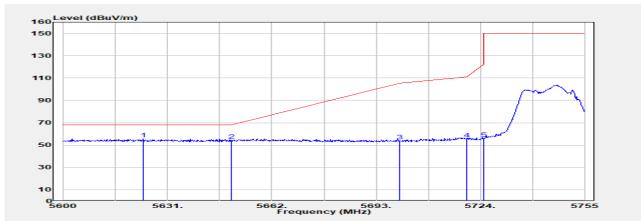

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμ̈V | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5623.715 | Peak | 52.08 | 3.46 | 55.54 | 68.20 | -12.66 |
| 5650.000 | Peak | 50.66 | 3.60 | 54.26 | 68.20 | -13.94 |
| 5700.000 | Peak | 50.52 | 3.31 | 53.83 | 105.20 | -51.37 |
| 5720.000 | Peak | 51.27 | 4.17 | 55.44 | 110.80 | -55.36 |
| 5725.000 | Peak | 51.84 | 4.21 | 56.05 | 122.20 | -66.15 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 78 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5745 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

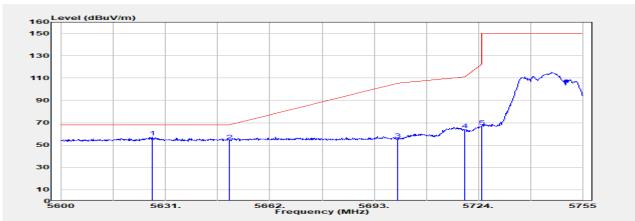

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dΒμV/m | dBµV/m | dB |
| | | | | | | |
| 5627.125 | Peak | 53.60 | 3.48 | 57.08 | 68.20 | -11.12 |
| 5650.000 | Peak | 50.33 | 3.60 | 53.93 | 68.20 | -14.27 |
| 5700.000 | Peak | 51.82 | 3.31 | 55.13 | 105.20 | -50.07 |
| 5720.000 | Peak | 59.57 | 4.17 | 63.74 | 110.80 | -47.06 |
| 5725.000 | Peak | 62.66 | 4.21 | 66.87 | 122.20 | -55.33 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 79 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5825 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

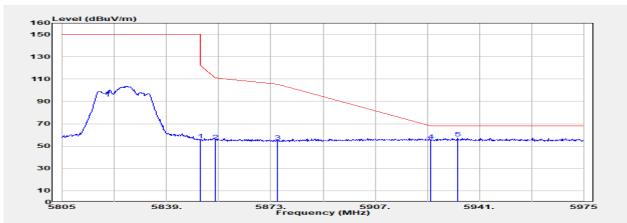

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5850.000 | Peak | 51.35 | 4.31 | 55.66 | 122.20 | -66.54 |
| 5855.000 | Peak | 50.51 | 4.21 | 54.72 | 110.80 | -56.08 |
| 5875.000 | Peak | 50.50 | 3.90 | 54.40 | 105.20 | -50.80 |
| 5925.000 | Peak | 50.60 | 4.36 | 54.95 | 68.20 | -13.25 |
| 5934.030 | Peak | 52.99 | 4.26 | 57.24 | 68.20 | -10.96 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 80 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac20 **Test Date** :2022-03-17

Test Frequency :5825 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

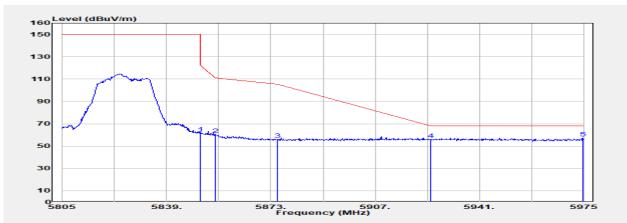

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5850.000 | Peak | 57.10 | 4.31 | 61.41 | 122.20 | -60.79 |
| 5855.000 | Peak | 55.94 | 4.21 | 60.15 | 110.80 | -50.65 |
| 5875.000 | Peak | 51.86 | 3.90 | 55.76 | 105.20 | -49.44 |
| 5925.000 | Peak | 51.57 | 4.36 | 55.92 | 68.20 | -12.28 |
| 5974.830 | Peak | 53.19 | 3.89 | 57.08 | 68.20 | -11.12 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

台灣檢驗科技股份有限公司

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of SGS Group



Page: 81 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5190 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

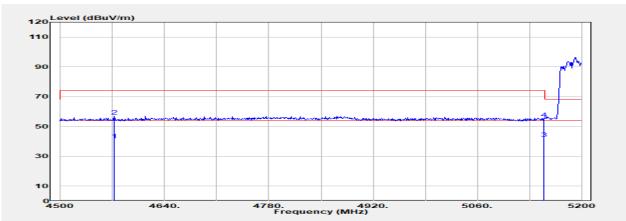

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 4572.100 | Average | 38.07 | 3.02 | 41.09 | 54.00 | -12.91 |
| 4572.100 | Peak | 54.00 | 3.02 | 57.02 | 74.00 | -16.98 |
| 5150.000 | Average | 38.77 | 3.03 | 41.80 | 54.00 | -12.20 |
| 5150.000 | Peak | 52.11 | 3.03 | 55.14 | 74.00 | -18.86 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 82 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5190 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

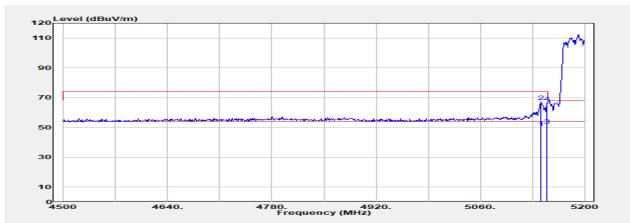

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5141.900 | Average | 46.78 | 2.84 | 49.61 | 54.00 | -4.39 |
| 5141.900 | Peak | 64.47 | 2.84 | 67.30 | 74.00 | -6.70 |
| 5150.000 | Average | 48.25 | 3.03 | 51.28 | 54.00 | -2.72 |
| 5150.000 | Peak | 63.54 | 3.03 | 66.57 | 74.00 | -7.43 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 83 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5310 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

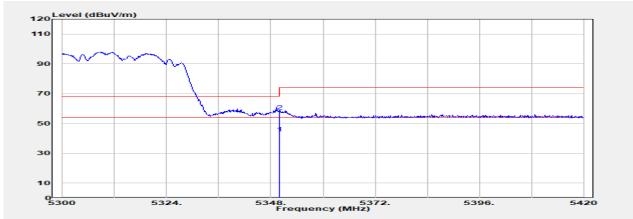

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5350.000 | Average | 41.48 | 2.21 | 43.69 | 54.00 | -10.31 |
| 5350.000 | Peak | 56.14 | 2.21 | 58.35 | 74.00 | -15.65 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 84 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5310 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

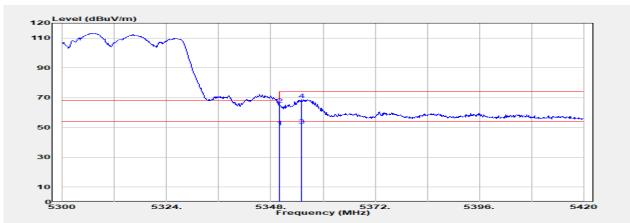

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5350.000 | Average | 48.30 | 2.21 | 50.51 | 54.00 | -3.49 |
| 5350.000 | Peak | 63.07 | 2.21 | 65.28 | 74.00 | -8.72 |
| 5354.960 | Average | 49.31 | 2.22 | 51.52 | 54.00 | -2.48 |
| 5354.960 | Peak | 66.47 | 2.22 | 68.69 | 74.00 | -5.31 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 85 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-13

Test Frequency :5510 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

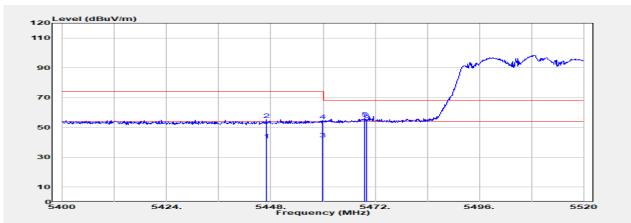

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5446.920 | Average | 39.24 | 2.51 | 41.75 | 54.00 | -12.25 |
| 5446.920 | Peak | 52.87 | 2.51 | 55.38 | 74.00 | -18.62 |
| 5460.000 | Average | 39.61 | 2.64 | 42.25 | 54.00 | -11.75 |
| 5460.000 | Peak | 51.86 | 2.64 | 54.50 | 74.00 | -19.50 |
| 5469.600 | Peak | 53.52 | 2.76 | 56.29 | 68.20 | -11.91 |
| 5470.000 | Peak | 52.60 | 2.77 | 55.37 | 68.20 | -12.83 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 86 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-13

Test Frequency :5510 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

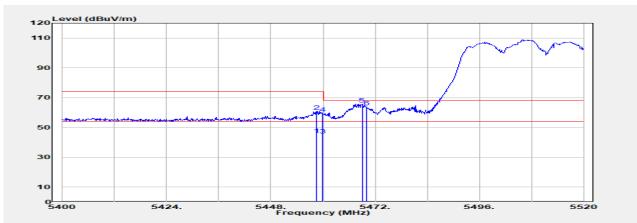

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5458.560 | Average | 42.42 | 2.63 | 45.05 | 54.00 | -8.95 |
| 5458.560 | Peak | 58.34 | 2.63 | 60.97 | 74.00 | -13.03 |
| 5460.000 | Average | 42.15 | 2.64 | 44.79 | 54.00 | -9.21 |
| 5460.000 | Peak | 56.94 | 2.64 | 59.58 | 74.00 | -14.42 |
| 5469.000 | Peak | 63.07 | 2.76 | 65.83 | 68.20 | -2.37 |
| 5470.000 | Peak | 60.89 | 2.77 | 63.66 | 68.20 | -4.54 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 87 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-13

Test Frequency :5670 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

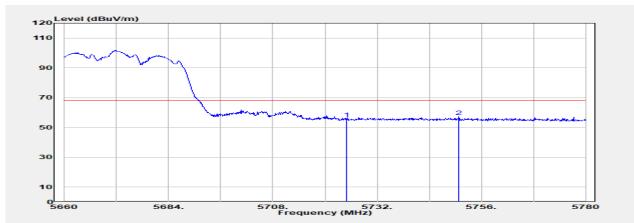

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5725.000 | Peak | 51.70 | 4.21 | 55.91 | 68.20 | -12.29 |
| 5750.840 | Peak | 52.75 | 4.36 | 57.11 | 68.20 | -11.09 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 88 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-13

Test Frequency :5670 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

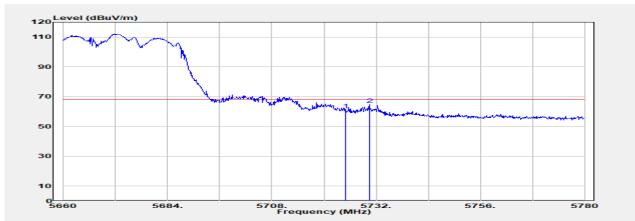

| - | D-11 | 0 | F1 | A = 1 1 | 1.5 | N 4 |
|----------|----------|---------------|--------|---------|--------|--------|
| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | • | • | |
| | | | | | | |
| 5725.000 | Peak | 56.92 | 4.21 | 61.13 | 68.20 | -7.07 |
| 5730.440 | Peak | 60.48 | 4.25 | 64.74 | 68.20 | -3.46 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 89 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5710 MHz Temp./Humi. :21.7/69

Test Mode :BE CH MID Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

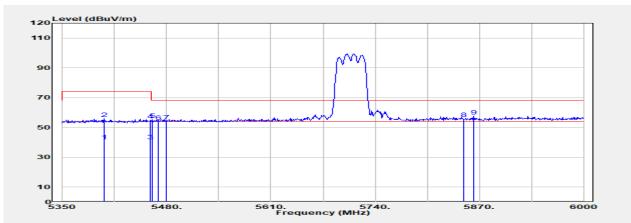

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBμV/m | dBµV/m | dB |
| | | | | | | |
| 5402.000 | Average | 38.35 | 2.55 | 40.90 | 54.00 | -13.10 |
| 5402.000 | Peak | 53.27 | 2.55 | 55.82 | 74.00 | -18.18 |
| 5460.000 | Average | 38.30 | 2.64 | 40.94 | 54.00 | -13.06 |
| 5460.000 | Peak | 52.24 | 2.64 | 54.88 | 74.00 | -19.12 |
| 5461.800 | Peak | 52.46 | 2.66 | 55.12 | 68.20 | -13.08 |
| 5470.000 | Peak | 51.37 | 2.77 | 54.14 | 68.20 | -14.06 |
| 5480.000 | Peak | 51.63 | 2.76 | 54.39 | 68.20 | -13.81 |
| 5850.000 | Peak | 51.71 | 4.31 | 56.02 | 68.20 | -12.18 |
| 5863.500 | Peak | 53.46 | 4.06 | 57.52 | 68.20 | -10.68 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 90 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5710 MHz Temp./Humi. :21.7/69

Test Mode :BE CH MID Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

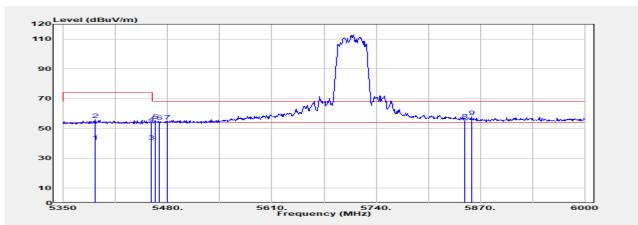

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5389.650 | Average | 38.61 | 2.61 | 41.22 | 54.00 | -12.78 |
| 5389.650 | Peak | 53.24 | 2.61 | 55.85 | 74.00 | -18.15 |
| 5460.000 | Average | 38.51 | 2.64 | 41.15 | 54.00 | -12.85 |
| 5460.000 | Peak | 51.02 | 2.64 | 53.66 | 74.00 | -20.34 |
| 5464.400 | Peak | 52.62 | 2.70 | 55.32 | 68.20 | -12.88 |
| 5470.000 | Peak | 51.88 | 2.77 | 54.65 | 68.20 | -13.55 |
| 5480.000 | Peak | 52.08 | 2.76 | 54.84 | 68.20 | -13.36 |
| 5850.000 | Peak | 51.42 | 4.31 | 55.73 | 68.20 | -12.47 |
| 5858.950 | Peak | 53.90 | 4.13 | 58.03 | 68.20 | -10.17 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 91 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5755 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

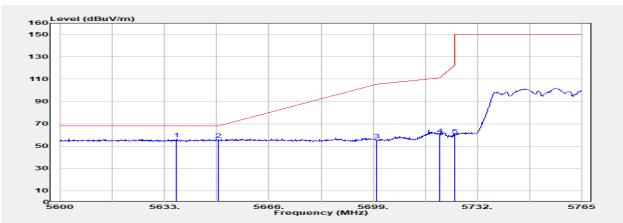

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5636.795 | Peak | 53.05 | 3.44 | 56.49 | 68.20 | -11.71 |
| 5650.000 | Peak | 52.45 | 3.60 | 56.05 | 68.20 | -12.15 |
| 5700.000 | Peak | 52.16 | 3.31 | 55.47 | 105.20 | -49.73 |
| 5720.000 | Peak | 56.12 | 4.17 | 60.29 | 110.80 | -50.51 |
| 5725.000 | Peak | 55.51 | 4.21 | 59.72 | 122.20 | -62.48 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 92 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5755 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

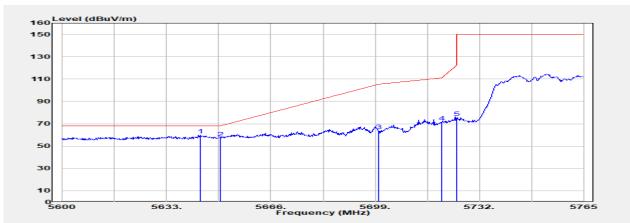

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5643.725 | Peak | 56.57 | 3.48 | 60.05 | 68.20 | -8.15 |
| 5650.000 | Peak | 53.45 | 3.60 | 57.05 | 68.20 | -11.15 |
| 5700.000 | Peak | 60.44 | 3.31 | 63.75 | 105.20 | -41.45 |
| 5720.000 | Peak | 67.17 | 4.17 | 71.34 | 110.80 | -39.46 |
| 5725.000 | Peak | 71.26 | 4.21 | 75.47 | 122.20 | -46.73 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 93 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5795 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

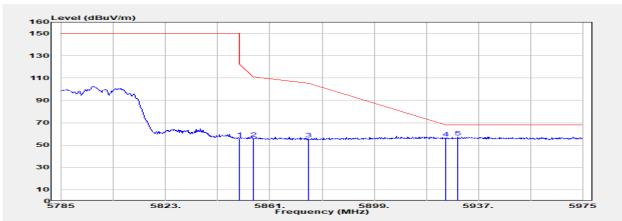

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5850.000 | Peak | 51.82 | 4.31 | 56.13 | 122.20 | -66.07 |
| 5855.000 | Peak | 51.52 | 4.21 | 55.73 | 110.80 | -55.07 |
| 5875.000 | Peak | 51.61 | 3.90 | 55.51 | 105.20 | -49.69 |
| 5925.000 | Peak | 51.90 | 4.36 | 56.25 | 68.20 | -11.95 |
| 5929.590 | Peak | 53.03 | 4.34 | 57.37 | 68.20 | -10.83 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 94 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac40 **Test Date** :2022-03-17

Test Frequency :5795 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

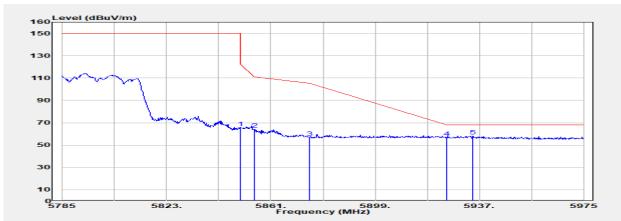

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dBµV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5850.000 | Peak | 61.05 | 4.31 | 65.36 | 122.20 | -56.84 |
| 5855.000 | Peak | 59.89 | 4.21 | 64.10 | 110.80 | -46.70 |
| 5875.000 | Peak | 53.03 | 3.90 | 56.93 | 105.20 | -48.27 |
| 5925.000 | Peak | 52.28 | 4.36 | 56.63 | 68.20 | -11.57 |
| 5934.530 | Peak | 53.96 | 4.25 | 58.21 | 68.20 | -9.99 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 95 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-17

Test Frequency :5210 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

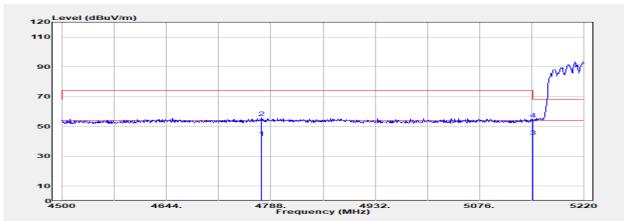

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 4775.040 | Average | 39.67 | 2.94 | 42.61 | 54.00 | -11.39 |
| 4775.040 | Peak | 53.03 | 2.94 | 55.97 | 74.00 | -18.03 |
| 5150.000 | Average | 40.18 | 3.03 | 43.21 | 54.00 | -10.79 |
| 5150.000 | Peak | 51.81 | 3.03 | 54.84 | 74.00 | -19.16 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 96 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-17

Test Frequency :5210 MHz Temp./Humi. :21.7/69

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

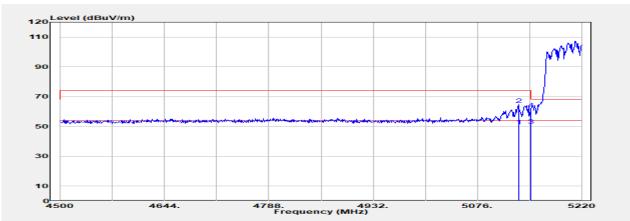

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5132.880 | Average | 47.57 | 2.72 | 50.28 | 54.00 | -3.72 |
| 5132.880 | Peak | 61.97 | 2.72 | 64.69 | 74.00 | -9.31 |
| 5150.000 | Average | 47.74 | 3.03 | 50.77 | 54.00 | -3.23 |
| 5150.000 | Peak | 58.72 | 3.03 | 61.75 | 74.00 | -12.25 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 97 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-17

Test Frequency :5290 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

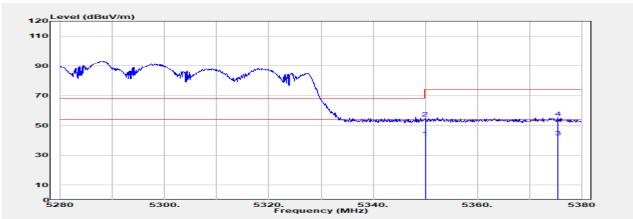

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5350.000 | Average | 39.80 | 2.21 | 42.01 | 54.00 | -11.99 |
| 5350.000 | Peak | 52.84 | 2.21 | 55.05 | 74.00 | -18.95 |
| 5375.500 | Average | 39.90 | 2.33 | 42.23 | 54.00 | -11.77 |
| 5375.500 | Peak | 53.07 | 2.33 | 55.40 | 74.00 | -18.60 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 98 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-17

Test Frequency :5290 MHz Temp./Humi. :21.7/69

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

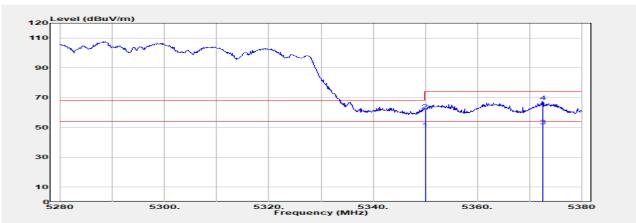

| Freq. | Detector | Spectrum | Factor | Actual | Limit | Margin |
|----------|----------|---------------|--------|--------|--------|--------|
| | Mode | Reading Level | | FS | @3m | |
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | • | • | |
| 5350.000 | Average | 46.91 | 2.21 | 49.12 | 54.00 | -4.88 |
| 5350.000 | Peak | 59.21 | 2.21 | 61.42 | 74.00 | -12.58 |
| 5372.600 | Average | 48.88 | 2.32 | 51.20 | 54.00 | -2.80 |
| 5372 600 | Peak | 65 13 | 2.32 | 67 45 | 74 00 | -6.55 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 99 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-13

Test Frequency :5530 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

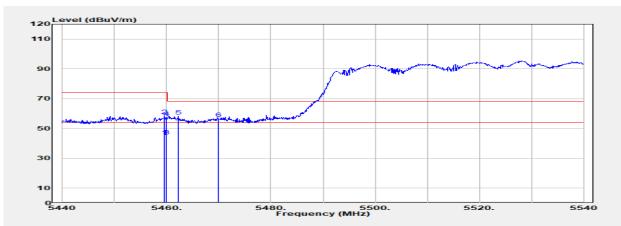

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμ̈V | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5459.600 | Average | 41.97 | 2.64 | 44.61 | 54.00 | -9.39 |
| 5459.600 | Peak | 55.88 | 2.64 | 58.52 | 74.00 | -15.48 |
| 5460.000 | Average | 42.15 | 2.64 | 44.79 | 54.00 | -9.21 |
| 5460.000 | Peak | 54.71 | 2.64 | 57.35 | 74.00 | -16.65 |
| 5462.300 | Peak | 55.58 | 2.67 | 58.25 | 68.20 | -9.95 |
| 5470.000 | Peak | 53.87 | 2.77 | 56.64 | 68.20 | -11.56 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

解析方方式の子、上報音の名性は列風之体の耳具・「同時以後の理味情物人」を報告不能争之も背面に可いている。 This document is issued by the Company subject to its General Conditions of Service Printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 100 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-13

Test Frequency :5530 MHz Temp./Humi. :25.2/58

Test Mode :BE CH LOW Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

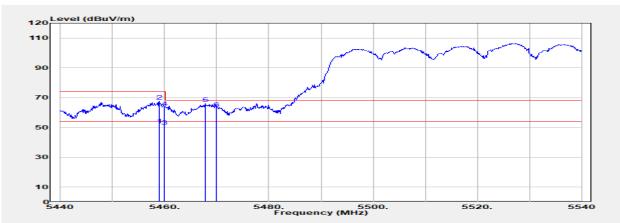

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5458.900 | Average | 49.07 | 2.64 | 51.70 | 54.00 | -2.30 |
| 5458.900 | Peak | 65.12 | 2.64 | 67.76 | 74.00 | -6.24 |
| 5460.000 | Average | 48.06 | 2.64 | 50.70 | 54.00 | -3.30 |
| 5460.000 | Peak | 60.69 | 2.64 | 63.33 | 74.00 | -10.67 |
| 5467.800 | Peak | 63.43 | 2.74 | 66.17 | 68.20 | -2.03 |
| 5470.000 | Peak | 59.98 | 2.77 | 62.75 | 68.20 | -5.45 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 101 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-13

Test Frequency :5610 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Vertical

EUT Pol :NB Plane Engineer :Quentin

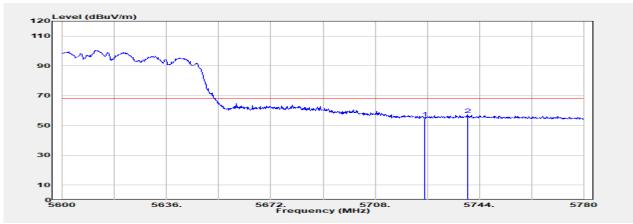

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBμV/m | dB |
| | | | | | | |
| 5725.000 | Peak | 50.77 | 4.21 | 54.98 | 68.20 | -13.22 |
| 5739.860 | Peak | 52.77 | 4.34 | 57.11 | 68.20 | -11.09 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 102 of 320


Report Number :E2/2022/30010 Test Site :SAC G

Operation Mode :802.11ac80 **Test Date** :2022-03-13

Test Frequency :5610 MHz Temp./Humi. :25.2/58

Test Mode :BE CH HIGH Antenna Pol. :Horizontal

EUT Pol :NB Plane Engineer :Quentin

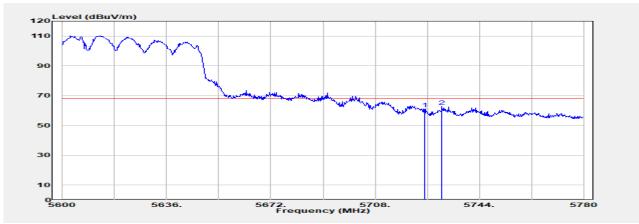

| Freq. | Detector Mode | Spectrum Reading Level | Factor | Actual FS | Limit @3m | Margin |
|----------|------------------|---------------------------|--------|--------------|--------------|--------|
| MHz | PK/QP/AV | dΒμV | dB | dBµV/m | dBµV/m | dB |
| | | | | | | |
| 5725.000 | Peak | 56.83 | 4.21 | 61.04 | 68.20 | -7.16 |
| 5731.040 | Peak | 58.60 | 4.26 | 62.86 | 68.20 | -5.34 |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。