

ATTACHMENT O – SAR TEST PLOTS

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835(BODY) / Antenna : In / Channel : 363
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.405 mW/g


CDMA Body 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.7 V/m; Power Drift = -0.061 dB

Peak SAR (extrapolated) = 0.504 W/kg

SAR(1 g) = 0.381 mW/g; SAR(10 g) = 0.273 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.400 mW/g

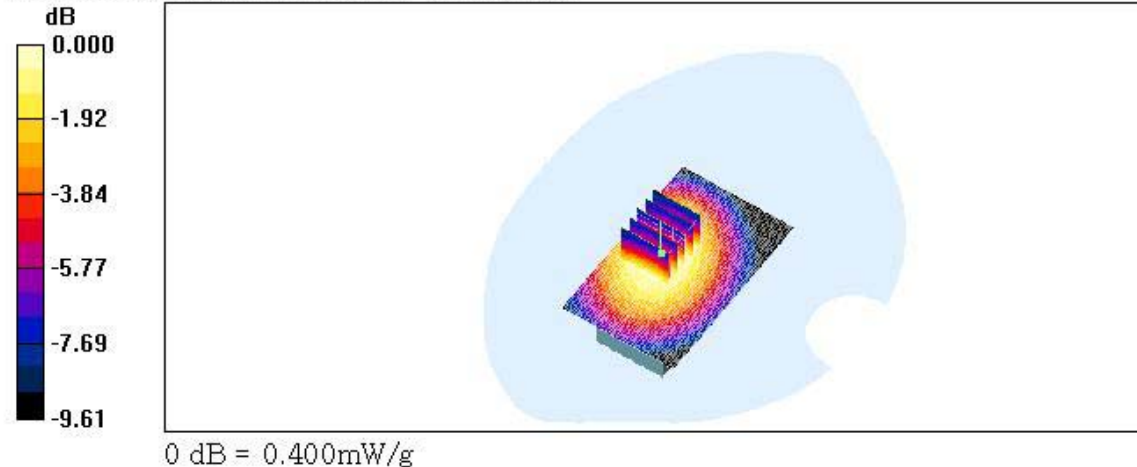

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835(BODY) / Antenna : In / Channel : 363(E-battery)
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.401 mW/g


CDMA Body 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.7 V/m; Power Drift = 0.041 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.274 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.405 mW/g

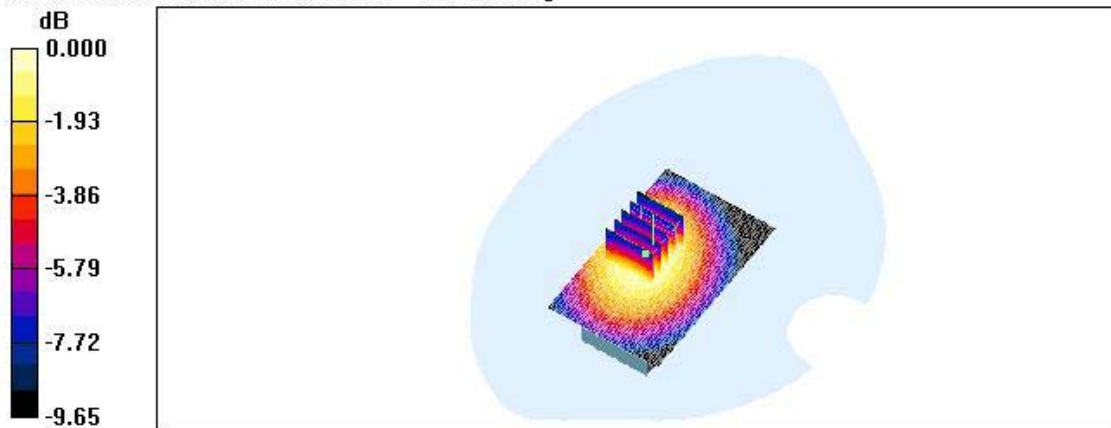

0 dB = 0.405mW/g

Test Laboratory: HCT

MODEL: PN-320

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835(BODY) / Channel : 363 (Bluetooth on)

Liquid Temperature : 21.7 °C

Date Tested : April 17, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Program Name: PN-320

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89 \text{ MHz}$; $\sigma = 0.986 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.348 mW/g

CDMA Body 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 17.5 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.236 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.349 mW/g

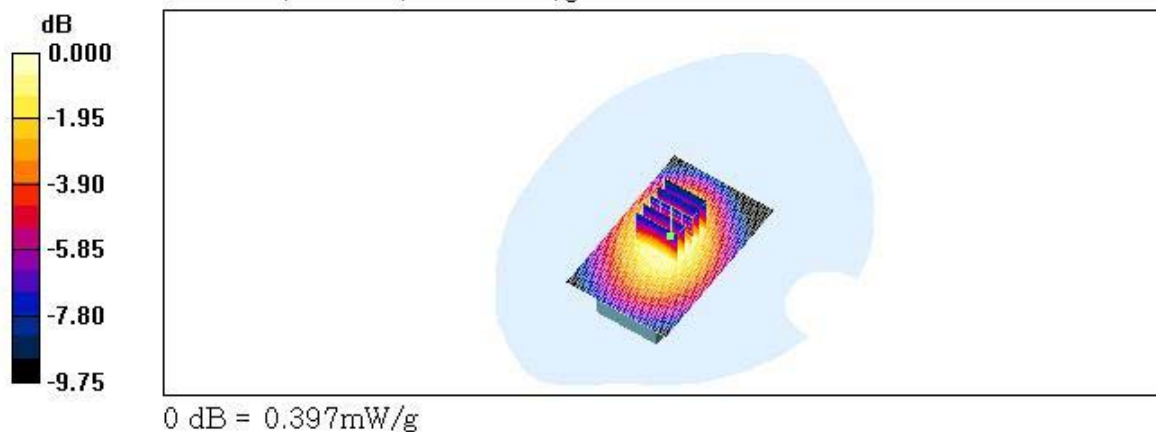

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900(BODY) / Antenna : In / Channel : 600
Liquid Temperature : 21.6 °C
Date Tested : April 04, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1


Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$
Maximum value of SAR (interpolated) = 0.593 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 17.8 V/m; Power Drift = 0.044 dB
Peak SAR (extrapolated) = 0.817 W/kg
SAR(1 g) = 0.544 mW/g; SAR(10 g) = 0.340 mW/g
Maximum value of SAR (measured) = 0.587 mW/g

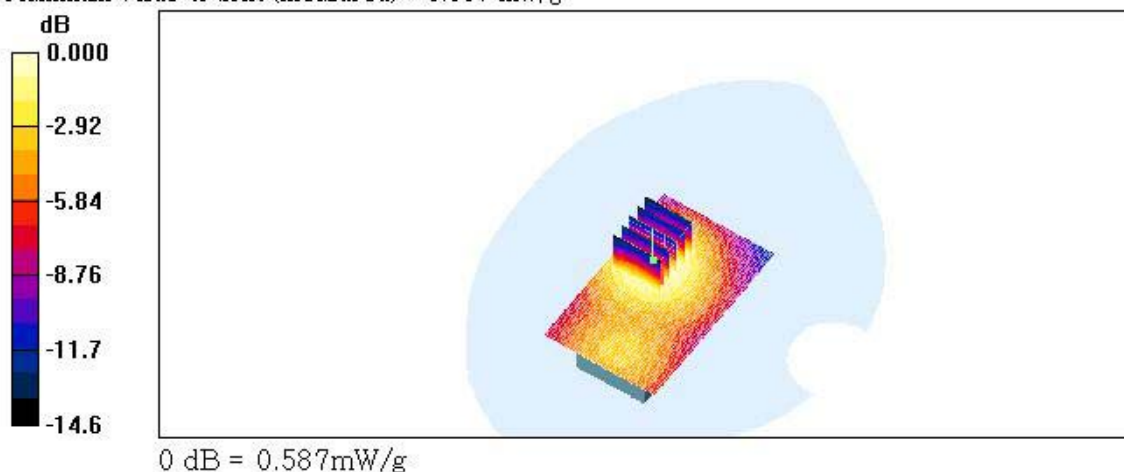

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900(BODY) / Antenna : In / Channel : 600(E-battery)
Liquid Temperature : 21.6 °C
Date Tested : April 04, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1


Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.602 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 17.8 V/m; Power Drift = -0.089 dB
Peak SAR (extrapolated) = 0.786 W/kg
SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.335 mW/g
Maximum value of SAR (measured) = 0.578 mW/g

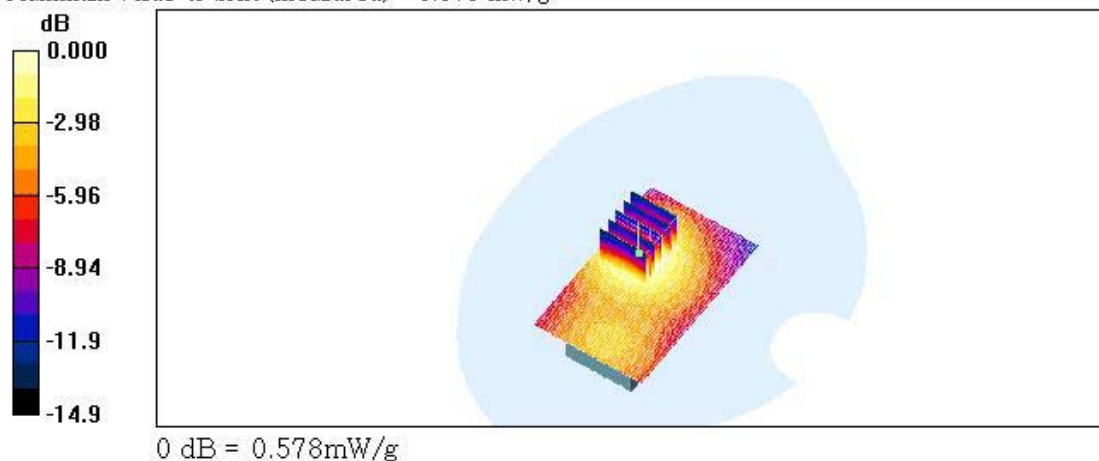

Test Laboratory: HCT

MODEL: PN-320

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900(BODY) / Channel : 600 (Bluetooth on)

Liquid Temperature : 21.7 °C

Date Tested : April 17, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Program Name: PN-320

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.596 mW/g


PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.8 V/m; Power Drift = -0.153 dB

Peak SAR (extrapolated) = 0.774 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.323 mW/g

Maximum value of SAR (measured) = 0.565 mW/g

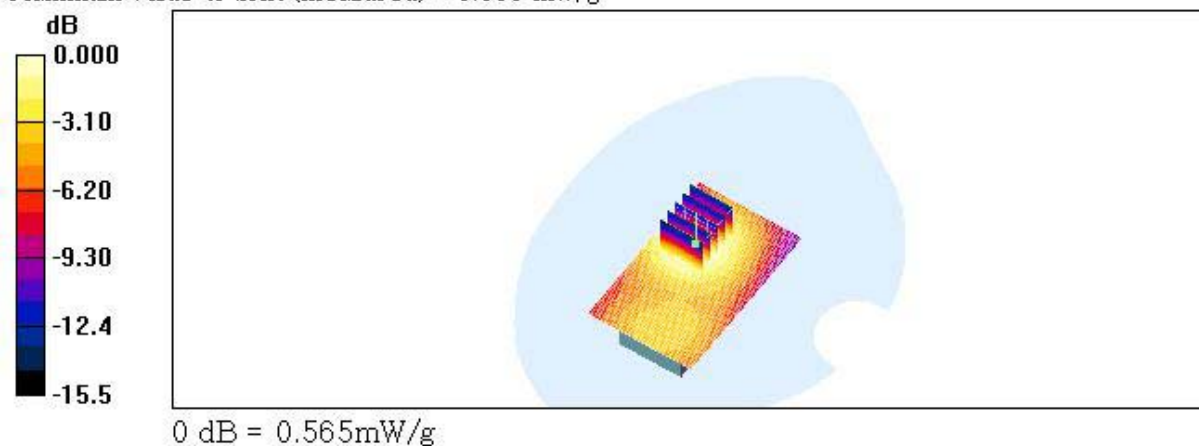

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : In / Channel : 777

Liquid Temperature : 21.7 °C

Date Tested : April 03, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.904 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Z Scan (1x1x41): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.878 mW/g

0.081, 0.409

Interpolated SAR(x,y,z,f0)

SAR, Z Scan: Value Along Z, X=0, Y=0

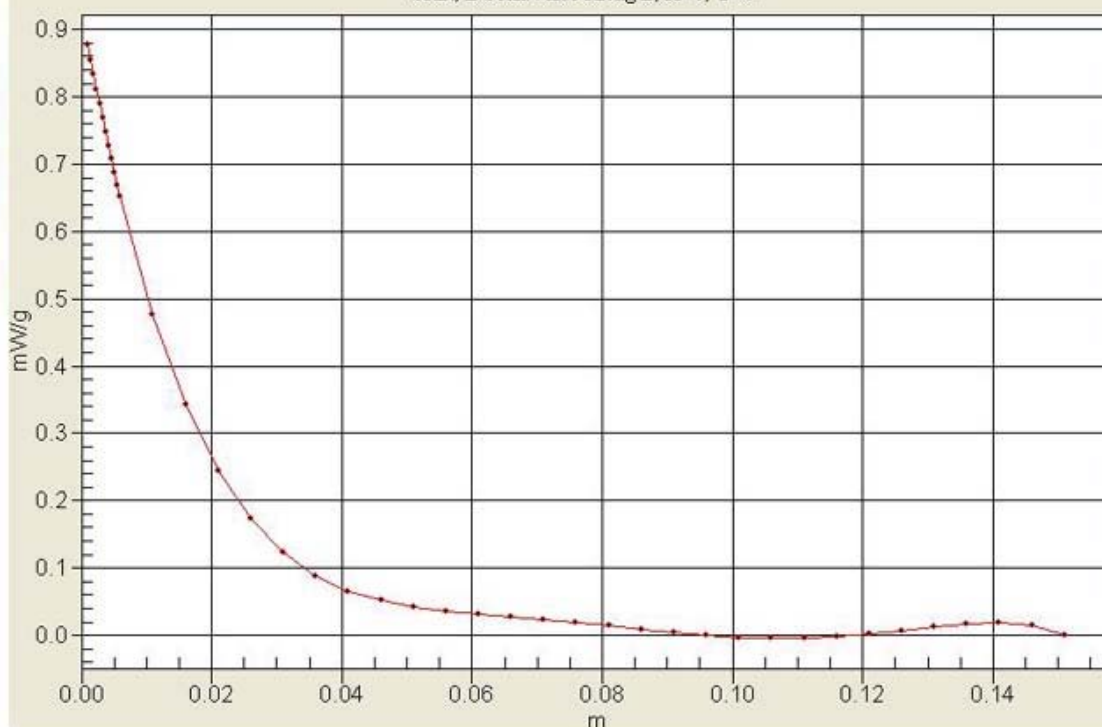

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : In / Channel : 1175

Liquid Temperature : 21.6 °C

Date Tested : April 04, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(5.14, 5.14, 5.14); Calibrated: 2005-08-30

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Z Scan (1x1x41): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$


Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.09 mW/g

0.082, 0.532

Interpolated SAR(x,y,z,f0)

SAR; Z Scan: Value Along Z, X=0, Y=0

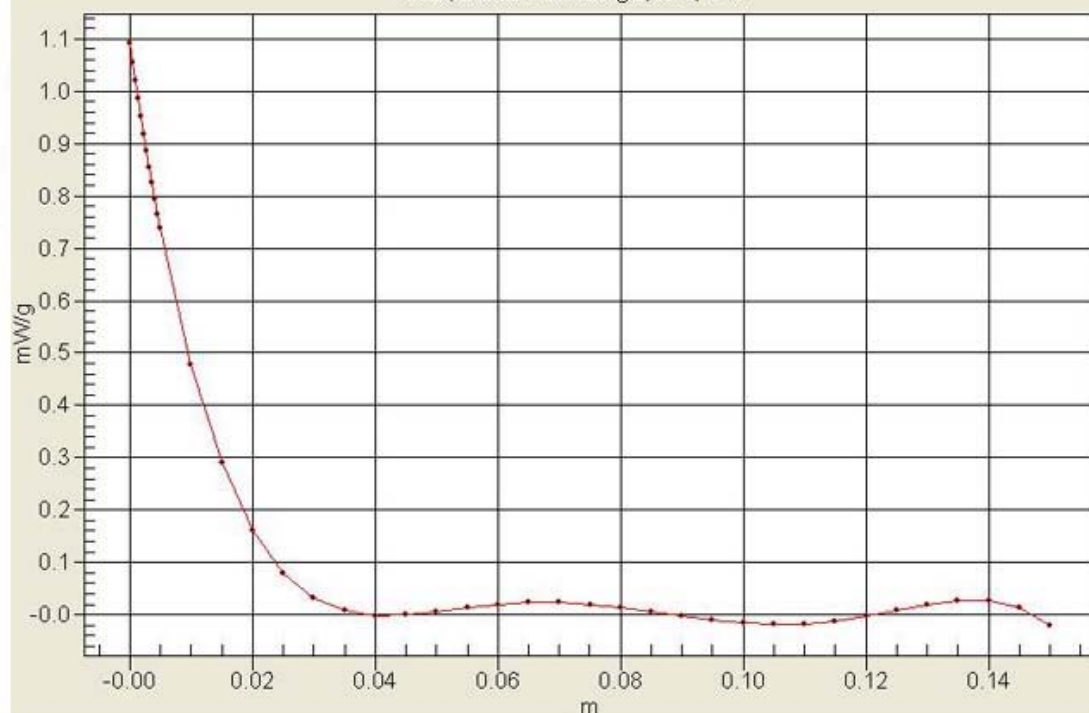

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835(BODY) / Antenna : In / Channel : 363(E-battery)
Liquid Temperature : 21.7 °C
Date Tested : April 03, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.992$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.27, 6.27, 6.27); Calibrated: 2005-08-30
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Z Scan 2 (1x1x41): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.404 mW/g

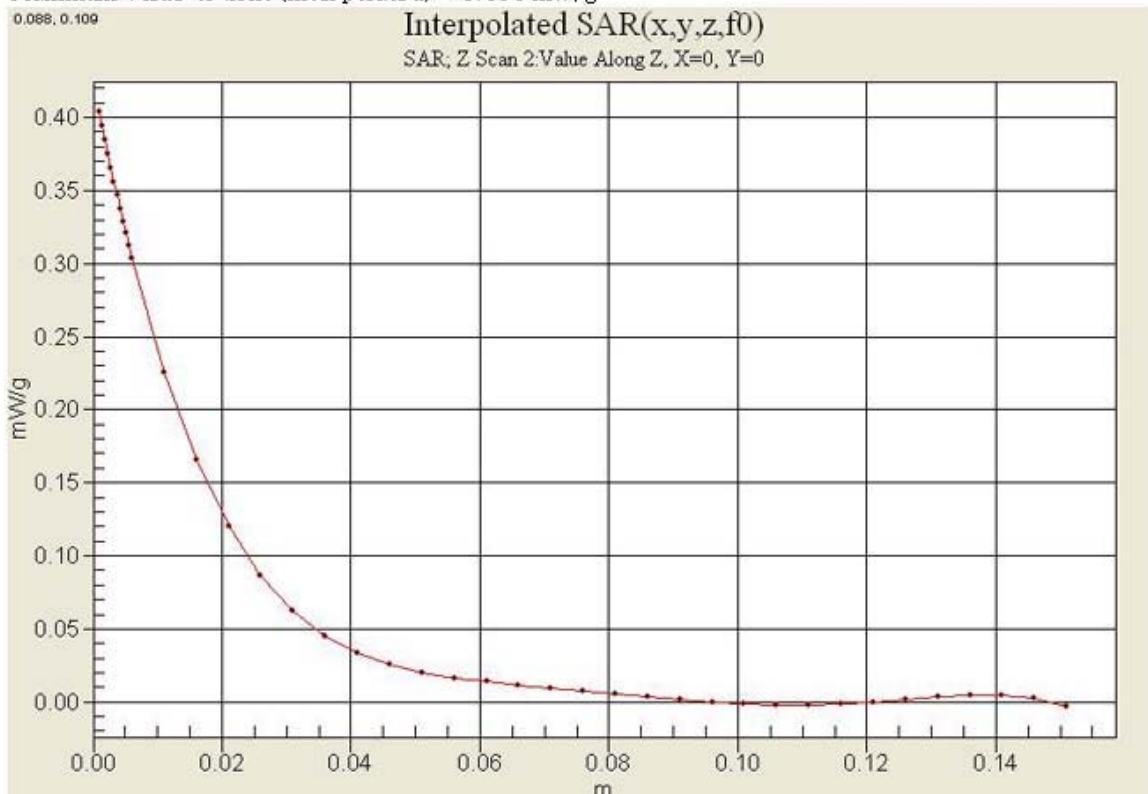

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900(BODY) / Antenna : In / Channel : 600

Liquid Temperature : 21.6 °C

Date Tested : April 04, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 54$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(4.44, 4.44, 4.44); Calibrated: 2005-08-30

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Z Scan (1x1x41): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Maximum value of SAR (interpolated) = 0.464 mW/g

0.068, 0.128

Interpolated SAR(x,y,z,f0)

SAR, Z Scan: Value Along Z, X=0, Y=0

