







ISO/IEC17025Accredited Lab.

Report No: FCC 1503219-02 File reference No: 2015-04-20

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Smart Phone

Model No: S500, a5, x50

Trademark: Polaroid

Test Standards: FCC Part 15.247 and RSS-210 Issue 8

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4, FCC Part 15 Subpart C,

Paragraph 15.247 and RSS-210 Issue 8 regulations for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 20, 2015

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timewaytech.com

Report No: FCC1503219-02 Page 2 of 99

Date: 2015-04-20



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 99

Report No: FCC1503219-02

Date: 2015-04-20



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB and 99% Bandwidth	22
8.0	Maximum Output Power.	46
9.0	Carrier Frequency Separation.	49
10.0	Number of Hopping Channel	53
11.0	Time of Occupancy (Dwell Time)	57
12.0	Out of Band Measurement.	70
13.0	Antenna Requirement.	83
14.0	FCC ID/ IC Label.	84
15.0	Photo of Test Setup and EUT View	85

Date: 2015-04-20



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen,

Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District, Shenzhen, China

Telephone: 0755-83976295 Fax: 0755-83204874

1.3 Description of EUT

Product: Smart Phone

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District,

Shenzhen, China

Brand Name: Polaroid
Model Number: S500
Additional Model Number: a5, x50

Power Adapter Model: K-T50501000U1, Input: 100-240V, 50/60Hz, 0.15A; Output: DC5V,

1000mA

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: Integral Antenna and the maximum Gain of this antenna is 0dBi;

1.4 Submitted Sample: 2 Samples

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 99 Report No: FCC1503219-02

Date: 2015-04-20



1.5 Test Duration 2015-03-26 to 2015-04-20

1.6 Test Uncertainty Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

Test Engineer 1.7

The sample tested by

Print Name: Terry Tang

Page 6 of 99

Report No: FCC1503219-02

Date: 2015-04-20



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2014-08-21	2015-08-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2014-08-22	2015-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2014-08-22	2015-08-21
Ultra Broadband ANT	R&S	HL562	100157	2014-08-23	2015-08-22
ESDV Test Receiver	R&S	ESDV	100008	2014-08-22	2015-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2014-08-21	2015-08-20
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		-
Computer	IBM	8434	1S8434KCE99BLXLO*	-	ı
Loop Antenna	EMCO	6502	00042960	2014-08-22	2015-08-21
ESPI Test Receiver	R&S	ESI26	838786/013	2014-08-22	2015-08-21
3m OATS			N/A	2014-08-21	2015-08-20
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2014-08-23	2015-08-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2014-08-23	2015-08-22
Power meter	Anritsu	ML2487A	6K00003613	2014-08-22	2015-08-21
Power sensor	Anritsu	MA2491A	32263	2014-08-22	2015-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2014-08-23	2015-08-22
LISN	AFJ	LS16C	10010947251	2014-08-21	2015-08-20
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2014-08-22	2015-08-21
9*6*6 Anechoic			N/A	2014-08-21	2015-08-20
EMI Test Receiver	RS	ESCS30	100139	2014-08-22	2015-08-21

2.1 **Auxiliary Equipment**

Name	Model No.	Rating	Manufacturer	FCC ID/DOC
Passive Earphone				

Page 7 of 99

Report No: FCC1503219-02

Date: 2015-04-20



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247 and RSS-210

4.0 **EUT Modification**

No modification by Shenzhen Timeway Technology Consulting Co., Ltd

Page 8 of 99


Report No: FCC1503219-02

Date: 2015-04-20



5. **Power Line Conducted Emission Test**

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 -2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

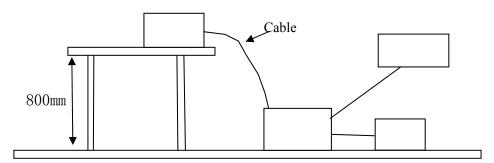

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Page 9 of 99

Report No: FCC1503219-02

Date: 2015-04-20



A. EUT

Device	Manufacturer	Model	FCC ID	
Smart Phone	Shenzhen Jingwah Information	S500, a5, x50	RBD-S500	
Smart I none	Technology Co., Ltd.	5500, a5, x50	KDD-5500	

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB \(\mu \) V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2015-04-20



Conducted Emission on Live Terminal (150kHz to 30MHz) A:

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

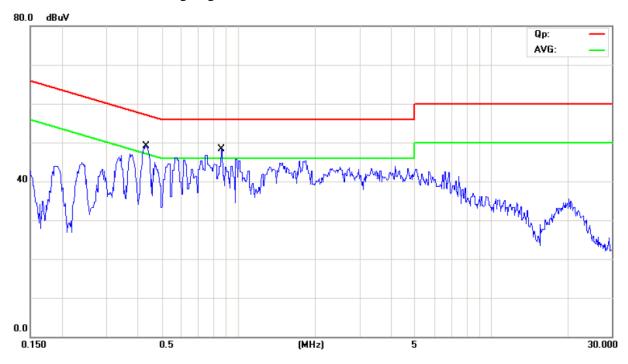

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.4312	35.90	11.30	47.20	57.23	-10.03	QP	
2	0.4312	-5.60	11.30	5.70	47.23	-41.53	AVG	
3	0.8537	30.50	11.75	42.25	56.00	-13.75	QP	
4	0.8537	16.90	11.75	28.65	46.00	-17.35	AVG	

Date: 2015-04-20



Conducted Emission on Neutral Terminal (150kHz to 30MHz) B:

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

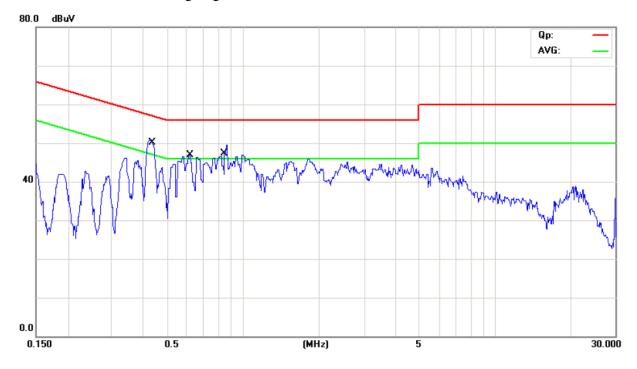

No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	0.4383	32.90	11.31	44.21	57.09	-12.88	QP	
2	0.4383	-3.40	11.31	7.91	47.09	-39.18	AVG	
3 *	0.6214	32.10	11.50	43.60	56.00	-12.40	QP	
4	0.6214	20.10	11.50	31.60	46.00	-14.40	AVG	
5	0.8434	31.20	11.73	42.93	56.00	-13.07	QP	
6	0.8434	10.80	11.73	22.53	46.00	-23.47	AVG	

Report No: FCC1503219-02 Page 12 of 99


Date: 2015-04-20



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10 –2013. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

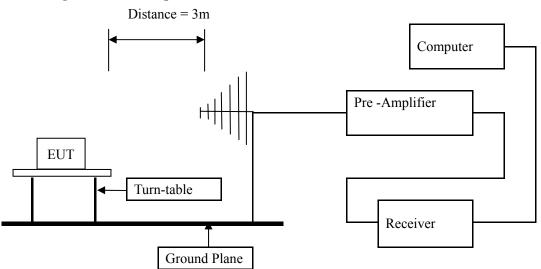

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No: FCC1503219-02 Page 13 of 99

Date: 2015-04-20



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. GFSK was the worse case because it has highest output power

Date: 2015-04-20



Page 14 of 99

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
878.800	35.67	Н	46.00
238.760	36.01	Н	46.00
30.440	30.83	V	40.00
870.800	37.98	V	46.00


Page 15 of 99

Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

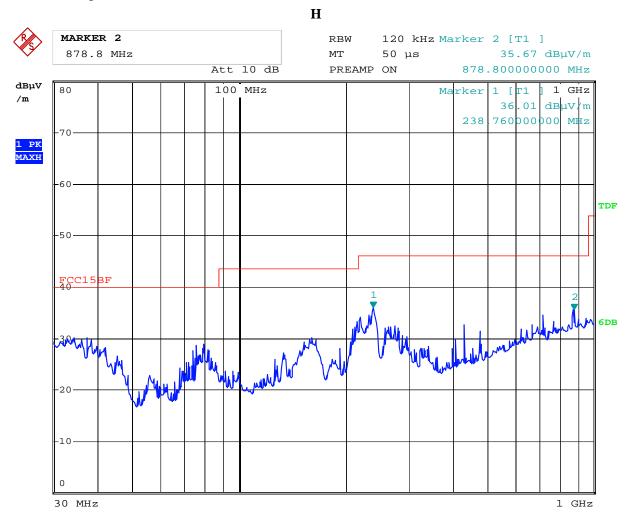

27.MAR.2015 10:20:49 Date:


Page 16 of 99

Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

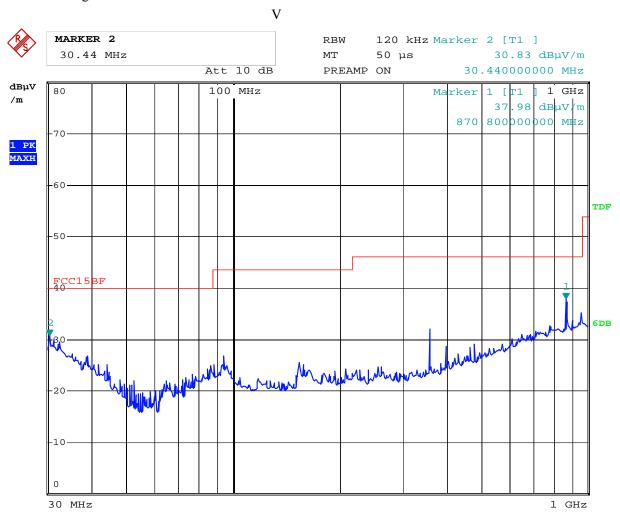

27.MAR.2015 10:10:01 Date:

Report No: FCC1503219-02 Page 17 of 99

Date: 2015-04-20



Operation Mode: Transmitting under Low Channel (2402MHz)

E(MII-)	I1(-)2 (4D :: V/)	A	Limit@2 (dD v V/)
Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4804		Н	74(Peak)/ 54(AV)
4804		V	74(Peak)/ 54(AV)
7206		H/V	74(Peak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03bc V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882		Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No: FCC1503219-02 Page 18 of 99

Date: 2015-04-20



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
4960	1	Н	74(Peak)/ 54(AV)
4960	-	V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


^{2.} Remark "---" means that the emissions level is too low to be measured

Date: 2015-04-20




Please refer to the following test plots for details:

Low Channel: Horizontal

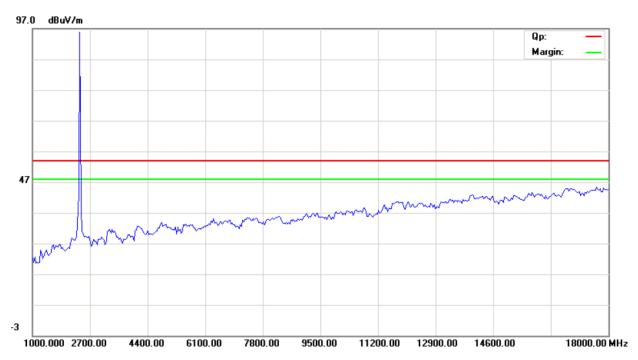

Low Channel: Vertical

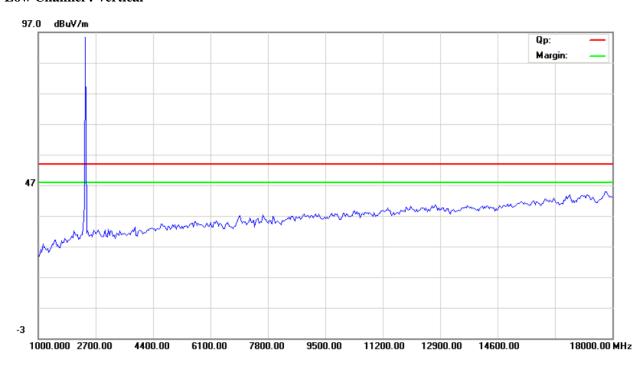

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2015-04-20



Middle Channel: Horizontal

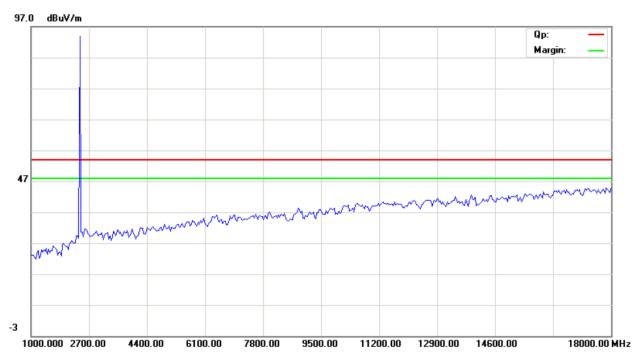

Middle Channel: Vertical

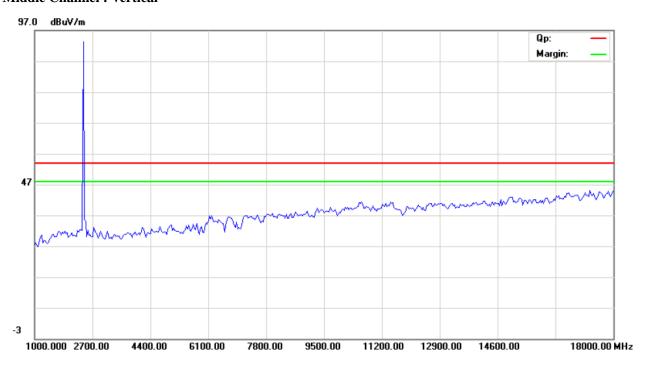

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.


Date: 2015-04-20



High Channel: Horizontal



High Channel: Vertical

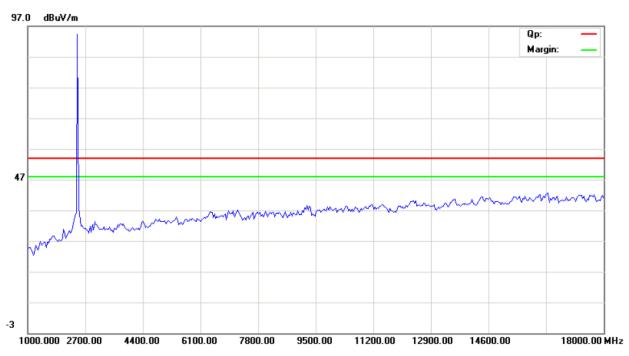

Note: for the radiated emissions above 18G, it is the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No: FCC1503219-02 Page 22 of 99

Date: 2015-04-20



7.0 20dB and 99% Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

TJPC OF III	oddiadon: Of Six			
EUT		Smart Phone	Model	S500, a5, x50
Mode	Ke	ep Transmitting	Input Voltage	AC120V
Temperat	ure	24 deg. C,		56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	890		Pass
Middle	2441	896		Pass
High	2480	908		Pass

Page 23 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

1. Condition: Low Channel

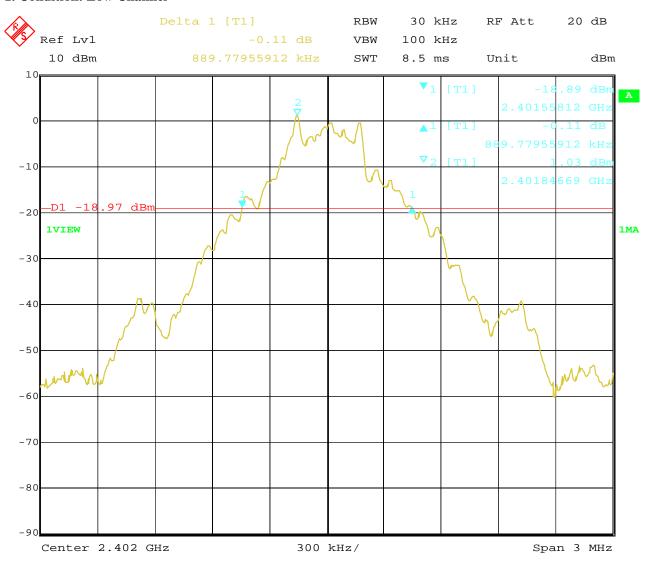


Date: 1.APR.2015 17:28:25 Page 24 of 99

Date: 2015-04-20



2. Condition: Middle Channel

Report No: FCC1503219-02

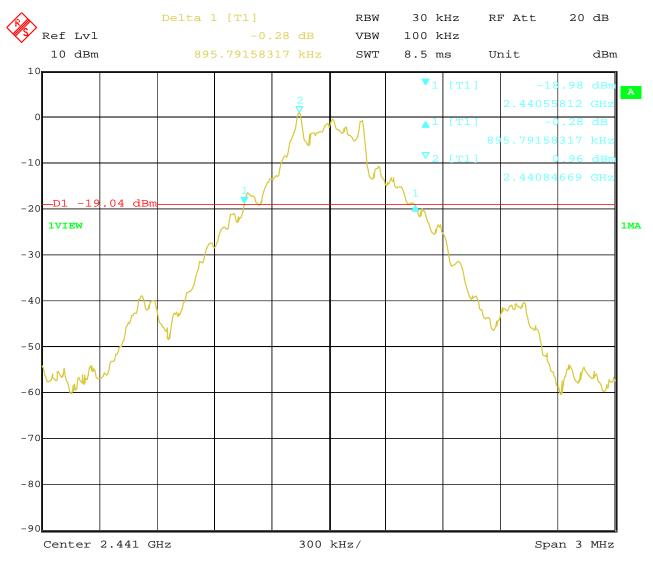

1.APR.2015 17:32:40 Date:


Page 25 of 99

Report No: FCC1503219-02

Date: 2015-04-20



3. High Channel

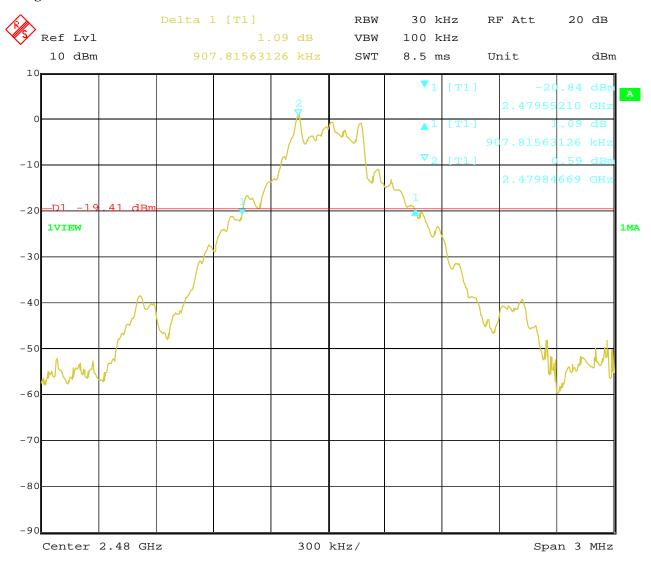

1.APR.2015 17:34:56 Date:

Report No: FCC1503219-02 Page 26 of 99

Date: 2015-04-20



99% Occupied Bandwidth (GFSK Mode)

EUT		Smart Phone		S500, a5, x50
Mode	Ke	ep Transmitting	Input Voltage	AC120V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	99% Occupied Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	866		Pass
Middle	2441	872		Pass
High	2480	860		Pass

Page 27 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

1. Condition: Low Channel

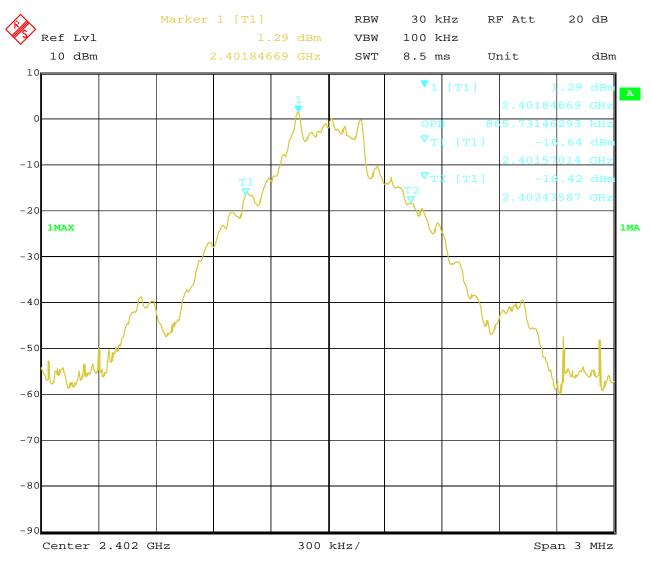

Date: 2.APR.2015 09:14:16


Page 28 of 99

Report No: FCC1503219-02

Date: 2015-04-20



2. Condition: Middle Channel

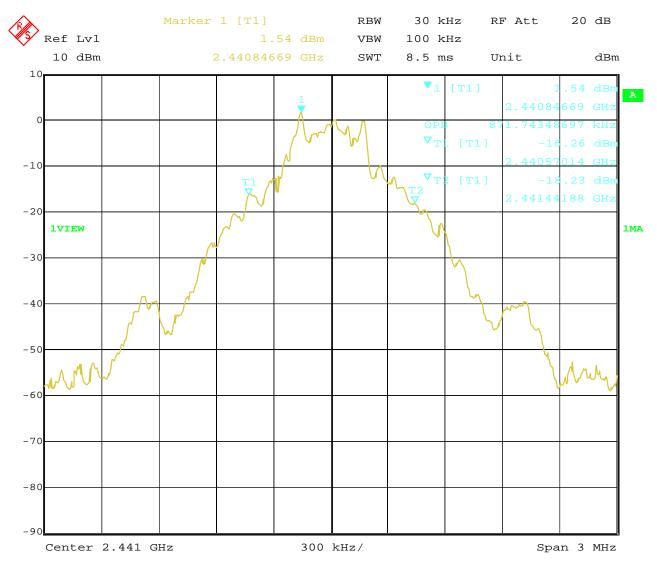

2.APR.2015 09:13:10 Date:


Page 29 of 99

Date: 2015-04-20

Report No: FCC1503219-02



3. High Channel

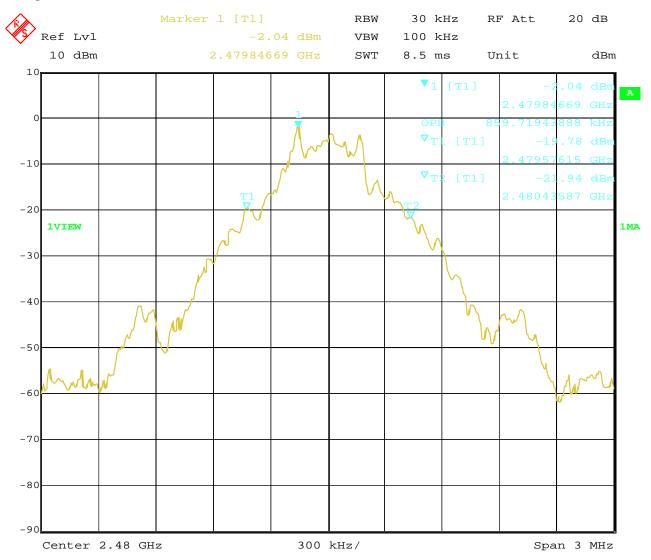

20.APR.2015 12:02:41 Date:

Date: 2015-04-20



Page 30 of 99

Test Result

Type of Modulation: $\pi/4DQPSK$

EUT		Smart Phone		S500, a5, x50
Mode	Keep Transmitting		Input Voltage	AC120V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1142		Pass
Middle	2441	1142		Pass
High	2480	1136	-	Pass

Page 31 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

1. Condition: Low Channel

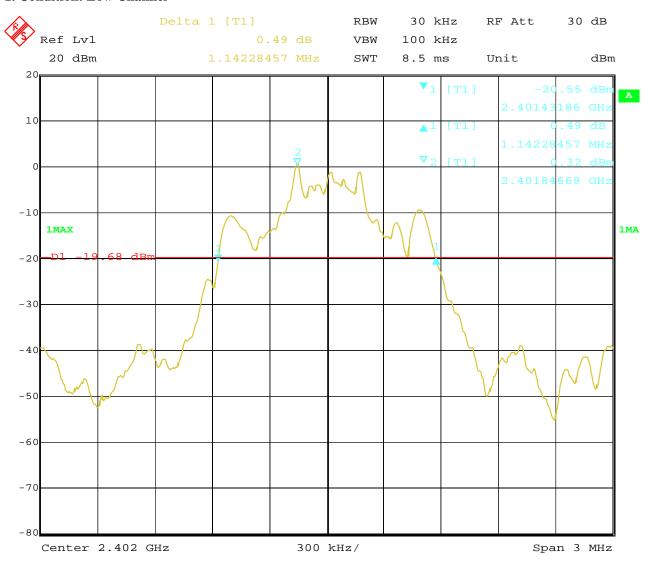


Date: 2.APR.2015 14:40:25 Report No: FCC1503219-02 Page 32 of 99

Date: 2015-04-20



2. Condition: Middle Channel

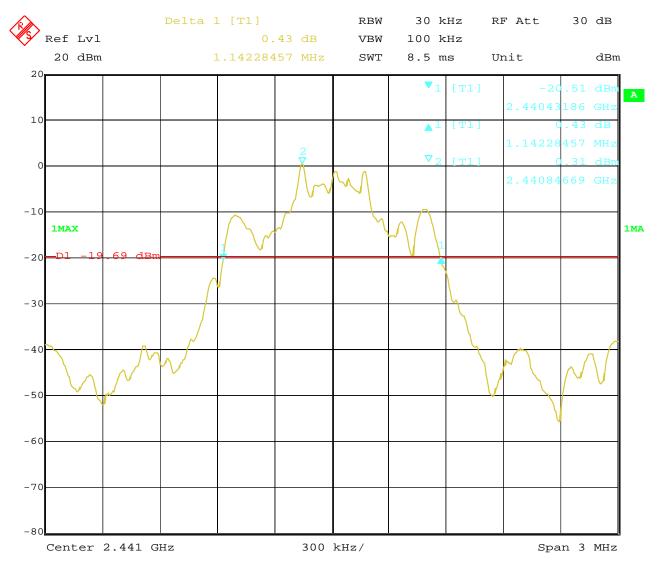


2.APR.2015 14:36:12 Date:

Page 33 of 99 Report No: FCC1503219-02

Date: 2015-04-20



3. High Channel

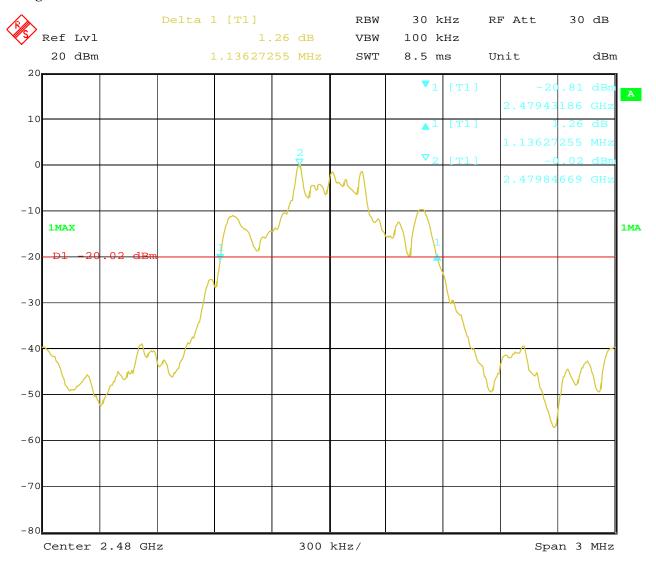

2.APR.2015 14:41:39 Date:

Report No: FCC1503219-02 Page 34 of 99

Date: 2015-04-20



99% Occupied Bandwidth (JI/4DQPSK Mode)

EUT		Smart Phone		S500, a5, x50
Mode	Ko	eep Transmitting	Input Voltage	AC120V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	99% Occupied Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1076		Pass
Middle	2441	1076		Pass
High	2480	1076		Pass

Page 35 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

1. Condition: Low Channel

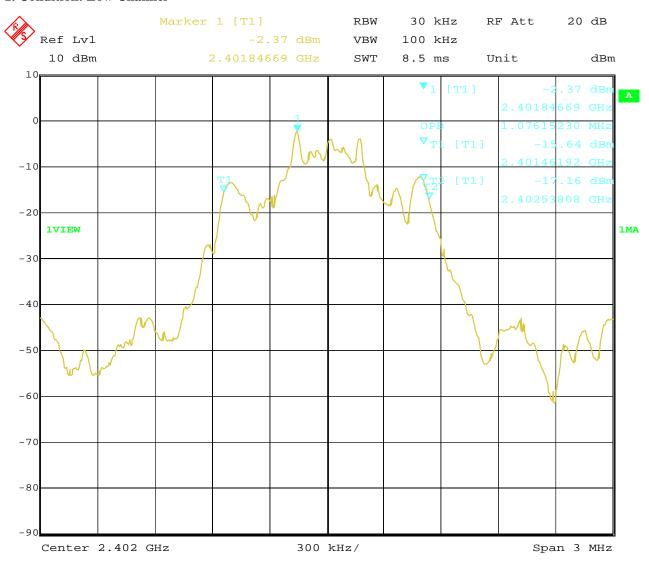

Date: 20.APR.2015 12:33:10


Page 36 of 99

Report No: FCC1503219-02

Date: 2015-04-20



2. Condition: Middle Channel

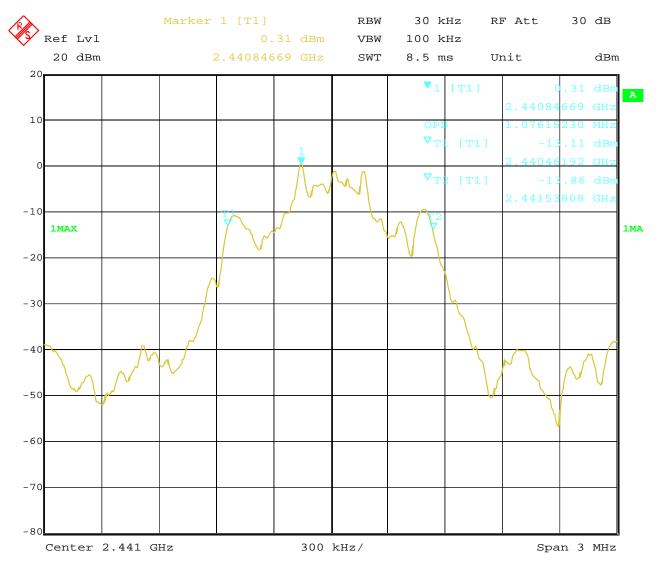


2.APR.2015 Date: 14:34:59

Page 37 of 99 Report No: FCC1503219-02

Date: 2015-04-20



3. High Channel

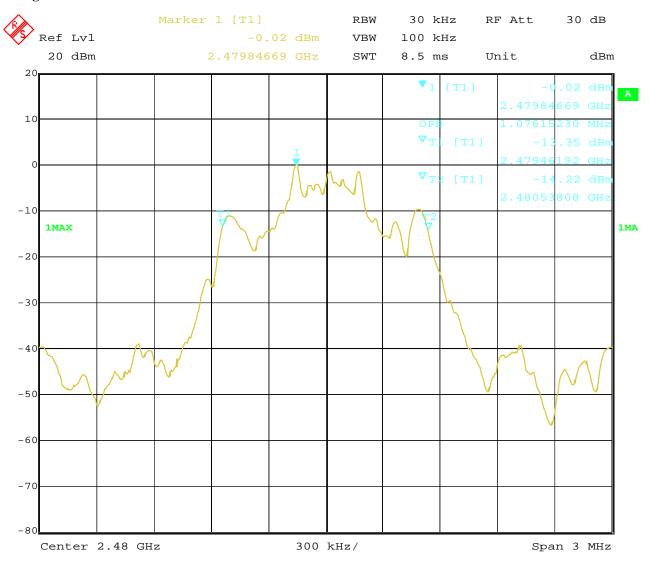

2.APR.2015 14:42:40 Date:

Date: 2015-04-20



Page 38 of 99

Test Result

Type of Modulation: 8DPSK

EUT		Smart Phone		Smart Phone Model		S500, a5, x50
Mode	Ko	Keep Transmitting		AC120V		
Temperat	ure	24 deg. C,	Humidity	56% RH		
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail		
Low	2402	1166		Pass		
Middle	2441	1166		Pass		
High	2480	1166		Pass		

Page 39 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

1. Condition: Low Channel

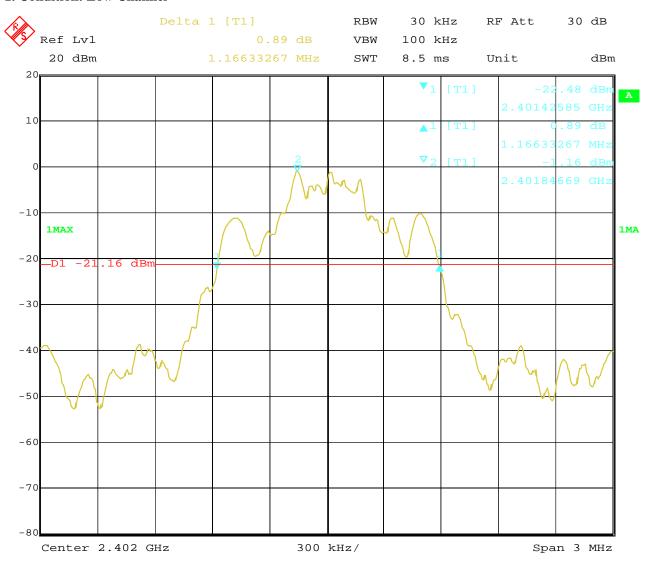


Date: 2.APR.2015 15:24:16

Page 40 of 99 Report No: FCC1503219-02

Date: 2015-04-20



2. Condition: Middle Channel

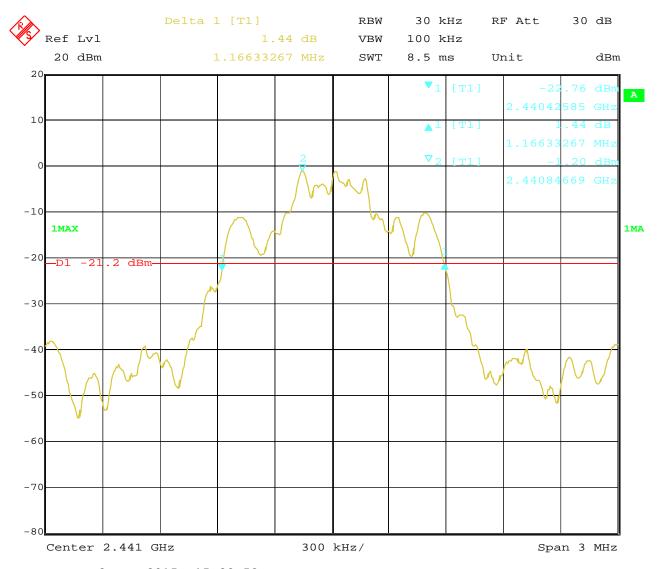


2.APR.2015 15:22:53 Date:

Page 41 of 99 Report No: FCC1503219-02

Date: 2015-04-20



3. High Channel

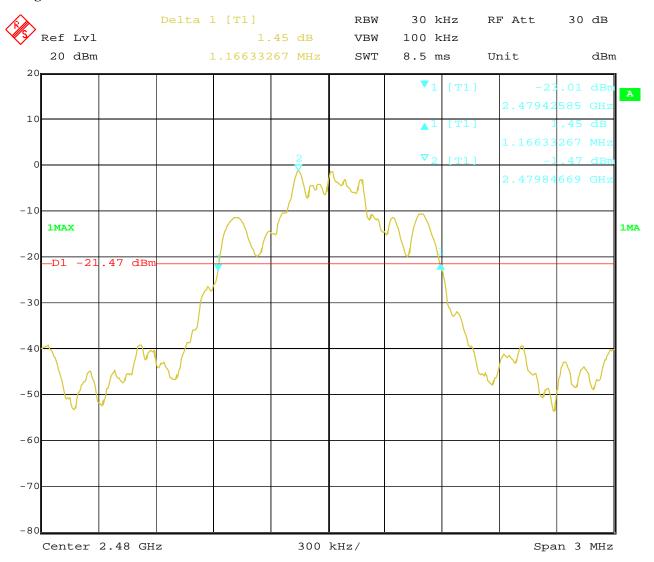

2.APR.2015 15:21:47 Date:

Report No: FCC1503219-02 Page 42 of 99

Date: 2015-04-20



99% Occupied Bandwidth (8DPSK Mode)

EUT		Smart Phone	Model	S500, a5, x50		
Mode	K	Keep Transmitting		Keep Transmitting Input Voltage		AC120V
Temperati	ure	24 deg. C,	Humidity	56% RH		
Channel	Channel Frequency 99% Occupied Bandwidth (MHz) (kHz)		Maximum Limit (kHz)	Pass/ Fail		
Low	2402	1088		Pass		
Middle	2441	1088		Pass		
High	2480	1088		Pass		

Page 43 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Figure:

1. Condition: Low Channel

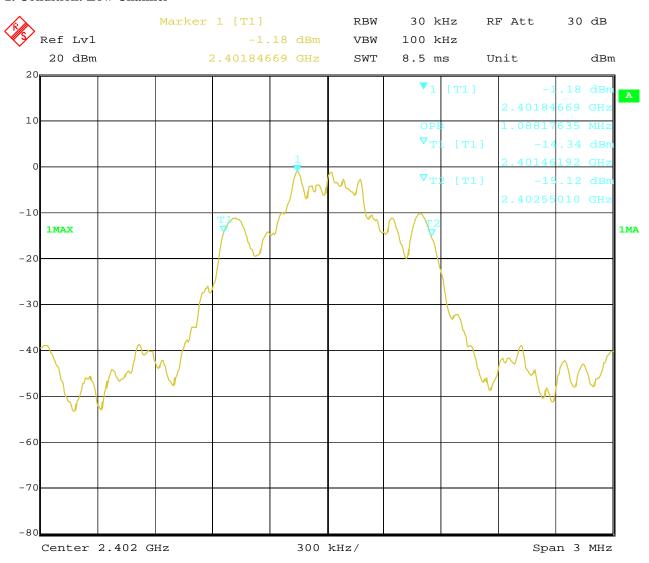

2.APR.2015 15:19:00 Date:


Page 44 of 99

Report No: FCC1503219-02

Date: 2015-04-20



2. Condition: Middle Channel

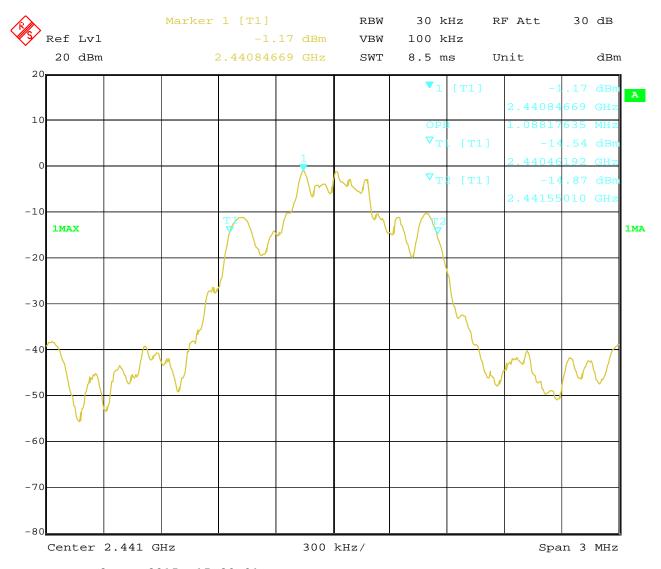

2.APR.2015 15:20:01 Date:


Page 45 of 99

Date: 2015-04-20

Report No: FCC1503219-02



3. High Channel

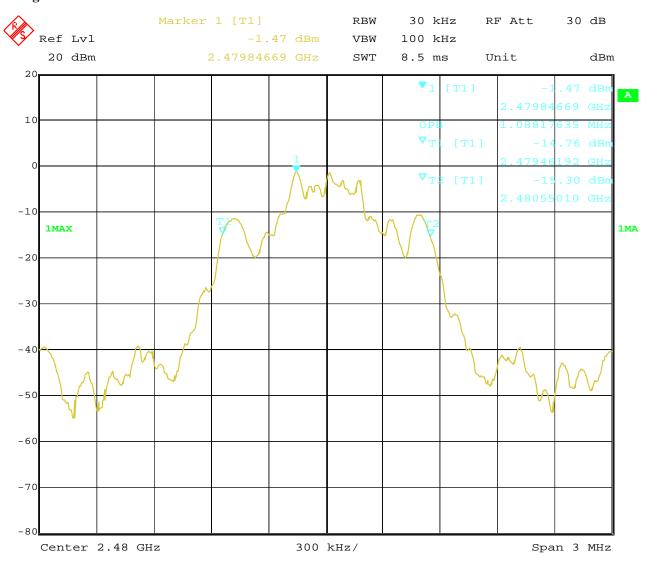

2.APR.2015 15:21:15 Date:

Date: 2015-04-20



Page 46 of 99

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = RMS; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2015-04-20



8.4Test Results

Type of Modulation: GFSK

EUT		Smart Phone			el	S500, a5, x50
Mode	Ke	eep Transmitting	ep Transmitting Input Voltage		AC120V	
Temperature	е	24 deg. C,		Humi	dity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm))	Peak Power Limit	Pass/ Fail
		Peak	Averag	e	(dBm)	
Low	2402	2.75	2.75 1.43		30	Pass
Middle	2441	3.05 1.77			30	Pass
High	2480	2.96	1.74		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak and Average power was measured

Type of Modulation: $\pi/4DQPSK$

EUT		Smart Phone			el	S500, a5, x50
Mode	Ke	ep Transmitting		Input Voltage		AC120V
Temperature	e	24 deg. C, Humidi		idity	56% RH	
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) Peak Average			Peak Power Limit (dBm)	Pass/ Fail
Low	2402	2.40 0.31			30	Pass
Middle	2441	2.40 0.28			30	Pass
High	2480	2.15	0.12		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak and Average power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 48 of 99 Report No: FCC1503219-02

Date: 2015-04-20



Type of Modulation: 8DPSK

EUT		Smart Phone			el	S500, a5, x50
Mode	Ke	ep Transmitting		Input Voltage		AC120V
Temperature	e	24 deg. C,		Humidity		56% RH
Channel	Channel Frequency	Max. Power Output (dBm))	Peak Power	Pass/ Fail
Chamier	(MHz)	Peak	Averag	ge	Limit (dBm)	
Low	2402	2.32	0.23		30	Pass
Middle	2441	2.27	0.20		30	Pass
High	2480	2.21	0.17		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak and Average power was measured

Date: 2015-04-20



Page 49 of 99

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2015-04-20




9.4Test Result

Type of Modulation: GFSK

EUT	Smart Phon	Model	S5	500, a5, x50	
Mode	Hopping O	Input Voltage	AC120V		
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.004MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

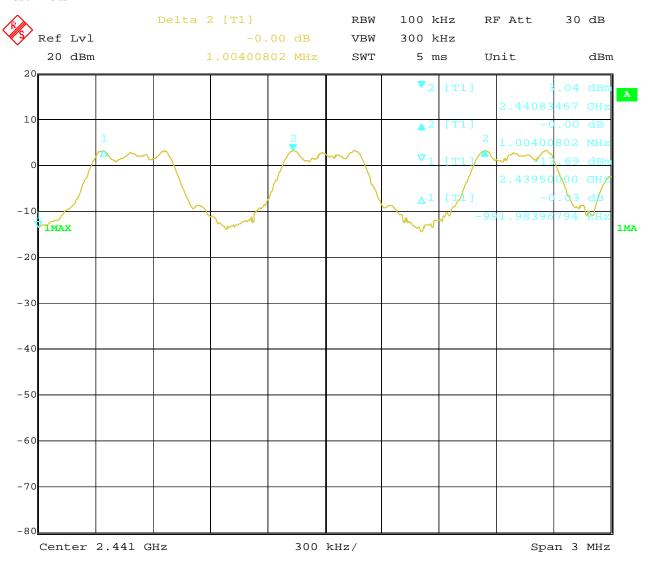

Date: 2.APR.2015 14:08:46

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 51 of 99


Report No: FCC1503219-02

Date: 2015-04-20



EUT	Smart Phon	Model	S	500, a5, x50	
Mode	Hopping O	Input Voltage	AC120V		
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
	0.998MHz	≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass

Test Plots

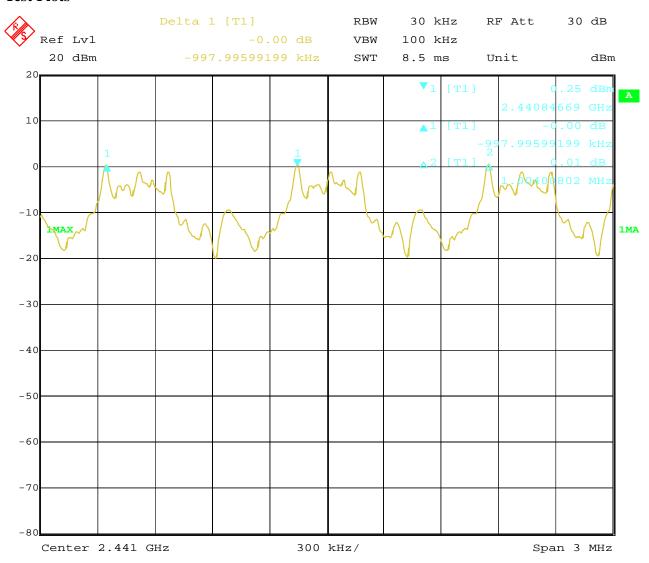

2.APR.2015 14:58:32 Date:

Page 52 of 99

Report No: FCC1503219-02


Date: 2015-04-20



Type of Modulation: 8DPSK

EUT	Smart Phon	Model	S	500, a5, x50	
Mode	Hopping O	Input Voltage	AC120V		
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.004MHz	≥ 25 kHz or 2	2/3 of 20 dB bands	width	Pass

Test Plots

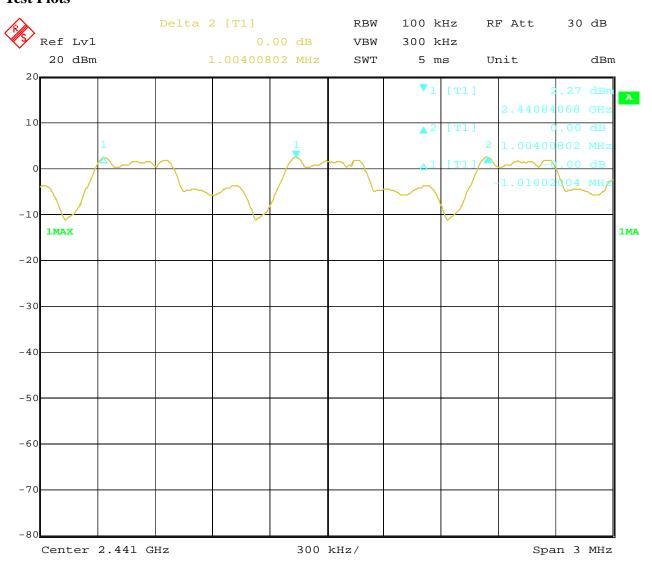

2.APR.2015 15:43:05 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2015-04-20



Page 53 of 99

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Date: 2015-04-20




10.4Test Result

Type of Modulation: GFSK

EUT	Smart Phone		Model	S500, a5, x50		
Mode	Hopping On		Input Voltage	AC120V		
Temperature		24 deg. C,	Humidity	56% RH		
Operating Frequency		Number of hop	ping channels	Limit	Pass/ Fail	
2402-2480MHz		79	ı	≥ 15	Pass	

Test Plot

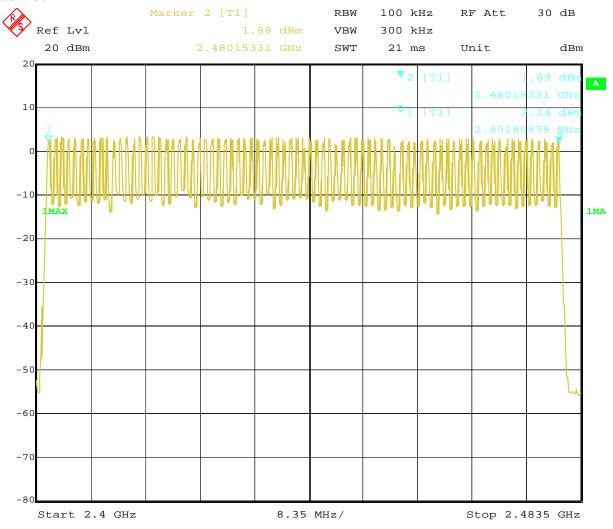

2.APR.2015 13:58:15 Date:


Date: 2015-04-20



Type of Modulation: Л/4DQPSK

EUT	Smart Phone N		Model		S	500, a5, x50	
Mode	Hopping On		Input Voltage			AC120V	
Temperature	24 deg. C,		Humidity		56% RH		
Operating Frequency		Number of hopp channels	oing	Lin	nit	Pass/ Fail	
2402-2480MHz		79		<u>></u>	15	Pass	

Test Plot

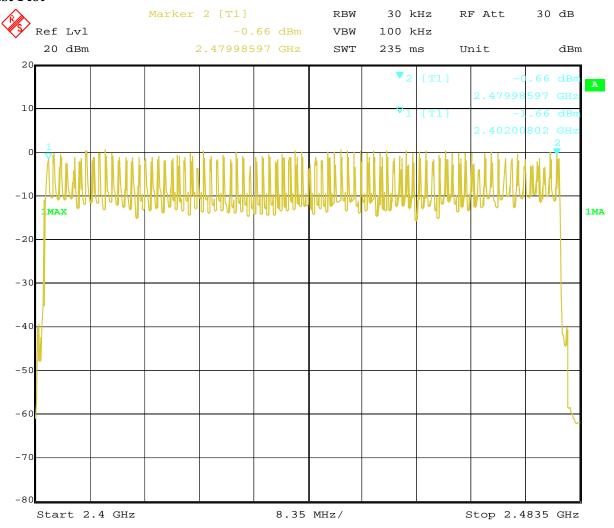

Date: 2.APR.2015 14:53:27

Page 56 of 99 Report No: FCC1503219-02


Date: 2015-04-20



Type of Modulation: 8DPSK

EUT	Smart Phone		Model		S500, a5, x50	
Mode		Hopping On		oltage		AC120V
Temperature		24 deg. C,		ty 56% R		56% RH
Operating Frequen	Operating Frequency		Number of hopping channels		nit	Pass/ Fail
2402-2480MHz		79		<u>></u>	15	Pass

Test Plot

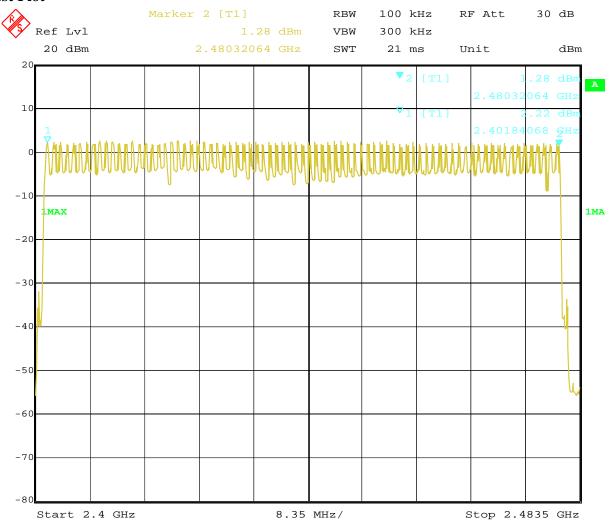

Date: 2.APR.2015 15:39:42

Date: 2015-04-20



Page 57 of 99

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No: FCC1503219-02 Page 58 of 99

Date: 2015-04-20



11.4 Test Result

Type of Modulation: GFSK

EUT	Smar	Smart Phone		S50	00, a5, x50
Mode	Keep Tra	ansmitting	Input Voltage	A	AC120V
Temperatur	re 24 d	leg. C,	Humidity	5	56% RH
Channel	Reading	Hoping	g Rate	Actual	Limit
			DH5		
Middle	0.180ms	266.667	7 hop/s	0.0192s	0.4s
			DH3		
Middle	0.212ms	400 h	400 hop/s		0.4s
DH1					
Middle	0.192ms	800 h	nop/s	0.0614s	0.4s

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 59 of 99

Report No: FCC1503219-02


Date: 2015-04-20



Test Plots:

DH5

Middle Channel:

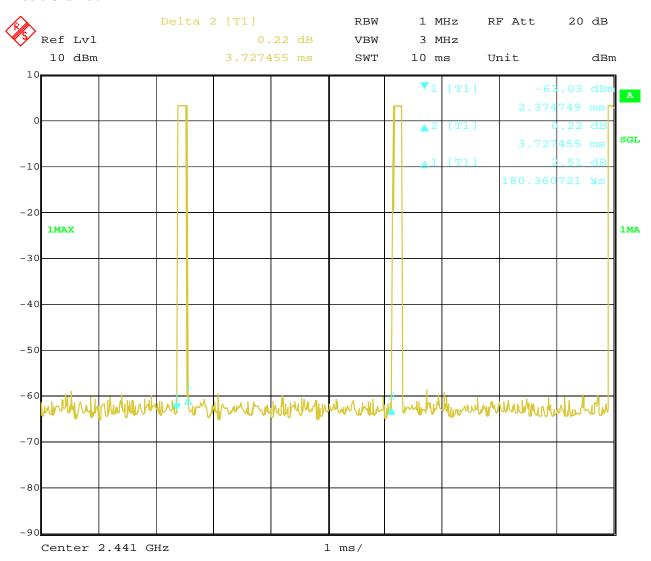


2.APR.2015 Date: 09:20:13

Page 60 of 99 Report No: FCC1503219-02

Date: 2015-04-20



DH3

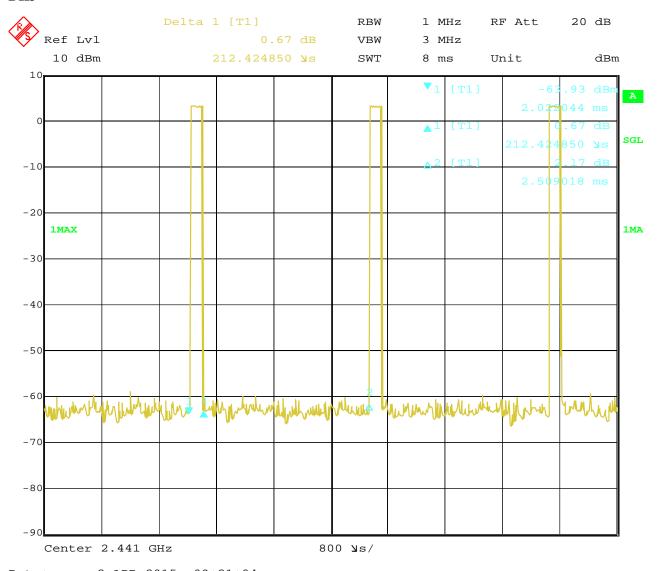


2.APR.2015 09:21:04 Date:

Page 61 of 99

Report No: FCC1503219-02 Date: 2015-04-20



DH1

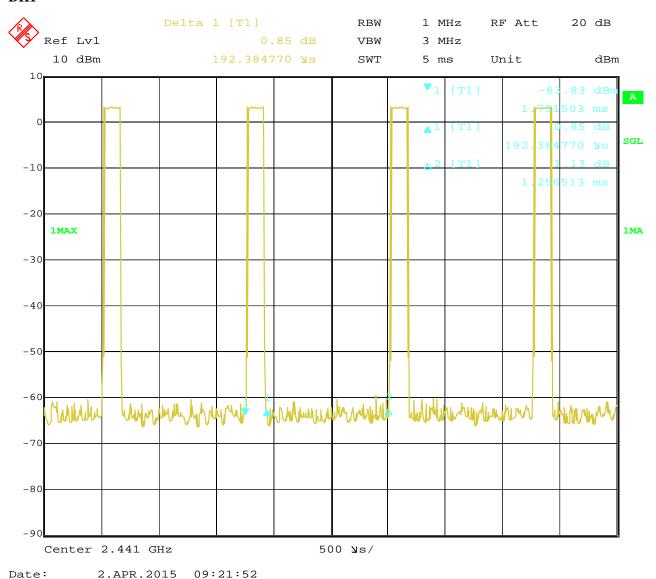

Page 62 of 99

Report No: FCC1503219-02

Date: 2015-04-20



Test Result

Type of Modulation: Л/4DQPSK

EUT	Smar	Smart Phone		S500, a5, x50		
Mode	Mode Keep Transmitting		Input Voltage	AC120V		
Temperature	e 24 deg. C,		Humidity	56% RH		
Channel	Reading	Hoping Rate		Actual	Limit	
DH5						
Middle	0.210ms	266.66	7 hop/s	0.0224s	0.4s	
DH3						
Middle	0.230ms	400 hop/s		0.0368s	0.4s	
DH1						
Middle	0.190ms	800 hop/s		0.0608s	0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 63 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Plots:

2DH5

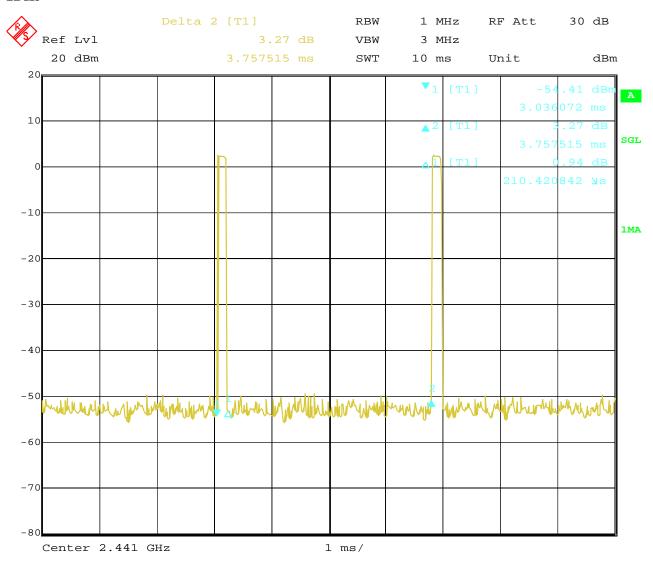


2.APR.2015 14:30:41 Date:

Page 64 of 99 Report No: FCC1503219-02

Date: 2015-04-20



2DH3

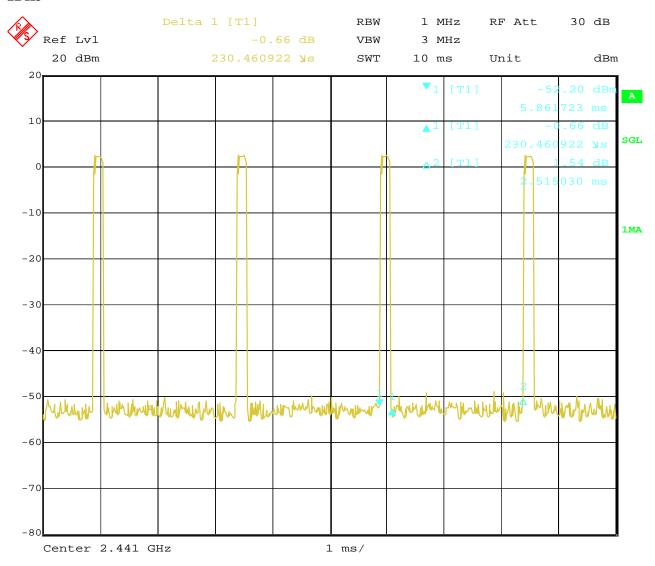

2.APR.2015 Date: 14:31:43


Page 65 of 99

Report No: FCC1503219-02

Date: 2015-04-20



2DH1

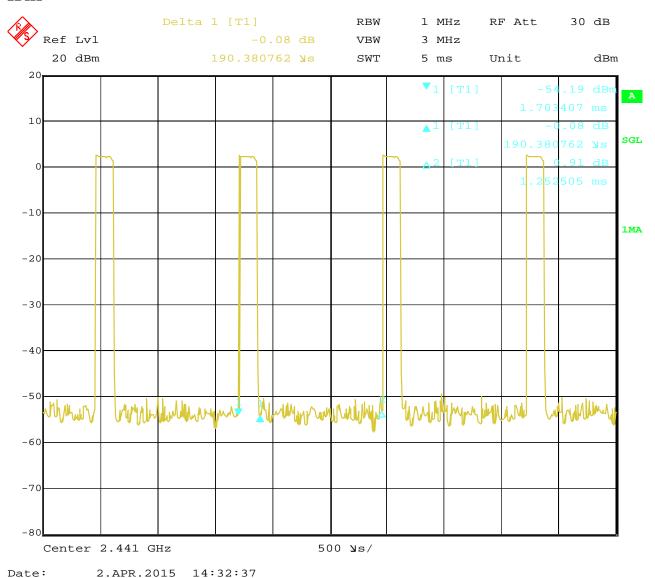

14:32:37

Date:

Page 66 of 99

Report No: FCC1503219-02

Date: 2015-04-20



Type of Modulation: 8DPSK

EUT	Smar	Smart Phone		S500, a5, x50		
Mode	Keep Tr	Keep Transmitting		AC120V		
Temperatur	e 24 d	24 deg. C,		56% RH		
Channel	Reading	Hoping	g Rate	Actual	Limit	
DH5						
Middle	0.210ms	0.210ms 266.667		0.0224s	0.4s	
DH3						
Middle	0.190ms	400 h	nop/s	0.0304s	0.4s	
DH1						
Middle	0.190ms	800 hop/s		0.0608s	0.4s	

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of $625\mu s$ with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 67 of 99


Report No: FCC1503219-02

Date: 2015-04-20



Test Plots:

3DH5

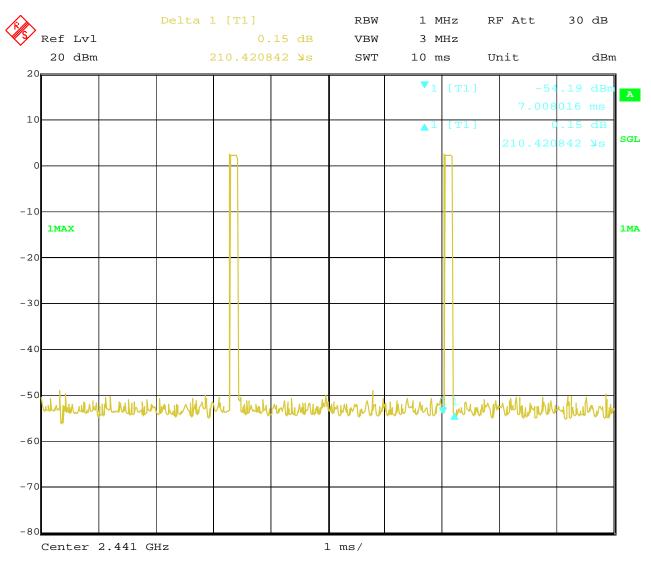

2.APR.2015 15:28:14 Date:


Page 68 of 99

Report No: FCC1503219-02

Date: 2015-04-20



3DH3

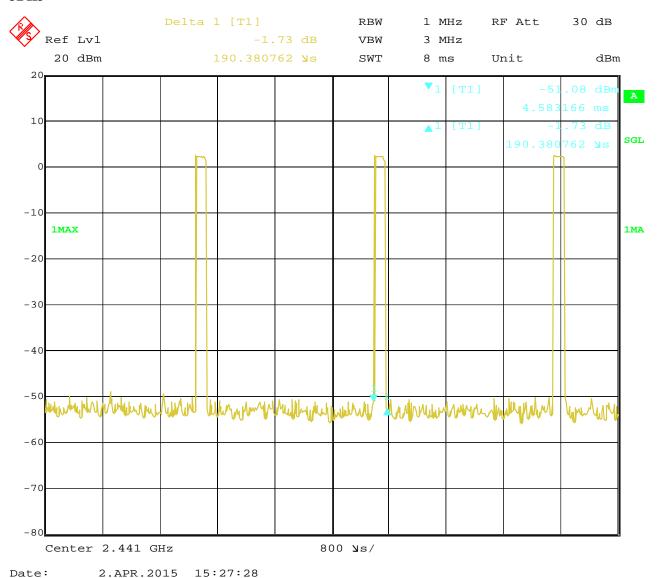

Date:


Page 69 of 99

Report No: FCC1503219-02

Date: 2015-04-20



3DH1

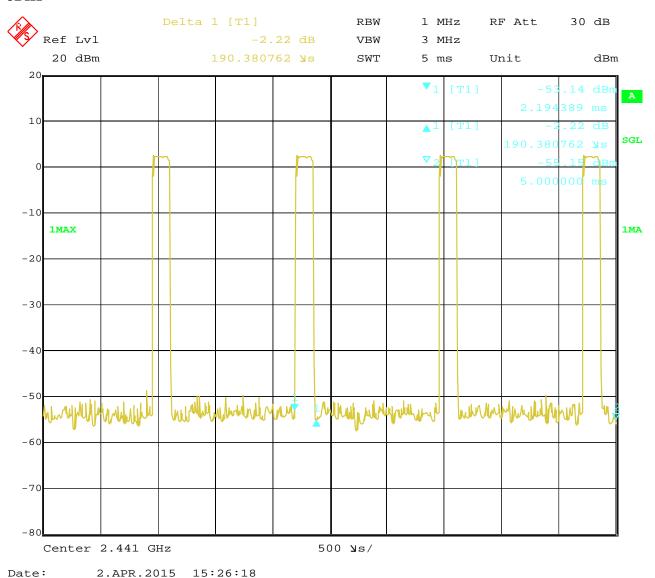

15:26:18

Date:


Report No: FCC1503219-02 Page 70 of 99

Date: 2015-04-20



12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Date: 2015-04-20




Type of Modulation: GFSK

Out of Band Test Result

Product:	Smart Phone		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	34.6		$74(dB\mu V/m)$
Restrict Band	$AV(dB\mu V/m)$		Limit	54(dBμV/m)
2390MHz				

Test Figure:

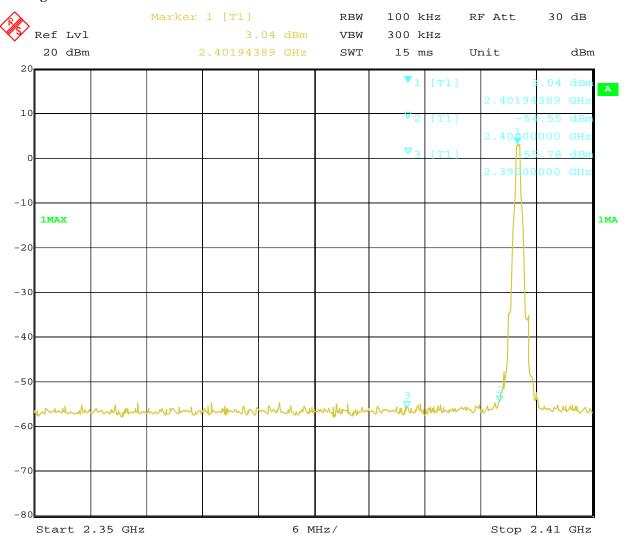

Date: 2.APR.2015 14:10:14

Date: 2015-04-20




Type of Modulation: GFSK

Out of Band Test Result 12.4

Product:	Smart Phone		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	37.8		74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

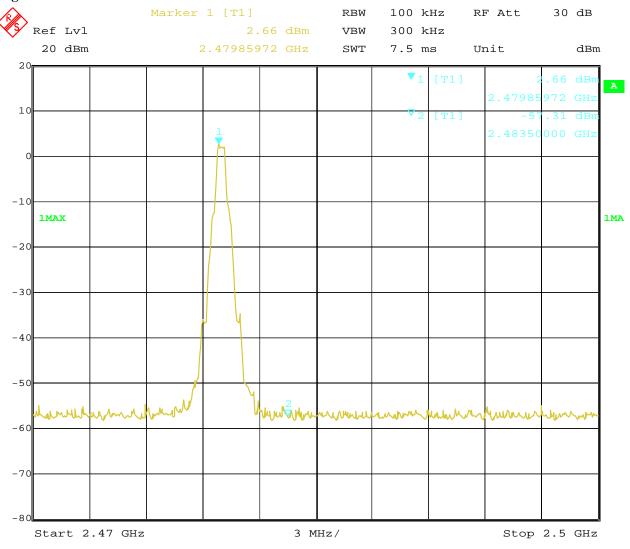

Date: 2.APR.2015 14:24:22

Date: 2015-04-20




Type of Modulation: GFSK

Out of Band Test Result

Product:		Smart Phone	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	35.2		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

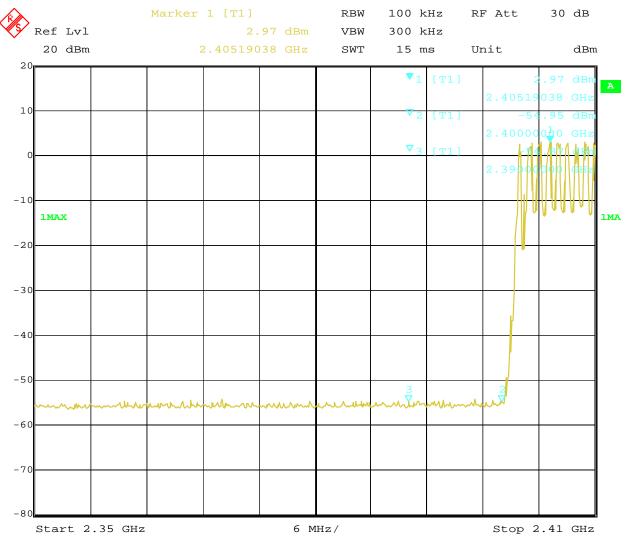

Date: 2.APR.2015 14:16:12

Date: 2015-04-20




Type of Modulation: GFSK

Out of Band Test Result

Product:		Smart Phone	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	AC120V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:		Pass	Detector	PK
The Max. FS in	PK (dBμV/m)	37.9		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

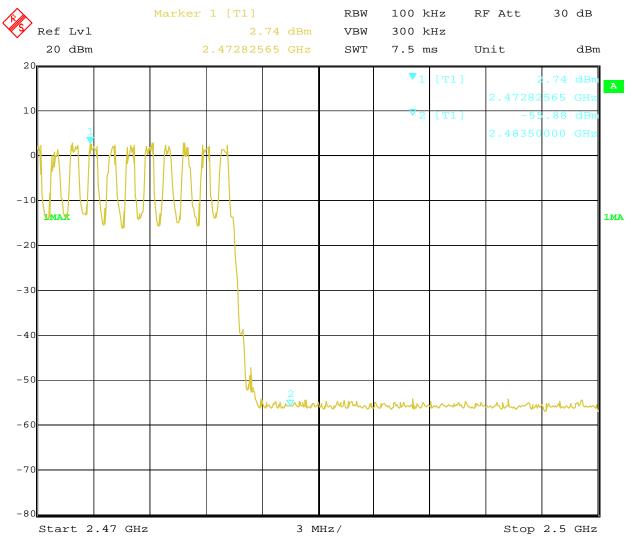

Date: 2.APR.2015 14:23:45

Date: 2015-04-20




Type of Modulation: Л/4DQPSK

Out of Band Test Result 12.4

Product:		Smart Phone	Test Mode:	Low Channel
Mode	Kee	ping Transmitting	Input Voltage	AC120V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	36.7		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2390MHz				

Test Figure:

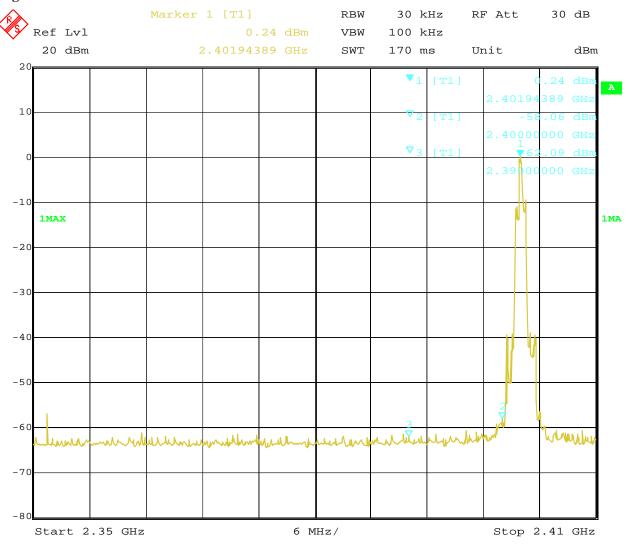

2.APR.2015 14:59:31 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-04-20




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:		Smart Phone	Test Mode:	High Channel
Mode	Keej	ping Transmitting	Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 38.1			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2483.5MHz				

Test Figure:

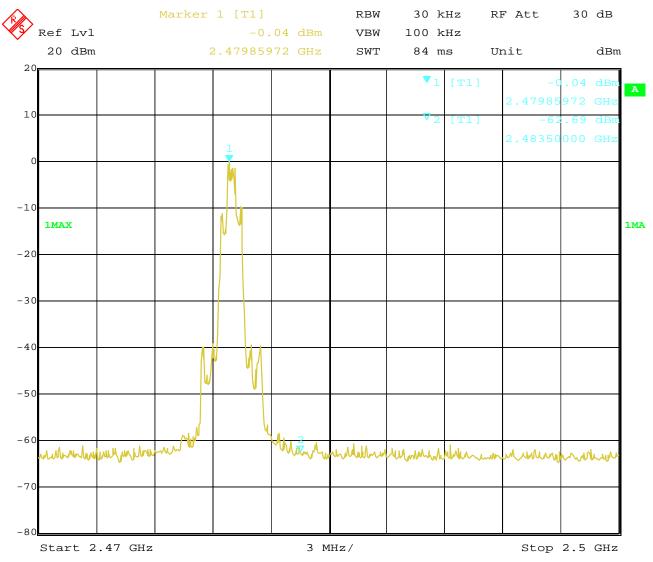

2.APR.2015 15:06:29 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-04-20




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:		Smart Phone	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	AC120V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	34.9		$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

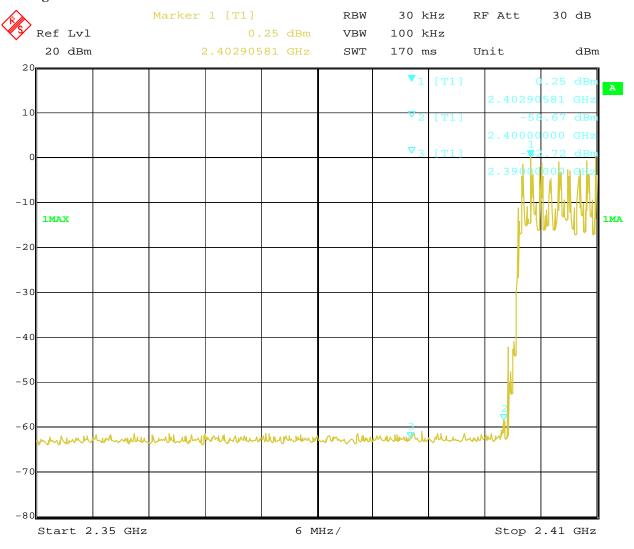

Date: 2.APR.2015 15:01:45

Date: 2015-04-20




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:		Smart Phone	Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.5			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

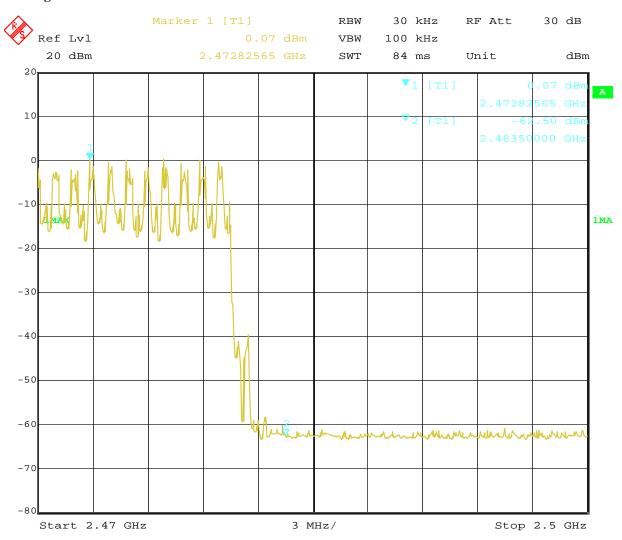

Date: 2.APR.2015 15:05:38

Date: 2015-04-20




Type of Modulation: 8DPSK

Out of Band Test Result 12.4

Product:	Smart Phone		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 35.5			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

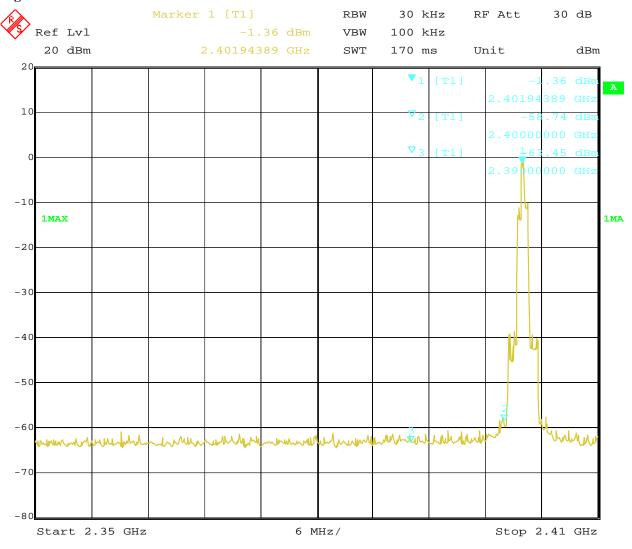

2.APR.2015 15:17:30 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-04-20




Type of Modulation: 8DPSK

Out of Band Test Result 12.4

Product:	Smart Phone		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.1			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

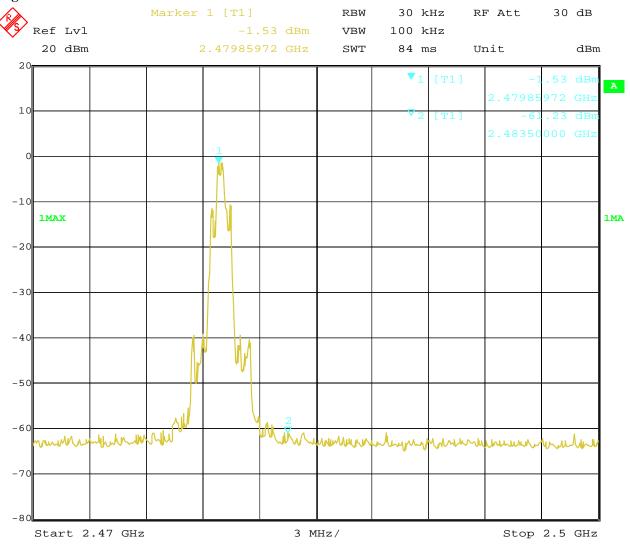

Date: 2.APR.2015 15:07:44

Date: 2015-04-20




Type of Modulation: 8DPSK

Out of Band Test Result

Product:		Smart Phone	Test Mode:	Hopping mode
Mode		Hopping On	Input Voltage	AC120V
Temperature		24 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 35.7			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	54(dBμV/m)
2390MHz				

Test Figure:

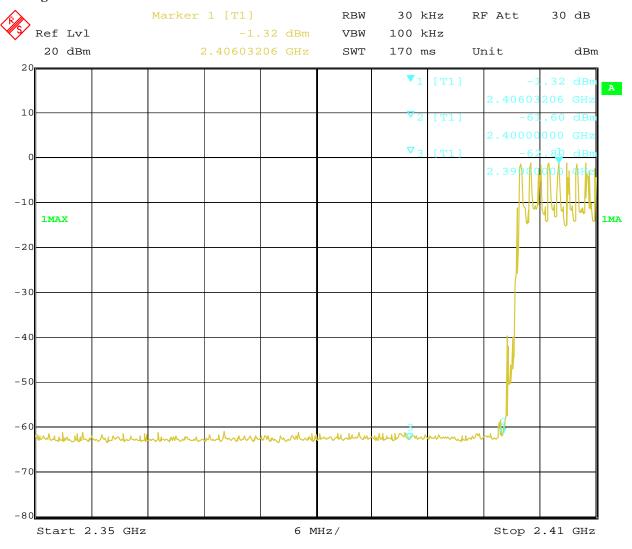

Date: 2.APR.2015 15:16:37

Date: 2015-04-20




Type of Modulation: 8DPSK

Out of Band Test Result

Product:	Smart Phone		Test Mode:	Hopping mode
Mode	Hopping On		Input Voltage	AC120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m) 37.8			$74(dB\mu V/m)$
Restrict Band	AV(dBμV/m)		Limit	$54(dB\mu V/m)$
2483.5MHz				

Test Figure:

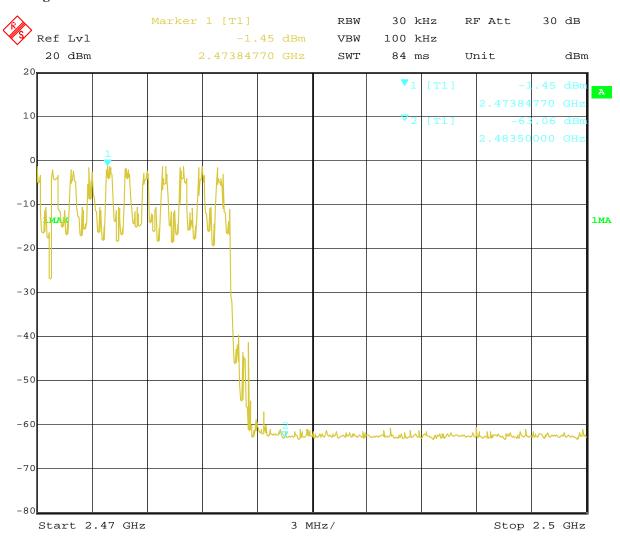

Date: 2.APR.2015 15:12:29

Date: 2015-04-20



Page 83 of 99

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Integral antenna used. The maximum Gain of the antennas is 0dBi.

Report No: FCC1503219-02 Page 84 of 99

Date: 2015-04-20




14.0 FCC ID/IC Label

FCC ID: RBD-S500 IC:20054-S500

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

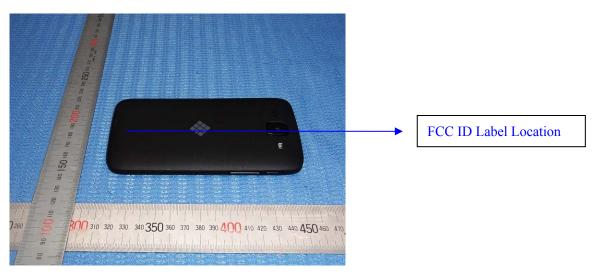


Report No: FCC1503219-02 Page 85 of 99

Date: 2015-04-20



15.0 Photo of testing

Conducted Emission Test Setup:

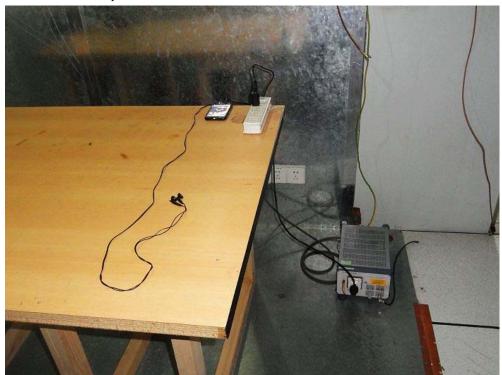


Date: 2015-04-20



Radiated Emission Test Setup:



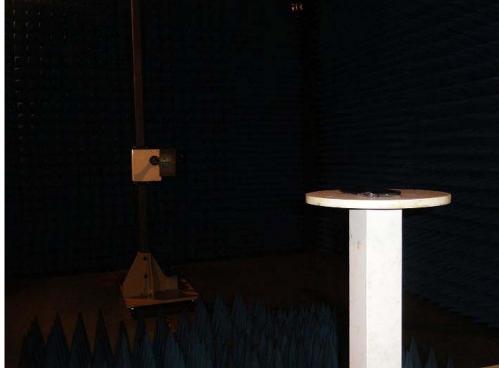

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-04-20



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-04-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-04-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-04-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-04-20



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the property.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 92 of 99 Report No: FCC1503219-02

Date: 2015-04-20



Outside view




Date: 2015-04-20



Inside view



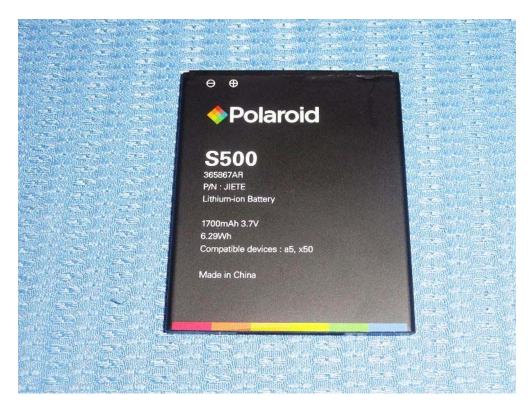

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-04-20



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-04-20



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-04-20



Inside view



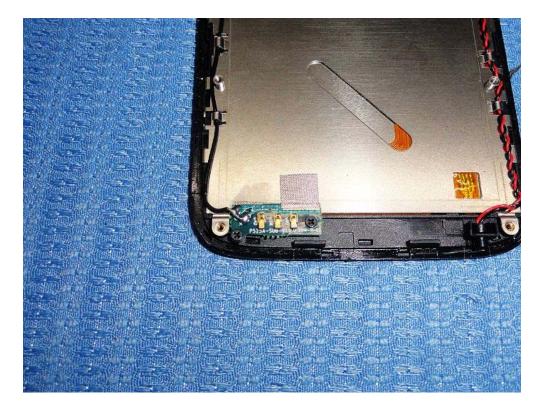

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2015-04-20



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2015-04-20



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1503219-02 Page 99 of 99

Date: 2015-04-20



Inside view



End of the report