


Regulatory WLAN Antenna Information

Platform information										
Brand		ODM		RMN		Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)
HP Inc.		Quanta Corporation		TPN-217		Yes		Notebook PC		186.08
Antenna information										
Vendor			Type			Antenna Part number (Main/Tx1)		Antenna Part number (Aux/Tx2)		
1			PIFA			DQ60ACQD021 (0ACQD018012N)		DQ60ACQD021 (0ACQD018012N)		
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	1.03	-1.48	-1.57	-0.93	-1.14	-1.88	N/A	N/A	N/A	N/A
Aux	1.35	-1.84	-1.84	-1.68	-1.54	-1.24	N/A	N/A	N/A	N/A
Module Information										
Model			Form factor and suffixes							
RTL8852BE (Cava2)			Realtek Wi-Fi 6 RTL8852BE+ BT5.2 (802.11ax 2x2, MU-MIMO supported, supporting gigabit data rate)							

1. **Applicable test methods**

The radiation pattern of antenna is measured in both horizontal polarization and vertical polarization. The radiation pattern measurements are performed in the three-dimensional anechoic chamber. The chamber provides less than -30dB reflectivity from 800MHz through 8GHz . The chamber is calibrated using both standard dipole antenna and horn antenna. The Gain here is expressed as dBi that standardizes the isotropic antenna. The Gain measurements and antenna radiation pattern are also performed in the same chamber described previously. Figure 2 shows the schematic diagram for measuring radiation pattern and Gain.

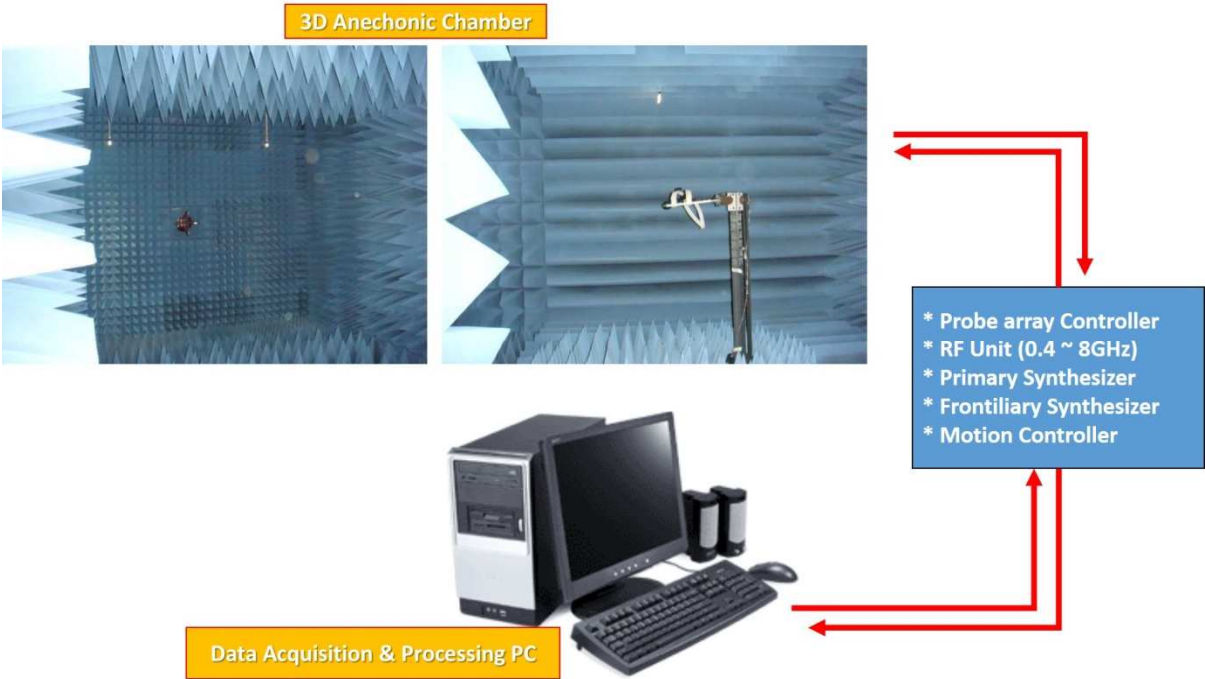

2. Test & System Description

a. Test setup

1. Frequency Range

2400~2500MHz, for WLAN application.

5150~5895MHz, for WLAN application

2. Antenna Configuration

The antenna basically has two parts; the stamping and the cable assembly with the connector on one side. The detailed drawing is attached.

3. VSWR

The VSWR is measured with network analyzer that support up to 8GHz. All the measurements are performed with the customer provided fixture. Figure 1 shows the typical schematic diagram for measuring VSWR.

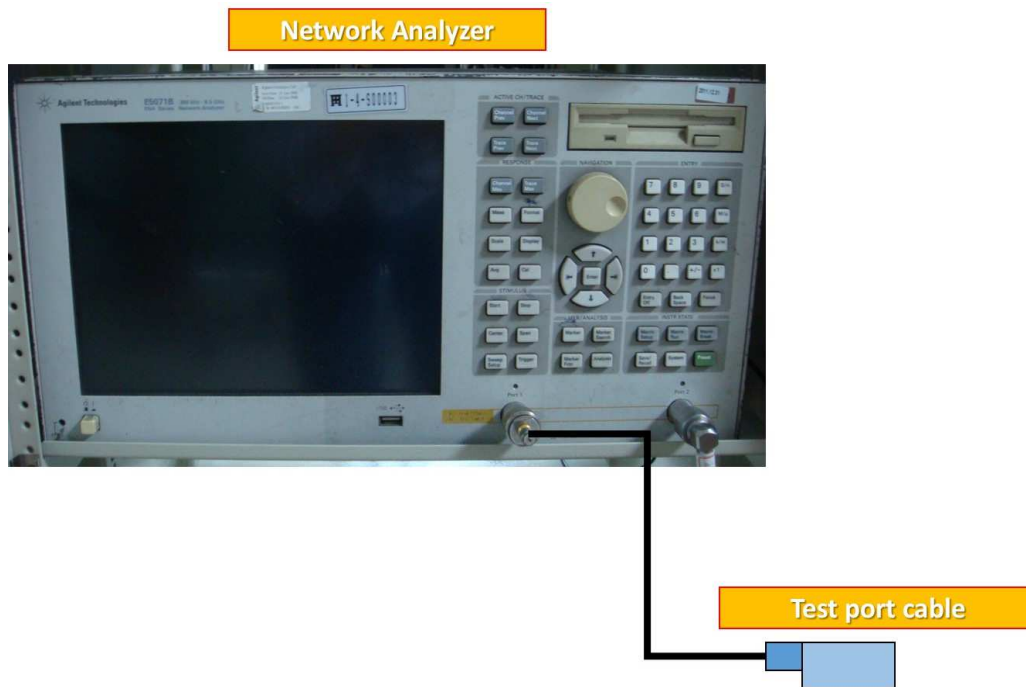


Figure 1. The schematic diagram for measuring VSWR

b. Equipment list

Test Equipment

The equipment for the antenna measurement we used is as follows:

- A. Network Analyzer, support up to 8GHz, to measure the VSWR and input impedance of antenna.
- B. Three-dimensional anechoic chamber to measure antenna gain and radiation pattern(Standard horn antenna was used to calibrate the chamber)
- C. Digital caliper to measure the dimensions.
- D. Climatic chamber for mechanical tests.
- E.

Radiated Setup

Item	Device	Type/Model	manufacturer	Cal. Date	Cal. Due Date
1	Anechoic Chamber	AMS-8500	ETS-Lindgren	2021/12/20	2022/12/20
2	Turn Table	ETS	ETS-Lindgren	N/A	N/A
3	Measurement SW	EMQuest1.08	ETS-Lindgren	N/A	N/A
4	Vector Network Analyzer	Agilent E5071B	Agilent	2021/12/17	2022/12/17
5	Receive Antenna Absorber Nested Dual- Polarized Dual-Vivaldi Array Antenna 700MHz to 6GHz	EMCO 3164-08	ETS-Lindgren	N/A	N/A
6	Multi Axis Positioning System (MAPS™)	EMCO 2115CR	ETS-Lindgren	N/A	N/A
7	MAPS™ Controller	MECO 2090	ETS-Lindgren	N/A	N/A
8	Horn antenna	3164-08	ETS-Lindgren	2021/12/15	2022/12/15
9	Cable 0.5m - 700MHz~10GHz	RG316	Senyu	2021/12/21	2022/12/21

N/A: Not Applicable

Note: Chamber calibration included full set of implement.

Test personnel: Mars Sung

Test date: 2022/10/11

Antenna Information

Section 1. Antenna Assembly Specifications


1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
P/N: DQ60ACQD021 (0ACQD018012N) Main Tx1/ Rx1 Antenna Ant 1	1	PIFA	50 ohm Coaxial Length: 295 mm Diameter:1.13 mm Connector Type: IPEX MHF-4L P/N: 958-C413-W-B-Bu-A0	2400-2495	1.03	2.14	3.00	1.11
				5150-5250	-1.48	0.13	3.00	1.61
				5250-5350	-1.57	0.05	3.00	1.62
				5470-5725	-0.93	0.74	3.00	1.67
				5725-5850	-1.14	0.58	3.00	1.72
				5850-5895	-1.88	-0.15	3.00	1.73
				5925-6425	N/A	N/A	N/A	N/A
				6425-6525	N/A	N/A	N/A	N/A
				6525-6875	N/A	N/A	N/A	N/A
P/N: DQ60ACQD021 (0ACQD018012N) Aux Tx2/ Rx2 Antenna Ant 2	1	PIFA	50 ohm Coaxial Length: 495 mm Diameter:1.13 mm Connector Type: IPEX MHF-4L P/N: 958-C413-W-B-Bu-A0	2400-2495	1.35	3.21	3.00	1.86
				5150-5250	-1.84	0.86	3.00	2.70
				5250-5350	-1.84	0.87	3.00	2.71
				5470-5725	-1.68	1.11	3.00	2.79
				5725-5850	-1.54	1.31	3.00	2.85
				5850-5895	-1.24	1.61	3.00	2.85
				5925-6425	N/A	N/A	N/A	N/A
				6425-6525	N/A	N/A	N/A	N/A
				6525-6875	N/A	N/A	N/A	N/A
				6875-7125	N/A	N/A	N/A	N/A

Section 2. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 2D Radiation Pattern 2400 – 2495 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2495	1.03

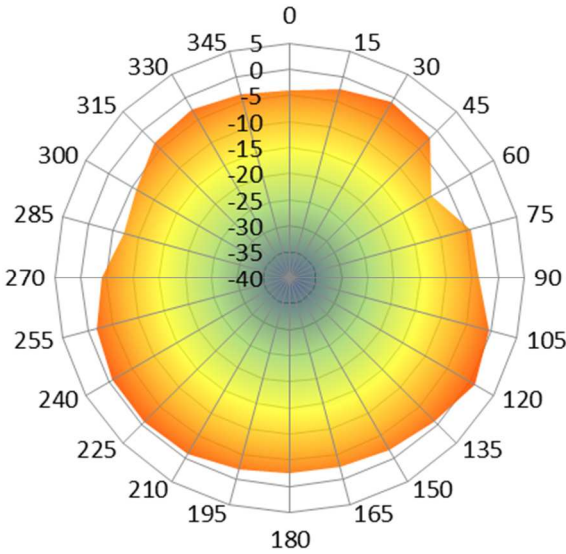


Max Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	-1.48

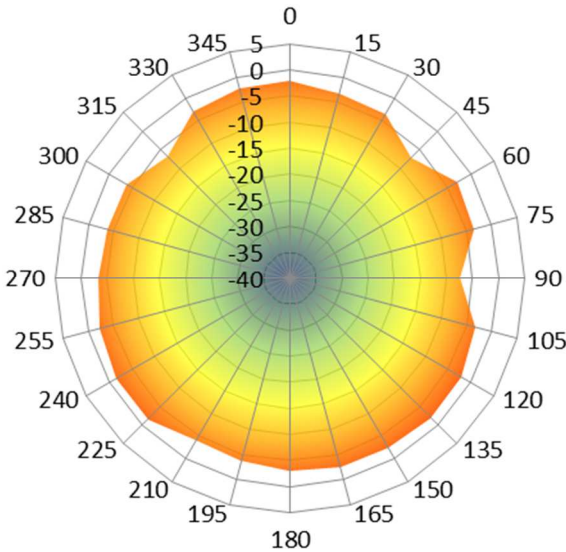


Max Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	-1.57

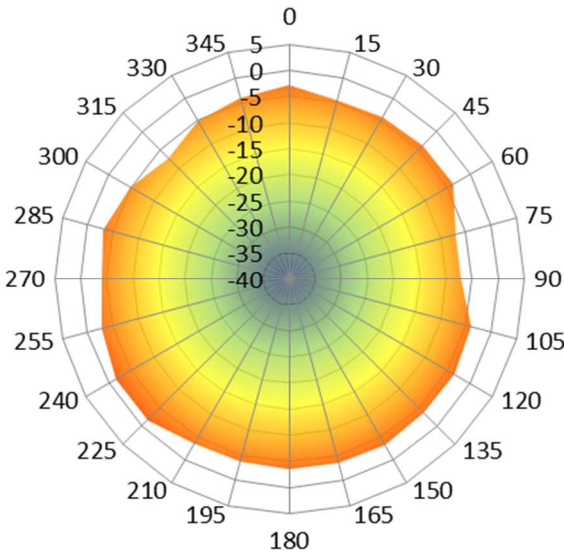


Max Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	-0.93

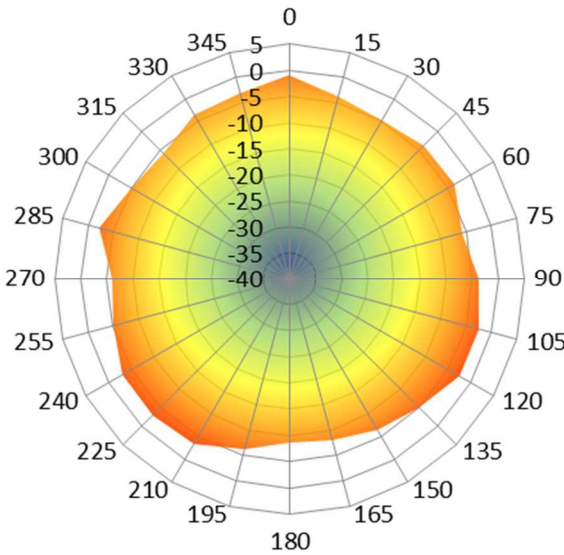


Max Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	-1.14

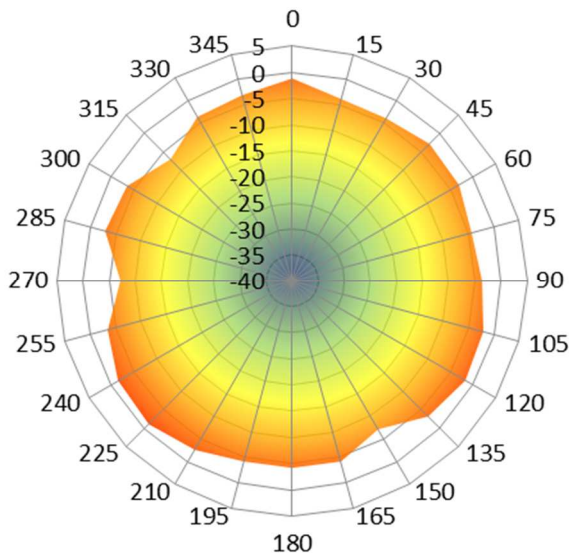

Max Antenna 2D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	-1.88

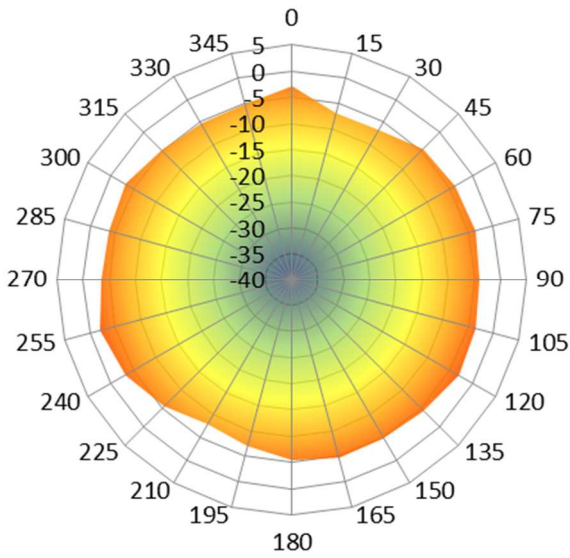

Auxiliary Antenna


Aux Antenna 2D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
2400-2483.5	1.35

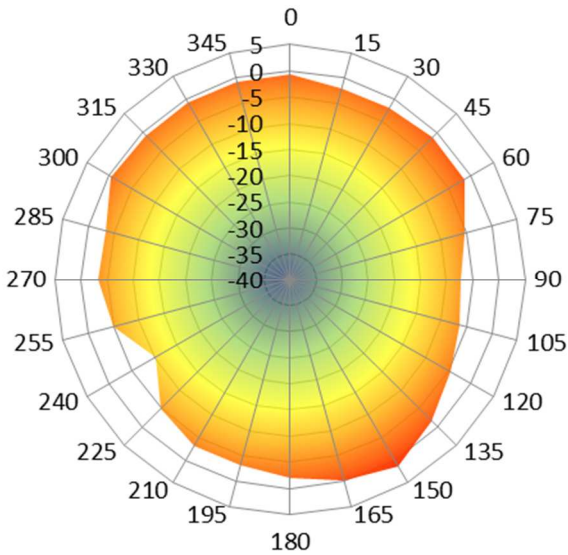


Aux Antenna 2D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5150-5250	-1.84

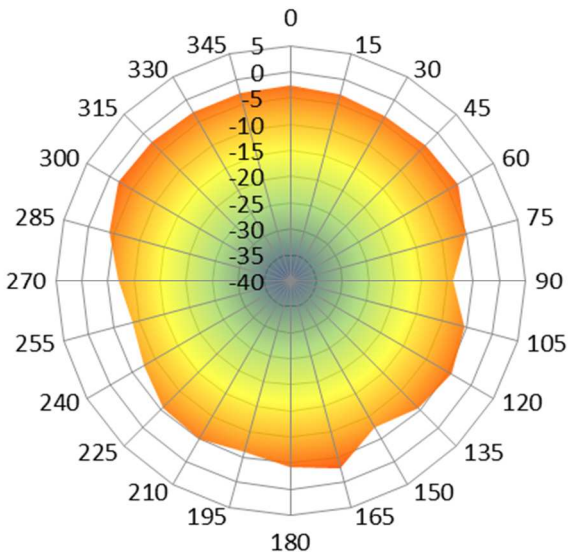


Aux Antenna 2D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5250-5350	-1.84

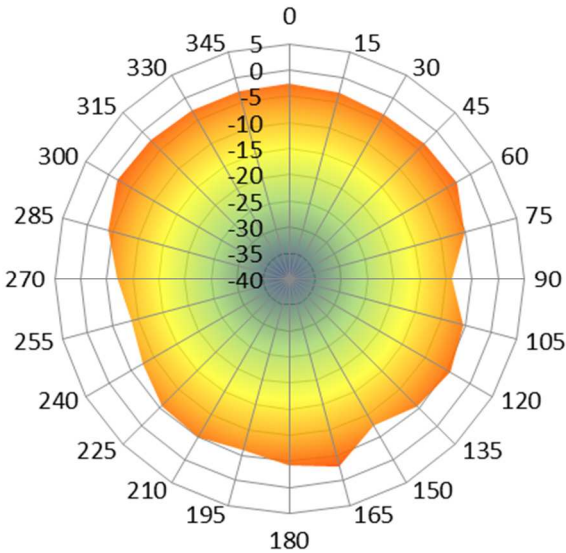


Aux Antenna 2D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5470-5725	-1.68

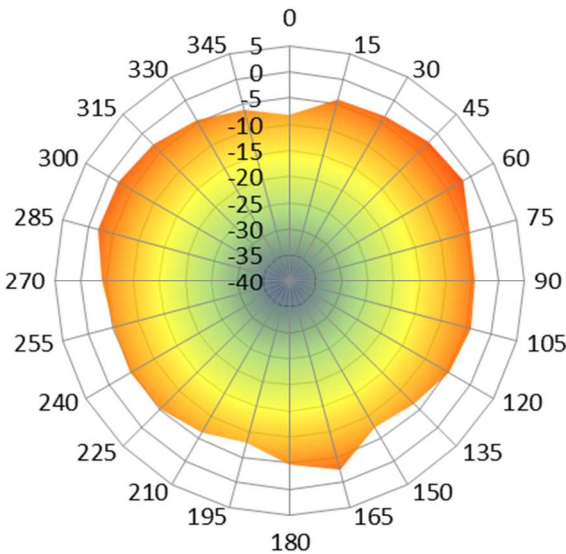

Aux Antenna 2D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5725-5850	-1.54

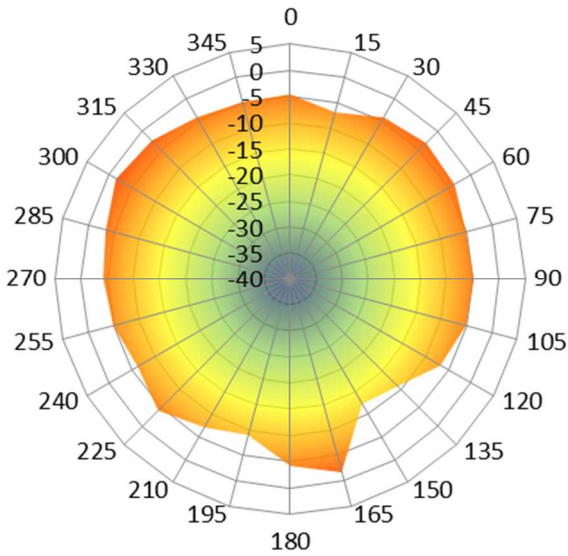

Aux Antenna 2D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Horizontal+ Vertical (dBi) peak (dBi)
5850-5895	-1.24

