



System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/24/2006 2:36:37 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Xplore iX104 Mesh	Relative Permittivity:	50.96
Relative Humidity:	30%	Conductivity:	1.861
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-170.00 mm
Antenna Configuration:	Mesh	Max E Field:	11.07 V/m
Test Frequency:	2410MHz	SAR 1g:	0.184 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.105 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.049 W/kg
Type of Modulation:		SAR End:	0.049 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

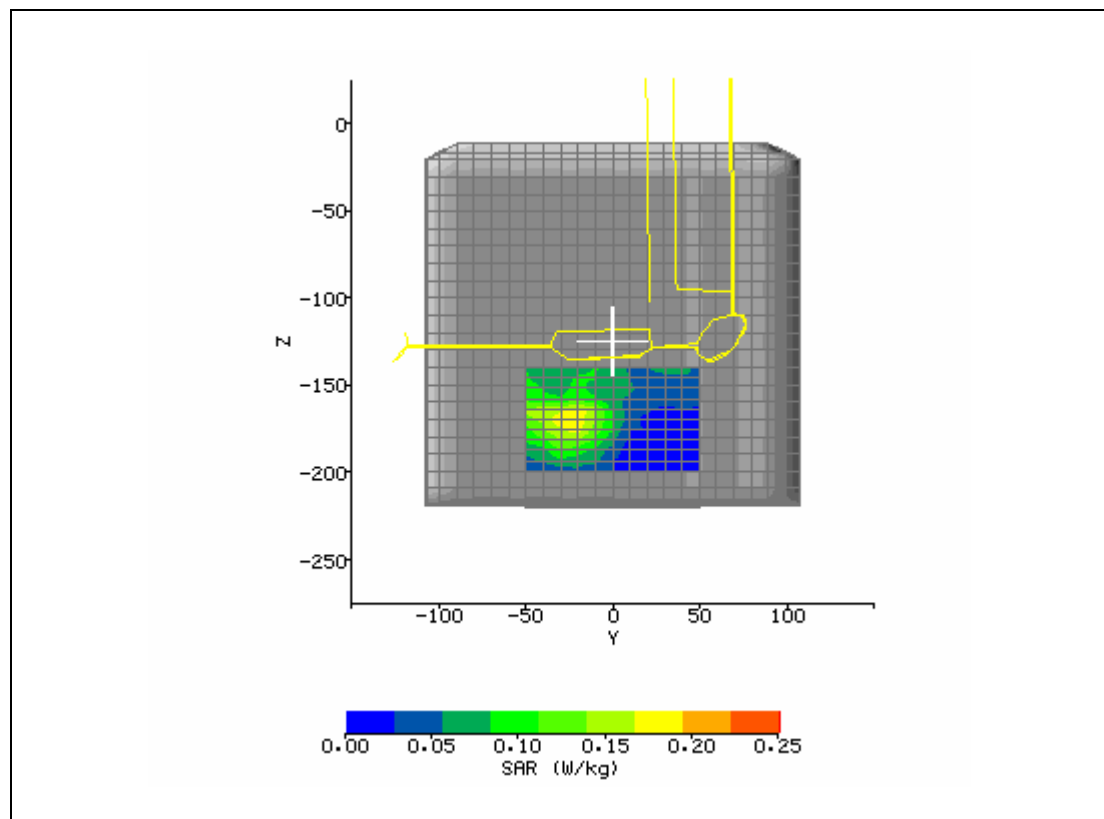

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/24/2006 4:07:44 PM	DUT Battery Model/No:	
Filename:	2470lap_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Xplore iX104 Mesh	Relative Permittivity:	50.70
Relative Humidity:	30%	Conductivity:	1.921
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-15.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-169.40 mm
Antenna Configuration:	Mesh	Max E Field:	11.00 V/m
Test Frequency:	2450MHz	SAR 1g:	0.188 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.110 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.055 W/kg
Type of Modulation:		SAR End:	0.057 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

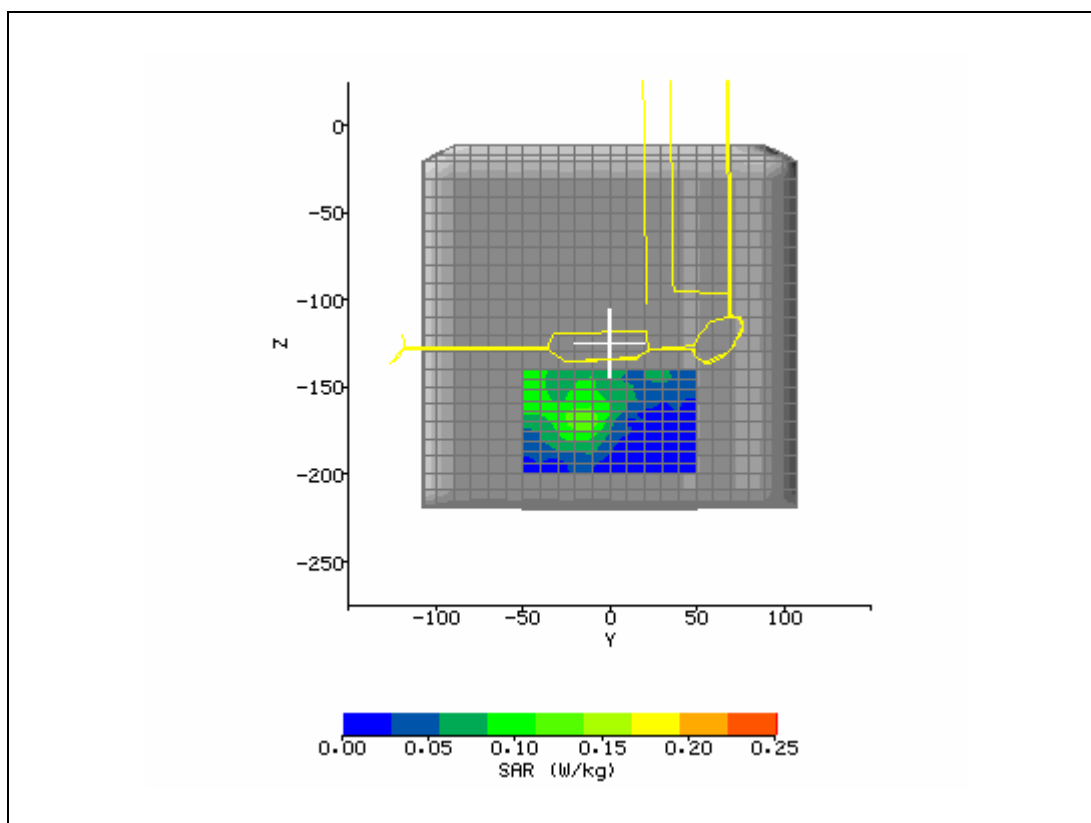

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	3/24/2006 3:42:45 PM	DUT Battery Model/No:	
Filename:	2450lap_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	2470
Device Under Test:	Xplore iX104 Mesh	Relative Permittivity:	50.91
Relative Humidity:	30%	Conductivity:	1.937
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-24.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-168.80 mm
Antenna Configuration:	Mesh	Max E Field:	12.10 V/m
Test Frequency:	2450MHz	SAR 1g:	0.216 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.106 W/kg
Conversion Factors:	.490 / .490 / .490	SAR Start:	0.052 W/kg
Type of Modulation:		SAR End:	0.053 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.92 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	3/20/2006
Input Power Level:	max	Extrapolation:	poly4

