

RF TEST REPORT

Report No.: SET2022-04869

Product Name: 5G NR Multi model smart phone

Model No.: ZTE 7540N

FCC ID: SRQ-ZTE7540N

Applicant: ZTE CORPORATION.

Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China.

Dates of Testing: 2022.04.08-2022.04.27

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 42 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Test Report

Product Name.....: 5G NR Multi model smart phone

Brand Name.....: ZTE

Trade Name.....: ZTE

Applicant.....: ZTE CORPORATION.


Applicant Address.....: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China.

Manufacturer.....: ZTE CORPORATION.

Manufacturer Address.....: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China.

Test Standards.....: 47 CFR Part 15 Subpart C
ANSI C63.10-2013

Test Result.....: PASS

Tested by:  2022.04.29
Sun, Test Engineer

Reviewed by:  2022.04.29
Chris You, Senior Engineer

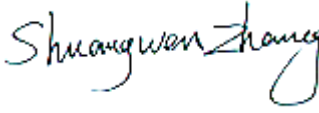
Approved by:  2022.04.29
ShuangwenZhang, Manager

TABLE OF CONTENTS

RF TEST REPORT	1
1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Test Standards and Results	6
1.3. Table for Supporting Units	7
1.4. EUT Operation Test Setup	7
1.5. Facilities and Accreditations	7
2. TEST REQUIREMENTS	8
2.1. Antenna requirement	8
2.2. Maximum Conducted Output Power	9
2.3. 6dB Bandwidth	11
2.4. Power spectral density (PSD)	13
2.5. Conducted Band Edges and Spurious Emissions	15
2.6. Radiated Band Edge and Spurious Emission	17
2.7. AC Power Line Conducted Emission	25
3. LIST OF MEASURING EQUIPMENT	29
4. UNCERTAINTY OF EVALUATION	30
APPENDIX A	31

Change History		
Issue	Date	Reason for change
1.0	2022.04.29	First edition

1. General Information

1.1. EUT Description

EUT Type	5G NR Multi model smart phone
Hardware Version	zs9A
Software Version	MyOS11.0.1_7540N_VFPT
Bit Rate of Transmitter	1Mbps & 2Mbps
Modulation Type	GFSK
Antenna Type	Internal Antenna
Antenna Gain	-2.5dBi
Power supply	Rechargeable Li-Polymer Battery DC3.85V/3900mAh

Note 1: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

1.2. Test Standards and Results

The objective of the report is to perform testing according to below standards for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C	Radio Frequency Devices
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203 15.247(c)	Antenna Requirement	PASS
2	15.247(b)(3)	Peak Conducted Output Power	PASS
3	15.247(a)(2)	6dB Bandwidth	PASS
4	15.247(d)	Conducted Band Edges and Spurious Emission	PASS
5	15.247(e)	Power spectral density (PSD)	PASS
6	15.207	AC Power Line Conducted Emission	PASS
7	15.209 15.205 15.247(d)	Radiated Band Edges and Spurious Emission	PASS

Note 1: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10-2013.

Note 2: These RF tests were performed according to the method of measurements prescribed in KDB 558074 D01 15.247 Meas Guidance v05r02.

40 channels are provided for Bluetooth LE

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Note: Channel 0, 19 & 20 selected for GFSK.

Test Items	Modulation Type	Data Rate	Channel
Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Conducted and Spurious Emission Radiated and Spurious Emission	GFSK	1Mbps & 2Mbps	0/19/39
Band Edge	GFSK	1Mbps & 2Mbps	0/39

1.3. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
N/A						

1.4. EUT Operation Test Setup

For RF test items, an engineering test program was provided and enable to make EUT transmitting.

1.5. Facilities and Accreditations

1.5.1. Facilities

CNAS-Lab Code: L1659

CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

FCC-Registration No.: 406086

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CAB identifier: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Jun. 30th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.5.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C - 35°C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. Test Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna Category: Internal Antenna

A internal Antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

Antenna General Information:

No.	EUT	Operating frequency range	Ant. Type	Ant. Gain
1	5G NR Multi model smart phone	2402-2480MHz	Internal	-2.5dBi

2.1.3. Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Maximum Conducted Output Power


2.2.1. Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

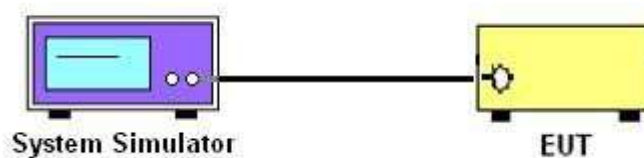

2.2.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.9.1.1.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
 $RBW \geq DTS \text{ bandwidth}$ / $VBW \geq 3 * RBW$ / Sweep time: Auto couple / Detector mode: Peak /
 Trace mode: Max hold / Allow trace to fully stabilize / Use peak marker function to determine the peak amplitude level.
5. Record the measurement results in the test report.

2.2.5. Test Result of Peak Output Power

Please refer to Appendix A for detail.

2.3. 6dB Bandwidth


2.3.1. Limit of 6dB Bandwidth

The minimum 6 dB Occupied bandwidth shall be at least 500 kHz.

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

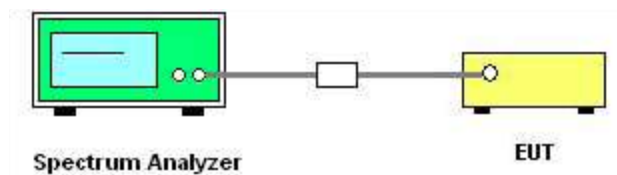

2.3.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Using the X dB bandwidth mode of the instrument's automatic bandwidth measurement function, X is set to 6 dB. the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.
5. Use the following spectrum analyzer settings:
RBW: 100kHz / VBW: 300kHz / Detector: Peak / Trace mode: Max hold / Sweep time: Auto couple / Allow trace to fully stabilize.
6. Record the measurement results in the test report.

2.3.5. Test Results of 6dB Bandwidth

Please refer to Appendix A for detail.

2.4. Power spectral density (PSD)


2.4.1. Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Setup

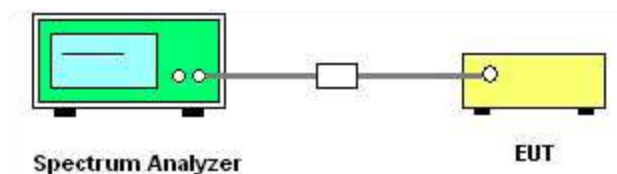

2.4.4. Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.10.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:
Set instrument center frequency to DTS channel center frequency / Set the span to 1.5 times the DTS bandwidth / RBW:3kHz / VBW:10kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum power level.
5. Record the measurement results in the test report.

2.4.5. Test Results of Power spectral density

Please refer to Appendix A for detail.

2.5. Conducted Band Edges and Spurious Emissions


2.5.1. Limit of Conducted Band Edges and Spurious Emissions

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

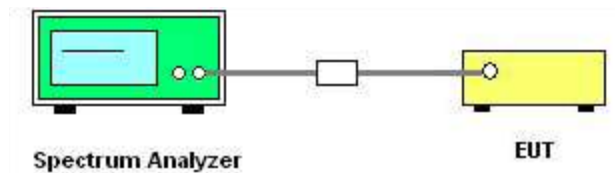

2.5.4. Test Procedure

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 Section 11.11 and 11.13.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings:

Reference level measurement: Set spectrum analyzer center frequency to DTS channel center frequency / Set the span to ≥ 1.5 times the DTS bandwidth / RBW: 100kHz / VBW: 300kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum PSD level and attenuate it by 20dB.

Emission level measurement: Set the center frequency and span to encompass frequency range to be measured / RBW: 100kHz / VBW: 300kHz / Detector: Peak / Sweep time: Auto couple / Trace mode: Max hold / Allow trace to fully stabilize / Use the peak marker function to determine the maximum amplitude level.

6. Record the measurement results in the test report.

2.5.5. Test Results of Conducted Band Edges and Spurious Emissions

Please refer to Appendix A for detail.

2.6. Radiated Band Edge and Spurious Emission

2.6.1. Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level. If the transmitter uses an RMS average conducted power limit, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

§15.209(a) Radiated emission limits:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Restricted bands of operation refer to §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41	/	/	/

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


²Above 38.6.

2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup


For radiated emissions from 9 kHz to 30 MHz

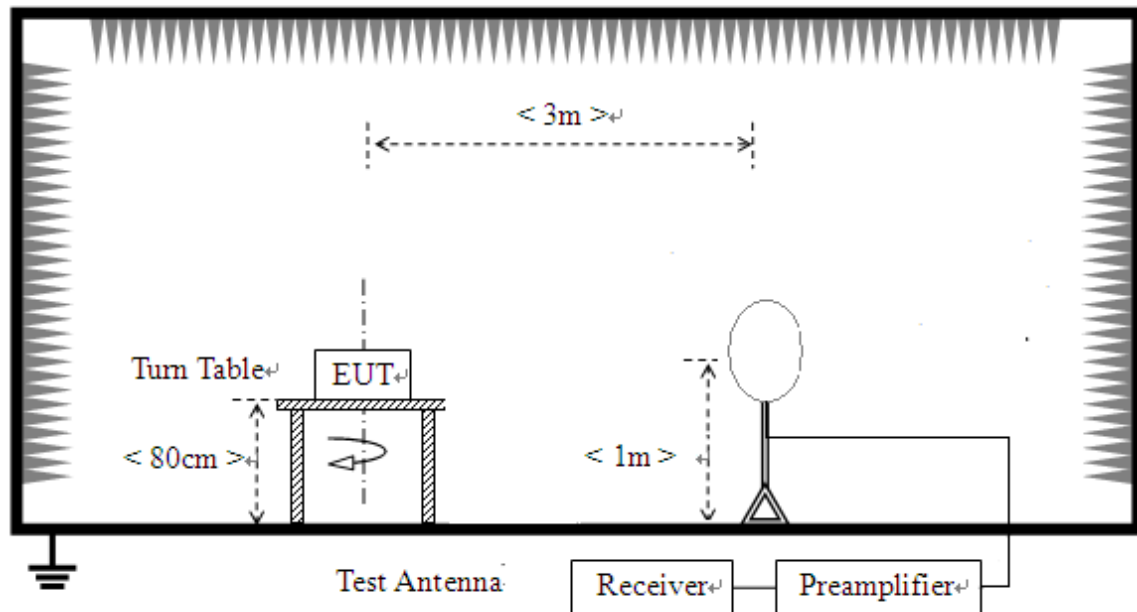

For radiated emissions from 30MHz to 1GHz

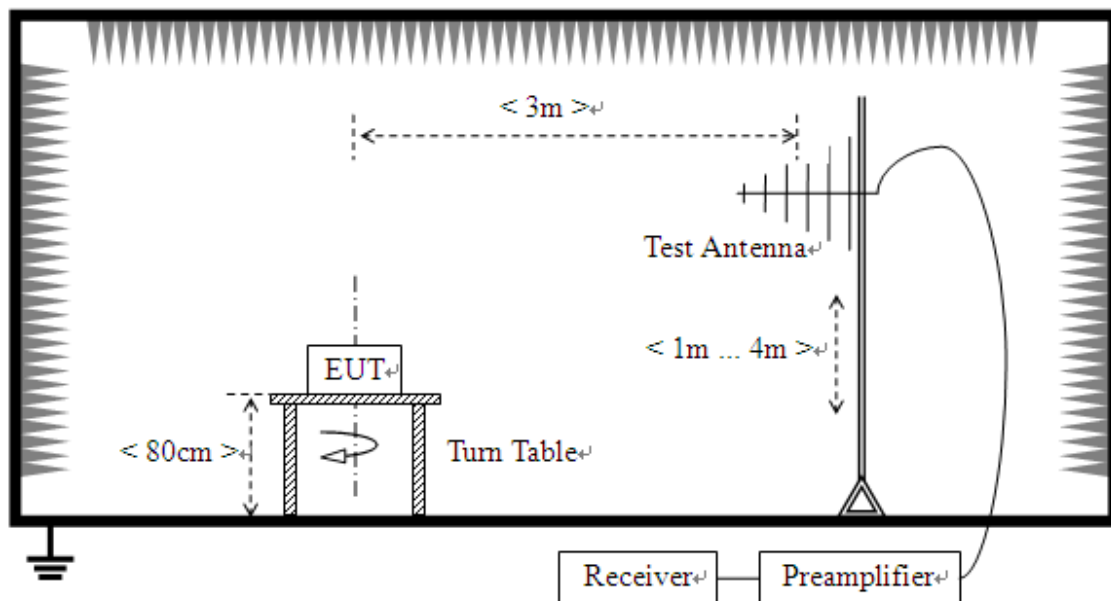

For radiated emissions above 1GHz

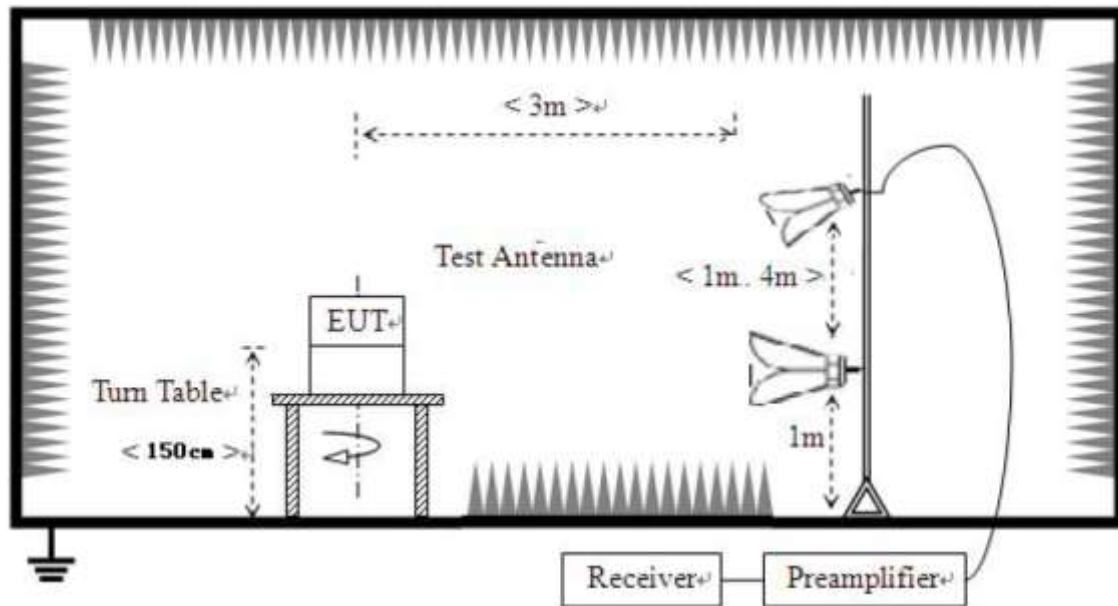

2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8m for below 1GHz and 1.5m for above 1GHz above the ground at a 3 meters semi-anechoic chamber.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. Height of receiving antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then

reported in a data sheet.

7. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

2.6.5. Test Results of Radiated Band Edge and Spurious Emission

For 9 kHz to 30MHz


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

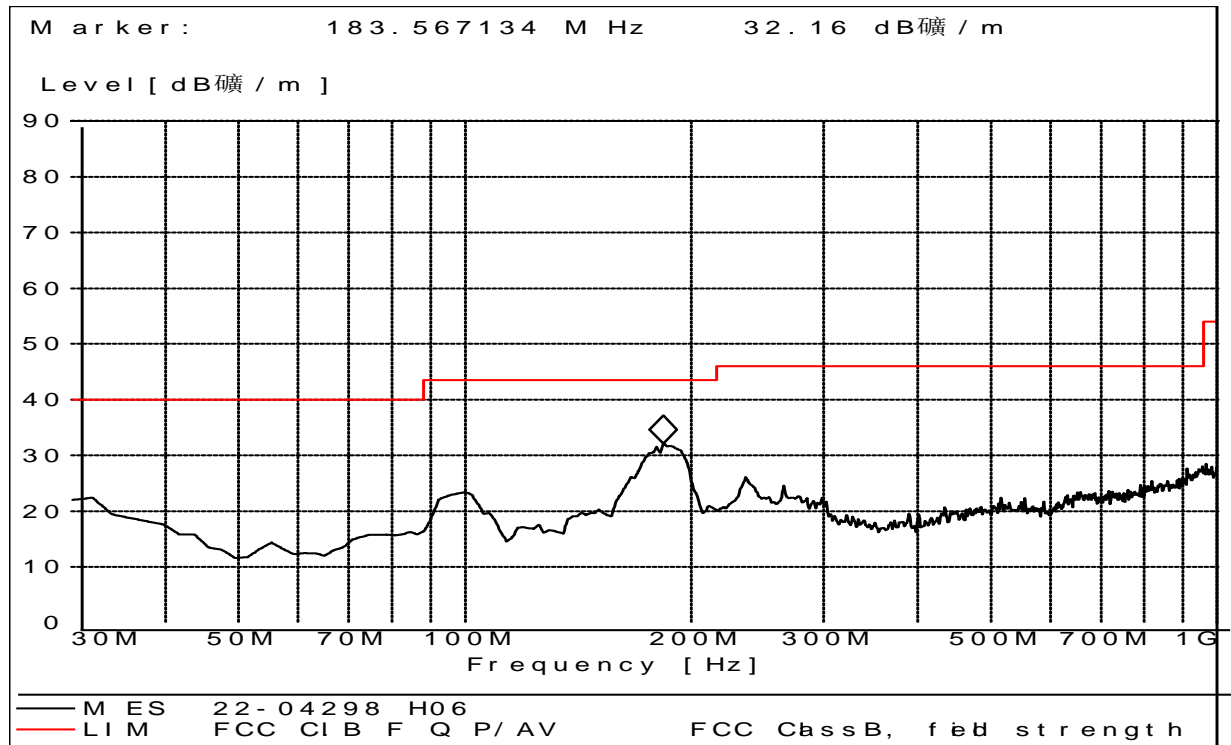For 30MHz to 1000MHz

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Polarity
31.940000	22.43	120.000	19.3	100.0	40.0	17.57	Horizontal
99.970000	21.43	120.000	9.9	100.0	43.5	22.07	Horizontal
166.070000	26.11	120.000	12.5	100.0	43.5	17.39	Horizontal
182.990000	31.06	120.000	11.0	100.0	43.5	12.44	Horizontal
236.050000	25.10	120.000	11.7	100.0	46.0	20.90	Horizontal
265.210000	22.55	120.000	15.1	100.0	46.0	23.45	Horizontal

Test Result : Pass**Remark:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

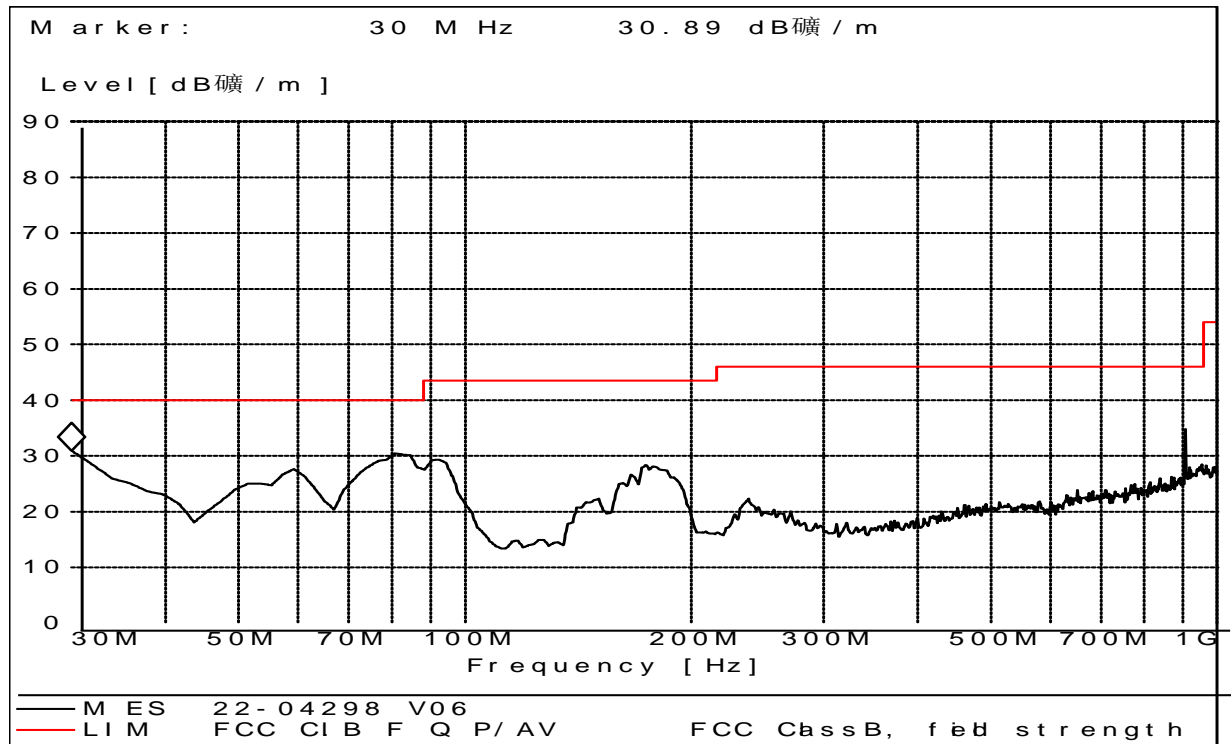

Frequency (MHz)	QuasiPeak (dB μV/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB μV/m)	Margin (dB)	Polarity
31.090000	28.97	120.000	19.3	100.0	40.0	11.03	Vertical
59.320000	26.17	120.000	8.6	100.0	40.0	13.83	Vertical
80.520000	29.30	120.000	8.5	100.0	40.0	10.70	Vertical
92.200000	29.15	120.000	9.9	100.0	43.5	14.35	Vertical
173.280000	28.31	120.000	11.9	100.0	43.5	15.19	Vertical
238.090000	20.73	120.000	11.7	100.0	46.0	25.27	Vertical

Test Result : Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

For 1GHz to 25GHz

FSK_2402MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
2390.00	43.88	74.00	-30.12	1.60	170	42.58	1.30	Horizontal	Peak
2390.00	36.78	54.00	-17.22	1.60	170	35.48	1.30	Horizontal	Average
4804.00	43.83	74.00	-30.17	1.60	170	37.43	6.40	Horizontal	Peak
4804.00	35.67	54.00	-18.33	1.60	170	29.27	6.40	Horizontal	Average
7206.00	48.64	74.00	-25.36	1.60	170	39.34	9.30	Horizontal	Peak
7206.00	39.71	54.00	-14.29	1.60	170	30.41	9.30	Horizontal	Average
2390.00	43.06	74.00	-30.94	1.50	180	41.76	1.30	Vertical	Peak
2390.00	36.75	54.00	-17.25	1.50	180	35.45	1.30	Vertical	Average
4804.00	44.47	74.00	-29.53	1.50	180	38.07	6.40	Vertical	Peak
4804.00	36.37	54.00	-17.63	1.50	180	29.97	6.40	Vertical	Average
7206.00	48.04	74.00	-25.96	1.50	180	38.74	9.30	Vertical	Peak
7206.00	39.68	54.00	-14.32	1.50	180	30.38	9.30	Vertical	Average
GFSK_2440MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
4880.00	44.07	74.00	-29.93	1.60	170	37.67	6.40	Horizontal	Peak
4880.00	35.37	54.00	-18.63	1.60	170	28.97	6.40	Horizontal	Average
7320.00	48.46	74.00	-25.54	1.60	170	39.06	9.40	Horizontal	Peak
7320.00	39.42	54.00	-14.58	1.60	170	30.02	9.40	Horizontal	Average
4880.00	44.28	74.00	-29.72	1.50	180	37.88	6.40	Vertical	Peak
4880.00	36.24	54.00	-17.76	1.50	180	29.84	6.40	Vertical	Average
7320.00	48.11	74.00	-25.89	1.50	180	38.71	9.40	Vertical	Peak
7320.00	39.82	54.00	-14.18	1.50	180	30.42	9.40	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

GFSK_2480MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
2483.50	44.91	74.00	-29.09	1.60	170	42.31	2.60	Horizontal	Peak
2483.50	35.30	54.00	-18.70	1.60	170	32.70	2.60	Horizontal	Average
4960.00	50.17	74.00	-23.83	1.60	170	43.47	6.70	Horizontal	Peak
4960.00	40.69	54.00	-13.31	1.60	170	33.99	6.70	Horizontal	Average
7440.00	47.55	74.00	-26.45	1.60	170	38.05	9.50	Horizontal	Peak
7440.00	38.83	54.00	-15.17	1.60	170	29.33	9.50	Horizontal	Average
2483.50	45.98	74.00	-28.02	1.50	180	43.38	2.60	Vertical	Peak
2483.50	35.36	54.00	-18.64	1.50	180	32.76	2.60	Vertical	Average
4960.00	51.81	74.00	-22.19	1.50	180	45.11	6.70	Vertical	Peak
4960.00	41.74	54.00	-12.26	1.50	180	35.04	6.70	Vertical	Average
7440.00	46.39	74.00	-27.61	1.50	180	36.89	9.50	Vertical	Peak
7440.00	38.69	54.00	-15.31	1.50	180	29.19	9.50	Vertical	Average
<p><i>Remark:</i></p> <p>1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)</p> <p>2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)</p> <p>3. Margin value = Emission Level – Limit value</p> <p>4. The emission levels of other frequencies are very lower than the limit and not show in test report.</p>									

2.7. AC Power Line Conducted Emission

2.7.1. Limit of AC Power Line Conducted Emission


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3. Test Setup

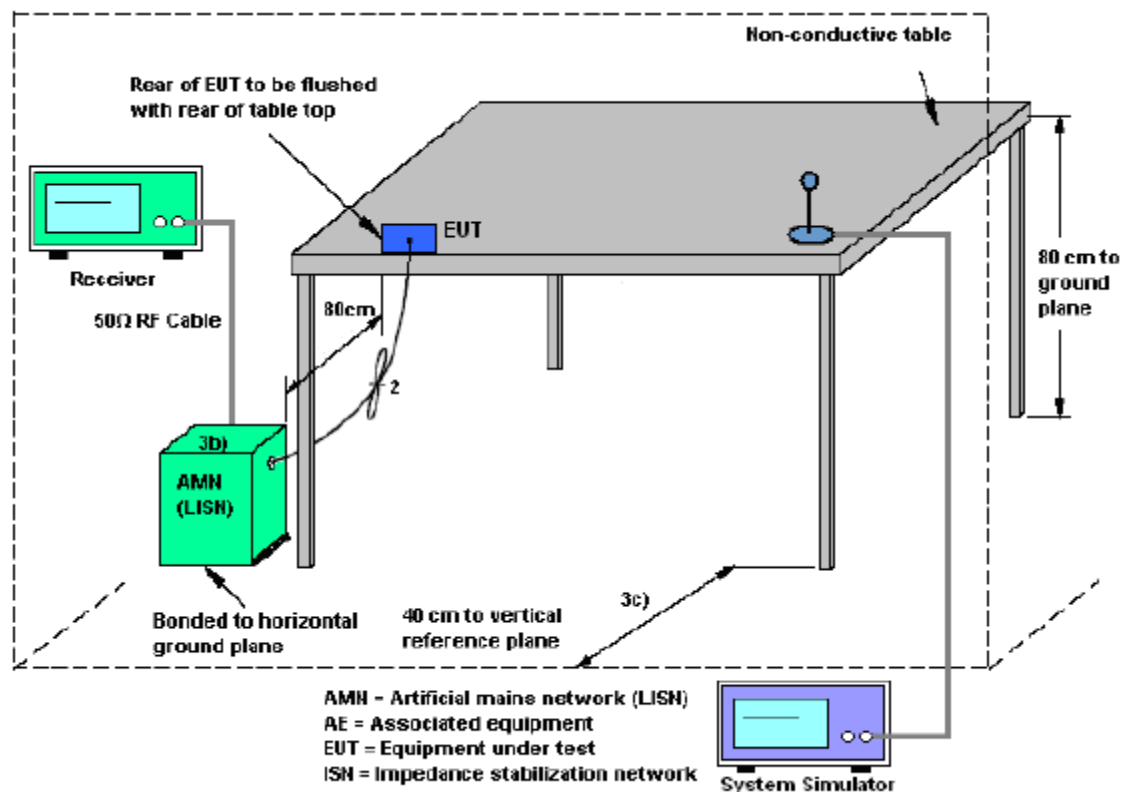


2.7.4. Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 micrometry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.7.5. Test Results of Conducted Emission

The EUT configuration of the emission tests is Bluetooth LE Link + USB Cable (Charging from Adapter).

Line Phase

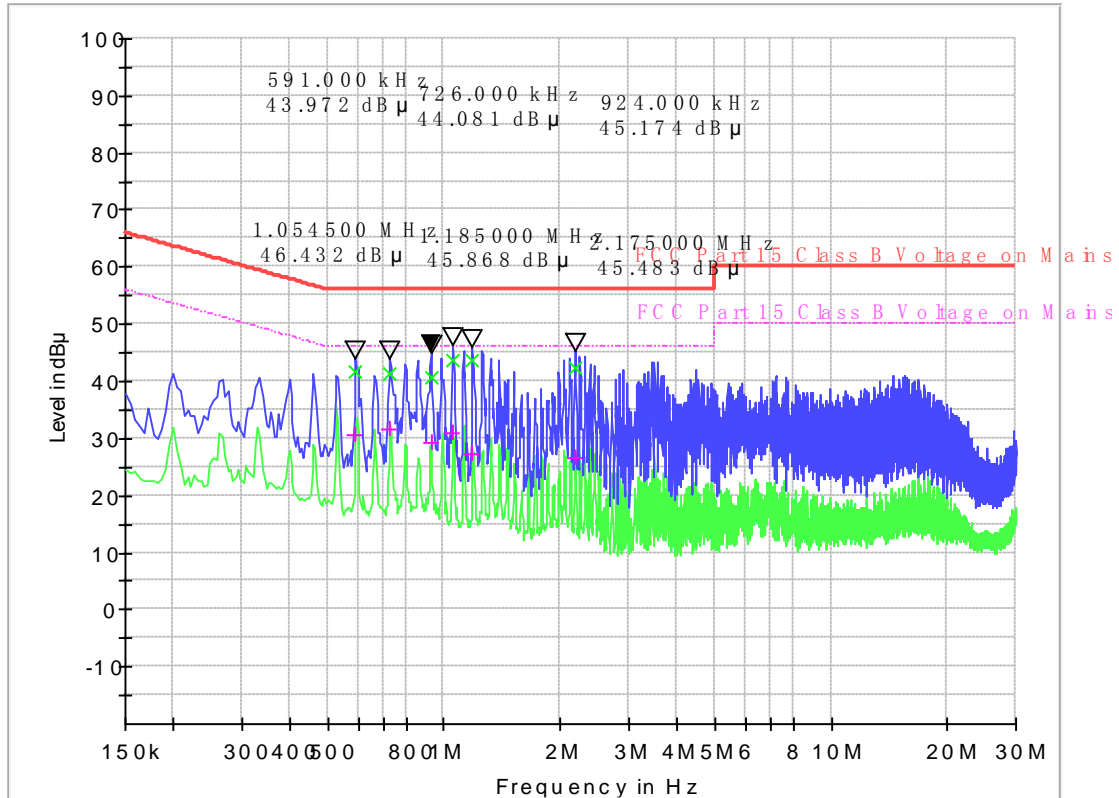


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Cabel Loss (dB)	Corr.Factor (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.591000	41.67	30.54	0.2	10.2	14.33	56.0	15.46	46.0
0.726000	41.27	31.47	0.2	10.2	14.73	56.0	14.53	46.0
0.924000	40.63	9.23	0.2	10.2	15.37	56.0	16.77	46.0
1.054500	43.65	31.07	0.2	10.2	12.35	56.0	14.93	46.0
1.185000	43.64	27.16	0.2	10.2	12.36	56.0	18.84	46.0
2.175000	42.39	26.50	0.2	10.2	13.61	56.0	19.50	46.0

Test Result : Pass

Remark:

1. Correction factor = Cabel loss+ attenuation factor.
2. attenuation factor = 10dB.

Neutral Phase

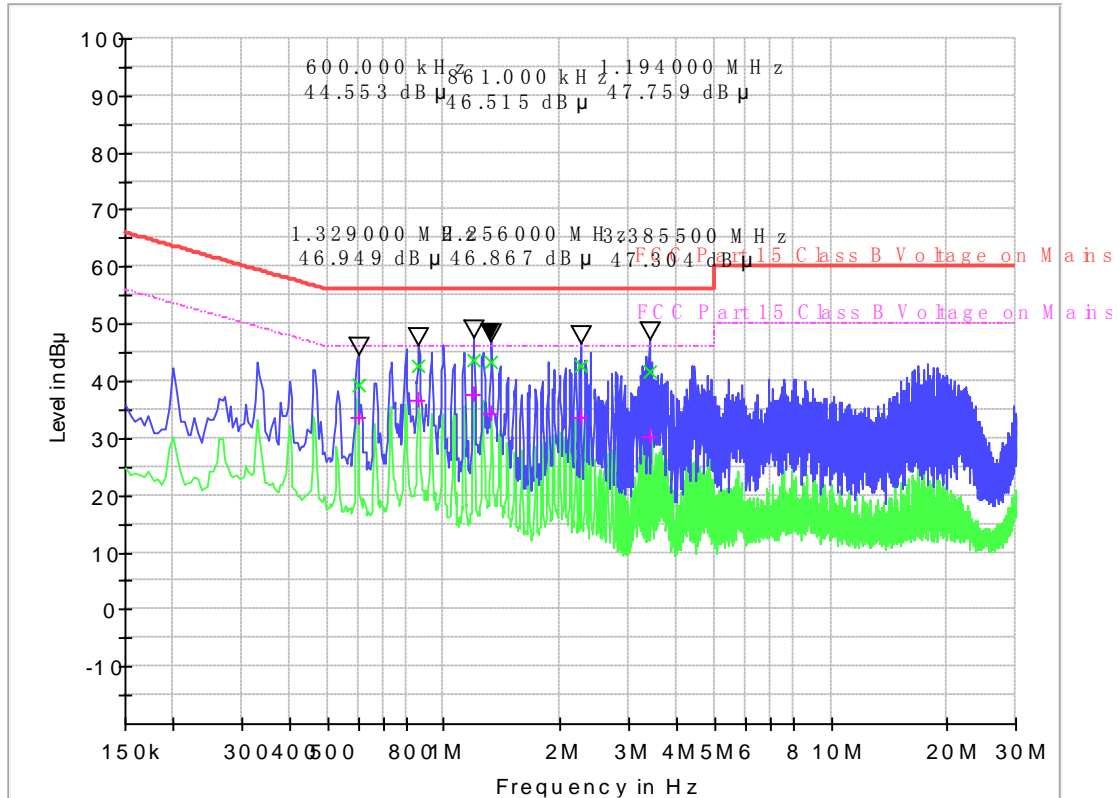

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Cabel Loss (dB)	Corr.Factor (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.600000	39.44	33.50	0.2	10.2	16.56	56.0	12.50	46.0
0.861000	42.69	36.66	0.2	10.2	13.31	56.0	9.34	46.0
1.194000	43.53	37.53	0.2	10.2	12.47	56.0	8.47	46.0
1.329000	43.40	34.41	0.2	10.2	12.60	56.0	11.59	46.0
2.256000	42.55	33.65	0.2	10.2	13.45	56.0	12.35	46.0
3.385500	41.65	30.31	0.3	10.3	14.35	56.0	15.69	46.0

Test Result : Pass

Remark:

1. Correction factor = Cabel loss+ attenuation factor.
2. attenuation factor = 10dB.

3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	EMI TEST RECEIVER	KEYSIGHT	N9038A	A141202036	2021.08.03	2022.08.02
2	Power Meter	R&S	NRP-Z31	102872	2021.05.08	2022.05.07
3	TURNTABLE	ETS	2088	2149	N/A	N/A
4	ANTENNA MAST	ETS	2075	2346	N/A	N/A
5	EMI TEST Software	R&S	ESK1	N/A	N/A	N/A
6	Horn antenna (18GHz~26.5GHz)	AR	AT4003A	325306	2020.09.16	2022.09.15
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-1000	A140101634	2021.12.23	2022.12.22
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2021.12.23	2022.12.22
9	High pass filter	Compliance Direction systems	BSU-6	34202	2021.11.09	2022.11.08
10	Horn Antenna	R&S	ESIB7	A0501375	2020.06.24	2022.06.22
11	ULTRA-BROADBAND ANTENNA	SCHWARZBECK	VULB9160	A0805560	2019.05.24	2022.05.23
12	Passive Loop Antenna	SCHWARZBECK	FMZB 1519B	A180903206	2020.07.22	2023.07.21
13	Temperature chamber	TABAI	PS-232	A8708054	2021.09.24	2022.09.23
14	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2022.03.25	2023.03.24
15	Power Supply	R&S	ESIB26	A0304218	2021.12.23	2022.12.22
16	LISN	ROHDE&SCHWARZ	ENV216	A140701847	2021.08.11	2022.08.10
17	Test software	ECIT	Eagle	V2.0	N/A	N/A

4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Power Line Conducted Emission Measurement (150kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	2.8dB
-----------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (9kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	3.5dB
-----------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	3.91dB
-----------------------------------------------------------------------	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	4.5dB
-----------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	4.9dB
-----------------------------------------------------------------------	-------

Uncertainty of RF Conducted Measurement (9kHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	1.3dB
-----------------------------------------------------------------------	-------

Appendix A


RF Output Power

Test Result and Data

1MHz Bandwidth			
Test Frequency	Conducted Power(dBm)	Limit(dBm)	Result
2402	3.011	30	Pass
2440	3.592		Pass
2480	3.612		Pass

2MHz Bandwidth			
Test Frequency	Conducted Power(dBm)	Limit(dBm)	Result
2402	3.047	30	Pass
2440	3.632		Pass
2480	3.77		Pass


1MHz - Output Power: 2402MHz

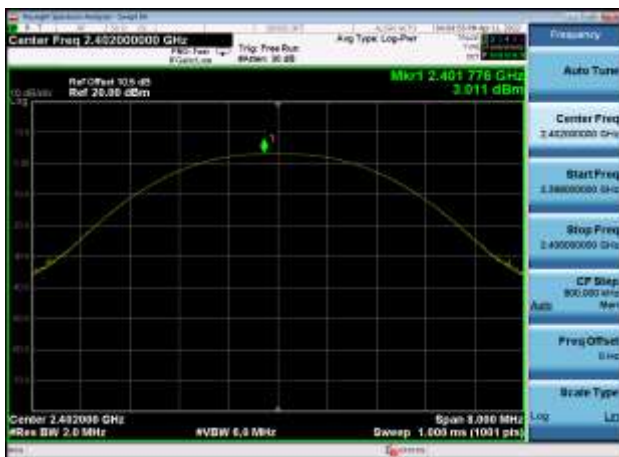


2MHz -Output Power: 2402MHz




1MHz -Output Power: 2440MHz

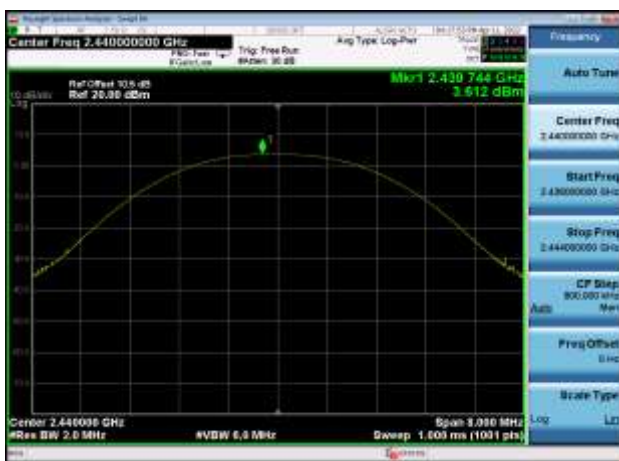

2MHz -Output Power: 2440MHz

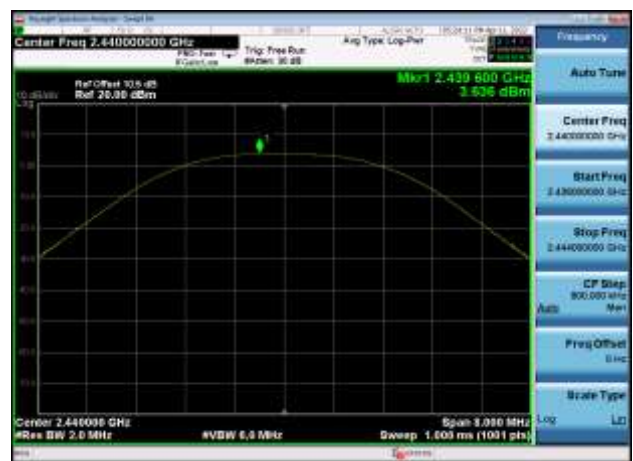

1MHz -Output Power: 2480MHz

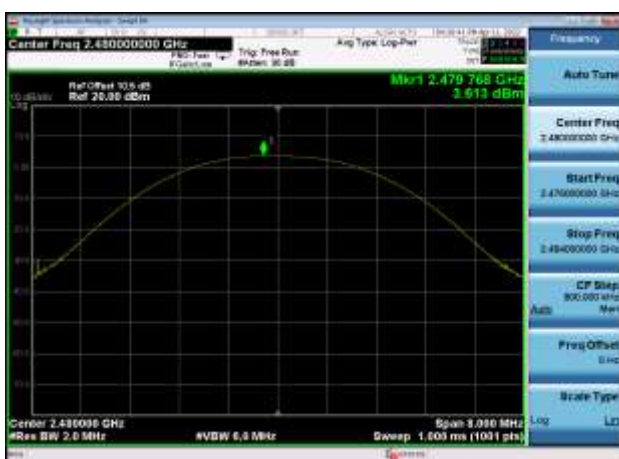

2MHz -Output Power: 2480MHz




**Power Spectral Density
Test Result and Data**


1MHz Bandwidth			
Test Frequency	PSD(dBm/3kHz)	Limit(dBm/3kHz)	Result
2402	-12.207	8	Pass
2440	-11.613		Pass
2480	-11.613		Pass

2MHz Bandwidth			
Test Frequency	PSD(dBm/3kHz)	Limit(dBm/3kHz)	Result
2402	-12.144	8	Pass
2440	-13.652		Pass
2480	-13.568		Pass


1MHz - Power spectral density: 2402MHz

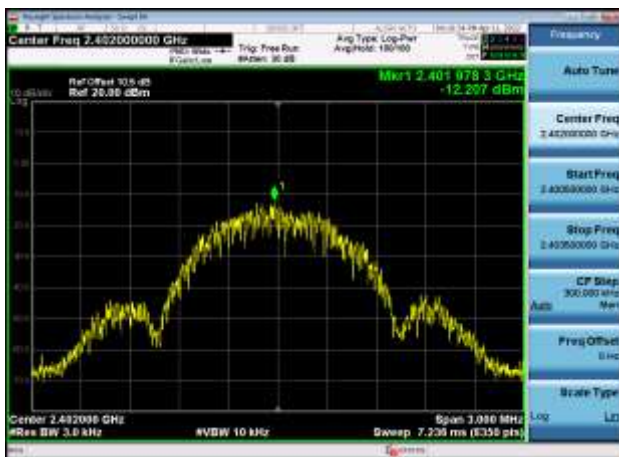


2MHz - Power spectral density: 2402MHz

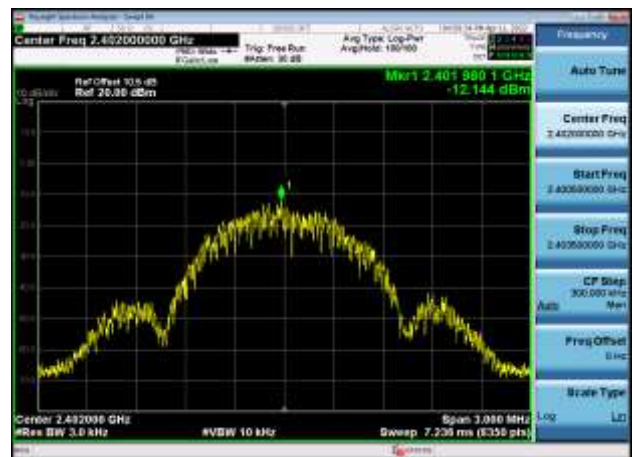


1MHz -Power spectral density: 2440MHz

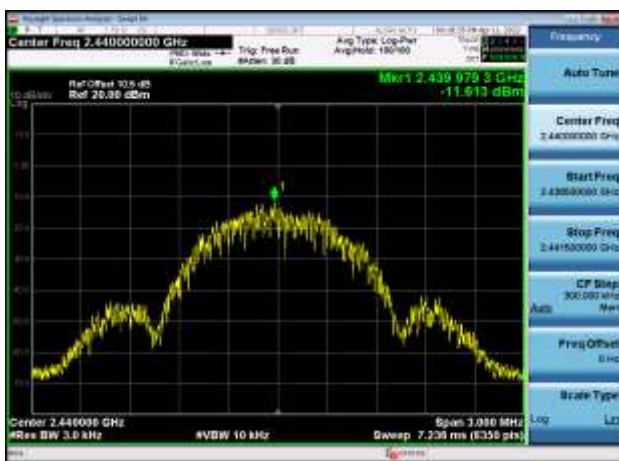


2MHz -Power spectral density: 2440MHz

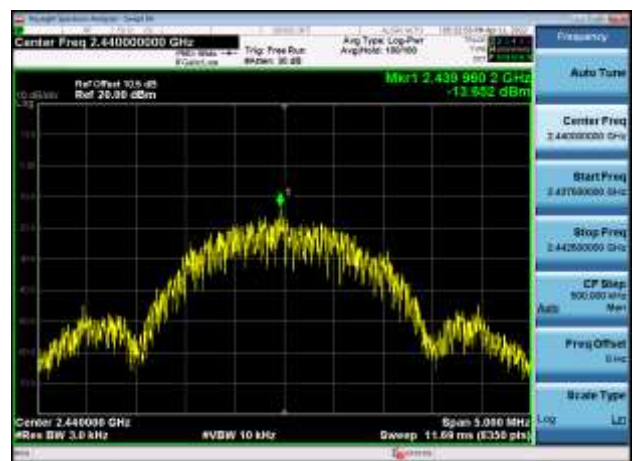

1MHz -Power spectral density: 2480MHz

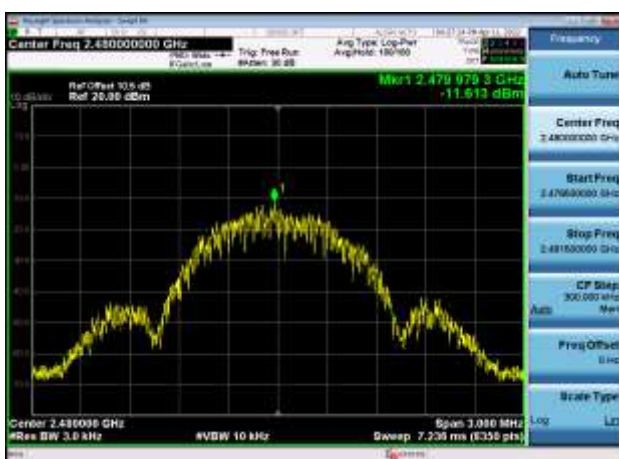

2MHz -Power spectral density: 2480MHz

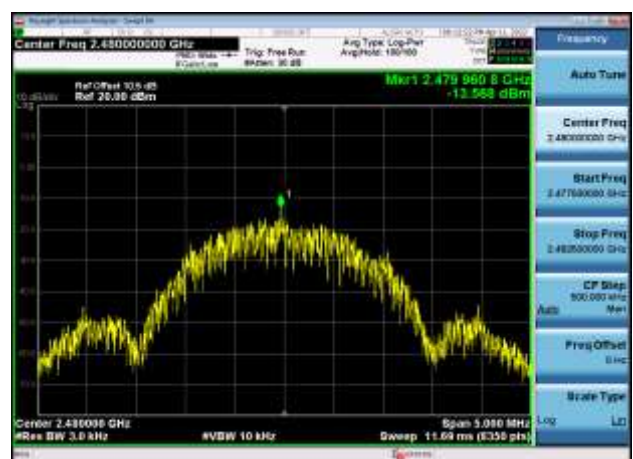

6dB BandWidth Test Result and Data

1MHz Bandwidth			
Test Frequency	6dBOccupy Bandwidth(kHz)	Min Limit(kHz)	Result
2402	708.722	500	Pass
2440	714.777		Pass
2480	715.047		Pass

2MHz Bandwidth			
Test Frequency	6dBOccupy Bandwidth(kHz)	Min Limit(kHz)	Result
2402	1170.382	500	Pass
2440	1172.808		Pass
2480	1226.704		Pass

1MHz - 6dB Bandwidth: 2402MHz



2MHz - 6dB Bandwidth: 2402MHz



1MHz - 6dB Bandwidth: 2440MHz



2MHz - 6dB Bandwidth: 2440MHz



1MHz - 6dB Bandwidth: 2480MHz




2MHz - 6dB Bandwidth: 2480MHz




Conducted Band Edges and Spurious Emissions Test Result and Data

1MHz Bandwidth


,Plot ,1Transmitter Spurious Emission
: 2402,Referecy Level

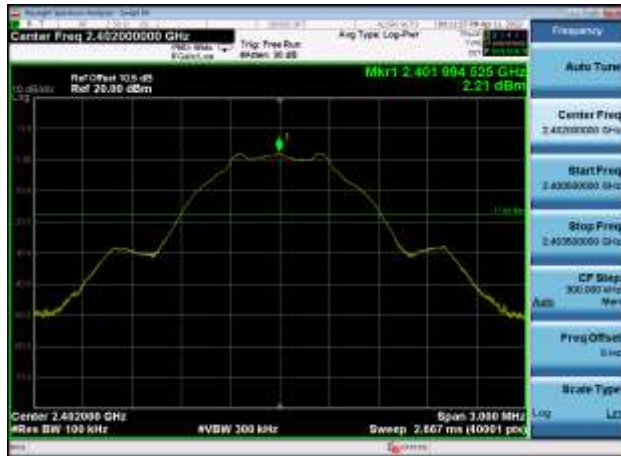


,Plot ,1Transmitter Spurious Emission
: 2440,Referecy Level

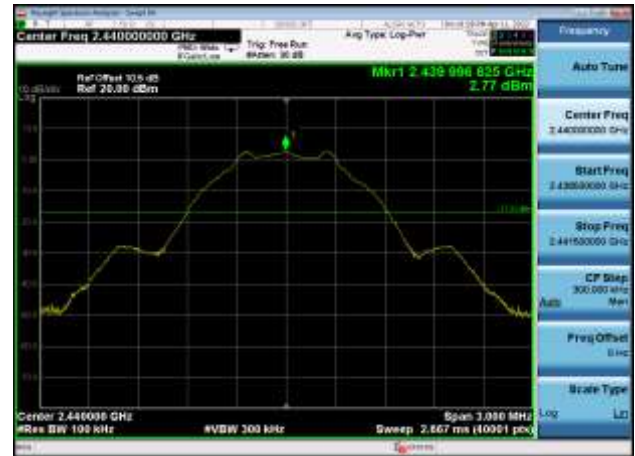

,Plot ,1Transmitter Spurious Emission
: 2480,Referecy Level

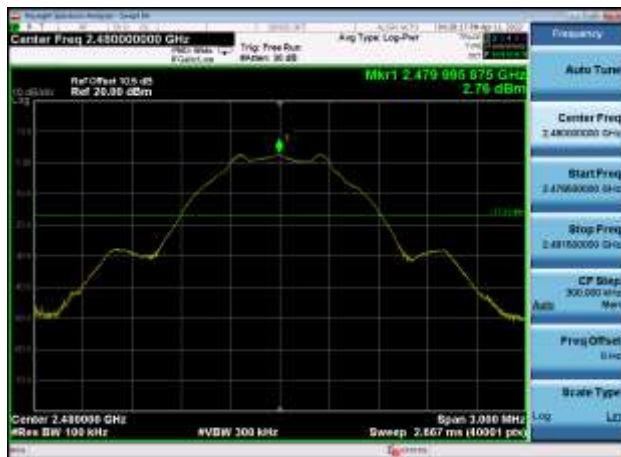

,Plot ,2Conducted Emission: 2402
,Band Edge

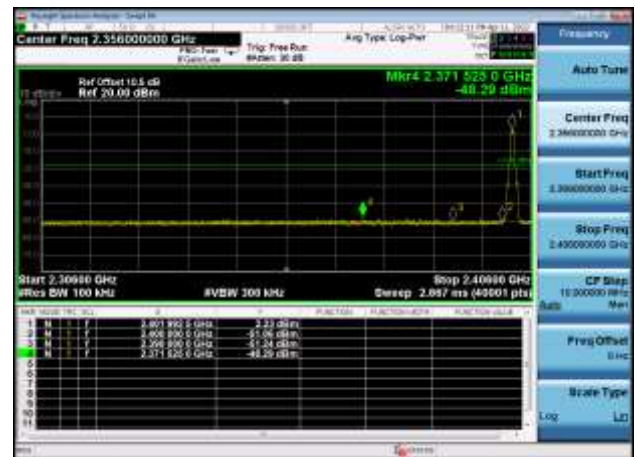


,Plot ,2Conducted Emission: 2440
,Band Edge




,Plot ,2Conducted Emission: 2480
,Band Edge




,Plot ,3Transmitter Spurious Emission
: 2402,30MHz~2310MHz

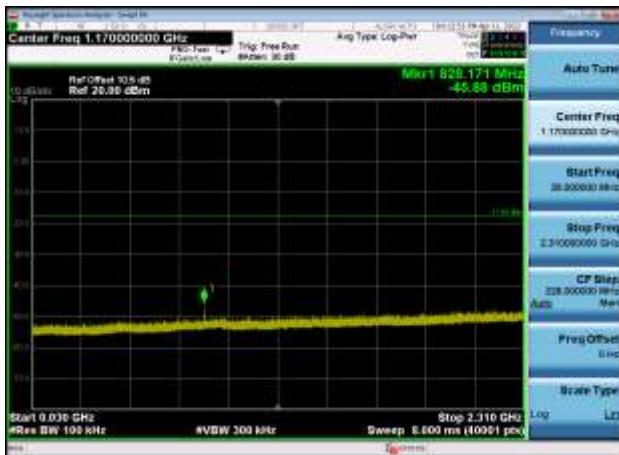


,Plot ,3Transmitter Spurious Emission
: 2440,30MHz~2310MHz

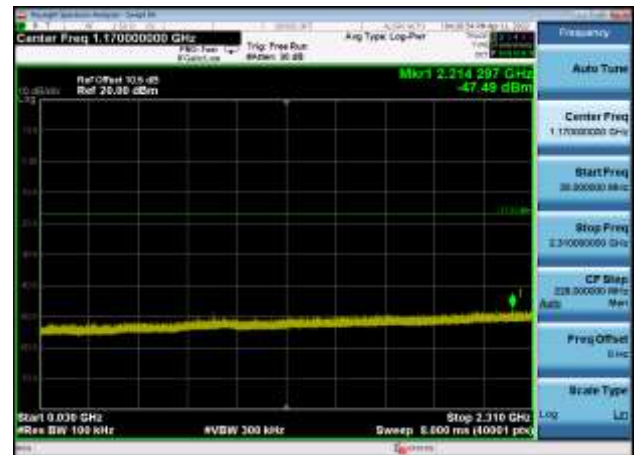


,Plot ,3Transmitter Spurious Emission
: 2480,30MHz~2310MHz

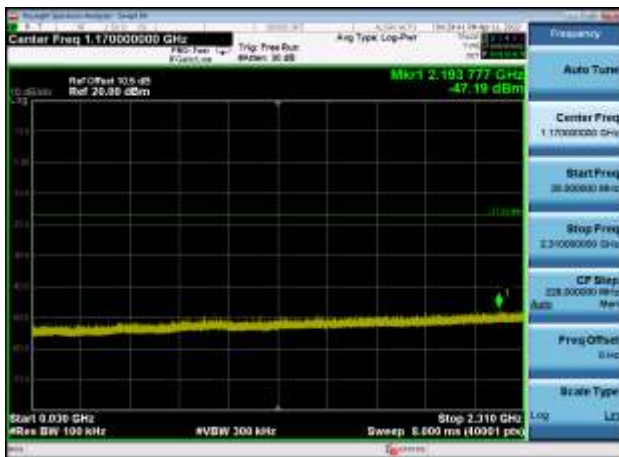


,Plot ,4Transmitter Spurious Emission
: 2402,2500MHz~10000MHz

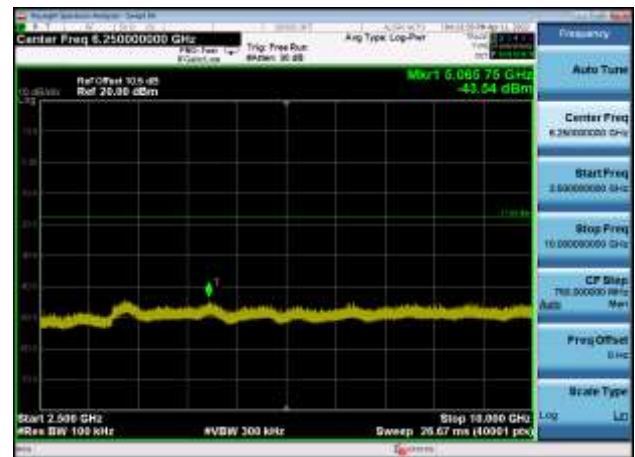


,Plot ,4Transmitter Spurious Emission
: 2440,2500MHz~10000MHz

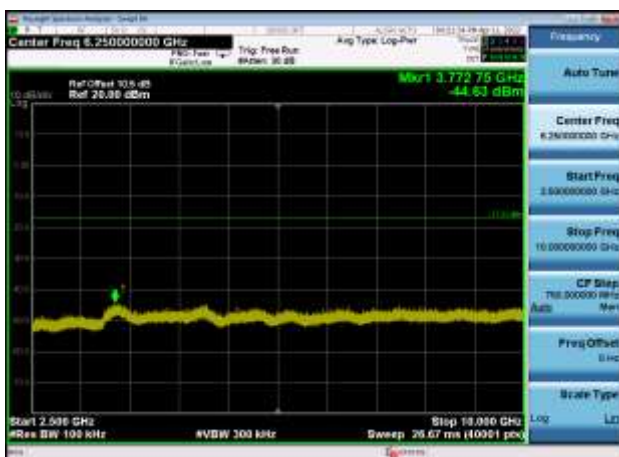


,Plot ,4Transmitter Spurious Emission
: 2480,2500MHz~10000MHz

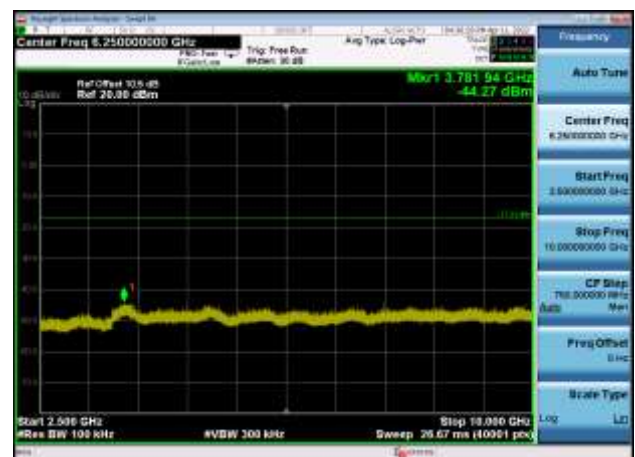


,Plot ,5Transmitter Spurious Emission
: 2402,10000MHz~25000MHz

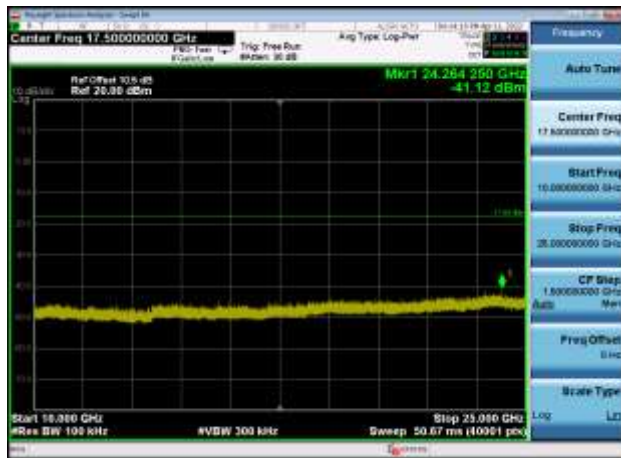

,Plot ,5Transmitter Spurious Emission
: 2440,10000MHz~25000MHz

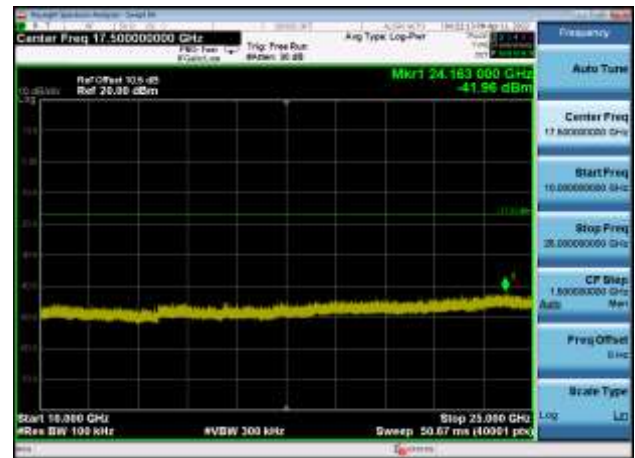


,Plot ,5Transmitter Spurious Emission
: 2480,10000MHz~25000MHz

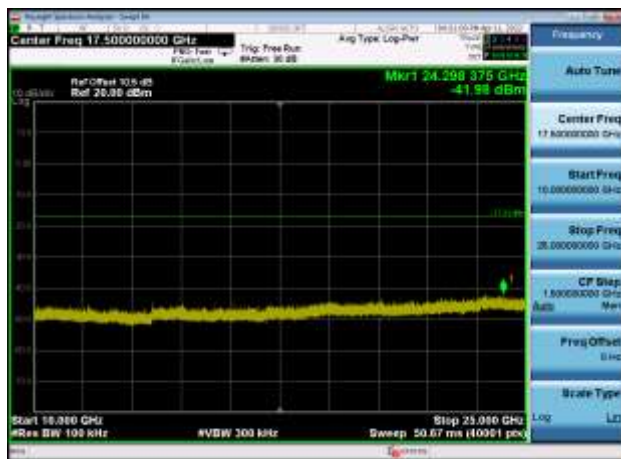


2MHz Bandwidth


,Plot ,1Transmitter Spurious Emission
: 2402,Referecy Level

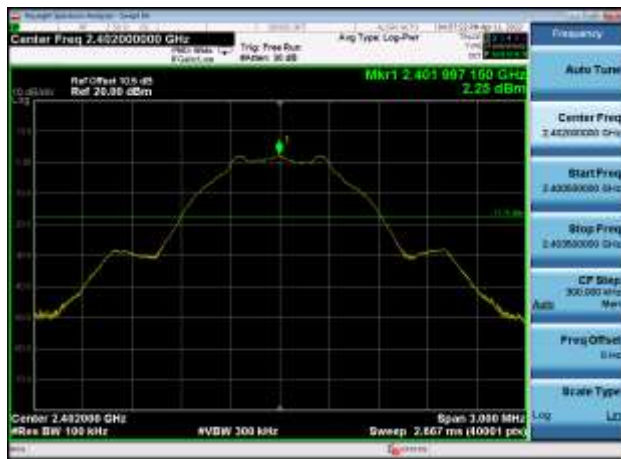

,Plot ,1Transmitter Spurious Emission
: 2440,Referecy Level

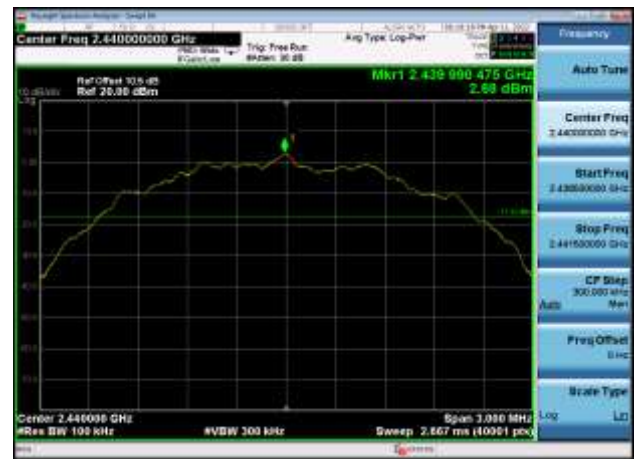


,Plot ,1Transmitter Spurious Emission
: 2480,Referecy Level

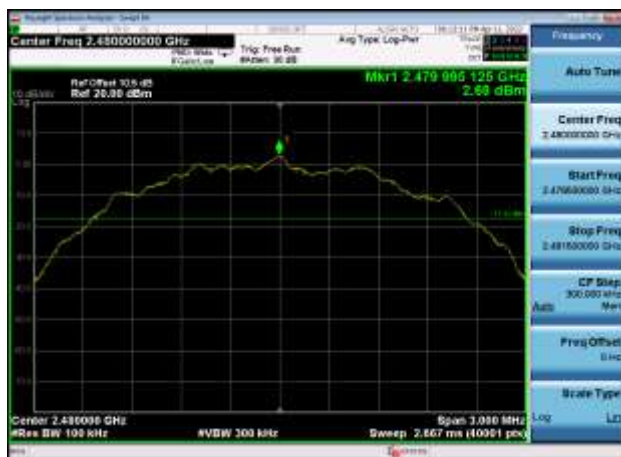

,Plot ,2Conducted Emission: 2402
,Band Edge




,Plot ,2Conducted Emission: 2440
,Band Edge

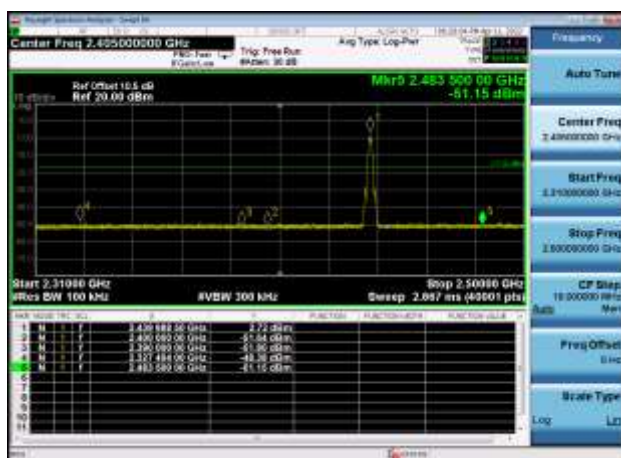


,Plot ,2Conducted Emission: 2480
,Band Edge




,Plot ,3Transmitter Spurious Emission
: 2402,30MHz~2310MHz

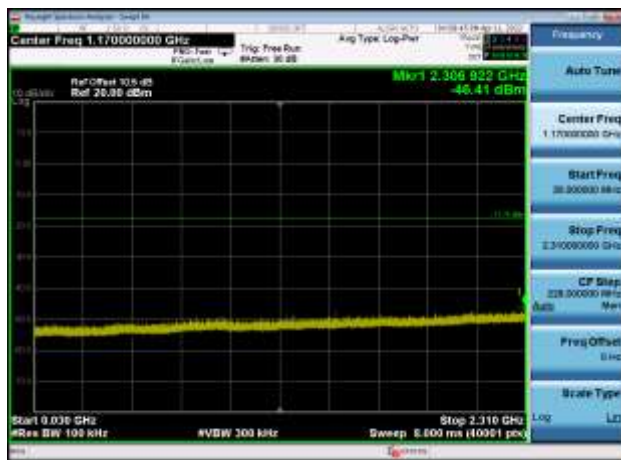


,Plot ,3Transmitter Spurious Emission
: 2440,30MHz~2310MHz

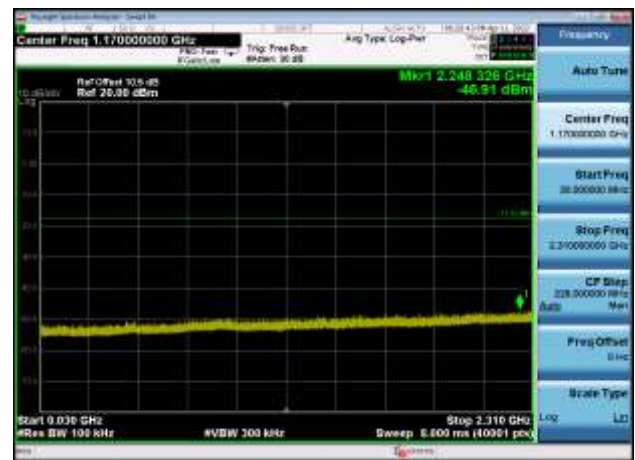

,Plot ,3Transmitter Spurious Emission
: 2480,30MHz~2310MHz

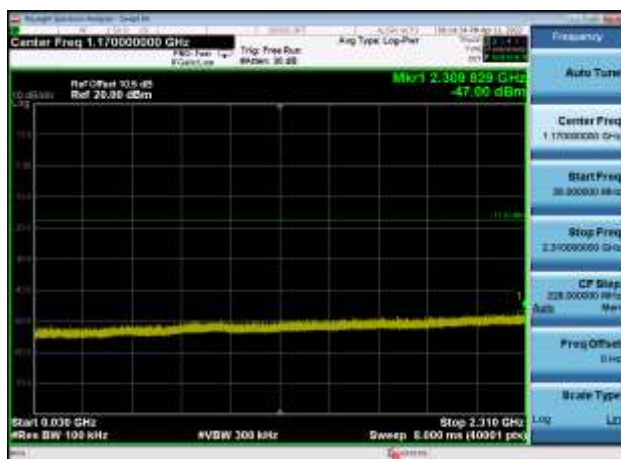


,Plot ,4Transmitter Spurious Emission
: 2402,2500MHz~10000MHz

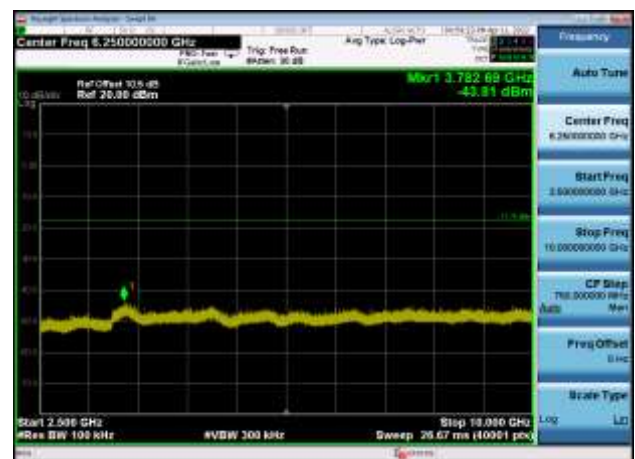


,Plot ,4Transmitter Spurious Emission
: 2440,2500MHz~10000MHz




,Plot ,4Transmitter Spurious Emission
: 2480,2500MHz~10000MHz

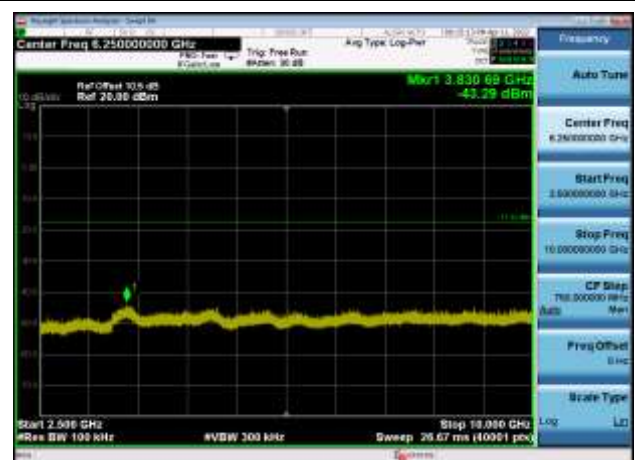


,Plot ,5Transmitter Spurious Emission
: 2402,10000MHz~25000MHz

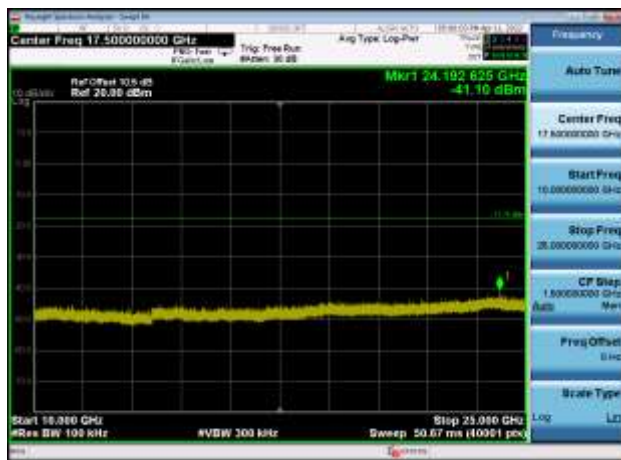

,Plot ,5Transmitter Spurious Emission
: 2440,10000MHz~25000MHz

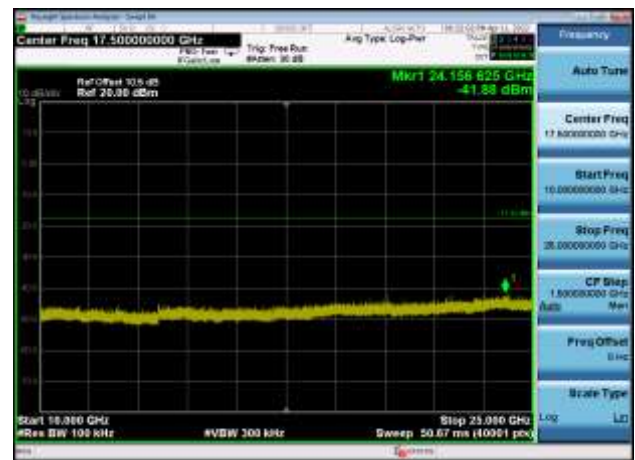

,Plot ,5Transmitter Spurious Emission
: 2480,10000MHz~25000MHz

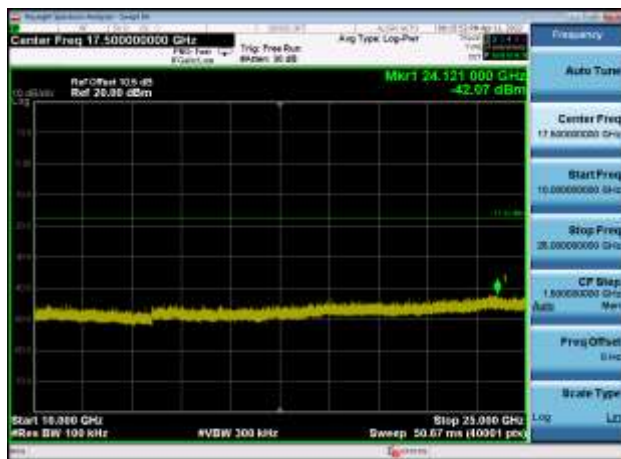

END OF REPORT