

Report of Measurements.

Measurements were made in accordance with the procedures and reporting requirements of ANSI C63.4-1992.

The Test Set-Up (C63.4 section 10.1.3) is shown in the attached drawing. Since the device has no external wiring, there are no attached cables to the EUT.

The sequence of testing (C63.4 section 10.1.7) for radiated emissions is as follows: A preliminary scan was conducted with the receiver antenna close to the EUT in order to identify the emission characteristics of the EUT (C63.4 section 8.3.1.1). The antenna and EUT were then placed at the proper separation with the EUT positioned on a non-conducting turntable. The EUT was rotated on the turntable to maximize the received signal strength, then the receiver antenna height was varied to further maximize the received reading. Thereafter, the device was again rotated to a peak output position and the antenna height was re-adjusted for maximum received signal. This procedure was re-iterated until there was no further increase in signal level. This procedure was performed with the EUT rotating in three orthogonal planes (C63.4 section 13.1.4.1) to generate a final maximum reading which is recorded on the radiated emissions result sheet.

See Exhibit 6 for list of test equipment (C63.4 section 10.1.4).

Note, Spectrum Analyzer resolution bandwidths set as follows;
(Video Bandwidth set greater than RBW)

- For occupied bandwidth measurements, RBW = 100kHz,
(This is in accordance with the minimum RBW allowed by C63.4,
which requires RBW greater than 5% of the FCC required occupied
bandwidth spec of 0.25% of center frequency).
- For radiated emissions below 1 GHz, the RBW = 100kHz.
Detector function set to peak.
- For radiated emissions above 1 GHz, the RBW = 1MHz.
Detector function set to peak.

OCCUPIED BANDWIDTH is shown on attached plot.

RADIATED EMISSIONS are recorded on attached sheet.

EXHIBIT 5 - TEST SET UP

Antenna Height Position

FCC ID: CFS8DL5814

Note: EUT rotated in three orthogonal planes.


EUT on 1m high non conducting platform.

Turntable

Antenna


Measurement Receiver

Ground Plane

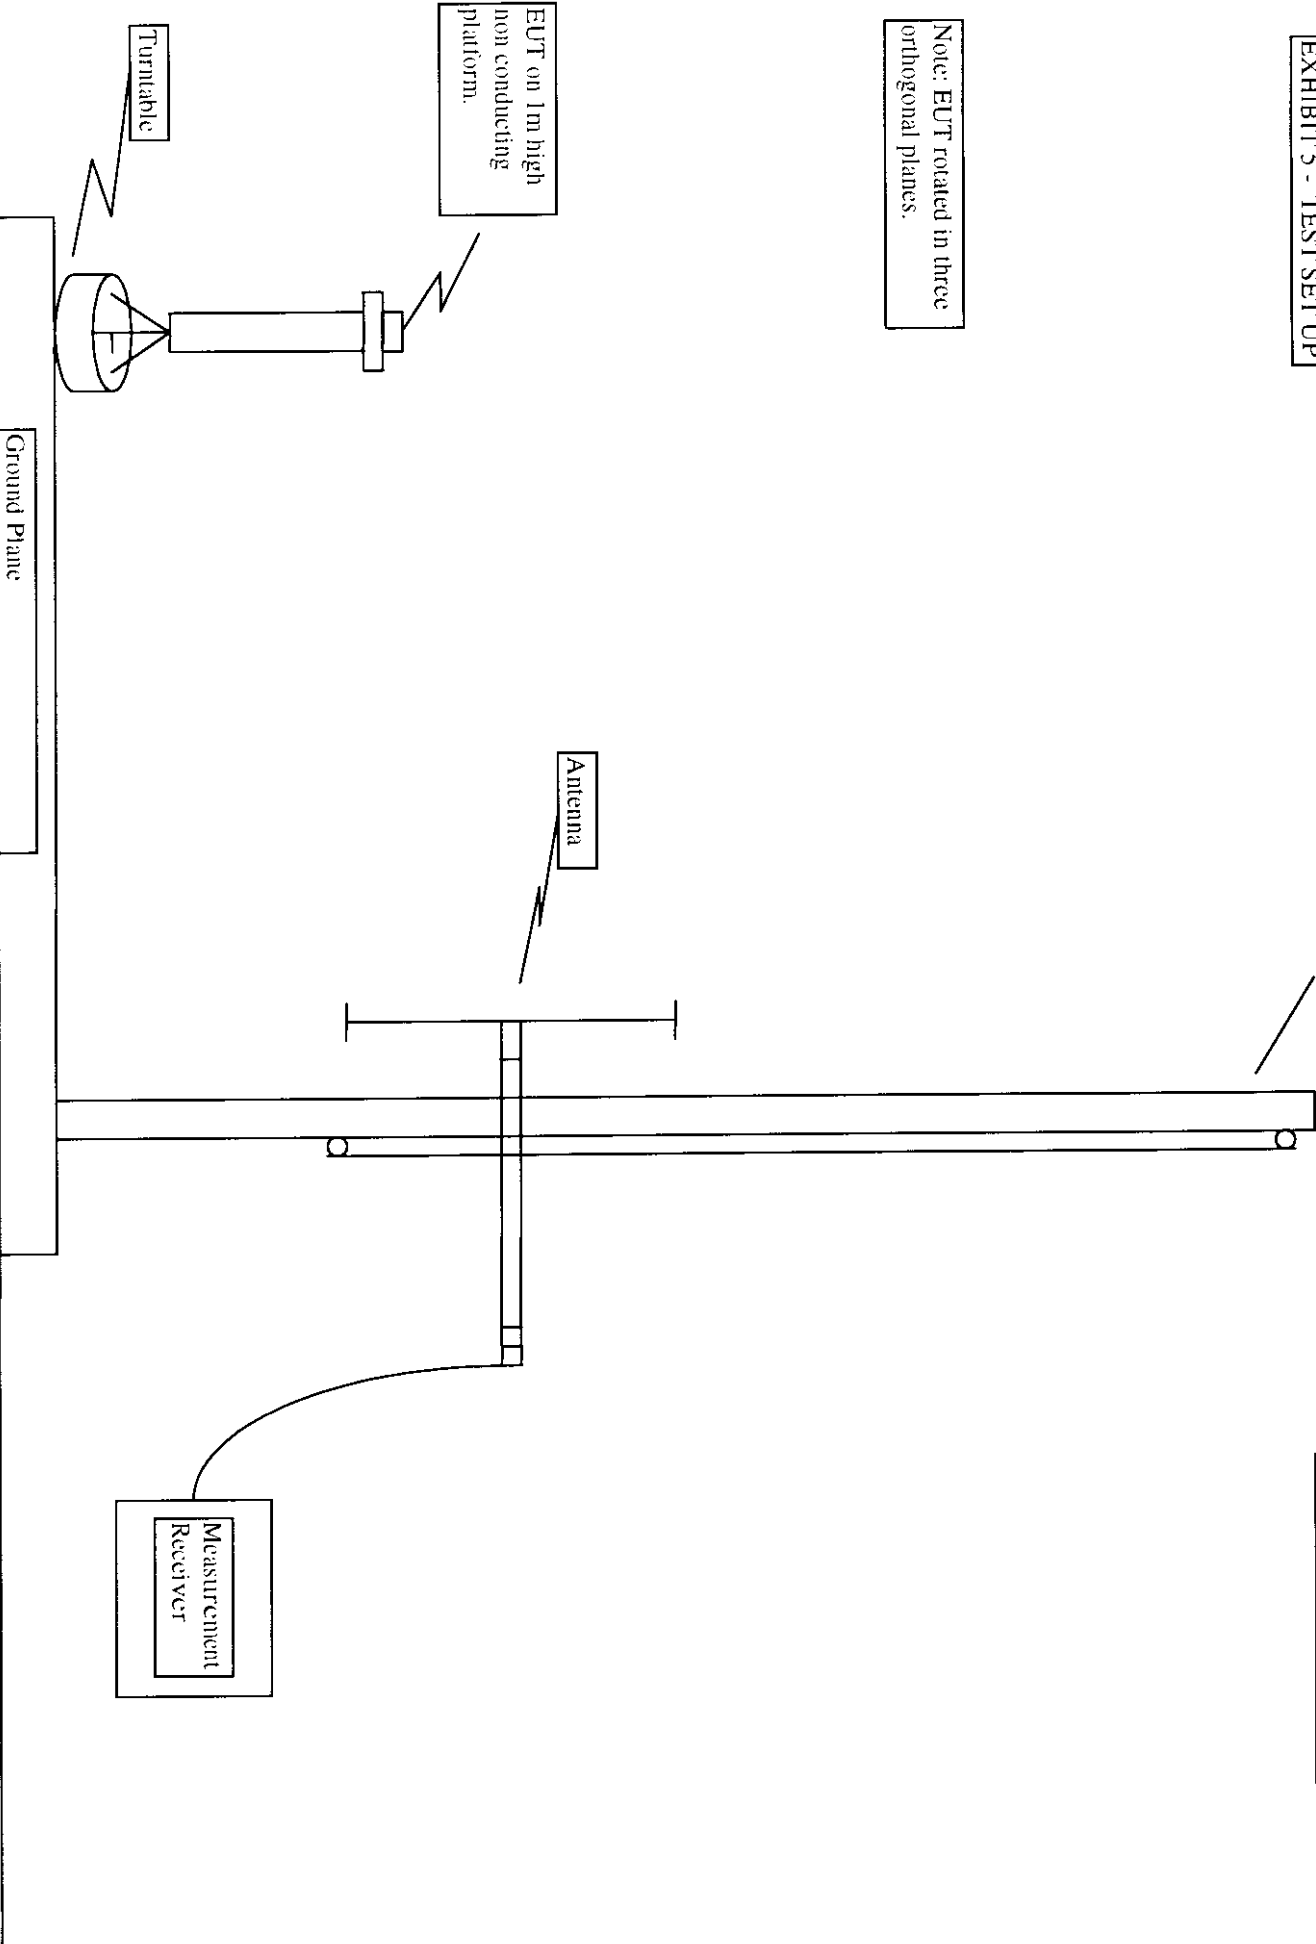

Page #1

5814
Occupied BW

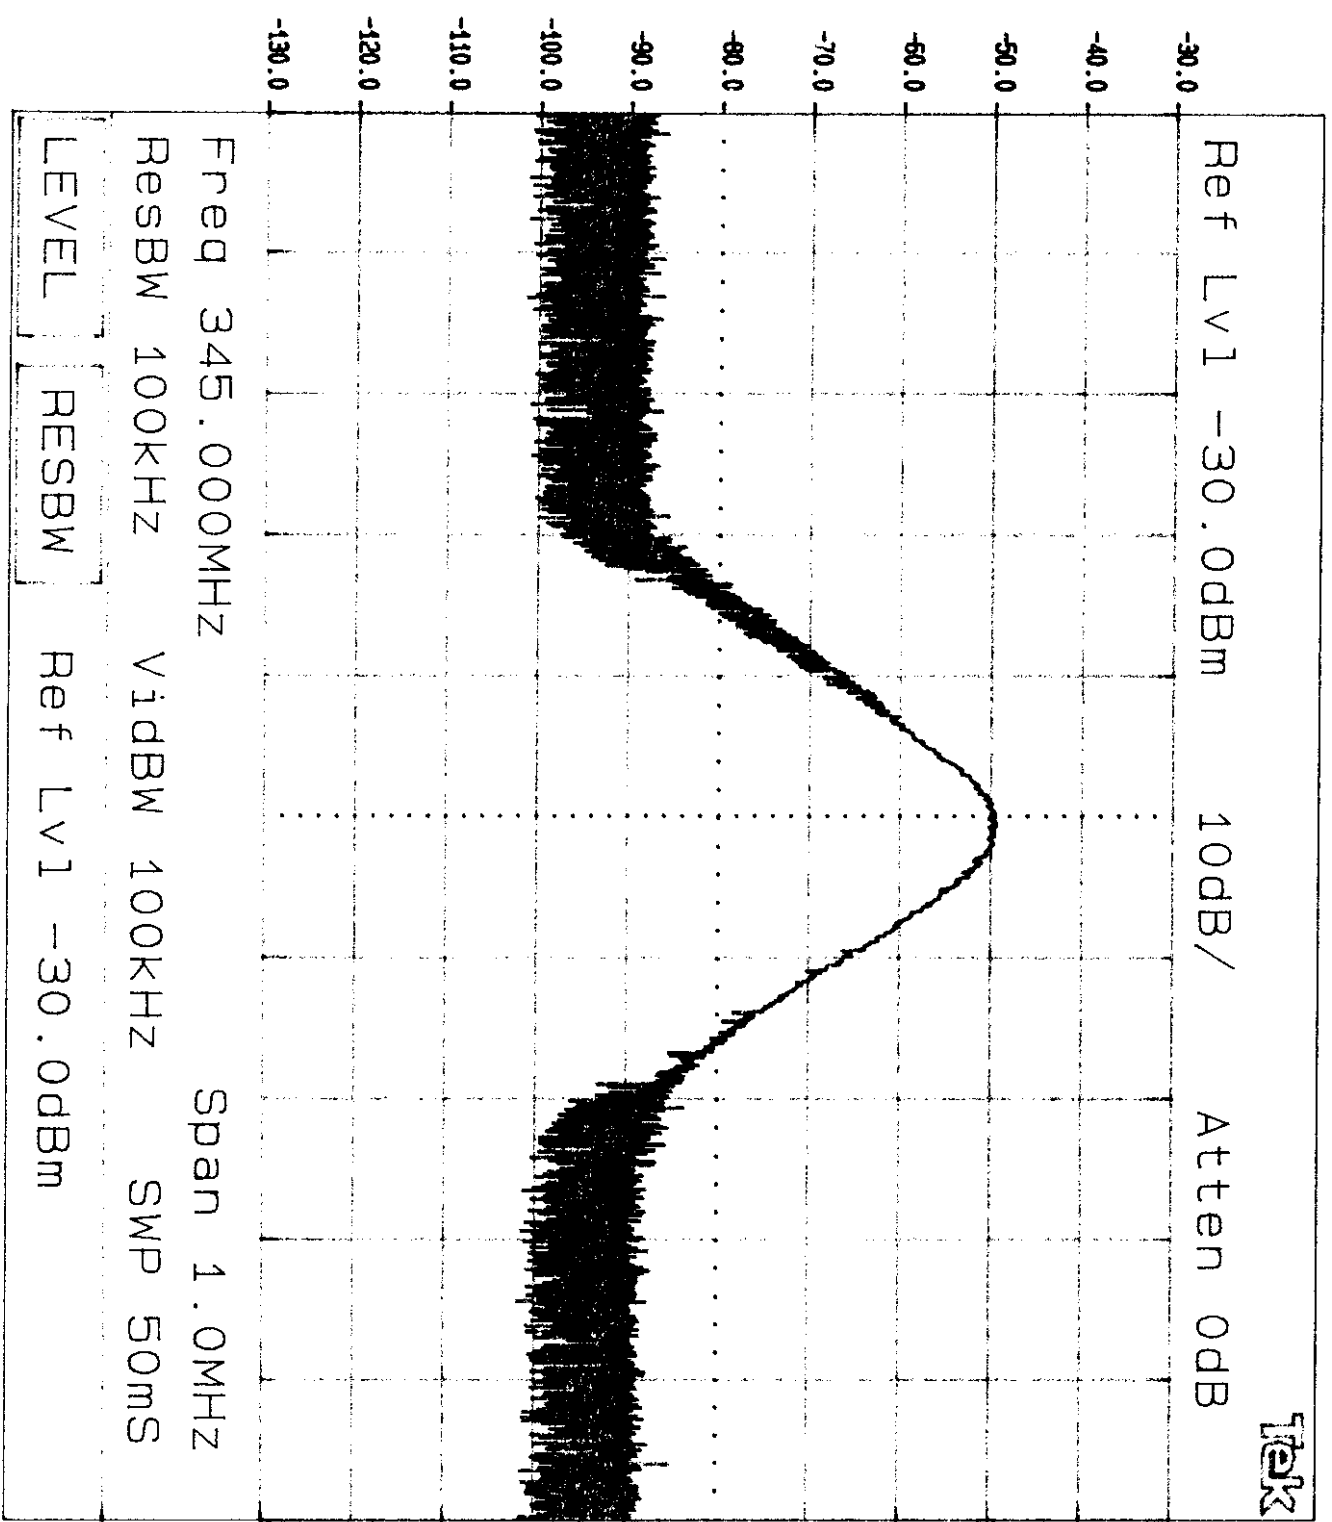

KNOB 2 KNOB 1 KEYPAD Tektronix 2784

RADIATED EMISSIONS DATA SHEET

DATE: 4-7-98 TESTED BY: Stan Ullrich APPROVED BY: _____

TEST SAMPLE (model): ADEMCO 5814 Transmitter (1)

TEST METHOD: ANSI C63.4 - 1992

TEST SPECIFICATION: FCC Part 15

NOTES: 1) Fc = 345 MHz 2) Detector = Peak, 3) Frequency range scanned to
4 GHz. Emissions not reported were more than 20 dB below the specified limit.

4) Conv. reading = 10 $\left[\frac{\text{Meter reading} + \text{Cable/Amp factor} + \text{Antenna factor}}{20} \right]$

5) _____

FREQUENCY (MHz)	POLARITY (V / H)	METER READING (dB uV)	CABLE/AMP FACTOR (dB)	ANTENNA FACTOR (dB/M)	CONV. READING (uV/M)	DUTY CYCLE (%)	CORR. READING (uV/M)	LIMIT @ 3M (uV/M)
30								729
↓								↓
345	H	56	1.1	19.8	6998	10%	700	7292
↓								↓
690	H	30	1.6	25.5	716	10%	72	729
↓								↓
1035	H	45	2.0	25.1	4027	10%	403	500
↓								↓
1380	H	43	2.5	28.1	4786	10%	479	500
↓								↓
1725	H	43	2.9	29.8	6095	10%	610	729
↓								↓
4000								

®ADEMCO

Alarm Device Manufacturing Company
A Division of Pittway Corporation
165 Eileen way
Svosset, NY 11791

EXHIBIT 7

CFS8DL5814

Installation Instructions with FCC compliance statement.

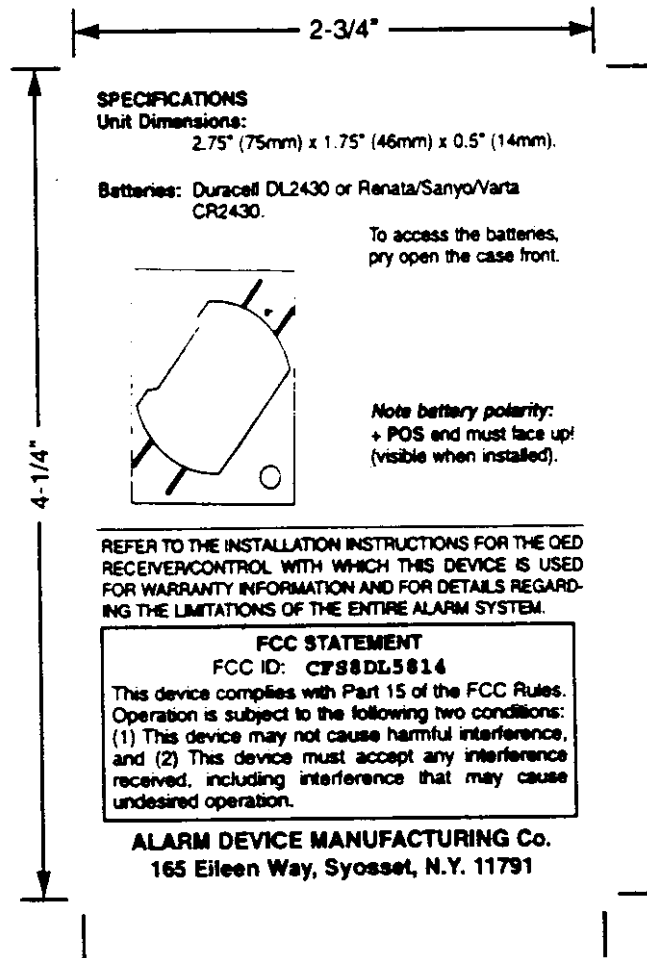


EXHIBIT 6

CFS8DL5814

Test Equipment List.

Model	Description	Calibrated	s/n
2383	Marconi Spectrum Analyzer	9/25/97	152048/006
2380	Marconi display	9/25/97	152046/056
Antenna	Roberts dipole 30 - 65 MHz	7/29/97	110
Antenna	Roberts dipole 65 - 180 MHz	7/29/97	110
Antenna	Roberts dipole 180 - 400 MHz	7/29/97	110
Antenna	Roberts dipole 400 - 1000 MHz	7/29/97	110
Antenna	Electrometrics Horn 1 - 18 GHz	7/24/97	6127
Cable	RG58U		-
2784	Tektronix spectrum analyzer	7/14/97	B010165