

Remote control unit




product function

- RGBW four-in-one high quality lamp
 - beads, 16 million color S14G ball
 - bubble built-in light guide column, light emitting uniform and
 - soft auxiliary lighting and RGBIC
 - magic color atmosphere lighting
 - double in one
 - Support keys
 - Equipped with antibacterial 433
 - remote control, remote control
 - operation supports timing, countdown, 20 scenarios of sharing and memory functions, color, brightness, optional
- The end and end are connected with terminals, variable shape and 360 degree rotary hook design, convenient suspension and installation.
- Waterproof interface, glue filling packaging, IP65 waterproof is suitable for indoor and outdoor use




product size

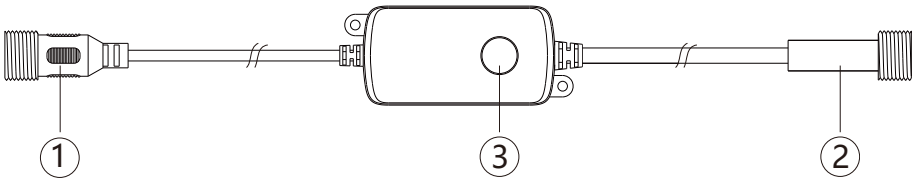

1 : Enter the DC3V 2: LED output

3 : Function button: boot-mode switch-shutdown long press more than 5 seconds to reset,

Remote control instructions

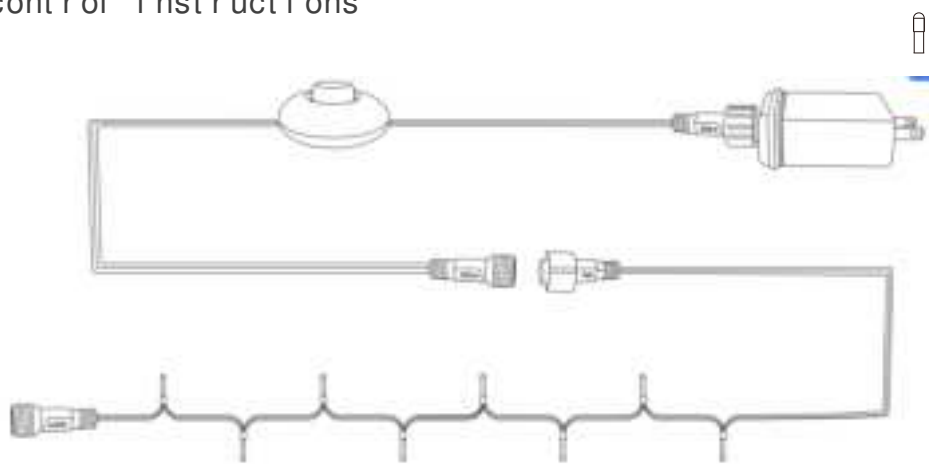

1	ON	Open
2	OFF	Close
3		Lumiance +
4		Lumiance-
5		Velocity +
6		Velocity-
7	Static Color	Red green blue yellow warm white Cyan, orange, and purple
8	Multi	8Fix the color
9	Random	8Species colors vary randomly
10	Strobe	Mode and background color switching
11	Breath	8The species color breath change switch
12	Flash	8The color rhythm change switch



- 1) Install battery: Remove the remote control battery cover, install 2 AAA batteries, and cover the battery cover.
- 2) Remote control operation: operate brightness, mode and other functions after successful pairing

Scope of application: products are widely used in eaves, villa exterior wall, courtyard, roof, pavilion, tent, woods and other landscape lighting function



Specification parameters

Model	DCWZC4-24TC		
Light body specifications	(1String) 15 meters and 15 lights	(2String) 30 meters and 30 lights	(3String) 45 meters and 45 lights
Ball bubble model	S14 bulb, E26 spiral lamp head		
Surface process	Standard Black (white)		
Remote control distance	≤20M		
Protocol	433		
Working voltage	3V		
Product power	12W	18W	27W
Power adapter	12V/12W	12V/18W	12V/36W
LED lamp bead	5050 The RGBW is four-in-one		
Colour temperature	3000K		
Show the finger	≥85		
Light quantity	140lm	280lm	420lm
Classification of waterproof	IP65		

Set list

name	(1String) 15 meters and 15 lights	(2String) 15 meters and 30 lights	(3String) 15 meters and 45 lights
Power adapter	12V12W*1	12V18W*1	12V36W*1
433t el econtrol ler	1	1	1
ri bbon	15	30	45
gum	1	1	1
i nst ruct i ons	1	1	1

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure statement

The device has been evaluatec to meel general RF exposure requirement. The device can be used in portable exposure condition without restriction.