

# FCC Measurement/Technical Report on

## AMKC4J-14H092-AA

FCC ID: L2CCT150F  
IC: 3659A-CT150F

**Test Report Reference:** MDE\_JABIL\_1701\_FCCa

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**

Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

**Geschäftsführer/**

**Managing Directors:**

Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

**Registergericht/registered:**

Düsseldorf HRB 75554

USt-Id.-Nr./VAT-No. DE203159652

Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas  
Group Company*

*www.7layers.com*

## Table of Contents

|          |                                                            |           |
|----------|------------------------------------------------------------|-----------|
| 1.1      | Applied Standards                                          | 3         |
| 1.2      | FCC-IC Correlation Table                                   | 4         |
| 1.3      | Measurement Summary / Signatures                           | 5         |
| <b>2</b> | <b>Administrative Data</b>                                 | <b>6</b>  |
| 2.1      | Testing Laboratory                                         | 6         |
| 2.2      | Project Data                                               | 6         |
| 2.3      | Applicant Data                                             | 6         |
| 2.4      | Manufacturer Data                                          | 6         |
| <b>3</b> | <b>Test object Data</b>                                    | <b>7</b>  |
| 3.1      | General EUT Description                                    | 7         |
| 3.2      | EUT Main components                                        | 7         |
| 3.3      | Ancillary Equipment                                        | 8         |
| 3.4      | Auxiliary Equipment                                        | 8         |
| 3.5      | EUT Setups                                                 | 8         |
| 3.6      | Operating Modes                                            | 9         |
| 3.7      | Product labelling                                          | 9         |
| <b>4</b> | <b>Test Results</b>                                        | <b>10</b> |
| 4.1      | Field strength of spurious radiation                       | 10        |
| <b>5</b> | <b>Test Equipment</b>                                      | <b>15</b> |
| <b>6</b> | <b>Antenna Factors, Cable Loss and Sample Calculations</b> | <b>18</b> |
| 6.1      | LISN R&S ESH3-Z5 (150 kHz – 30 MHz)                        | 18        |
| 6.2      | Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)                       | 19        |
| 6.3      | Antenna R&S HL562 (30 MHz – 1 GHz)                         | 20        |
| 6.4      | Antenna R&S HF907 (1 GHz – 18 GHz)                         | 21        |
| 6.5      | Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)                   | 22        |
| 6.6      | Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)                   | 23        |
| <b>7</b> | <b>Measurement Uncertainties</b>                           | <b>24</b> |
| <b>8</b> | <b>Photo Report</b>                                        | <b>24</b> |

## **Applied Standards and Test Summary**

### **1.1 APPLIED STANDARDS**

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 24, (10/1/16 Edition). The following subparts are applicable to the results in this test report.

Part 22, Subpart H – Cellular Radiotelephone Service

§ 22.913 – Effective radiated power limits

§ 22.917 – Emission limitations for cellular equipment

Part 24, Subpart E – Broadband PCS

§ 24.232 – Power and antenna height limits

§ 24.238 – Emission limitations for Broadband PCS equipment

The tests were selected and performed with reference to:

- FCC Public Notice 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01 v03,2017-10-27
- ANSI C63.26: 2015

### Summary Test Results:

**The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.**

## 1.2 FCC-IC CORRELATION TABLE

### Correlation of measurement requirements for Cellular Radiotelephone Service from FCC and ISED Canada

| Measurement                          | FCC reference                 | ISED reference                                                        |
|--------------------------------------|-------------------------------|-----------------------------------------------------------------------|
| Field strength of spurious radiation | §2.1053<br>§22.917<br>§24.236 | RSS-GEN Issue 4, 6.13<br>RSS-132 Issue 3: 5.5<br>RSS-133 Issue 6: 6.5 |

### 1.3 MEASUREMENT SUMMARY / SIGNATURES

#### 47 CFR CHAPTER I FCC PART 22 Subpart H

§2.1046, §22.913

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

**Final Result**

##### OP-Mode

##### Setup

##### FCC

##### IC

Frequency Band, Modulation, Channel, Frequency

WLAN 2.4GHz b-mode CH 1, eFDD5 QPSK CH 20525, SRD on  
314.9 MHz

S01\_AB01

Passed

Passed

#### 47 CFR CHAPTER I FCC PART 24 Subpart E

§2.1053, §24.238

Field strength of spurious radiation

The measurement was performed according to ANSI C63.26

**Final Result**

##### OP-Mode

##### Setup

##### FCC

##### IC

Frequency Band, Modulation, Channel, Frequency

WLAN 2.4GHz b-mode CH 1, eFDD2 QPSK CH 18900, SRD on  
902.3 MHz

S01\_AB01

Passed


Passed

#### COMMENT:

Only radiated spurious emissions for simultaneous transmission were performed.



(responsible for accreditation scope)  
Dipl.-Ing. Marco Kullik



(responsible for testing and report)  
B.Sc. Jens Dörwald



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

## 2 ADMINISTRATIVE DATA

### 2.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

FCC designation number: DE0015

This facility has been fully described in a report submitted to the ISED and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-01-00

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik

Report Template Version: 2017-07-14

### 2.2 PROJECT DATA

Responsible for testing and report: B.Sc. Jens Dörwald

Employees who performed the tests: documented internally at 7Layers

Date of Report: 2019-02-04

Testing Period: 2019-01-07 to 2019-01-07

### 2.3 APPLICANT DATA

Company Name: Jabil Circuit Belgium N.V.

Address: Kempische Steenweg 297  
Industriezone Noord 1000/1920  
B 3500 Hasselt

Contact Person: Mr. Kim Van Gelder

### 2.4 MANUFACTURER DATA

Company Name: Aptiv Service US LLC  
Address: 999 Republic Drive Suite 100  
Allen Park, MI 48101  
USA

Contact Person: Mr. William Hynes

### 3 TEST OBJECT DATA

#### 3.1 GENERAL EUT DESCRIPTION

|                                          |                                                                                                           |
|------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Kind of Device product description       | The EUT is an OBDII Dongle including Cellular technologies e.g. LTE, SRD RF-technologies and 2.4GHz WLAN. |
| Product name                             | AMKC4J-14H092-AA                                                                                          |
| Type                                     | -                                                                                                         |
| <b>Declared EUT data by the supplier</b> |                                                                                                           |
| Voltage Type                             | DC                                                                                                        |
| Voltage Level                            | 12 V                                                                                                      |

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**

#### 3.2 EUT MAIN COMPONENTS

| Sample Name      | Sample Code                                                                                                                                       | Description     |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| DE1102006        | ba01                                                                                                                                              | radiated sample |
| Sample Parameter | Value                                                                                                                                             |                 |
| Serial Number    | 1PD000MP                                                                                                                                          |                 |
| HW Version       | B1.6                                                                                                                                              |                 |
| SW Version       | Modem Firmware: SWI9X07Y_02.18.05.00 000000 jenkins<br>2018/07/19 17:40:21<br>Aurix Firmware: v0.87<br>Linux kernel : 3.2.6<br>Jabil_tools: 3.2.8 |                 |
| Comment          | -                                                                                                                                                 |                 |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device | Details<br>(Manufacturer, Type Model, OUT Code) | Description |
|--------|-------------------------------------------------|-------------|
| -      | -                                               | -           |

### 3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device | Details<br>(Manufacturer, HW, SW, S/N) | Description |
|--------|----------------------------------------|-------------|
| -      | -                                      | -           |

### 3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup    | Combination of EUTs | Description and Rationale |
|----------|---------------------|---------------------------|
| S01_AB01 | ba01                | radiated setup            |



## 3.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

### 3.6.1 TEST CHANNELS

- WLAN 2.4GHz b-mode CH 1, eFDD2 QPSK CH 18900, SRD on 902.3 MHz are transmitting simultaneously.
- WLAN 2.4GHz b-mode CH 1, eFDD5 QPSK CH 20525, SRD on 314.9 MHz are transmitting simultaneously.

## 3.7 PRODUCT LABELLING

### 3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

### 3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 4 TEST RESULTS

### 4.1 FIELD STRENGTH OF SPURIOUS RADIATION


Standard FCC Part 2.1051

**The test was performed according to:**  
ANSI C63.26

#### 4.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable radiated spurious emission measurements per § 2.1053

The EUT was connected to the test setup according to the following diagram:

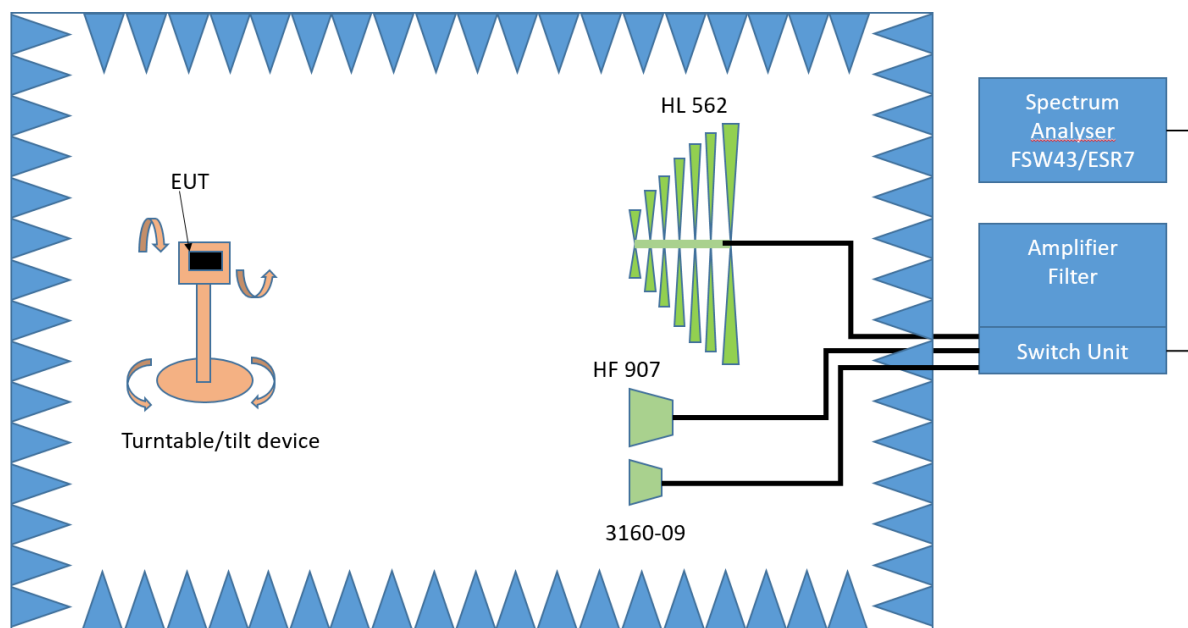

FCC Part 22/24/27/90; Industrial Signal Booster – Test Setup; Field Strength of Spurious Radiation

The test set-up was made in accordance to the general provisions of ANSI C63.4 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

#### 1. Measurement above 30 MHz and up to 1 GHz

##### Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit. Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 – 1000 MHz
- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### **Step 2: Adjustment measurement**

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^{\circ}$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $\pm 45^{\circ}$  around the determined value
- Height variation range:  $\pm 100$  cm around the determined value
- Antenna Polarisation: max. value determined in step 1

### **Step 3: Final measurement with QP detector**

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

## **3. Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

### **Step 1:**

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of  $90^{\circ}$ .

The turn table step size (azimuth angle) for the preliminary measurement is  $45^{\circ}$ .

### **Step 2:**

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^\circ$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

**Step 3:**

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

#### 4.1.2 TEST REQUIREMENTS / LIMITS

**FCC Part 2.1051; Measurement required: Spurious emissions at antenna terminal:**

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

**Part 22, Subpart H – Cellular Radiotelephone Service**

**§ 22 917 – Emission limitations for cellular equipment**

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

**Part 24, Subpart E – Personal Communication Service**

**§ 24 238 – Emission limitations for Broadband PCS equipment**

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

#### 4.1.3 TEST PROTOCOL

Ambient temperature: 24 °C  
Relative humidity: 35 %

| <b>eFDD5 CH 20525 &amp; WLAN-b CH 1 &amp; SRD on 314.9 MHz</b> |                         |          |              |                |                         |
|----------------------------------------------------------------|-------------------------|----------|--------------|----------------|-------------------------|
| Spurious Freq.<br>[MHz]                                        | Spurious Level<br>[dBm] | Detector | RBW<br>[kHz] | Limit<br>[dBm] | Margin to Limit<br>[dB] |
| -                                                              | -                       | -        | -            | -13.0          | - - -                   |

| <b>eFDD2 CH 18900 &amp; WLAN-b CH 1 &amp; SRD on 902.3 MHz</b> |                         |          |              |                |                         |
|----------------------------------------------------------------|-------------------------|----------|--------------|----------------|-------------------------|
| Spurious Freq.<br>[MHz]                                        | Spurious Level<br>[dBm] | Detector | RBW<br>[kHz] | Limit<br>[dBm] | Margin to Limit<br>[dB] |
| -                                                              | -                       | -        | -            | -13.0          | - - -                   |


Remark: Please see next sub-clause for the measurement plot.

#### COMMENT:


No (further) spurious emissions in the range 20dB below the limit were found, therefore no measurement values are reported in the tables.

#### 4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Frequency Band = eFDD5 CH 20525 & WLAN-b CH 1 & SRD on 314.9 MHz  
1GHz – 25 GHz

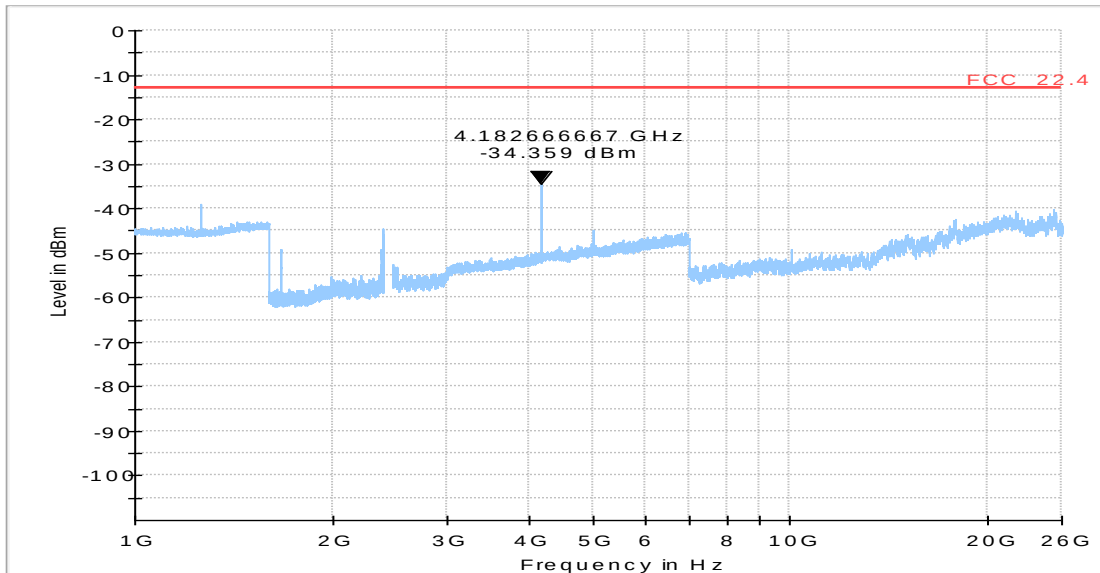

Frequency Band = eFDD2 CH 18900 & WLAN-b CH 1 & SRD on 902.3 MHz  
1GHz – 25 GHz

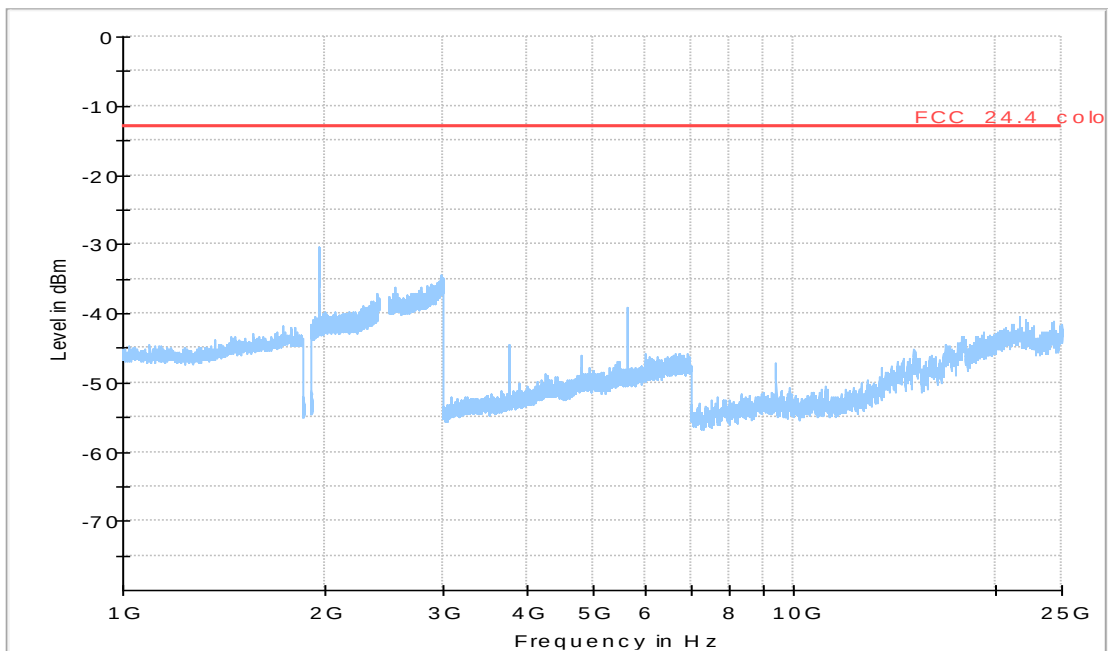

#### 4.1.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5 TEST EQUIPMENT

### 1 Radiated Emissions Lab to perform radiated emission tests

| Ref.No. | Device Name          | Description                                            | Manufacturer                       | Serial Number      | Last Calibration | Calibration Due |
|---------|----------------------|--------------------------------------------------------|------------------------------------|--------------------|------------------|-----------------|
| 1.1     | NRV-Z1               | Sensor Head A                                          | Rohde & Schwarz GmbH & Co. KG      | 827753/005         | 2018-07          | 2019-07         |
| 1.2     | MFS                  | Rubidium Frequency Normal MFS                          | Datum GmbH                         | 002                | 2018-10          | 2020-10         |
| 1.3     | Opus10 TPR (8253.00) | ThermoAirpressure Datalogger 13 (Environ)              | Lufft Mess- und Regeltechnik GmbH  | 13936              | 2017-04          | 2019-04         |
| 1.4     | ESW44                | EMI Test Receiver                                      | Rohde & Schwarz GmbH & Co. KG      | 101603             | 2018-05          | 2019-05         |
| 1.5     | Anechoic Chamber     | 10.58 x 6.38 x 6.00 m <sup>3</sup>                     | Frankonia                          | none               | 2018-06          | 2020-06         |
| 1.6     | FS-Z60               | Harmonic Mixer 40 - 60 GHz                             | Rohde & Schwarz Messgerätebau GmbH | 100178             | 2016-12          | 2019-12         |
| 1.7     | FS-Z220              | Harmonic Mixer 140 - 220 GHz                           | Rohde & Schwarz Messgerätebau GmbH | 101005             | 2017-03          | 2020-03         |
| 1.8     | SGH-05               | Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz) | RPG-Radiometer Physics GmbH        | 075                |                  |                 |
| 1.9     | HL 562               | Ultralog new biconicals                                | Rohde & Schwarz                    | 830547/003         | 2018-07          | 2021-07         |
| 1.10    | 5HC2700/12750-1.5-KK | High Pass Filter                                       | Trilithic                          | 9942012            |                  |                 |
| 1.11    | ASP 1.2/1.8-10 kg    | Antenna Mast                                           | Maturo GmbH                        | -                  |                  |                 |
| 1.12    | Fully Anechoic Room  | 8.80m x 4.60m x 4.05m (l x w x h)                      | Albatross Projects                 | P26971-647-001-PRB | 2018-06          | 2020-06         |
| 1.13    | Fluke 177            | Digital Multimeter 03 (Multimeter)                     | Fluke Europe B.V.                  | 86670383           | 2018-04          | 2020-04         |
| 1.14    | NRVD                 | Power Meter                                            | Rohde & Schwarz GmbH & Co. KG      | 828110/016         | 2018-07          | 2019-07         |
| 1.15    | HF 906               | Double-ridged horn                                     | Rohde & Schwarz                    | 357357/002         | 2018-09          | 2021-09         |
| 1.16    | JS4-18002600-32-5P   | Broadband Amplifier 18 GHz - 26 GHz                    | Miteq                              | 849785             |                  |                 |
| 1.17    | FSW 43               | Spectrum Analyzer                                      | Rohde & Schwarz                    | 103779             | 2016-12          | 2018-12         |
| 1.18    | 3160-09              | Standard Gain / Pyramidal Horn Antenna 26.5 GHz        | EMCO Elektronik GmbH               | 00083069           |                  |                 |

| Ref.No. | Device Name                   | Description                                            | Manufacturer                       | Serial Number          | Last Calibration | Calibration Due |
|---------|-------------------------------|--------------------------------------------------------|------------------------------------|------------------------|------------------|-----------------|
| 1.19    | SGH-19                        | Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz)   | RPG-Radiometer Physics GmbH        | 093                    |                  |                 |
| 1.20    | WHKX 7.0/18G-8SS              | High Pass Filter                                       | Wainwright                         | 09                     |                  |                 |
| 1.21    | 4HC1600/12750-1.5-KK          | High Pass Filter                                       | Trilithic                          | 9942011                |                  |                 |
| 1.22    | Chroma 6404                   | AC Power Source                                        | Chroma ATE INC.                    | 64040001304            |                  |                 |
| 1.23    | JS4-00102600-42-5A            | Broadband Amplifier 30 MHz - 26 GHz                    | Miteq                              | 619368                 |                  |                 |
| 1.24    | TT 1.5 WI                     | Turn Table                                             | Maturo GmbH                        | -                      |                  |                 |
| 1.25    | HL 562 Ultralog               | Log.-per. Antenna                                      | Rohde & Schwarz                    | 100609                 | 2016-04          | 2019-04         |
| 1.26    | HF 906                        | Double-ridged horn                                     | Rohde & Schwarz                    | 357357/001             | 2018-03          | 2021-03         |
| 1.27    | FS-Z325                       | Harmonic Mixer 220 - 325 GHz                           | Rohde & Schwarz Messgerätebau GmbH | 101006                 | 2017-03          | 2020-03         |
| 1.28    | 3160-10                       | Standard Gain / Pyramidal Horn Antenna 40 GHz          | EMCO Elektronik GmbH               | 00086675               |                  |                 |
| 1.29    | SGH-08                        | Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz)  | RPG-Radiometer Physics GmbH        | 064                    |                  |                 |
| 1.30    | SGH-12                        | Standard Gain / Pyramidal HornAntenna (60 - 90 GHz)    | RPG-Radiometer Physics GmbH        | 326                    |                  |                 |
| 1.31    | 5HC3500/18000-1.2-KK          | High Pass Filter                                       | Trilithic                          | 200035008              |                  |                 |
| 1.32    | FS-Z140                       | Harmonic Mixer 90 -140 GHz                             | Rohde & Schwarz Messgerätebau GmbH | 101007                 | 2017-02          | 2020-02         |
| 1.33    | HFH2-Z2                       | Loop Antenna                                           | Rohde & Schwarz                    | 829324/006             | 2018-01          | 2021-01         |
| 1.34    | Opus10 THI (8152.00)          | ThermoHygro Datalogger 12 (Environ)                    | Lufft Mess- und Regeltechnik GmbH  | 12482                  | 2017-03          | 2019-03         |
| 1.35    | ESR 7                         | EMI Receiver / Spectrum Analyzer                       | Rohde & Schwarz                    | 101424                 | 2016-11          | 2018-11         |
| 1.36    | JS4-00101800-35-5P            | Broadband Amplifier 30 MHz - 18 GHz                    | Miteq                              | 896037                 |                  |                 |
| 1.37    | AS 620 P                      | Antenna mast                                           | HD GmbH                            | 620/37                 |                  |                 |
| 1.38    | Tilt device Maturo (Rohacell) | Antrieb TD1.5-10kg                                     | Maturo GmbH                        | TD1.5-10kg/024/3790709 |                  |                 |
| 1.39    | SGH-03                        | Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz) | RPG-Radiometer Physics GmbH        | 060                    |                  |                 |



| Ref.No. | Device Name            | Description                         | Manufacturer                       | Serial Number      | Last Calibration | Calibration Due |
|---------|------------------------|-------------------------------------|------------------------------------|--------------------|------------------|-----------------|
| 1.40    | FS-Z90                 | Harmonic Mixer 60 - 90 GHz          | Rohde & Schwarz Messgerätebau GmbH | 101686             | 2017-03          | 2020-03         |
| 1.41    | ESIB 26                | Spectrum Analyzer                   | Rohde & Schwarz                    | 830482/004         | 2018-01          | 2020-01         |
| 1.42    | PAS 2.5 - 10 kg        | Antenna Mast                        | Maturo GmbH                        | -                  |                  |                 |
| 1.43    | AFS42-00101800-25-S-42 | Broadband Amplifier 25 MHz - 18 GHz | Miteq                              | 2035324            |                  |                 |
| 1.44    | AM 4.0                 | Antenna mast                        | Maturo GmbH                        | AM4.0/180/11920513 |                  |                 |
| 1.45    | HF 907                 | Double-ridged horn                  | Rohde & Schwarz                    | 102444             | 2018-07          | 2021-07         |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

## 6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency |  | Corr. | LISN<br>insertion<br>loss<br>ESH3-<br>Z5 | cable<br>loss<br>(incl. 10<br>dB<br>atten-<br>uator) |
|-----------|--|-------|------------------------------------------|------------------------------------------------------|
| MHz       |  | dB    | dB                                       | dB                                                   |
| 0.15      |  | 10.1  | 0.1                                      | 10.0                                                 |
| 5         |  | 10.3  | 0.1                                      | 10.2                                                 |
| 7         |  | 10.5  | 0.2                                      | 10.3                                                 |
| 10        |  | 10.5  | 0.2                                      | 10.3                                                 |
| 12        |  | 10.7  | 0.3                                      | 10.4                                                 |
| 14        |  | 10.7  | 0.3                                      | 10.4                                                 |
| 16        |  | 10.8  | 0.4                                      | 10.4                                                 |
| 18        |  | 10.9  | 0.4                                      | 10.5                                                 |
| 20        |  | 10.9  | 0.4                                      | 10.5                                                 |
| 22        |  | 11.1  | 0.5                                      | 10.6                                                 |
| 24        |  | 11.1  | 0.5                                      | 10.6                                                 |
| 26        |  | 11.2  | 0.5                                      | 10.7                                                 |
| 28        |  | 11.2  | 0.5                                      | 10.7                                                 |
| 30        |  | 11.3  | 0.5                                      | 10.8                                                 |

#### Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

## 6.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency<br>MHz | AF<br>HFH-Z2)<br>dB (1/m) | Corr.<br>dB | cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(outside<br>chamber)<br>dB | cable<br>loss 3<br>(switch<br>unit)<br>dB | cable<br>loss 4<br>(to<br>receiver)<br>dB | distance<br>corr.<br>(-40 dB/<br>decade)<br>dB | d <sub>Limit</sub><br>(meas.<br>distance<br>(limit)<br>m | d <sub>used</sub><br>(meas.<br>distance<br>(used)<br>m |
|------------------|---------------------------|-------------|----------------------------------------------|-----------------------------------------------|-------------------------------------------|-------------------------------------------|------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------|
| 0.009            | 20.50                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.01             | 20.45                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.015            | 20.37                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.02             | 20.36                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.025            | 20.38                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.03             | 20.32                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.05             | 20.35                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.08             | 20.30                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.1              | 20.20                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.2              | 20.17                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.3              | 20.14                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.49             | 20.12                     | -79.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -80                                            | 300                                                      | 3                                                      |
| 0.490001         | 20.12                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 0.5              | 20.11                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 0.8              | 20.10                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 1                | 20.09                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 2                | 20.08                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 3                | 20.06                     | -39.6       | 0.1                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 4                | 20.05                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 5                | 20.05                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 6                | 20.02                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 8                | 19.95                     | -39.5       | 0.2                                          | 0.1                                           | 0.1                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 10               | 19.83                     | -39.4       | 0.2                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 12               | 19.71                     | -39.4       | 0.2                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 14               | 19.54                     | -39.4       | 0.2                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 16               | 19.53                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 18               | 19.50                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 20               | 19.57                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 22               | 19.61                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 24               | 19.61                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 26               | 19.54                     | -39.3       | 0.3                                          | 0.1                                           | 0.2                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 28               | 19.46                     | -39.2       | 0.3                                          | 0.1                                           | 0.3                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |
| 30               | 19.73                     | -39.1       | 0.4                                          | 0.1                                           | 0.3                                       | 0.1                                       | -40                                            | 30                                                       | 3                                                      |

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + \text{Corr. (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

### 6.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

( $d_{\text{Limit}} = 3 \text{ m}$ )

| Frequency | AF<br>R&S<br>HL562 | Corr. |
|-----------|--------------------|-------|
| MHz       | dB (1/m)           | dB    |
| 30        | 18.6               | 0.6   |
| 50        | 6.0                | 0.9   |
| 100       | 9.7                | 1.2   |
| 150       | 7.9                | 1.6   |
| 200       | 7.6                | 1.9   |
| 250       | 9.5                | 2.1   |
| 300       | 11.0               | 2.3   |
| 350       | 12.4               | 2.6   |
| 400       | 13.6               | 2.9   |
| 450       | 14.7               | 3.1   |
| 500       | 15.6               | 3.2   |
| 550       | 16.3               | 3.5   |
| 600       | 17.2               | 3.5   |
| 650       | 18.1               | 3.6   |
| 700       | 18.5               | 3.6   |
| 750       | 19.1               | 4.1   |
| 800       | 19.6               | 4.1   |
| 850       | 20.1               | 4.4   |
| 900       | 20.8               | 4.7   |
| 950       | 21.1               | 4.8   |
| 1000      | 21.6               | 4.9   |

| cable<br>loss 1<br>(inside<br>chamber) | cable<br>loss 2<br>(outside<br>chamber) | cable<br>loss 3<br>(switch<br>unit) | cable<br>loss 4<br>(to<br>receiver) | distance<br>corr.<br>(-20 dB/<br>decade) | $d_{\text{Limit}}$<br>(meas.<br>distance<br>(limit)) | $d_{\text{used}}$<br>(meas.<br>distance<br>(used)) |
|----------------------------------------|-----------------------------------------|-------------------------------------|-------------------------------------|------------------------------------------|------------------------------------------------------|----------------------------------------------------|
| dB                                     | dB                                      | dB                                  | dB                                  | dB                                       | m                                                    | m                                                  |
| 0.29                                   | 0.04                                    | 0.23                                | 0.02                                | 0.0                                      | 3                                                    | 3                                                  |
| 0.39                                   | 0.09                                    | 0.32                                | 0.08                                | 0.0                                      | 3                                                    | 3                                                  |
| 0.56                                   | 0.14                                    | 0.47                                | 0.08                                | 0.0                                      | 3                                                    | 3                                                  |
| 0.73                                   | 0.20                                    | 0.59                                | 0.12                                | 0.0                                      | 3                                                    | 3                                                  |
| 0.84                                   | 0.21                                    | 0.70                                | 0.11                                | 0.0                                      | 3                                                    | 3                                                  |
| 0.98                                   | 0.24                                    | 0.80                                | 0.13                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.04                                   | 0.26                                    | 0.89                                | 0.15                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.18                                   | 0.31                                    | 0.96                                | 0.13                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.28                                   | 0.35                                    | 1.03                                | 0.19                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.39                                   | 0.38                                    | 1.11                                | 0.22                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.44                                   | 0.39                                    | 1.20                                | 0.19                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.55                                   | 0.46                                    | 1.24                                | 0.23                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.59                                   | 0.43                                    | 1.29                                | 0.23                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.67                                   | 0.34                                    | 1.35                                | 0.22                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.67                                   | 0.42                                    | 1.41                                | 0.15                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.87                                   | 0.54                                    | 1.46                                | 0.25                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.90                                   | 0.46                                    | 1.51                                | 0.25                                | 0.0                                      | 3                                                    | 3                                                  |
| 1.99                                   | 0.60                                    | 1.56                                | 0.27                                | 0.0                                      | 3                                                    | 3                                                  |
| 2.14                                   | 0.60                                    | 1.63                                | 0.29                                | 0.0                                      | 3                                                    | 3                                                  |
| 2.22                                   | 0.60                                    | 1.66                                | 0.33                                | 0.0                                      | 3                                                    | 3                                                  |
| 2.23                                   | 0.61                                    | 1.71                                | 0.30                                | 0.0                                      | 3                                                    | 3                                                  |

( $d_{\text{Limit}} = 10 \text{ m}$ )

|      |      |      |
|------|------|------|
| 30   | 18.6 | -9.9 |
| 50   | 6.0  | -9.6 |
| 100  | 9.7  | -9.2 |
| 150  | 7.9  | -8.8 |
| 200  | 7.6  | -8.6 |
| 250  | 9.5  | -8.3 |
| 300  | 11.0 | -8.1 |
| 350  | 12.4 | -7.9 |
| 400  | 13.6 | -7.6 |
| 450  | 14.7 | -7.4 |
| 500  | 15.6 | -7.2 |
| 550  | 16.3 | -7.0 |
| 600  | 17.2 | -6.9 |
| 650  | 18.1 | -6.9 |
| 700  | 18.5 | -6.8 |
| 750  | 19.1 | -6.3 |
| 800  | 19.6 | -6.3 |
| 850  | 20.1 | -6.0 |
| 900  | 20.8 | -5.8 |
| 950  | 21.1 | -5.6 |
| 1000 | 21.6 | -5.6 |

|      |      |      |      |       |    |   |
|------|------|------|------|-------|----|---|
| 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

#### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$   
 $U$  = Receiver reading  
 $\text{AF}$  = Antenna factor  
 $\text{Corr.}$  = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)  
 $\text{distance correction} = -20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$   
 Linear interpolation will be used for frequencies in between the values in the table.  
 Tables show an extract of values.

#### 6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency | AF<br>R&S<br>HF907 | Corr. |
|-----------|--------------------|-------|
| MHz       | dB (1/m)           | dB    |
| 1000      | 24.4               | -19.4 |
| 2000      | 28.5               | -17.4 |
| 3000      | 31.0               | -16.1 |
| 4000      | 33.1               | -14.7 |
| 5000      | 34.4               | -13.7 |
| 6000      | 34.7               | -12.7 |
| 7000      | 35.6               | -11.0 |

| cable<br>loss 1<br>(relay +<br>cable<br>inside<br>chamber) | cable<br>loss 2<br>(outside<br>chamber) | cable<br>loss 3<br>(switch<br>unit,<br>atten-<br>uator &<br>pre-amp) | cable<br>loss 4 (to<br>receiver) |  |  |
|------------------------------------------------------------|-----------------------------------------|----------------------------------------------------------------------|----------------------------------|--|--|
| dB                                                         | dB                                      | dB                                                                   | dB                               |  |  |
| 0.99                                                       | 0.31                                    | -21.51                                                               | 0.79                             |  |  |
| 1.44                                                       | 0.44                                    | -20.63                                                               | 1.38                             |  |  |
| 1.87                                                       | 0.53                                    | -19.85                                                               | 1.33                             |  |  |
| 2.41                                                       | 0.67                                    | -19.13                                                               | 1.31                             |  |  |
| 2.78                                                       | 0.86                                    | -18.71                                                               | 1.40                             |  |  |
| 2.74                                                       | 0.90                                    | -17.83                                                               | 1.47                             |  |  |
| 2.82                                                       | 0.86                                    | -16.19                                                               | 1.46                             |  |  |

| Frequency | AF<br>R&S<br>HF907 | Corr. |
|-----------|--------------------|-------|
| MHz       | dB (1/m)           | dB    |
| 3000      | 31.0               | -23.4 |
| 4000      | 33.1               | -23.3 |
| 5000      | 34.4               | -21.7 |
| 6000      | 34.7               | -21.2 |
| 7000      | 35.6               | -19.8 |

| cable<br>loss 1<br>(relay<br>inside<br>chamber) | cable<br>loss 2<br>(inside<br>chamber) | cable<br>loss 3<br>(outside<br>chamber) | cable<br>loss 4<br>(switch<br>unit,<br>atten-<br>uator &<br>pre-amp) | cable<br>loss 5 (to<br>receiver) | used<br>for<br>FCC<br>15.247 |
|-------------------------------------------------|----------------------------------------|-----------------------------------------|----------------------------------------------------------------------|----------------------------------|------------------------------|
| dB                                              | dB                                     | dB                                      | dB                                                                   | dB                               |                              |
| 0.47                                            | 1.87                                   | 0.53                                    | -27.58                                                               | 1.33                             |                              |
| 0.56                                            | 2.41                                   | 0.67                                    | -28.23                                                               | 1.31                             |                              |
| 0.61                                            | 2.78                                   | 0.86                                    | -27.35                                                               | 1.40                             |                              |
| 0.58                                            | 2.74                                   | 0.90                                    | -26.89                                                               | 1.47                             |                              |
| 0.66                                            | 2.82                                   | 0.86                                    | -25.58                                                               | 1.46                             |                              |

| Frequency | AF<br>R&S<br>HF907 | Corr. |
|-----------|--------------------|-------|
| MHz       | dB (1/m)           | dB    |
| 7000      | 35.6               | -57.3 |
| 8000      | 36.3               | -56.3 |
| 9000      | 37.1               | -55.3 |
| 10000     | 37.5               | -56.2 |
| 11000     | 37.5               | -55.3 |
| 12000     | 37.6               | -53.7 |
| 13000     | 38.2               | -53.5 |
| 14000     | 39.9               | -56.3 |
| 15000     | 40.9               | -54.1 |
| 16000     | 41.3               | -54.1 |
| 17000     | 42.8               | -54.4 |
| 18000     | 44.2               | -54.7 |

| cable<br>loss 1<br>(relay<br>inside<br>chamber) | cable<br>loss 2<br>(High<br>Pass) | cable<br>loss 3<br>(pre-<br>amp) | cable<br>loss 4<br>(inside<br>chamber) | cable<br>loss 5<br>(outside<br>chamber) | cable<br>loss 6<br>(to<br>receiver) |
|-------------------------------------------------|-----------------------------------|----------------------------------|----------------------------------------|-----------------------------------------|-------------------------------------|
| dB                                              | dB                                | dB                               | dB                                     | dB                                      | dB                                  |
| 0.56                                            | 1.28                              | -62.72                           | 2.66                                   | 0.94                                    | 1.46                                |
| 0.69                                            | 0.71                              | -61.49                           | 2.84                                   | 1.00                                    | 1.53                                |
| 0.68                                            | 0.65                              | -60.80                           | 3.06                                   | 1.09                                    | 1.60                                |
| 0.70                                            | 0.54                              | -61.91                           | 3.28                                   | 1.20                                    | 1.67                                |
| 0.80                                            | 0.61                              | -61.40                           | 3.43                                   | 1.27                                    | 1.70                                |
| 0.84                                            | 0.42                              | -59.70                           | 3.53                                   | 1.26                                    | 1.73                                |
| 0.83                                            | 0.44                              | -59.81                           | 3.75                                   | 1.32                                    | 1.83                                |
| 0.91                                            | 0.53                              | -63.03                           | 3.91                                   | 1.40                                    | 1.77                                |
| 0.98                                            | 0.54                              | -61.05                           | 4.02                                   | 1.44                                    | 1.83                                |
| 1.23                                            | 0.49                              | -61.51                           | 4.17                                   | 1.51                                    | 1.85                                |
| 1.36                                            | 0.76                              | -62.36                           | 4.34                                   | 1.53                                    | 2.00                                |
| 1.70                                            | 0.53                              | -62.88                           | 4.41                                   | 1.55                                    | 1.91                                |

#### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

## 6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency | AF<br>EMCO<br>3160-09 | Corr. | cable<br>loss 1<br>(inside<br>chamber) | cable<br>loss 2<br>(pre-<br>amp) | cable<br>loss 3<br>(inside<br>chamber) | cable<br>loss 4<br>(switch<br>unit) | cable<br>loss 5<br>(to<br>receiver) |
|-----------|-----------------------|-------|----------------------------------------|----------------------------------|----------------------------------------|-------------------------------------|-------------------------------------|
| MHz       | dB (1/m)              | dB    | dB                                     | dB                               | dB                                     | dB                                  | dB                                  |
| 18000     | 40.2                  | -23.5 | 0.72                                   | -35.85                           | 6.20                                   | 2.81                                | 2.65                                |
| 18500     | 40.2                  | -23.2 | 0.69                                   | -35.71                           | 6.46                                   | 2.76                                | 2.59                                |
| 19000     | 40.2                  | -22.0 | 0.76                                   | -35.44                           | 6.69                                   | 3.15                                | 2.79                                |
| 19500     | 40.3                  | -21.3 | 0.74                                   | -35.07                           | 7.04                                   | 3.11                                | 2.91                                |
| 20000     | 40.3                  | -20.3 | 0.72                                   | -34.49                           | 7.30                                   | 3.07                                | 3.05                                |
| 20500     | 40.3                  | -19.9 | 0.78                                   | -34.46                           | 7.48                                   | 3.12                                | 3.15                                |
| 21000     | 40.3                  | -19.1 | 0.87                                   | -34.07                           | 7.61                                   | 3.20                                | 3.33                                |
| 21500     | 40.3                  | -19.1 | 0.90                                   | -33.96                           | 7.47                                   | 3.28                                | 3.19                                |
| 22000     | 40.3                  | -18.7 | 0.89                                   | -33.57                           | 7.34                                   | 3.35                                | 3.28                                |
| 22500     | 40.4                  | -19.0 | 0.87                                   | -33.66                           | 7.06                                   | 3.75                                | 2.94                                |
| 23000     | 40.4                  | -19.5 | 0.88                                   | -33.75                           | 6.92                                   | 3.77                                | 2.70                                |
| 23500     | 40.4                  | -19.3 | 0.90                                   | -33.35                           | 6.99                                   | 3.52                                | 2.66                                |
| 24000     | 40.4                  | -19.8 | 0.88                                   | -33.99                           | 6.88                                   | 3.88                                | 2.58                                |
| 24500     | 40.4                  | -19.5 | 0.91                                   | -33.89                           | 7.01                                   | 3.93                                | 2.51                                |
| 25000     | 40.4                  | -19.3 | 0.88                                   | -33.00                           | 6.72                                   | 3.96                                | 2.14                                |
| 25500     | 40.5                  | -20.4 | 0.89                                   | -34.07                           | 6.90                                   | 3.66                                | 2.22                                |
| 26000     | 40.5                  | -21.3 | 0.86                                   | -35.11                           | 7.02                                   | 3.69                                | 2.28                                |
| 26500     | 40.5                  | -21.1 | 0.90                                   | -35.20                           | 7.15                                   | 3.91                                | 2.36                                |

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 6.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency<br>GHz | AF<br>EMCO<br>3160-10<br>dB (1/m) | Corr.<br>dB | cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(outside<br>chamber)<br>dB | cable<br>loss 3<br>(switch<br>unit)<br>dB | cable<br>loss 4<br>(to<br>receiver)<br>dB | distance<br>corr.<br>(-20 dB/<br>decade)<br>dB | d <sub>Limit</sub><br>(meas.<br>distance<br>(limit)<br>m | d <sub>used</sub><br>(meas.<br>distance<br>(used)<br>m |
|------------------|-----------------------------------|-------------|----------------------------------------------|-----------------------------------------------|-------------------------------------------|-------------------------------------------|------------------------------------------------|----------------------------------------------------------|--------------------------------------------------------|
| 26.5             | 43.4                              | -11.2       | 4.4                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 27.0             | 43.4                              | -11.2       | 4.4                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 28.0             | 43.4                              | -11.1       | 4.5                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 29.0             | 43.5                              | -11.0       | 4.6                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 30.0             | 43.5                              | -10.9       | 4.7                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 31.0             | 43.5                              | -10.8       | 4.7                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 32.0             | 43.5                              | -10.7       | 4.8                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 33.0             | 43.6                              | -10.7       | 4.9                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 34.0             | 43.6                              | -10.6       | 5.0                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 35.0             | 43.6                              | -10.5       | 5.1                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 36.0             | 43.6                              | -10.4       | 5.1                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 37.0             | 43.7                              | -10.3       | 5.2                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 38.0             | 43.7                              | -10.2       | 5.3                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 39.0             | 43.7                              | -10.2       | 5.4                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |
| 40.0             | 43.8                              | -10.1       | 5.5                                          |                                               |                                           |                                           | -15.6                                          | 3                                                        | 0.5                                                    |

### Sample calculation

$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 7 MEASUREMENT UNCERTAINTIES

| Test Case(s)                                                                                    | Parameter          | Uncertainty                    |
|-------------------------------------------------------------------------------------------------|--------------------|--------------------------------|
| - Field strength of spurious radiation                                                          | Power              | $\pm 5.5$ dB                   |
| - Out-of-band rejection<br>- Occupied Bandwidth<br>- Input versus output spectrum               | Power<br>Frequency | $\pm 2.9$ dB<br>$\pm 11.2$ kHz |
| - Effective radiated power, mean output power and zone enhancer gain<br>- Peak to Average Ratio | Power              | $\pm 2.2$ dB                   |
| - Out-of-band emission limits<br>- Conducted Spurious Emissions at Antenna Terminal             | Power<br>Frequency | $\pm 2.2$ dB<br>$\pm 11.2$ kHz |

## 8 PHOTO REPORT

Please see separate photo report.