



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.381.1520

<http://www.element.com>

MEASUREMENT REPORT

FCC Part 15.407 802.11a/ax WiFi 6GHz (OFDM)

Applicant Name:

Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:

1/6/2025 - 3/5/2025

Test Report Issue Date:

3/6/2025

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2501020001-20-R1.A3L

FCC ID:

A3LSMG766U

APPLICANT:

Samsung Electronics Co., Ltd.

Application Type:

Certification

Model:

SM-G766U

Additional Model:

SM-G766U1

EUT Type:

Portable Handset

Frequency Range:

5935 – 7115MHz

Modulation Type:

OFDM

FCC Classification:

15E 6GHz Low Power Dual Client (6CD)

FCC Rule Part(s):

Part 15 Subpart E (15.407)

Test Procedure(s):

ANSI C63.10-2013, KDB 987594 D02 v03

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2501020001-20-R1.A3L) supersedes and replaces all previously issued test reports on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 1 of 99

© 2025 ELEMENT

V 11.2 9/11/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

T A B L E O F C O N T E N T S

1.0	INTRODUCTION.....	5
1.1	Scope.....	5
1.2	Element Test Location.....	5
1.3	Test Facility / Accreditations.....	5
2.0	PRODUCT INFORMATION.....	6
2.1	Equipment Description	6
2.2	Device Capabilities.....	6
2.3	Antenna Description	9
2.4	Test Configuration	9
2.5	Software and Firmware	10
2.6	EMI Suppression Device(s) / Modifications	10
3.0	DESCRIPTION OF TESTS	11
3.1	Evaluation Procedure.....	11
3.2	AC Line Conducted Emissions.....	11
3.3	Radiated Emissions.....	12
3.4	Environmental Conditions	12
4.0	ANTENNA REQUIREMENTS.....	13
5.0	MEASUREMENT UNCERTAINTY.....	14
6.0	TEST EQUIPMENT CALIBRATION DATA.....	15
7.0	TEST RESULTS.....	16
7.1	Summary.....	16
7.2	26dB Bandwidth Measurement.....	18
7.2.1	MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 5)	21
7.2.2	MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 5)	26
7.3	UNII Output Power Measurement	31
7.4	Maximum Power Spectral Density.....	35
7.4.1	MIMO Antenna-1 Power Spectral Density Measurement - (UNII Band 5).....	38
7.4.2	MIMO Antenna-2 Power Spectral Density Measurement - (UNII Band 5).....	43
7.5	In-Band Emissions	49
7.5.1	MIMO Antenna-1 In-Band Emission Plot Measurement - (UNII Band 5).....	53
7.5.2	MIMO Antenna-2 In-Band Emission Plot Measurement - (UNII Band 5).....	58
7.6	Contention Based Protocol.....	63
7.6.1	AWGN Plots.....	67
7.6.2	CBP Timing Plots.....	68
7.6.3	Channel Move Plots.....	76
7.7	Radiated Emission Measurements.....	78
7.7.1	MIMO Radiated Spurious Emission Measurements.....	82
7.7.2	MIMO Radiated Band Edge Measurements (20MHz BW)	89
7.7.3	MIMO Radiated Band Edge Measurements (40MHz BW)	90
7.7.4	MIMO Radiated Band Edge Measurements (80MHz BW)	91

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 2 of 99



7.7.5 MIMO Radiated Band Edge Measurements (160MHz BW) 92

7.8 Line Conducted Test Data.....93

8.0 CONCLUSION 99

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 3 of 99

MEASUREMENT REPORT

Channel Bandwidth [MHz]	UNII Band	Tx Frequency [MHz]	MIMO	
			Max. Power [mW]	Max. Power [dBm]
20	5	5935 - 6415	19.19	12.83
	6	6435 - 6515	5.24	7.19
	7	6535 - 6875	26.30	14.20
	8	6895 - 7115	5.35	7.28
40	5	5965 - 6405	26.73	14.27
	6	6445 - 6525	9.79	9.91
	7	6565 - 6845	25.82	14.12
	8	6885 - 7085	10.16	10.07
80	5	5985 - 6385	27.16	14.34
	6	6465	19.01	12.79
	7	6545 - 6865	24.55	13.90
	8	6945 - 7025	21.23	13.27
160	5	6025 - 6345	26.12	14.17
	6	6505	24.04	13.81
	7	6665 - 6825	26.49	14.23
	8	6985	24.38	13.87

EUT Overview - EIRP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 4 of 99

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

Measurements were conducted at the Element laboratory(ies) indicated in Section 1.3 below. All measurement facilities are compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A. ("MD")

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 5 of 99

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Electronics Co., Ltd. Portable Handset FCC ID: A3LSMG766U**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter while operating in the 6GHz band in dual client (LPI+SP) mode.

Test Device Serial No.: 2120M, 2115M, 2110M, 2575M, 2605M, 2528M

2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, 850/1900 GSM/GPRS/EDGE, Multi-Band LTE, MultiBand 5G NR (FR1), 802.11b/g/n/ac/ax WLAN, 802.11a/n/ac/ax UNII (5GHz and 6GHz), Bluetooth (1x, EDR, LE), NFC

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
2	5935	97	6435	117	6535	189	6895
:	:	:	:	:	:	:	:
45	6175	105	6475	149	6695	209	6995
:	:	:	:	:	:	:	:
93	6415	113	6515	185	6875	233	7115

Table 2-1. 802.11a/ax (20MHz) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
3	5965	99	6445	123	6565	187	6885
:	:	:	:	:	:	:	:
43	6165	107	6485	155	6725	211	7005
:	:	:	:	:	:	:	:
91	6405	115	6525	179	6845	227	7085

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
7	5985	103	6465	119	6545	199	6945
:	:			:	:	:	:
39	6145			151	6705	215	7025
:	:			:	:		
87	6385			183	6865		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 6 of 99

Band 5		Band 6		Band 7		Band 8	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
15	6025	111	6505	143	6665	207	6985
47	6185			175	6825		
79	6345						

Table 2-4. 802.11ax (160MHz BW) Frequency / Channel Operations

Notes:

- 6GHz NII operation is possible in 20MHz, 40MHz, 80MHz, and 160MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

802.11 Mode/Band		MIMO (1+2)	
		Duty Cycle [%]	Radiated DCCF [dB]
6GHz	a	99.56	N/A
	ax (HE20)	99.56	N/A
	ax (HE40)	99.42	N/A
	ax (HE80)	99.56	N/A
	ax (HE160)	99.56	N/A

Table 2-5. Measured Duty Cycles

- The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		CDD		SDM	
		ANT1	ANT2	ANT1	ANT2
6GHz	11a	✓	✓	✗	✗
	11ax	✓	✓	✓	✓

Table 2-6. Antenna / Technology Configurations

✓ = Support; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

CDD = Cyclic Delay Diversity – 2Tx Function

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 7 of 99

3. The device supports the following data rates (shown in Mbps):

802.11a	OFDM (802.11ax)											
20MHz	20MHz			40MHz			80MHz			160MHz		
	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI	0.8μs GI	1.6μs GI	3.2μs GI
6	8.6	8.1	7.3	17.2	16.3	14.6	36	34	30.6	72.1	68.1	61.3
9	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
12	25.8	24.4	21.9	51.6	48.8	43.9	108.1	102.1	91.9	216.2	204.2	183.8
18	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
24	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
36	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
48	77.4	73.1	65.8	154.9	146.3	131.6	324.3	306.3	275.6	648.5	612.5	551.3
54	86	81.3	73.1	172.1	162.5	146.3	360.3	340.3	306.3	720.6	680.6	612.5
	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
	114.7	108.3	97.5	229.4	216.7	195	480.4	453.7	408.3	960.8	907.4	816.7
	129	121.9	109.7	258.1	243.8	219.4	540.4	510.4	459.4	1080.9	1020.8	918.8
	143.4	135.4	121.9	286.8	270.8	243.8	600.5	567.1	510.4	1201	1134.3	1020.8
	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
6	17.2	16.3	14.6	34.4	32.5	29.3	72.1	68.1	61.3	144.1	136.1	122.5
9	34.4	32.5	29.3	68.8	65	58.5	144.1	136.1	122.5	288.2	272.2	245
12	51.6	48.8	43.9	103.2	97.5	87.8	216.2	204.2	183.8	432.4	408.3	367.5
18	68.8	65	58.5	137.6	130	117	288.2	272.2	245	576.5	544.4	490
24	103.2	97.5	87.8	206.5	195	175.5	432.4	408.3	367.5	864.7	816.7	735
36	137.6	130	117	275.3	260	234	576.5	544.4	490	1152.9	1088.9	980
48	154.9	146.3	131.6	309.7	292.5	263.3	648.5	612.5	551.3	1297.1	1225	1102.5
54	172.1	162.5	146.3	344.1	325	292.5	720.6	680.6	612.5	1441.2	1361.1	1225
	206.5	195	175.5	412.9	390	351	864.7	816.7	735	1729.4	1633.3	1470
	229.4	216.7	195	458.8	433.3	390	960.8	907.4	816.7	1921.6	1814.8	1633.3
	258.1	243.8	219.4	516.2	487.5	438.8	1080.9	1020.8	918.8	2161.8	2041.7	1837.5
	286.8	270.8	243.8	573.5	541.7	487.5	1201	1134.3	1020.8	2402	2268.5	2041.7
	309.7	292.5	263.3	619.4	585	526.5	1297.1	1225	1102.5	2594.1	2450	2205
	344.1	325	292.5	688.2	650	585	1441.2	1361.1	1225	2882.4	2722.2	2450

Table 2-7. Supported Data Rates

4. The device supports either Standard Power (SP), Low Power Indoor (LPI), and Very Low Power (VLP) operation in the following UNII bands:

UNII Band	Standard Power (SP)	Low Power Indoor (LPI)	Very Low Power (VLP)
UNII 5	✓	✓	✓
UNII 6	✗	✓	✗
UNII 7	✓	✓	✓
UNII 8	✗	✓	✗

Table 2-8. Power Operation

✓ = Support; ✗ = NOT Support

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 8 of 99



2.3 Antenna Description

The following antenna gains are used in this device per the "Unlicensed Band Antenna Gain" document provided by the client. This document is also included in the filing as a public exhibit.

	Ant1 Peak Gain [dBi]	Ant2 Peak Gain [dBi]	Directional Gain [dBi]
5925 – 6425 MHz	-8.40	-8.40	-5.39
6425 – 6525 MHz	-8.60	-8.70	-5.64
6525 – 6875 MHz	-8.50	-8.50	-5.49
6875 – 7125 MHz	-8.30	-8.60	-5.44

Table 2-9. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 987594D02 v03. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, 7.5 and 7.6 for antenna port conducted emissions test setups.

This device supports operation under control of either a low-power indoor access point or standard power access point or very low power access point

This device operates in the 5.925-7.125 GHz band when under control of an indoor access point. Additionally, the device may operate in the 5.925-6.425 GHz and 6.525-6.875 GHz bands when under control of a standard power access point or very lower power access point.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 9 of 99



2.5 Software and Firmware

The test was conducted with firmware version C766USQ0AXL3 installed on the EUT.

2.6 EMI Suppression Device(s) / Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 10 of 99

© 2025 ELEMENT

V 11.2 9/11/2024

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 987594 D02 v03 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 11 of 99

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed for them to warm up to their normal operating condition. The test setup was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precautions were taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height were noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 12 of 99

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 13 of 99

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Contention Based Protocol Conducted Measurements	0.86
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

Table 5-1. Measurement Uncertainty Budget

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 14 of 99

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	4/2/2024	Annual	4/2/2025	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	4/2/2024	Annual	4/2/2025	WL25-2
-	WL40-1	Conducted Cable Set (40GHz)	4/2/2024	Annual	4/2/2025	WL40-1
-	MD 1M 18-40	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	MD 1M 18-40
-	AP1-002	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	AP1-002
-	ETS-001	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-001
-	ETS-002	EMC Cable and Switch System	4/2/2024	Annual	4/2/2025	ETS-002
ETS-Lindgren	3116C	Horn Antenna (18-40GHz)	2/27/2023	Biennial	2/27/2025	218893
Rohde & Schwarz	TC-TA18	Vivaldi Antenna	2/23/2023	Biennial	2/23/2025	26040036
Rohde & Schwarz	FSW26	Spectrum Analyzer (26.5GHz)	3/8/2024	Annual	3/8/2025	103187
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	10/16/2024	Annual	10/16/2025	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	11/25/2024	Annual	11/25/2025	100348
Pasternack	NMLC-2	Line Conducted Emissions Cable	4/2/2024	Annual	4/2/2025	NMLC-2
Rohde & Schwarz	ENV216	Two-Line V-Network	1/31/2023	Biennial	1/31/2025	101379
Sunol	JB6	Bi-Log Antenna (20M-6GHz)	3/2/2023	Biennial	3/2/2025	A082816
Sunol	JB5	Bi-Log Antenna (20M-5GHz)	9/11/2024	Biennial	9/11/2026	A051107
Anritsu	MA24408A	Microwave Peak Power Sensor	5/21/2024	Annual	5/21/2025	11675
Anritsu	MA24408A	Microwave Peak Power Sensor	4/10/2024	Annual	4/10/2025	12798
Rohde & Schwarz	ESW44	EMI Test Receiver (44GHz)	4/5/2024	Annual	4/5/2025	101716
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	4/9/2024	Annual	4/9/2025	MY52350166
Keysight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Keysight Technologies	N9030A	PXA Signal Analyzer	2/29/2024	Annual	3/1/2025	MY55410501
Keysight Technologies	N9030B	PXA Signal Analyzer	9/19/2024	Annual	9/19/2025	MY57141001
Rohde & Schwarz	SMW200A	Vector Signal Generator	4/4/2024	Annual	4/4/2025	109456

Table 6-1. Test Equipment Calibration Table – MD

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 15 of 99

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMG766U
 FCC Classification: 15E 6GHz Low Power Dual Client (6CD)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1046, 15.407(a)(12)	Maximum Conducted Output Power	N/A	CONDUCTED	PASS	Section 7.3
15.407(a)(8), 15.407(a)(7)	Maximum Radiated Output Power	< 24dBm over the frequency band of operation <30dBm over the frequency band of operation when connecting to a standard power access point		PASS	Section 7.3
2.1049, 15.407(a)(11)	Occupied Bandwidth/ 26dB Bandwidth	99% of the occupied bandwidth of any channel must be contained within each of its respective U-NII sub bands. The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.		PASS	Section 7.2
15.407(a)(8), 15.407(a)(7)	Maximum Power Spectral Density	< -1dBm/MHz e.i.r.p. <17dBm/MHz when operating with a standard power access point		PASS	Section 7.4
15.407(b)(7)	In-Band Emissions	EUT must meet the limits detailed in 15.407(b)(7)		PASS	Section 7.5
15.407(d)(6)	Contention Based Protocol	EUT must detect AWGN signal with 90% (or better) certainty	RADIATED	PASS	Section 7.6
15.407(b)(6)	Undesirable Emissions	< -27dBm/MHz e.i.r.p. outside of the 5.925 – 7.125GHz band		PASS	Section 7.7
15.205, 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS	Section 7.7
15.407(b)(9)	AC Conducted Emissions (150kHz – 30MHz)	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 7.8

Table 7-1. Summary of Test Results

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 16 of 99

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) Per 15.407(a)(7), a device operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands must not have the maximum power spectral density exceed 17 dBm/MHz e.i.r.p., must limit the maximum e.i.r.p. over the frequency band of operation does not exceed 30 dBm, and must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.
- 5) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "EMC Software Tool" Version 2.3.0.
- 6) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is Element "Chamber Automation," Version 1.6.1.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 17 of 99

7.2 26dB Bandwidth Measurement

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. All cases were investigated; a subset of the taken plots were included to represent relevant settings and measurements.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 18 of 99

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]
Band 5	5935	2	a	19.69	18.77
	6175	45	a	19.55	18.93
	6415	93	a	19.78	19.10
	5935	2	ax (20MHz)	21.07	21.20
	6175	45	ax (20MHz)	20.73	20.90
	6415	93	ax (20MHz)	20.79	20.76
	5695	3	ax (40MHz)	40.74	40.91
	6165	43	ax (40MHz)	40.99	40.68
	6405	91	ax (40MHz)	40.75	40.42
	5985	7	ax (80MHz)	82.37	82.59
	6145	39	ax (80MHz)	83.14	82.64
	6385	87	ax (80MHz)	82.95	82.47
	6025	15	ax (160MHz)	164.32	165.25
	6185	47	ax (160MHz)	165.36	165.43
	6345	79	ax (160MHz)	164.63	165.50
Band 6	6435	97	a	19.47	19.23
	6475	105	a	19.71	18.96
	6515	113	a	19.38	19.11
	6345	97	ax (20MHz)	20.84	20.92
	6475	105	ax (20MHz)	20.66	20.67
	6515	113	ax (20MHz)	20.93	21.30
	6445	99	ax (40MHz)	40.78	40.91
	6485	107	ax (40MHz)	40.64	40.45
	6525	115	ax (40MHz)	40.65	40.82
	6465	103	ax (80MHz)	82.84	82.44
Band 7	6505	111	ax (160MHz)	166.19	166.00
	6535	117	a	19.43	19.50
	6695	149	a	19.18	19.03
	6875	185	a	19.05	19.15
	6535	117	ax (20MHz)	21.02	20.96
	6695	149	ax (20MHz)	21.62	20.94
	6875	185	ax (20MHz)	21.10	21.06
	6565	123	ax (40MHz)	40.91	40.35
	6725	155	ax (40MHz)	40.97	40.84
	6885	179	ax (40MHz)	40.75	40.62
	6545	119	ax (80MHz)	82.78	83.23
	6705	151	ax (80MHz)	82.72	82.06
	6865	183	ax (80MHz)	82.43	82.41
Band 8	6665	143	ax (160MHz)	166.21	166.01
	6825	175	ax (160MHz)	165.48	165.09
	6895	189	a	19.21	18.79
	6995	209	a	19.15	18.67
	7115	233	a	19.78	18.95
	6895	189	ax (20MHz)	20.64	20.75
	6995	209	ax (20MHz)	21.04	20.93
	7115	233	ax (20MHz)	20.80	20.78
	6925	187	ax (40MHz)	40.43	40.92
	7005	211	ax (40MHz)	40.79	40.67
	7085	227	ax (40MHz)	40.32	40.62
	6945	199	ax (80MHz)	82.56	82.66
	7025	215	ax (80MHz)	82.60	82.16
	6985	207	ax (160MHz)	164.70	165.21

Table 7-2. 26dB Bandwidth Results – LPI


FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 19 of 99

	Frequency [MHz]	Channel	802.11 Mode	Antenna-1 26dB Bandwidth [MHz]	Antenna-2 26dB Bandwidth [MHz]	Antenna-1 Occupied Bandwidth [MHz]	Antenna-2 Occupied Bandwidth [MHz]
Band 5	5935	2	a	20.75	20.93	17.63	17.68
	6175	45	a	20.47	20.39	17.62	17.62
	6415	93	a	20.70	20.47	17.60	17.62
	5935	2	ax (20MHz)	20.90	20.94	18.94	18.95
	6175	45	ax (20MHz)	20.93	20.78	18.90	18.97
	6415	93	ax (20MHz)	20.61	20.59	17.61	17.64
	5695	3	ax (40MHz)	40.82	40.44	37.62	37.56
	6165	43	ax (40MHz)	40.68	41.14	37.60	37.73
	6405	91	ax (40MHz)	40.55	40.70	37.69	37.68
	5985	7	ax (80MHz)	82.19	82.07	76.71	76.81
	6145	39	ax (80MHz)	82.58	82.27	76.64	76.69
	6385	87	ax (80MHz)	82.41	81.91	76.83	76.88
	6025	15	ax (160MHz)	166.69	165.77	155.39	155.11
	6185	47	ax (160MHz)	165.56	166.19	155.25	155.58
	6345	79	ax (160MHz)	165.24	166.43	155.31	155.46
Band 7	6535	117	a	20.64	20.25	17.64	17.63
	6695	149	a	20.52	20.01	17.63	17.65
	6855	181	a	20.69	20.97	17.58	17.67
	6535	117	ax (20MHz)	21.06	20.67	18.93	18.98
	6695	149	ax (20MHz)	20.71	20.89	18.91	18.87
	6855	181	ax (20MHz)	20.93	21.04	18.95	18.93
	6565	123	ax (40MHz)	40.56	40.35	37.55	37.68
	6725	155	ax (40MHz)	40.77	40.78	37.57	37.67
	6885	179	ax (40MHz)	40.77	40.82	37.64	37.66
	6625	135	ax (80MHz)	82.36	82.88	76.73	76.90
	6705	151	ax (80MHz)	82.85	82.59	76.73	76.79
	6785	167	ax (80MHz)	82.79	82.22	76.68	76.66
	6665	143	ax (160MHz)	166.89	165.98	155.60	155.85
	6825	175	ax (160MHz)	167.00	164.74	155.76	155.52


Table 7-3. 26dB Bandwidth Results - SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 20 of 99

7.2.1 MIMO Antenna-1 26 dB Bandwidth Measurements - (UNII Band 5)

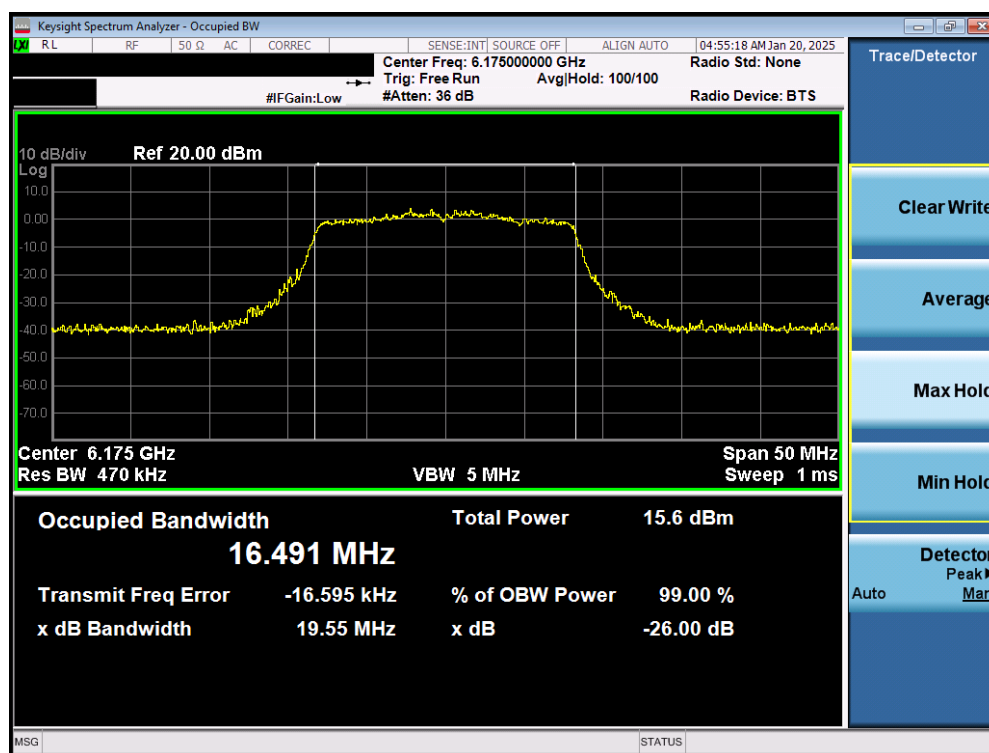


Plot 7-1. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45) – LPI

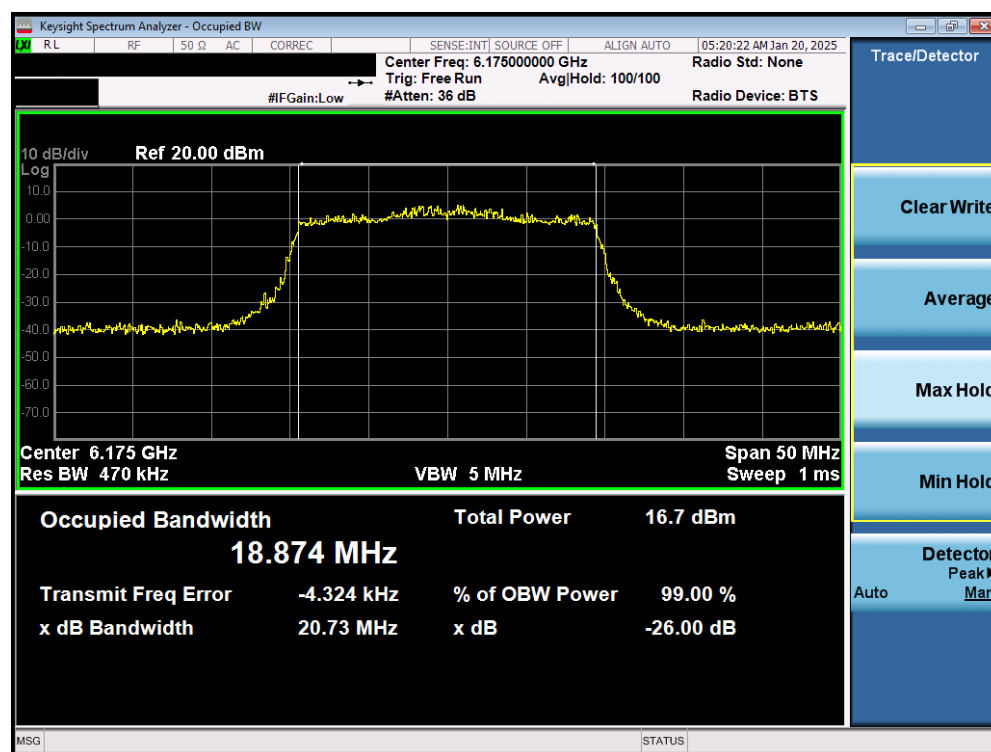


Plot 7-2. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45) – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 21 of 99

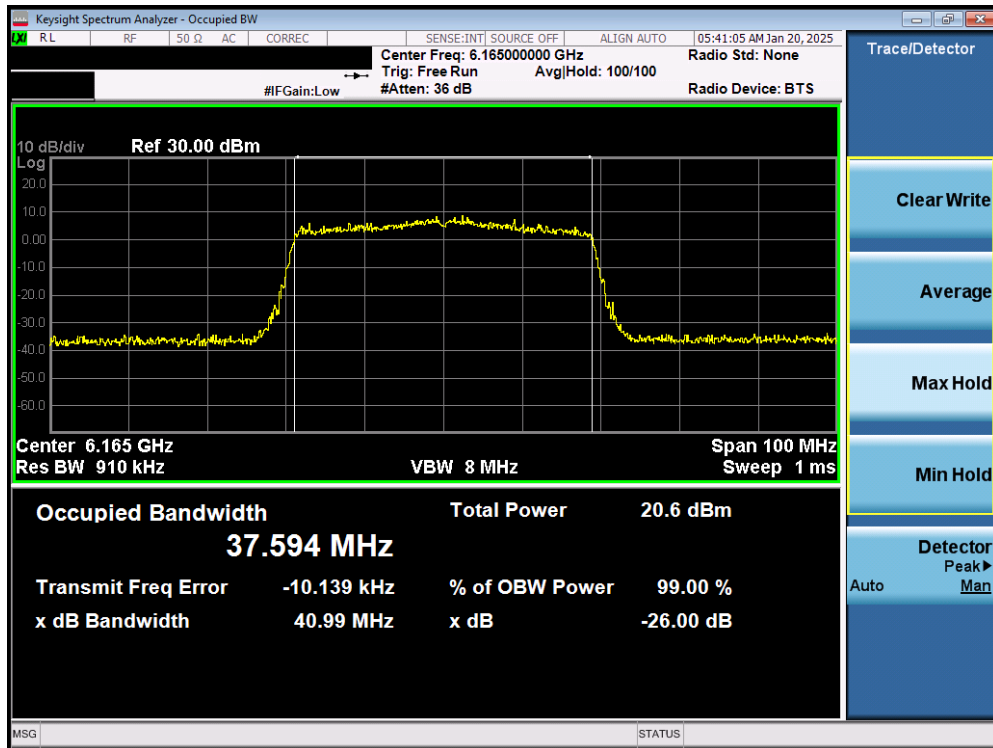


Plot 7-3. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43) – LPI

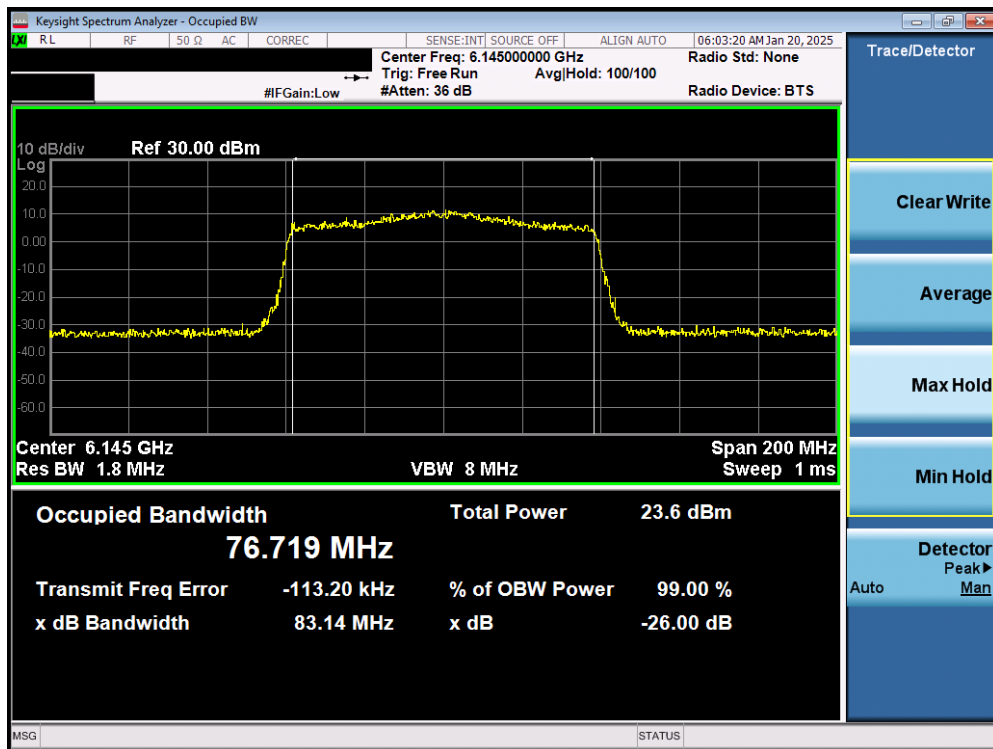


Plot 7-4. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 22 of 99

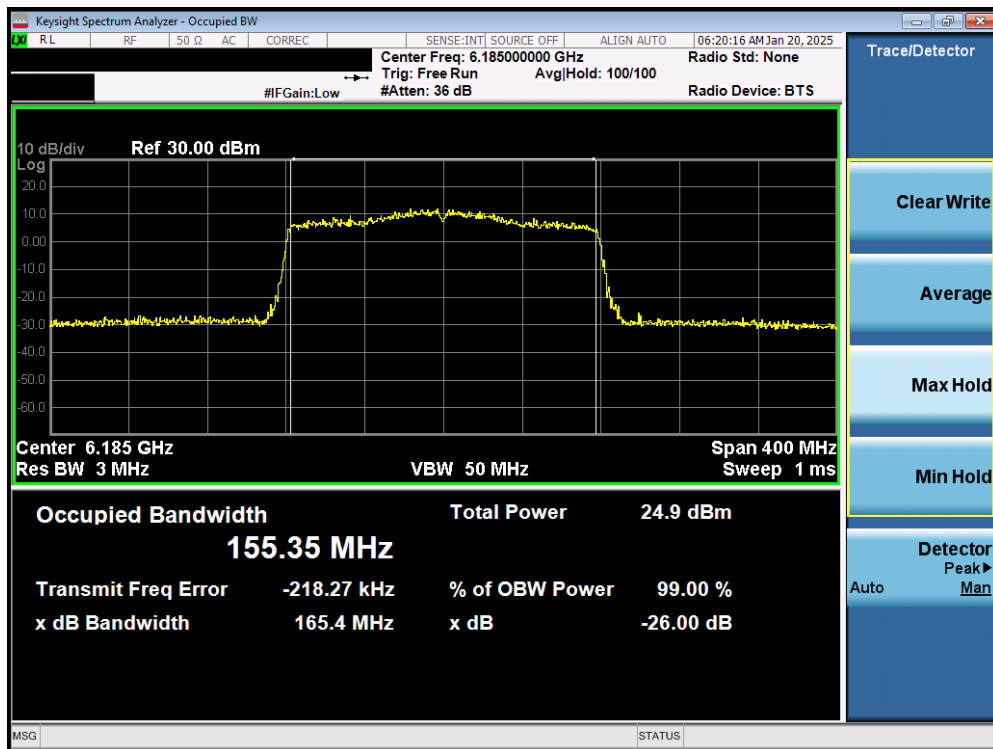


Plot 7-5. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – LPI

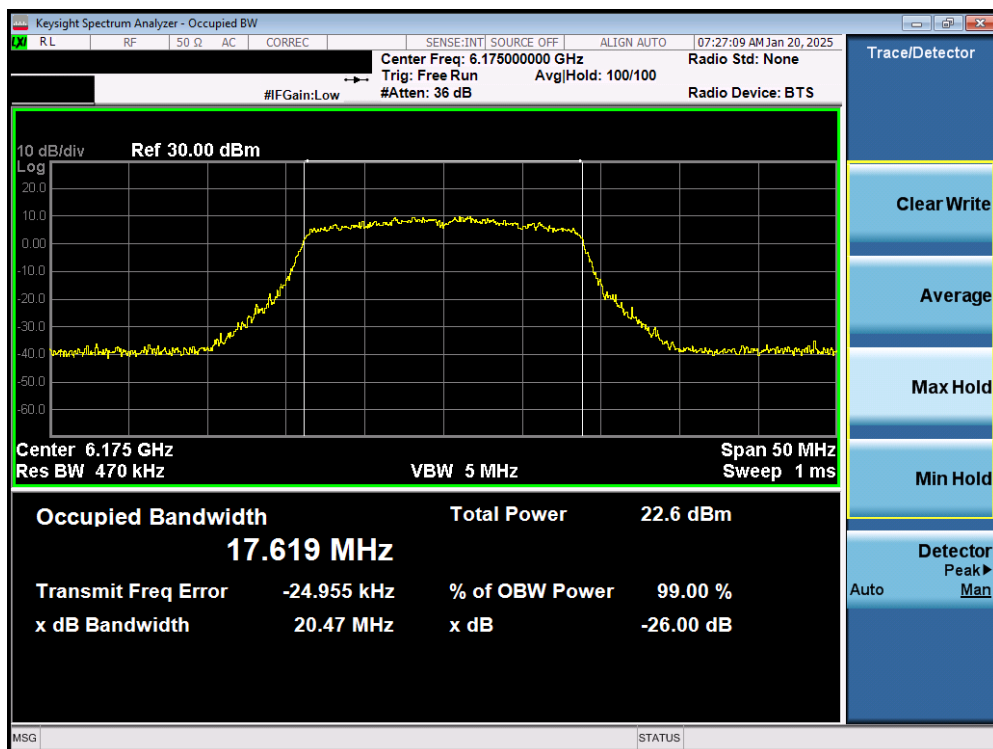


Plot 7-6. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45) - SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 23 of 99

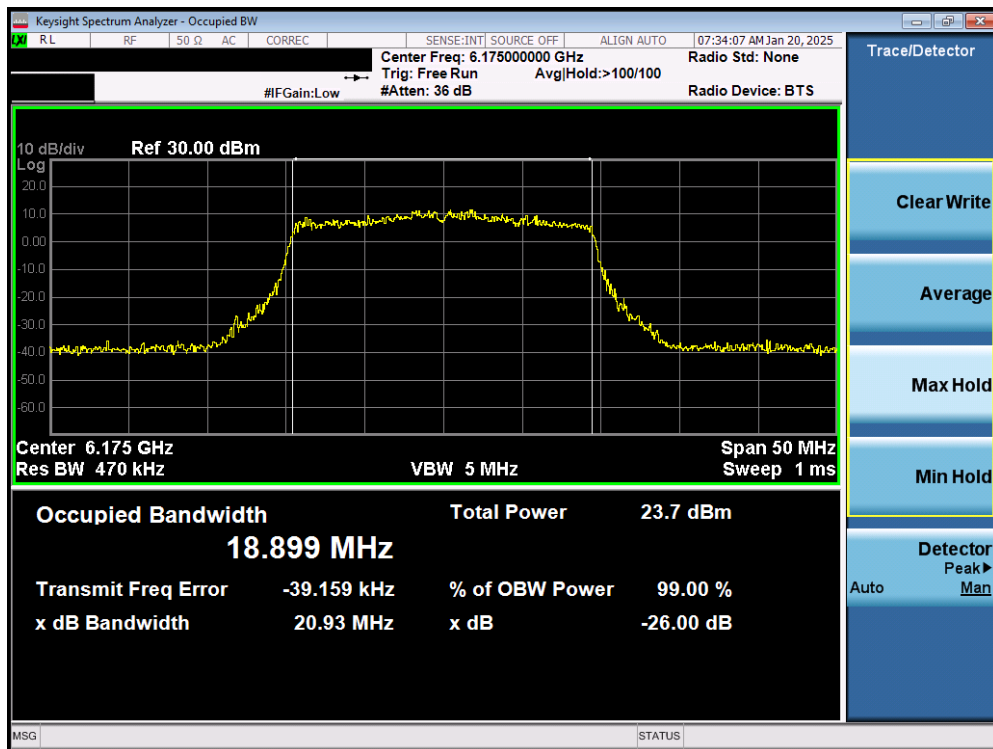


Plot 7-7. 26dB Bandwidth Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45) - SP

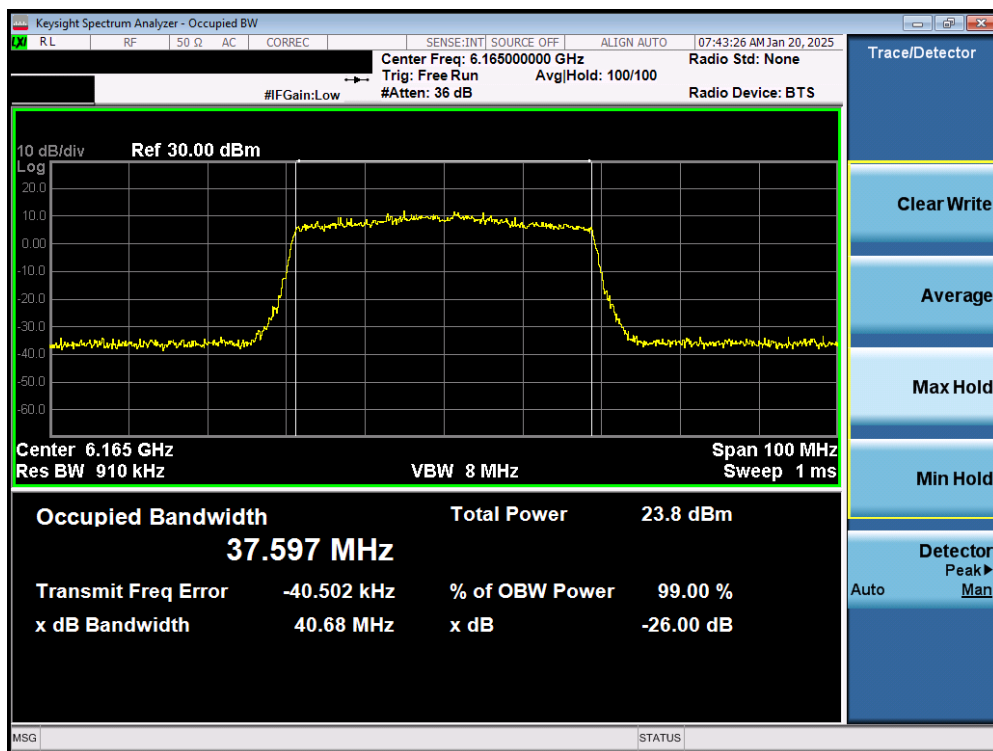


Plot 7-8. 26dB Bandwidth Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43) - SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 24 of 99

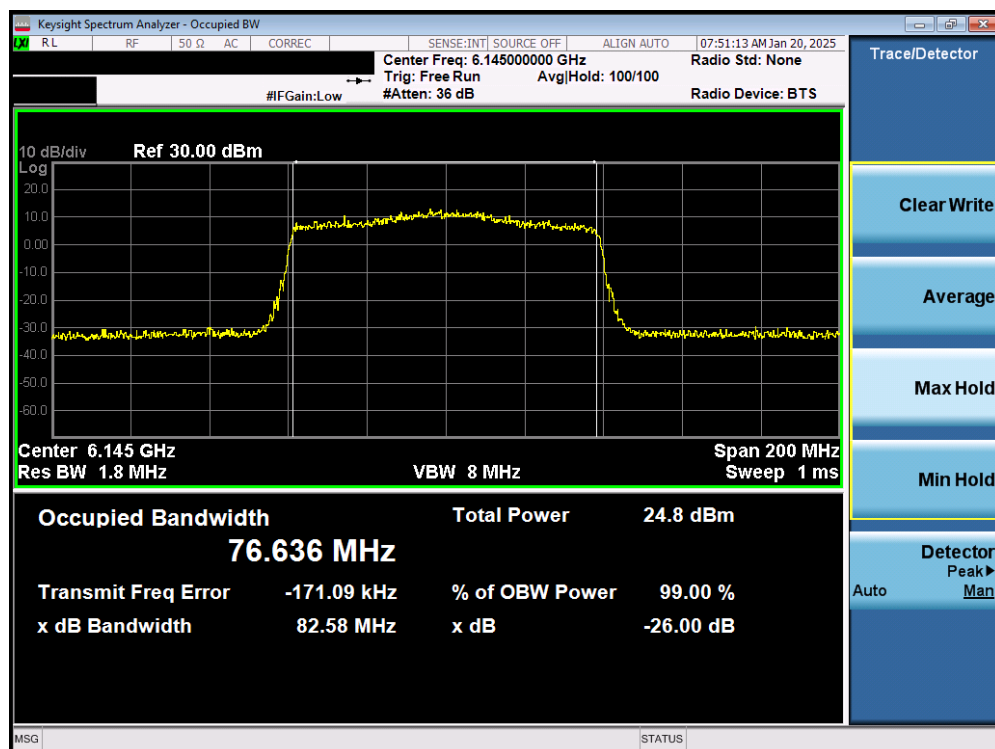


Plot 7-9. 26dB Bandwidth Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – SP

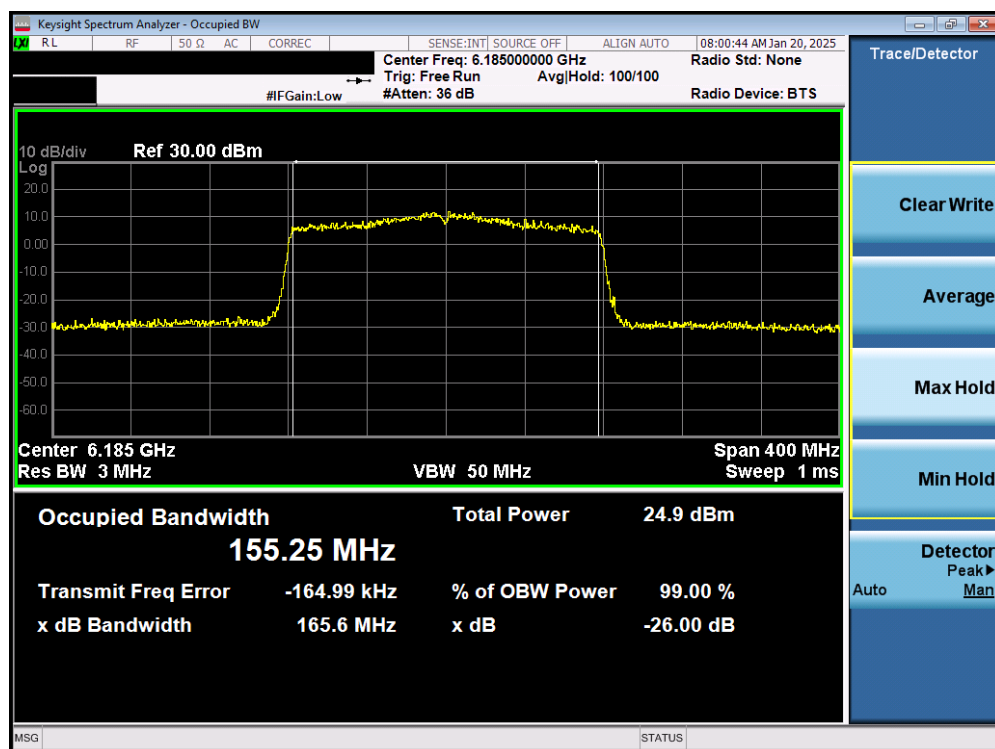


Plot 7-10. 26dB Bandwidth Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 25 of 99

7.2.2 MIMO Antenna-2 26 dB Bandwidth Measurements - (UNII Band 5)

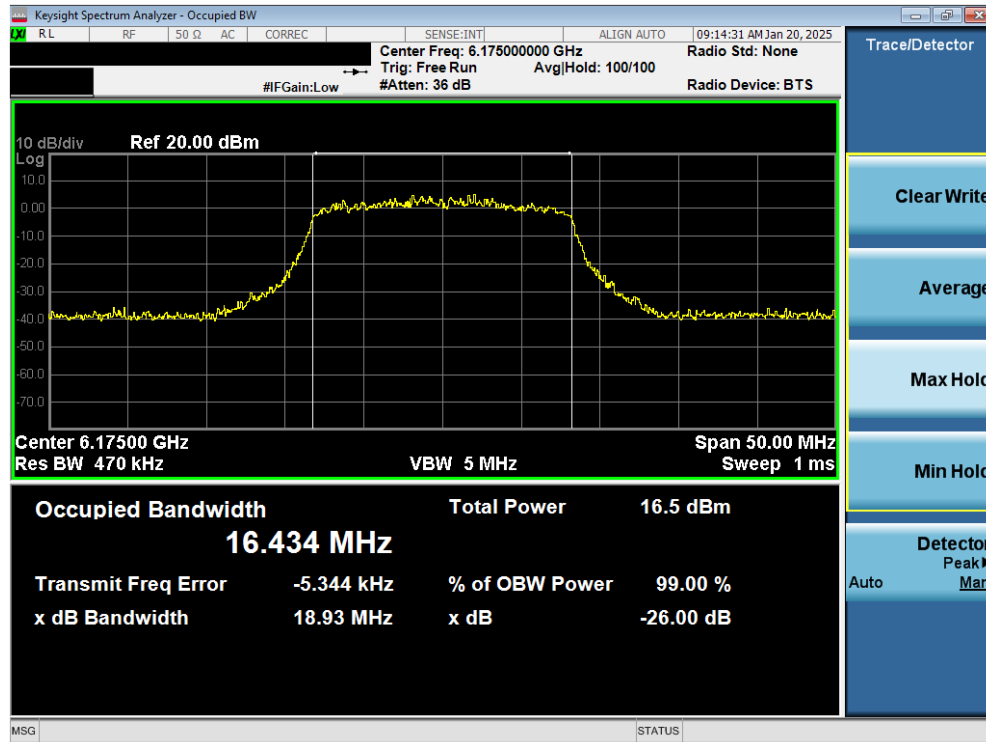


Plot 7-11. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) - LPI

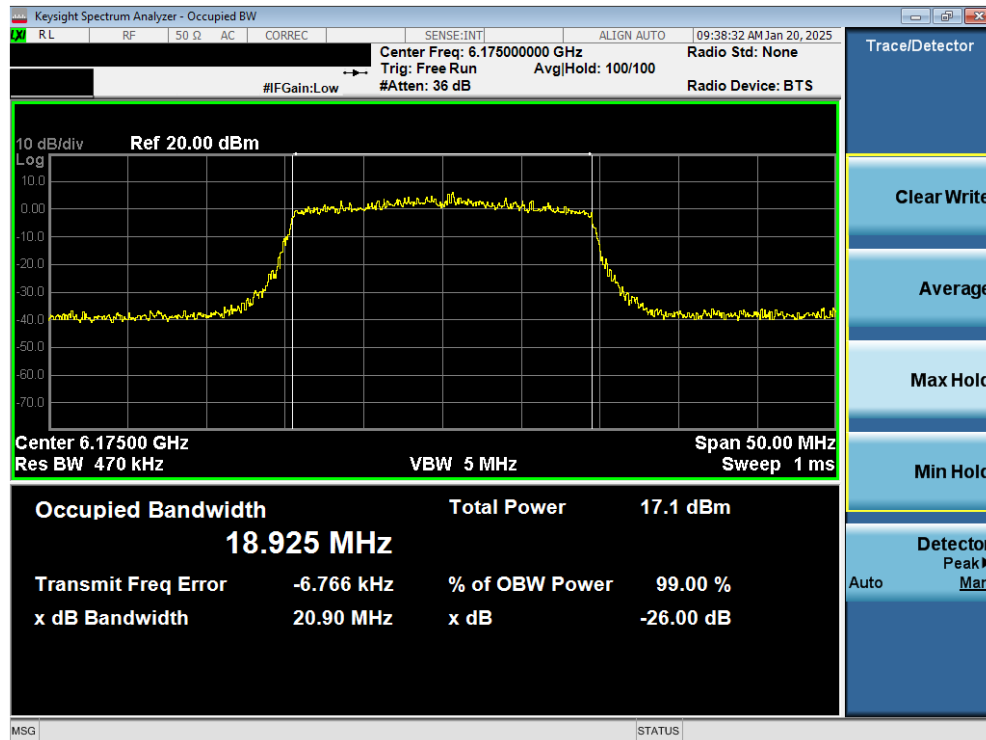


Plot 7-12. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 26 of 99

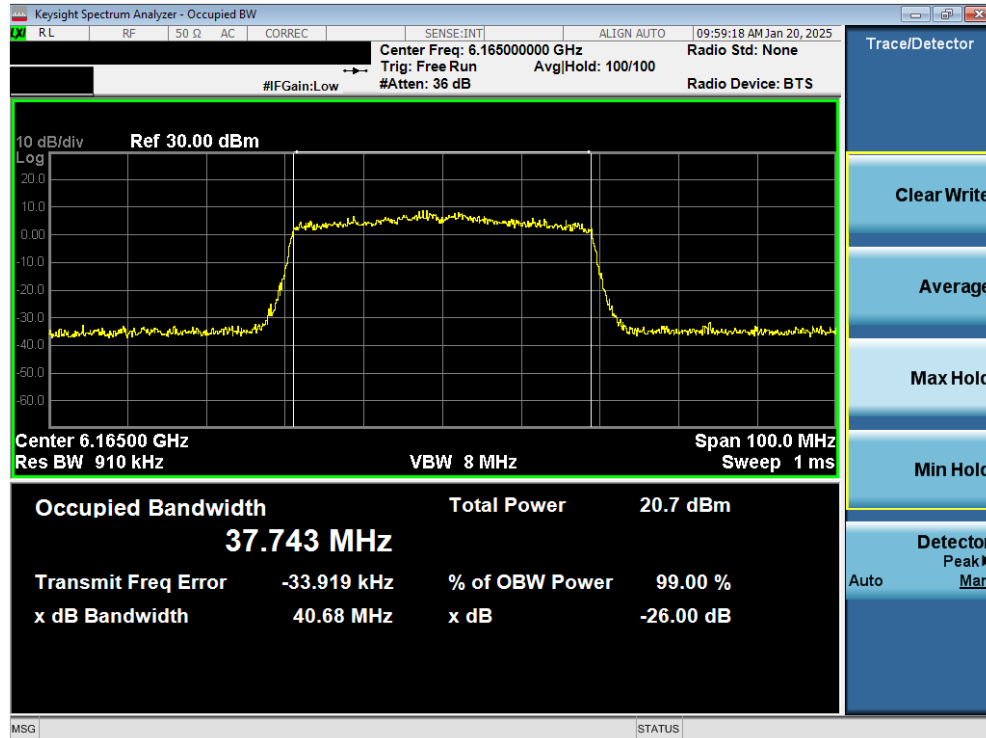


Plot 7-13. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43) - LPI

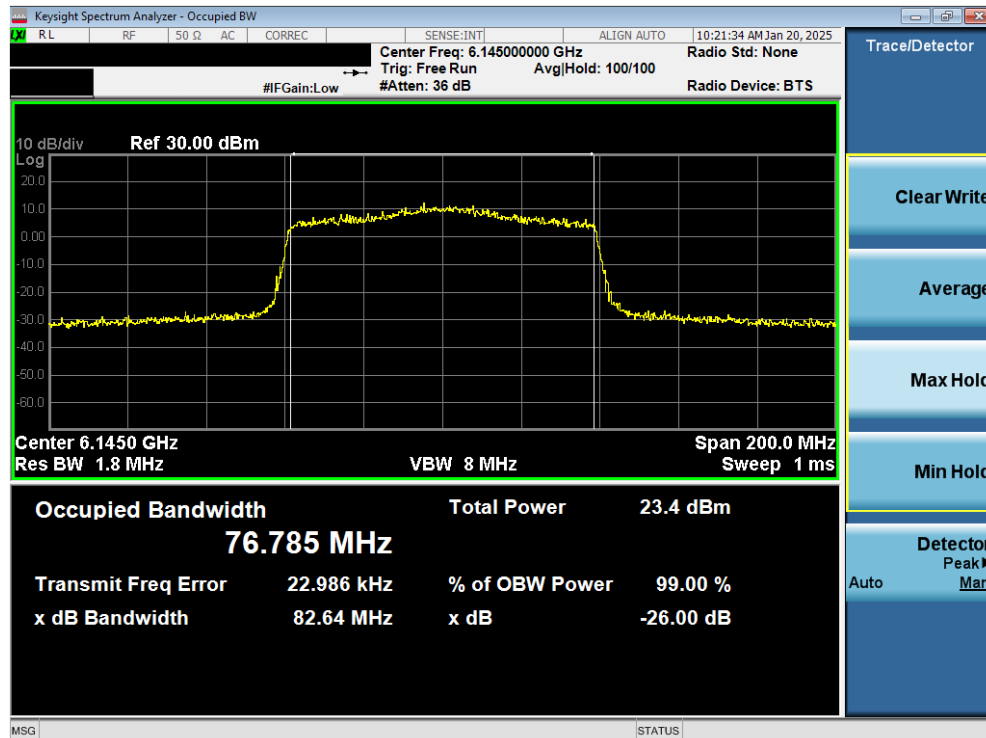

Plot 7-14. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39) - LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 27 of 99

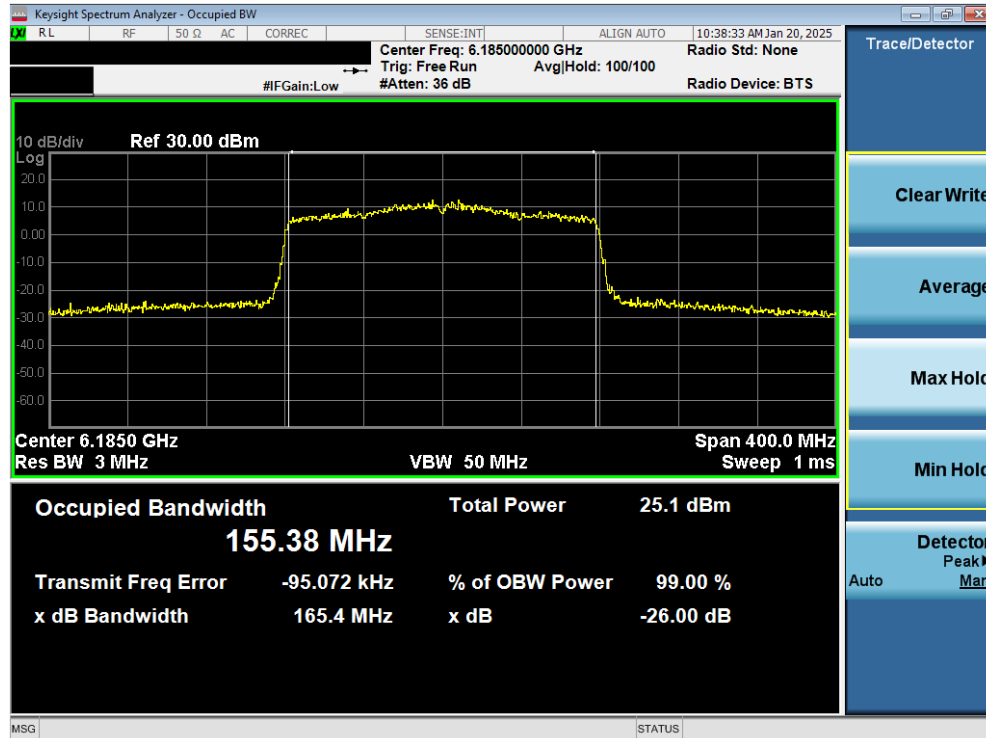


Plot 7-15. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – LPI




Plot 7-16. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 28 of 99

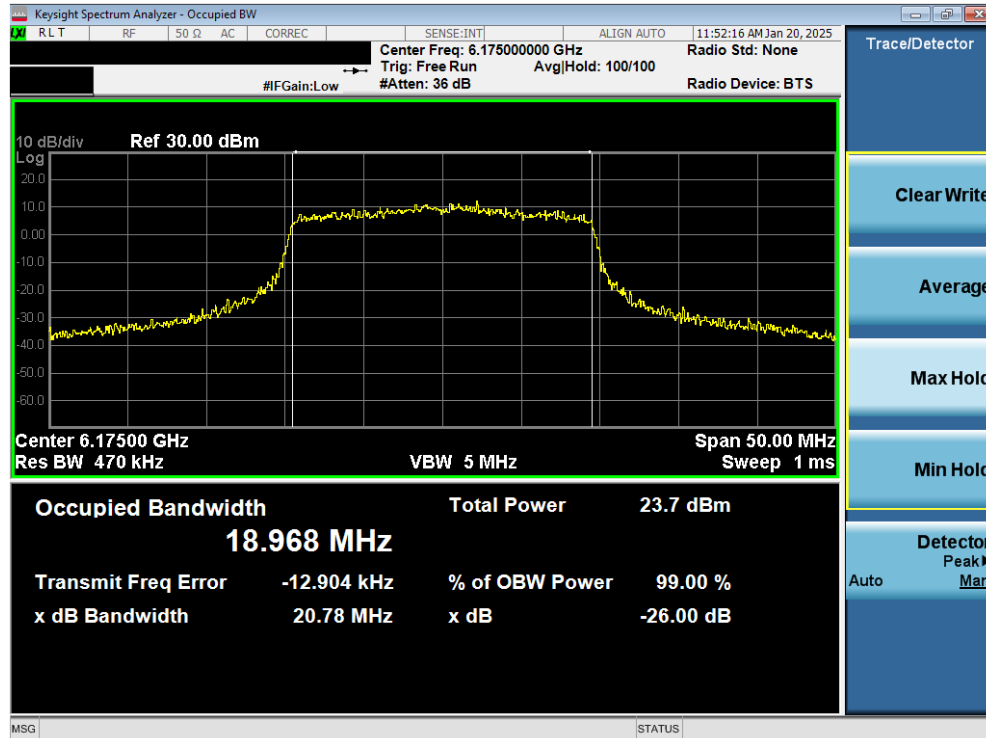


Plot 7-17. 26dB Bandwidth Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 45) - SP

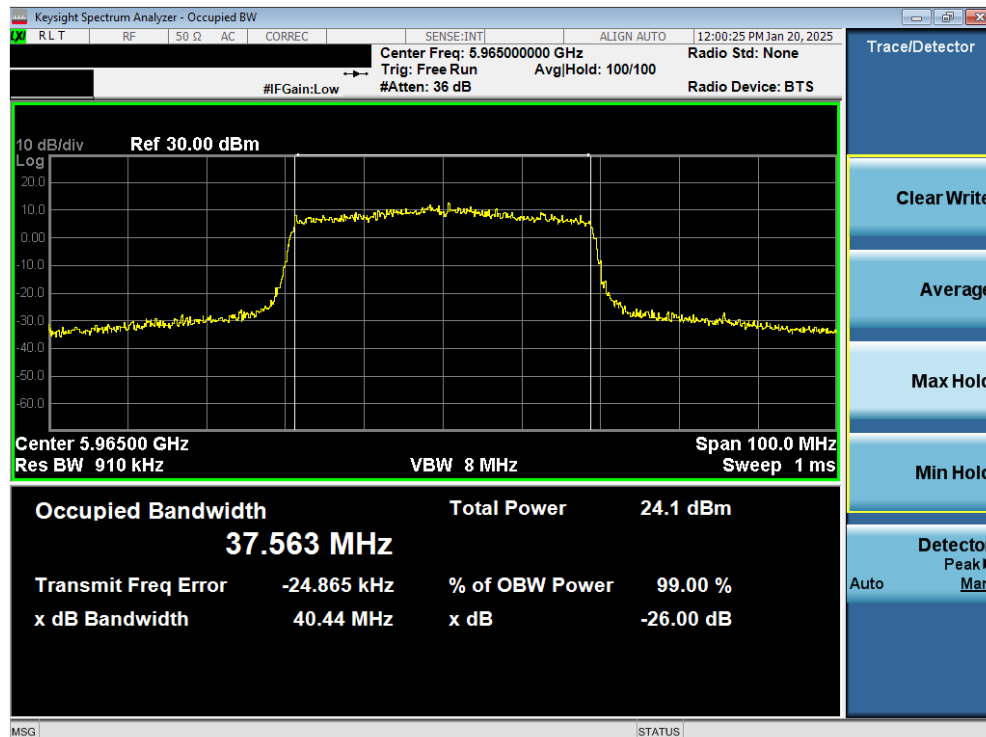


Plot 7-18. 26dB Bandwidth Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43) - SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 29 of 99

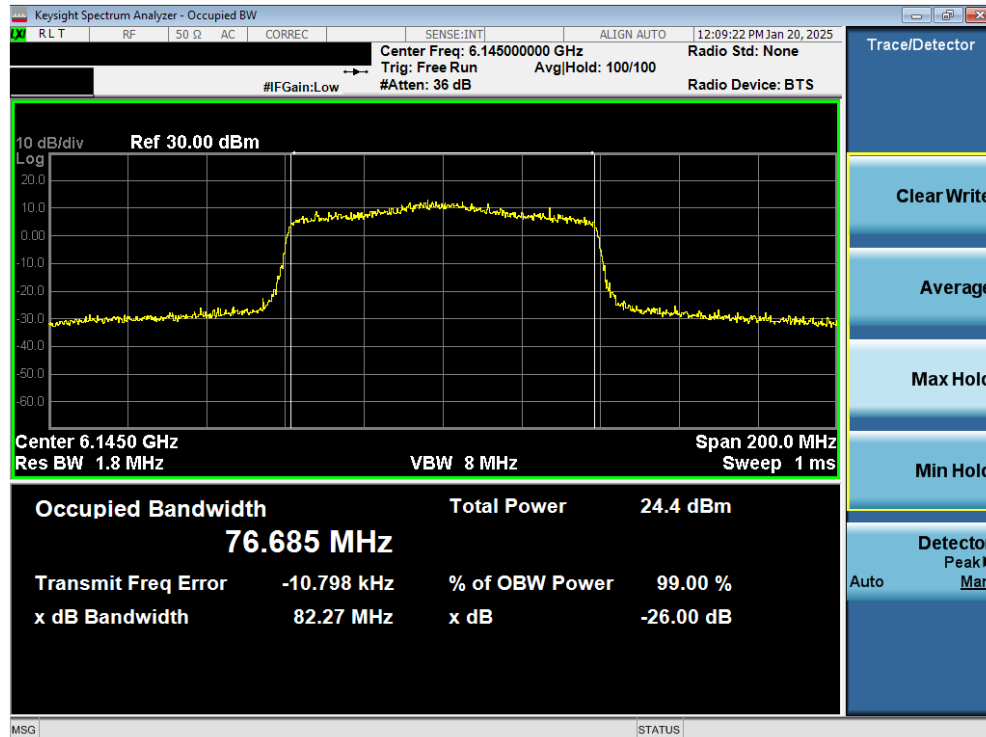

Plot 7-19. 26dB Bandwidth Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – SP

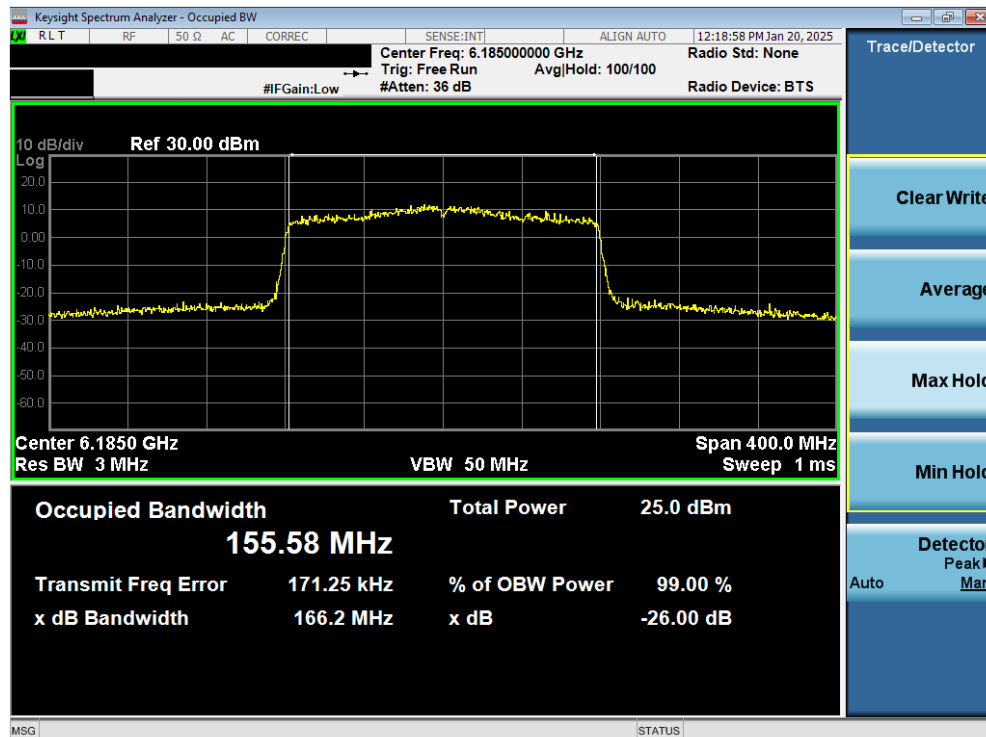

Plot 7-20. 26dB Bandwidth Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 30 of 99

7.3 UNII Output Power Measurement

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm. For client devices operating under the control of a standard power access point, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm and the device must limit its power to no more than 6 dB below its associated standard power access point's authorized transmit power.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G

ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

Compliance for this device while operating under the control of either an indoor low power access point or a standard power access point is demonstrated by applying the tighter low power indoor access point limit of 24dBm e.i.r.p. for both cases.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 31 of 99

MIMO Maximum Conducted Output Power Measurements

6GHz WIFI (20MHz 802.11a MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	8.61	9.89	12.31	-5.39	6.92	24.00	-17.08
	5955	1	9.45	9.52	12.50	-5.39	7.11	24.00	-16.89
	6175	45	8.75	9.26	12.02	-5.39	6.63	24.00	-17.37
	6415	93	9.98	9.50	12.76	-5.39	7.37	24.00	-16.63
UNII-6	6435	97	9.95	9.54	12.76	-5.64	7.12	24.00	-16.88
	6475	105	9.97	9.11	12.57	-5.64	6.93	24.00	-17.07
	6515	113	9.87	9.13	12.53	-5.64	6.89	24.00	-17.11
UNII-7	6535	117	9.67	9.10	12.40	-5.64	6.76	24.00	-17.24
	6675	145	9.46	9.77	12.63	-5.64	6.99	24.00	-17.01
	6695	149	9.40	9.71	12.57	-5.64	6.93	24.00	-17.07
UNII-8	6895	189	9.99	9.40	12.72	-5.44	7.28	24.00	-16.72
	6995	209	9.89	8.67	12.33	-5.44	6.89	24.00	-17.11
	7115	233	9.94	8.74	12.39	-5.44	6.95	24.00	-17.05

Table 7-4. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power – LPI

6GHz WIFI (20MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	8.67	9.96	12.37	-5.39	6.98	24.00	-17.02
	5955	1	9.97	9.96	12.98	-5.39	7.59	24.00	-16.41
	6175	45	8.84	9.39	12.13	-5.39	6.74	24.00	-17.26
	6415	93	9.99	9.63	12.82	-5.39	7.43	24.00	-16.57
UNII-6	6435	97	9.99	9.64	12.83	-5.64	7.19	24.00	-16.81
	6475	105	9.98	9.24	12.64	-5.64	7.00	24.00	-17.00
	6515	113	9.90	9.21	12.58	-5.64	6.94	24.00	-17.06
UNII-7	6535	117	9.73	9.19	12.48	-5.64	6.84	24.00	-17.16
	6675	145	9.46	9.84	12.66	-5.64	7.02	24.00	-16.98
	6695	149	9.41	9.78	12.61	-5.64	6.97	24.00	-17.03
UNII-8	6895	189	9.53	8.92	12.25	-5.44	6.81	24.00	-17.19
	6995	209	9.95	8.72	12.39	-5.44	6.95	24.00	-17.05
	7115	233	9.99	8.81	12.45	-5.44	7.01	24.00	-16.99

Table 7-5. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power– LPI

6GHz WIFI (40MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5965	3	12.15	12.43	15.30	-5.39	9.91	24.00	-14.09
	6165	43	12.31	12.57	15.45	-5.39	10.06	24.00	-13.94
	6285	67	12.44	12.48	15.47	-5.39	10.08	24.00	-13.92
	6405	91	12.69	12.17	15.45	-5.39	10.06	24.00	-13.94
UNII-6	6445	99	12.52	11.91	15.24	-5.64	9.60	24.00	-14.40
	6485	107	12.83	12.13	15.50	-5.64	9.86	24.00	-14.14
	6525	115	12.67	12.09	15.40	-5.49	9.91	24.00	-14.09
UNII-7	6565	123	12.99	12.42	15.72	-5.49	10.23	24.00	-13.77
	6685	147	12.26	12.38	15.33	-5.49	9.84	24.00	-14.16
	6725	155	12.80	12.38	15.61	-5.49	10.12	24.00	-13.88
	6845	179	12.81	12.10	15.48	-5.49	9.99	24.00	-14.01
UNII-8	6885	187	12.41	11.79	15.12	-5.44	9.68	24.00	-14.32
	7005	211	12.64	11.26	15.01	-5.44	9.57	24.00	-14.43
	7085	227	12.89	12.08	15.51	-5.44	10.07	24.00	-13.93

Table 7-6. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power– LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 32 of 99

6GHz WIFI (80MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5985	7	15.43	15.90	18.68	-5.39	13.29	24.00	-10.71
	6145	39	15.22	15.06	18.15	-5.39	12.76	24.00	-11.24
	6305	71	15.86	15.59	18.74	-5.39	13.35	24.00	-10.65
	6385	87	15.92	15.08	18.53	-5.39	13.14	24.00	-10.86
UNII-6	6465	103	15.74	15.07	18.43	-5.64	12.79	24.00	-11.21
UNII-7	6545	119	15.72	15.09	18.43	-5.49	12.94	24.00	-11.06
	6705	151	15.94	15.94	18.95	-5.49	13.46	24.00	-10.54
	6865	183	15.49	15.58	18.55	-5.44	13.11	24.00	-10.89
UNII-8	6945	199	15.52	15.84	18.69	-5.44	13.25	24.00	-10.75
	7025	215	15.53	15.87	18.71	-5.44	13.27	24.00	-10.73

Table 7-7. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power – LPI

6GHz WIFI (160MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	6025	15	16.31	16.77	19.56	-5.39	14.17	24.00	-9.83
	6185	47	16.26	16.62	19.45	-5.39	14.06	24.00	-9.94
	6345	79	16.47	16.27	19.38	-5.39	13.99	24.00	-10.01
UNII-6	6505	111	16.52	16.05	19.30	-5.49	13.81	24.00	-10.19
UNII-7	6665	143	16.25	16.09	19.18	-5.49	13.69	24.00	-10.31
	6825	175	16.81	16.50	19.67	-5.44	14.23	24.00	-9.77
UNII-8	6985	207	16.52	16.06	19.31	-5.44	13.87	24.00	-10.13

Table 7-8. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power – LPI

6GHz WIFI (20MHz 802.11a MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	14.97	14.28	17.65	-5.39	12.26	24.00	-11.74
	5955	1	14.87	14.57	17.73	-5.39	12.34	24.00	-11.66
	6175	45	14.46	14.38	17.43	-5.39	12.04	24.00	-11.96
	6415	93	14.71	14.79	17.76	-5.39	12.37	24.00	-11.63
UNII-7	6535	117	16.80	16.36	19.60	-5.64	13.96	24.00	-10.04
	6675	145	16.66	16.80	19.74	-5.64	14.10	24.00	-9.90
	6695	149	16.64	16.65	19.66	-5.64	14.02	24.00	-9.98

Table 7-9. MIMO 20MHz BW 802.11a (UNII) Maximum Conducted Output Power– SP

6GHz WIFI (20MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5935	2	15.39	14.97	18.20	-5.39	12.81	24.00	-11.19
	5955	1	14.98	15.37	18.19	-5.39	12.80	24.00	-11.20
	6175	45	15.03	15.31	18.18	-5.39	12.79	24.00	-11.21
	6415	93	15.17	15.30	18.25	-5.39	12.86	24.00	-11.14
UNII-7	6535	117	16.52	15.96	19.26	-5.64	13.62	24.00	-10.38
	6675	145	16.84	16.82	19.84	-5.64	14.20	24.00	-9.80
	6695	149	16.89	16.71	19.81	-5.64	14.17	24.00	-9.83

Table 7-10. MIMO 20MHz BW 802.11ax (UNII) Maximum Conducted Output Power– SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT			Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset		Page 33 of 99

6GHz WIFI (40MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5965	3	16.38	16.74	19.57	-5.39	14.18	24.00	-9.82
	6165	43	16.34	16.54	19.45	-5.39	14.06	24.00	-9.94
	6285	67	16.10	16.17	19.15	-5.39	13.76	24.00	-10.24
	6405	91	16.98	16.29	19.66	-5.39	14.27	24.00	-9.73
UNII-7	6565	123	16.37	15.94	19.17	-5.49	13.68	24.00	-10.32
	6685	147	16.48	16.39	19.45	-5.49	13.96	24.00	-10.04
	6725	155	16.81	16.38	19.61	-5.49	14.12	24.00	-9.88
	6845	179	16.66	16.39	19.54	-5.49	14.05	24.00	-9.95

Table 7-11. MIMO 40MHz BW 802.11ax (UNII) Maximum Conducted Output Power– SP

6GHz WIFI (80MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	5985	7	15.99	16.80	19.42	-5.39	14.03	24.00	-9.97
	6145	39	16.25	15.75	19.02	-5.39	13.63	24.00	-10.37
	6305	71	16.78	16.66	19.73	-5.39	14.34	24.00	-9.66
	6385	87	16.83	15.90	19.40	-5.39	14.01	24.00	-9.99
UNII-7	6705	151	16.72	16.01	19.39	-5.49	13.90	24.00	-10.10

Table 7-12. MIMO 80MHz BW 802.11ax (UNII) Maximum Conducted Output Power – SP

6GHz WIFI (160MHz 802.11ax MIMO)						Directional Ant. Gain [dBi]	Max e.i.r.p [dBm]	e.i.r.p Limit [dBm]	e.i.r.p Margin [dB]
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]						
			ANT1	ANT2	MIMO				
UNII-5	6025	15	16.31	16.77	19.56	-5.39	14.17	24.00	-9.83
	6185	47	16.26	16.62	19.45	-5.39	14.06	24.00	-9.94
	6345	79	16.47	16.27	19.38	-5.39	13.99	24.00	-10.01
UNII-7	6665	143	16.25	16.09	19.18	-5.49	13.69	24.00	-10.31
	6825	175	16.81	16.50	19.67	-5.44	14.23	24.00	-9.77

Table 7-13. MIMO 160MHz BW 802.11ax (UNII) Maximum Conducted Output Power – SP

Sample MIMO Calculation:

At 5935MHz in 802.11a (20MHz BW) mode, the average conducted output power was measured to be 8.61 dBm for Antenna-1 and 9.89 dBm for Antenna-2.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(8.61 \text{ dBm} + 9.89 \text{ dBm}) = (7.261 \text{ mW} + 9.750 \text{ mW}) = 17.011 \text{ mW} = 12.31 \text{ dBm}$$

Sample Directional Gain Calculation:

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

Sample e.i.r.p. Calculation:

At 5935MHz in 802.11a (20MHz BW) mode, the average MIMO conducted power was calculated to be 12.31dBm with directional gain of -5.39 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$12.31 \text{ dBm} + -5.39 \text{ dBi} = 6.92 \text{ dBm}$$

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 34 of 99

7.4 Maximum Power Spectral Density

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013, was used to measure the power spectral density for 802.11a/ax.

In the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band. For client devices, except for fixed client devices as defined in this subpart, operating under the control of a standard power access point in 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 17 dBm/MHz e.i.r.p.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2

ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation.
2. Span was set to encompass the entire emission bandwidth of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes.
9. Trace was averaged over 100 sweeps.
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 35 of 99

MIMO Power Spectral Density Measurements

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm]	Antenna-2 Power Density [dBm]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	e.i.r.p Density [dBm/MHz]	EIRP Density Limit [dBm/MHz]	Margin [dB]
Band 5	5935	2	a	-1.46	-0.16	-8.40	-8.40	2.25	-5.39	-3.14	-1	-2.14
	6175	45	a	-1.28	-0.36	-8.40	-8.40	2.22	-5.39	-3.17	-1	-2.17
	6415	93	a	-0.90	-1.59	-8.40	-8.40	1.78	-5.39	-3.61	-1	-2.61
	5935	2	ax (20MHz)	-1.46	-0.20	-8.40	-8.40	2.22	-5.39	-3.17	-1	-2.17
	6175	45	ax (20MHz)	-0.96	-0.46	-8.40	-8.40	2.31	-5.39	-3.08	-1	-2.08
	6415	93	ax (20MHz)	0.21	-0.88	-8.40	-8.40	2.71	-5.39	-2.68	-1	-1.68
	5965	3	ax (40MHz)	-0.54	-0.81	-8.40	-8.40	2.34	-5.39	-3.05	-1	-2.05
	6165	43	ax (40MHz)	-0.23	-0.20	-8.40	-8.40	2.80	-5.39	-2.59	-1	-1.59
	6405	91	ax (40MHz)	-0.22	-0.71	-8.40	-8.40	2.55	-5.39	-2.84	-1	-1.84
	5985	7	ax (80MHz)	-0.06	0.52	-8.40	-8.40	3.25	-5.39	-2.14	-1	-1.14
	6145	39	ax (80MHz)	0.04	-0.23	-8.40	-8.40	2.92	-5.39	-2.47	-1	-1.47
	6385	87	ax (80MHz)	0.56	-0.79	-8.40	-8.40	2.95	-5.39	-2.44	-1	-1.44
	6025	15	ax (160MHz)	-2.05	-2.45	-8.40	-8.40	0.76	-5.39	-4.62	-1	-3.62
	6185	47	ax (160MHz)	-1.99	-2.18	-8.40	-8.40	0.93	-5.39	-4.46	-1	-3.46
Band 6	6345	79	ax (160MHz)	-1.91	-2.96	-8.40	-8.40	0.61	-5.39	-4.78	-1	-3.78
	6435	97	a	-0.58	-1.16	-8.60	-8.70	2.15	-5.64	-3.49	-1	-2.49
	6475	105	a	0.28	-1.03	-8.60	-8.70	2.68	-5.64	-2.96	-1	-1.96
	6515	113	a	0.41	-0.85	-8.60	-8.70	2.84	-5.64	-2.80	-1	-1.80
	6345	97	ax (20MHz)	0.40	-0.92	-8.60	-8.70	2.80	-5.64	-2.84	-1	-1.84
	6475	105	ax (20MHz)	0.27	-1.24	-8.60	-8.70	2.59	-5.64	-3.05	-1	-2.05
	6515	113	ax (20MHz)	0.19	-0.89	-8.60	-8.70	2.69	-5.64	-2.94	-1	-1.94
	6445	99	ax (40MHz)	0.36	-1.22	-8.60	-8.70	2.65	-5.64	-2.99	-1	-1.99
	6485	107	ax (40MHz)	-0.01	-1.20	-8.60	-8.70	2.45	-5.64	-3.19	-1	-2.19
	6525	115	ax (40MHz)	-0.09	-0.82	-8.60	-8.70	2.57	-5.64	-3.07	-1	-2.07
Band 7	6465	103	ax (80MHz)	0.22	-1.04	-8.60	-8.70	2.65	-5.64	-2.99	-1	-1.99
	6505	111	ax (160MHz)	-1.60	-3.01	-8.60	-8.70	0.76	-5.64	-4.87	-1	-3.87
	6535	117	a	0.15	-0.70	-8.50	-8.50	2.76	-5.49	-2.73	-1	-1.73
	6695	149	a	-0.10	-0.52	-8.50	-8.50	2.71	-5.49	-2.78	-1	-1.78
	6875	185	a	1.07	-0.21	-8.50	-8.50	3.49	-5.49	-2.00	-1	-1.00
	6535	117	ax (20MHz)	-0.08	-1.18	-8.50	-8.50	2.42	-5.49	-3.07	-1	-2.07
	6695	149	ax (20MHz)	-0.50	1.12	-8.50	-8.50	3.40	-5.49	-2.09	-1	-1.09
	6875	185	ax (20MHz)	0.56	-0.45	-8.50	-8.50	3.10	-5.49	-2.39	-1	-1.39
	6565	123	ax (40MHz)	0.14	-0.66	-8.50	-8.50	2.77	-5.49	-2.72	-1	-1.72
	6725	155	ax (40MHz)	0.36	-0.76	-8.50	-8.50	2.85	-5.49	-2.64	-1	-1.64
	6885	179	ax (40MHz)	0.01	-1.16	-8.50	-8.50	2.47	-5.49	-3.02	-1	-2.02
	6545	119	ax (80MHz)	-1.35	-2.35	-8.50	-8.50	1.19	-5.49	-4.30	-1	-3.30
	6705	151	ax (80MHz)	-1.35	-2.40	-8.50	-8.50	1.17	-5.49	-4.32	-1	-3.32
	6865	183	ax (80MHz)	-0.60	-1.95	-8.50	-8.50	1.79	-5.49	-3.70	-1	-2.70
Band 8	6665	143	ax (160MHz)	-2.28	-2.78	-8.50	-8.50	0.49	-5.49	-5.00	-1	-4.00
	6825	175	ax (160MHz)	-1.81	-2.47	-8.50	-8.50	0.88	-5.49	-4.61	-1	-3.61
	6895	189	a	0.50	-0.58	-8.30	-8.60	3.01	-5.44	-2.43	-1	-1.43
	6995	209	a	0.22	-1.25	-8.30	-8.60	2.56	-5.44	-2.88	-1	-1.88
	7115	233	a	0.67	-1.46	-8.30	-8.60	2.75	-5.44	-2.69	-1	-1.69
	6895	189	ax (20MHz)	0.25	-1.44	-8.30	-8.60	2.49	-5.44	-2.95	-1	-1.95
	6995	209	ax (20MHz)	-0.15	-1.41	-8.30	-8.60	2.28	-5.44	-3.16	-1	-2.16
	7115	233	ax (20MHz)	0.38	-0.96	-8.30	-8.60	2.77	-5.44	-2.67	-1	-1.67
	6925	187	ax (40MHz)	-0.13	-1.19	-8.30	-8.60	2.38	-5.44	-3.06	-1	-2.06
	7005	211	ax (40MHz)	-0.27	-1.61	-8.30	-8.60	2.12	-5.44	-3.32	-1	-2.32
	7085	227	ax (40MHz)	0.23	-1.32	-8.30	-8.60	2.53	-5.44	-2.91	-1	-1.91
	6945	199	ax (80MHz)	-0.63	-1.54	-8.30	-8.60	1.95	-5.44	-3.49	-1	-2.49
	7025	215	ax (80MHz)	0.17	-1.69	-8.30	-8.60	2.35	-5.44	-3.09	-1	-2.09
	6985	207	ax (160MHz)	-2.40	-3.57	-8.30	-8.60	0.06	-5.44	-5.37	-1	-4.37

Table 7-14. MIMO e.i.r.p. Conducted Power Spectral Density Measurements LPI


FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 36 of 99

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 Power Density [dBm/MHz]	Antenna-2 Power Density [dBm/MHz]	Antenna-1 Gain [dBi]	Antenna-2 Gain [dBi]	Summed MIMO Power Density [dBm/MHz]	Directional Gain [dBi]	EIRP Density [dBm/MHz]	EIRP Density Limit [dBm/MHz]	Margin [dB]
Band 5	5935	2	a	4.75	5.56	-8.40	-8.40	8.18	-5.39	2.79	17	-14.21
	6175	45	a	5.56	5.77	-8.40	-8.40	8.67	-5.39	3.28	17	-13.72
	6415	93	a	6.13	4.68	-8.40	-8.40	8.48	-5.39	3.09	17	-13.91
	5935	2	ax (20MHz)	5.09	5.76	-8.40	-8.40	8.45	-5.39	3.06	17	-13.94
	6175	45	ax (20MHz)	5.91	6.02	-8.40	-8.40	8.98	-5.39	3.59	17	-13.41
	6415	93	ax (20MHz)	6.23	5.14	-8.40	-8.40	8.73	-5.39	3.34	17	-13.66
	5965	3	ax (40MHz)	3.30	2.82	-8.40	-8.40	6.08	-5.39	0.69	17	-16.31
	6165	43	ax (40MHz)	2.96	3.27	-8.40	-8.40	6.13	-5.39	0.74	17	-16.26
	6405	91	ax (40MHz)	3.89	2.74	-8.40	-8.40	6.36	-5.39	0.97	17	-16.03
	5985	7	ax (80MHz)	0.84	1.05	-8.40	-8.40	3.96	-5.39	-1.43	17	-18.43
	6145	39	ax (80MHz)	0.99	0.82	-8.40	-8.40	3.91	-5.39	-1.48	17	-18.48
	6385	87	ax (80MHz)	1.43	0.23	-8.40	-8.40	3.88	-5.39	-1.51	17	-18.51
	6025	15	ax (160MHz)	-1.87	-2.31	-8.40	-8.40	0.92	-5.39	-4.47	17	-21.47
	6185	47	ax (160MHz)	-1.97	-2.14	-8.40	-8.40	0.96	-5.39	-4.43	17	-21.43
Band 7	6345	79	ax (160MHz)	-1.71	-2.86	-8.40	-8.40	0.76	-5.39	-4.63	17	-21.63
	6535	117	a	6.30	5.34	-8.50	-8.50	8.85	-5.49	3.36	17	-13.64
	6695	149	a	6.06	5.64	-8.50	-8.50	8.87	-5.49	3.38	17	-13.62
	6855	181	a	6.98	6.02	-8.50	-8.50	9.53	-5.49	4.04	17	-12.96
	6535	117	ax (20MHz)	6.31	5.27	-8.50	-8.50	8.83	-5.49	3.34	17	-13.66
	6695	149	ax (20MHz)	6.43	5.92	-8.50	-8.50	9.19	-5.49	3.70	17	-13.30
	6855	181	ax (20MHz)	7.48	6.03	-8.50	-8.50	9.83	-5.49	4.34	17	-12.66
	6565	123	ax (40MHz)	3.42	2.36	-8.50	-8.50	5.93	-5.49	0.44	17	-16.56
	6725	155	ax (40MHz)	3.85	2.81	-8.50	-8.50	6.37	-5.49	0.88	17	-16.12
	6885	179	ax (40MHz)	4.17	3.50	-8.50	-8.50	6.86	-5.49	1.37	17	-15.63
	6625	135	ax (80MHz)	1.55	0.31	-8.50	-8.50	3.99	-5.49	-1.50	17	-18.50
	6705	151	ax (80MHz)	1.15	0.21	-8.50	-8.50	3.71	-5.49	-1.78	17	-18.78
	6785	167	ax (80MHz)	-0.14	-0.15	-8.50	-8.50	2.86	-5.49	-2.63	17	-19.63
	6665	143	ax (160MHz)	-2.39	-2.94	-8.50	-8.50	0.36	-5.49	-5.13	17	-22.13
	6825	175	ax (160MHz)	-1.74	-2.43	-8.50	-8.50	0.94	-5.49	-4.55	17	-21.55


Table 7-15. MIMO e.i.r.p. Conducted Power Spectral Density Measurements SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 37 of 99

7.4.1 MIMO Antenna-1 Power Spectral Density Measurement - (UNII Band 5)

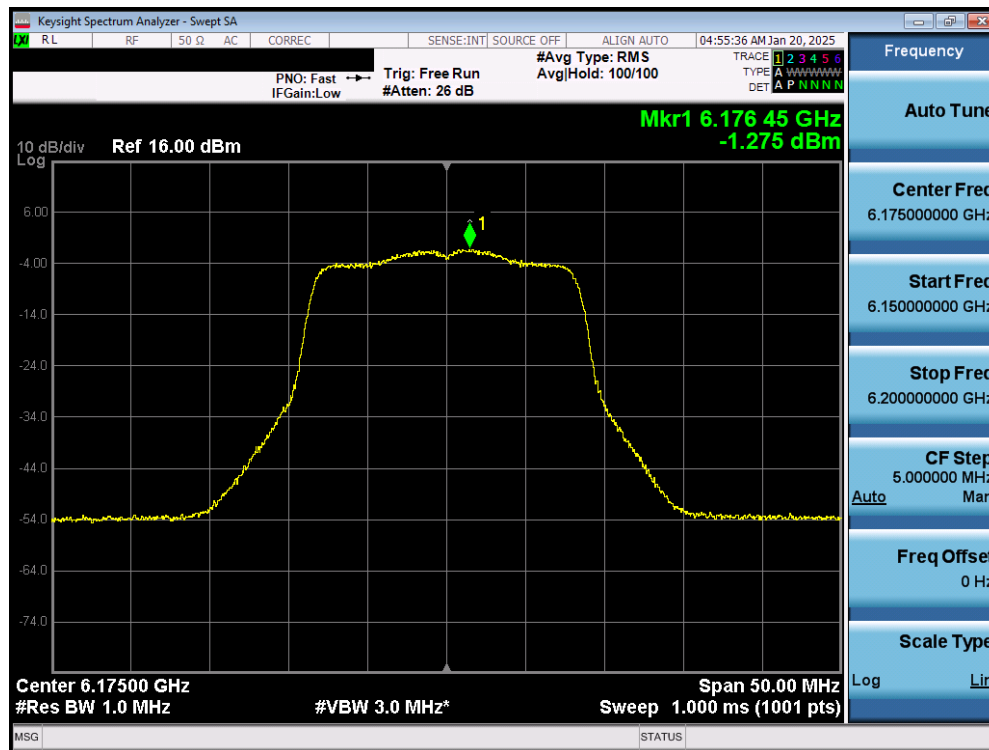


Plot 7-21. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45) – LPI

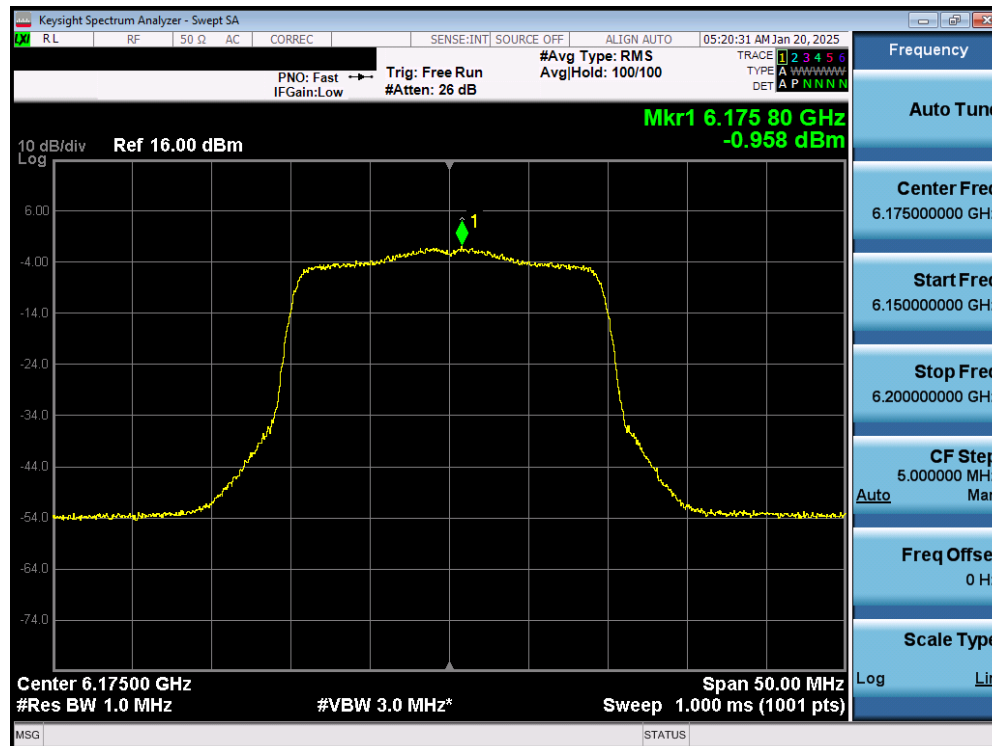


Plot 7-22. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45) – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 38 of 99

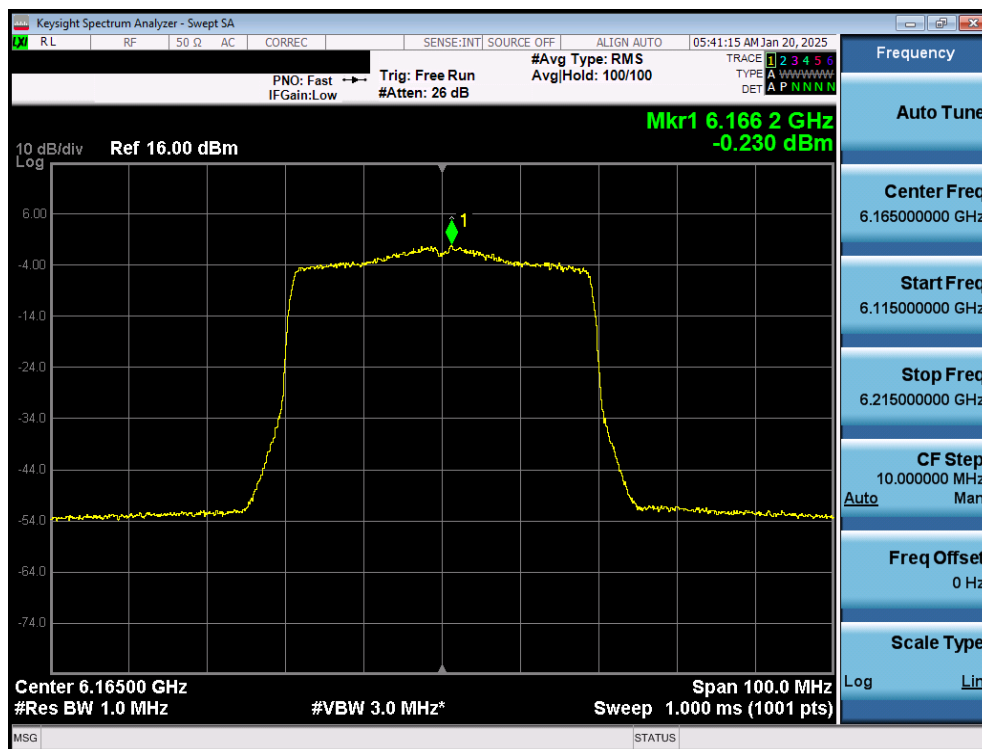


Plot 7-23. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11 ax (UNII Band 5) – Ch. 43) – LPI

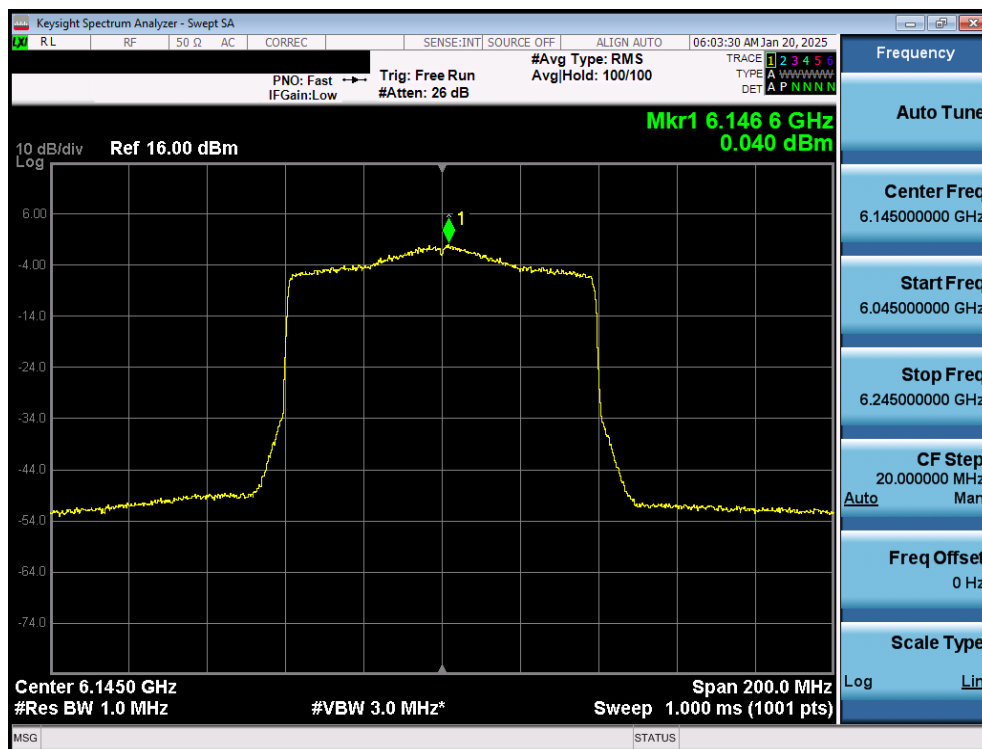


Plot 7-24. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11 ax (UNII Band 5) – Ch. 39) – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 39 of 99

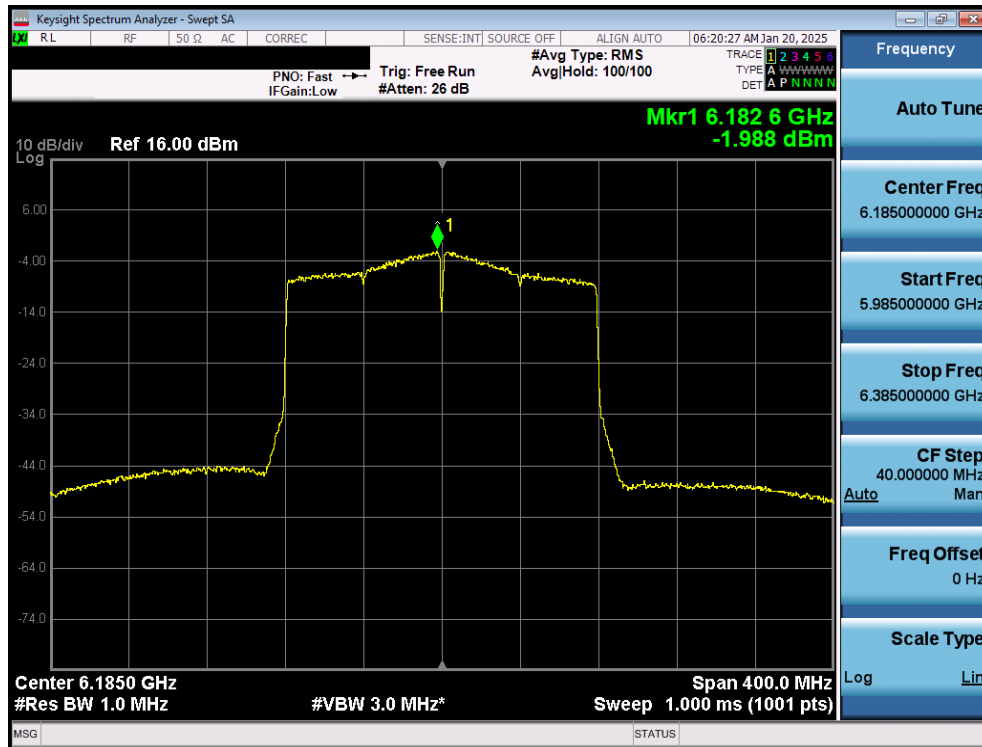


Plot 7-25. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – LPI

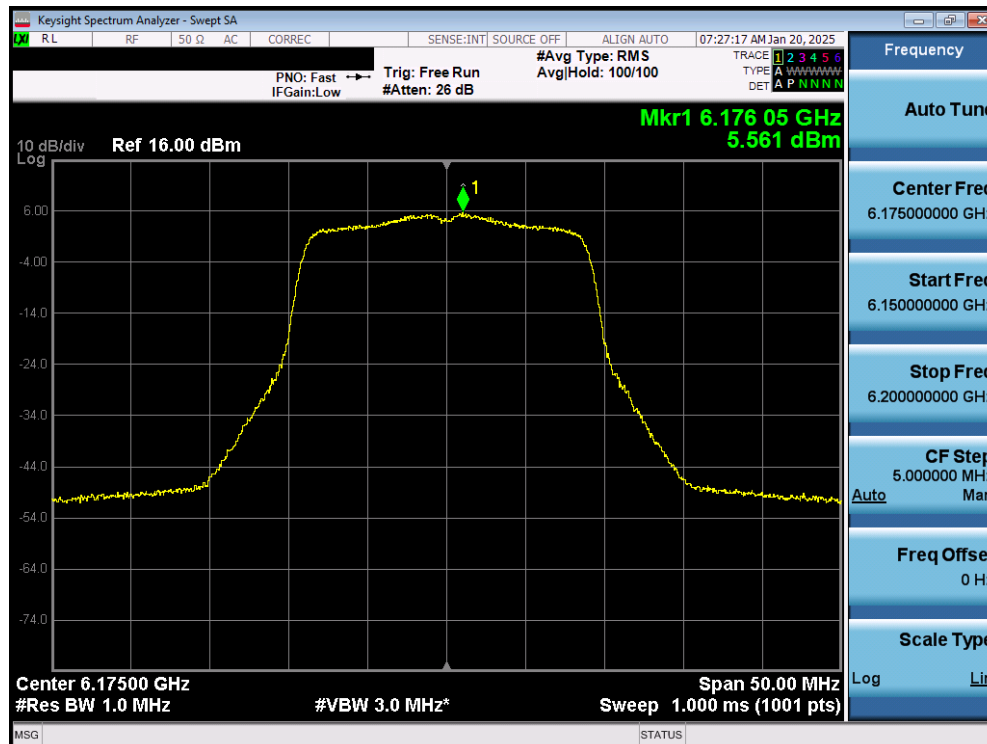


Plot 7-26. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 40 of 99

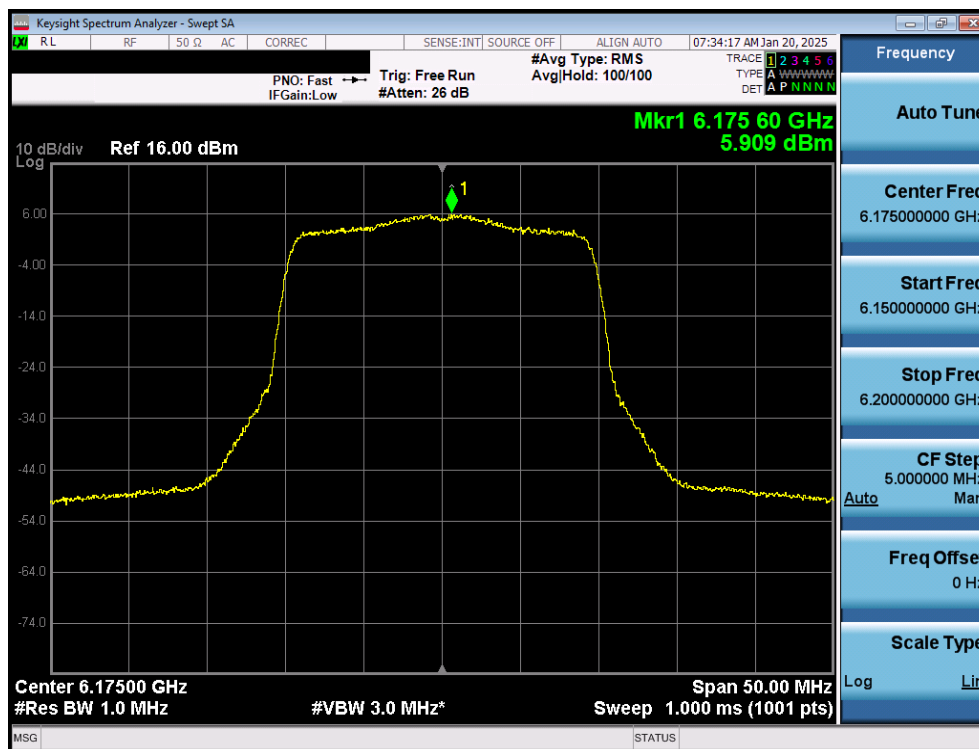


Plot 7-27. Power Spectral Density Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45) – SP

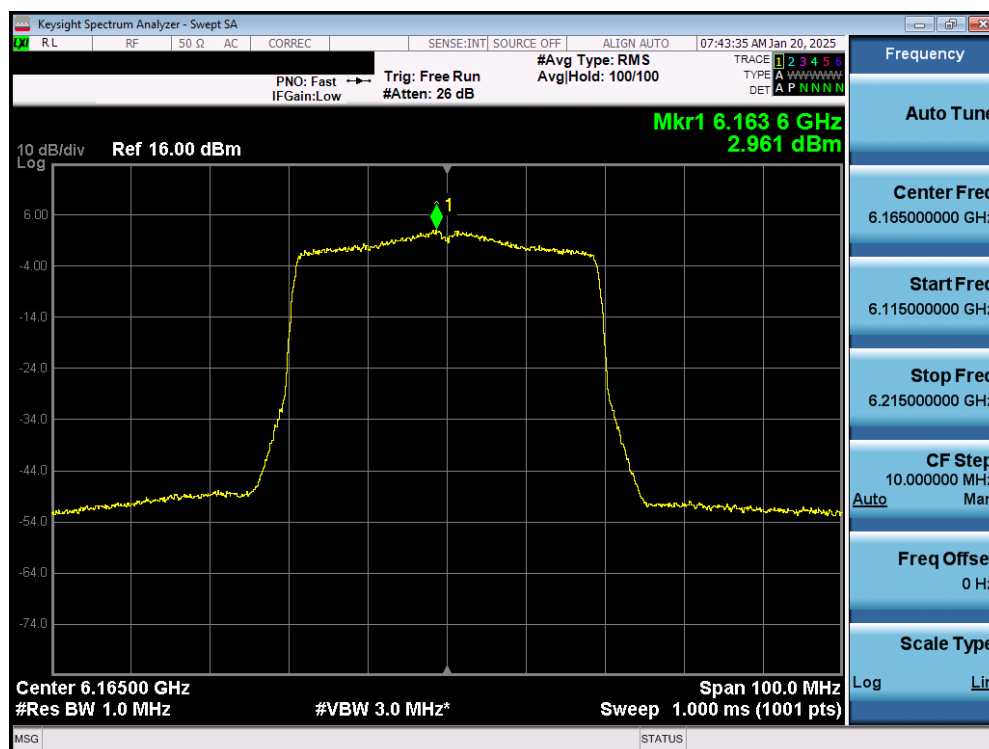


Plot 7-28. Power Spectral Density Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 41 of 99

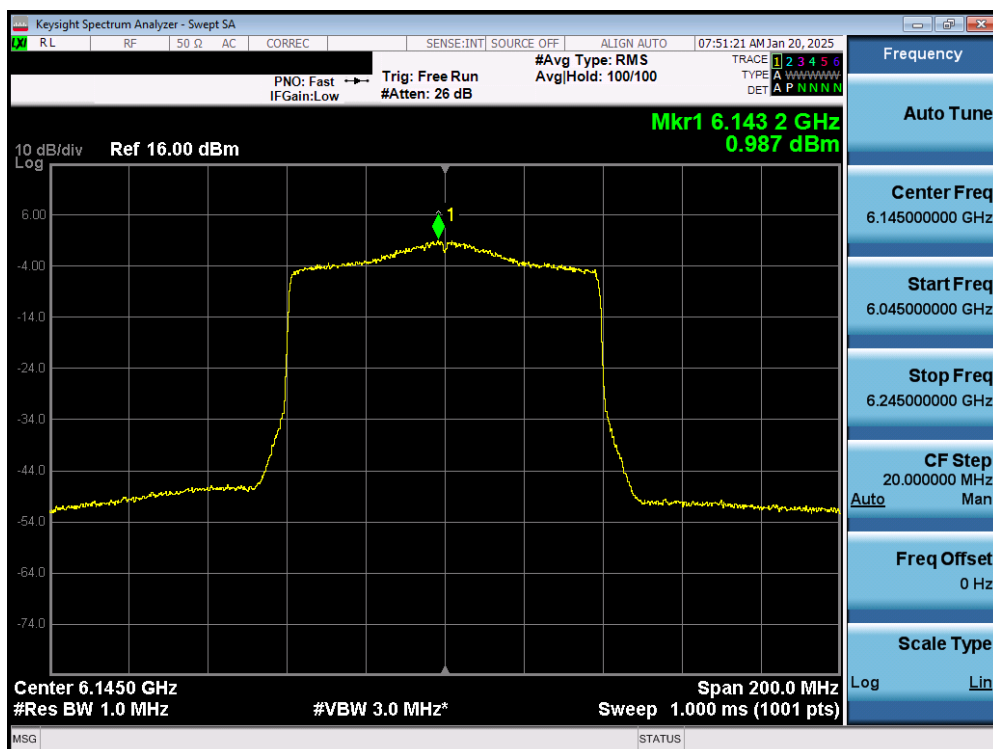


Plot 7-29. Power Spectral Density Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – SP

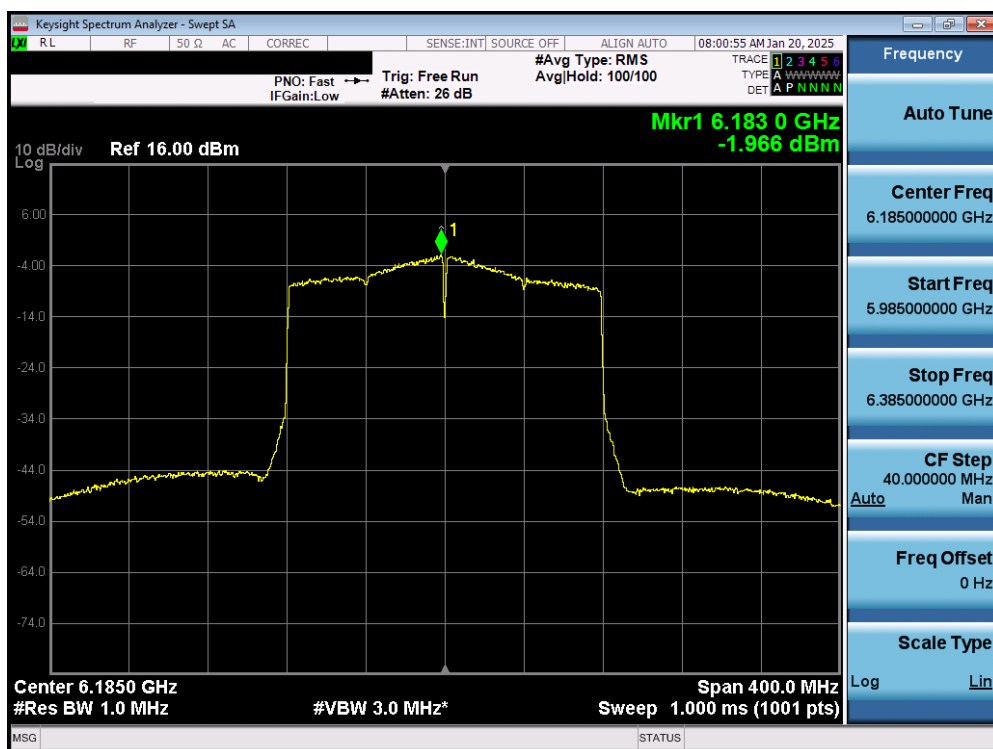


Plot 7-30. Power Spectral Density Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 42 of 99

7.4.2 MIMO Antenna-2 Power Spectral Density Measurement - (UNII Band 5)

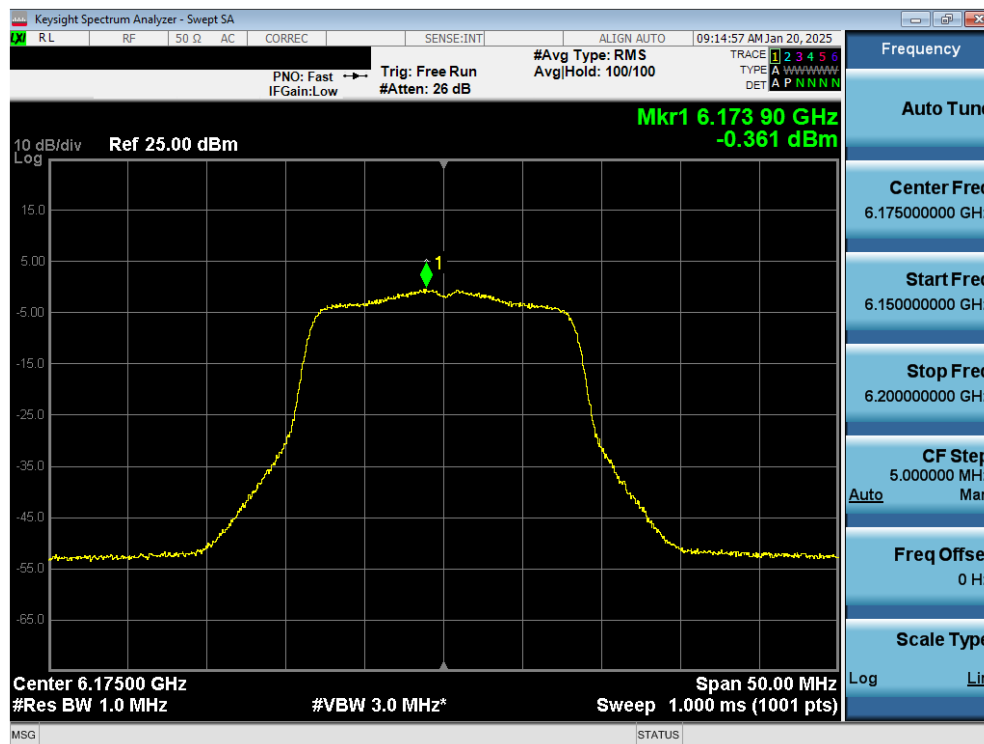


Plot 7-31. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) - LPI

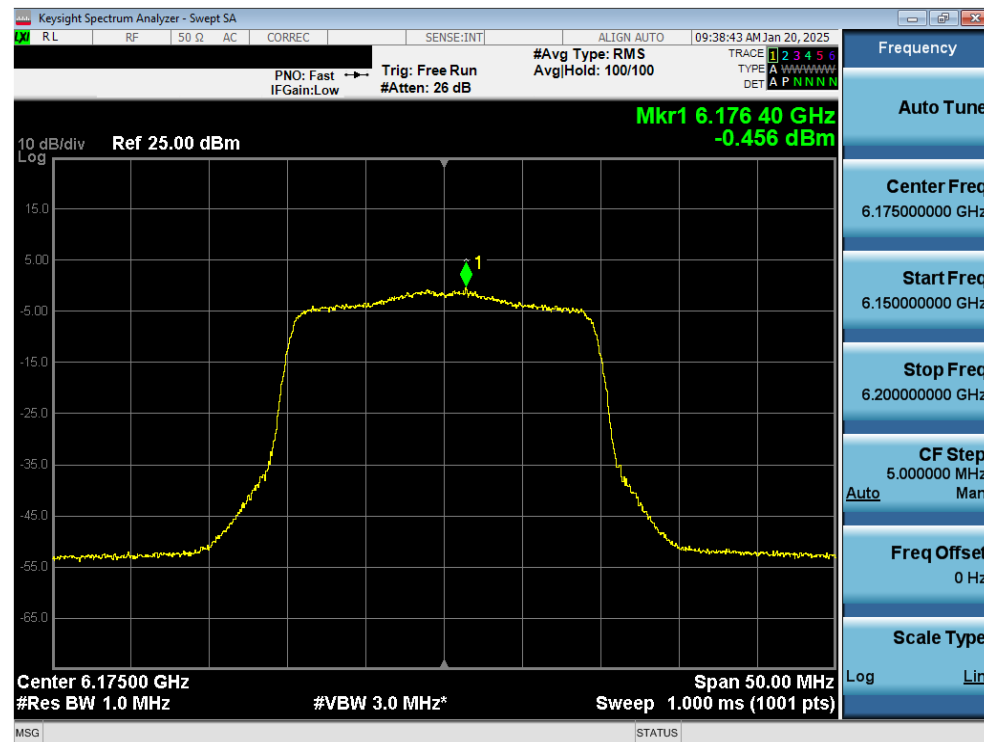


Plot 7-32. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 43 of 99

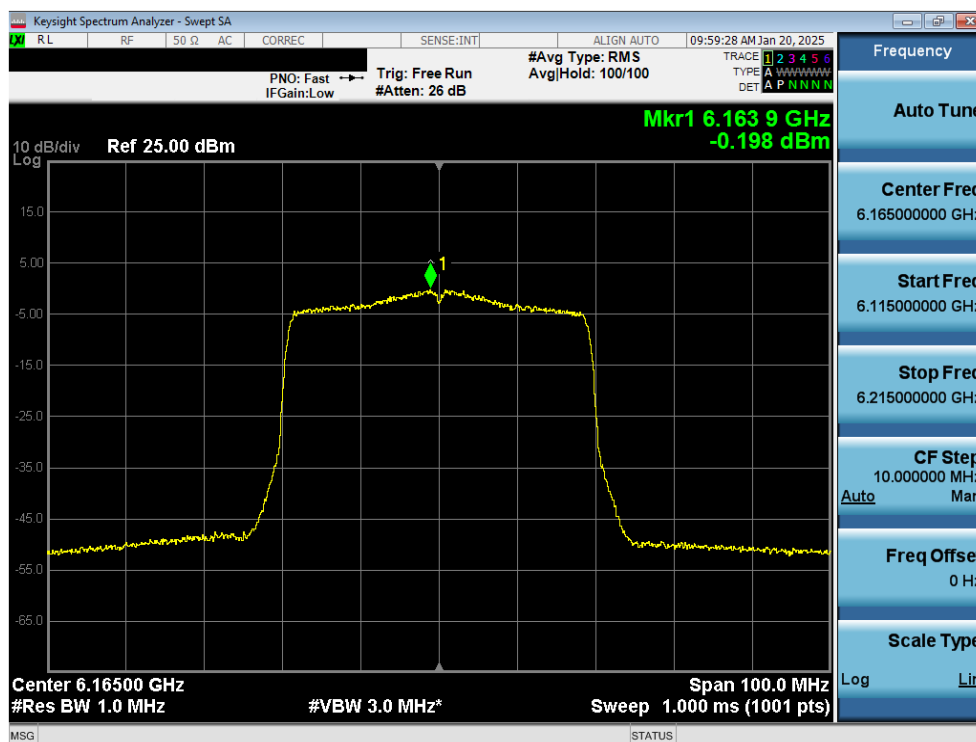


Plot 7-33. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11 ax (UNII Band 5) – Ch. 43) – LPI

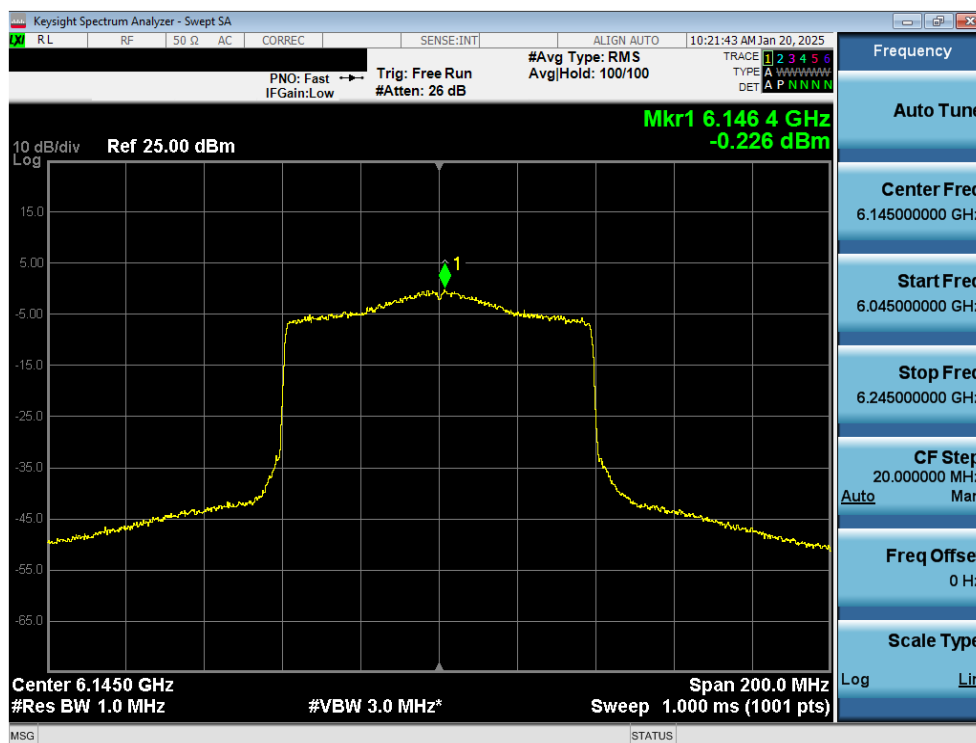


Plot 7-34. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11 ax (UNII Band 5) – Ch. 39) – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 44 of 99

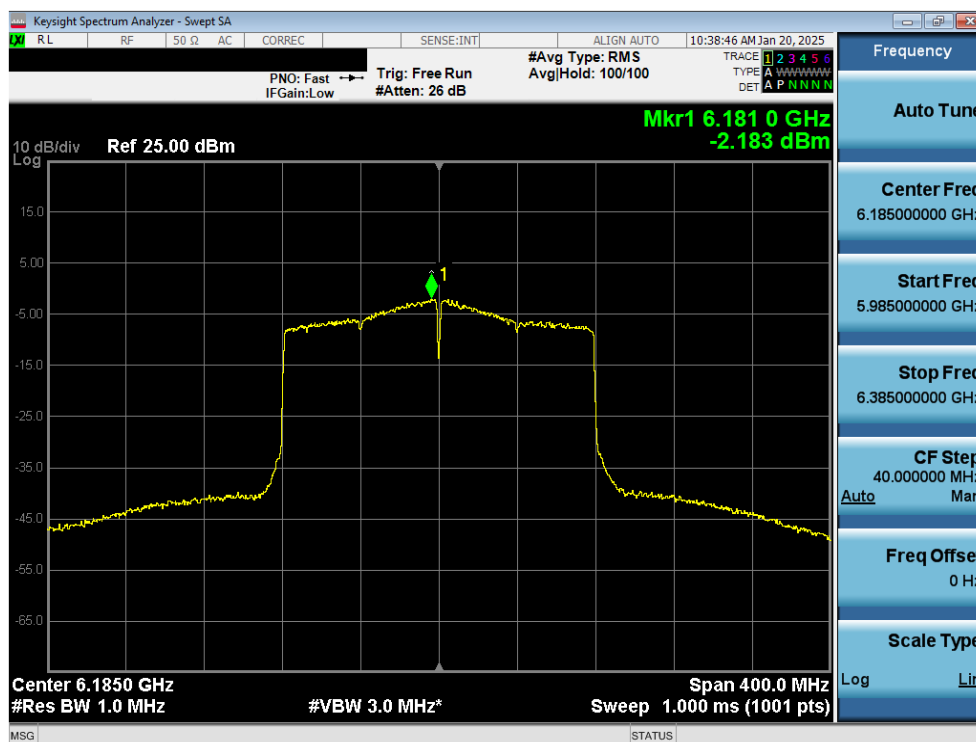


Plot 7-35. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – LPI

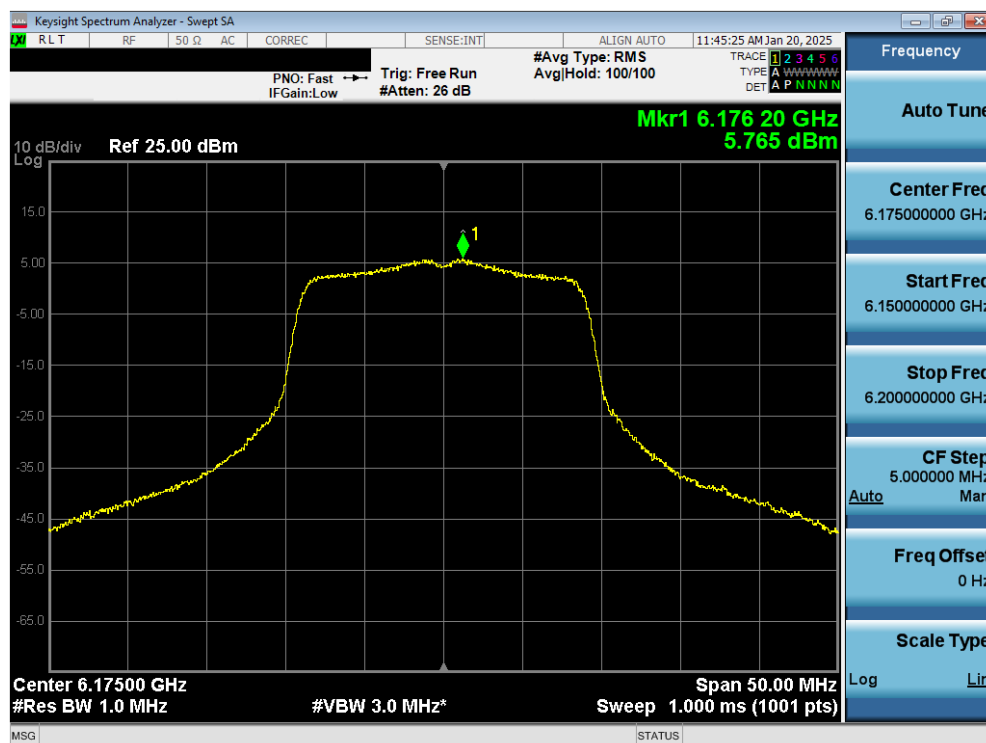


Plot 7-36. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 45 of 99

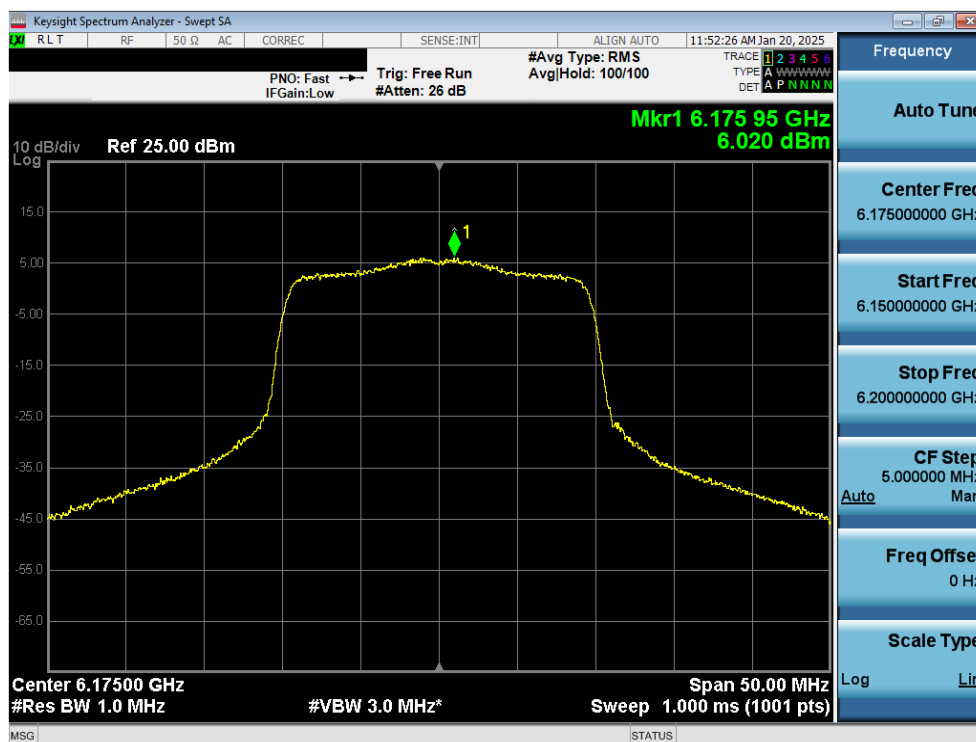


Plot 7-37. Power Spectral Density Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 45) - SP

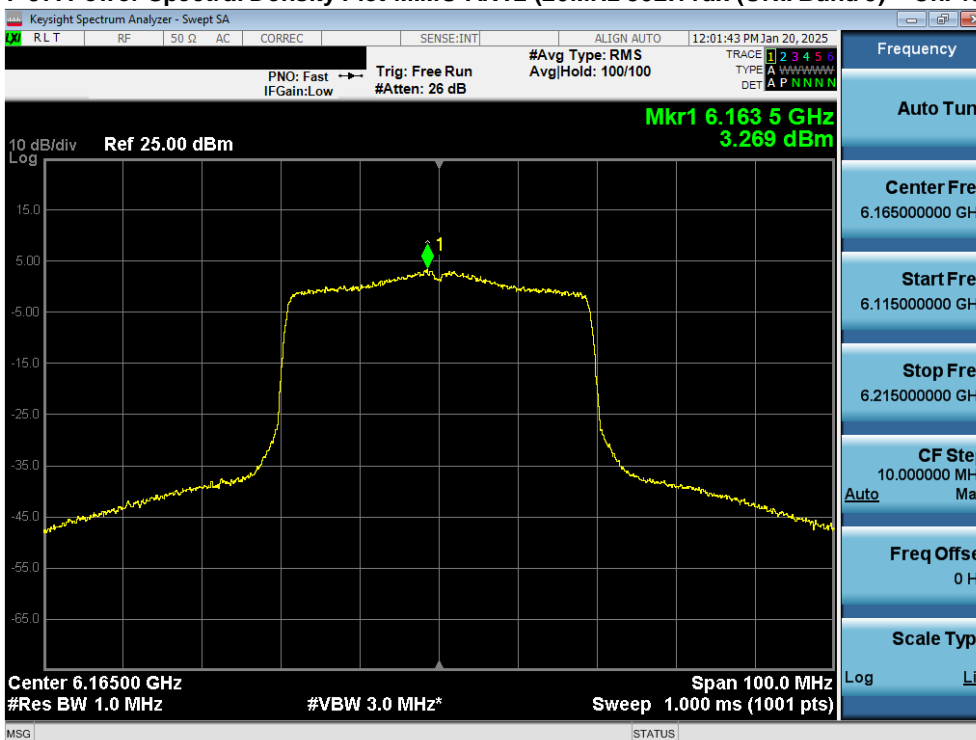


Plot 7-38. Power Spectral Density Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43) - SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 46 of 99

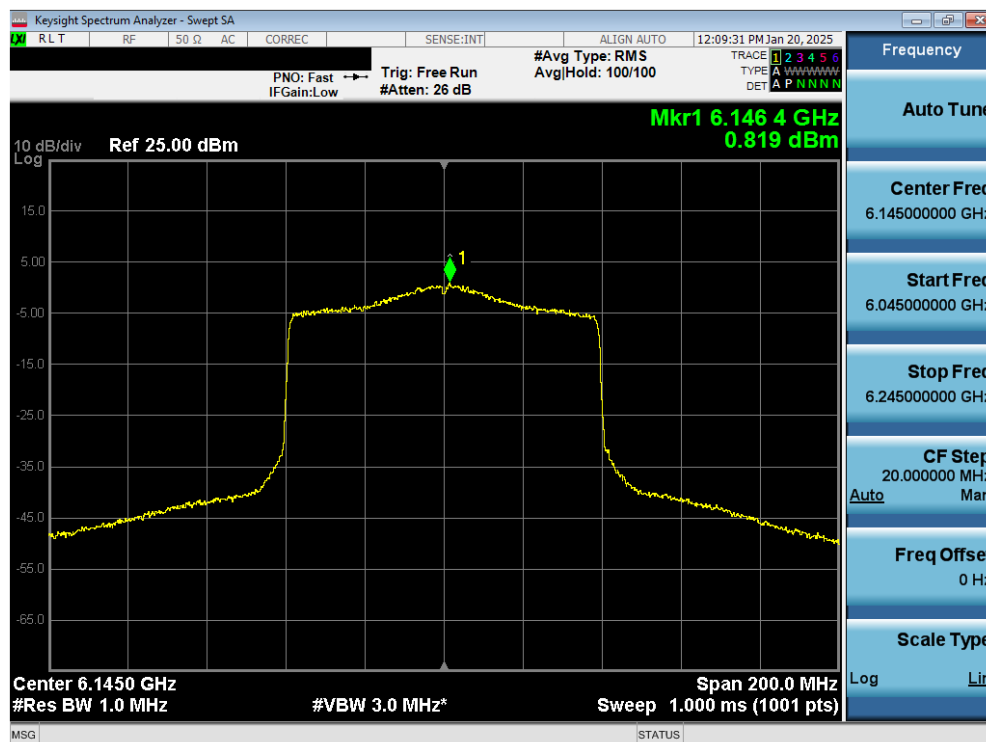

Plot 7-39. Power Spectral Density Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – SP

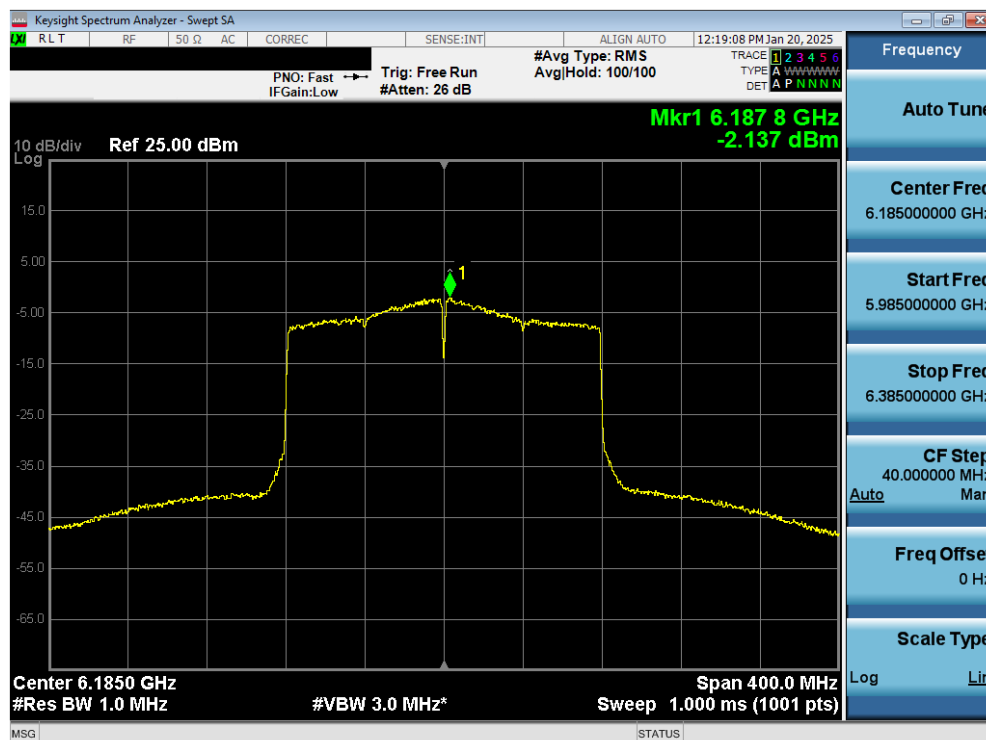

Plot 7-40. Power Spectral Density Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 47 of 99

Note:

Per ANSI C63.10-2013 Section 14.3.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna 1 and Antenna 2 were first measured separately as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi}$$

Sample MIMO Calculation:

At 5935MHz in 802.11a (20MHz BW) mode, the average conducted power spectral density was measured to be -1.46 dBm for Antenna-1 and -0.16 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(-1.46\text{dBm} + -0.16 \text{ dBm}) = (0.724 \text{ mW} + 0.977 \text{ mW}) = 1.701 \text{ mW} = 2.25 \text{ dBm}$$

Sample e.i.r.p Power Spectral Density Calculation:

At 5935 MHz in 802.11a (20MHz BW) mode, the average MIMO power density was calculated to be 2.25 dBm with directional gain of -5.39 dBi.

$$\text{e.i.r.p. Power Spectral Density(dBm)} = \text{Power Spectral Density (dBm)} + \text{Ant gain (dBi)} + \text{DCCF}$$

$$2.25 \text{ dBm} + -5.39 \text{ dBi} + 0\text{dB} = -3.14 \text{ dBm}$$

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 48 of 99

7.5 In-Band Emissions

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies.

For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

Test Procedure Used

KDB 987594D02 v03

Test Settings

1. Connect output of the antenna port to a spectrum analyzer or EMI receiver, with appropriate attenuation, as to not damage the instrumentation.
2. Set the reference level of the measuring equipment in accordance with procedure 4.1.5.2 of ANSI C63.10- 2013.
3. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (This will be used to determine the channel edge.)
4. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
 - a) Set the span to encompass the entire 26 dB EBW of the signal.
 - b) Set RBW = same RBW used for 26 dB EBW measurement.
 - c) Set VBW $\geq 3 \times$ RBW
 - d) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - e) Sweep time = auto.
 - f) Detector = RMS (i.e., power averaging)
 - g) Trace average at least 100 traces in power averaging (rms) mode.
 - h) Use the peak search function on the instrument to find the peak of the spectrum.
5. For the purposes of developing the emission mask, the channel bandwidth is defined as the 26 dB EBW.
6. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - i) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - j) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - k) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
7. Adjust the span to encompass the entire mask as necessary.
8. Clear trace.
9. Trace average at least 100 traces in power averaging (rms) mode.
10. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 49 of 99

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None.

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	a	PASS	PASS
	6175	45	a	PASS	PASS
	6415	93	a	PASS	PASS
	5935	2	ax (20MHz)	PASS	PASS
	6175	45	ax (20MHz)	PASS	PASS
	6415	93	ax (20MHz)	PASS	PASS
	5965	3	ax (40MHz)	PASS	PASS
	6165	43	ax (40MHz)	PASS	PASS
	6405	91	ax (40MHz)	PASS	PASS
	5985	7	ax (80MHz)	PASS	PASS
	6145	39	ax (80MHz)	PASS	PASS
	6385	87	ax (80MHz)	PASS	PASS
	6025	15	ax (160MHz)	PASS	PASS
	6185	47	ax (160MHz)	PASS	PASS
	6345	79	ax (160MHz)	PASS	PASS
Band 6	6435	97	a	PASS	PASS
	6475	105	a	PASS	PASS
	6515	113	a	PASS	PASS
	6435	97	ax (20MHz)	PASS	PASS
	6475	105	ax (20MHz)	PASS	PASS
	6515	113	ax (20MHz)	PASS	PASS
	6445	99	ax (40MHz)	PASS	PASS
	6485	107	ax (40MHz)	PASS	PASS
	6525	115	ax (40MHz)	PASS	PASS
	6465	103	ax (80MHz)	PASS	PASS
Band 7	6505	111	ax (160MHz)	PASS	PASS
	6535	117	a	PASS	PASS
	6695	149	a	PASS	PASS
	6875	185	a	PASS	PASS
	6535	117	ax (20MHz)	PASS	PASS
	6695	149	ax (20MHz)	PASS	PASS
	6875	185	ax (20MHz)	PASS	PASS
	6565	123	ax (40MHz)	PASS	PASS
	6725	155	ax (40MHz)	PASS	PASS
	6885	179	ax (40MHz)	PASS	PASS
	6545	119	ax (80MHz)	PASS	PASS
	6705	151	ax (80MHz)	PASS	PASS
	6865	183	ax (80MHz)	PASS	PASS
	6665	143	ax (160MHz)	PASS	PASS
	6825	175	ax (160MHz)	PASS	PASS
Band 8	6895	189	a	PASS	PASS
	6995	209	a	PASS	PASS
	7115	233	a	PASS	PASS
	6895	189	ax (20MHz)	PASS	PASS
	6995	209	ax (20MHz)	PASS	PASS
	7115	233	ax (20MHz)	PASS	PASS
	6925	187	ax (40MHz)	PASS	PASS
	7005	211	ax (40MHz)	PASS	PASS
	7085	227	ax (40MHz)	PASS	PASS
	6945	199	ax (80MHz)	PASS	PASS
	7025	215	ax (80MHz)	PASS	PASS
	6985	207	ax (160MHz)	PASS	PASS

Table 7-16. MIMO In-Band Emissions Results – LPI


FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 51 of 99

	Frequency [MHz]	Channel	802.11 MODE	Antenna-1 In-Band Emission	Antenna-2 In-Band Emission
Band 5	5935	2	ax (20MHz)	PASS	PASS
	6175	45	ax (20MHz)	PASS	PASS
	6415	93	ax (20MHz)	PASS	PASS
	5965	3	ax (40MHz)	PASS	PASS
	6165	43	ax (40MHz)	PASS	PASS
	6405	91	ax (40MHz)	PASS	PASS
	5985	7	ax (80MHz)	PASS	PASS
	6145	39	ax (80MHz)	PASS	PASS
	6385	87	ax (80MHz)	PASS	PASS
	6025	15	ax (160MHz)	PASS	PASS
	6185	47	ax (160MHz)	PASS	PASS
	6345	79	ax (160MHz)	PASS	PASS
Band 7	6695	117	ax (20MHz)	PASS	PASS
	6695	149	ax (20MHz)	PASS	PASS
	6875	185	ax (20MHz)	PASS	PASS
	6565	123	ax (40MHz)	PASS	PASS
	6725	155	ax (40MHz)	PASS	PASS
	6845	179	ax (40MHz)	PASS	PASS
	6545	119	ax (80MHz)	PASS	PASS
	6705	151	ax (80MHz)	PASS	PASS
	6865	183	ax (80MHz)	PASS	PASS
	6665	143	ax (160MHz)	PASS	PASS
	6825	175	ax (160MHz)	PASS	PASS


Table 7-17. MIMO In-Band Emissions Results – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 52 of 99

7.5.1 MIMO Antenna-1 In-Band Emission Plot Measurement - (UNII Band 5)

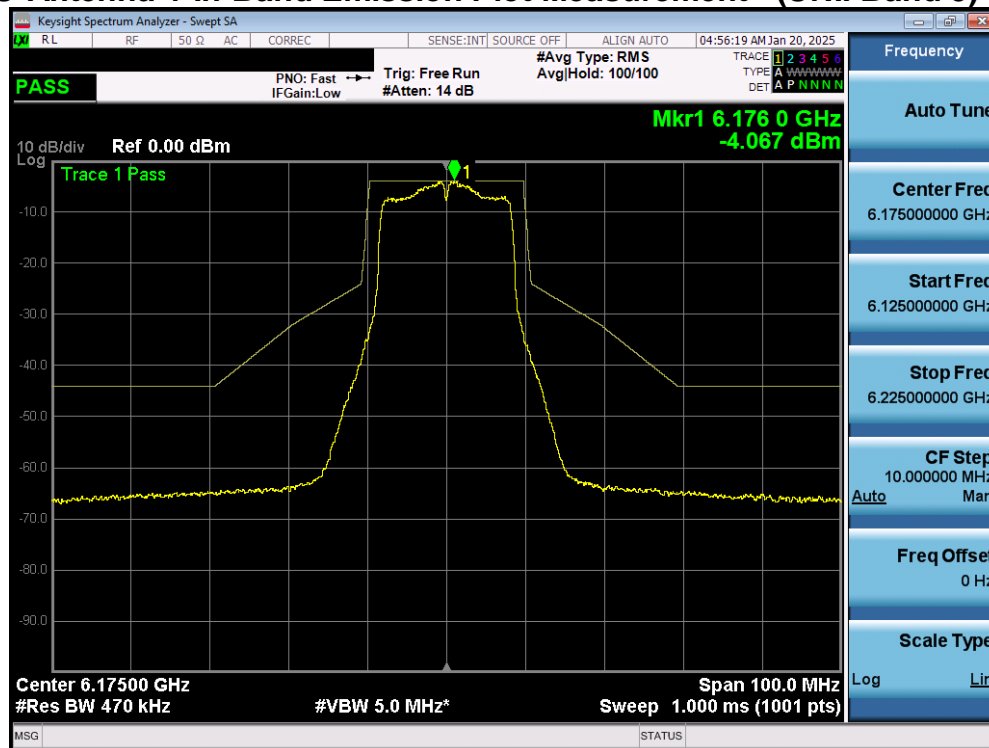


Plot 7-41. In Band Emissions Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45) - LPI

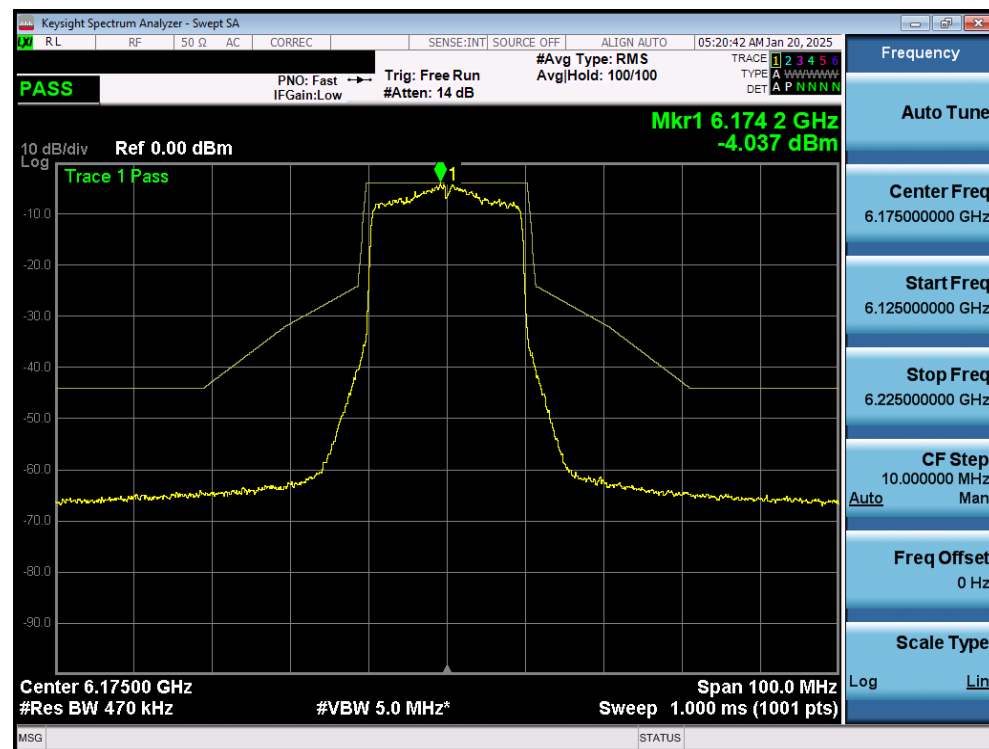


Plot 7-42. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 53 of 99

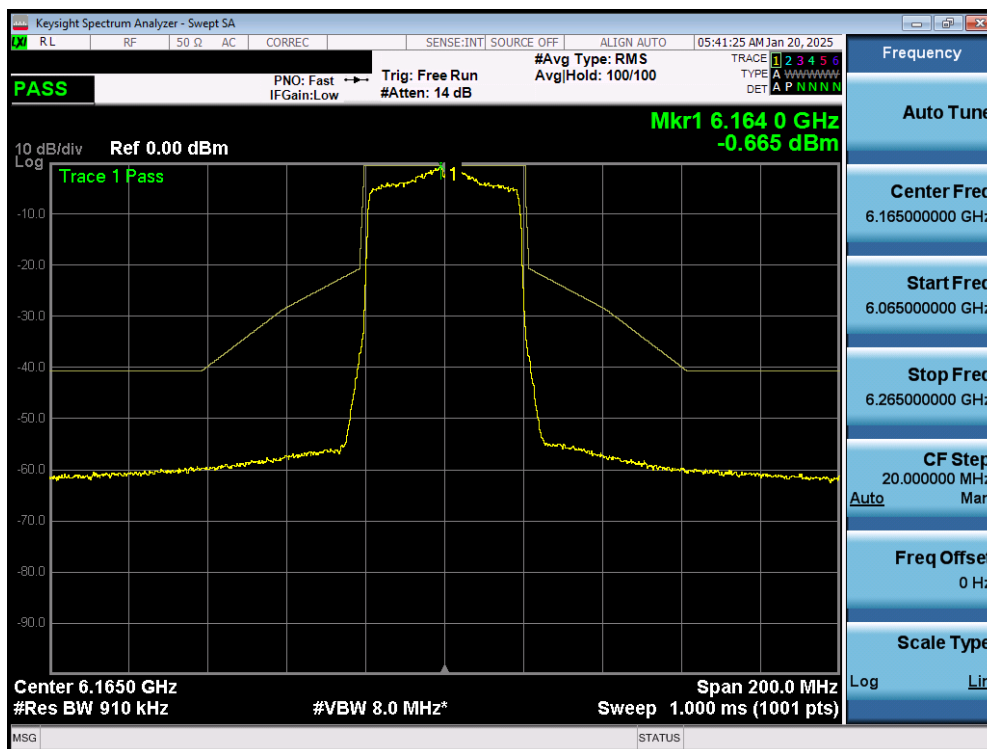


Plot 7-43. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43) – LPI

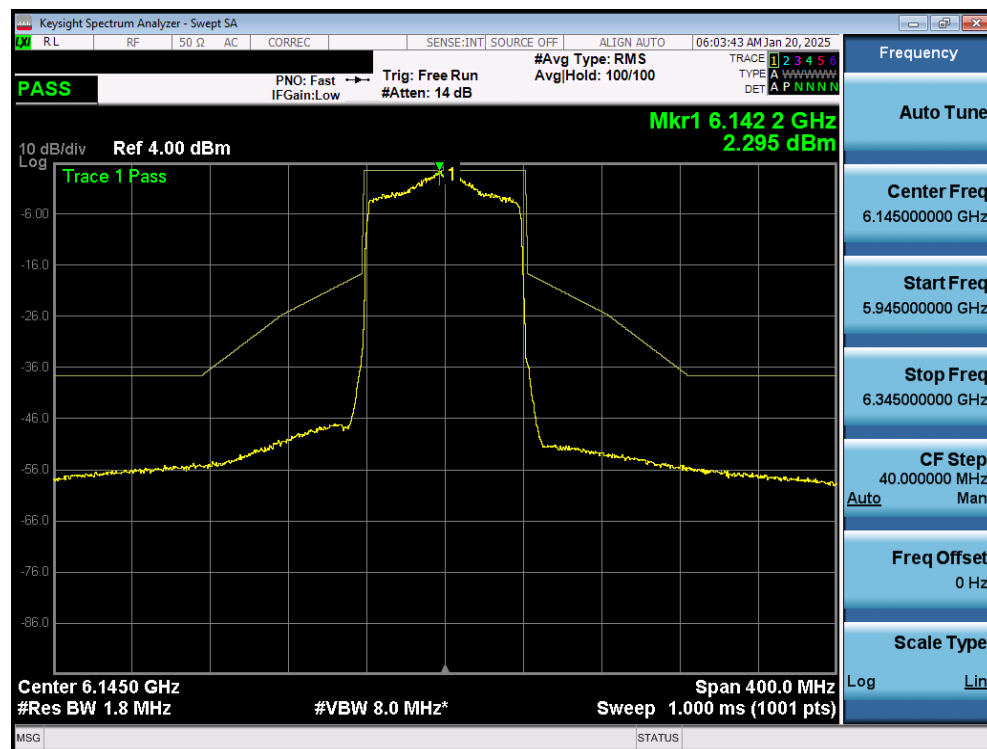


Plot 7-44. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 54 of 99

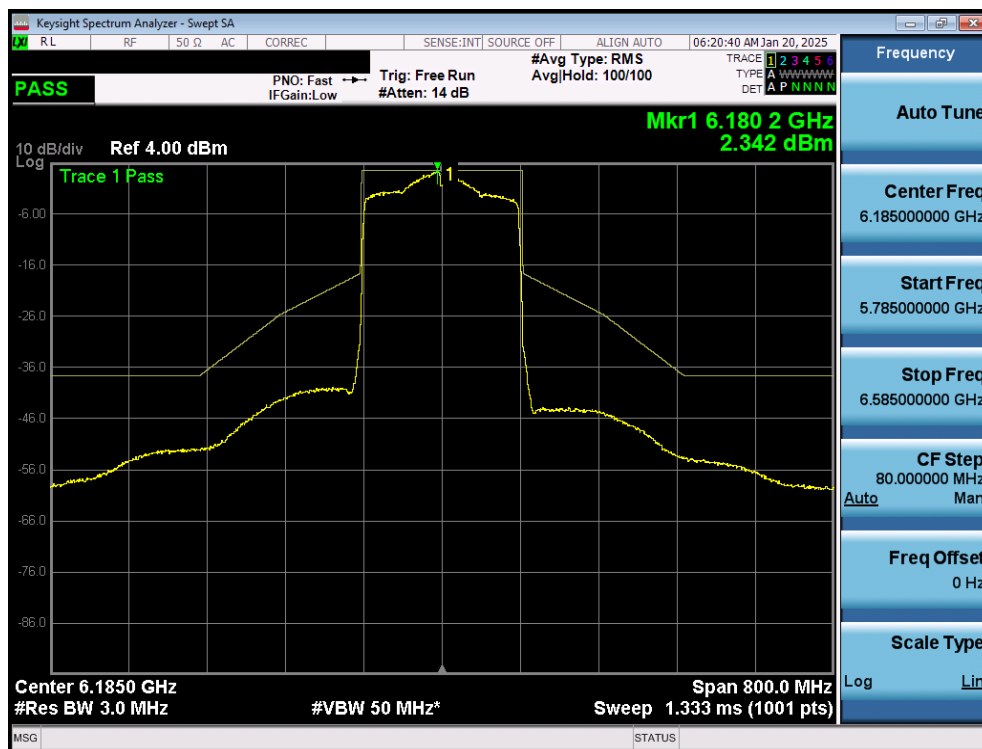


Plot 7-45. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – LPI

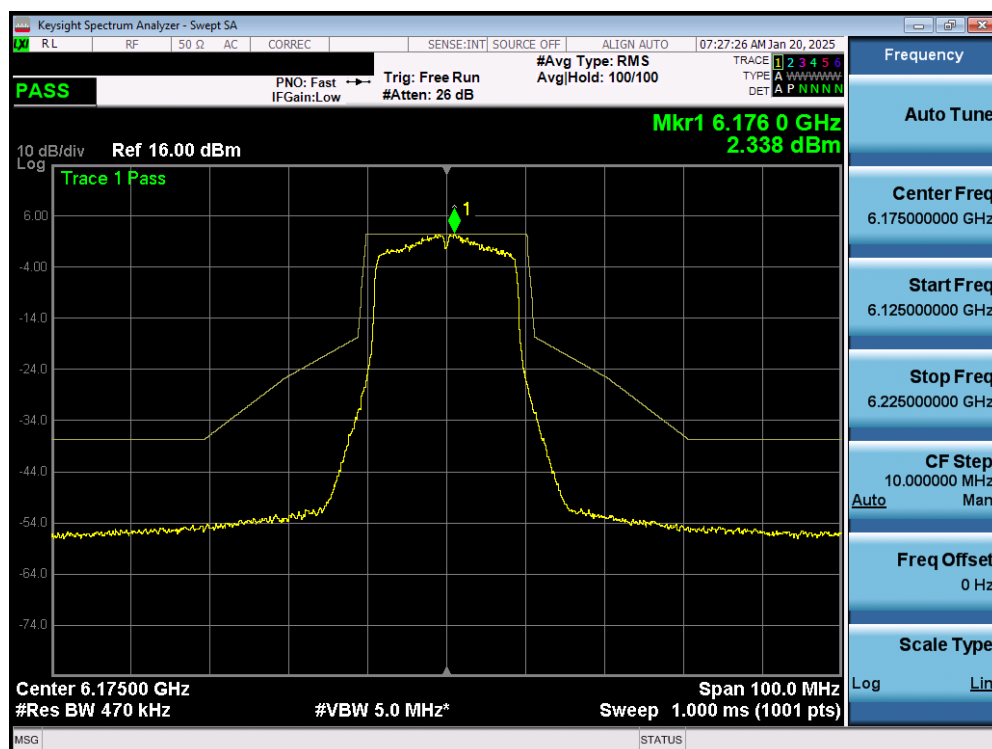


Plot 7-46. In Band Emissions Plot MIMO ANT1 (20MHz 802.11a (UNII Band 5) – Ch. 45) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 55 of 99

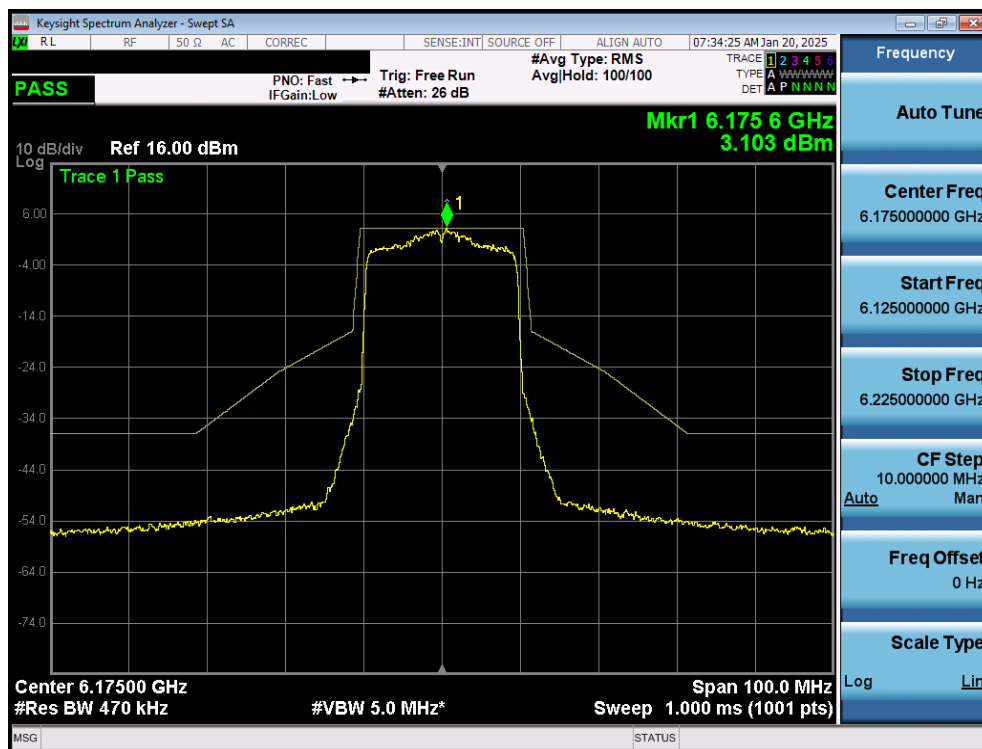


Plot 7-47. In Band Emissions Plot MIMO ANT1 (20MHz 802.11ax (UNII Band 5) – Ch. 45) – SP

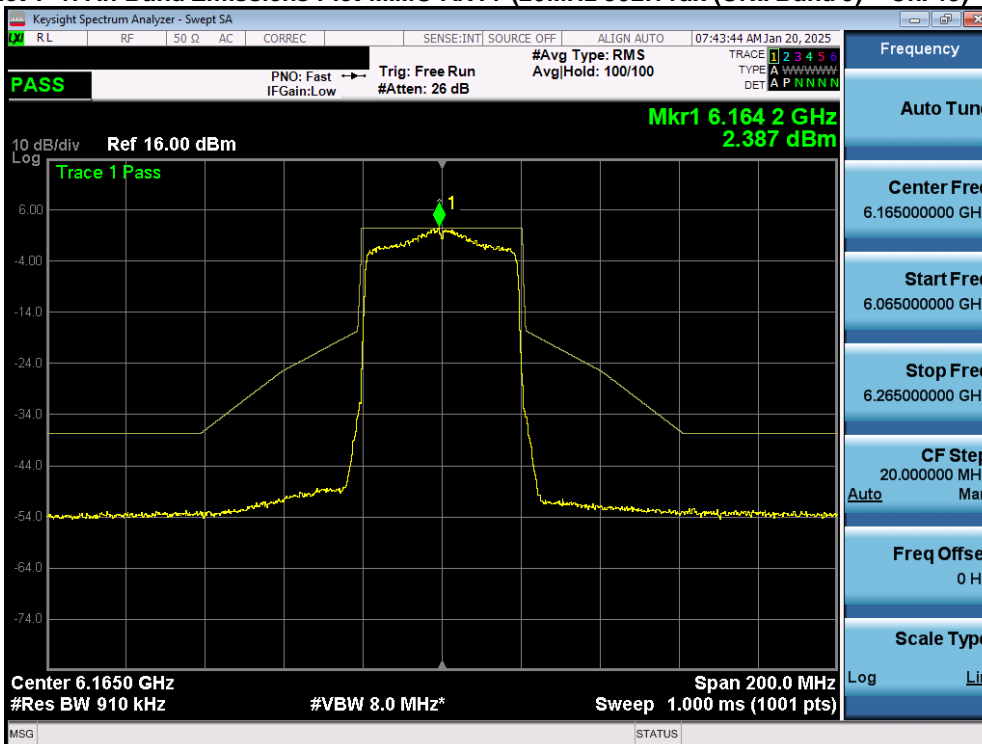


Plot 7-48. In Band Emissions Plot MIMO ANT1 (40MHz 802.11ax (UNII Band 5) – Ch. 43) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 56 of 99

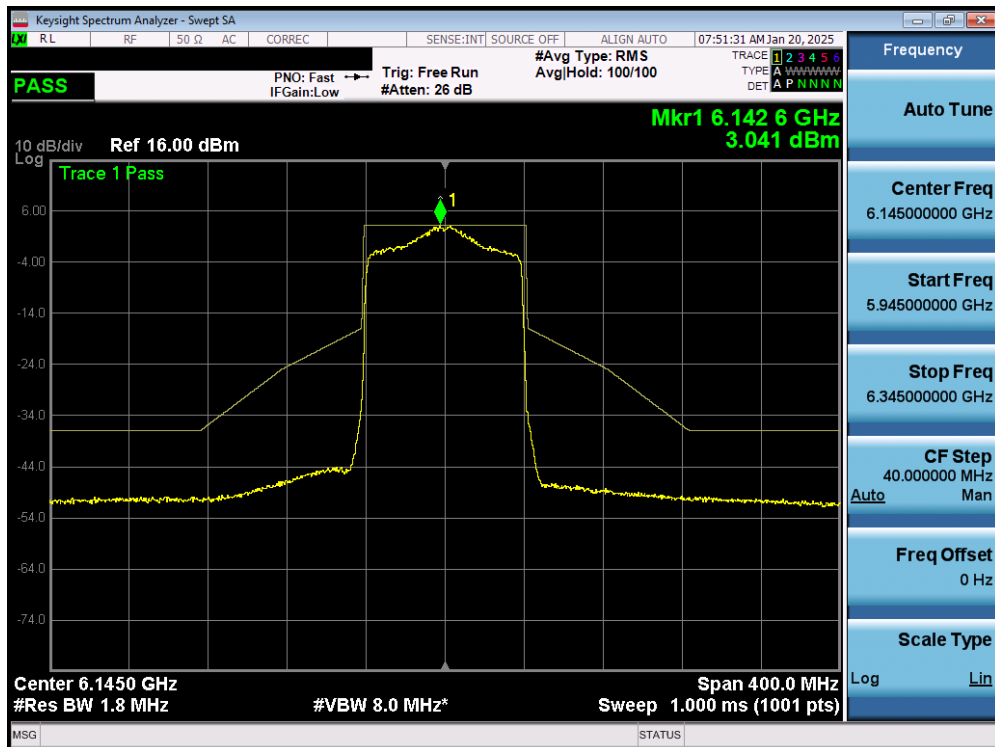


Plot 7-49. In Band Emissions Plot MIMO ANT1 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – SP

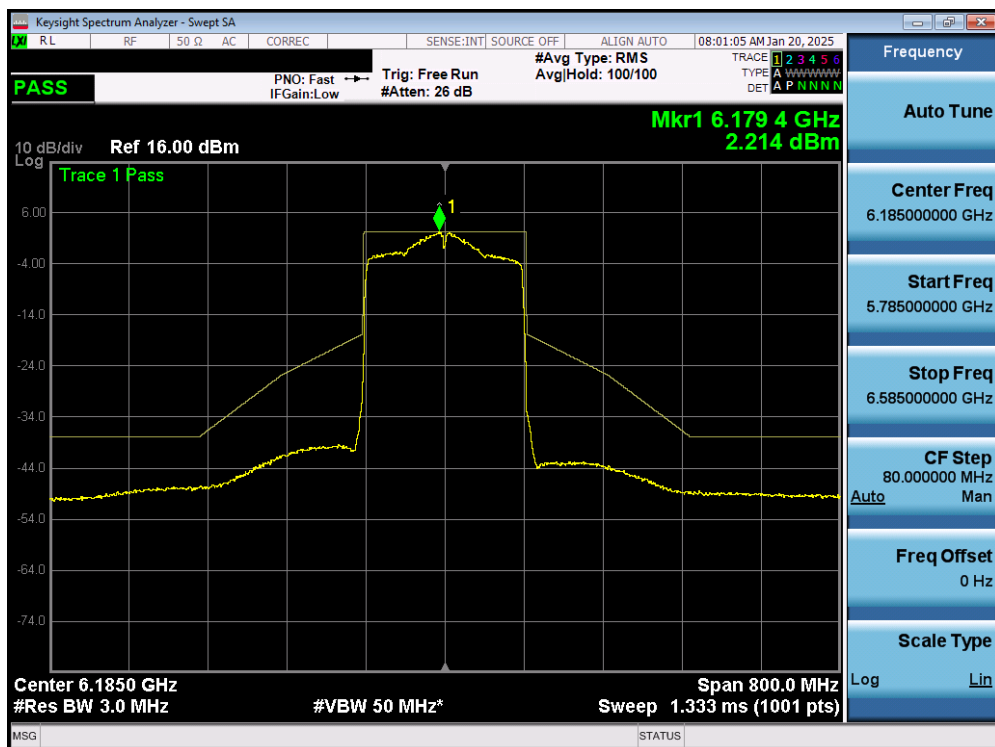


Plot 7-50. In Band Emissions Plot MIMO ANT1 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 57 of 99

7.5.2 MIMO Antenna-2 In-Band Emission Plot Measurement - (UNII Band 5)

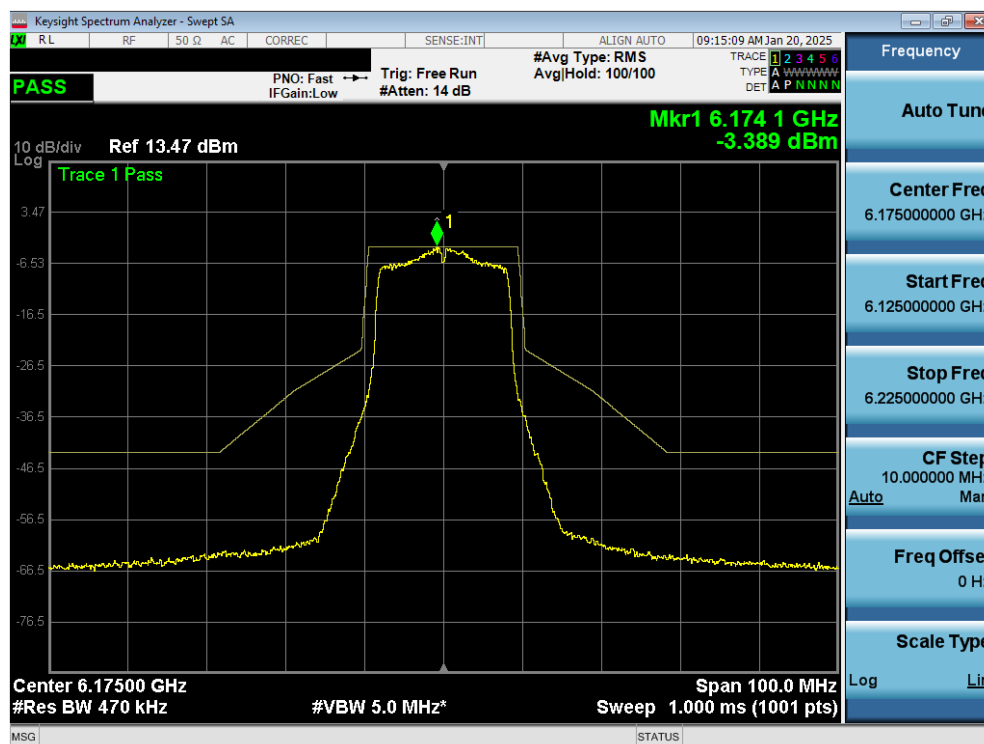


Plot 7-51. In Band Emissions Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) - LPI

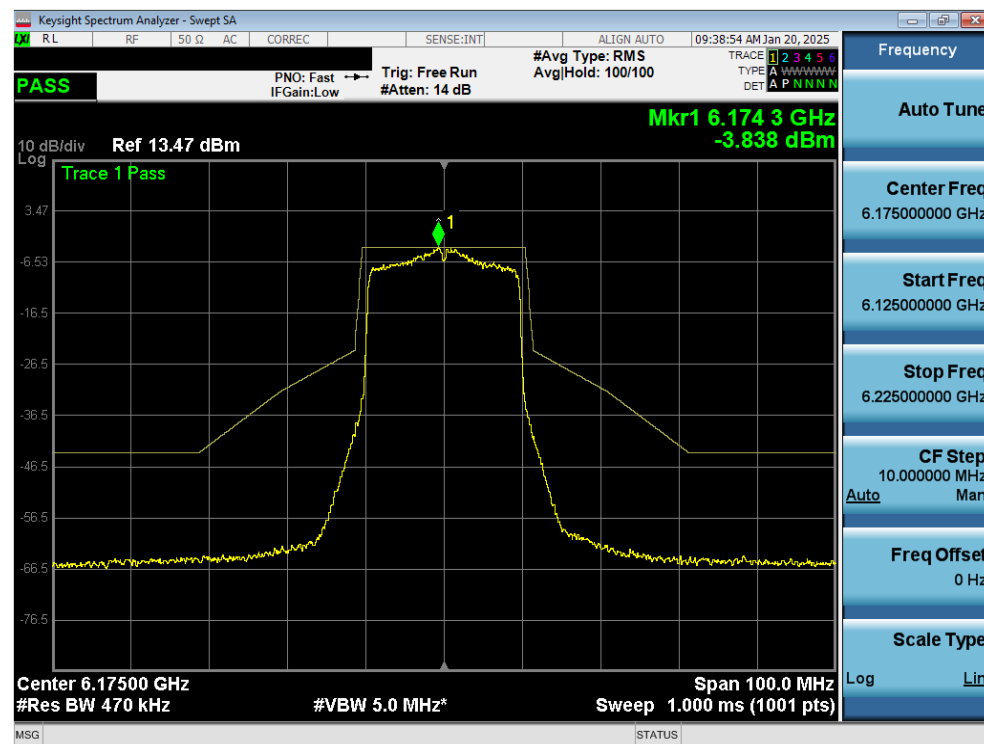


Plot 7-52. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 45) - LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 58 of 99

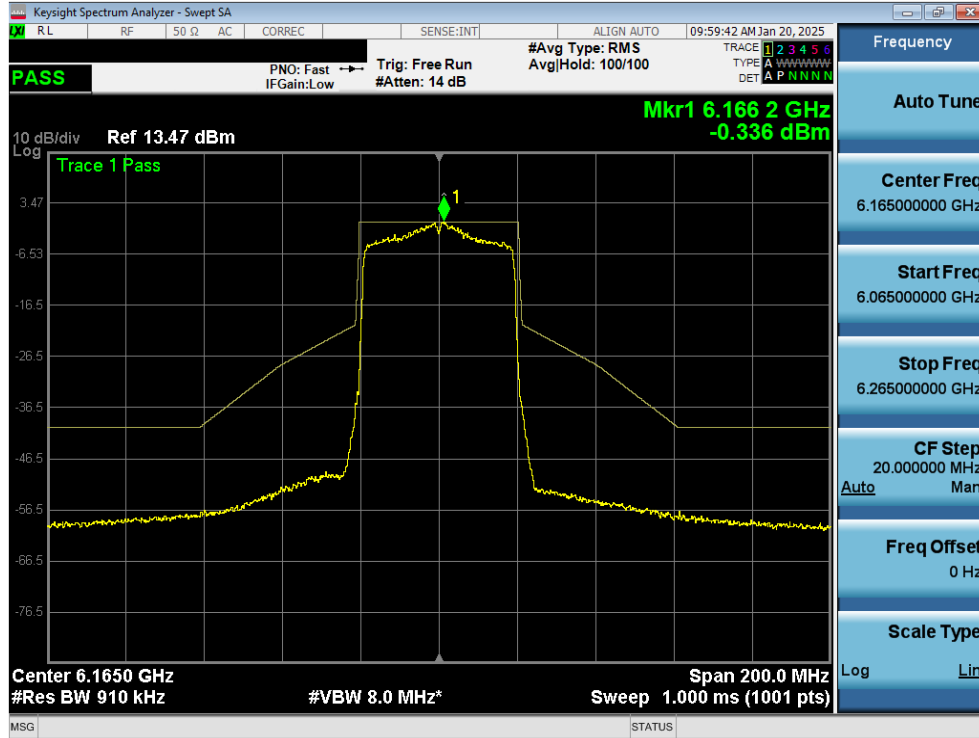


Plot 7-53. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43) – LPI

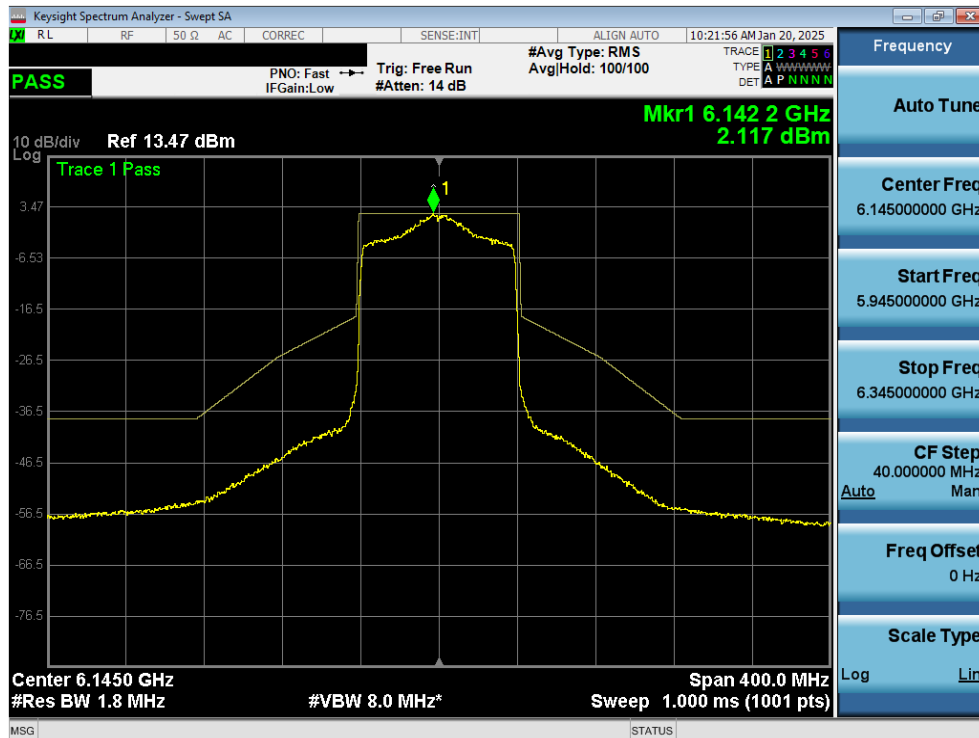


Plot 7-54. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 59 of 99

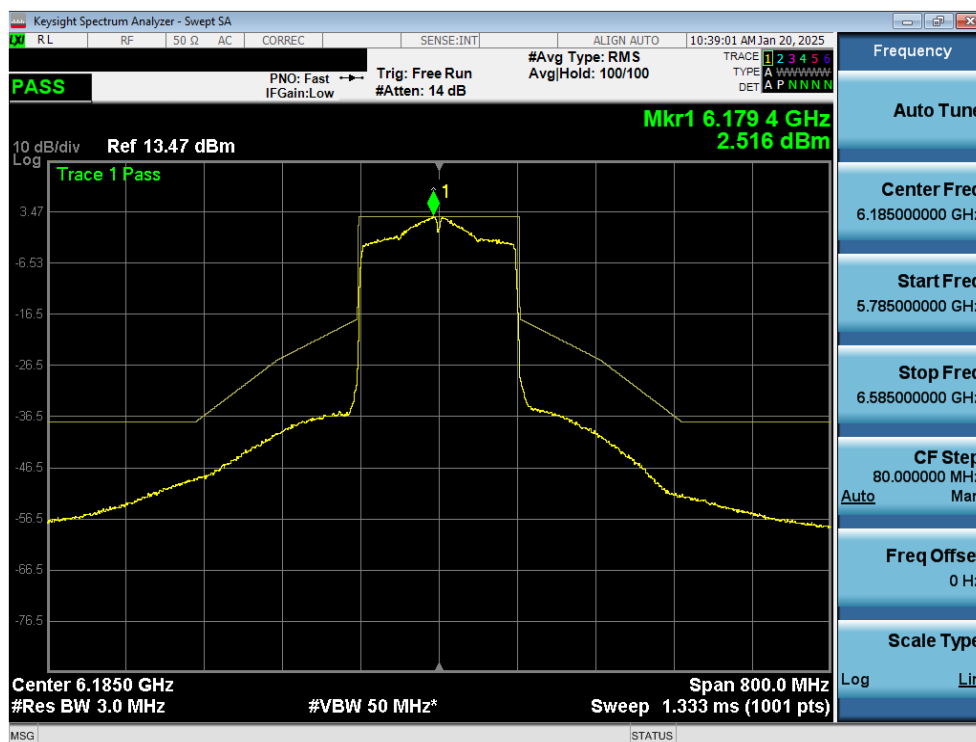


Plot 7-55. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – LPI

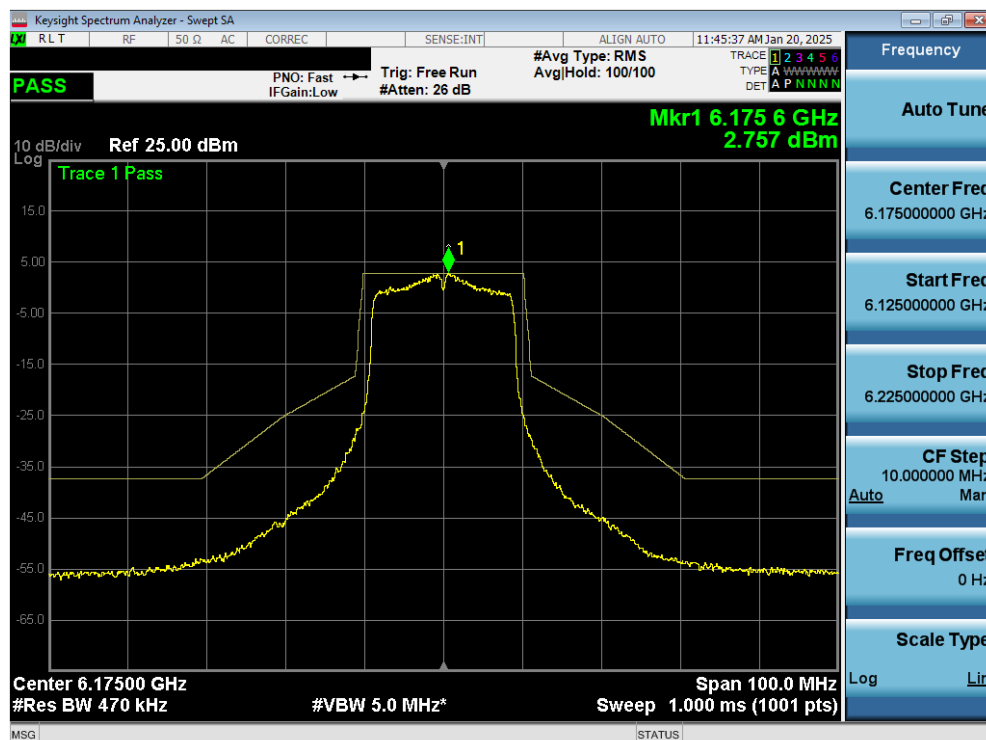


Plot 7-56. In Band Emissions Plot MIMO ANT2 (20MHz 802.11a (UNII Band 5) – Ch. 45) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 60 of 99

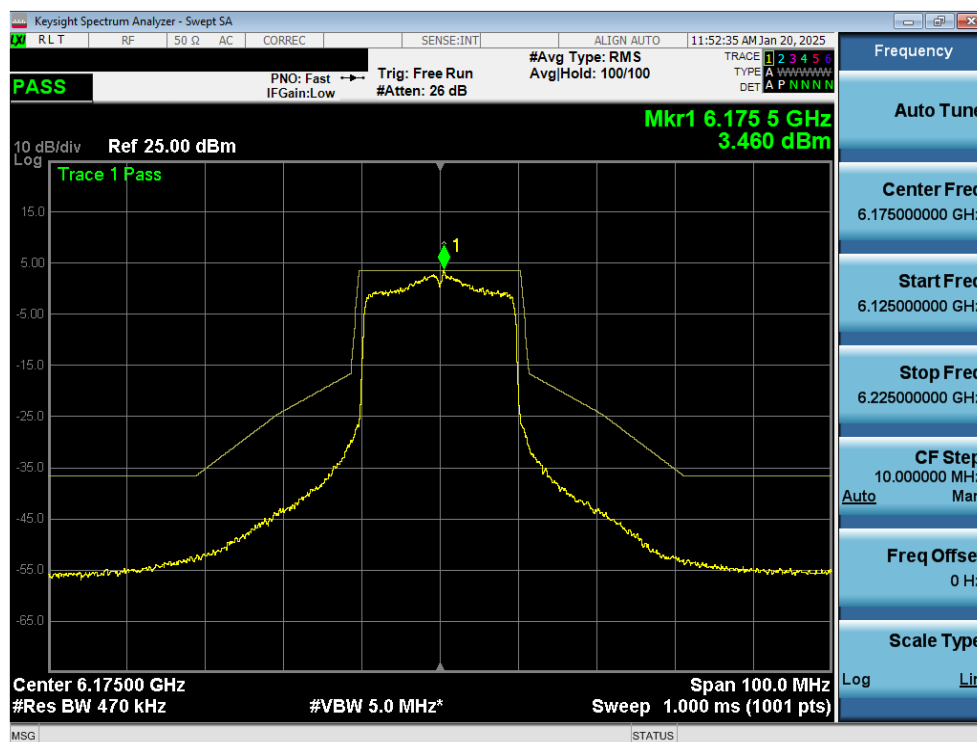


Plot 7-57. In Band Emissions Plot MIMO ANT2 (20MHz 802.11ax (UNII Band 5) – Ch. 45) – SP

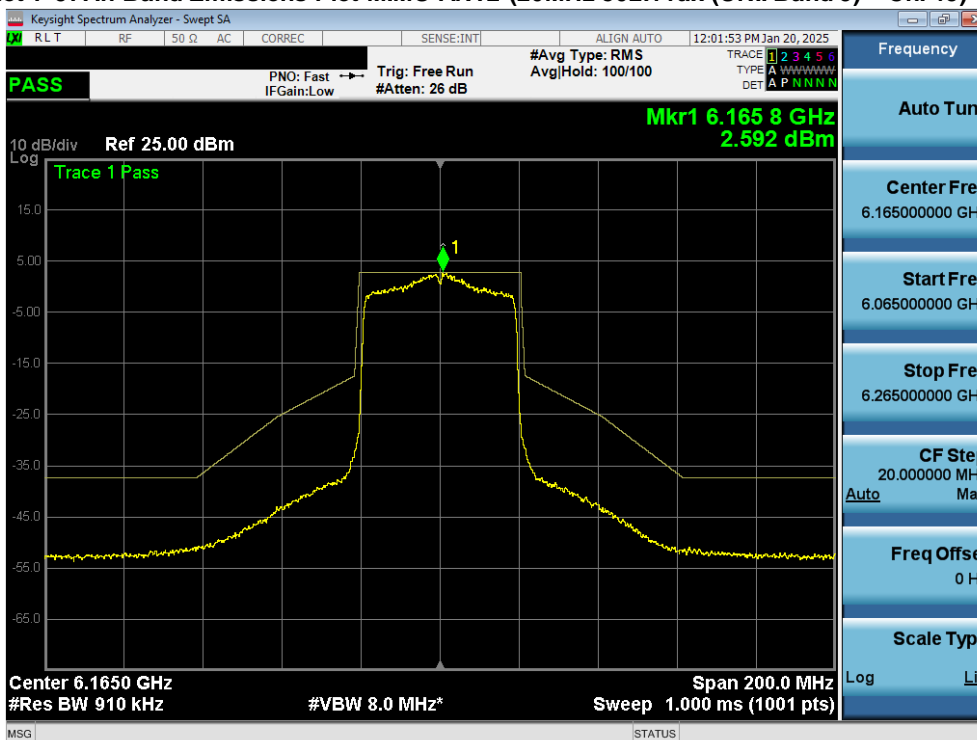


Plot 7-58. In Band Emissions Plot MIMO ANT2 (40MHz 802.11ax (UNII Band 5) – Ch. 43) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 61 of 99

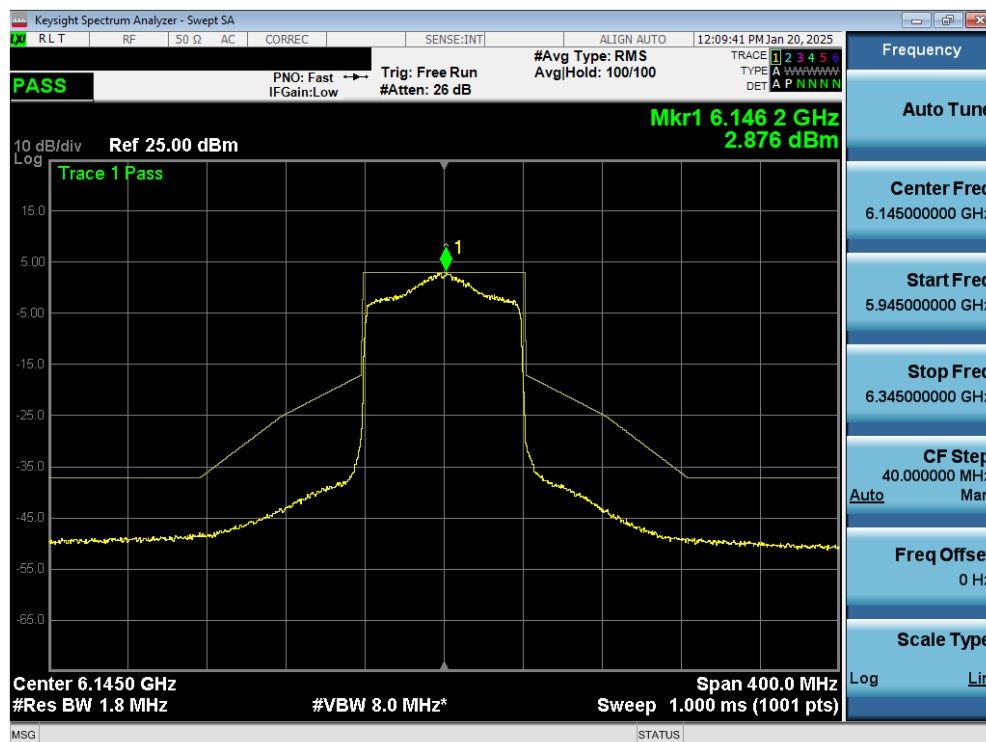

Plot 7-59. In Band Emissions Plot MIMO ANT2 (80MHz 802.11ax (UNII Band 5) – Ch. 39) – SP

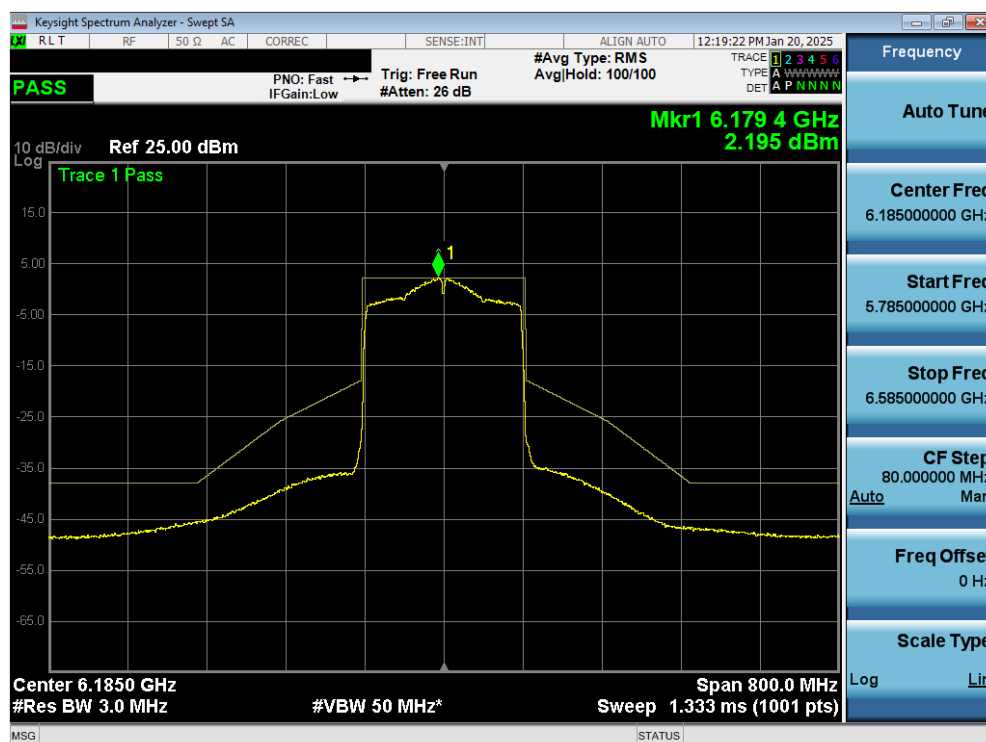

Plot 7-60. In Band Emissions Plot MIMO ANT2 (160MHz 802.11ax (UNII Band 5) – Ch. 47) – SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 62 of 99

7.6 Contention Based Protocol

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel if detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

KDB 987594D02 v03

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation, and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 of KDB 987594D02 v03 to determine the number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal, and repeat the process.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 63 of 99

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

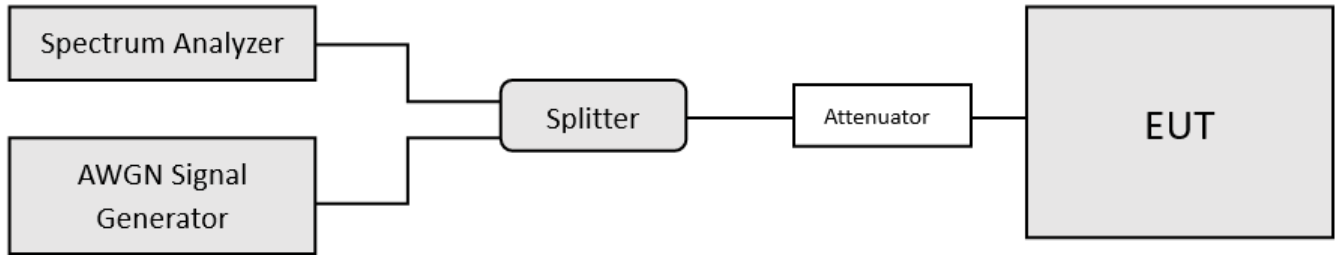


Figure 7-5. Contention-based protocol test setup conducted method.

Test Notes

1. Per guidance from KDB 987594D02 v03, contention-based protocol was tested using an AWGN signal with a bandwidth of 10MHz (see Plot 7-61). The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission (see Plot 7-62), M1 indicates the point at which the AWGN signal is introduced. D1 indicates where the AWGN signal is terminated, at least 10 seconds following M1.
2. 15 trials were run to assure that at least 90% of certainty was met.
3. Per Guidance from KDB 987594 D04 v03, contention-based protocol was tested with receiver with the lowest antenna gain.
4. All CBP Timing Plots shown are for the ceased condition. Some spikes that may be shown are from adjacent portions of the spectrum that are still transmitting.
5. In the presence of an AWGN signal, the EUT was shown to either completely move out of the channel or to reduce its bandwidth for the purpose of incumbent avoidance. Representative channel move plots are included for one sub-band to show how the channel reduces when the AWGN is injected at the lower edge, the center, and the upper edge of a channel.
6. This device only punctures to optimize network performance and never to avoid licensed incumbents.
7. For the channel move demonstration in Section 7.6.3, only plots from UNII-5 band are included. Additionally, the AWGN signal is not visible because the AWGN level is well below the noise floor.

$$\text{Detection Level} = \text{Injected AWGN Power (dBm)} - \text{Antenna Gain (dBi)} + \text{Path Loss (dB)}$$

Equation 7-1. Detection Level Calculation

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 64 of 99

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Path Loss (dB)	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-74.46	-8.70	1.03	-64.73	-62.0	-2.73
				6110	-73.57	-8.70	1.03	-63.84	-62.0	-1.84
	47	6185	160	6185	-72.44	-8.70	1.03	-62.71	-62.0	-0.71
				6260	-74.29	-8.70	1.03	-64.56	-62.0	-2.56
UNII Band 6	101	6455	20	6455	-73.93	-8.50	1.03	-64.40	-62.0	-2.40
				6430	-74.39	-8.50	1.03	-64.86	-62.0	-2.86
	111	6505	160	6505	-74.64	-8.50	1.03	-65.11	-62.0	-3.11
				6580	-73.00	-8.50	1.03	-63.47	-62.0	-1.47
UNII Band 7	149	6695	20	6695	-80.73	-8.70	1.03	-71.00	-62.0	-9.00
				6750	-74.66	-8.70	1.03	-64.93	-62.0	-2.93
	175	6825	160	6825	-72.89	-8.70	1.03	-63.16	-62.0	-1.16
				6900	-73.56	-8.70	1.03	-63.83	-62.0	-1.83
UNII Band 8	197	6935	20	6935	-77.93	-8.60	1.03	-68.30	-62.0	-6.30
				6910	-72.63	-8.60	1.03	-63.00	-62.0	-1.00
	207	6985	160	6985	-71.65	-8.60	1.03	-62.02	-62.0	-0.02
				7060	-73.68	-8.60	1.03	-64.05	-62.0	-2.05

Table 7-18. Contention Based Protocol – Incumbent Detection Results

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Antenna Gain [dBi]	EUT Transmission Status			Detection Limit [dBm]	Margin [dB]
						Adjusted AWGN Power (dBm)				
						Normal	Minimal	Ceased		
UNII Band 5	53	6215	20	6215	-8.70	-65.90	-64.98	-64.73	-62.0	-2.73
				6190	-8.70	-65.06	-64.20	-63.84	-62.0	-1.84
	47	6265	160	6265	-8.70	-64.05	-63.06	-62.71	-62.0	-0.71
				6340	-8.70	-65.98	-64.98	-64.56	-62.0	-2.56
UNII Band 6	101	6455	20	6455	-8.50	-65.51	-64.73	-64.40	-62.0	-2.40
				6350	-8.50	-66.09	-65.28	-64.86	-62.0	-2.86
	111	6425	160	6425	-8.50	-66.57	-65.54	-65.11	-62.0	-3.11
				6500	-8.50	-64.99	-63.80	-63.47	-62.0	-1.47
UNII Band 7	149	6695	20	6695	-8.70	-72.44	-71.41	-71.00	-62.0	-9.00
				6670	-8.70	-66.26	-65.57	-64.93	-62.0	-2.93
	175	6745	160	6745	-8.70	-64.52	-63.70	-63.16	-62.0	-1.16
				6820	-8.70	-65.55	-64.15	-63.83	-62.0	-1.83
UNII Band 8	197	6935	20	6935	-8.60	-69.85	-68.65	-68.30	-62.0	-6.30
				6830	-8.60	-64.33	-63.42	-63.00	-62.0	-1.00
	207	6905	160	6905	-8.60	-63.26	-62.68	-62.02	-62.0	-0.02
				6980	-8.60	-65.71	-64.37	-64.05	-62.0	-2.05

Table 7-19. Contention Based Protocol – Detection Results – All Tx Cases


FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 65 of 99

CBP Detection (1 = Detection, Blank = No Detection)																				
Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate (%)
UNII Band 5	53	6215	20	6215	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6190	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	47	6265	160	6265	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6340	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 6	101	6455	20	6455	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6350	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	111	6425	160	6425	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6500	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 7	149	6695	20	6695	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6670	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	175	6745	160	6745	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6820	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
UNII Band 8	197	6935	20	6935	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6830	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	207	6905	160	6905	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6980	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Table 7-20. Contention Based Protocol – Incumbent Detection Trial Results

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 66 of 99

7.6.1 AWGN Plots

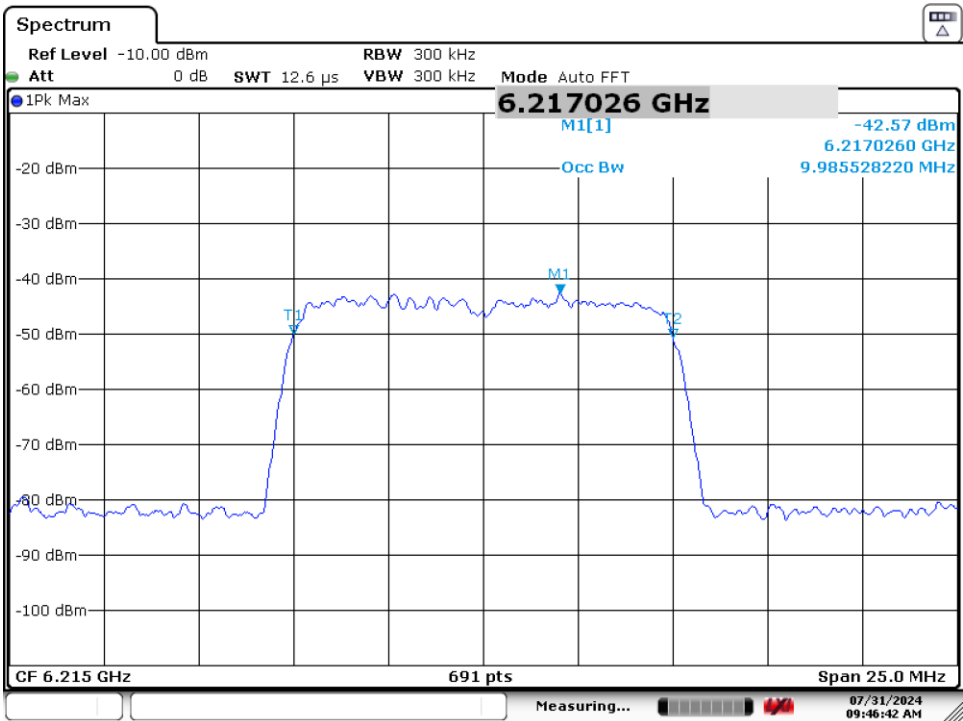


Date: 31.JUL.2024 09:46:42


Plot 7-61. AWGN Signal (Demonstration)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 67 of 99

7.6.2 CBP Timing Plots

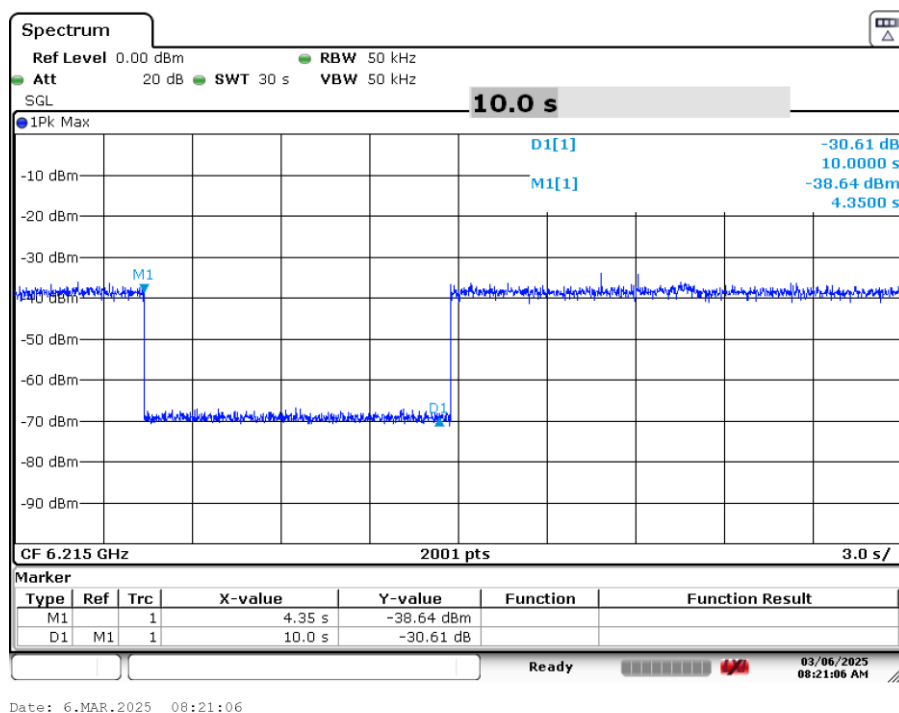


Plot 7-62. Contention Based Protocol Timing Plot (20MHz (UNII Band 5) – Ch. 53)

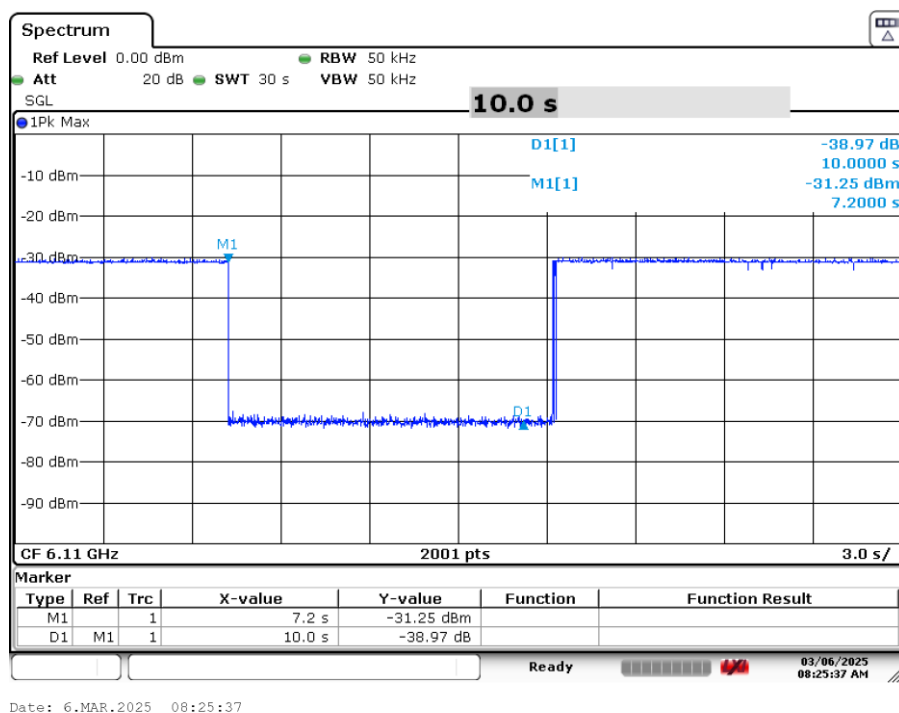


Plot 7-63. Contention Based Protocol Timing Plot (160MHz (UNII Band 5) – Ch. 47 Low)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 68 of 99

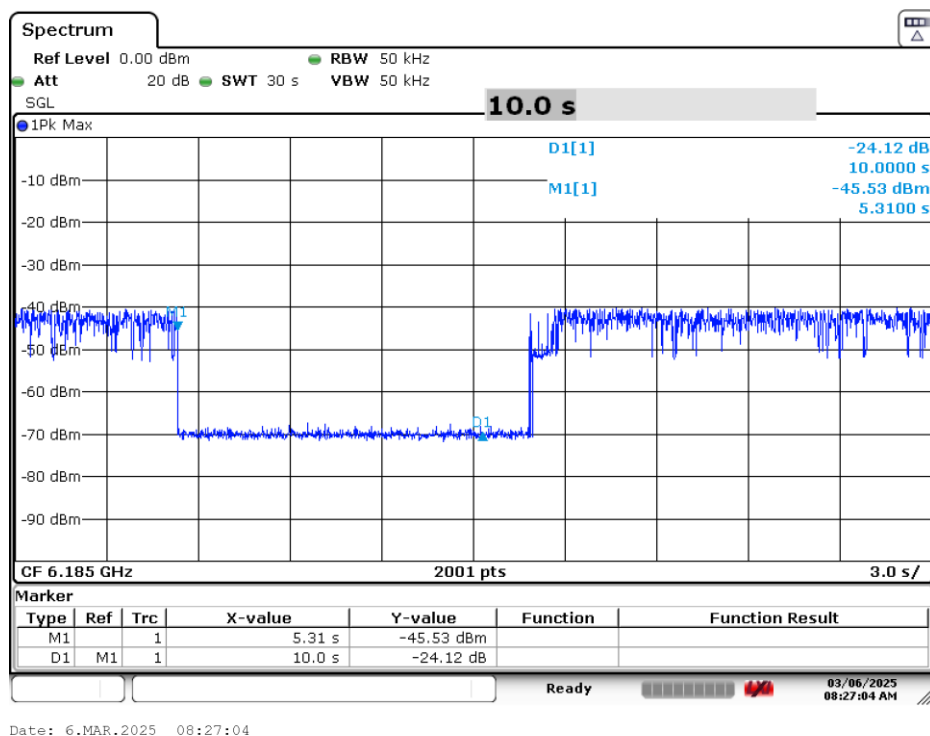


Plot 7-64. Contention Based Protocol Timing Plot (160MHz (UNII Band 5) – Ch. 47 Mid)

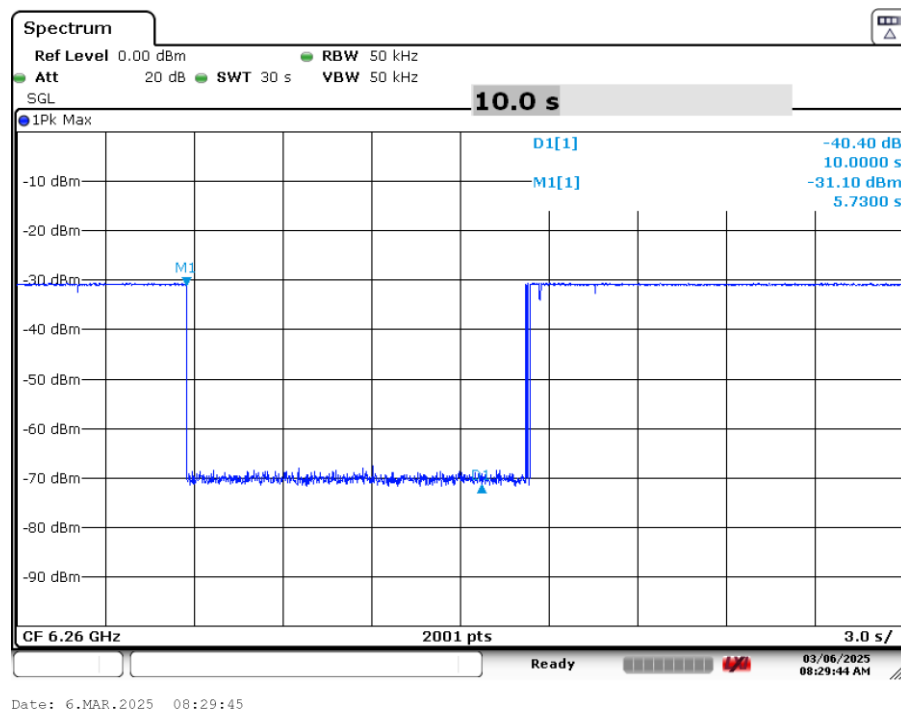


Plot 7-65. Contention Based Protocol Timing Plot (160MHz (UNII Band 5) – Ch. 47 High)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 69 of 99

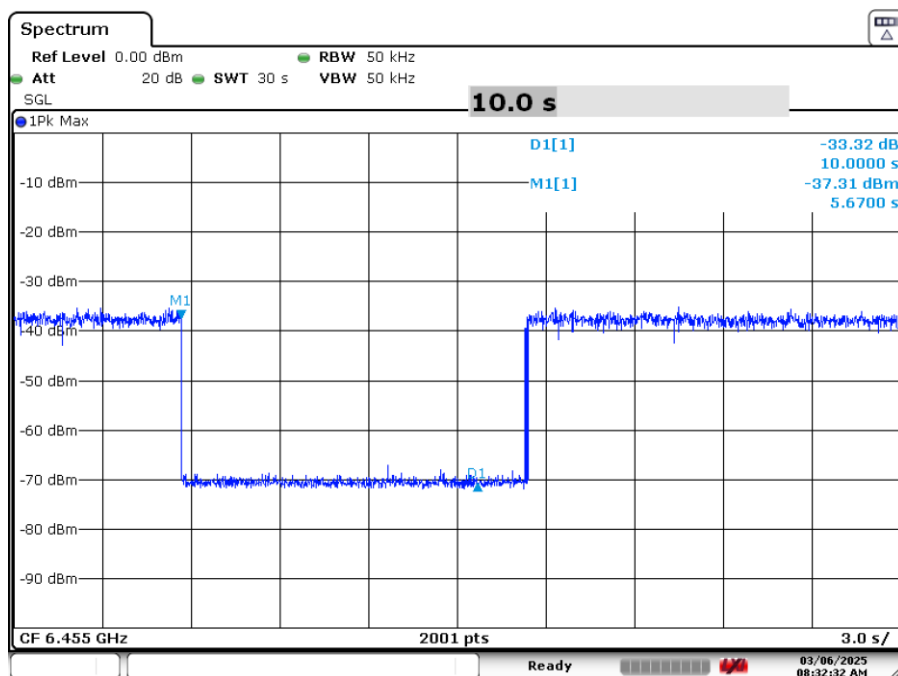

Date: 6.MAR.2025 08:32:32


Plot 7-66. Contention Based Protocol Timing Plot (20MHz (UNII Band 6) – Ch. 101)

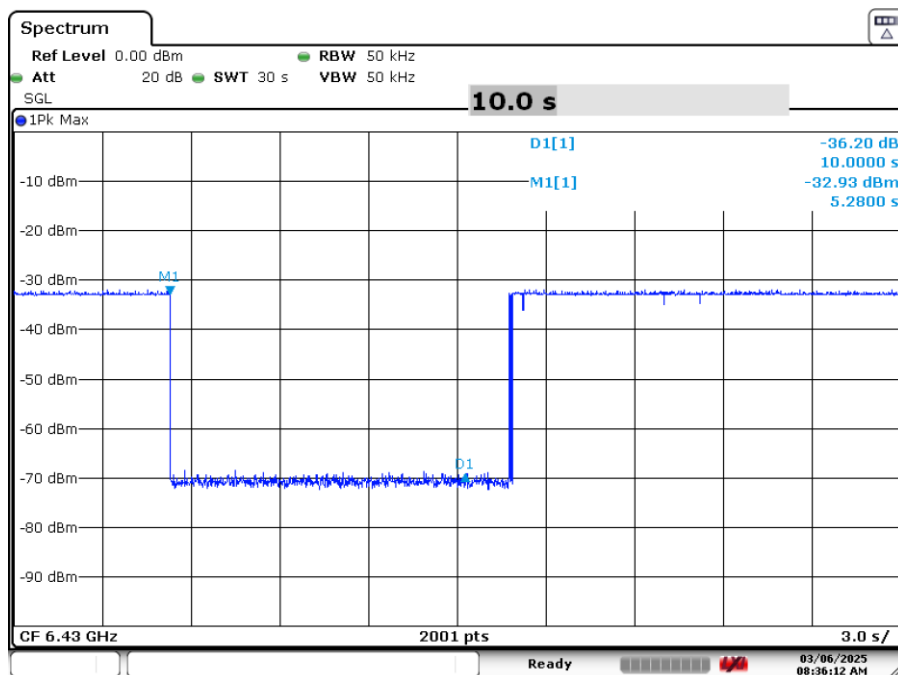


Date: 6.MAR.2025 08:36:13

Plot 7-67. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 Low)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 70 of 99

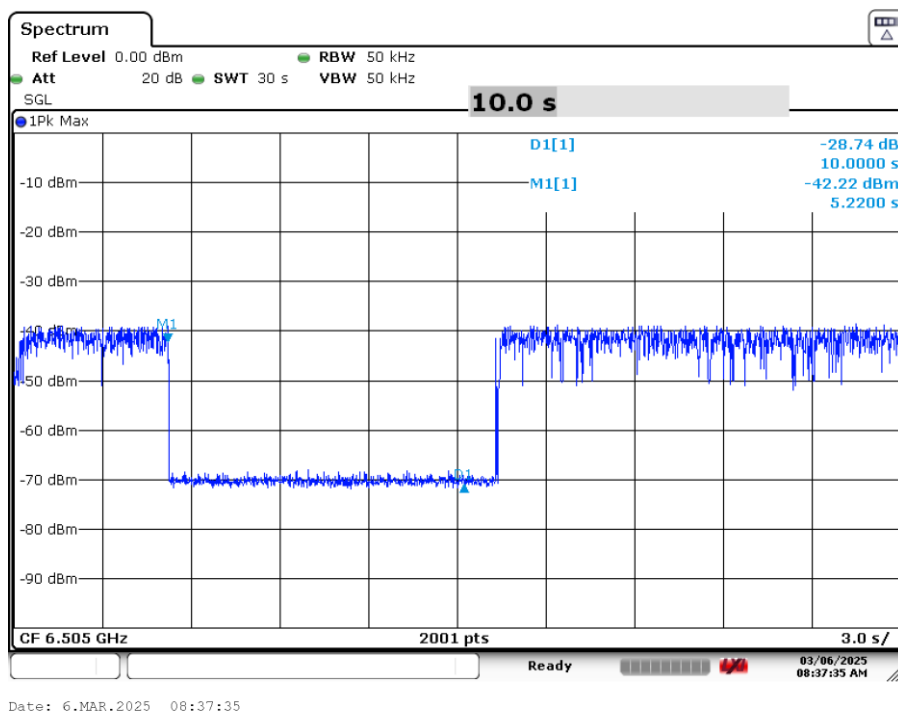


Plot 7-68. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 Mid)

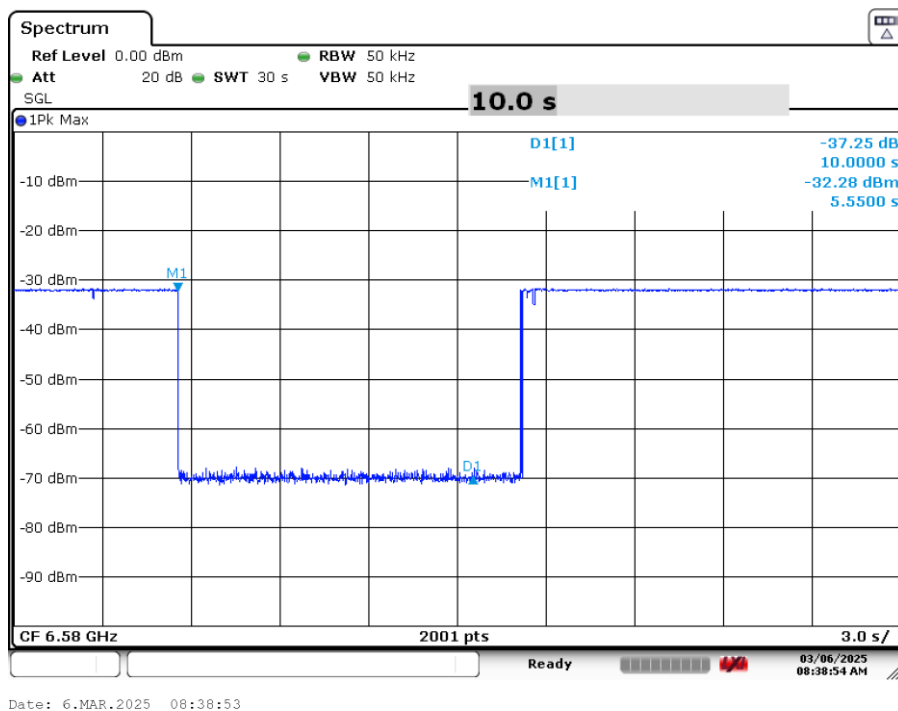


Plot 7-69. Contention Based Protocol Timing Plot (160MHz (UNII Band 6) – Ch. 111 High)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 71 of 99

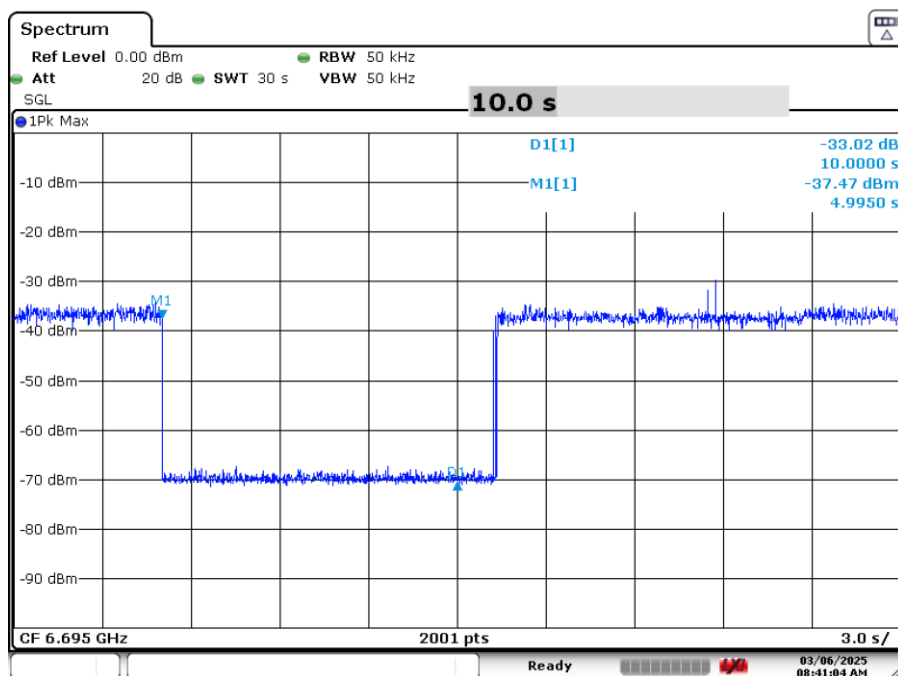

Date: 6.MAR.2025 08:41:05


Plot 7-70. Contention Based Protocol Timing Plot (20MHz (UNII Band 7) – Ch. 149)

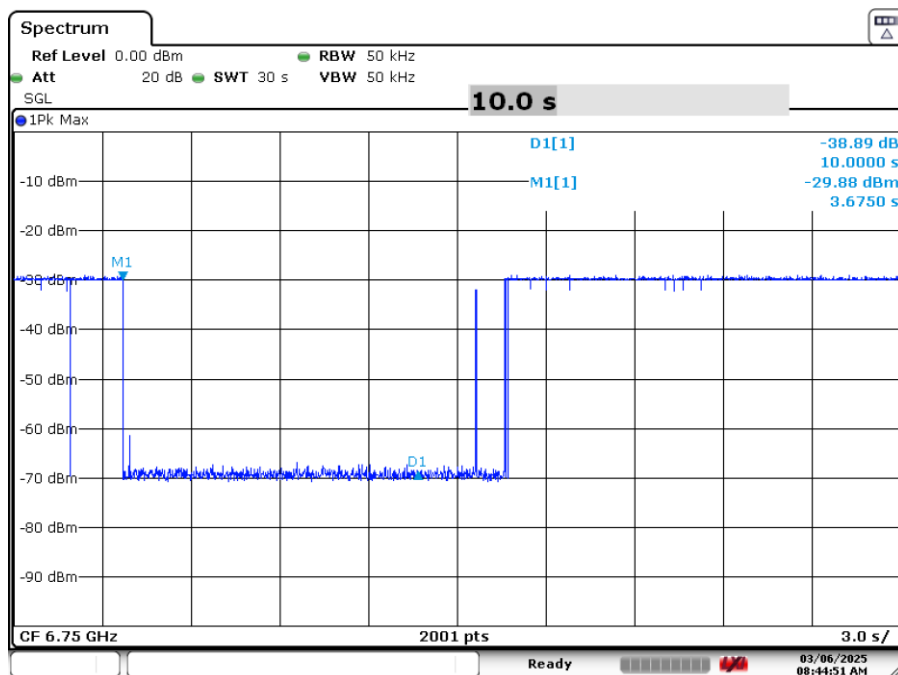


Date: 6.MAR.2025 08:44:52

Plot 7-71. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 Low)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 72 of 99

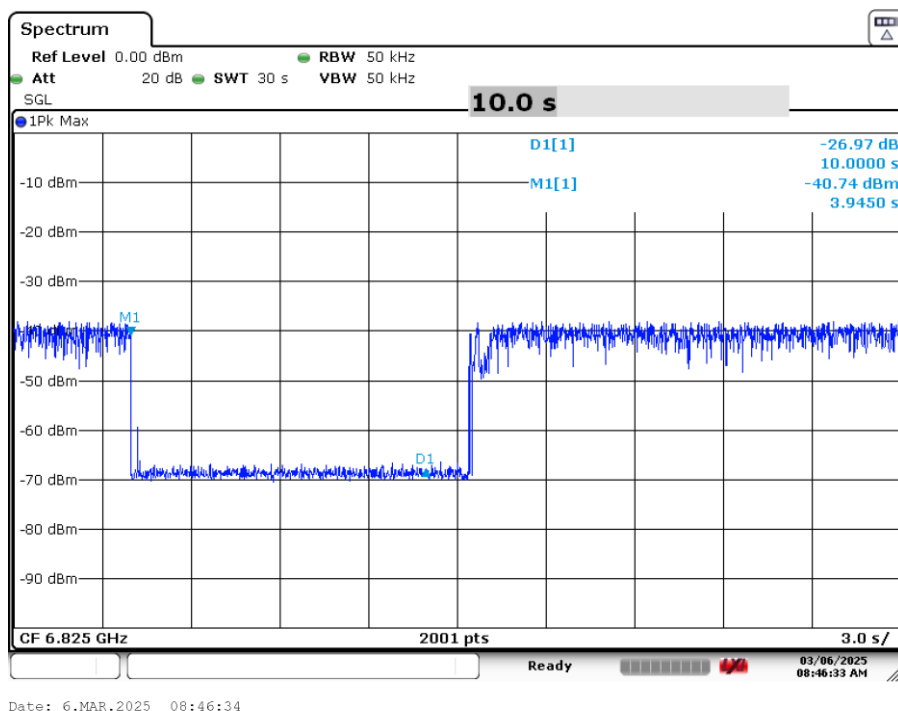


Plot 7-72. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 Mid)

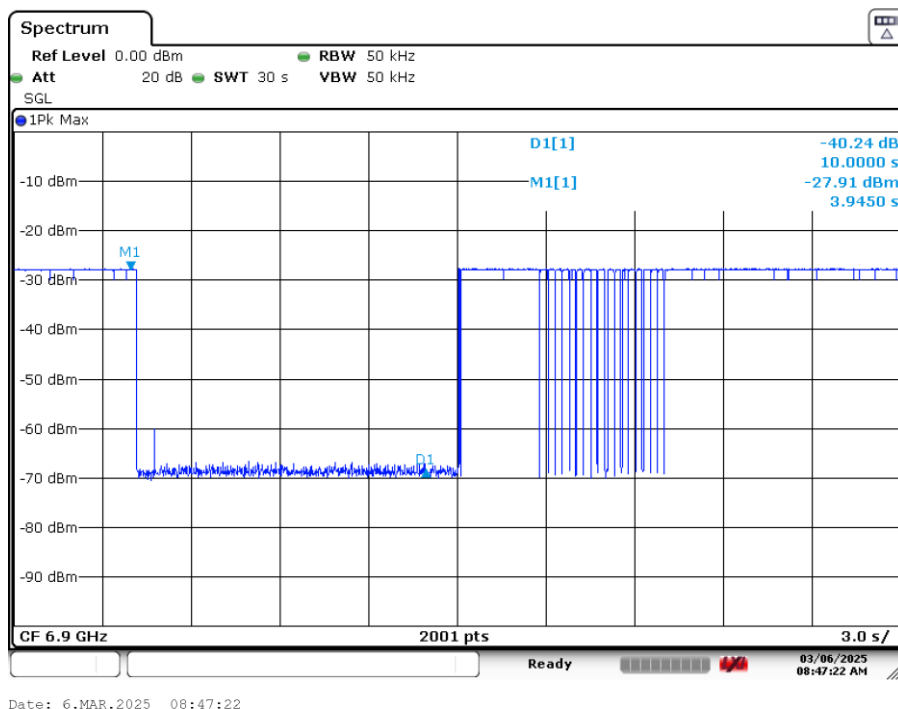


Plot 7-73. Contention Based Protocol Timing Plot (160MHz (UNII Band 7) – Ch. 175 High)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 73 of 99

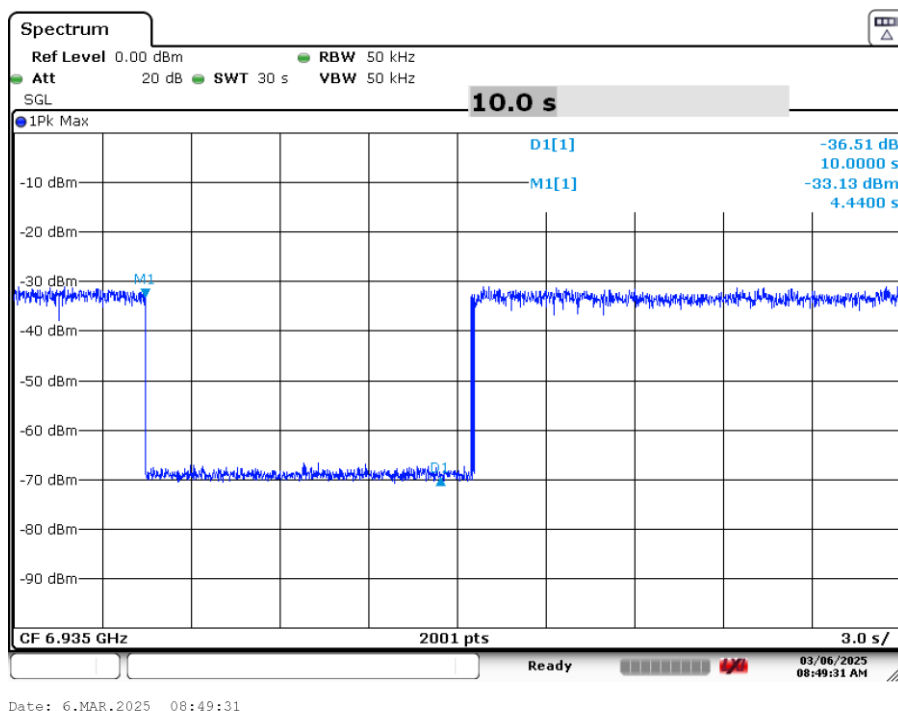


Plot 7-74. Contention Based Protocol Timing Plot (20MHz (UNII Band 8) – Ch. 197)

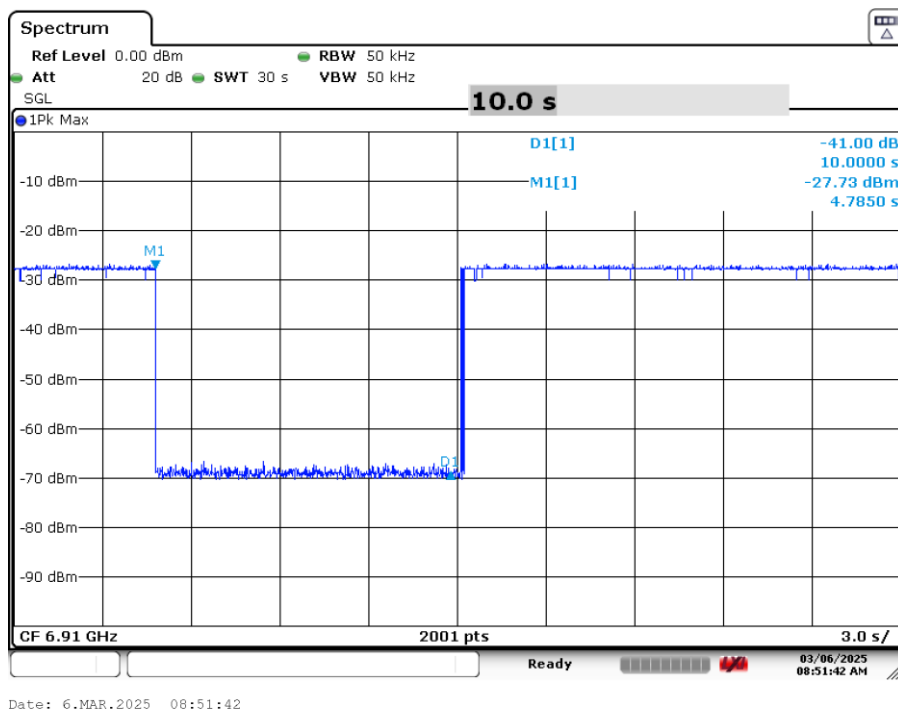


Plot 7-75. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 Low)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 74 of 99

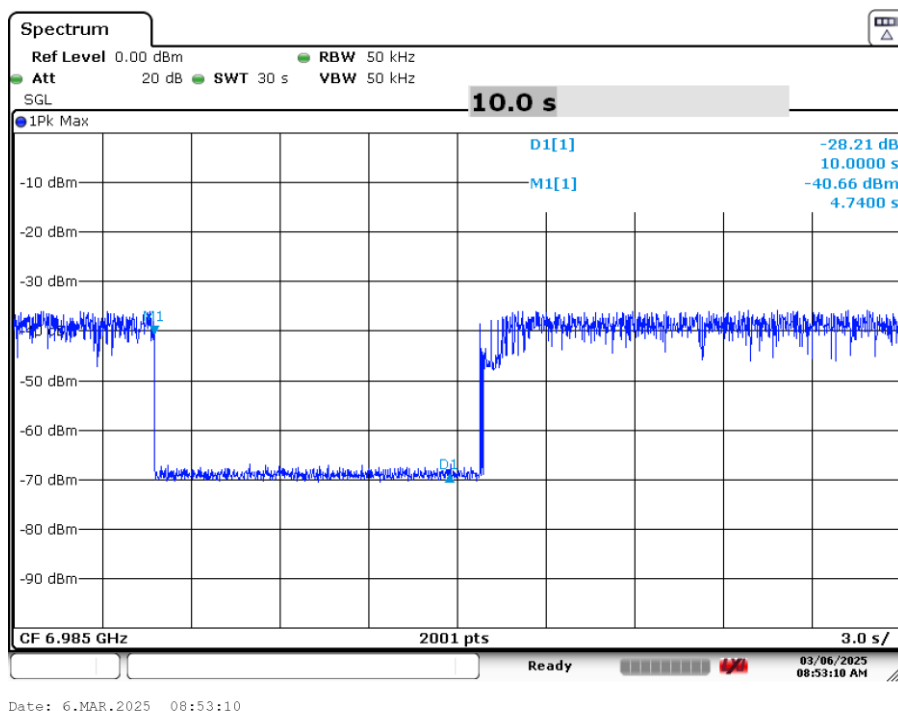

Plot 7-76. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 Mid)

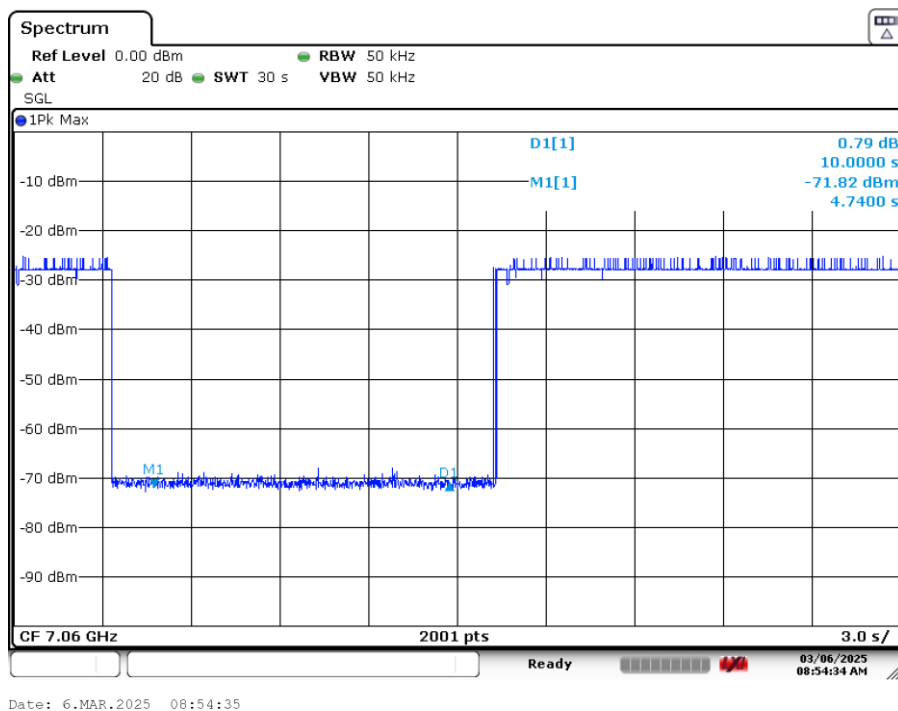


Plot 7-77. Contention Based Protocol Timing Plot (160MHz (UNII Band 8) – Ch. 207 High)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 75 of 99

7.6.3 Channel Move Plots


This section demonstrates the effect of injecting the AWGN signal at various locations throughout the 802.11ax 160MHz signal. The blue trace shows the full 160MHz signal prior to AWGN injection while the black trace shows the spectrum following AWGN injection. The following items were observed as demonstrated in the three plots shown below:

- When a 10 MHz AWGN signal centered at 6910 MHz (lower edge of channel) is injected, the channel completely stops transmitting.
- When a 10 MHz AWGN signal centered at 6985 MHz (middle of channel) is injected, the channel completely stops transmitting.
- When a 10 MHz AWGN signal centered at 7060 MHz (upper edge of channel) is injected, the channel completely stops transmitting.

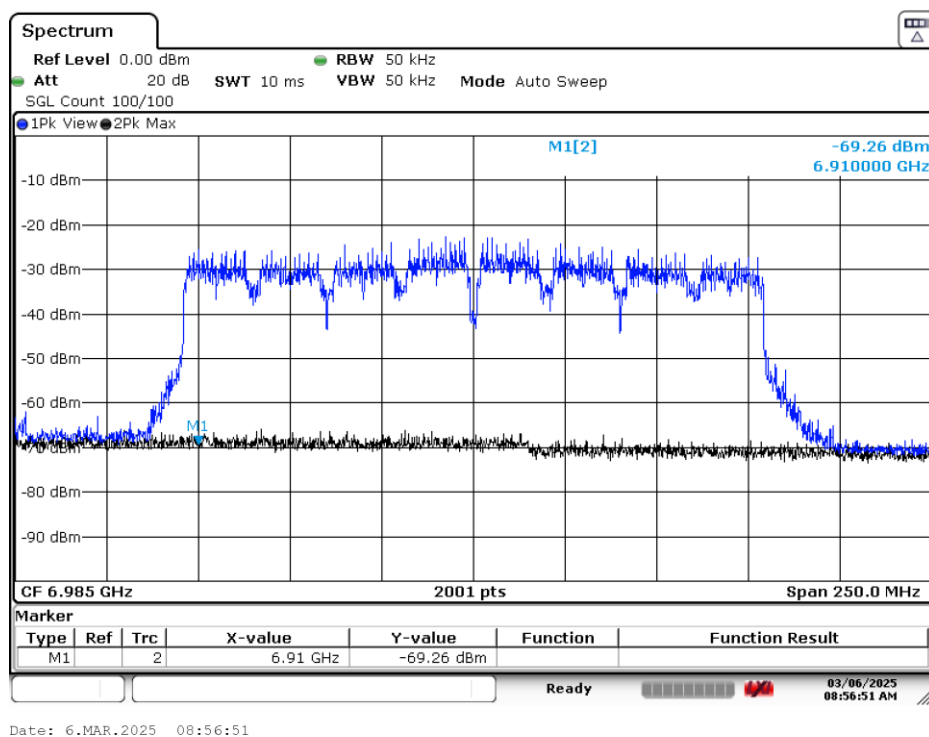


Plot 7-78. CBP 160MHz Channel - Injection Lower Edge – [6910 MHz]

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 76 of 99

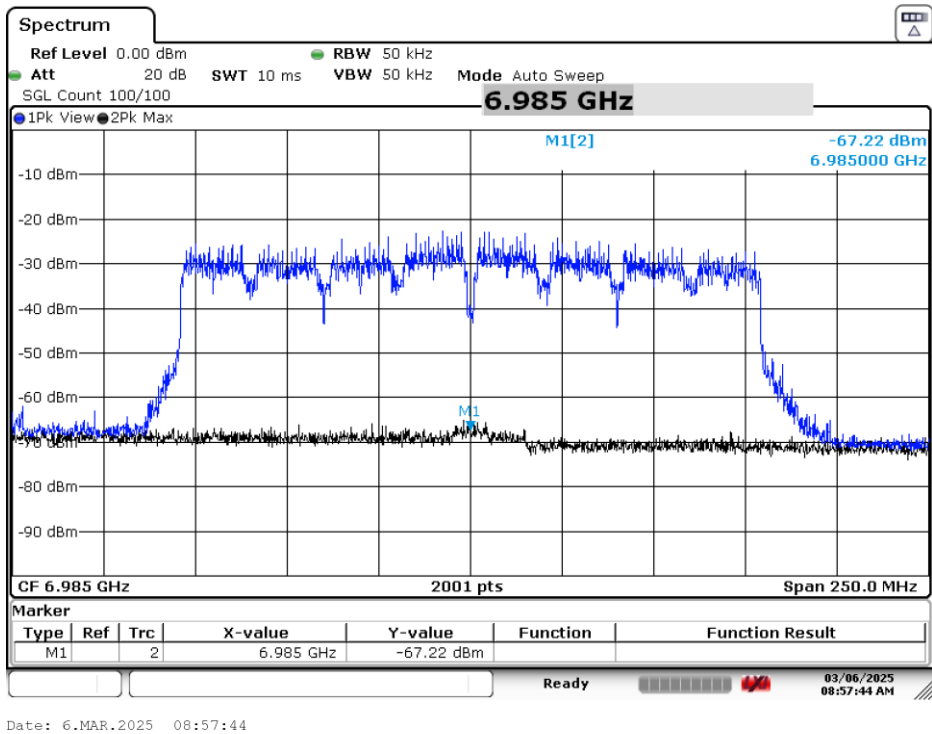

Plot 7-79. CBP 160MHz Channel - Injection Center – [6985 MHz]

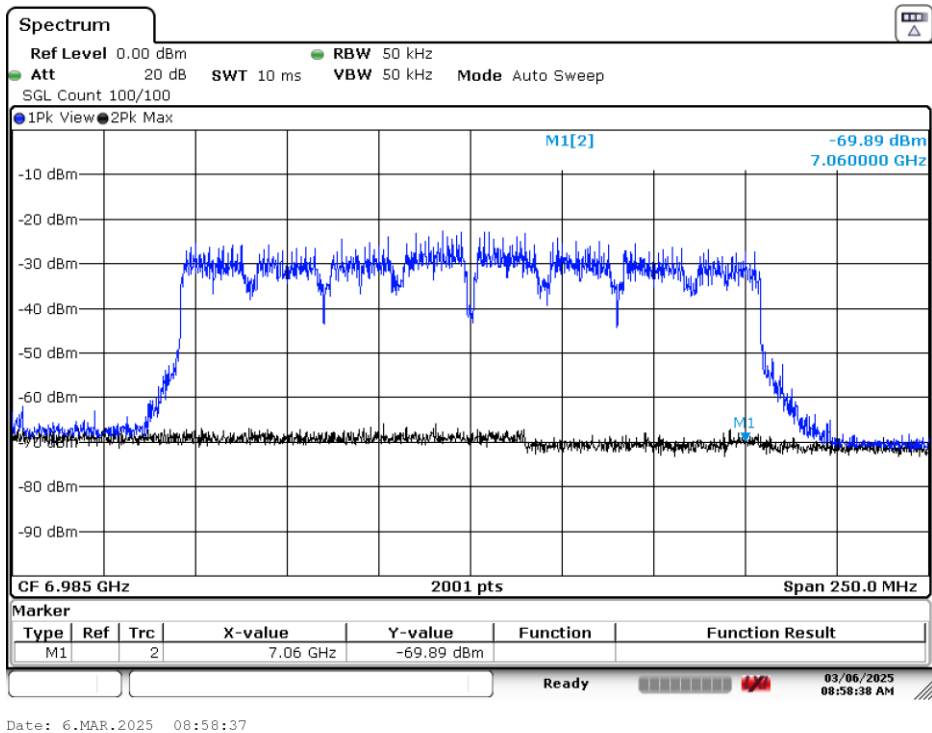

Plot 7-80. CBP 160MHz Channel - Injection Upper Edge – [7060 MHz]

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 77 of 99
© 2025 ELEMENT			V 11.2 9/11/2024
Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an inquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.			

7.7 Radiated Emission Measurements

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11ax (20/40/80/160MHz), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst-case emissions are reported in this section.

For transmitters operating in the 5.925-7.125 GHz band: All emissions outside of the 5.925-7.125 GHz band shall not exceed an EIRP of -27dBm/MHz (68.2dBuV/m at a 3m distance). Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400√F (kHz)	300
0.490 – 1.705 MHz	24000√F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-21. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5

Test Settings – Above 1GHz

Average Field Strength Measurements (Method AD – Average Detection)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 78 of 99

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize.

Test Settings – Below 1GHz

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest.
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

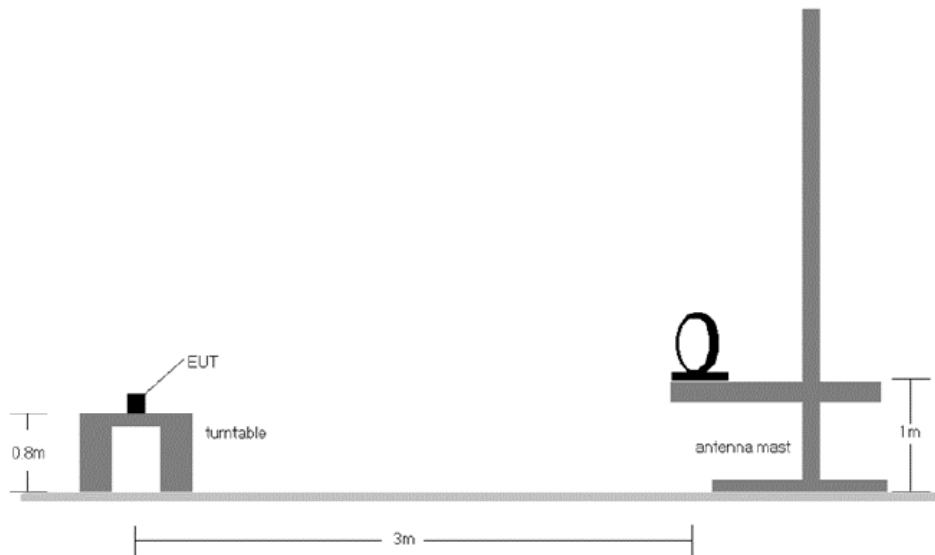


Figure 7-6. Radiated Test Setup < 30MHz

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 79 of 99

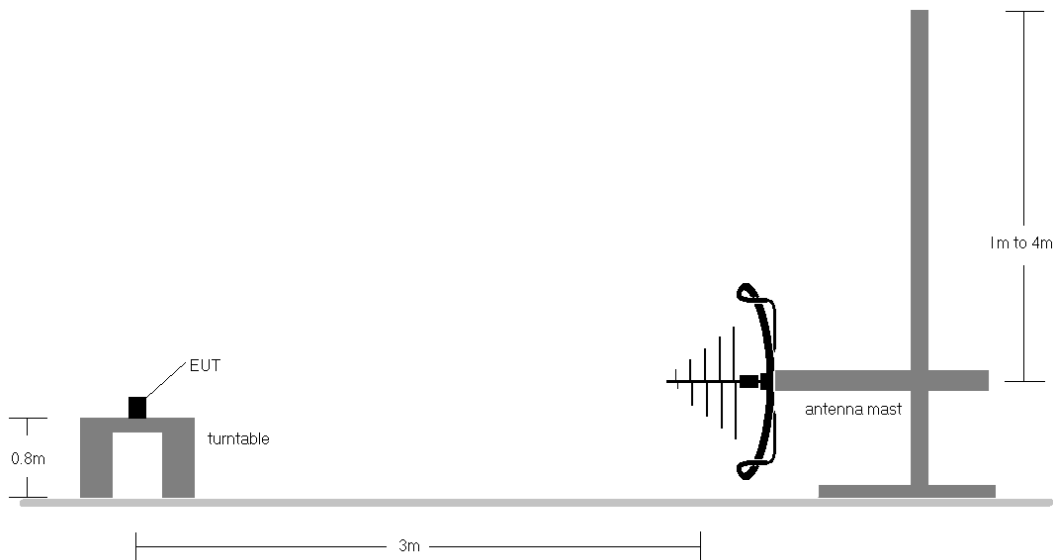


Figure 7-7. Radiated Test Setup < 1GHz

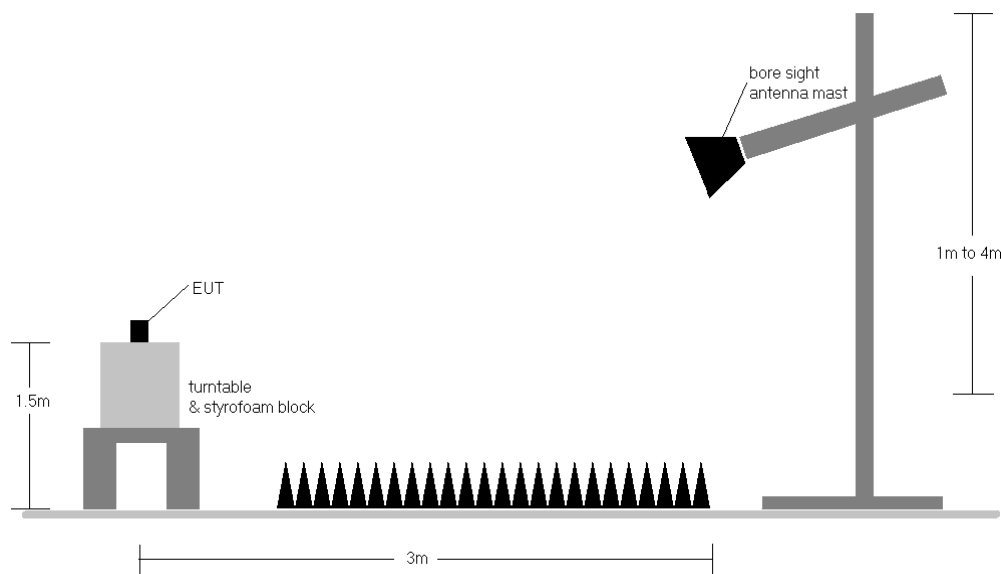


Figure 7-8. Radiated Test Setup > 1GHz

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 80 of 99

Test Notes

1. All spurious emissions lying in restricted bands specified in §15.205 are below the limits specified in §15.209. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
2. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit, it was determined no further investigation is necessary.
3. The antenna is manipulated through typical positions, polarity, and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported, however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1-meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
8. In the case where a peak-detector measurement passed the given RMS limit it was determined sufficient to demonstrate compliance.
9. The results recorded using the broadband antenna are known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:


Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 81 of 99


7.7.1 MIMO Radiated Spurious Emission Measurements

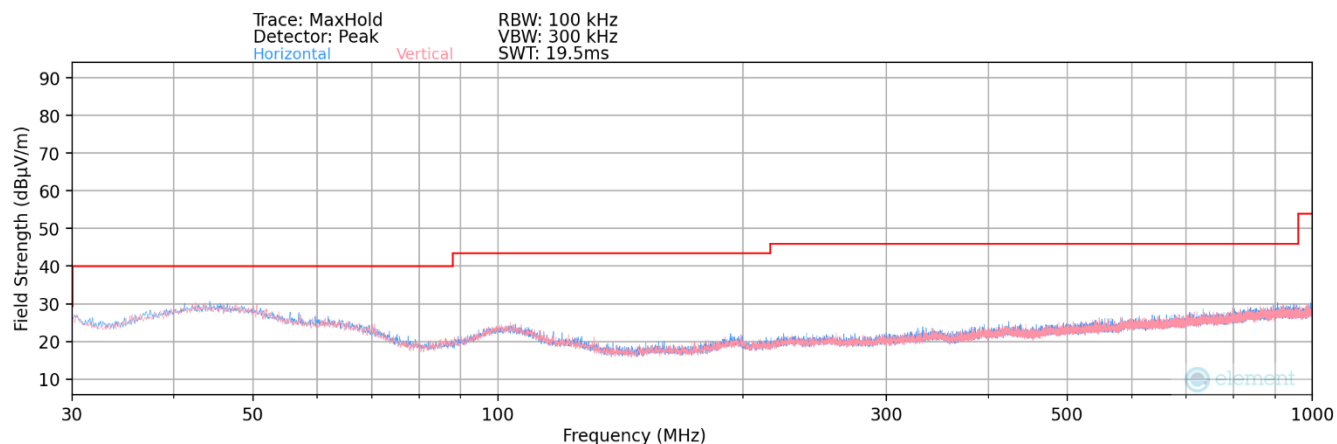

Plot 7-81. Radiated Spurious Plot below 1GHz MIMO (802.11a)

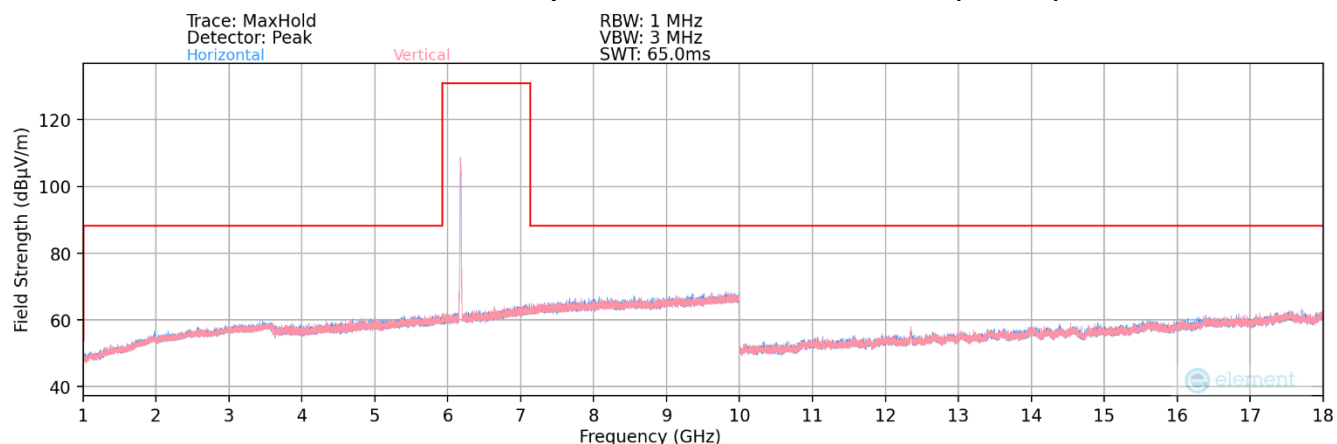


Plot 7-82. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11a – UNII Band 5 Ch. 45)

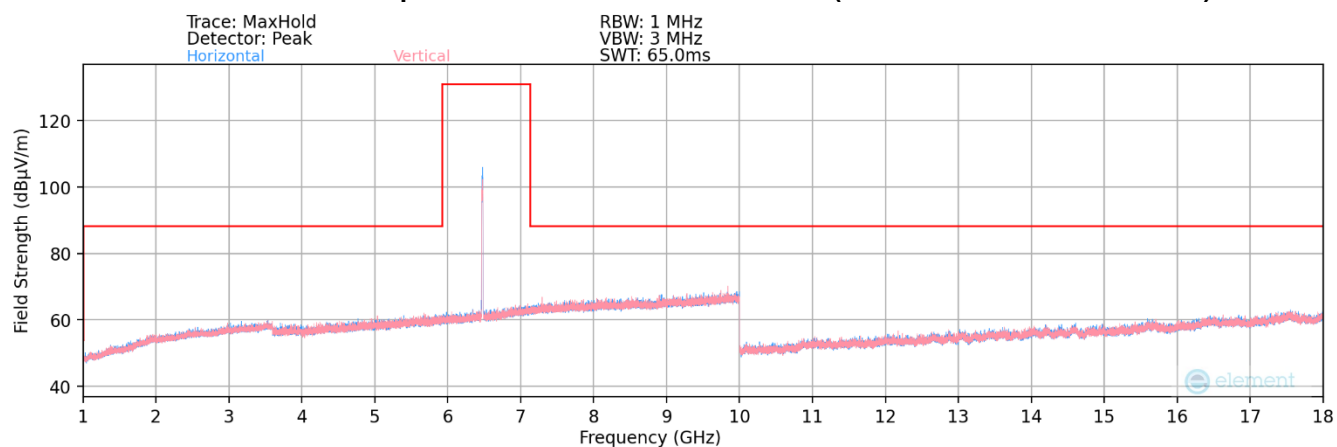


Plot 7-83. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11a – UNII Band 6 Ch. 105)


FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 82 of 99

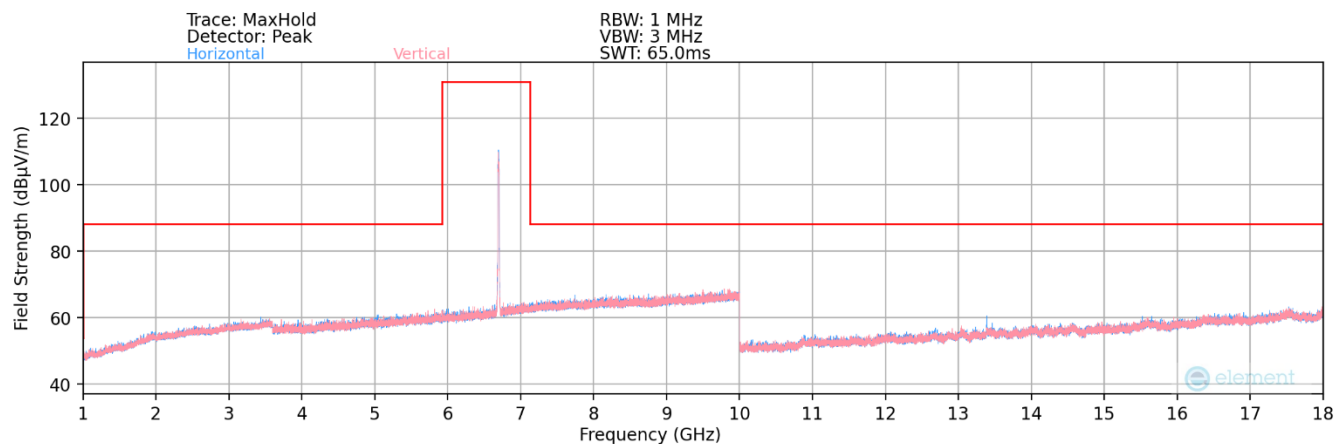

Plot 7-84. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11a – UNII Band 7 Ch. 149)

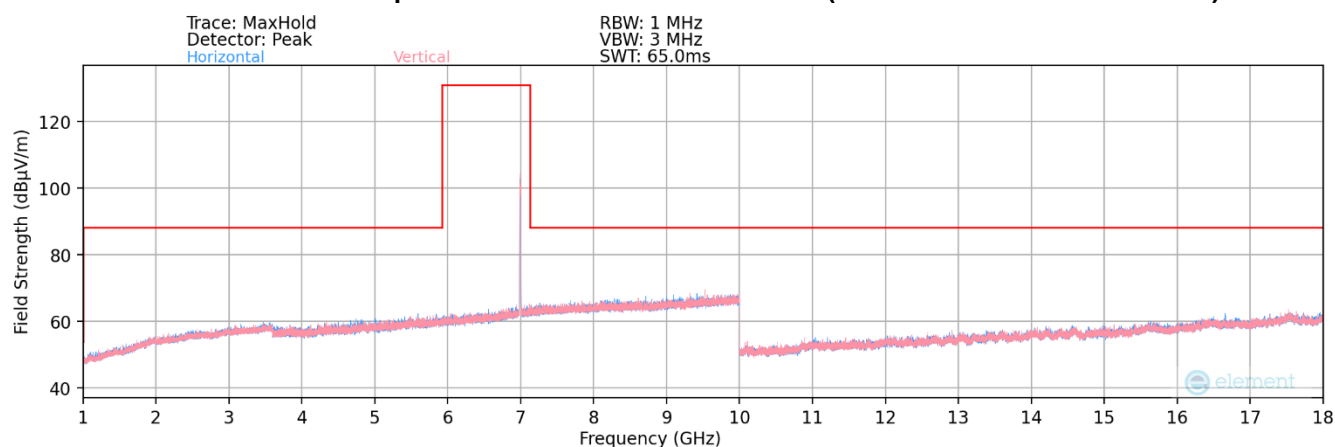


Plot 7-85. Radiated Spurious Plot 1GHz – 18GHz MIMO (802.11a – U Band 8 Ch. 209)

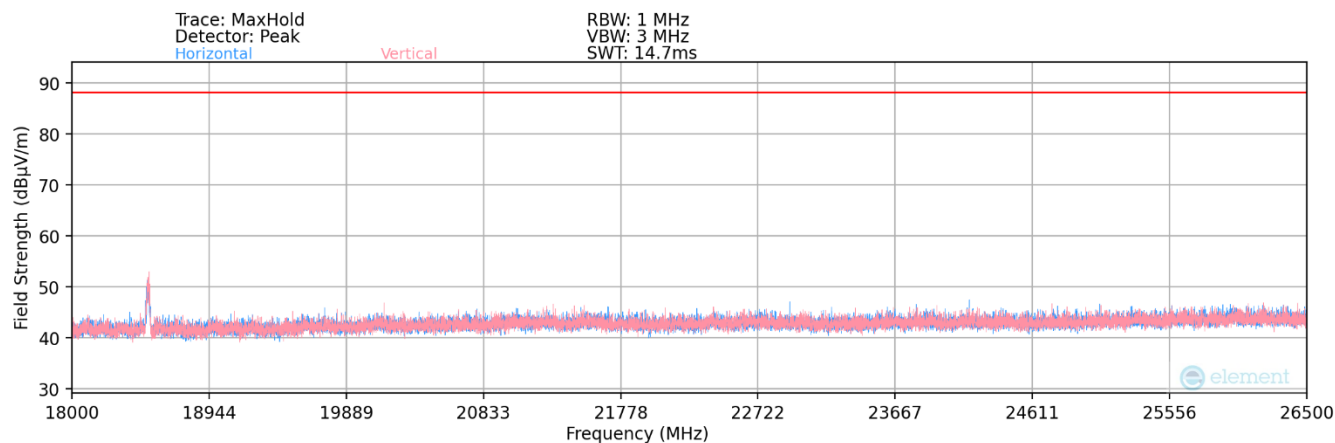

Plot 7-86. Radiated Spurious Plot 18GHz - 26.5GHz (802.11a)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 83 of 99

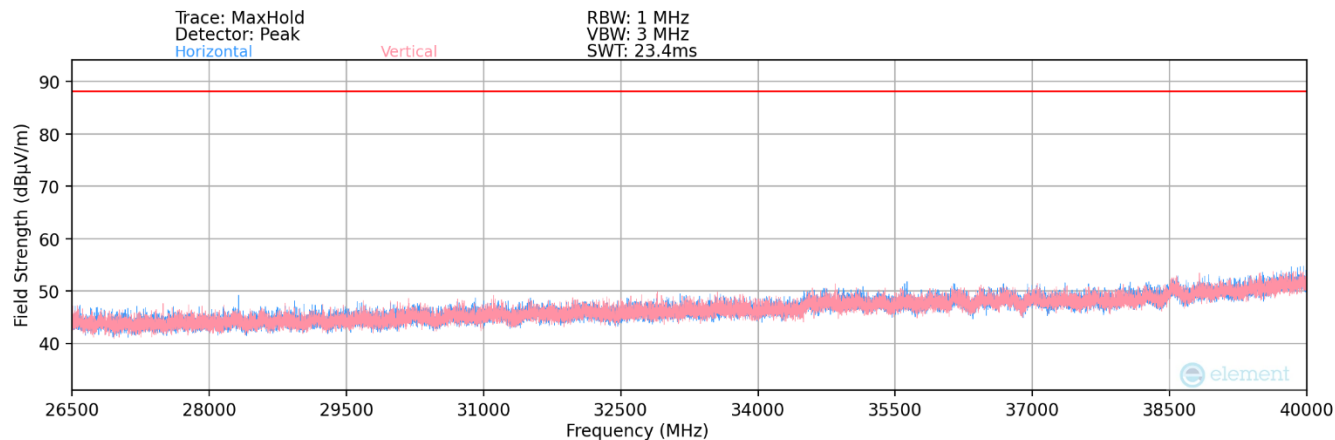

Plot 7-87. Radiated Spurious Plot 26.5GHz - 40GHz (802.11a)

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 84 of 99



MIMO Radiated Spurious Emission Measurements – UNII Band 5

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	5	2	5935	*	11870.00	Average	H	209	333	-78.76	18.16	0.00	46.40	53.98	-7.58
					*	11870.00	Peak	H	209	333	-66.44	18.16	0.00	58.72	73.98	-15.26
					*	17805.00	Average	H	136	46	-80.57	24.47	0.00	50.90	53.98	-3.08
					*	17805.00	Peak	H	136	46	-69.17	24.47	0.00	62.30	73.98	-11.68
					*	23740.00	Average	H	-	-	-65.81	3.58	-9.54	35.23	53.98	-18.75
					*	23740.00	Peak	H	-	-	-56.19	3.58	-9.54	44.85	73.98	-29.13
			45	6175		29675.00	Peak	H	-	-	-55.61	5.33	-9.54	47.17	68.20	-21.03
					*	12350.00	Average	H	168	43	-75.92	18.37	0.00	49.45	53.98	-4.53
					*	12350.00	Peak	H	168	43	-63.45	18.37	0.00	61.92	73.98	-12.06
					*	18525.00	Average	H	-	260	-60.81	1.16	-9.54	37.81	53.98	-16.17
					*	18525.00	Peak	H	-	260	-49.04	1.16	-9.54	49.59	73.98	-24.39
						24700.00	Peak	H	-	-	-56.08	3.72	-9.54	45.09	68.20	-23.11
			93	6415		30875.00	Peak	H	-	-	-56.48	6.32	-9.54	47.31	68.20	-20.89
						12830.00	Peak	H	150	41	-61.43	19.33	0.00	64.90	68.20	-3.30
					*	19245.00	Average	H	-	-	-55.20	1.84	-9.54	44.10	53.98	-9.88
					*	19245.00	Peak	H	-	-	-66.33	1.84	-9.54	32.97	73.98	-41.01
						25660.00	Peak	H	-	-	-56.16	3.90	-9.54	45.20	68.20	-23.00
						32075.00	Peak	H	-	-	-56.12	6.64	-9.54	47.98	68.20	-20.22

Table 7-22. Radiated Measurements MIMO – LPI & SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 85 of 99



MIMO Radiated Spurious Emission Measurements – UNII Band 6

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	6	97	6435		12870.00	Peak	H	159	41	-68.03	19.20	0.00	58.17	68.20	-10.03
					*	19305.00	Average	H	-	-	-65.90	1.64	-9.54	33.21	53.98	-20.77
					*	19305.00	Peak	H	-	-	-56.13	1.64	-9.54	42.97	73.98	-31.01
						25740.00	Peak	H	-	-	-56.61	3.84	-9.54	44.70	68.20	-23.50
						32175.00	Peak	H	-	-	-55.29	6.80	-9.54	48.97	68.20	-19.23
			105	6475		12950.00	Peak	H	155	47	-68.17	19.19	0.00	58.02	68.20	-10.18
					*	19425.00	Average	H	-	-	-66.73	1.80	-9.54	32.54	53.98	-21.44
					*	19425.00	Peak	H	-	-	-55.76	1.80	-9.54	43.51	73.98	-30.47
						25900.00	Peak	H	-	-	-56.46	4.24	-9.54	45.24	68.20	-22.96
						32375.00	Peak	H	-	-	-55.69	6.46	-9.54	48.22	68.20	-19.98
			113	6515		13030.00	Peak	H	162	43	-68.21	19.61	0.00	58.40	68.20	-9.80
					*	19545.00	Average	H	-	-	-65.22	1.84	-9.54	34.08	53.98	-19.90
					*	19545.00	Peak	H	-	-	-54.71	1.84	-9.54	44.59	73.98	-29.39
						26060.00	Peak	H	-	-	-54.74	4.18	-9.54	46.90	68.20	-21.30
						32575.00	Peak	H	-	-	-54.83	6.18	-9.54	48.81	68.20	-19.39

Table 7-23. Radiated Measurements MIMO – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 86 of 99



MIMO Radiated Spurious Emission Measurements – UNII Band 7

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	7	117	6535		13070.00	Peak	H	169	42	-63.63	19.50	0.00	62.87	68.20	-5.33
					*	19605.00	Average	H	-	-	-65.20	2.38	-9.54	34.64	53.98	-19.34
					*	19605.00	Peak	H	-	-	-54.60	2.38	-9.54	45.23	73.98	-28.75
						26140.00	Peak	H	-	-	-55.04	4.03	-9.54	46.44	68.20	-21.76
						32675.00	Peak	H	-	-	-55.22	6.46	-9.54	48.70	68.20	-19.50
			149	6695	*	13390.00	Average	H	189	346	-78.52	19.86	0.00	48.34	53.98	-5.64
					*	13390.00	Peak	H	189	346	-67.22	19.86	0.00	59.64	73.98	-14.34
					*	20085.00	Peak	H	-	-	-54.35	2.58	-9.54	45.69	53.98	-8.29
					*	20085.00	Average	H	-	-	-65.48	2.58	-9.54	34.56	73.98	-39.42
						26780.00	Peak	H	-	-	-55.18	4.33	-9.54	46.61	68.20	-21.59
			185	6875		33475.00	Peak	H	-	-	-54.39	6.96	-9.54	50.03	68.20	-18.17
						13750.00	Peak	H	181	345	-66.06	20.38	0.00	61.32	68.20	-6.88
					*	20625.00	Average	H	-	200	-63.00	3.01	-9.54	37.47	53.98	-16.51
					*	20625.00	Peak	H	-	200	-49.60	3.01	-9.54	50.87	73.98	-23.11
						27500.00	Peak	H	-	-	-55.52	3.97	-9.54	45.91	68.20	-22.29
						34375.00	Peak	H	-	-	-55.04	7.33	-9.54	49.76	68.20	-18.44

Table 7-24. Radiated Measurements MIMO – LPI & SP

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 87 of 99



MIMO Radiated Spurious Emission Measurements – UNII Band 8

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6Mbps
Distance of Measurements: 1 & 3 Meters

Mode	Antenna	UNII Band	Channel	Test Channel Freq. [MHz]	Restricted	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
802.11a	MIMO	8	189	6895		13790.00	Peak	H	-	-	-69.46	20.64	0.00	58.18	68.20	-10.02
					*	20685.00	Average	H	-	200	-63.60	3.01	-9.54	36.87	53.98	-17.11
					*	20685.00	Peak	H	-	200	-51.81	3.01	-9.54	48.66	73.98	-25.32
						27580.00	Peak	H	-	-	-55.18	4.40	-9.54	46.68	68.20	-21.52
						34475.00	Peak	H	-	-	-55.27	7.31	-9.54	49.50	68.20	-18.70
			209	6995		13990.00	Peak	H	-	-	-69.81	19.90	0.00	57.09	68.20	-11.11
					*	20985.00	Average	H	-	-	-66.57	3.27	-9.54	34.15	53.98	-19.83
					*	20985.00	Peak	H	-	-	-55.68	3.27	-9.54	45.04	73.98	-28.94
						27980.00	Peak	H	-	-	-55.94	4.40	-9.54	45.92	68.20	-22.28
						34975.00	Peak	H	-	-	-53.82	7.79	-9.54	51.42	68.20	-16.78
			233	7115		14230.00	Peak	H	-	-	-69.68	20.60	0.00	57.92	68.20	-10.28
					*	21345.00	Average	H	-	-	-66.03	3.57	-9.54	35.00	53.98	-18.98
					*	21345.00	Peak	H	-	-	-54.92	3.57	-9.54	46.11	73.98	-27.87
						28460.00	Peak	H	-	-	-56.18	5.01	-9.54	46.29	68.20	-21.91
						35575.00	Peak	H	-	-	-54.03	7.78	-9.54	51.21	68.20	-16.99

Table 7-25. Radiated Measurements MIMO – LPI

FCC ID: A3LSMG766U	MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2501020001-20-R1.A3L	Test Dates: 1/6/2025 - 3/5/2025	EUT Type: Portable Handset	Page 88 of 99