客户名稱:朝阳 CUSTOMER:朝阳

Documnet No.:	
Approval Sheet Rev.:	
A0 Spec. Rev. : P4	

承 認 書

APPROVAL SHEET

產品品名/Product WA-F-LA-02-022 Model No.:

客户料號/Customer No.: 1029-0000198

發行日期/ Issue Date: 2023-07-25

承認日期/ Approved Date: 2023-07-25

Approved by customer: (signing or stamping here)

- ★邦電子(蘇州)有限公司 INPAQ TECHNOLOGY(SuZhou) Co.,Ltd
- 蘇州市相城區黃埭鎮潘陽工業園區中心大 道5號
- 传 生邦科技股份有限公司 INPAQ TECHNOLOGY Co.,Ltd
- □ 苗栗縣竹南鎮大厝裏9鄰59-12號

No.5,zhongxin Road, PanYang industrial Park,HuangDai town,XiangCheng district ,Suzhou City No. 59-12, 9 Lin, Ta Tsuo Li, Chu Nan Chen, Miao Li Hsien, Taiwan, R.O.C.

WA-F-LA-02-134 Specification

Model: WA-F-LA-02-022

1. Explanation of part number:

$$\frac{WA}{(1)} - \frac{F}{(2)} - \frac{LA}{(3)} - \frac{02}{(4)} - \frac{022}{(5)}$$

- (1) Product Type: Wireless Antenna
- (2) Material: FPC+CABLE
- (3) Frequency: 2.4GHz-2.5GHz
- (4) Coaxial Cable Type: 01
- (5) Suffix:022

2. Storage Condition:

Temperature -40 to +70 °C Humidity 65 ± 20 % RH

3. Operating Condition:

Temperature -40 to +70 °C Humidity 65±20 % RH

4. Electrical Specification:

Those specifications were specially defined for 朝阳-ATC PARTY-BT2 model, and all characteristics were measured under the model's handset testing.

4-1. Frequency Band:

Frequency Band	MHz
BT	2400-2500

UNLESS OTHER	SPECIFIED	TOLERANCES ON:		FF. BH AND E.F.	HH /-1	<u></u> → >>		_, l
X=±	$X.X=\pm$	$X.XX=\pm$	G	佳邦科技	股份	有限	公司	到
ANGLES=±		HOLEDIA=±		INPAQ TECH	NOLO	GY CO.	., LTI).
SCALE:		UNIT: mm		GS AND SPECIFICATION				
DRAWN BY: 鄭	斤静	CHECKED BY: 赵付辉		CO.,LTD.AND SHALL IS FOR THE MANUFACTU				
DESIGNED BY	: Ziv	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION				
TITLE : WA-F-L	Δ-02-134 S	Specification	DOCUMEN	Т			PAGE	REV.
III EE · WA-I -E	-A-02-104 C	pecinication	NO.				P3	
				PA	AGE 1	OF	7	

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None


4-4. **VSWR**

4-4.1 Measuring Method

- 1.A $50\,\Omega$ coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR
- 2. Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and VSWR value

Frequency (Unit MHz)	2400	2450	2500
VSWR	1.39	1.37	1.34

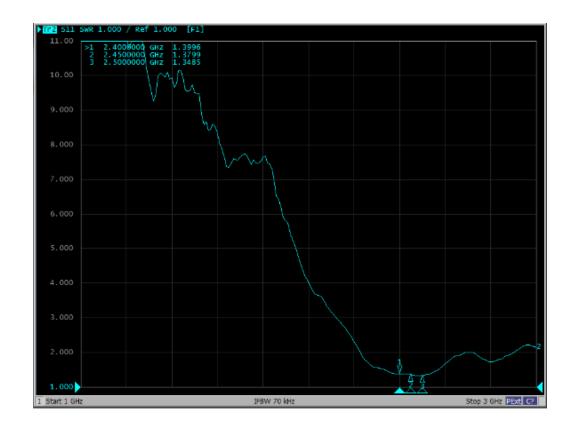


UNLESS OTHER SPECIFIED	TOLERANCES ON:		LL 20 41 LL 00 /	, , , , , , , , , , , , , , , , , , , 	73 - 3
$X=\pm$ $X.X=\pm$	$X.XX=\pm$		佳邦科技股份	分有限	公司
ANGLES=±	HOLEDIA=±		INPAQ TECHNOL	OGY CO	., LTD.
SCALE:	UNIT: mm		S AND SPECIFICATIONS ARE		
DRAWN BY:靳静	CHECKED BY: 赵付辉		CO.,LTD.AND SHALL NOT BI FOR THE MANUFACTURE OR		
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITH	OUT PERMISSION		
TITLE: WA-F-LA-02-134	Specification	DOCUMENT			PAGE REV.
111EE - WA-1 - EA-02-154		NO.			P3
			PAGE	2 OF	7

4-5. Efficiency and Gain

4-5.1 Measure method

- 1. Using a low loss coaxial cable to link a standard handset
- 2. Fixed this handset jig on chamber's rotator plane
- 3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
- 4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition

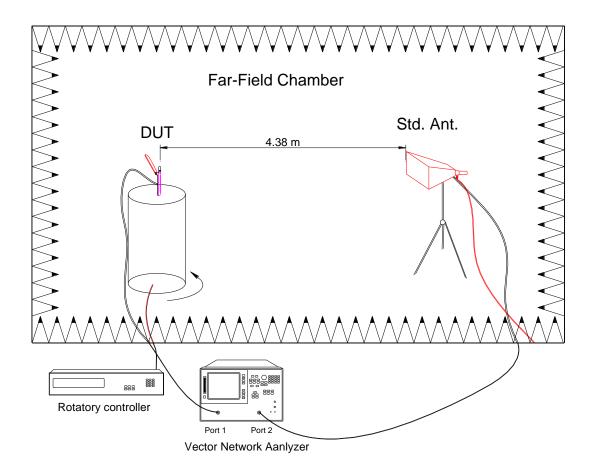

- 1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
- 2. The quite room region is 40cmx40cmx40cm at the center of rotator
- 3. The distance between DUT and standard antenna is 4.38 m
- Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON:						
$X=\pm$ $X.X=\pm$	$X.XX=\pm$		佳邦科技股份有	1限公司		
ANGLES=±	HOLEDIA=±		INPAQ TECHNOLOGY			
SCALE:	UNIT: mm		SS AND SPECIFICATIONS ARE THE PI			
DRAWN BY:靳静	CHECKED BY: 赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USE AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS O				
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITHOUT PERMISSION				
TITLE: WA-F-LA-02-134 S	Specification	DOCUMENT	Ī	PAGE REV.		
1111EE : WA-1 -EA-02-134 C	pecification	NO. P3				
PAGE 3 OF 7						


4-5.3 Efficiency and Gain


Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

Frequency (MHz)	2400	2450	2500
Efficiency (%)	49.43	48.34	48.48
Peak Gain (dBi)	3.61	4.35	4.15

Freq.	Efficiency	Peak Gain
(MHz)	(%)	(dBi)
2400	49.43	3.61
2410	47.68	3.66
2420	46.75	3.79
2430	47.68	4.08
2440	46.49	4.07
2450	48.34	4.35
2460	48.88	4.37
2470	48.88	4.37
2480	47.54	4.26
2490	47.28	4.09
2500	48.48	4.15
AVG	47.95	

UNLESS OTHER	SPECIFIED	TOLERANCES ON:			, ,, <u> </u>
X=±	$X.X=\pm$	$X.XX=\pm$	G	佳邦科技股份有限	え公司
ANGLES=±		HOLEDIA=±		INPAQ TECHNOLOGY C	
SCALE:		UNIT: mm		GS AND SPECIFICATIONS ARE THE PROPE	
DRAWN BY: 幕	斤静	CHECKED BY: 赵付辉		Y CO.,LTD.AND SHALL NOT BE REPRODU S FOR THE MANUFACTURE OR SALE OF A	
DESIGNED BY	: Ziv	APPROVED BY:赵付辉	DEVICES WITH	HOUT PERMISSION	
TITLE : WA-F-L	Λ_ 02_13 /19	Specification	DOCUMEN	ІТ	PAGE REV.
	-M-02-134 C	ppecification	NO.		P3
				PAGE 4 O	F 7

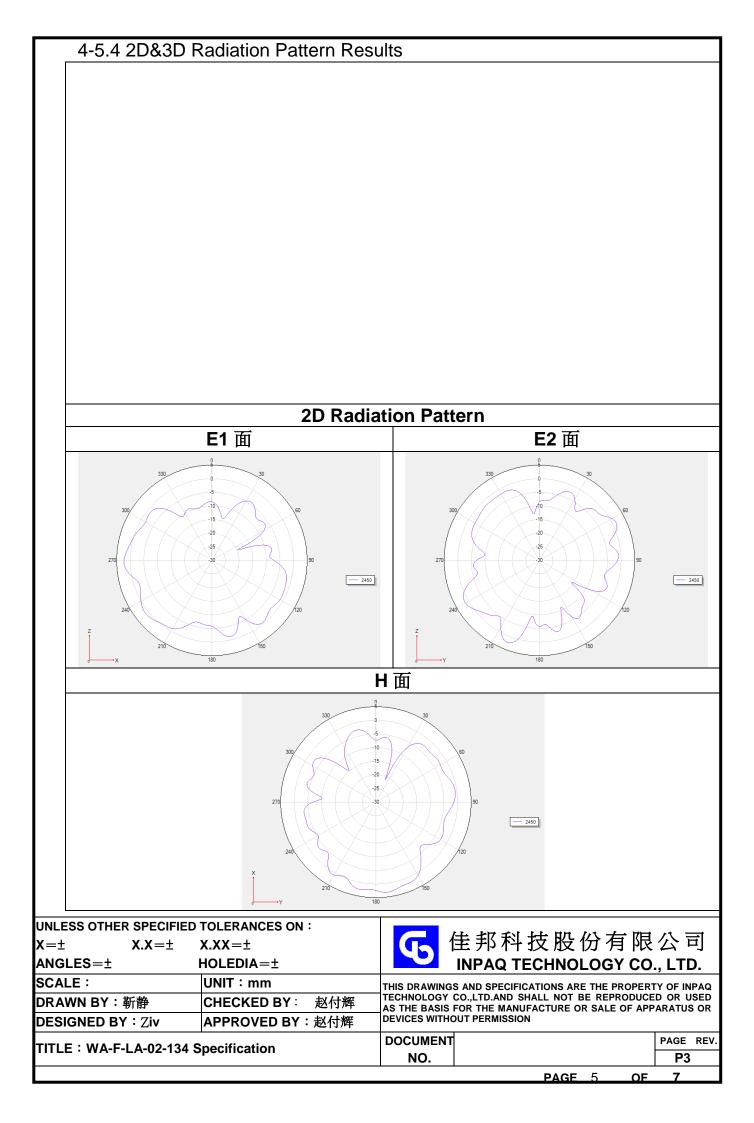

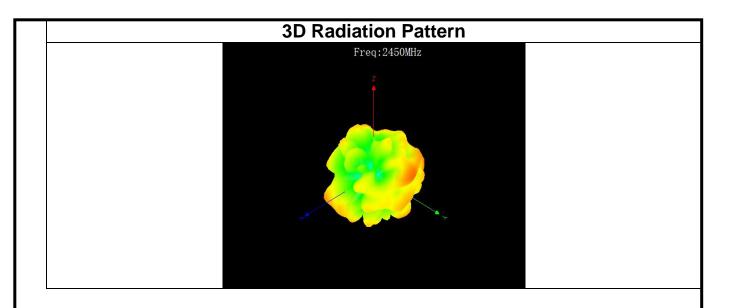


UNLESS OTHER SPECIFIE $X=\pm$ $X.X=\pm$ ANGLES= \pm	D TOLERANCES ON: X.XX=± HOLEDIA=±	G	佳邦科: INPAQ TE	技股(CHNOL	分有 .ogv	育限 (CO.	公司 ., LTI	司 D.
SCALE:	UNIT: mm		GS AND SPECIFIC					-
DRAWN BY:靳静	CHECKED BY: 赵付辉		Y CO.,LTD.AND SH S FOR THE MANUF					
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITH	HOUT PERMISSION	l				
TITLE: WA-F-LA-02-134	DOCUMEN	IT				PAGE	REV.	
		NO.					P3	1
				PAGE	6	OF	7	

5. Mechanical Specification:

5-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing Figure 5-1-1

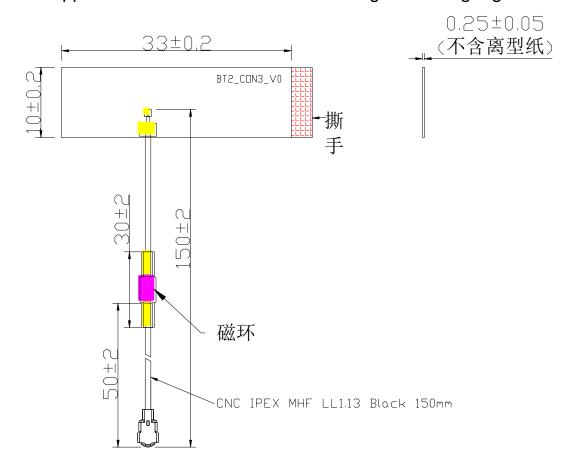

UNLESS OTHER SPECIFIEI X=± ANGLES=±	D TOLERANCES ON : X.XX=± HOLEDIA=±	佳邦科技股份 INPAQ TECHNOLOG		
SCALE:	UNIT: mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE		
DRAWN BY:靳静	CHECKED BY: 赵付辉	TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USE AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OF		
DESIGNED BY: Ziv	APPROVED BY:赵付辉	DEVICES WITHOUT PERMISSION		
TITLE: WA-F-LA-02-134	Specification	DOCUMENT	PAGE REV.	
THEE WAT EASE 104	- Openiousion	NO.	P3	
PAGE 7 OF 7				