

## TEST REPORT

**Product** : Thermal Receipt Printer  
**Trade mark** : Rongta  
**Model/Type reference** : RP80-WUS, RP850-WUS,  
RP820-WUS, RP804-WUS  
**Serial Number** : N/A  
**Report Number** : EED32I00065502  
**FCC ID** : 2AD6G-RP80-WUS  
**Date of Issue** : Sep. 22, 2016  
**Test Standards** : 47 CFR Part 15Subpart C (2015)  
**Test result** : PASS

Prepared for:

**XIAMEN RONGTA TECHNOLOGY CO., LTD.**  
**3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street**  
**Office, Huli District, Xiamen City**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**



Tested By:

Tom - chen  
Tom chen (Test Project)

Reviewed by:

Kevin lan  
Kevin lan (Reviewer)

Compiled by:

Kevin Yang  
Kevin yang (Project Engineer)

Approved by:

Sheek Luo  
Sheek Luo (Lab supervisor)

Date:

Sep. 22, 2016

Check No.: 2392104606

## 2 Version

Version No.	Date	Description
00	Sep. 22, 2016	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013/ KDB 558074 D01v03r05	PASS
<b>Radiated Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.: RP80-WUS, RP850-WUS, RP820-WUS, RP804-WUS

Only the model RP80-WUS was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being the shell structure of the whole machine.

## 4 Content


<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 VERSION.....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>3</b>
<b>4 CONTENT.....</b>	<b>4</b>
<b>5 TEST REQUIREMENT.....</b>	<b>5</b>
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION.....</b>	<b>8</b>
6.1 CLIENT INFORMATION.....	8
6.2 GENERAL DESCRIPTION OF EUT.....	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 TEST FACILITY.....	9
6.7 DEVIATION FROM STANDARDS.....	10
6.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	10
<b>7 EQUIPMENT LIST.....</b>	<b>11</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION.....</b>	<b>13</b>
Appendix A): Conducted Peak Output Power.....	14
Appendix B): 6dB Occupied Bandwidth.....	15
Appendix C): Band-edge for RF Conducted Emissions.....	20
Appendix D): RF Conducted Spurious Emissions.....	23
Appendix E): Power Spectral Density.....	32
Appendix F): Antenna Requirement.....	37
Appendix G): AC Power Line Conducted Emission.....	38
Appendix H): Restricted bands around fundamental frequency (Radiated).....	41
Appendix I): Radiated Spurious Emissions.....	51
<b>PHOTOGRAPHS OF TEST SETUP.....</b>	<b>60</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS.....</b>	<b>62</b>



## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

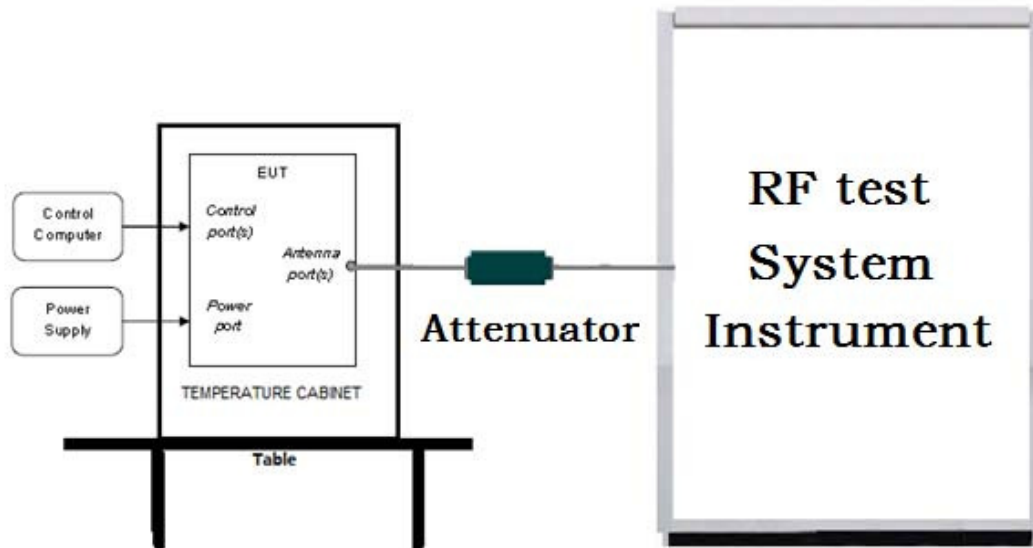

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

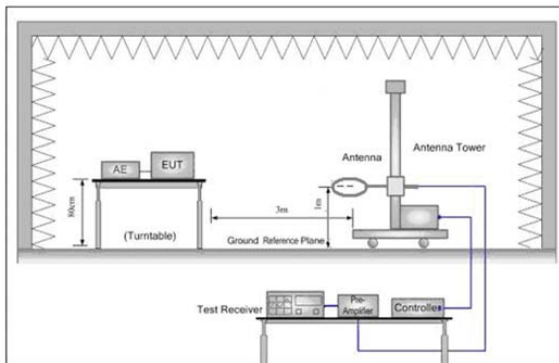


Figure 1. Below 30MHz

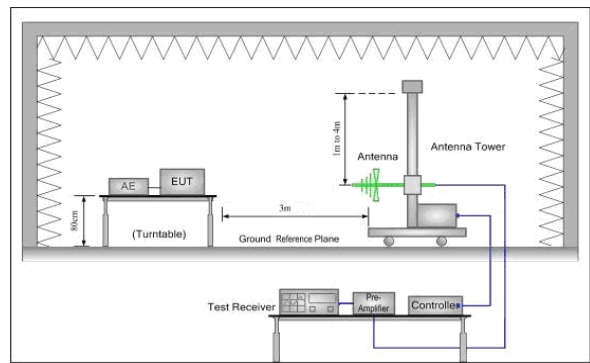


Figure 2. 30MHz to 1GHz


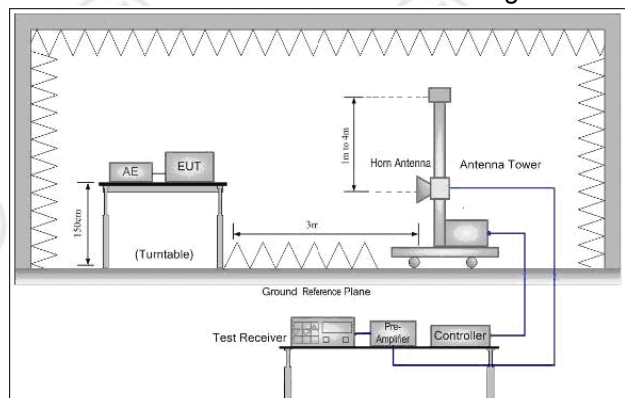


Figure 3. Above 1GHz

### 5.1.3 For Conducted Emissions test setup

#### Conducted Emissions setup

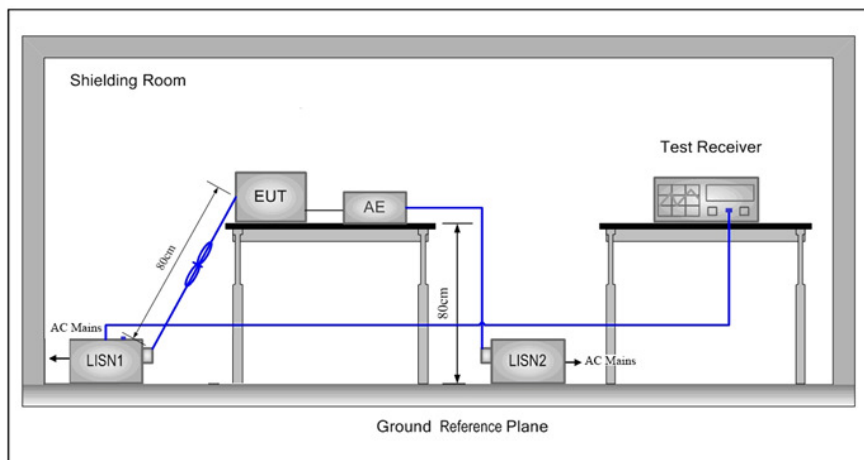

## 5.2 Test Environment

Operating Environment:	
Temperature:	24°C
Humidity:	50% RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

### Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 1	Channel 4	Channel7
		2422MHz	2437MHz	2452MHz
Transmitting mode:	The EUT transmitted the continuous modulation test signal at the specific channel(s).			

**Test mode:**

**Pre-scan under all rate at lowest channel 1**

Scan under air rate at lowest channel :

Mode	802.11b							
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power(dBm)	12.71	12.75	12.80	12.84				
Mode	802.11g							
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power(dBm)	11.02	11.01	10.98	10.87	10.85	10.81	10.76	10.72
Mode	802.11n (HT20)							
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power(dBm)	11.27	11.22	11.20	11.17	11.13	11.08	11.05	11.01
Mode	802.11n (HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power(dBm)	12.86	12.84	12.80	12.74	12.70	12.66	12.62	12.60

Through Pre-scan, 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

## 6 General Information

### 6.1 Client Information

Applicant:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Applicant:	3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xiamen City
Manufacturer:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Manufacturer:	3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xiamen City
Factory:	XIAMEN RONGTA TECHNOLOGY CO., LTD.
Address of Factory:	3F-1/E Building, No.195 Gaoqishe, Gaodian Village, Dianqian Street Office, Huli District, Xiamen City

### 6.2 General Description of EUT

Product Name:	Thermal Receipt Printer
Model No.(EUT):	RP80-WUS, RP850-WUS, RP820-WUS, nRP804-WUS
Test Model No.:	RP80-WUS
Trade Mark:	Rongta
EUT Supports Radios application	Wlan 2.4GHz 802.11b/g/n(HT20&HT40)
AC adapter:	AC 100-240V, 50/60Hz, 1.5A Output: DC 24V, 2.5A
Sample Received Date:	Apr. 08, 2016
Sample tested Date:	Apr. 08, 2016 to Sep. 20, 2016

### 6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Test Power Grade:	802.11b:14, 802.11g: 10, 802.11n(HT20): 0B, 802.11n(HT40): 0B (manufacturer declare )
Test Software of EUT:	RT5350QA (manufacturer declare )
Antenna Type:	Integral antenna
Antenna Gain:	2.19dBi
Test Voltage:	AC 120V, 60Hz

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel(802.11n HT40)					
Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2422MHz	4	2437MHz	7	2452MHz
2	2427MHz	5	2442MHz		
3	2432MHz	6	2447MHz		

## 6.4 Description of Support Units

The EUT has been tested independently.

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 3368 3668 Fax: +86 (0) 755 3368 3385

No tests were sub-contracted.

## 6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-Lab Code: L1910**

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

### **A2LA-Lab Cert. No. 3061.01**

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### **FCC-Registration No.: 886427**

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

### **IC-Registration No.: 7408A-2**

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

### **IC-Registration No.: 7408B-1**

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

### **NEMKO-Aut. No.: ELA503**



Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

#### VCCI

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

### 6.7 Deviation from Standards

None.

### 6.8 Abnormalities from Standard Conditions

None.

### 6.9 Other Information Requested by the Customer

None.

### 6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Communication test set test set	Agilent	N4010A	MY51400230	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
PC-1	Lenovo	R4960d	---	04-01-2016	03-31-2017
power meter & power sensor	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	04-01-2016	03-31-2017

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Voltage Probe	R&S	ESH2-Z3	--	07-09-2014	07-07-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	01-27-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-03-2017
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
Multi device Controller	maturio	NCD/070/1071 1112	---	01-12-2016	01-11-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-12-2016	01-11-2017
Cable line	Fulai(6M)	SF106	5220/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5216/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5217/6A	01-12-2016	01-11-2017
High-pass filter	Sinoscite	FL3CX03WG1 8NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-12-2016	01-11-2017

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10/ KDB 558074	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10/ KDB 558074	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10/ KDB 558074	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10/ KDB 558074	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)

## Appendix A): Conducted Peak Output Power

### Test Procedure

1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.

**Result Table**

Mode	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	LCH	12.84	PASS
11B	MCH	13.53	PASS
11B	HCH	13.86	PASS
11G	LCH	11.02	PASS
11G	MCH	13.05	PASS
11G	HCH	13.8	PASS
11N20SISO	LCH	11.27	PASS
11N20SISO	MCH	12.99	PASS
11N20SISO	HCH	13.69	PASS
11N40SISO	LCH	12.86	PASS
11N40SISO	MCH	13.4	PASS
11N40SISO	HCH	12.98	PASS




## Appendix B): 6dB Occupied Bandwidth




**Result Table**




Mode	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
11B	LCH	10.21	14.941	PASS	Peak detector
11B	MCH	10.20	14.934	PASS	
11B	HCH	10.21	14.905	PASS	
11G	LCH	16.47	16.457	PASS	
11G	MCH	16.48	16.442	PASS	
11G	HCH	16.45	16.441	PASS	
11N20SISO	LCH	17.57	17.558	PASS	
11N20SISO	MCH	17.62	17.566	PASS	
11N20SISO	HCH	17.62	17.562	PASS	
11N40SISO	LCH	35.70	36.041	PASS	
11N40SISO	MCH	36.02	36.074	PASS	
11N40SISO	HCH	36.01	36.036	PASS	

## Test Graph




Graphs

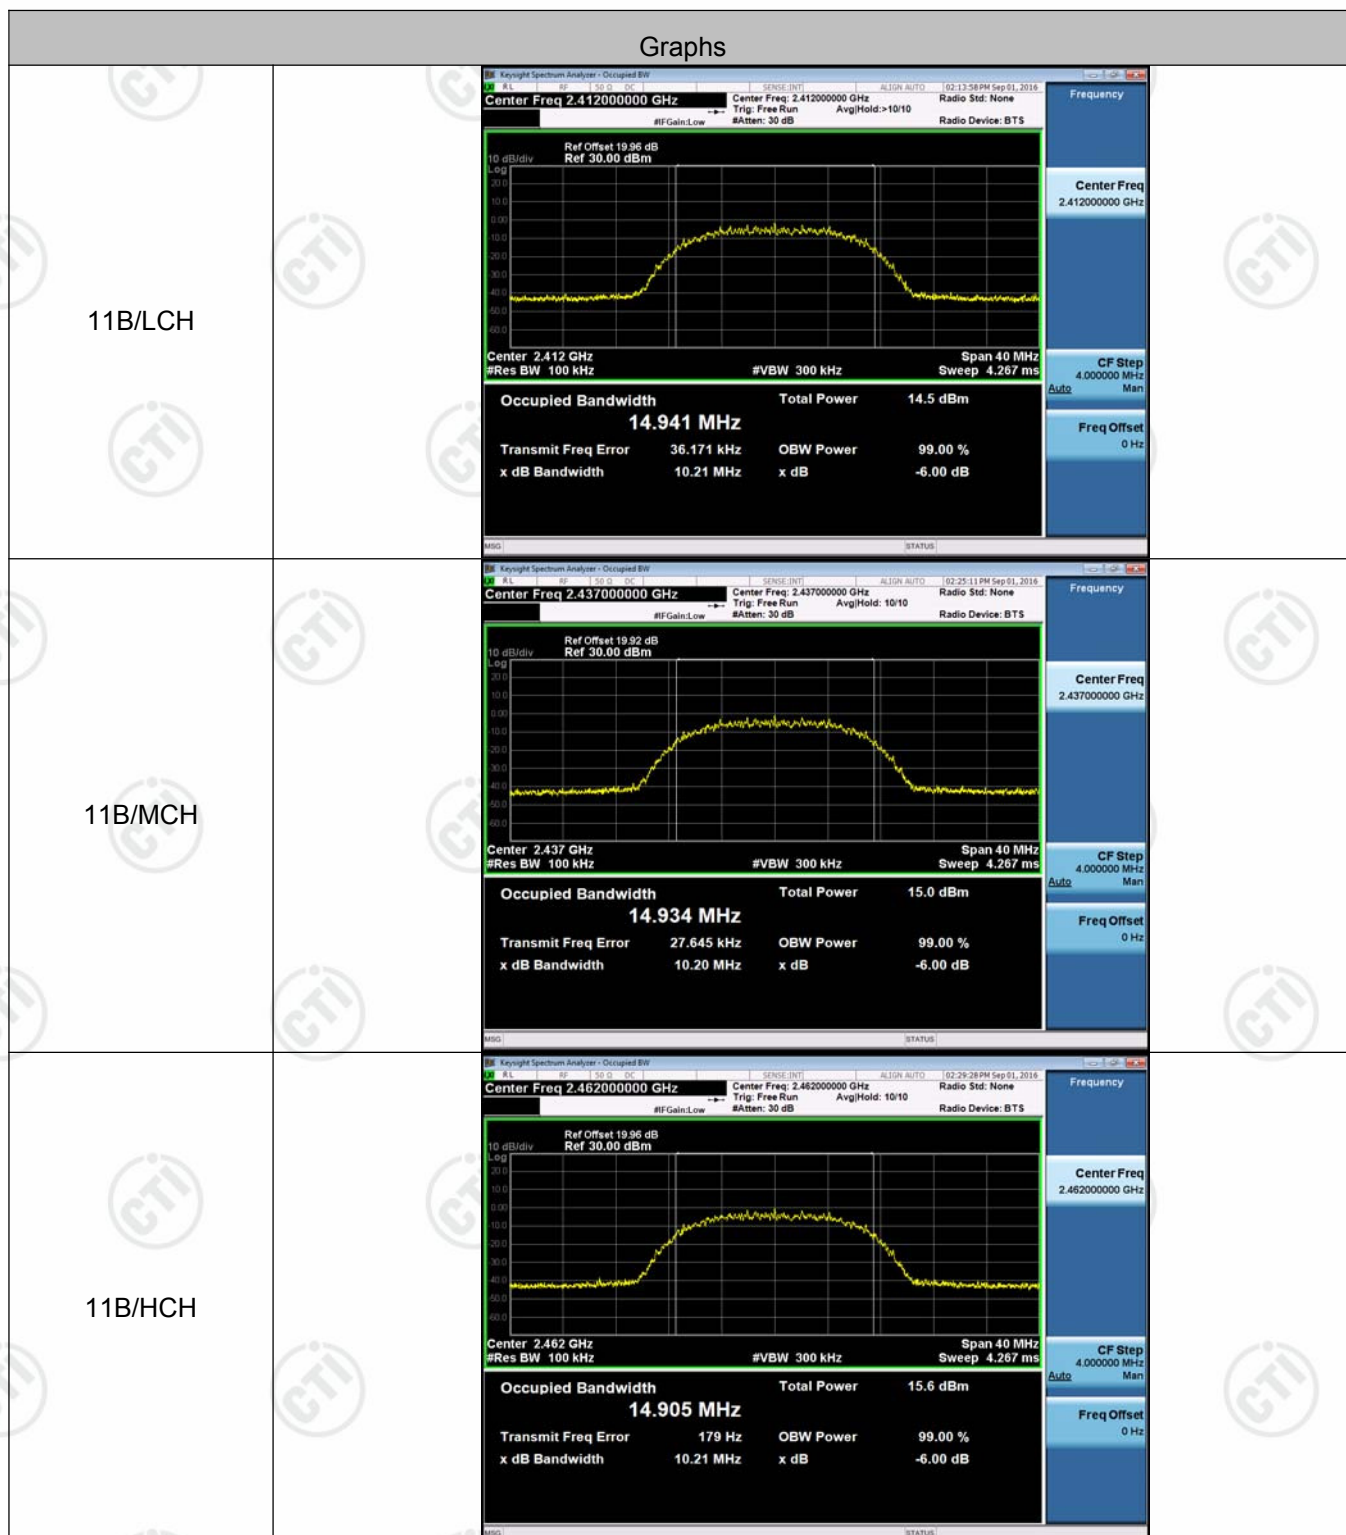

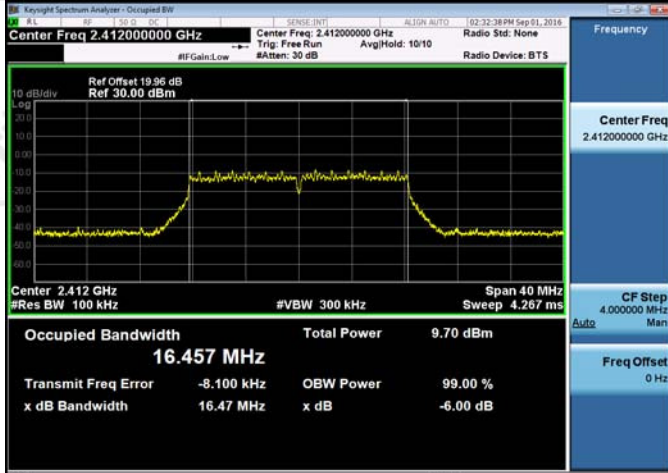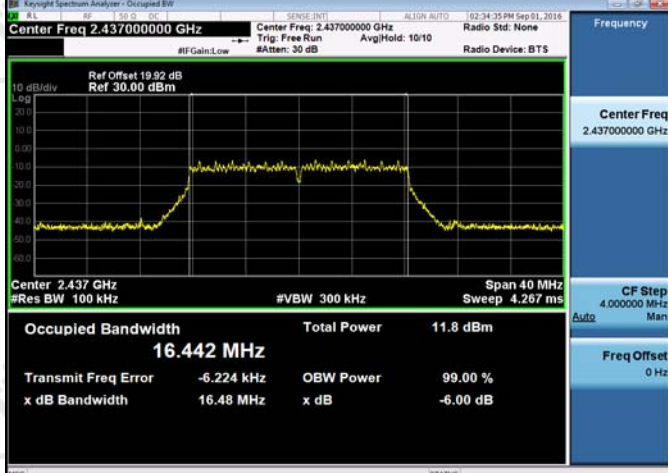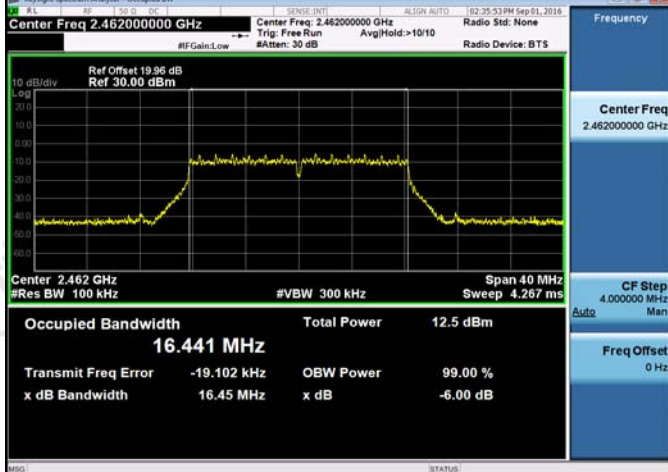11G/LCH	
11G/MCH	
11G/HCH	

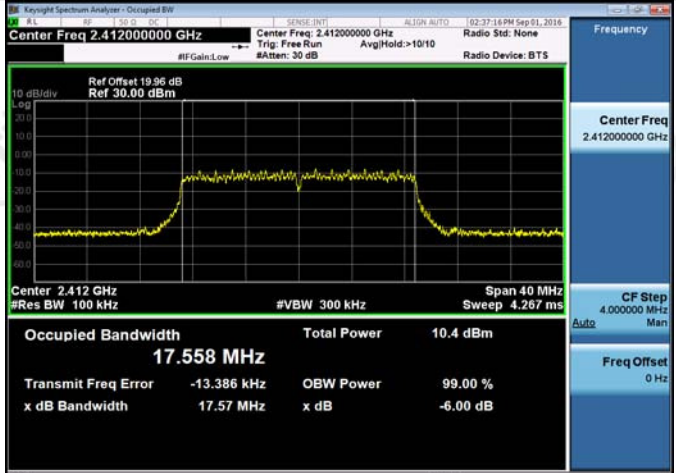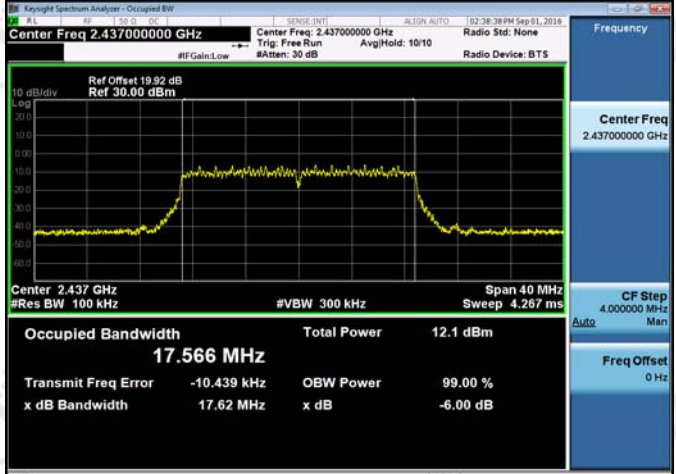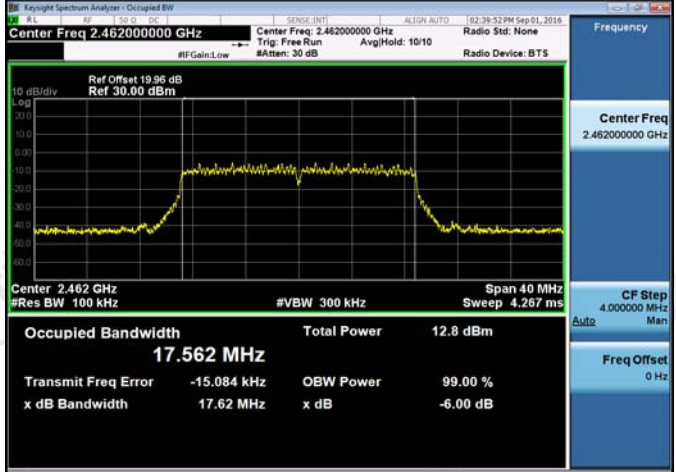11N20SISO/LCH	 <p>Key parameters for 11N20SISO/LCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.412000000 GHz</li> <li>Occupied Bandwidth: 17.558 MHz</li> <li>Total Power: 10.4 dBm</li> <li>Transmit Freq Error: -13.386 kHz</li> <li>OBW Power: 99.00 %</li> </ul>
11N20SISO/MCH	 <p>Key parameters for 11N20SISO/MCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.437000000 GHz</li> <li>Occupied Bandwidth: 17.566 MHz</li> <li>Total Power: 12.1 dBm</li> <li>Transmit Freq Error: -10.439 kHz</li> <li>OBW Power: 99.00 %</li> </ul>
11N20SISO/HCH	 <p>Key parameters for 11N20SISO/HCH:</p> <ul style="list-style-type: none"> <li>Center Freq: 2.462000000 GHz</li> <li>Occupied Bandwidth: 17.562 MHz</li> <li>Total Power: 12.8 dBm</li> <li>Transmit Freq Error: -15.084 kHz</li> <li>OBW Power: 99.00 %</li> </ul>

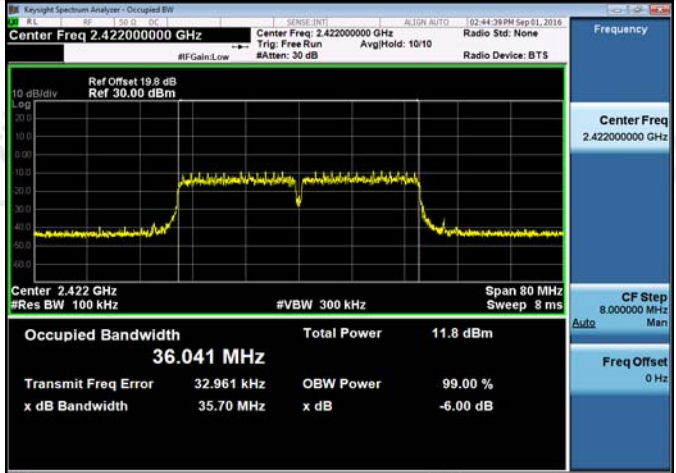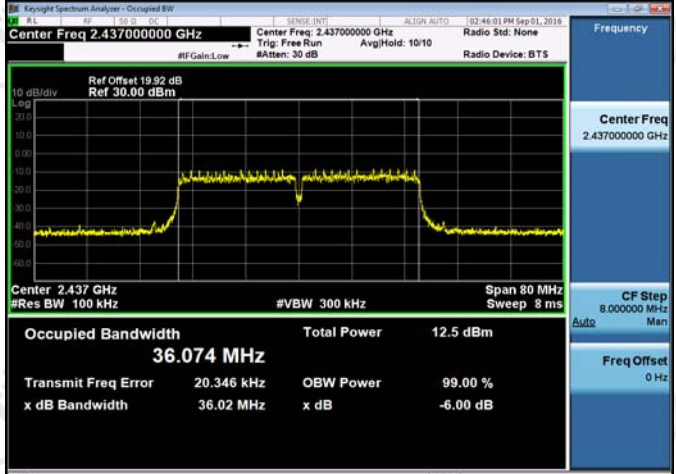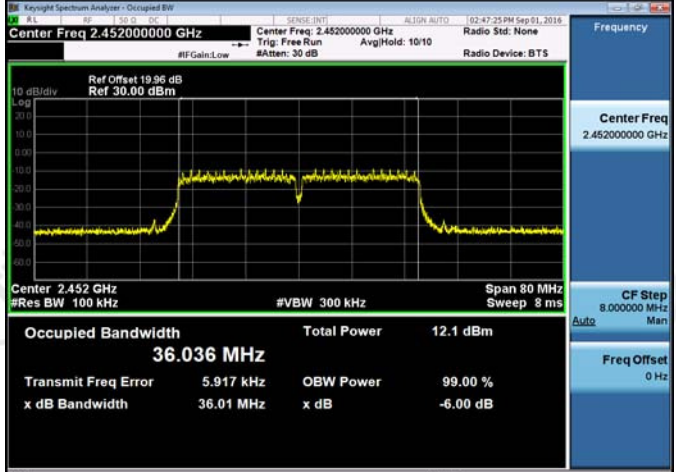

11N40SISO/LCH	
11N40SISO/MCH	
11N40SISO/HCH	




## Appendix C): Band-edge for RF Conducted Emissions

Result Table

Mode	Channel	Carrier Power[dBm]	Max.Spurious Level [dBm]	Limit [dBm]	Verdict
11B	LCH	-2.613	-49.812	-22.61	PASS
11B	HCH	-0.876	-49.385	-20.88	PASS
11G	LCH	-8.032	-49.880	-28.03	PASS
11G	HCH	-5.448	-49.307	-25.45	PASS
11N20SISO	LCH	-7.699	-49.897	-27.7	PASS
11N20SISO	HCH	-5.347	-49.412	-25.35	PASS
11N40SISO	LCH	-9.241	-49.478	-29.24	PASS
11N40SISO	HCH	-8.653	-47.312	-28.65	PASS

Test Graph

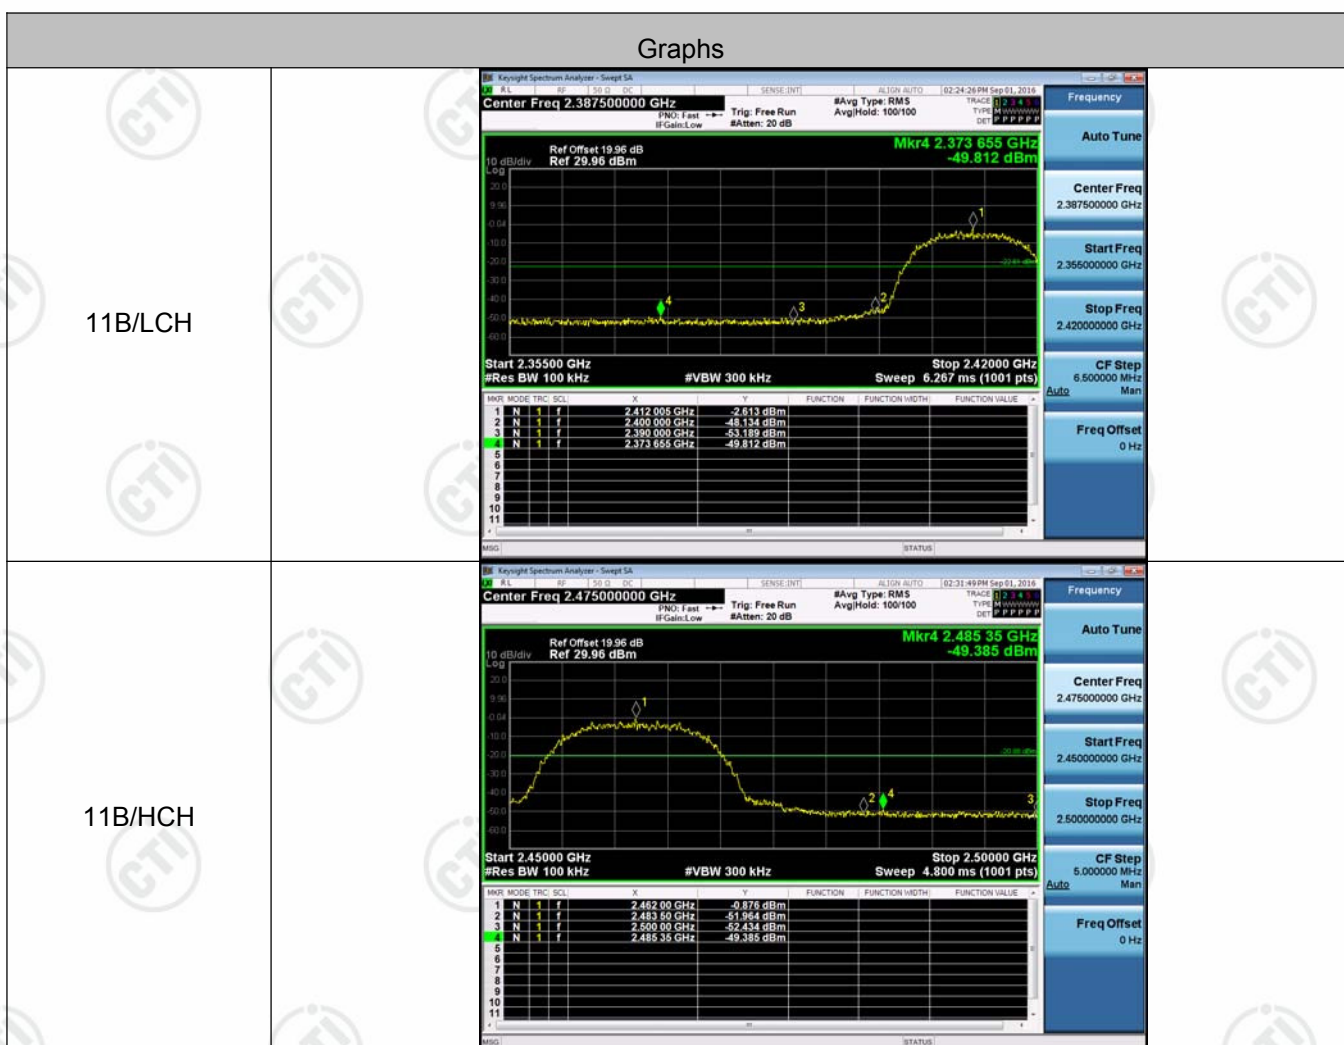


11G/LCH	<div><div><div>Keyight Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.387500000 GHz</div><div>Ref Offset 19.96 dB Ref 29.96 dBm</div><div>Mkr4 2.362 215 GHz -49.880 dBm</div><div>Start 2.35500 GHz #Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Stop 2.42000 GHz Sweep 6.267 ms (1001 pts)</div><div><table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.413 240 GHz</td><td>-8.032 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-46.462 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-51.880 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.362 215 GHz</td><td>-49.880 dBm</td><td></td><td></td><td></td></tr></table></div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.387500000 GHz</div><div>Start Freq 2.355000000 GHz</div><div>Stop Freq 2.420000000 GHz</div><div>CF Step 6.500000 MHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 240 GHz	-8.032 dBm				2	N	1	f	2.400 000 GHz	-46.462 dBm				3	N	1	f	2.390 000 GHz	-51.880 dBm				4	N	1	f	2.362 215 GHz	-49.880 dBm			
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.413 240 GHz	-8.032 dBm																																									
2	N	1	f	2.400 000 GHz	-46.462 dBm																																									
3	N	1	f	2.390 000 GHz	-51.880 dBm																																									
4	N	1	f	2.362 215 GHz	-49.880 dBm																																									
11G/HCH	<div><div><div>Keyight Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.475000000 GHz</div><div>Ref Offset 19.96 dB Ref 29.96 dBm</div><div>Mkr4 2.491 95 GHz -49.307 dBm</div><div>Start 2.45000 GHz #Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Stop 2.50000 GHz Sweep 4.800 ms (1001 pts)</div><div><table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.463 25 GHz</td><td>-5.448 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-52.421 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-53.262 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.491 95 GHz</td><td>-49.307 dBm</td><td></td><td></td><td></td></tr></table></div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.475000000 GHz</div><div>Start Freq 2.450000000 GHz</div><div>Stop Freq 2.500000000 GHz</div><div>CF Step 5.000000 MHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 25 GHz	-5.448 dBm				2	N	1	f	2.483 50 GHz	-52.421 dBm				3	N	1	f	2.500 00 GHz	-53.262 dBm				4	N	1	f	2.491 95 GHz	-49.307 dBm			
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.463 25 GHz	-5.448 dBm																																									
2	N	1	f	2.483 50 GHz	-52.421 dBm																																									
3	N	1	f	2.500 00 GHz	-53.262 dBm																																									
4	N	1	f	2.491 95 GHz	-49.307 dBm																																									
11N20SISO/LCH	<div><div><div>Keyight Spectrum Analyzer - Sweep SA</div><div>Center Freq 2.387500000 GHz</div><div>Ref Offset 19.96 dB Ref 29.96 dBm</div><div>Mkr4 2.361 110 GHz -49.897 dBm</div><div>Start 2.35500 GHz #Res BW 100 kHz</div><div>#VBW 300 kHz</div><div>Stop 2.42000 GHz Sweep 6.267 ms (1001 pts)</div><div><table><tr><th>MARK</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.413 240 GHz</td><td>-7.699 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-46.387 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-52.429 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.361 110 GHz</td><td>-49.897 dBm</td><td></td><td></td><td></td></tr></table></div></div><div><div>Frequency</div><div>Auto Tune</div><div>Center Freq 2.387500000 GHz</div><div>Start Freq 2.355000000 GHz</div><div>Stop Freq 2.420000000 GHz</div><div>CF Step 6.500000 MHz Man</div><div>Freq Offset 0 Hz</div></div></div>	MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 240 GHz	-7.699 dBm				2	N	1	f	2.400 000 GHz	-46.387 dBm				3	N	1	f	2.390 000 GHz	-52.429 dBm				4	N	1	f	2.361 110 GHz	-49.897 dBm			
MARK	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.413 240 GHz	-7.699 dBm																																									
2	N	1	f	2.400 000 GHz	-46.387 dBm																																									
3	N	1	f	2.390 000 GHz	-52.429 dBm																																									
4	N	1	f	2.361 110 GHz	-49.897 dBm																																									


11N20SISO/HCH



11N40SISO/LCH

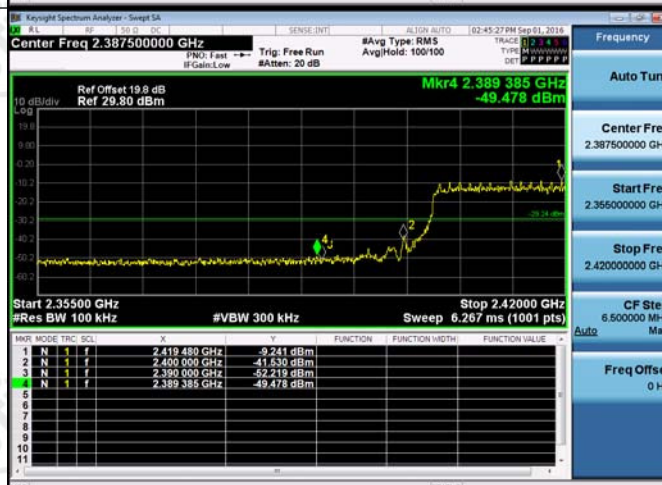

11N40SISO/HCH

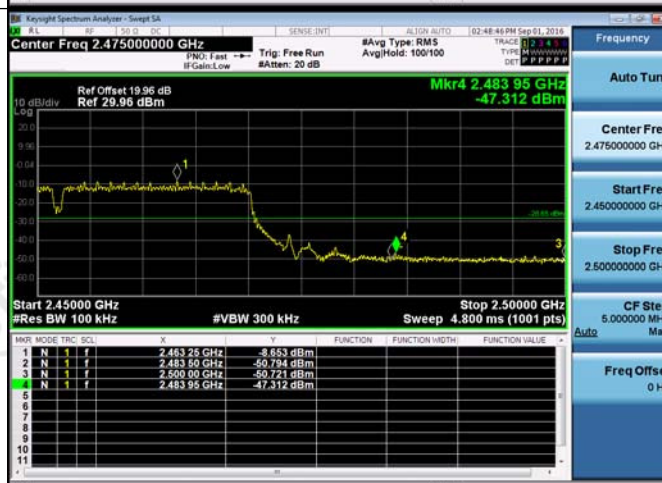


## Appendix D): RF Conducted Spurious Emissions

**Result Table**


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
11B	LCH	-2.263	<Limit	PASS
11B	MCH	-0.909	<Limit	PASS
11B	HCH	-0.542	<Limit	PASS
11G	LCH	-7.994	<Limit	PASS
11G	MCH	-6.22	<Limit	PASS
11G	HCH	-5.543	<Limit	PASS
11N20SISO	LCH	-7.657	<Limit	PASS
11N20SISO	MCH	-6.037	<Limit	PASS
11N20SISO	HCH	-5.358	<Limit	PASS
11N40SISO	LCH	-8.791	<Limit	PASS
11N40SISO	MCH	-8.208	<Limit	PASS
11N40SISO	HCH	-8.679	<Limit	PASS




# Test Graph

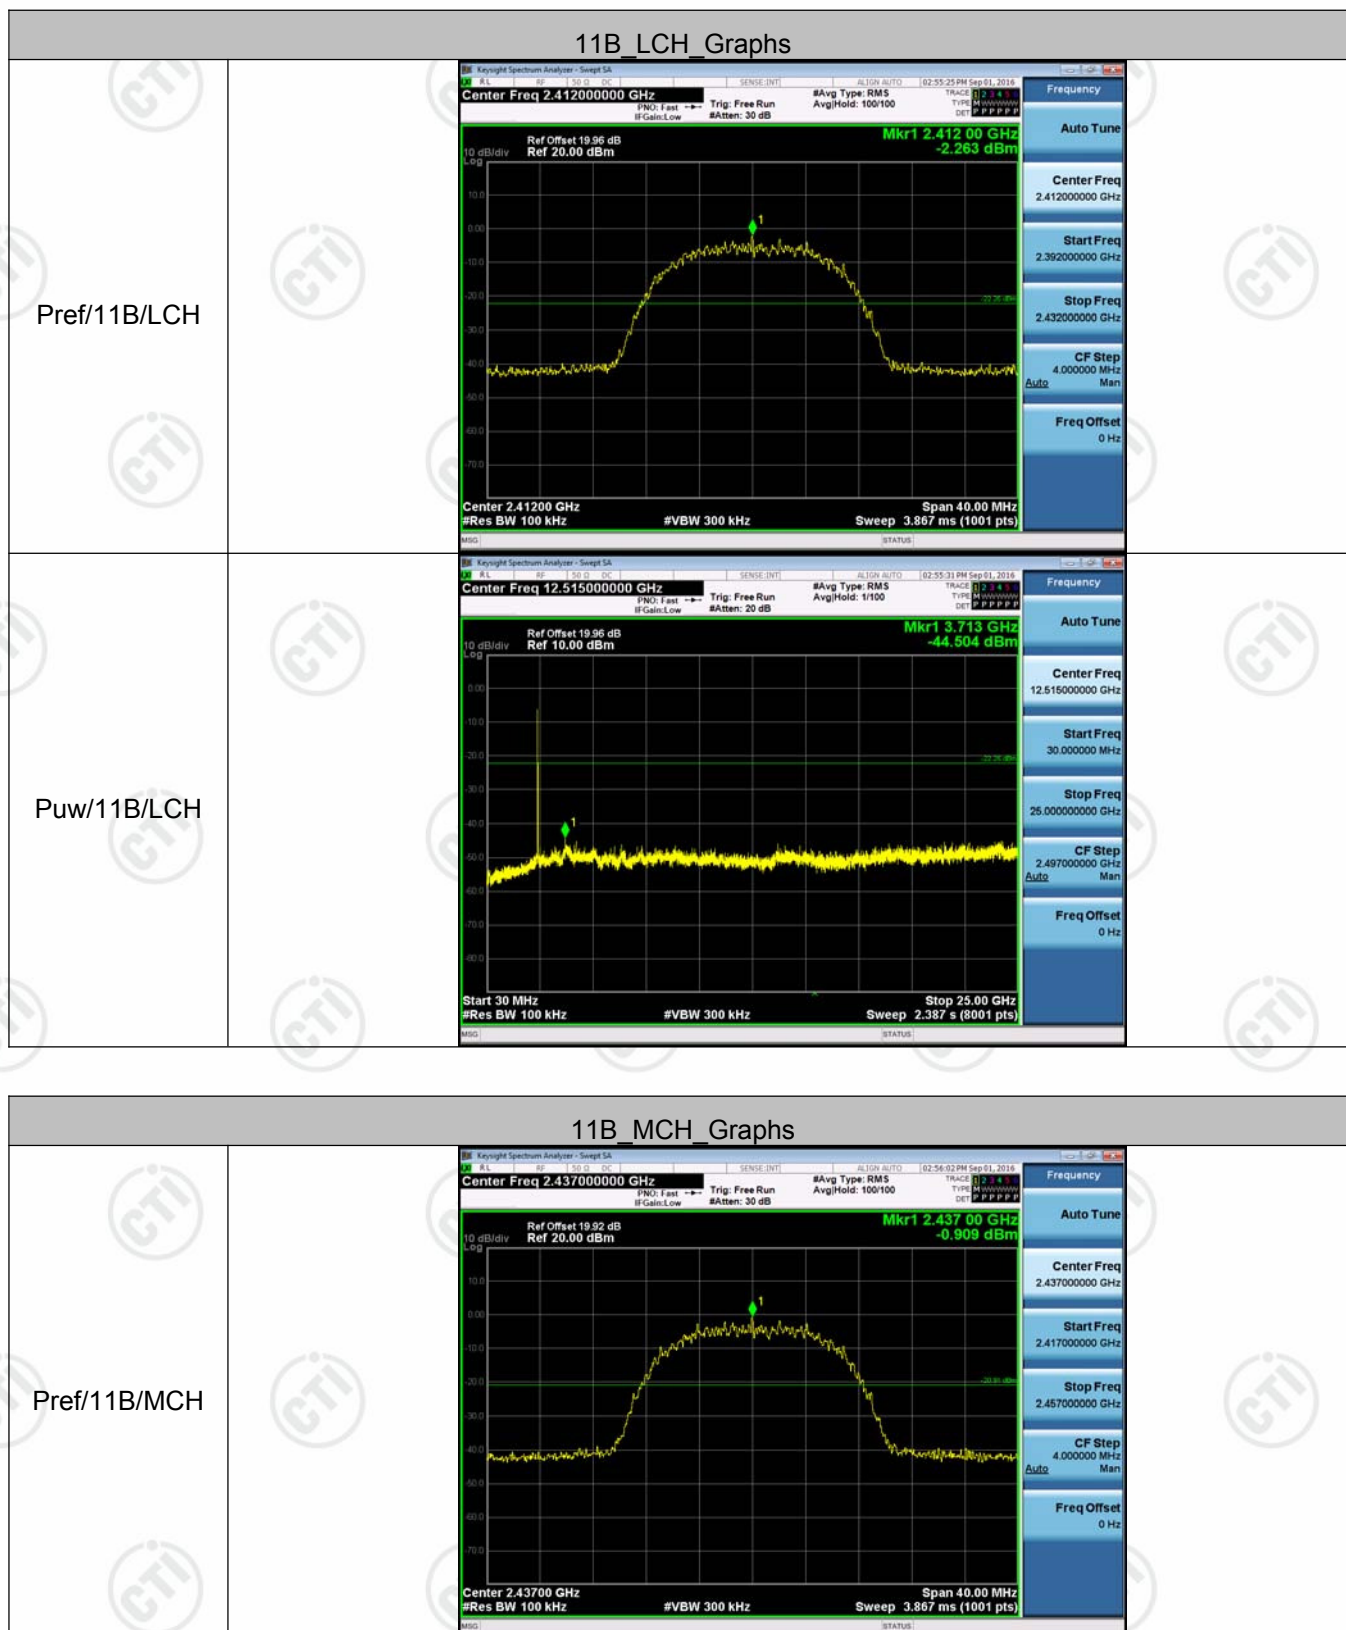



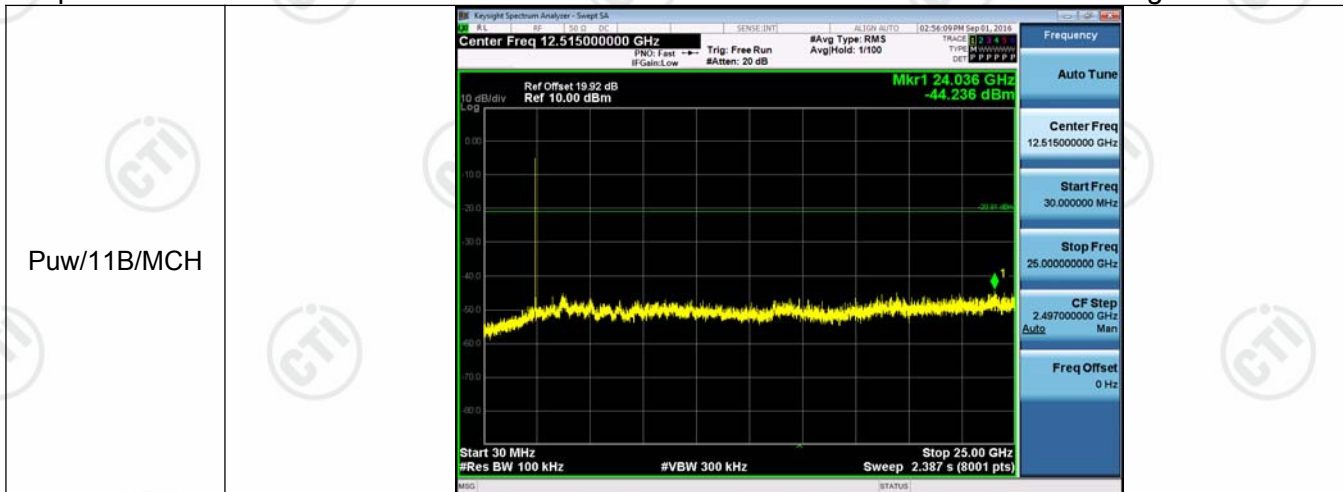


11B\_HCH\_Graphs

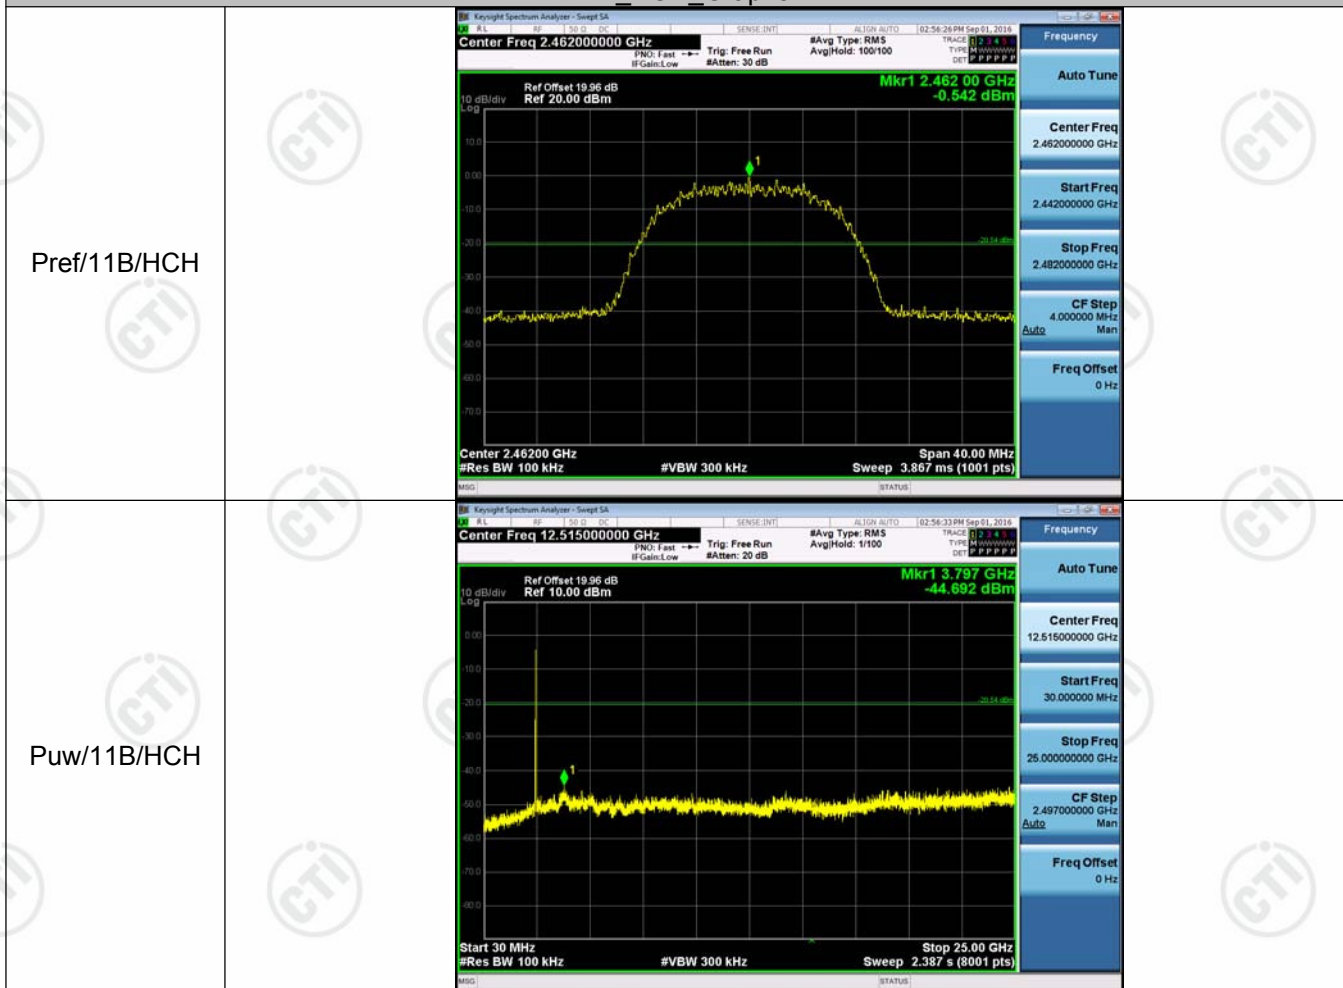


### 11G\_LCH\_Graphs

Pref/11G/LCH

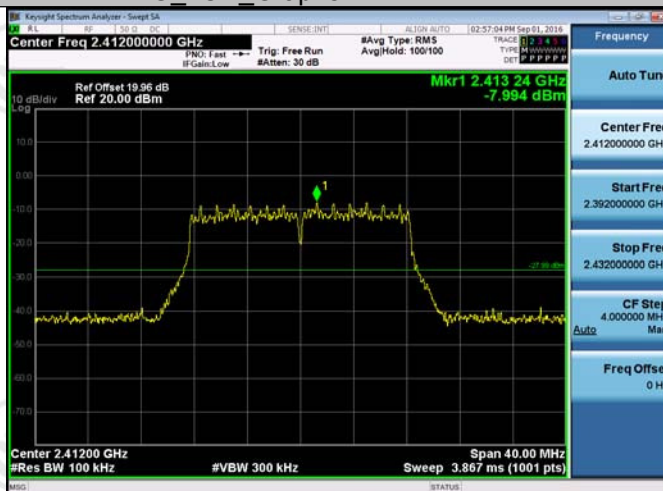



Puw/11G/LCH

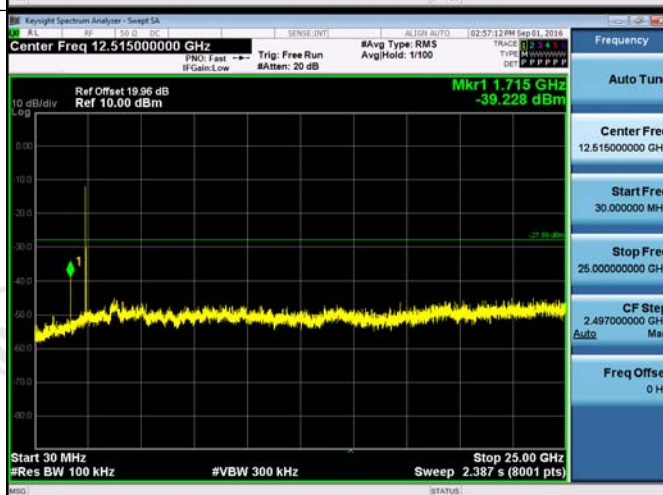


### 11G\_MCH\_Graphs

Pref/11G/MCH

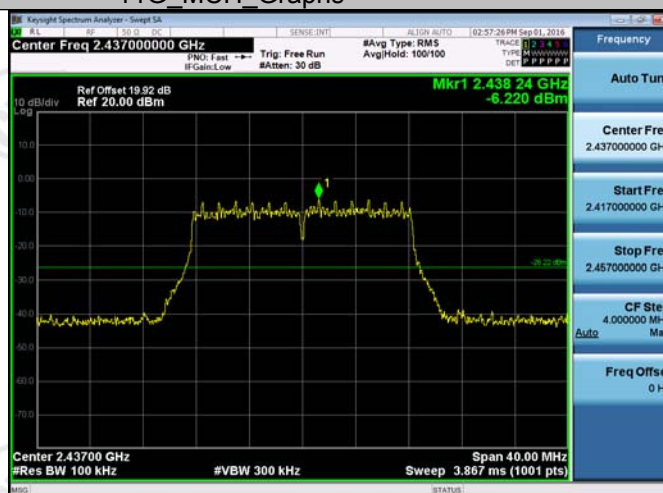

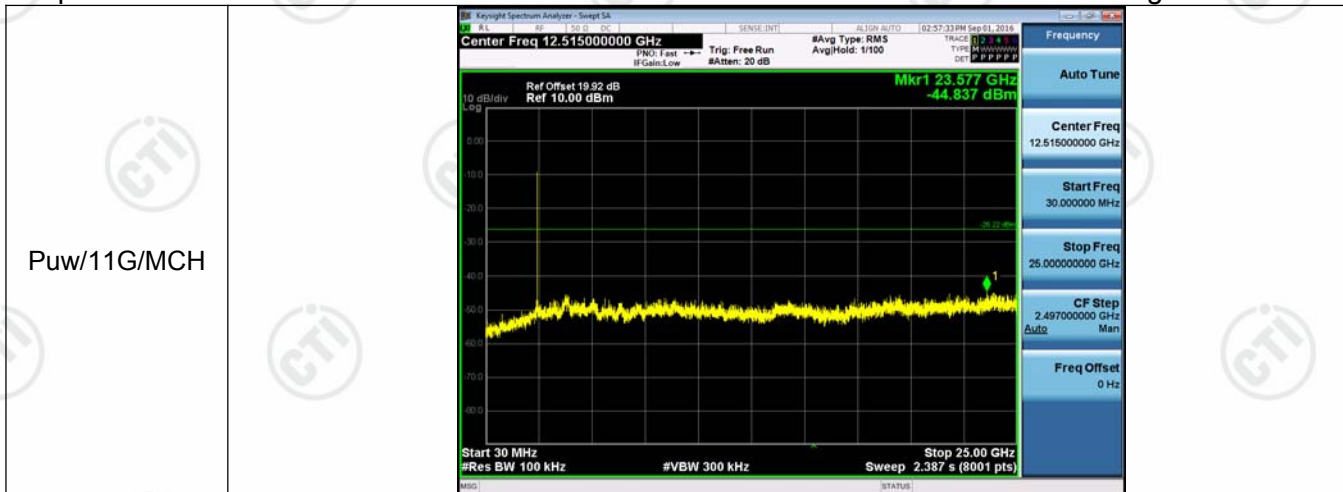


11G\_HCH\_Graphs

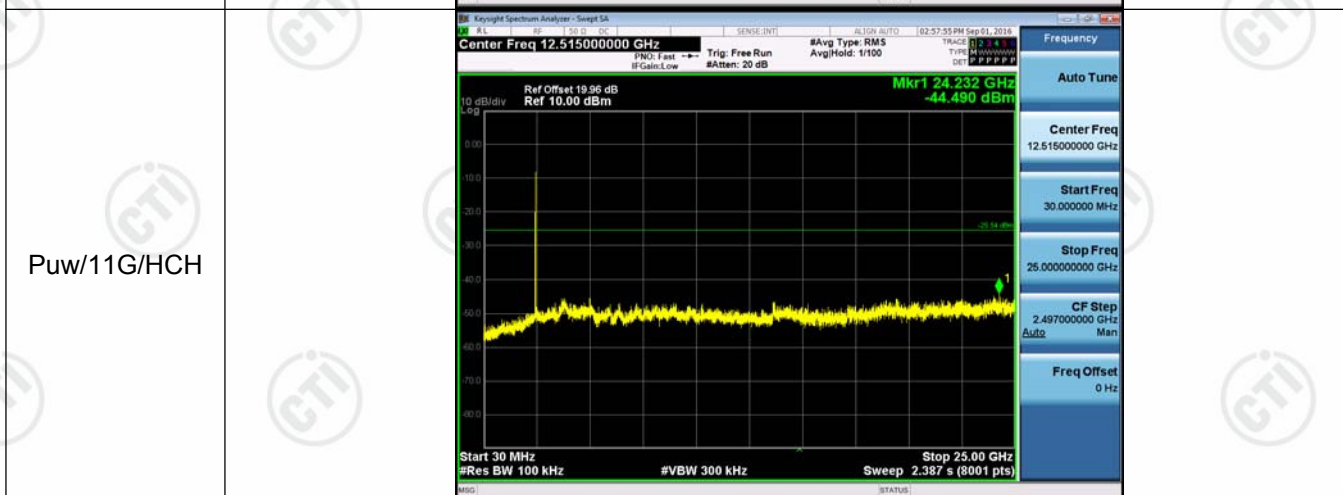




### 11N20SISO\_LCH\_Graphs

Pref/11N20SIS  
O/LCH

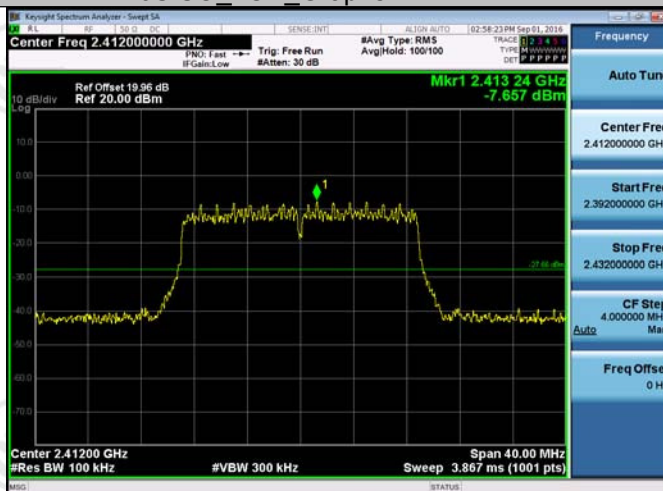


/11N20SISO/L  
CH

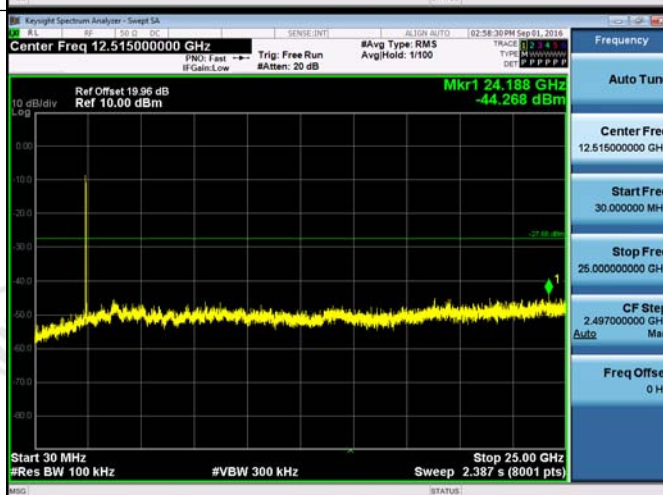


### 11N20SISO\_MCH\_Graphs


Pref/11N20SIS  
O/MCH

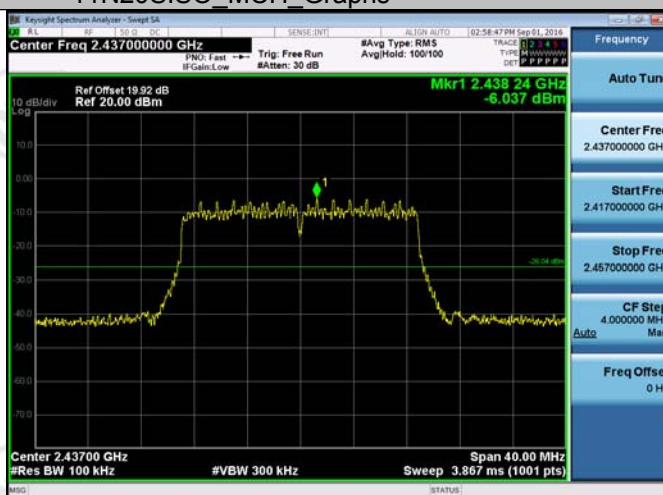



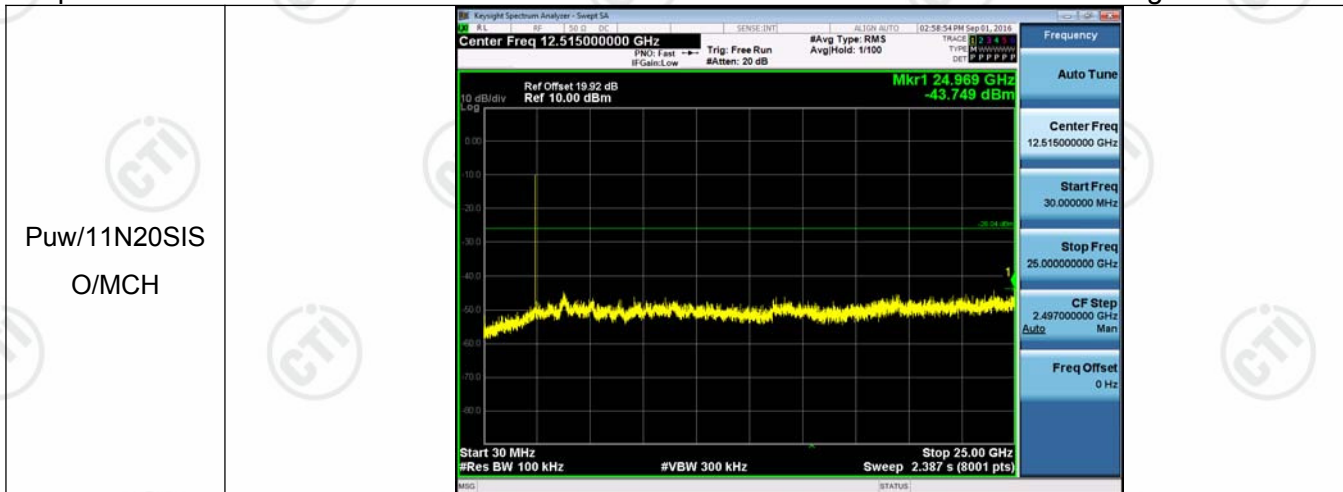


11N20SISO\_HCH\_Graphs

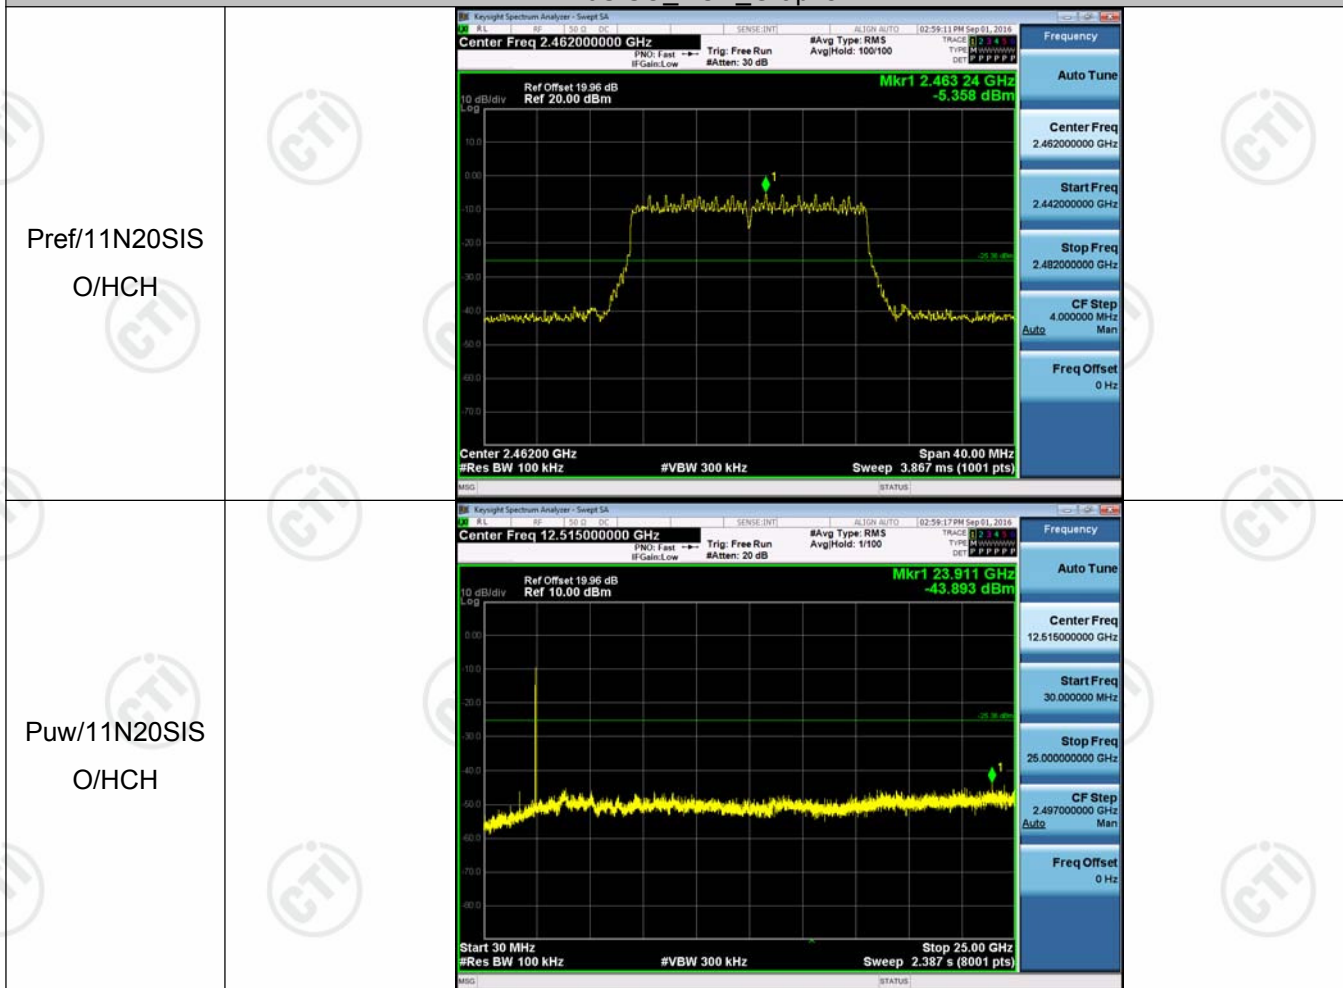


### 11N40SISO\_LCH\_Graphs

Pref/11N40SIS  
O/LCH

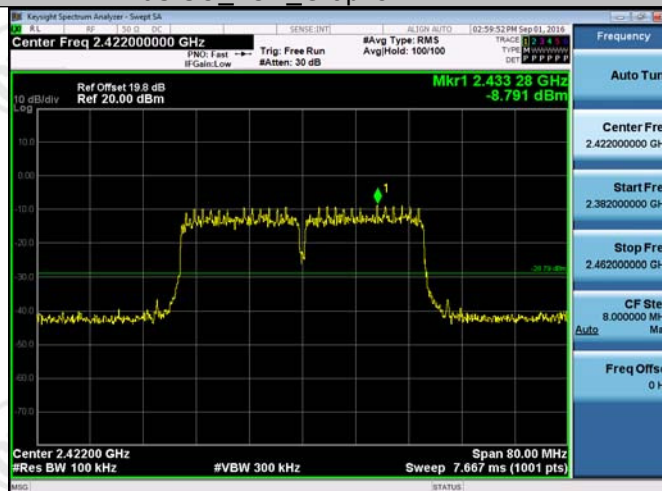



Puw/11N40SIS  
O/LCH

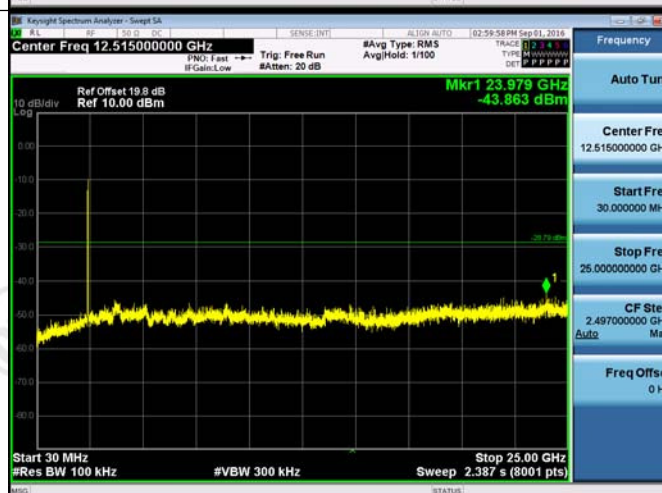


### 11N40SISO\_MCH\_Graphs

Pref/11N40SIS  
O/MCH

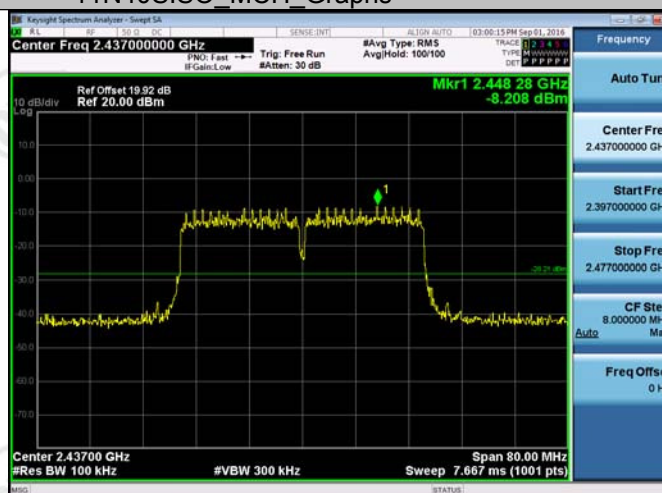

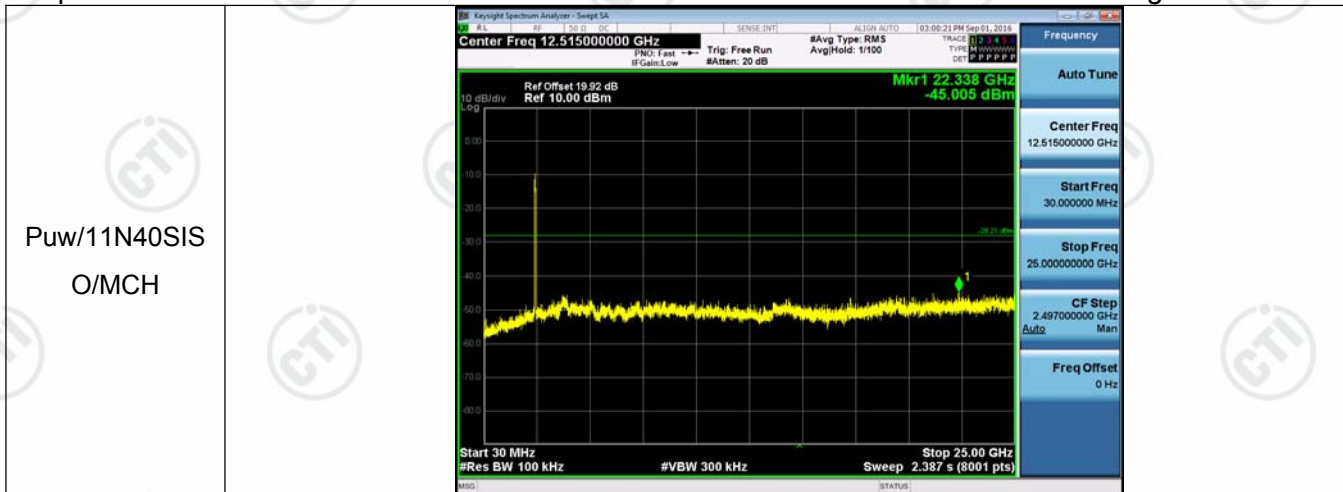

11N40SISO\_HCH\_Graphs

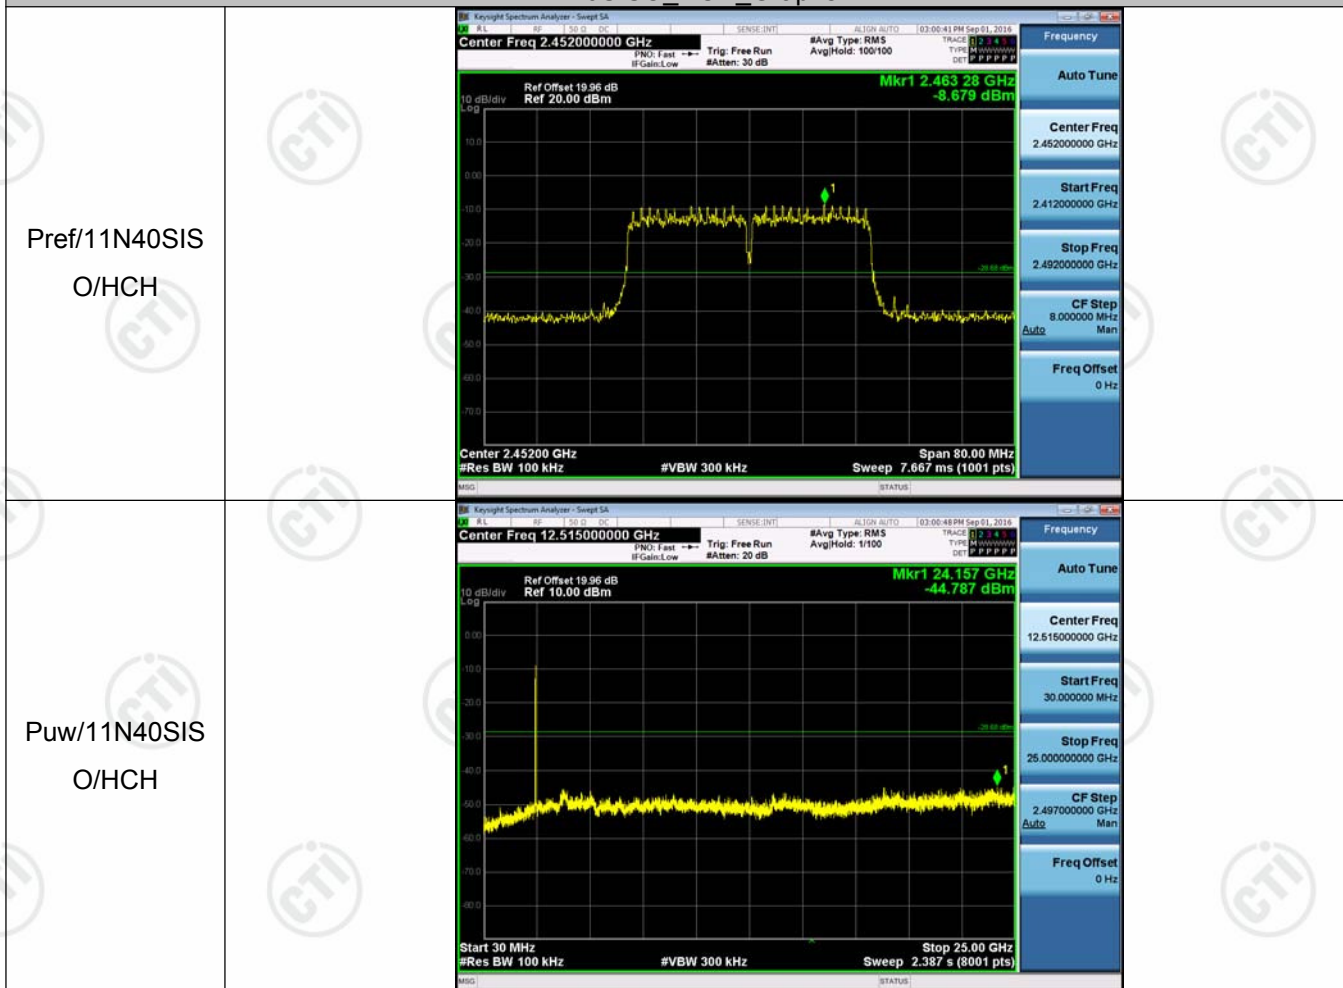

## Appendix E): Power Spectral Density


Result Table



Mode	Channel	Power Spectral Density [dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	LCH	-16.057	8	PASS
11B	MCH	-4.497	8	PASS
11B	HCH	-4.154	8	PASS
11G	LCH	-24.181	8	PASS
11G	MCH	-22.293	8	PASS
11G	HCH	-21.015	8	PASS
11N20SISO	LCH	-23.300	8	PASS
11N20SISO	MCH	-21.668	8	PASS
11N20SISO	HCH	-20.954	8	PASS
11N40SISO	LCH	-26.876	8	PASS
11N40SISO	MCH	-26.553	8	PASS
11N40SISO	HCH	-25.866	8	PASS






## Test Graph

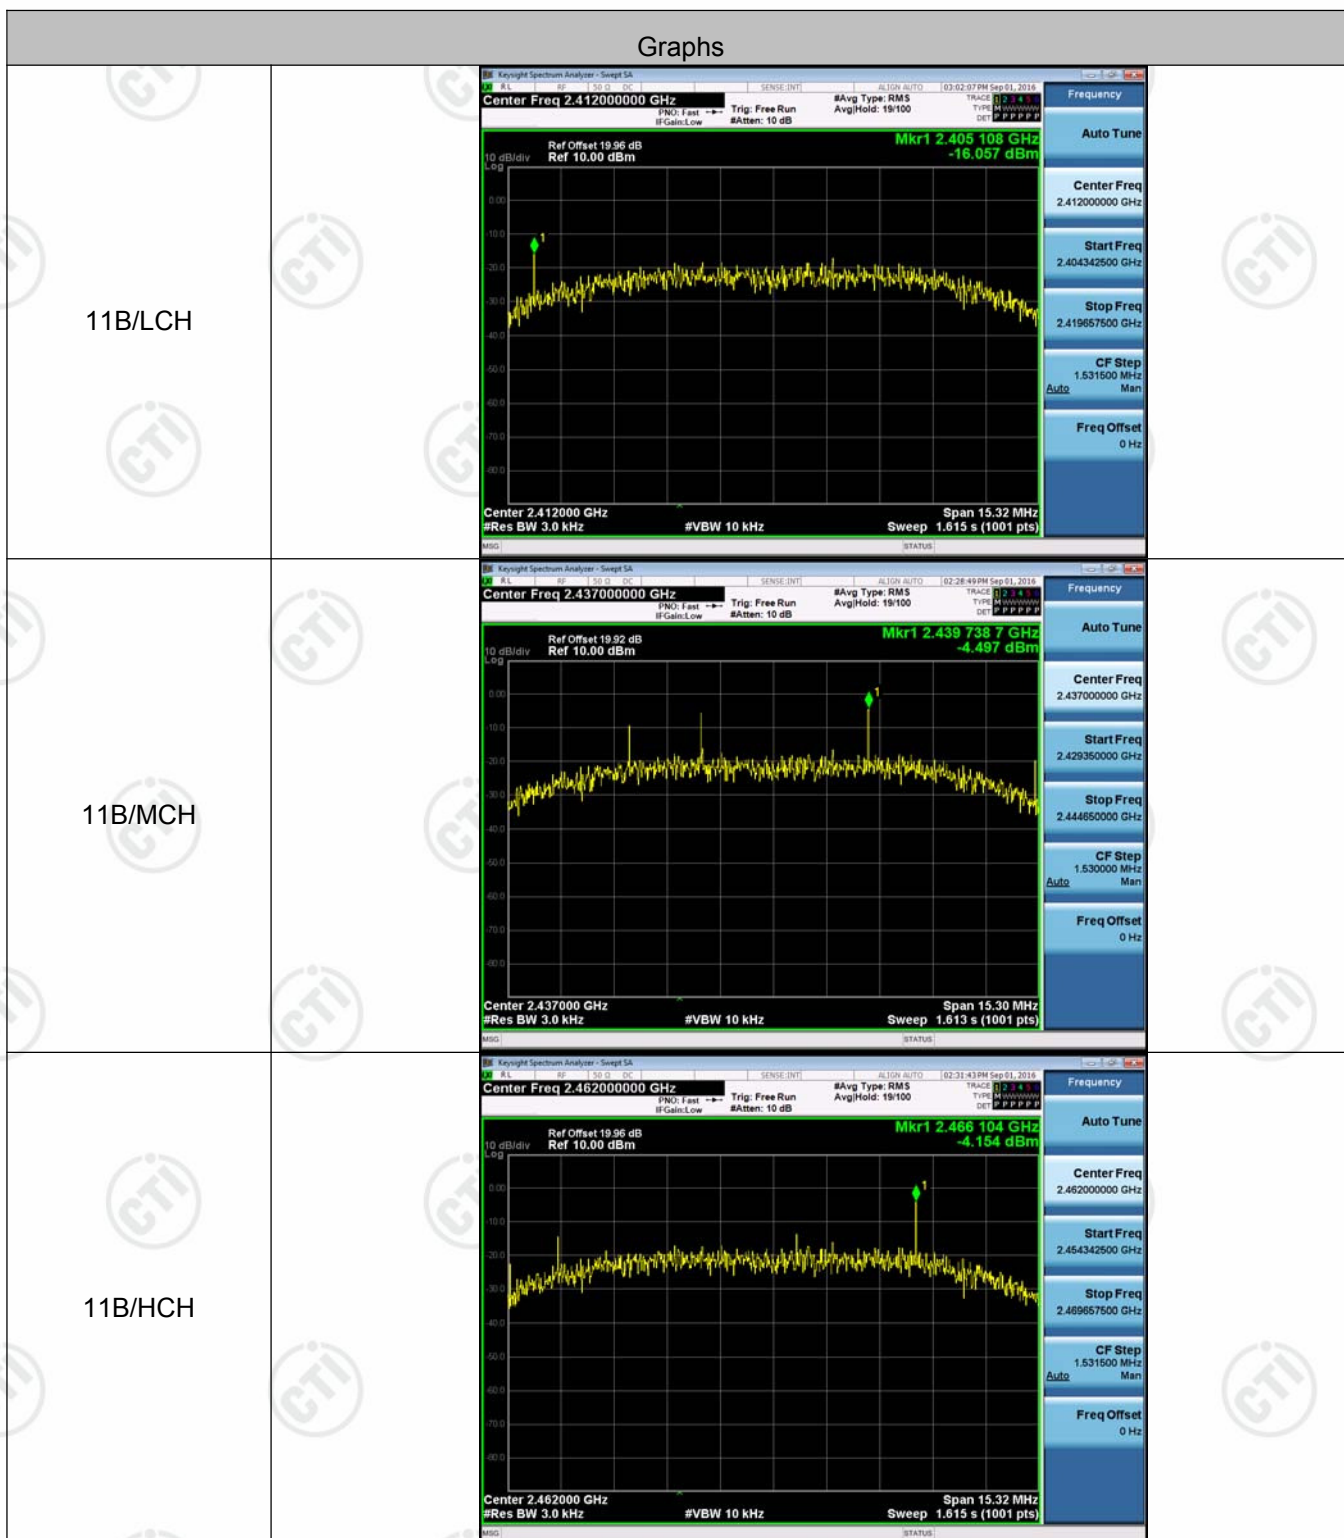

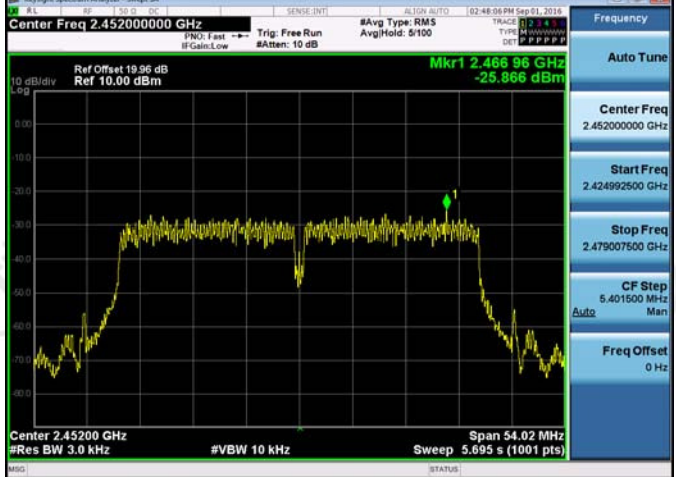
Graphs



11G/LCH	
11G/MCH	
11G/HCH	

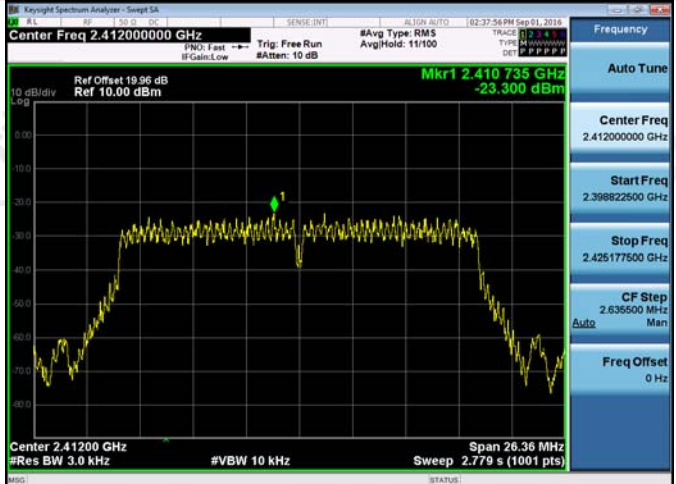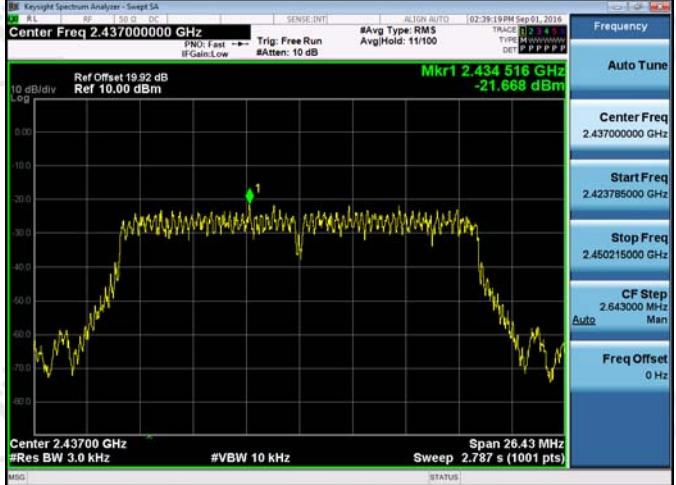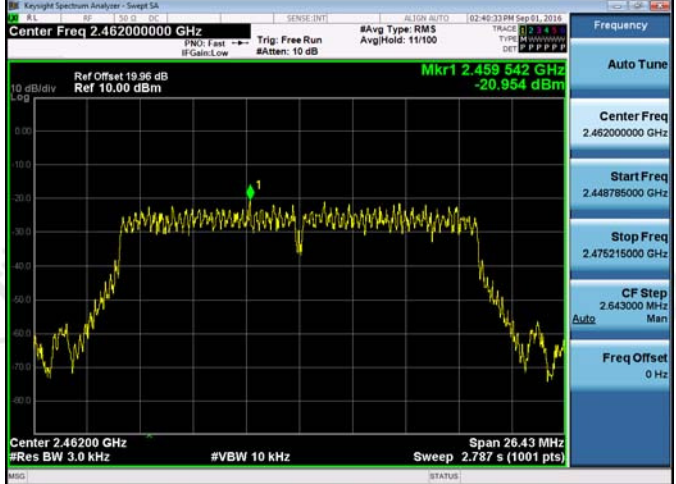11N20SISO/LCH	
11N20SISO/MCH	
11N20SISO/HCH	

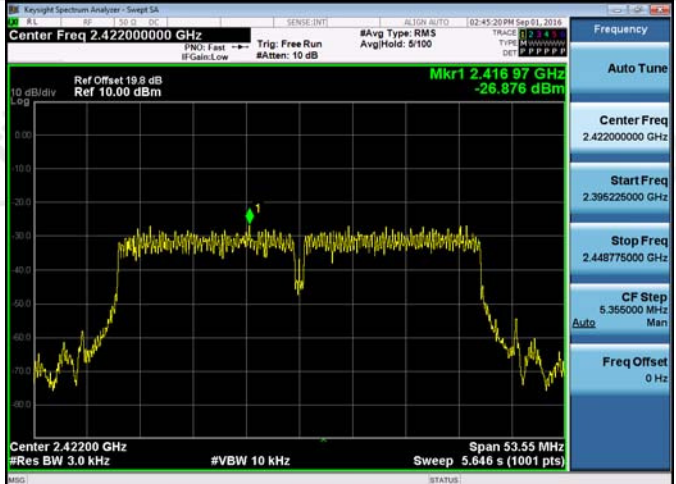

11N40SISO/LCH	
11N40SISO/MCH	
11N40SISO/HCH	



## Appendix F): Antenna Requirement

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.19dBi.



## Appendix G): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> <li>1)The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol>															
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dB<math>\mu</math>V)</th></tr> <tr> <th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td>0.5-5</td><td>56</td><td>46</td></tr> <tr> <td>5-30</td><td>60</td><td>50</td></tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>		Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB $\mu$ V)															
	Quasi-peak	Average														
0.15-0.5	66 to 56*	56 to 46*														
0.5-5	56	46														
5-30	60	50														


### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


90.0 dBuV

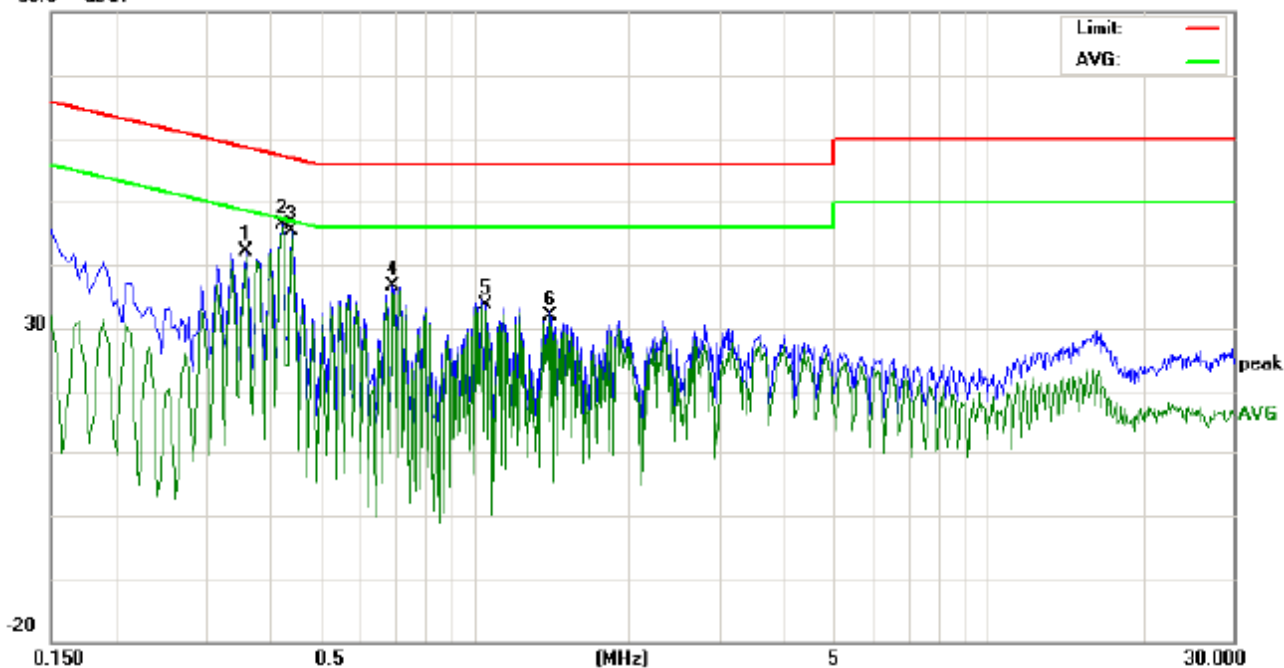

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.3580	32.34	32.10	31.38	9.86	42.20	41.96	41.24	58.77	48.77	-16.81	-7.53	P	
2	0.4220	36.36	36.11	36.05	9.90	46.26	46.01	45.95	57.41	47.41	-11.40	-1.46	P	
3	0.4420	35.45	35.34	35.24	9.90	45.35	45.24	45.14	57.02	47.02	-11.78	-1.88	P	
4	0.6940	26.83	26.03	25.72	9.90	36.73	35.93	35.62	56.00	46.00	-20.07	-10.38	P	
5	1.0540	35.60	32.50	21.98	10.00	45.60	42.50	31.98	56.00	46.00	-13.50	-14.02	P	
6	1.4100	21.99	21.50	20.81	10.00	31.99	31.50	30.81	56.00	46.00	-24.50	-15.19	P	

Neutral line:

90.0 dBuV

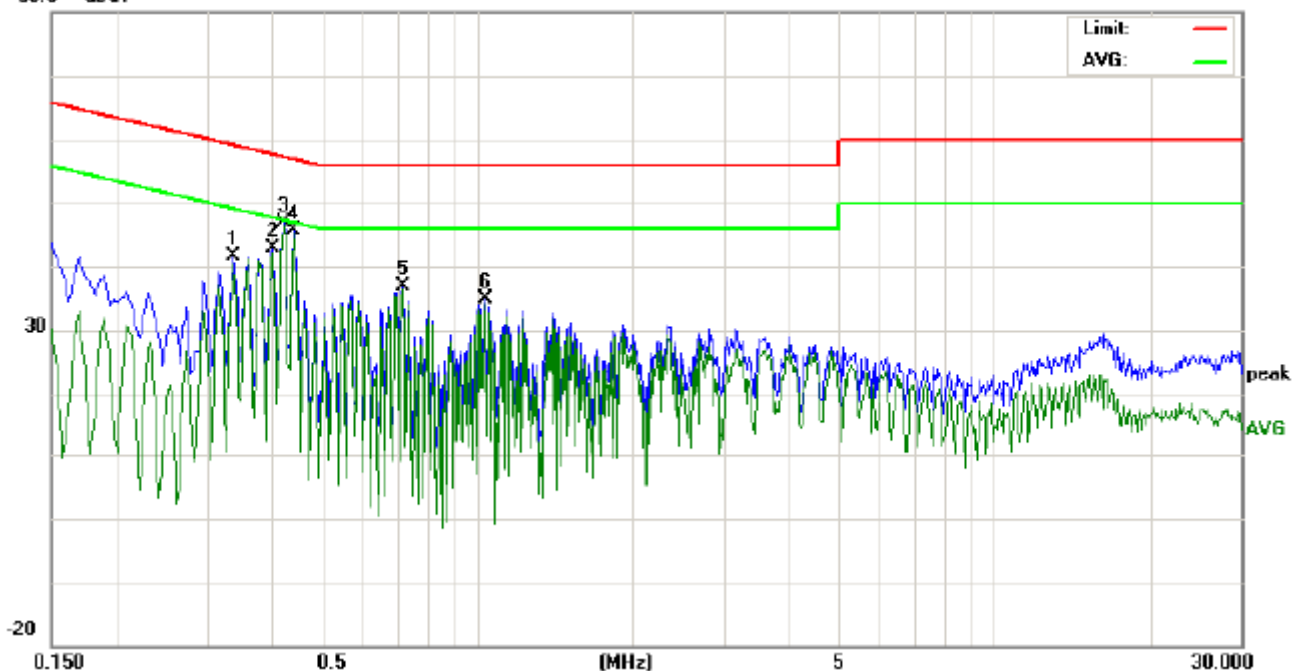

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.3379	31.69	30.80	30.53	9.84	41.53	40.64	40.37	59.25	49.25	-18.61	-8.88	P	
2	0.4020	32.89	32.30	32.29	9.90	42.79	42.20	42.19	57.81	47.81	-15.61	-5.62	P	
3	0.4211	36.98	36.39	36.31	9.90	46.88	46.29	46.21	57.43	47.43	-11.14	-1.22	P	
4	0.4420	35.67	35.59	35.53	9.90	45.57	45.49	45.43	57.02	47.02	-11.53	-1.59	P	
5	0.7180	26.87	26.70	26.36	9.90	36.77	36.60	36.26	56.00	46.00	-19.40	-9.74	P	
6	1.0339	24.81	24.50	24.07	10.00	34.81	34.50	34.07	56.00	46.00	-21.50	-11.93	P	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.




## Appendix H): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	


**Test plot as follows:**

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

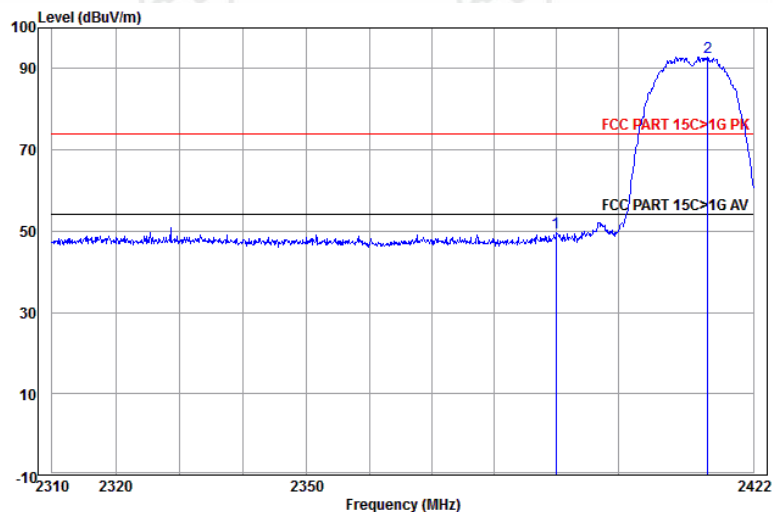


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	47.15	49.57	74.00	-24.43	Horizontal
2 pp	2414.558	32.58	4.34	34.39	90.26	92.79	74.00	18.79	Horizontal

Worse case mode:	802.11b (11Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

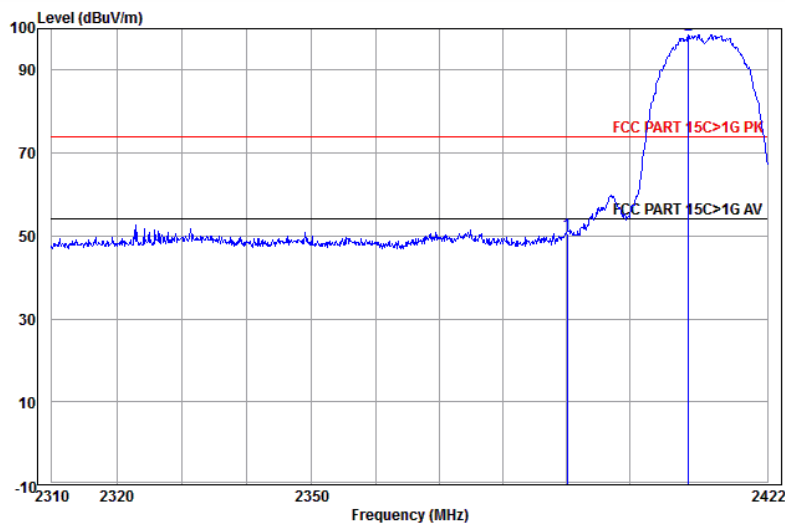


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.104	32.53	4.28	34.39	48.15	50.57	74.00	-23.43	Vertical
2 pp	2409.419	32.57	4.33	34.39	95.99	98.50	74.00	24.50	Vertical

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

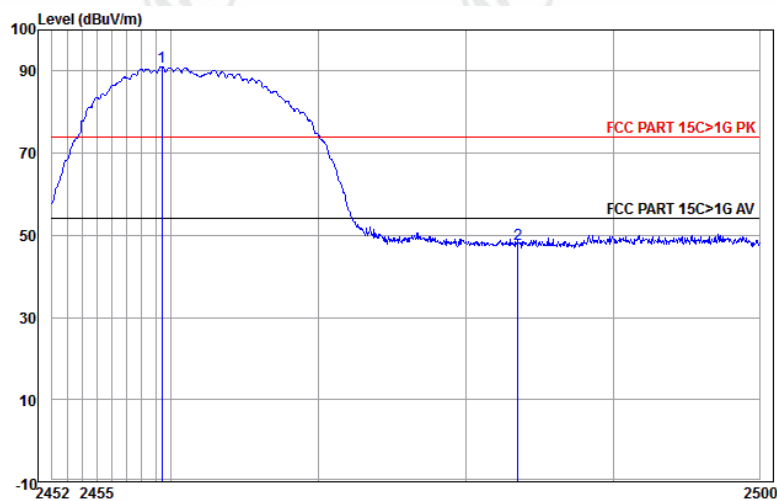


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2459.379	32.67	4.45	34.40	88.38	91.10	74.00	17.10	Horizontal
2	2483.500	32.71	4.51	34.41	44.93	47.74	74.00	-26.26	Horizontal

Worse case mode:	802.11b (11Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

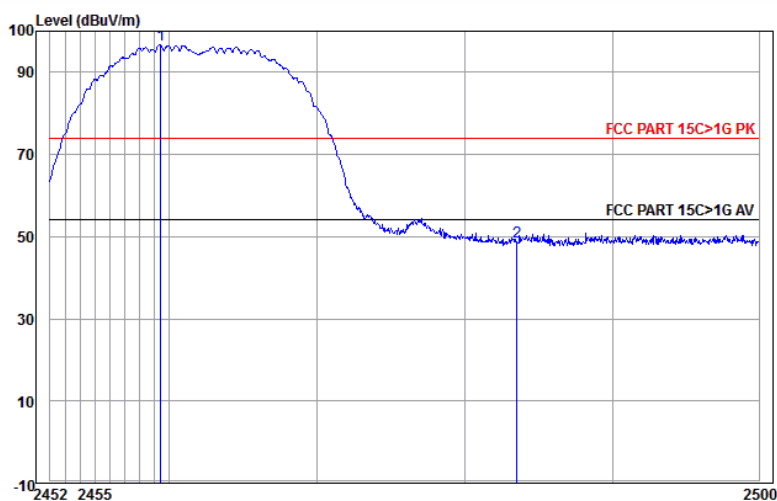


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2459.427	32.67	4.45	34.40	93.91	96.63	74.00	22.63	Vertical
2	2483.500	32.71	4.51	34.41	45.85	48.66	74.00	-25.34	Vertical

Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

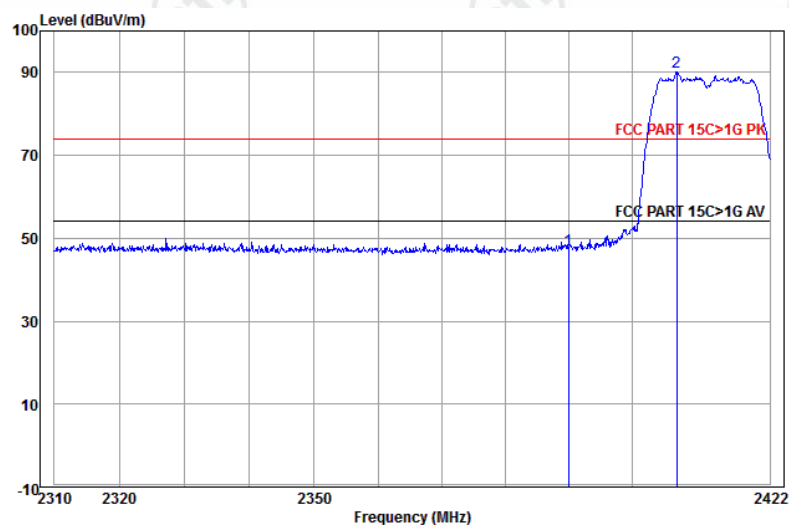

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2389.990	32.53	4.28	34.39	44.73	47.15	74.00	-26.85	Horizontal
2 pp	2407.138	32.57	4.32	34.39	87.60	90.10	74.00	16.10	Horizontal


Worse case mode:	802.11g (6Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

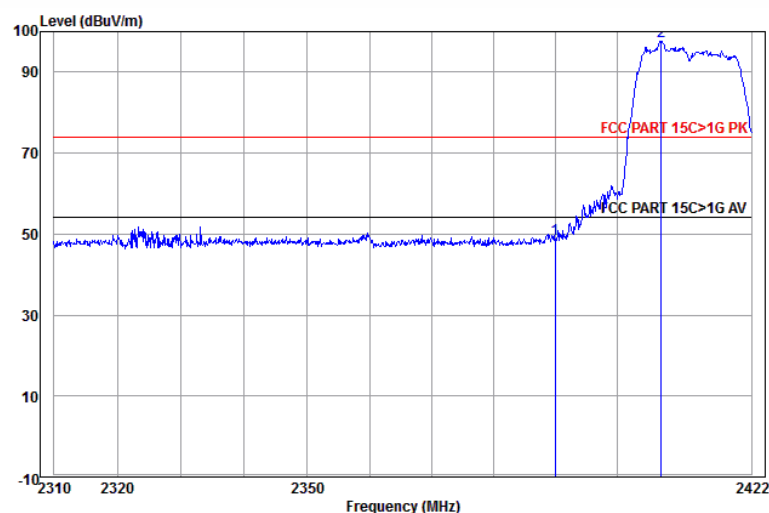

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	46.21	48.63	74.00	-25.37	Vertical
2 pp	2407.252	32.57	4.32	34.39	95.23	97.73	74.00	23.73	Vertical




Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

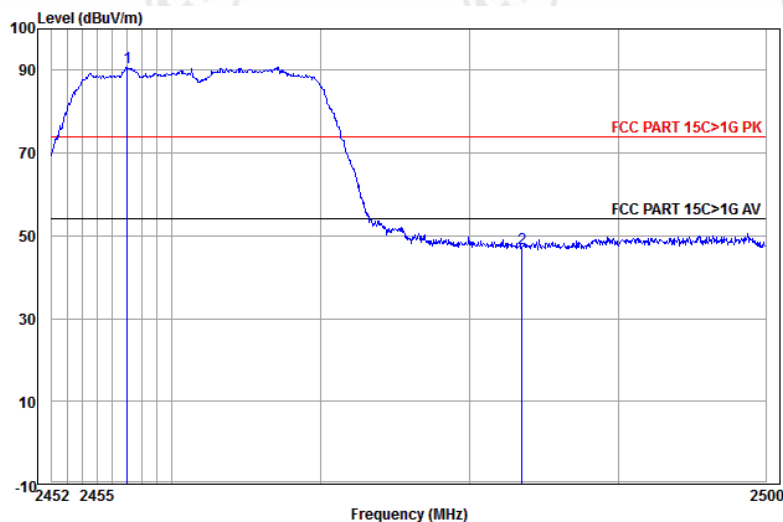


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2457.044	32.66	4.44	34.40	88.06	90.76	74.00	16.76	Horizontal
2	2483.500	32.71	4.51	34.41	44.22	47.03	74.00	-26.97	Horizontal

Worse case mode:	802.11g (6Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

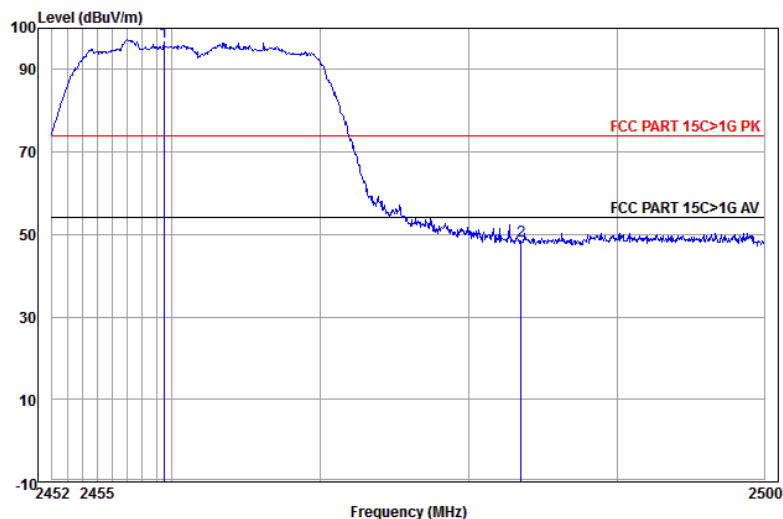


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2459.475	32.67	4.45	34.40	94.00	96.72	74.00	22.72	Vertical
2	2483.500	32.71	4.51	34.41	45.51	48.32	74.00	-25.68	Vertical

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

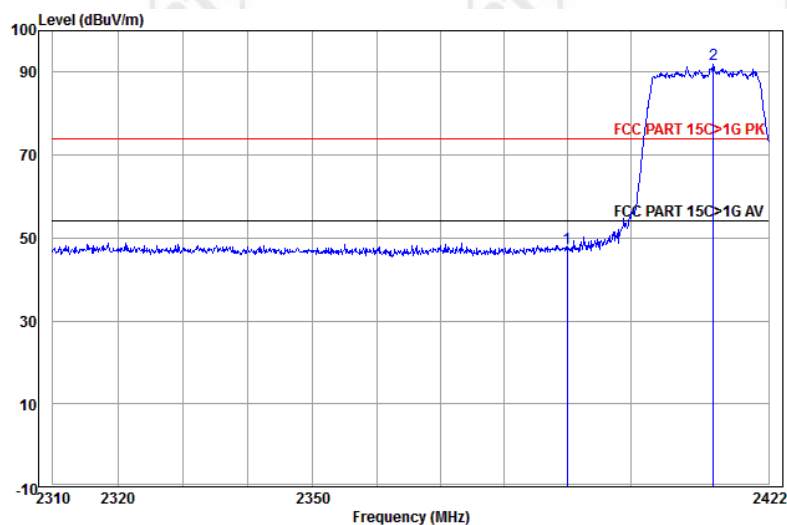


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	45.25	47.67	74.00	-26.33	Horizontal	
2 pp	2413.186	32.58	4.34	34.39	89.25	91.78	74.00	17.78	Horizontal	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

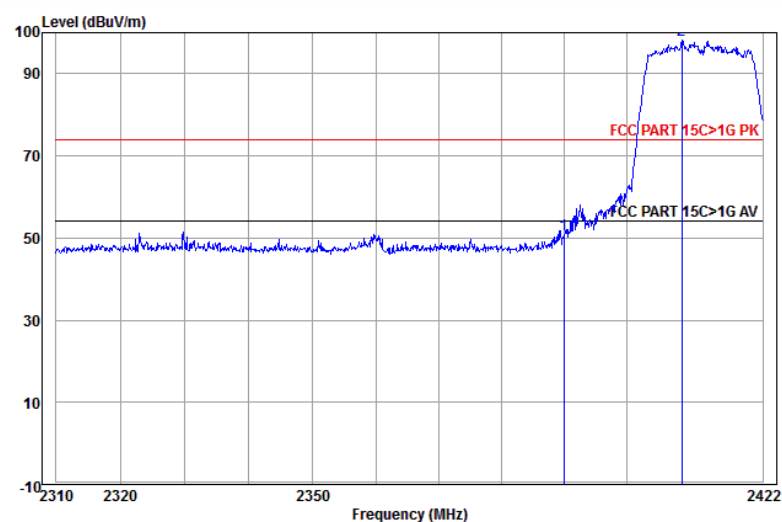


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	48.54	50.96	74.00	-23.04	Vertical	
2 pp	2408.963	32.57	4.33	34.39	95.62	98.13	74.00	24.13	Vertical	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

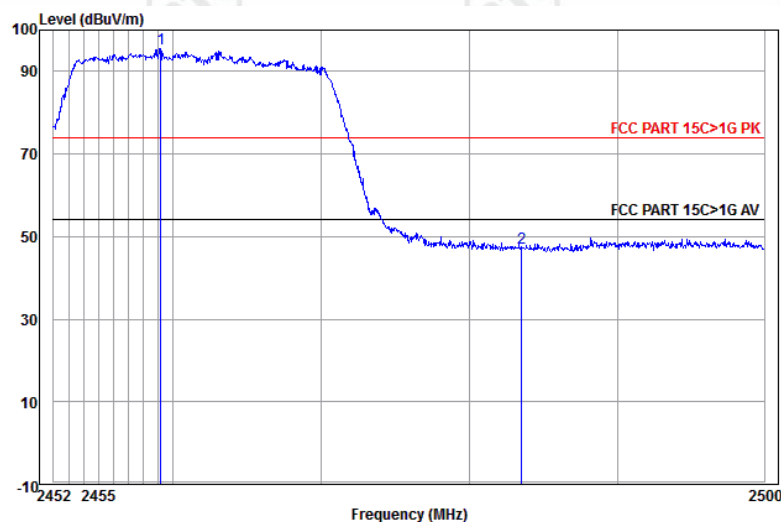


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2459.188	32.67	4.45	34.40	92.87	95.59	74.00	21.59	Horizontal	
2	2483.500	32.71	4.51	34.41	44.41	47.22	74.00	-26.78	Horizontal	

Worse case mode:	802.11n(HT20) (6.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

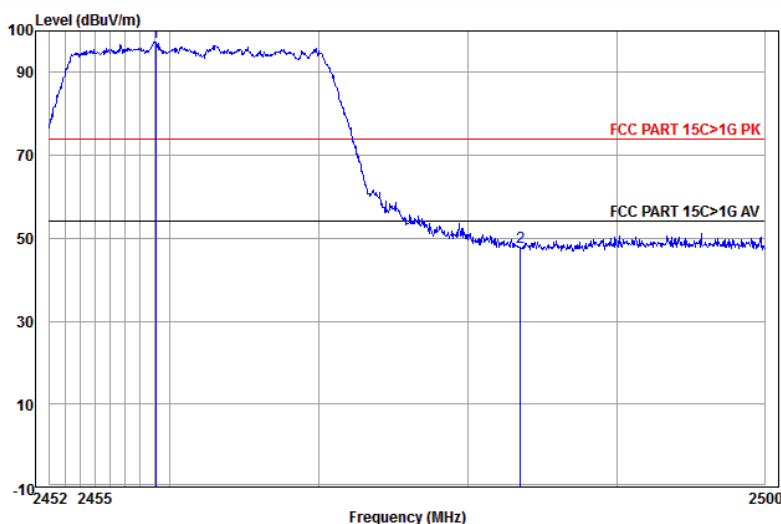


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2459.045	32.67	4.45	34.40	94.67	97.39	74.00	23.39	Vertical	
2	2483.500	32.71	4.51	34.41	44.92	47.73	74.00	-26.27	Vertical	

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

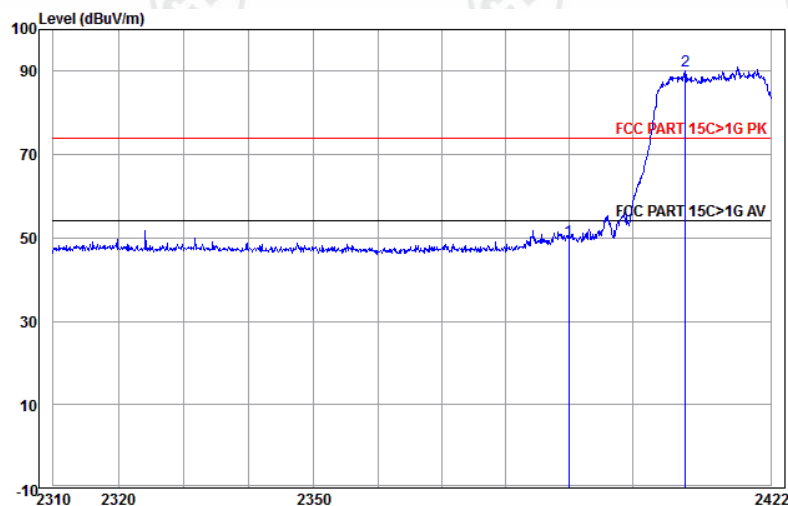

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	47.06	49.48	74.00	-24.52	Horizontal
2 pp	2408.392	32.57	4.33	34.39	87.71	90.22	74.00	16.22	Horizontal


Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

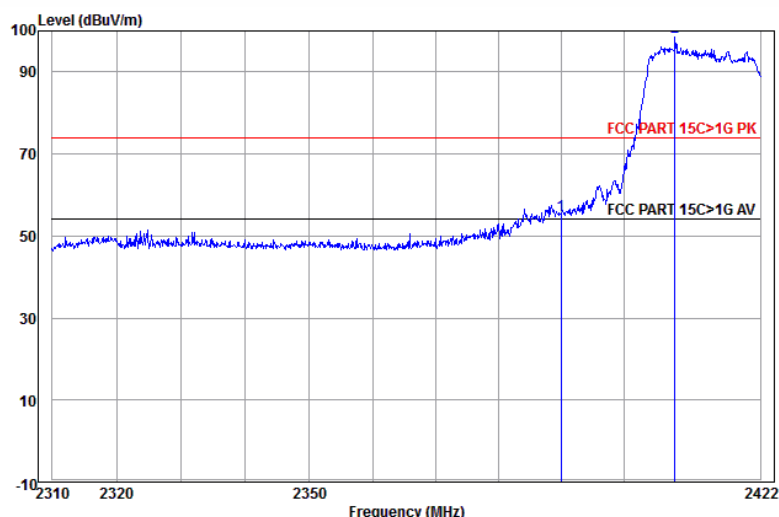

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	52.55	54.97	74.00	-19.03	Vertical
2 pp	2408.278	32.57	4.32	34.39	96.11	98.61	74.00	24.61	Vertical




Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: average

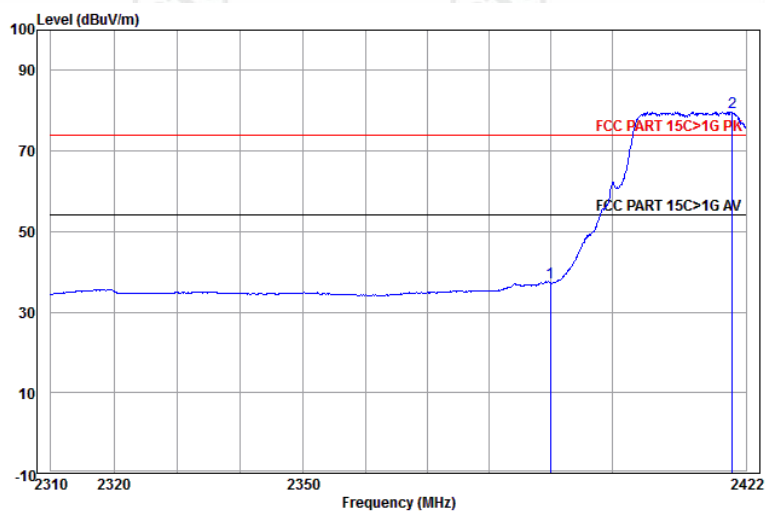


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	4.28	34.39	34.91	37.33	74.00	-36.67	Vertical	
2 pp	2419.708	32.59	4.35	34.39	77.05	79.60	54.00	25.60	Vertical	Average

Worse case mode:	802.11n(HT40) (13..5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

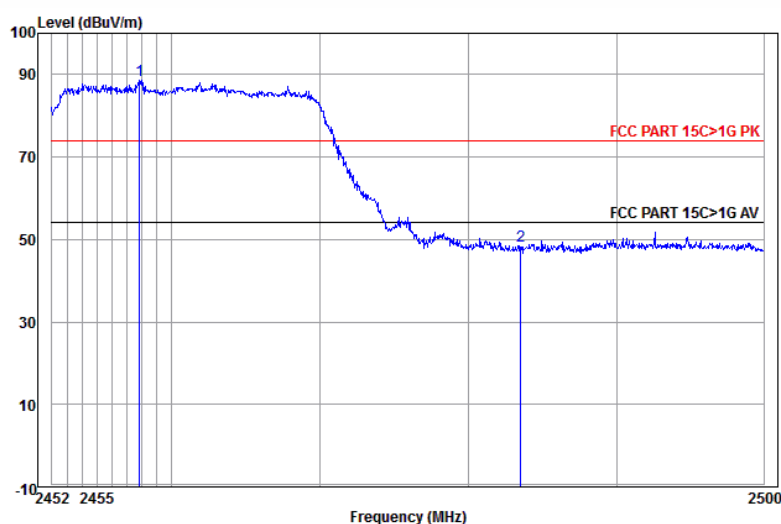


	Ant Freq	Cable Factor	Preamp Loss	Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2457.854	32.67	4.45	34.40	85.91	88.63	74.00	14.63	Horizontal	
2	2483.500	32.71	4.51	34.41	45.66	48.47	74.00	-25.53	Horizontal	

Worse case mode:	802.11n(HT40) (13.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

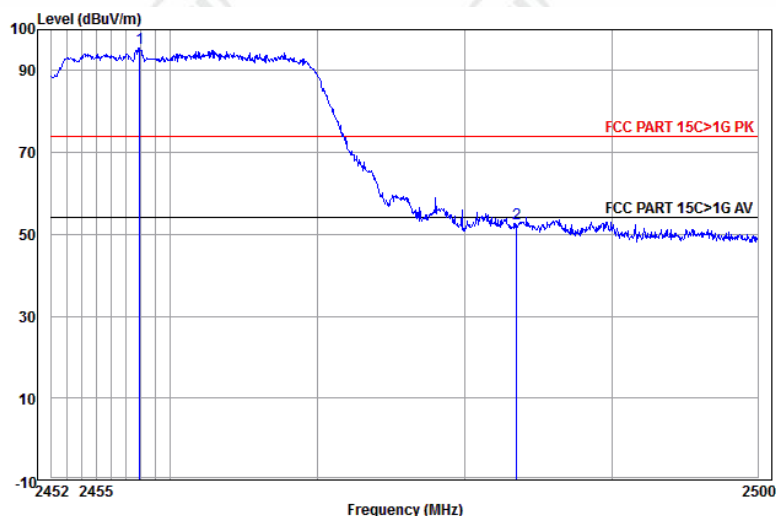

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2457.949	32.67	4.45	34.40	92.89	95.61	74.00	21.61	Vertical
2	2483.500	32.71	4.51	34.41	49.74	52.55	74.00	-21.45	Vertical

Worse case mode:	802.11n(HT40) (13.5Mbps)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: average

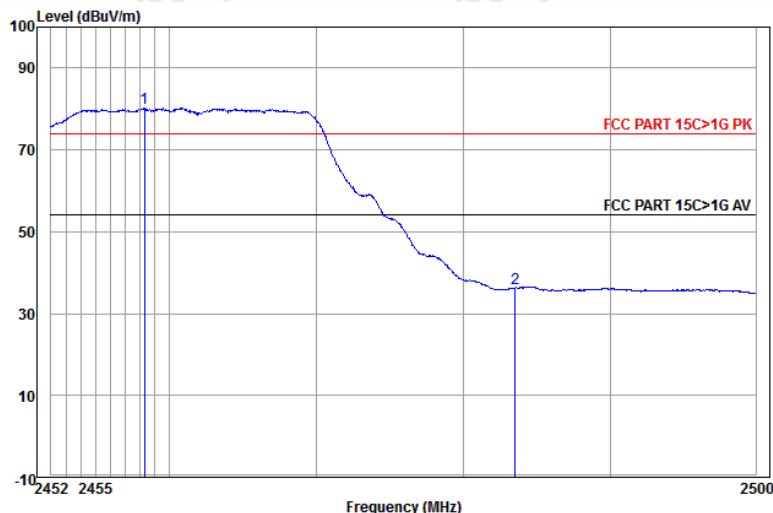

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2458.331	32.67	4.45	34.40	77.52	80.24	54.00	26.24	Vertical Average
2	2483.500	32.71	4.51	34.41	33.39	36.20	54.00	-17.80	Vertical Average

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20) ; 13.5Mbps of rate is the worst case of 802.11n(HT40), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


## Appendix I): Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:					
Below 1GHz test procedure as below:					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter)..</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

**Radiated Spurious Emissions test Data:**  
**Radiated Emission below 1GHz**

30MHz~1GHz (QP)


Test mode:	Transmitting	Horizontal
------------	--------------	------------

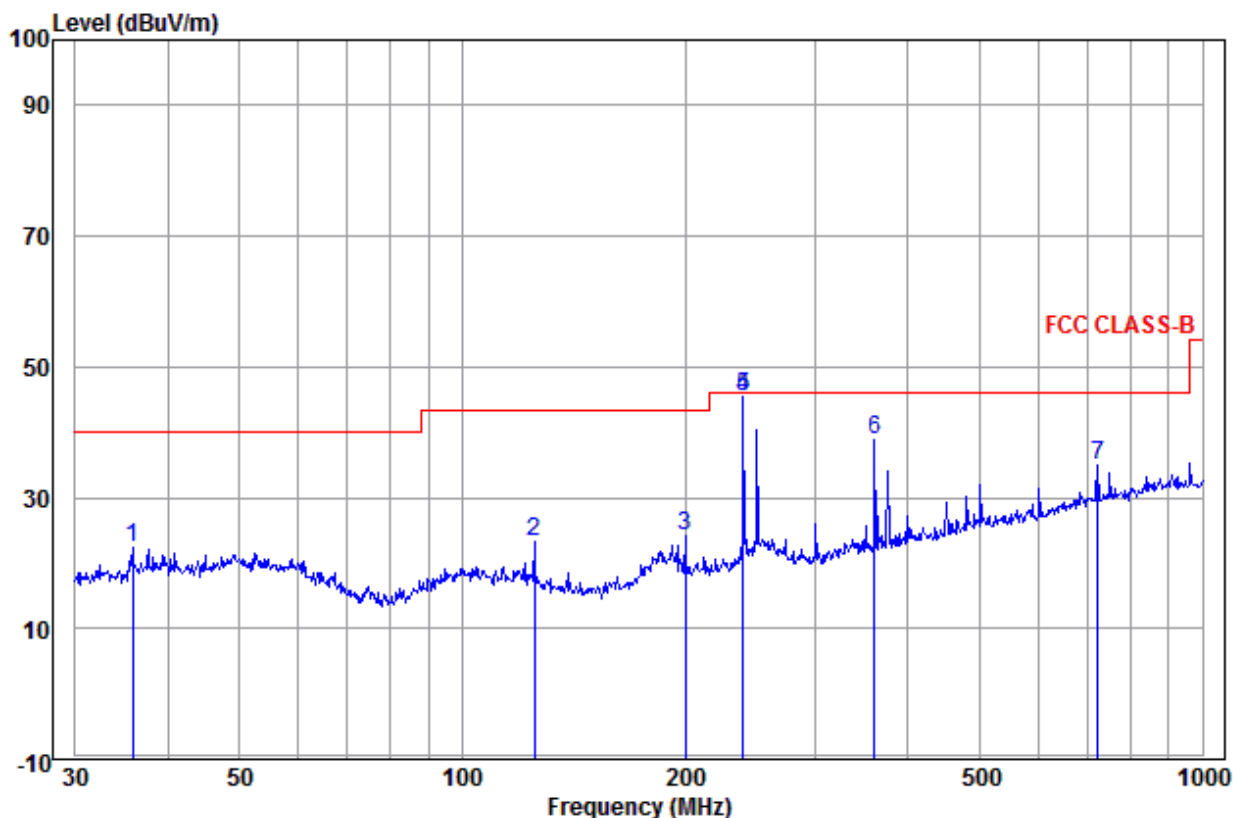

	Ant Freq	Cable Factor	Read Loss	Level	Limit	Over	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	35.875	13.56	0.78	8.16	22.50	40.00	-17.50	Horizontal
2	125.007	11.27	1.58	10.35	23.20	43.50	-20.30	Horizontal
3	199.986	11.60	2.21	10.47	24.28	43.50	-19.22	Horizontal
4 pp	239.987	12.25	2.32	30.88	45.45	46.00	-0.55	Horizontal
5 qp	239.987	12.25	2.32	30.81	45.38	46.00	-0.62	Horizontal QP
6	360.448	15.13	2.73	20.91	38.77	46.00	-7.23	Horizontal
7	721.726	20.83	3.94	10.23	35.00	46.00	-11.00	Horizontal



Test mode:	Transmitting	Vertical
------------	--------------	----------

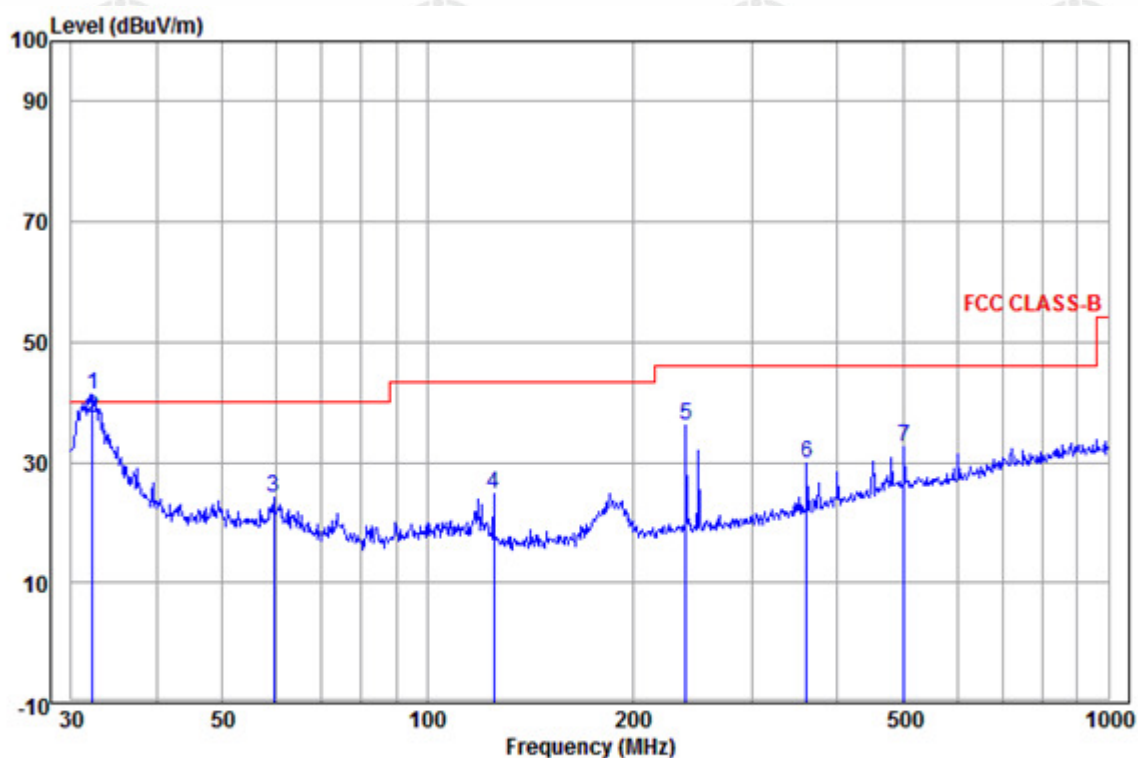

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
2 qp	32.179	12.91	1.03	23.30	37.24	40.00	-2.76	Horizontal QP
3	59.441	13.87	1.43	8.88	24.18	40.00	-15.82	Vertical
4	125.007	11.27	1.58	11.90	24.75	43.50	-18.75	Vertical
5	239.987	12.25	2.32	21.64	36.21	46.00	-9.79	Vertical
6	360.448	15.13	2.73	12.15	30.01	46.00	-15.99	Vertical
7	501.179	18.40	3.13	11.16	32.69	46.00	-13.31	Vertical

**Transmitter Emission above 1GHz**

Test mode: 802.11b(11Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1659.574	31.16	2.97	34.54	50.34	49.93	74.00	-24.07	Pass	Horizontal
3018.502	33.58	5.62	34.50	45.85	50.55	74.00	-23.45	Pass	Horizontal
3766.785	32.97	5.48	34.58	45.45	49.32	74.00	-24.68	Pass	Horizontal
4824.000	34.73	5.10	34.35	42.58	48.06	74.00	-25.94	Pass	Horizontal
7236.000	36.42	6.69	34.90	38.59	46.80	74.00	-27.20	Pass	Horizontal
9134.575	37.35	8.13	35.17	38.98	49.29	74.00	-24.71	Pass	Horizontal
1659.574	31.16	2.97	34.54	52.06	51.65	74.00	-22.35	Pass	Vertical
2995.538	33.59	5.61	34.50	46.86	51.56	74.00	-22.44	Pass	Vertical
3216.838	33.41	5.58	34.52	46.27	50.74	74.00	-23.26	Pass	Vertical
4821.757	34.73	5.11	34.35	45.76	51.25	74.00	-22.75	Pass	Vertical
6267.190	36.04	7.16	34.47	43.24	51.97	74.00	-22.03	Pass	Vertical
7282.792	36.43	6.73	34.90	44.67	52.93	74.00	-21.07	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1759.638	31.33	3.05	34.47	52.06	51.97	74.00	-22.03	Pass	Horizontal
3003.173	33.60	5.62	34.50	47.95	52.67	74.00	-21.33	Pass	Horizontal
4871.103	34.83	5.09	34.34	42.63	48.21	74.00	-25.79	Pass	Horizontal
5791.646	35.74	6.97	34.30	42.57	50.98	74.00	-23.02	Pass	Horizontal
7319.964	36.43	6.77	34.90	39.46	47.76	74.00	-26.24	Pass	Horizontal
9088.188	37.30	8.17	35.18	42.05	52.34	74.00	-21.66	Pass	Horizontal
1545.405	30.96	2.87	34.63	50.44	49.64	74.00	-24.36	Pass	Vertical
1759.638	31.33	3.05	34.47	51.70	51.61	74.00	-22.39	Pass	Vertical
2995.538	33.59	5.61	34.50	47.79	52.49	74.00	-21.51	Pass	Vertical
4871.103	34.83	5.09	34.34	40.32	45.90	74.00	-28.10	Pass	Vertical
7301.355	36.43	6.75	34.90	40.96	49.24	74.00	-24.76	Pass	Vertical
7941.185	36.49	7.31	34.90	42.72	51.62	74.00	-22.38	Pass	Vertical

Test mode: 802.11b(11Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1746.251	31.31	3.04	34.48	49.73	49.60	74.00	-24.40	Pass	Horizontal
2995.538	33.59	5.61	34.50	48.15	52.85	74.00	-21.15	Pass	Horizontal
4933.497	34.96	5.06	34.32	40.53	46.23	74.00	-27.77	Pass	Horizontal
6461.583	36.14	6.97	34.59	42.91	51.43	74.00	-22.57	Pass	Horizontal
7394.878	36.44	6.84	34.90	41.31	49.69	74.00	-24.31	Pass	Horizontal
9251.580	37.49	8.03	35.15	41.38	51.75	74.00	-22.25	Pass	Horizontal
1676.558	31.19	2.98	34.53	52.36	52.00	74.00	-22.00	Pass	Vertical
1953.211	31.63	3.20	34.33	50.94	51.44	74.00	-22.56	Pass	Vertical
2995.538	33.59	5.61	34.50	47.95	52.65	74.00	-21.35	Pass	Vertical
3283.018	33.35	5.56	34.53	47.77	52.15	74.00	-21.85	Pass	Vertical
4920.955	34.94	5.07	34.32	44.46	50.15	74.00	-23.85	Pass	Vertical
7394.878	36.44	6.84	34.90	40.24	48.62	74.00	-25.38	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2412MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1759.638	31.33	3.05	34.47	51.87	51.78	74.00	-22.22	Pass	Horizontal
3003.173	33.60	5.62	34.50	46.68	51.40	74.00	-22.60	Pass	Horizontal
4821.757	34.73	5.11	34.35	39.89	45.38	74.00	-28.62	Pass	Horizontal
6678.987	36.25	6.76	34.72	42.92	51.21	74.00	-22.79	Pass	Horizontal
7227.389	36.42	6.68	34.90	36.90	45.10	74.00	-28.90	Pass	Horizontal
9275.160	37.51	8.01	35.14	40.21	50.59	74.00	-23.41	Pass	Horizontal
1659.574	31.16	2.97	34.54	49.30	48.89	74.00	-25.11	Pass	Vertical
2995.538	33.59	5.61	34.50	47.10	51.80	74.00	-22.20	Pass	Vertical
4834.046	34.75	5.10	34.35	40.96	46.46	74.00	-27.54	Pass	Vertical
5880.782	35.81	7.17	34.30	42.97	51.65	74.00	-22.35	Pass	Vertical
7338.621	36.44	6.78	34.90	40.39	48.71	74.00	-25.29	Pass	Vertical
9734.779	38.02	7.62	35.05	40.42	51.01	74.00	-22.99	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2437MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1655.354	31.15	2.97	34.55	51.65	51.22	74.00	-22.78	Pass	Horizontal
1746.251	31.31	3.04	34.48	50.41	50.28	74.00	-23.72	Pass	Horizontal
2995.538	33.59	5.61	34.50	47.46	52.16	74.00	-21.84	Pass	Horizontal
4871.103	34.83	5.09	34.34	41.85	47.43	74.00	-26.57	Pass	Horizontal
7319.964	36.43	6.77	34.90	41.47	49.77	74.00	-24.23	Pass	Horizontal
8484.545	36.85	7.80	35.05	42.43	52.03	74.00	-21.97	Pass	Horizontal
1655.354	31.15	2.97	34.55	52.39	51.96	74.00	-22.04	Pass	Vertical
1759.638	31.33	3.05	34.47	52.39	52.30	74.00	-21.70	Pass	Vertical
2995.538	33.59	5.61	34.50	46.62	51.32	74.00	-22.68	Pass	Vertical
4883.519	34.86	5.08	34.33	40.95	46.56	74.00	-27.44	Pass	Vertical
7319.964	36.43	6.77	34.90	40.50	48.80	74.00	-25.20	Pass	Vertical
9490.104	37.75	7.83	35.10	41.04	51.52	74.00	-22.48	Pass	Vertical

Test mode: 802.11g(6Mbps)			Test Frequency: 2462MHz			Remark: Peak			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1659.574	31.16	2.97	34.54	52.90	52.49	74.00	-21.51	Pass	Horizontal
1764.123	31.34	3.05	34.46	52.33	52.26	74.00	-21.74	Pass	Horizontal
2995.538	33.59	5.61	34.50	47.17	51.87	74.00	-22.13	Pass	Horizontal
4920.955	34.94	5.07	34.32	41.79	47.48	74.00	-26.52	Pass	Horizontal
7394.878	36.44	6.84	34.90	38.76	47.14	74.00	-26.86	Pass	Horizontal
8484.545	36.85	7.80	35.05	41.32	50.92	74.00	-23.08	Pass	Horizontal
1764.123	31.34	3.05	34.46	52.06	51.99	74.00	-22.01	Pass	Vertical
2995.538	33.59	5.61	34.50	46.94	51.64	74.00	-22.36	Pass	Vertical
3283.018	33.35	5.56	34.53	47.31	51.69	74.00	-22.31	Pass	Vertical
4920.955	34.94	5.07	34.32	43.06	48.75	74.00	-25.25	Pass	Vertical
7394.878	36.44	6.84	34.90	39.25	47.63	74.00	-26.37	Pass	Vertical
10560.940	38.87	7.47	34.48	38.64	50.50	74.00	-23.50	Pass	Vertical



Test mode: 802.11n(HT20)(6.5Mbps)				Test Frequency: 2412MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1746.251	31.31	3.04	34.48	52.42	52.29	74.00	-21.71	Pass	Horizontal
3003.173	33.60	5.62	34.50	47.28	52.00	74.00	-22.00	Pass	Horizontal
4213.211	33.34	5.35	34.53	43.91	48.07	74.00	-25.93	Pass	Horizontal
4821.757	34.73	5.11	34.35	40.81	46.30	74.00	-27.70	Pass	Horizontal
7245.810	36.43	6.70	34.90	38.59	46.82	74.00	-27.18	Pass	Horizontal
9660.722	37.94	7.69	35.07	38.86	49.42	74.00	-24.58	Pass	Horizontal
1764.123	31.34	3.05	34.46	50.97	50.90	74.00	-23.10	Pass	Vertical
2995.538	33.59	5.61	34.50	47.20	51.90	74.00	-22.10	Pass	Vertical
3216.838	33.41	5.58	34.52	45.89	50.36	74.00	-23.64	Pass	Vertical
4821.757	34.73	5.11	34.35	40.92	46.41	74.00	-27.59	Pass	Vertical
7245.810	36.43	6.70	34.90	40.64	48.87	74.00	-25.13	Pass	Vertical
8334.700	36.74	7.67	35.00	41.82	51.23	74.00	-22.77	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)				Test Frequency: 2437MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1541.476	30.95	2.87	34.64	52.71	51.89	74.00	-22.11	Pass	Horizontal
1663.803	31.17	2.97	34.54	51.77	51.37	74.00	-22.63	Pass	Horizontal
1746.251	31.31	3.04	34.48	51.66	51.53	74.00	-22.47	Pass	Horizontal
4883.519	34.86	5.08	34.33	42.08	47.69	74.00	-26.31	Pass	Horizontal
7319.964	36.43	6.77	34.90	39.02	47.32	74.00	-26.68	Pass	Horizontal
9587.228	37.86	7.75	35.08	40.74	51.27	74.00	-22.73	Pass	Horizontal
1659.574	31.16	2.97	34.54	49.48	49.07	74.00	-24.93	Pass	Vertical
1764.123	31.34	3.05	34.46	47.75	47.68	74.00	-26.32	Pass	Vertical
2995.538	33.59	5.61	34.50	47.43	52.13	74.00	-21.87	Pass	Vertical
3249.760	33.38	5.57	34.53	47.15	51.57	74.00	-22.43	Pass	Vertical
4871.103	34.83	5.09	34.34	42.19	47.77	74.00	-26.23	Pass	Vertical
7319.964	36.43	6.77	34.90	36.42	44.72	74.00	-29.28	Pass	Vertical

Test mode: 802.11n(HT20)(6.5Mbps)				Test Frequency: 2462MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1541.476	30.95	2.87	34.64	50.79	49.97	74.00	-24.03	Pass	Horizontal
1746.251	31.31	3.04	34.48	51.12	50.99	74.00	-23.01	Pass	Horizontal
3003.173	33.60	5.62	34.50	47.89	52.61	74.00	-21.39	Pass	Horizontal
4920.955	34.94	5.07	34.32	41.27	46.96	74.00	-27.04	Pass	Horizontal
7099.747	36.41	6.56	34.90	44.00	52.07	74.00	-21.93	Pass	Horizontal
7394.878	36.44	6.84	34.90	42.14	50.52	74.00	-23.48	Pass	Horizontal
1668.044	31.18	2.98	34.54	47.88	47.50	74.00	-26.50	Pass	Vertical
2995.538	33.59	5.61	34.50	47.22	51.92	74.00	-22.08	Pass	Vertical
3283.018	33.35	5.56	34.53	47.74	52.12	74.00	-21.88	Pass	Vertical
4933.497	34.96	5.06	34.32	43.60	49.30	74.00	-24.70	Pass	Vertical
7394.878	36.44	6.84	34.90	39.87	48.25	74.00	-25.75	Pass	Vertical
9298.801	37.54	7.99	35.14	40.29	50.68	74.00	-23.32	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2422MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1597.401	31.05	2.92	34.59	47.89	47.27	74.00	-26.73	Pass	Horizontal
3003.173	33.60	5.62	34.50	47.19	51.91	74.00	-22.09	Pass	Horizontal
4834.046	34.75	5.10	34.35	41.06	46.56	74.00	-27.44	Pass	Horizontal
5806.408	35.76	7.00	34.30	42.31	50.77	74.00	-23.23	Pass	Horizontal
7245.810	36.43	6.70	34.90	40.38	48.61	74.00	-25.39	Pass	Horizontal
8250.266	36.68	7.59	34.98	42.96	52.25	74.00	-21.75	Pass	Horizontal
1668.044	31.18	2.98	34.54	47.50	47.12	74.00	-26.88	Pass	Vertical
2995.538	33.59	5.61	34.50	47.10	51.80	74.00	-22.20	Pass	Vertical
3233.257	33.39	5.57	34.53	46.12	50.55	74.00	-23.45	Pass	Vertical
4858.719	34.80	5.09	34.34	41.06	46.61	74.00	-27.39	Pass	Vertical
7264.278	36.43	6.72	34.90	41.31	49.56	74.00	-24.44	Pass	Vertical
9251.580	37.49	8.03	35.15	41.02	51.39	74.00	-22.61	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2437MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1663.803	31.17	2.97	34.54	51.85	51.45	74.00	-22.55	Pass	Horizontal
2995.538	33.59	5.61	34.50	48.18	52.88	74.00	-21.12	Pass	Horizontal
4858.719	34.80	5.09	34.34	41.00	46.55	74.00	-27.45	Pass	Horizontal
6283.164	36.05	7.14	34.48	42.59	51.30	74.00	-22.70	Pass	Horizontal
7451.566	36.45	6.89	34.90	41.56	50.00	74.00	-24.00	Pass	Horizontal
9228.060	37.46	8.05	35.15	41.90	52.26	74.00	-21.74	Pass	Horizontal
1028.397	29.78	2.30	35.16	47.98	44.90	74.00	-29.10	Pass	Vertical
1668.044	31.18	2.98	34.54	47.07	46.69	74.00	-27.31	Pass	Vertical
4874.000	34.84	5.09	34.33	41.69	47.29	74.00	-26.71	Pass	Vertical
5703.861	35.68	6.77	34.30	42.55	50.70	74.00	-23.30	Pass	Vertical
7311.000	36.43	6.76	34.90	38.68	46.97	74.00	-27.03	Pass	Vertical
9748.000	38.03	7.61	35.05	36.79	47.38	74.00	-26.62	Pass	Vertical

Test mode: 802.11n(HT40)(13.5Mbps)				Test Frequency: 2452MHz			Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1238.405	30.32	2.56	34.92	48.07	46.03	74.00	-27.97	Pass	Horizontal
1672.296	31.18	2.98	34.53	49.37	49.00	74.00	-25.00	Pass	Horizontal
4904.000	34.90	5.07	34.33	40.54	46.18	74.00	-27.82	Pass	Horizontal
6063.190	35.93	7.36	34.34	40.26	49.21	74.00	-24.79	Pass	Horizontal
7356.000	36.44	6.80	34.90	36.88	45.22	74.00	-28.78	Pass	Horizontal
9808.000	38.10	7.56	35.04	37.01	47.63	74.00	-26.37	Pass	Horizontal
1110.008	30.00	2.41	35.06	48.86	46.21	74.00	-27.79	Pass	Vertical
1597.401	31.05	2.92	34.59	47.05	46.43	74.00	-27.57	Pass	Vertical
4904.000	34.90	5.07	34.33	41.45	47.09	74.00	-26.91	Pass	Vertical
5762.235	35.72	6.90	34.30	42.46	50.78	74.00	-23.22	Pass	Vertical
7356.000	36.44	6.80	34.90	37.27	45.61	74.00	-28.39	Pass	Vertical
9808.000	38.10	7.56	35.04	35.91	46.53	74.00	-27.47	Pass	Vertical

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and data rate, find the 11Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40), and then Only the worst case is recorded in the report.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

4) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.



## PHOTOGRAPHS OF TEST SETUP

Test model No.: RP80-WUS

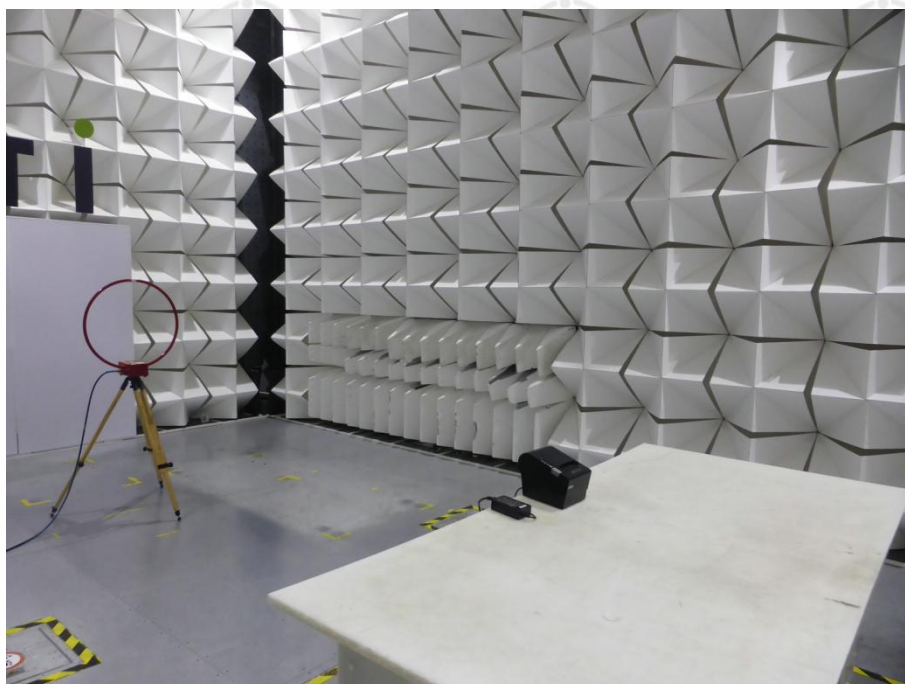

**Radiated spurious emission Test Setup-1(9kHz~30MHz)**




**Radiated spurious emission Test Setup-2(30- 1000MHz)**





**Radiated spurious emission Test Setup-3(Above 1GHz)**

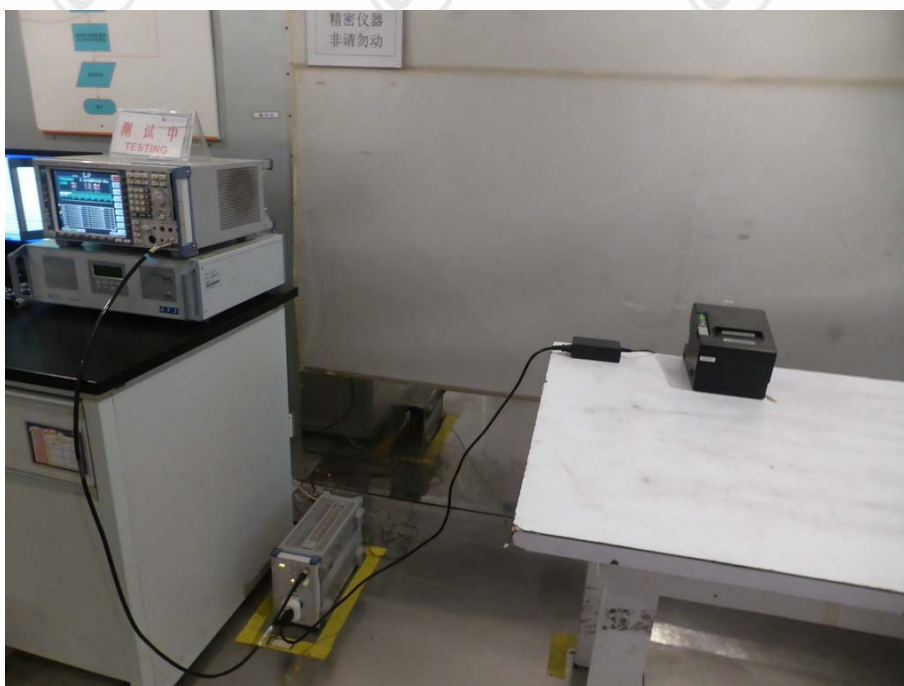

**Conducted Emissions Test Setup**

## PHOTOGRAPHS OF EUT Constructional Details

Test model No.: RP80-WUS



View of Product-1



View of Product-2



View of Product-3



View of Product-4



View of Product-5




View of Product-6





View of Product-7

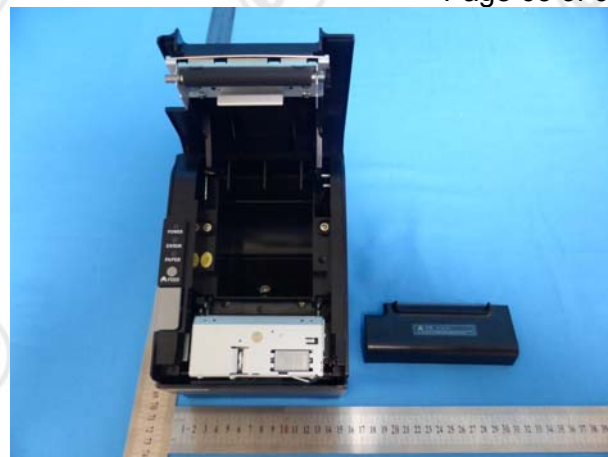


View of Product-8



View of Product-9




View of Product-10

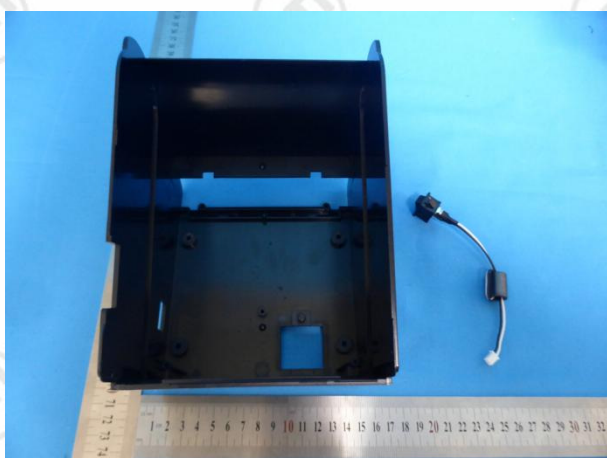

View of Product-11




View of Product-12

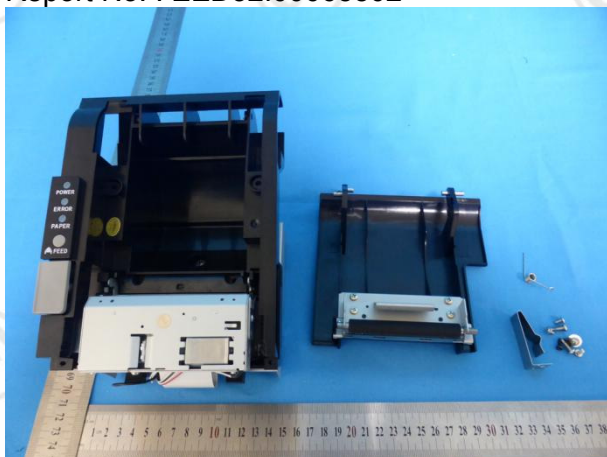


View of Product-13




View of Product-14

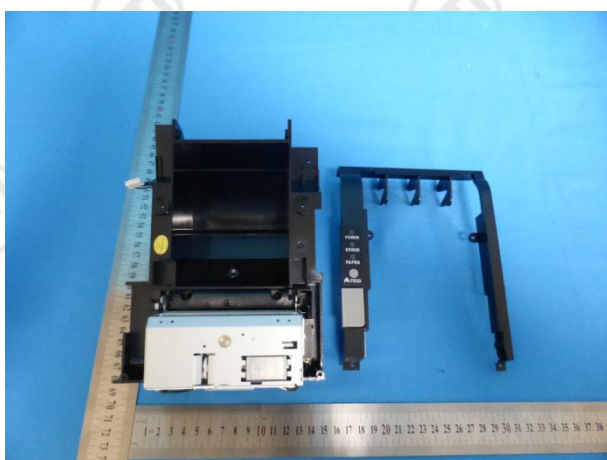

View of Product-15

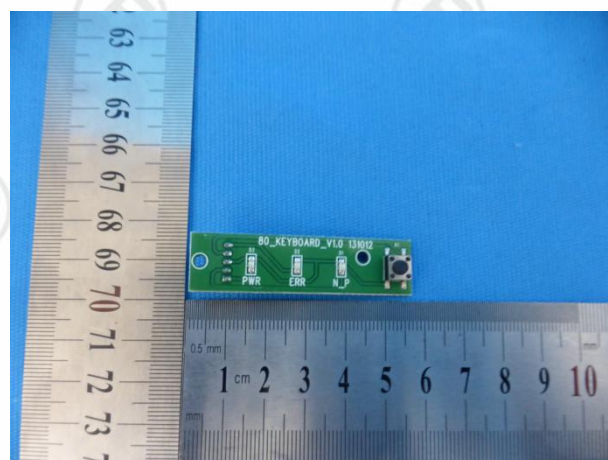

View of Product-16

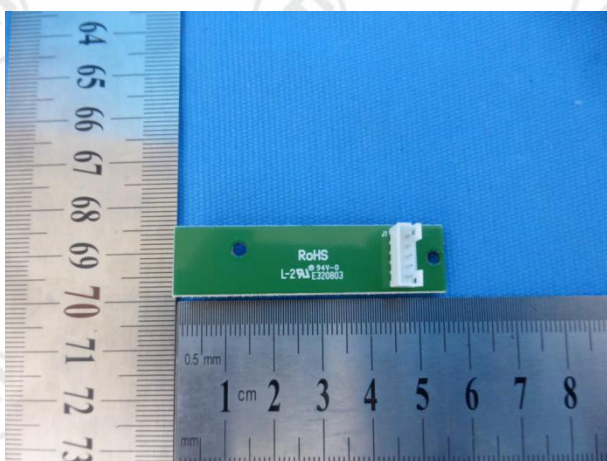

View of Product-17




View of Product-18







View of Product-19

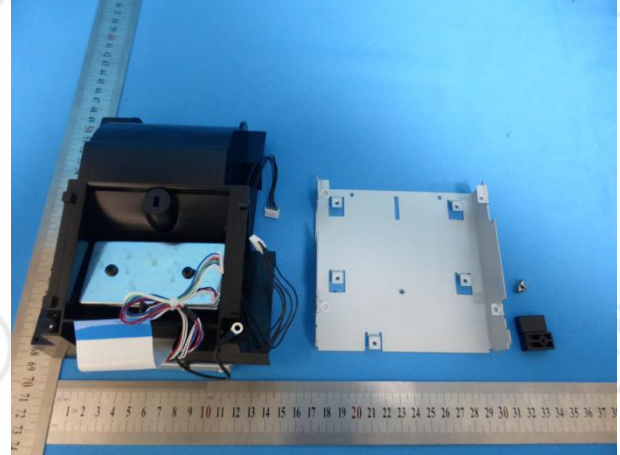


View of Product-20

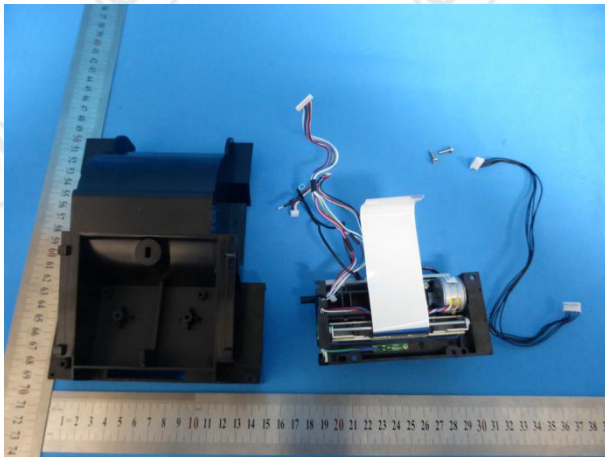


View of Product-21

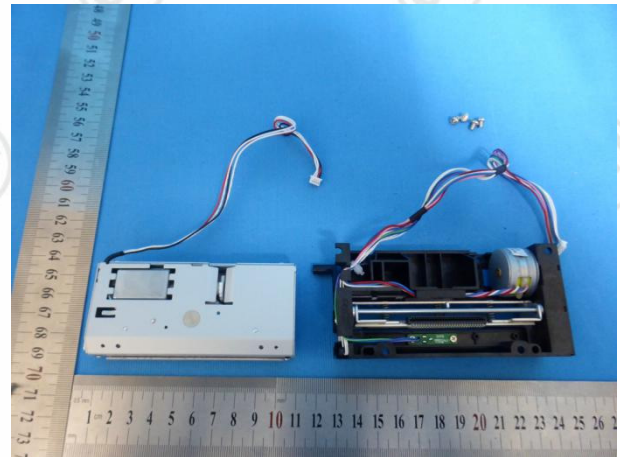

View of Product-22

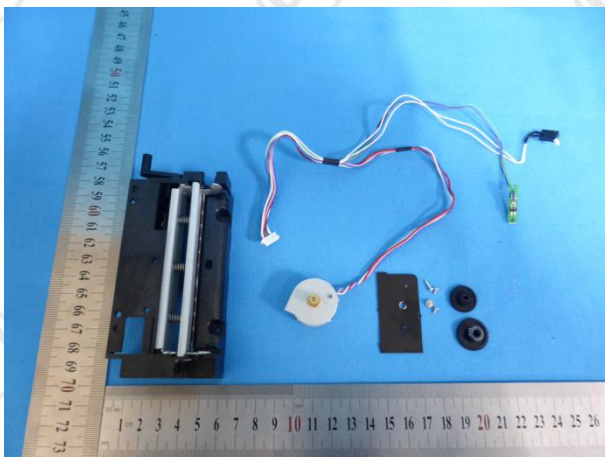


View of Product-23

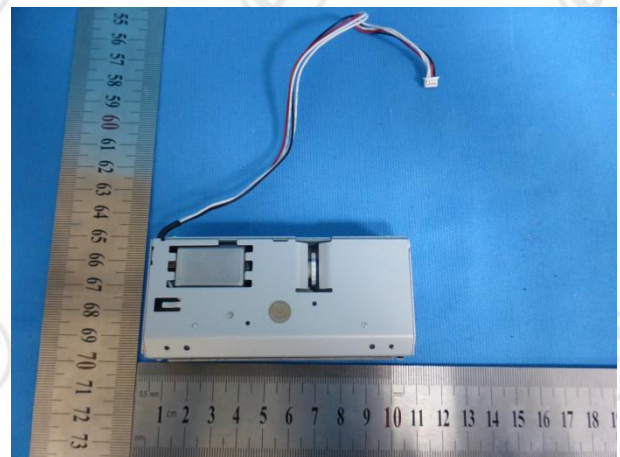


View of Product-24




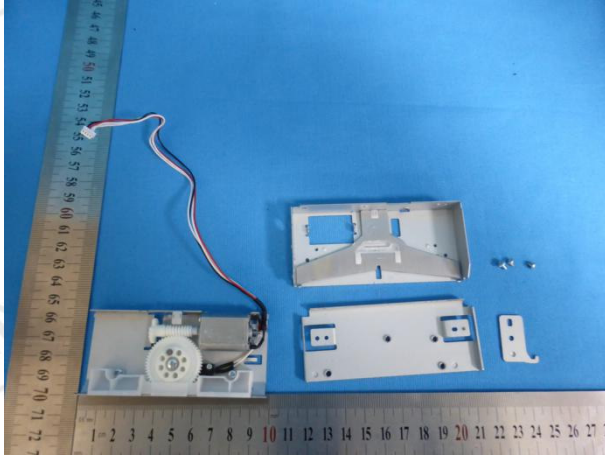


View of Product-25

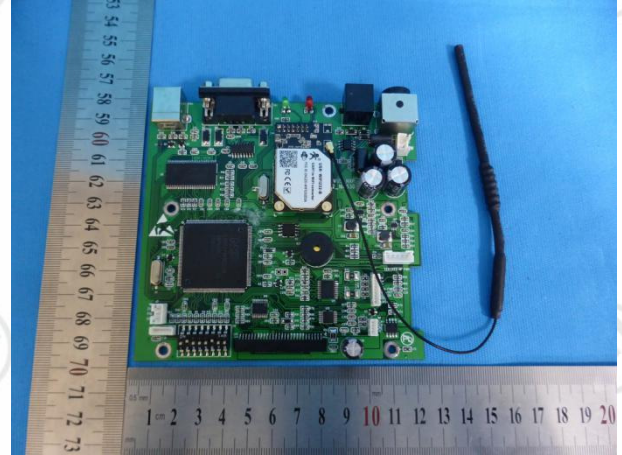


View of Product-26

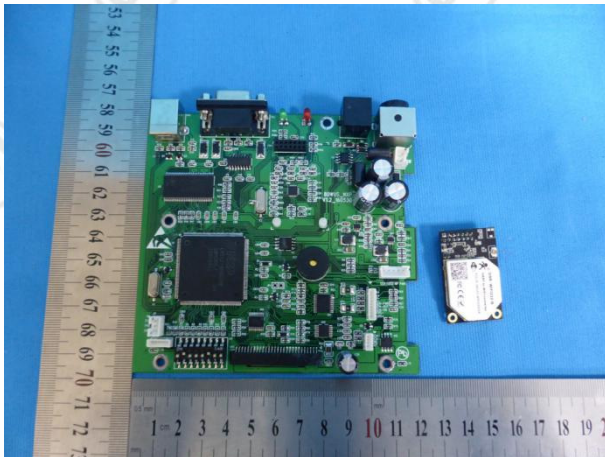


View of Product-27

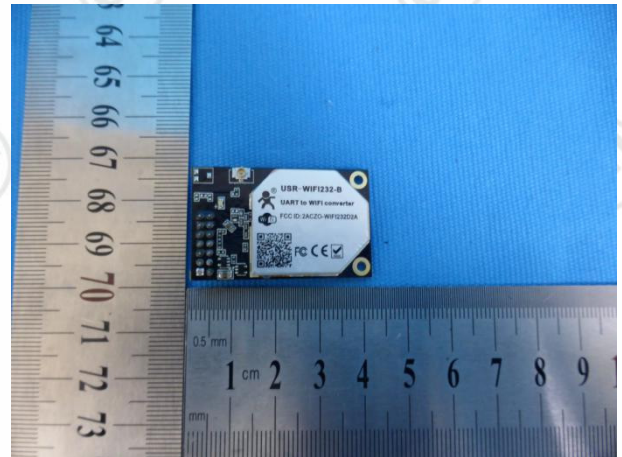

View of Product-28

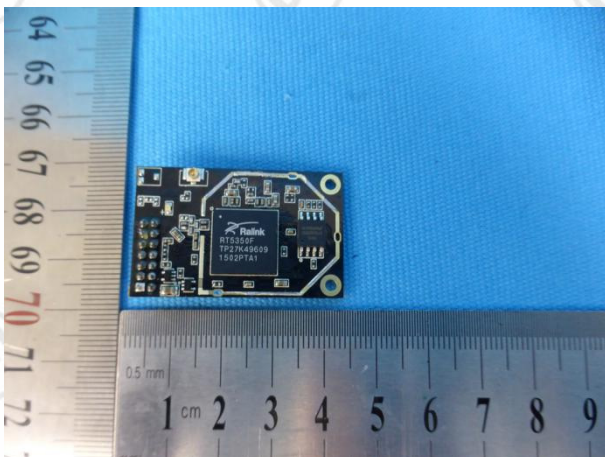

View of Product-29

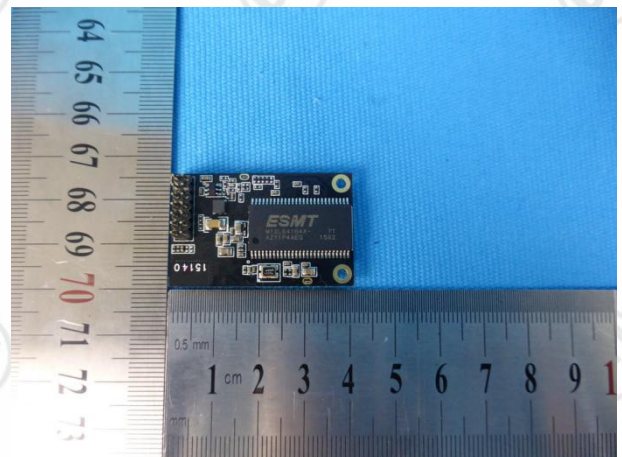


View of Product-30





View of Product-31

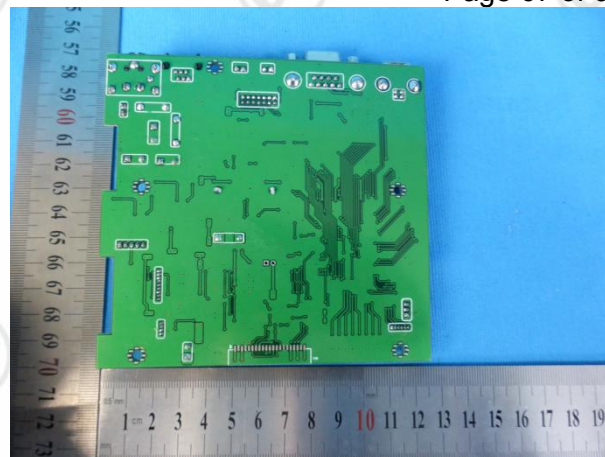

View of Product-32



View of Product-33



View of Product-34




View of Product-35




View of Product-36




View of Product-37

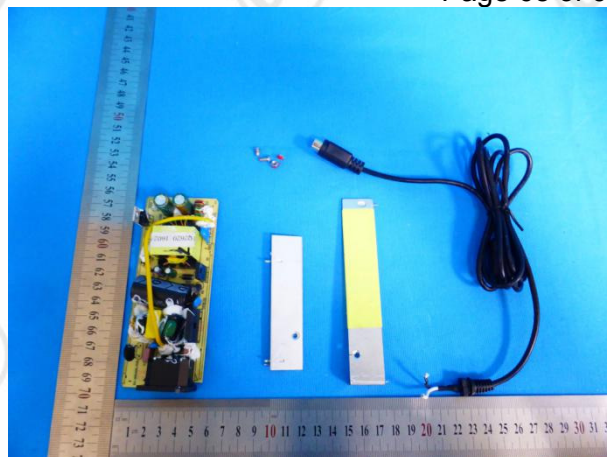

View of Product-38

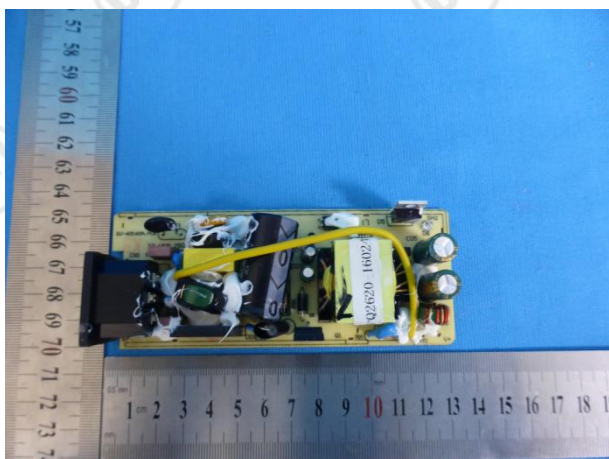

View of Product-39

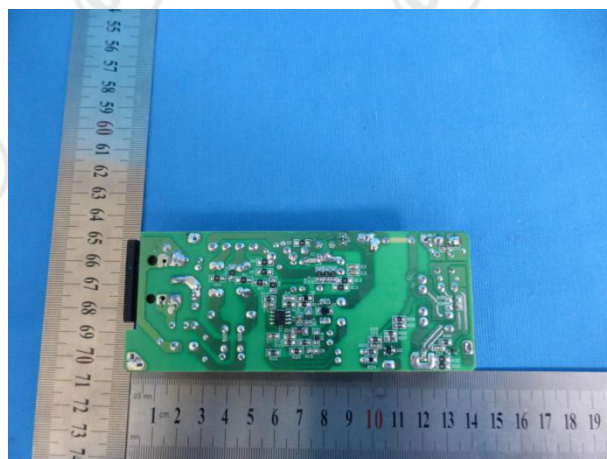

View of Product-40

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.