

FCC Test Report

FCC ID	:	NKR-DHSMW97
Equipment	:	802.11 abgn/ac 2x2 module with BT
Model No.	:	DHSM-W97
Brand Name	:	WNC
Applicant	:	Wistron NeWeb Corp.
Address	:	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.
Standard	:	47 CFR FCC Part 15.247
Received Date	:	Dec. 17, 2015
Tested Date	:	Jan. 19 ~ Jan. 29, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	Unwanted Emissions into Restricted Frequency Bands	14
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	32
3.4	Conducted Output Power	37
3.5	Number of Hopping Frequency	
3.6	20dB and Occupied Bandwidth	41
3.7	Channel Separation	13
	Onamier Deparation	
3.8	Number of Dwell Time	



Release Record

Report No.	Version	Description	Issued Date
FR5D1702AD	Rev. 01	Initial issue	Feb. 05, 2016



FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 1.441MHz 30.43 (Margin -15.57dB) - AV	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 165.75MHz	Pass
15.209	Hadialed Emissions	41.11 (Margin -2.39dB) - PK	r ass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 10.84	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Summary of Test Results



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate			
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps			
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps			
Note 1. BE output no	wer specifies that Ma	vimum Peak Conduct	ed Output Power				

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: Bluetooth BR uses a GFSK.

Note 3: Bluetooth EDR uses a combination of π /4-DQPSK and 8DPSK.

1.1.2 Antenna Details

Ant. No.	Model	Туре	Connector	Gain (dBi)	Cable length (mm)
1	95.EEW15.GLQ	PIFA	UFL	-0.88	1250
2	E40	PIFA	UFL	0.01	1050
3	E48	PIFA	UFL	-0.39	1200
4	E55	PIFA	UFL	-1.19	1500

Note: Ant. No. 2 with highest gain and Ant. No. 4 with longest cable were for final test.

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type

3.3Vdc from host

1.1.4 Accessories

N/A



1.1.5 Channel List

Frequency band (MHz)					2400~2	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

1.1.6 Test Tool and Duty Cycle

Test Tool Dut Wlan BT Labtool, V 2.0.0.68

1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)				
modulation mode	2402	2441	2480		
GFSK/1Mbps	8	8	8		
л /4 QDPSK	8	8	8		
8DPSK/3Mbps	8	8	8		




1.2 Local Support Equipment List

	Support Equipment List						
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)		
1	Notebook	DELL	E6500	DoC	Mini USB, 1m shielded.		

Note: Notebook & Mini USB cable are supplied by applicant.

1.3 Test Setup Chart

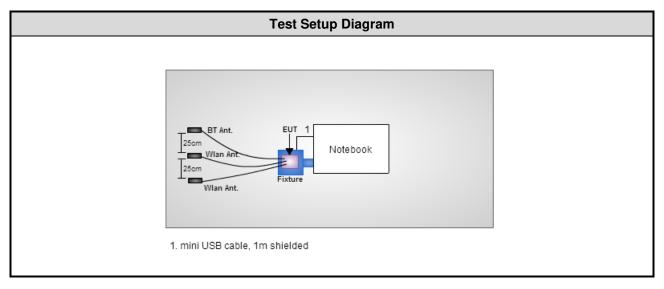



1.4 The Equipment List

Test Item	Conducted Emission	Conducted Emission						
Test Site	Conduction room 1 / (CO01-WS)							
Tested Date Jan. 19, 2016								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016			
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016			
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016			
Measurement Software AUDIX e3 6.120210k NA NA								
Note: Calibration Int	erval of instruments lis	ted above is one year.		•	•			

Test Item Radiated Emission below 1GHz **Test Site** 966 chamber 2 / (03CH02-WS) **Tested Date** Jan. 22, 2016 Instrument Manufacturer Model No. Serial No. **Calibration Date Calibration Until** R&S ESR3 101657 Jan. 12, 2016 Jan. 11, 2017 Receiver Bilog Antenna SCHWARZBECK VULB9168 VULB9168-523 Nov. 09, 2015 Nov. 08, 2016 KOAX KABEL 101354-BW 101354-BW Loop Antenna Cable Dec. 10, 2015 Dec. 09, 2016 **RF** Cable HUBER+SUHNER SUCOFLEX104 MY16015/4 Dec. 10, 2015 Dec. 09, 2016 LF cable 3M Woken CFD400NL-LW CFD400NL-003 Dec. 10, 2015 Dec. 09, 2016 Measurement AUDIX e3 6.120210g NA NA Software Note: Calibration Interval of instruments listed above is one year.

66 chamber 2 / (03Cl							
966 chamber 2 / (03CH02-WS)							
Jan. 21 ~ Jan. 22, 2016							
Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
R&S	FSV40	101499	Dec. 17, 2015	Dec. 16, 2016			
SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1095	Oct. 07, 2015	Oct. 06, 2016			
SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016			
Burgeon	BPA-530	100218	Nov. 03, 2015	Nov. 02, 2016			
Agilent	83017A	MY39501309	Sep. 22, 2015	Sep. 21, 2016			
EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016			
HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 10, 2015	Dec. 09, 2016			
HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 10, 2015	Dec. 09, 2016			
AUDIX	e3	6.120210g	NA	NA			
ŀ	R&S SCHWARZBECK SCHWARZBECK Burgeon Agilent EMC HUBER+SUHNER HUBER+SUHNER AUDIX	R&SFSV40SCHWARZBECKBBHA 9120 DSCHWARZBECKBBHA 9170BurgeonBPA-530Agilent83017AEMCEMC184045BHUBER+SUHNERSUCOFLEX104HUBER+SUHNERSUCOFLEX104	R&SFSV40101499SCHWARZBECKBBHA 9120 DBBHA 9120 D 1095SCHWARZBECKBBHA 9170BBHA 9170517BurgeonBPA-530100218Agilent83017AMY39501309EMCEMC184045B980192HUBER+SUHNERSUCOFLEX104MY16140/4HUBER+SUHNERSUCOFLEX104MY16018/4AUDIXe36.120210g	R&S FSV40 101499 Dec. 17, 2015 SCHWARZBECK BBHA 9120 D BBHA 9120 D 1095 Oct. 07, 2015 SCHWARZBECK BBHA 9170 BBHA 9170517 Nov. 04, 2015 Burgeon BPA-530 100218 Nov. 03, 2015 Agilent 83017A MY39501309 Sep. 22, 2015 EMC EMC184045B 980192 Sep. 01, 2015 HUBER+SUHNER SUCOFLEX104 MY16140/4 Dec. 10, 2015 HUBER+SUHNER SUCOFLEX104 MY16018/4 Dec. 10, 2015 AUDIX e3 6.120210g NA			



Test Item	RF Conducted						
Test Site	(TH01-WS)						
Tested Date	Jan. 28 ~ Jan. 29, 201	6					
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016		
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016		
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016		
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA		

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 FCC Public notice DA 00-705 ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters	Uncertainty				
Bandwidth	±34.134 Hz				
Conducted power	±0.808 dB				
Power density	±0.463 dB				
Conducted emission	±2.670 dB				
AC conducted emission	±2.90 dB				
Radiated emission ≤ 1GHz	±3.87 dB				
Radiated emission > 1GHz	±5.60 dB				



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	18°C / 59%	Sky Huang
Radiated Emissions	03CH02-WS	20-21°C / 60-62%	Brad Wu Morgan Chen
RF Conducted	TH01-WS	22°C / 64%	Alex Huang

➢ FCC site registration No.: 657002

➢ IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	8DPSK	2480	3Mbps	1
Radiated Emissions ≤ 1GHz	8DPSK	2480	3Mbps	1, 2
Radiated Emissions > 1GHz	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 3Mbps	1
Conducted Output Power	GFSK л /4 QDPSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480 2402, 2441, 2480	1 Mbps 2 Mbps 3 Mbps	1
Number of Hopping Channels	GFSK 8DPSK	2402~2480 2402~2480	1 Mbps 3 Mbps	1
Hopping Channel Separation	GFSK 8DPSK	2402, 2441, 2480 2402, 2441, 2480	1 Mbps 3Mbps	1
Dwell Time	GFSK 8DPSK	2402 2402	1 Mbps 3Mbps	1

NOTE:

1. The following antennas are used for final testing for this module: (See item 1.1.2 for more details.)

- 1) Configuration 1: Ant. No. 2 (E40), PIFA antenna.
- 2) Configuration 2: Ant. No. 4 (E55), PIFA antenna.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit						
Frequency Emission (MHz)	Quasi-Peak	Average				
0.15-0.5	66 - 56 *	56 - 46 *				
0.5-5	56	46				
5-30 60 50						
Note 1: * Decreases with the logarith	nm of the frequency.					

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

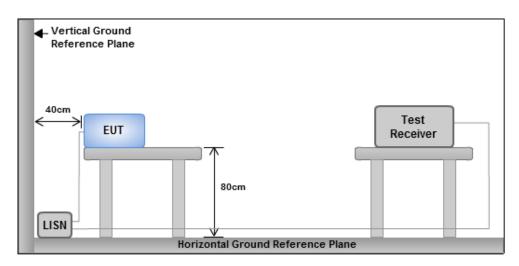

Note: 1. Support units were connected to second LISN.


2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes



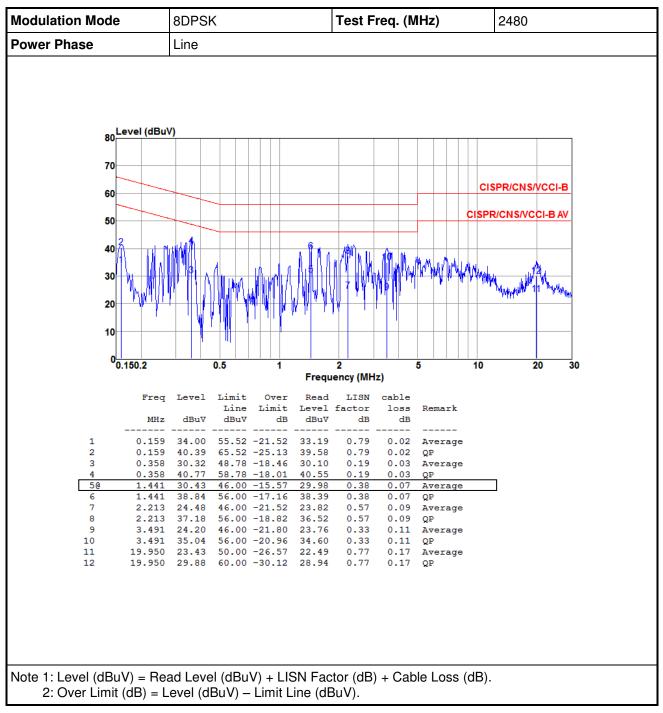

3.1.4 Test Result of Conducted Emissions



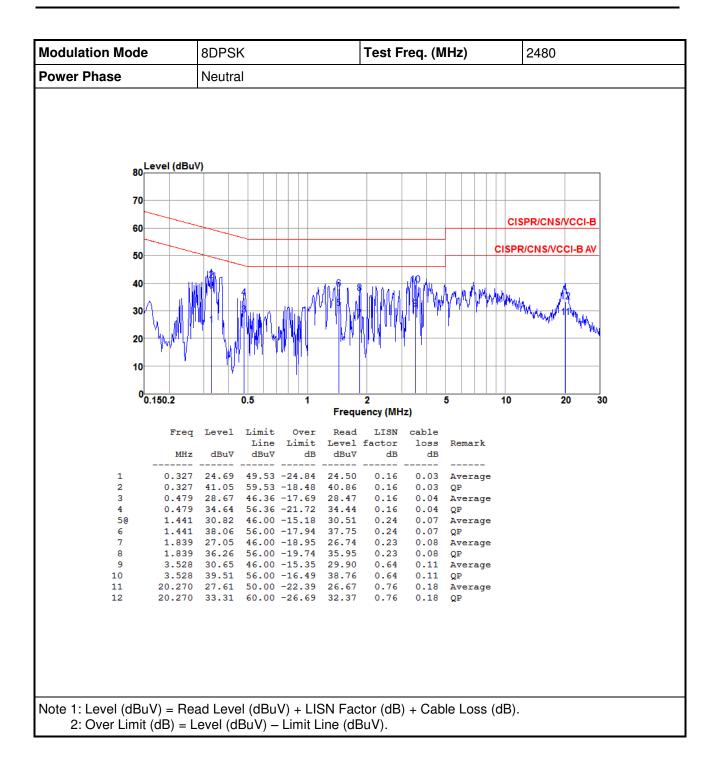



3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit							
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)				
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300				
0.490~1.705	24000/F(kHz)	33.8 - 23	30				
1.705~30.0	30	29	30				
30~88	100	40	3				
88~216	150	43.5	3				
216~960	200	46	3				
Above 960	500	54	3				

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. Radiated emission above 1GHz / Peak value RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:


3.

20log (Duty cycle) = 20log $\frac{1s / 1600 * 5}{100 \text{ ms}}$ = -30.1dB


4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector



3.2.3 Test Setup

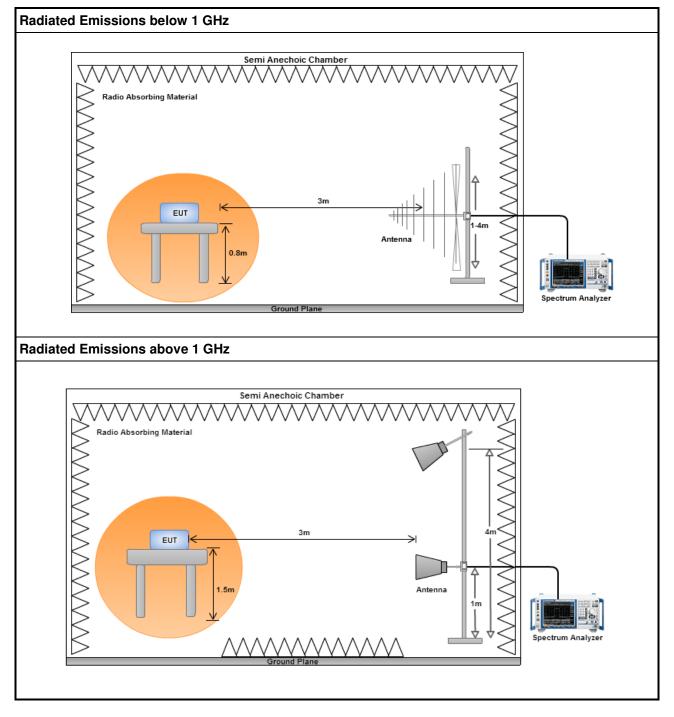




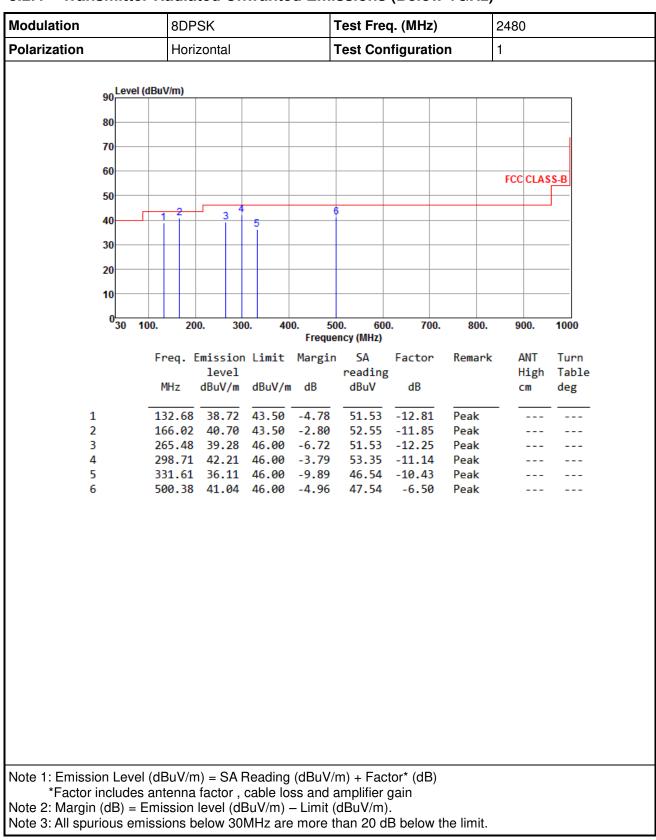


3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)




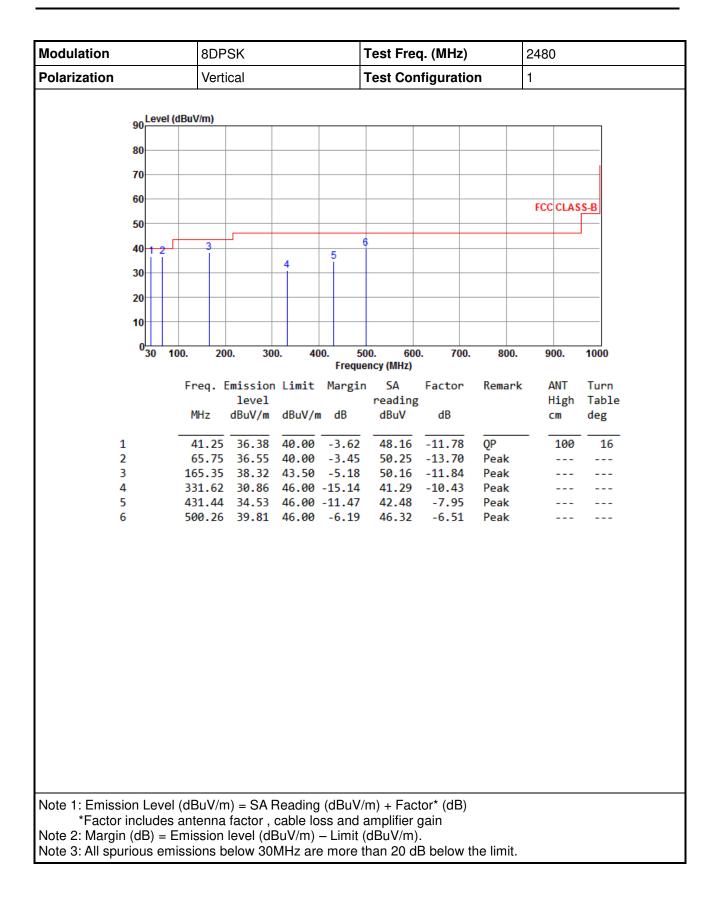




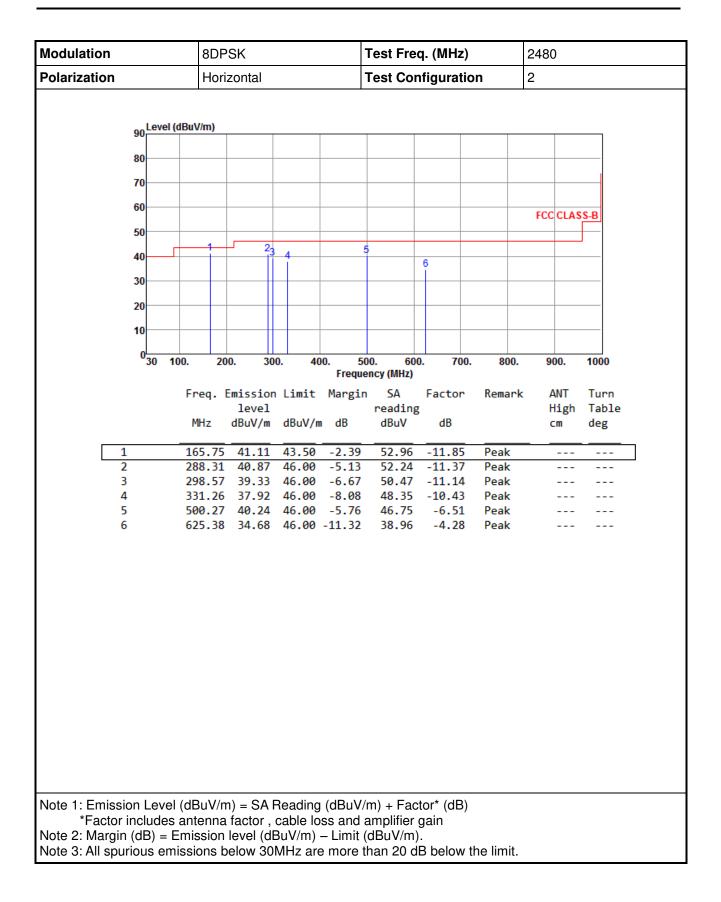



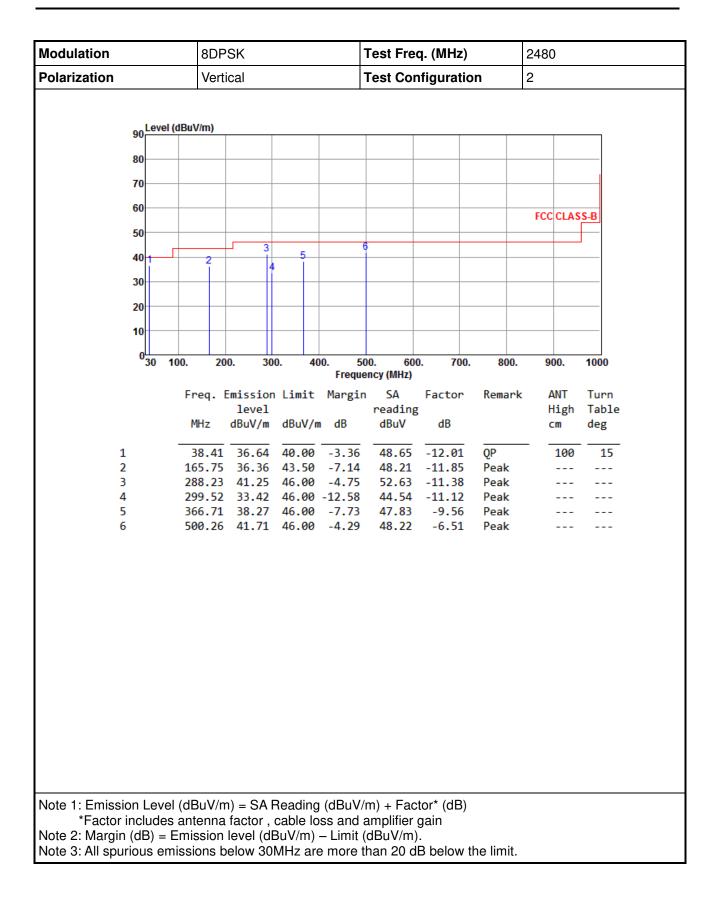




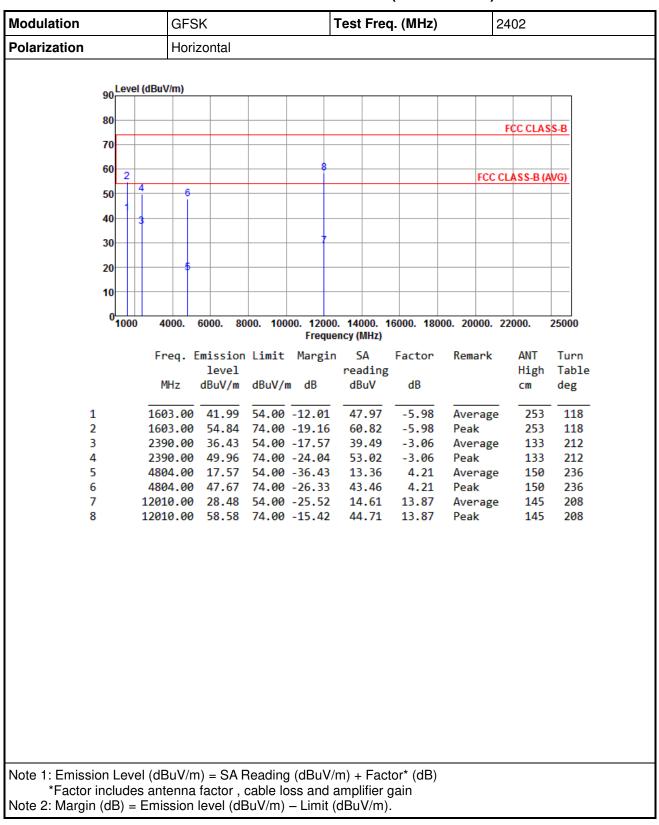


3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK




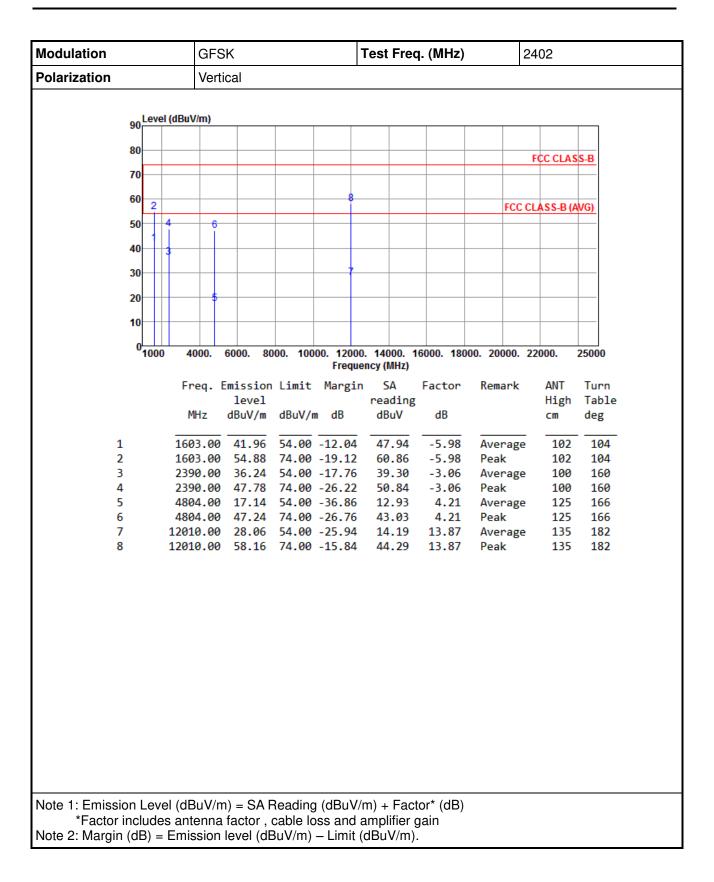




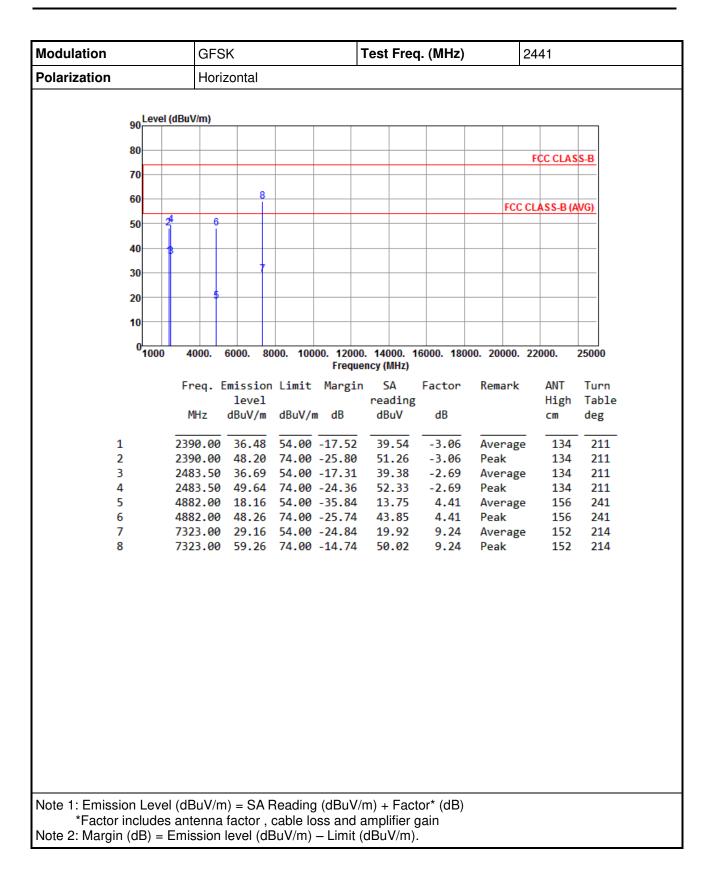




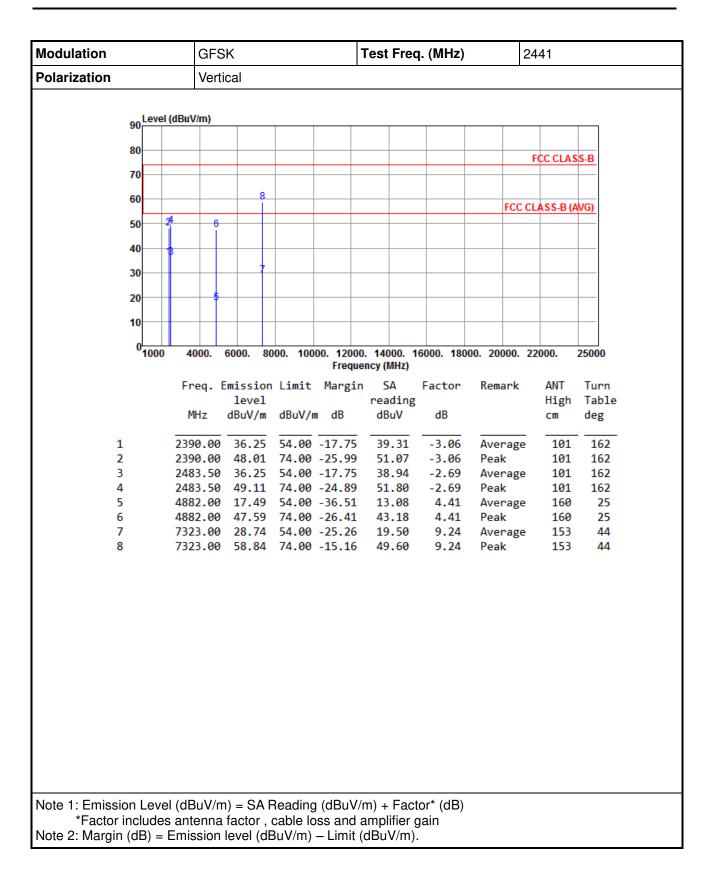




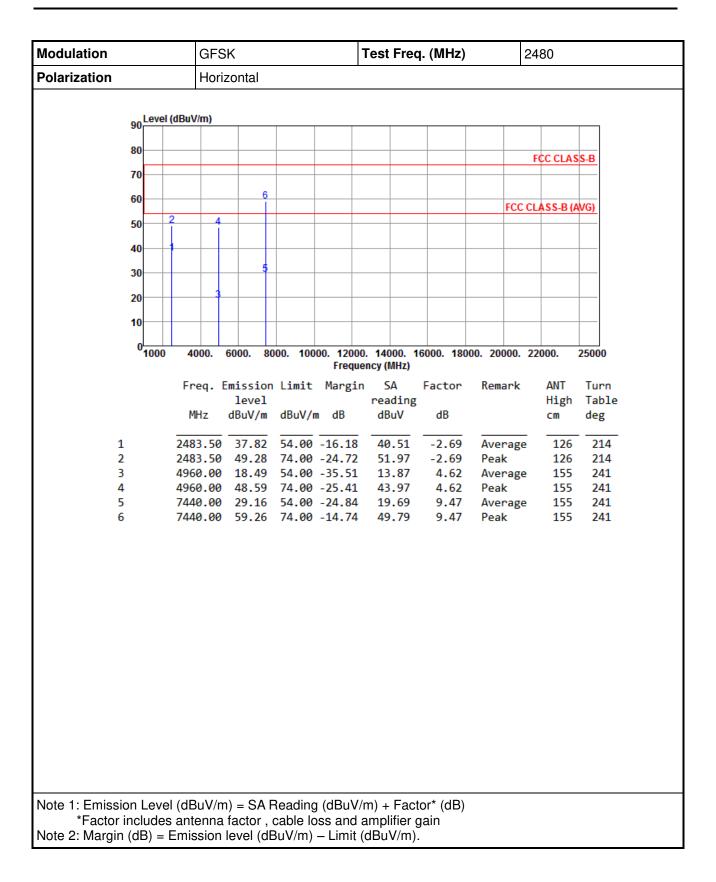



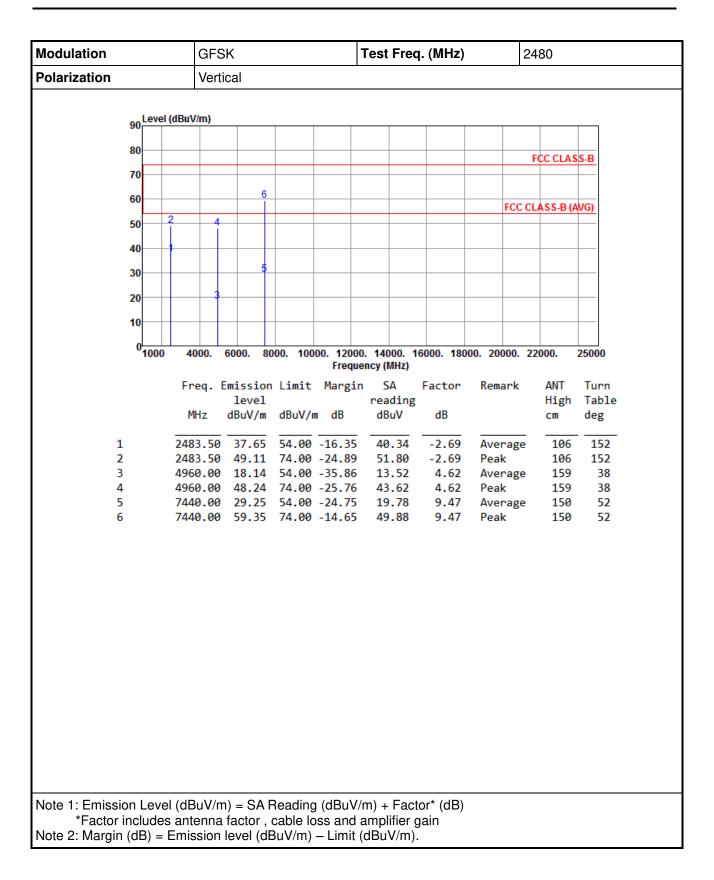




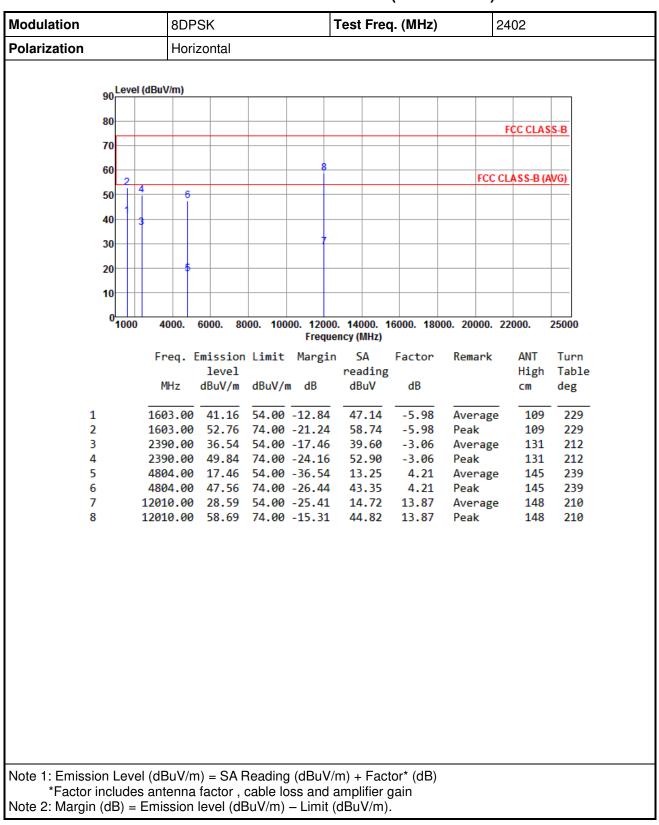


3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK




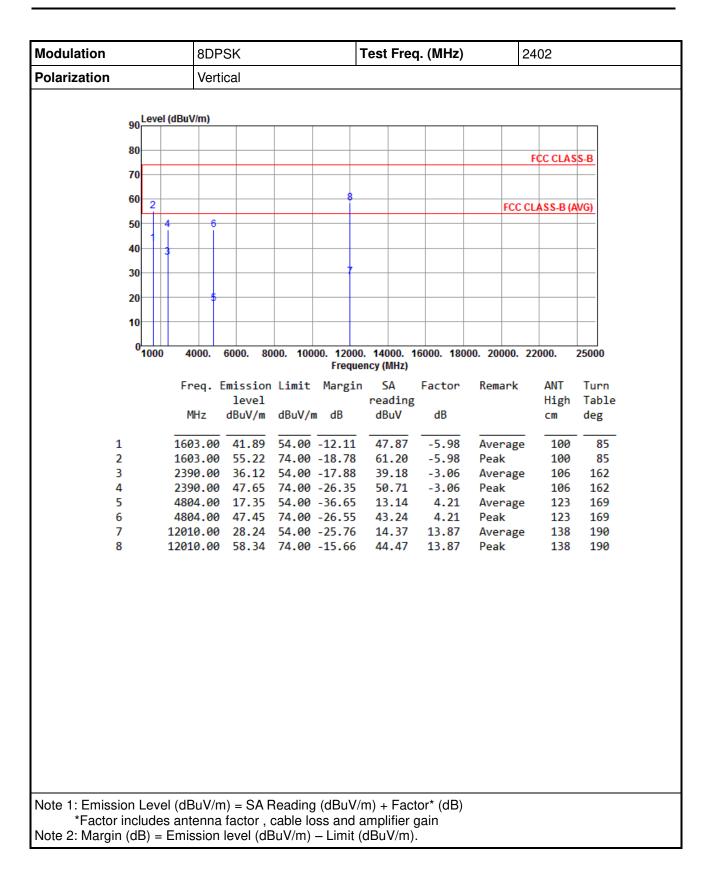




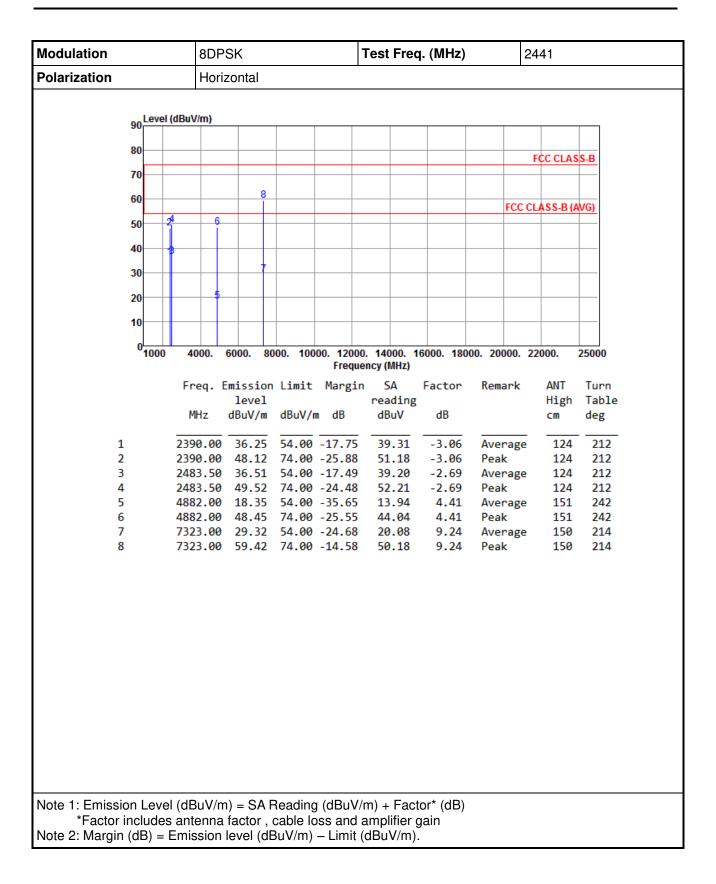




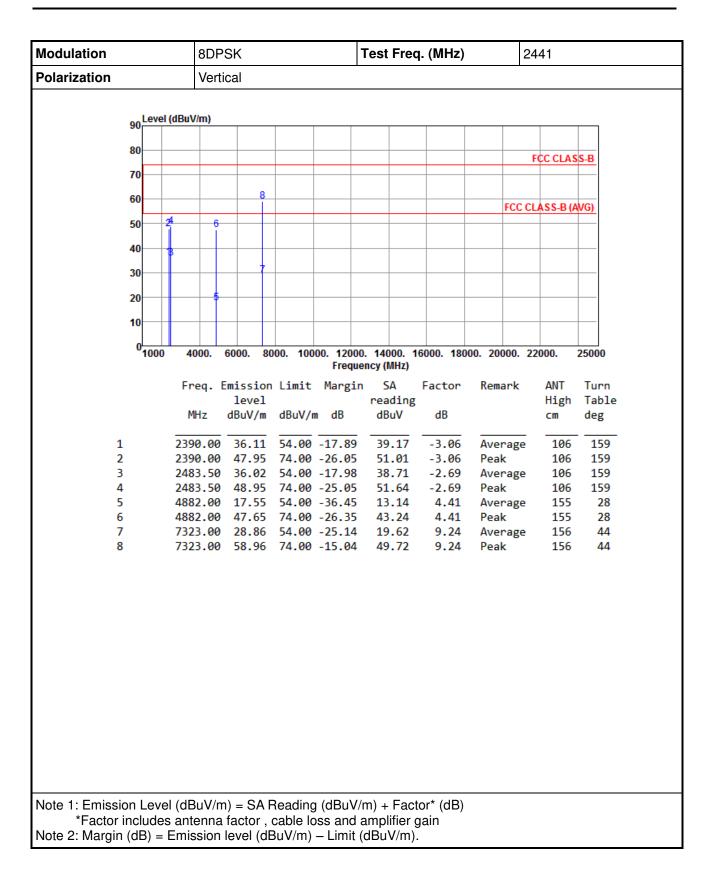



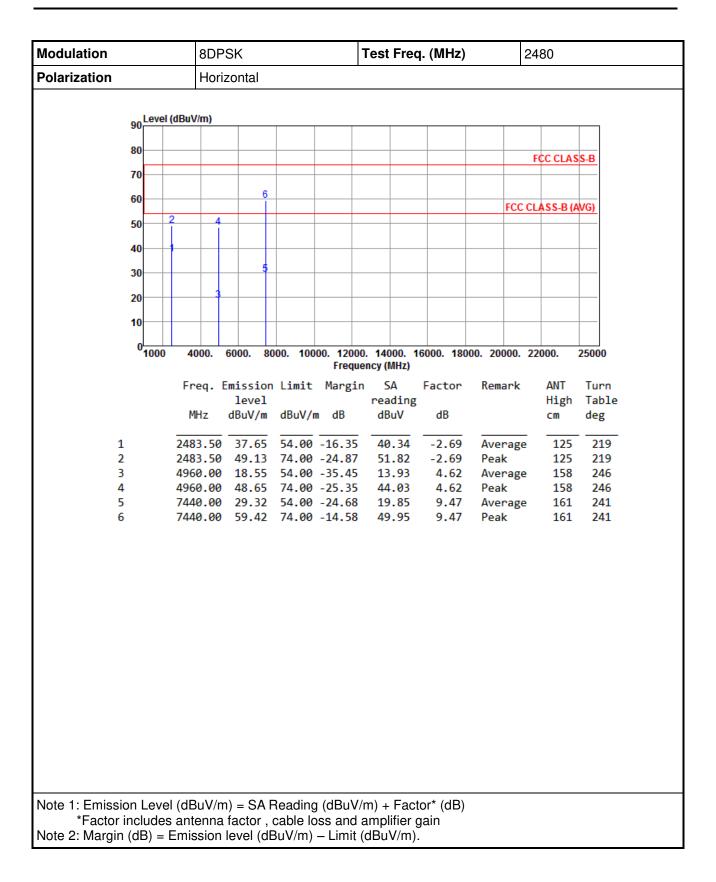



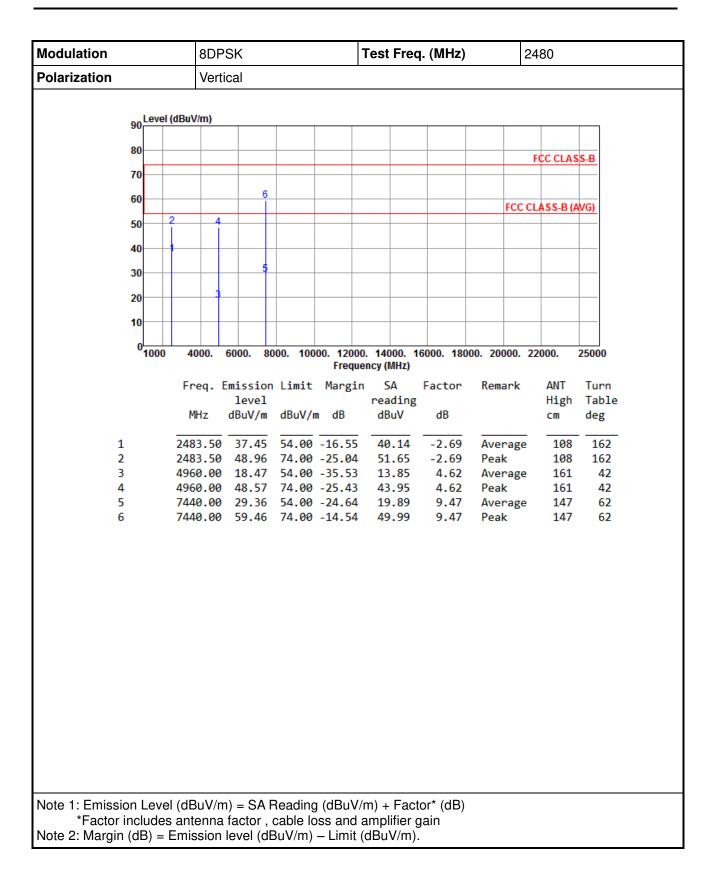



3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

3.3.3 Test Setup






3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

GFSK

Hopping on			Hopping off								
30MI	30MHz~25GHz (down 20dBc)			TX Freq 2402MHz / 30MHz~25GHz (down 20dBc)							
Spectrum Ref Level 20.00 dBm Offset 1	1.00 dB 🖷 RBW 100 kHz			Spectrum Ref Level 20	00 dBm Offset :	11.00 dB 🖷 RBW 1	00 kHz				E
Att 20 dB SWT	32.1 ms 🖷 VBW 300 kHz 🛛 Moo	le Sweep		Att 1Pk View	20 dB SWT	32.1 ms 💩 VBW 3	00 kHz Mod	le Sweep			
10 dBm 01 7.670 dBm	M. Hanning M. Hanning H. Hanning	M3[1] M1[1]	-57.13 dBm 2.48350000 GHz -7.67 dBm 2.42917570 GHz	10 dbm	7.640 dBm		_	M3[1] M1[1]		2,483	-60.45 dB) 350000 GF
-10 dBm		Ner C		0 dBm	-D2 -12.360 dBm						
-20 dBm				-20 dBm					-		
-40 dBm			Lithingto, to at the second state of the	-40 dBm	MIZ		-				
-70 dBm		F2		-70 dBm	and the second se	and the state of the second	nun Manan	M3			
Start 2.35 GHz	32001 pts		Stop 2.55 GHz	Start 2.35 GHz	F1	3	2001 pts			Stor	0 2.55 GHz
oture 2.00 unz				Marker	and a second	e Y-val		nction	Fun	ction Result	t
Marker Type Ref Trc X-value M1 1 2.429173 2 M2 1 2 2		nction Fu	Inction Result	Type Ref T M1 M2 M3 M3	rc X-value 1 2.40205 1 22 1 2.48	15 GHz 7.6 .4 GHz -55.5	4 dBm 7 dBm 5 dBm			.	<u>la</u>
Iarker Type Ref Trc X-value M1 1 2.429171 M2 1 2.40171 M3 1 2.40171 M3 1 2.40171 Spectrum Ref Level 20.00 dBm Offset 1	57 GHz 7.67 dBm 4 GHz -56.23 dBm 35 GHz -57.13 dBm		Inclion Result	M1 M2 M3 Spectrum Ref Level 20	1 2.40205 1 2 1 2.46	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dBm 7 dBm 5 dBm 00 kHz	Mexan	1790a - (111		0 [1
Marker Type Ref Trc X-value M1 1 2.42917, M2 1 2 M3 1 2.483 Spectrum Ref Level 20.00 dBm Offset 1 Att 20 dB SWT	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	Ite Sweep M1[1]	-48.15 dBm	M1 M2 M3 Spectrum	1 2.40205 1 2 1 2.448	15 GHz 7.6 .4 GHz -55.5 35 GHz -60.4	4 dBm 7 dBm 5 dBm 00 kHz 00 kHz Mode	de Sweep M1[1]		1000000 44	-49.24 dB
Spectrum Classifier Ref Level 20.00 dBm Offset 1 Att 20.00 dBm Offset 1 20.00 dBm	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	e Sweep	() () () () () () () () () () () () () (M1 M2 M3 Spectrum Ref Level 20 Att 9 JPk View	1 2.40205 1 2 1 2.46	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dBm 7 dBm 5 dBm 00 kHz 00 kHz Mode	de Sweep	-	1000000 44	-49.24 dB
Spectrum Ref Level 20.00 dBm Offset 1 0 dBm 0 dBm 0 dBm 0 dBm	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	e Sweep	-48.15 dBm	M1 M2 M3 Spectrum Ref Level 20 Att 9 JPk View	1 2.40205 1 2.48 1 2.48 0 0 dBm Offset 1 20 dB SWT	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dBm 7 dBm 5 dBm 00 kHz 00 kHz Mode	de Sweep		1000000 44	-49.24 dB
Marker Type Ref Trc X-value M1 1 2.42917, M2 1 2 M3 2.483 M3 2.483 Spectrum Ref Level 20.00 dBm Offset 1 htt 20 dB SWT 10 dBm 01 7.670 dBm	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	e Sweep	-48.15 dBm	M1 M2 M3 Spectrum Ref Level 20 Att 10 dBm 0 dBm 0 dBm 	1 2.40205 1 2.48 1 2.48 0 0 dBm Offset 1 20 dB SWT	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dBm 7 dBm 5 dBm 00 kHz 00 kHz Mode	de Sweep		1000000 44	-49.24 dB
Marker Type Ref Trc X-value M1 1 2.429178 M2 1 2 M3 1 2.463 M3 1 2.463 M	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	e Sweep	-48.15 dBm	M1 M2 M3 Spectrum Ref Level 20 Att 10 dBm 0 dBm 0 dBm 	1 2.40205 1 2 1 2.49 0 dBm Offset 20 dB SWT 7.640 dBm	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dBm 7 dBm 5 dBm 00 kHz 00 kHz Mode	de Sweep		1000000 44	-49.24 dB
Marker Type Ref Trc X-value M1 1 2.42917 M2 1 2 M3 1 2.462 M3 2 2.462 Spectrum Ref Level 20.00 dBm Offset 1 Att 20 dB SWT 0 JPk View 01 7.670 dBm 0 dBm -10 dBm -02 -12.330 dBm	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	e Sweep	-48.15 dBm	M1 M2 M3 Spectrum Ref Level 20 Att 10 dBm -10 dBm -10 dBm	1 2.40205 1 2 1 2.49 0 dBm Offset 20 dB SWT 7.640 dBm	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dBm 7 dBm 5 dBm 00 kHz 00 kHz Mode	de Sweep		1000000 44	-49.24 dB
Marker Type Ref Trc X-value M1 1 2:42917, M2 1 2 M3 1 2:401 M3 1 2:4017 M3 1 2:4017 M3 1 2:401 M3 1 2:401	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	ie Sweep M1[1]	-48.15 dBm	M1 M2 M3 Spectrum RofLevel 20 Att 0 dbm -10 dbm -20 dbm	1 2.40205 1 2 1 2.49 0 dBm Offset 20 dB SWT 7.640 dBm	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dBm 7 dBm 5 dBm 00 kHz 00 kHz Mode	de Sweep	M1	1000000 44	-49.24 dB
Marker Type Ref Trc X-value M2 1 2.45917, M2 1 2.463 M3 1 2.463 M3 2.463 Spectrum Ref Level 20.00 dBm Offset 1 10 dBm 01 7.670 dBm 0 dBm 02 -12.330 dBm -20 dBm 02 -12.330 dBm	57 GH2 7.67 dBm 4 GH2 -56.23 dBm 35 GH2 -57.13 dBm 1.00 dB ■ RBW 100 kH2 250 ms ● VBW 300 kH2 Mod	Ie Sweep M1[1]	-48.15 dBm	M1 M2 M3 Spectrum Rof Lavel 20 • Att • Ink View 10 dBm -10 dBm -20 dBm -30 dBm	1 2.40205 1 2 1 2.49 0 dBm Offset 20 dB SWT 7.640 dBm	15 GHz 7.6 :4 GHz -55.5 35 GHz -60.4 11.00 dB RBW 1	4 dam // 7 d	de Sweep		1000000 44	-49.24 dB
Spectrum Offset Offset Offset Offset Spectrum Rof Level 20.00 dBm 0ffset 1 2.463 M3 1 2.463 M3 1 2.463 Spectrum 0 8 Nd Level 20.00 dBm Offset 1 91Pk View 20 dB 8 10 dBm 01 7.670 dBm 0 -10 dBm 02 -12.330 dBm -30 dBm -40 dBm -40 dBm -40 dBm	1.00 dB RBW 100 kHz 250 ms VBW 300 kHz Mod	ie Sweep M1[1]	-48.15 dBm	M1 M2 M3 Spectrum Rof Level 20 Att ID dBm IO dBm -10 dBm -20 dBm -30 dBm -40 dBm	1 2.40205 1 2 1 2.49 0 dBm Offset 20 dB SWT 7.640 dBm	11.00 dB RBW 1 250 ms VBW 3	4 dam // 7 d	de Sweep		1000000 44	-49.24 dB
Spectrum Control of the second s	1.00 dB RBW 100 kHz S0 ms VBW 300 kHz Mo	Ie Sweep M1[1]	-48.15 dBm	M1 M2 M3 M3 Rof Level 20 Att 0 dBm -10 dBm -20 dBm -30 dBm -30 dBm -50 dBm	1 2.40205 1 2 1 2.49 0 dBm Offset 20 dB SWT 7.640 dBm	11.00 dB RBW 1 250 ms VBW 3	4 dam // 7 d	de Sweep		1000000 44	-49.24 dB
Marker Type Ref 1 2 429177 M1 1 2 429177 M1 2 1 2 49177 M3 1 2 49177 M3 1 2 49177 2 2 M3 1 2 49177 2 2 2 4917 1 2 4917 2 4917 1 2 491	1.00 dB RBW 100 kHz S0 ms VBW 300 kHz Mo	Ie Sweep M1[1]	-48.15 dBm	M1 M2 M3 Spectrum Ref Level 20 Att I View 10 dBm -10 dBm -20 dBm -30 dBm -30 dBm -50 dBm -50 dBm	1 2.40205 1 2.402 1 2.40 0.0 dBm Offset 1 20 dB SWT 7.640 dBm -02 -12 360 dBm -02 -12 360 dBm -02 -12 360 dBm	11.00 dB • RBW 1 250 ms • VBW 3	4 dam // 7 d	de Sweep			-49.24 dBr



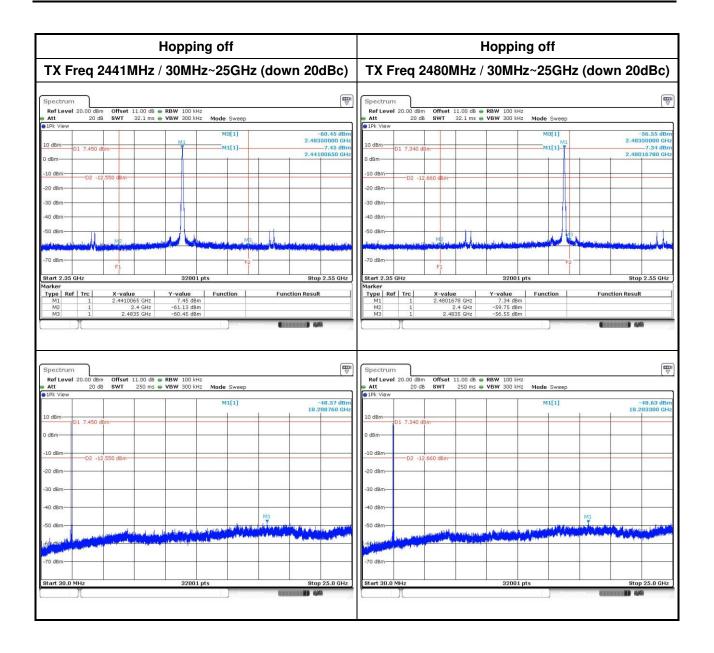




8DPSK

Hopping on	Hopping off TX Freq 2402MHz / 30MHz~25GHz (down 20dBc)					
30MHz~25GHz (down 20dBc)						
Spectrum ms Ref Level 20.00 dBm Offset 11.00 dB RBW 100 kHz Att 20 dB SWT 32.1 ms VBW 300 kHz	Spectrum Image: Constraint of the sector of th					
1Pk View MS[1] 56.02 dBm 1D.dBm 01 8.860 dBm M11 56.02 dBm 0 dBm Juli dBm MS[1] 56.02 dBm 0 dBm Juli dBm Juli dBm 2.41016370 GHz -10.dBm D2 -11,140 dBm 2.010 dBm 2.2410 lBm	e1Pk View M3[1] -59.62 dBm -59.62 dBm c3.48350000 GH 2.48350000 GH -7.71 dBm -7.71 dBm -7.71 dBm -10 dBm -02 -12.290 dBm -02 -12.290 dBm -02 -12.290 dBm -00 dBm -02 -12.290 dBm -00 dBm					
-30 dBm	-30 dBm					
Stort 2.35 GHz 3201 pts Stop 2.55 GHz Marker Trype [Ref Trc X-value Y-value Function Function Result Function Result M1 1 2.4101637 GHz 8.86 dBm M2 1 2.4 GHz -46.80 dBm M3 1 2.44835 GHz -56.02 dBm	Stort 2.35 GHz 32001 pts Stop 2.55 GHz Marker Type [Ref Trc] X-value Y-value Function Function Result M1 1 2.401953 GHz -7.71 dBm Function Function Result M2 1 2.4635 GHz -47.46 dBm Function Function Result					
Spectrum (7773) Ref Level 20.00 dBm Offset 11.00 dB ● RBW 100 kHz Att 20 dB SWT 250 ms ● VBW 300 kHz	Spectrum m Ref Level 20.00 dBm Offset 11.00 dB RBW 100 kHz Att 20 dB SWT 250 ms VBW 300 kHz					
10 dBm	10 d8m 10 d8m					
0 dBm 02 -11.140 dBm 02 -11.140 dBm 03 dBm 03 dBm 04 dBm 0	0 d8m 02 -12.290 d8m 0 -10 d8m 02 -12.290 d8m 0					
40 déji	-30 dem -40 dem -50 dem -50 dem -50 dem -10					
70 dBm	-70 dBm Start 30.0 MHz 32001 pts Stop 25.0 GHz					



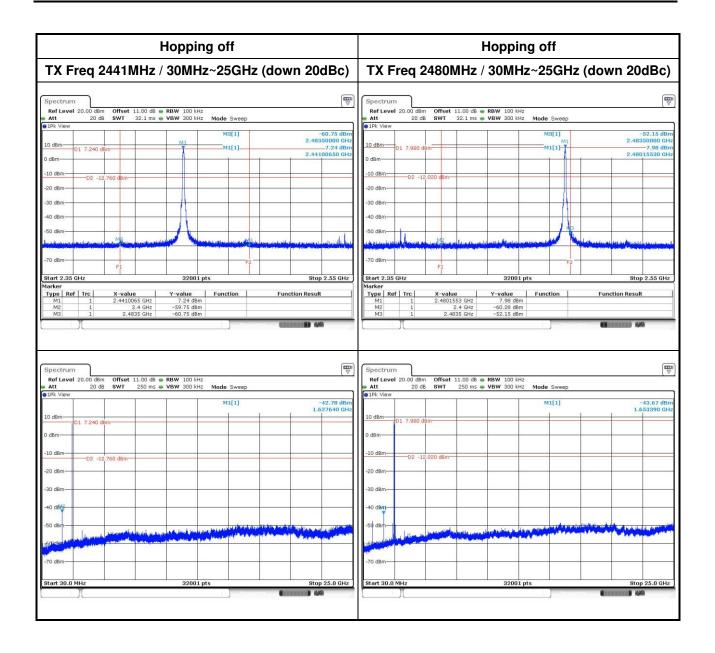



3.4 Conducted Output Power

3.4.1 Limit of Conducted Output Power

1 Watt

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.

🛛 0.125 Watt

For all other frequency hopping systems in the 2400–2483.5 MHz band.

0.125 Watt

For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

- 1. A wideband power meter is used for power measurement. Bandwidth of power senor and meter is 50MHz
- 2 If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup





Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	5.96	7.75	125
GFSK	2441	5.68	7.54	125
GFSK	2480	5.33	7.27	125
л /4 DQPSK	2402	10.30	10.13	125
л /4 DQPSK	2441	9.64	9.84	125
л /4 DQPSK	2480	11.25	10.51	125
8DPSK	2402	11.07	10.44	125
8DPSK	2441	10.40	10.17	125
8DPSK	2480	12.13	10.84	125

3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	5.85	7.67
GFSK	2441	5.57	7.46
GFSK	2480	5.24	7.19
л /4 DQPSK	2402	5.64	7.51
л /4 DQPSK	2441	5.25	7.20
л /4 DQPSK	2480	6.11	7.86
8DPSK	2402	5.64	7.51
8DPSK	2441	5.25	7.20
8DPSK	2480	6.11	7.86

Note: Average power is for reference only.



3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


3.5.2 Test Procedures

- 1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
- 2 Allow trace to stabilize.

3.5.3 Test Setup





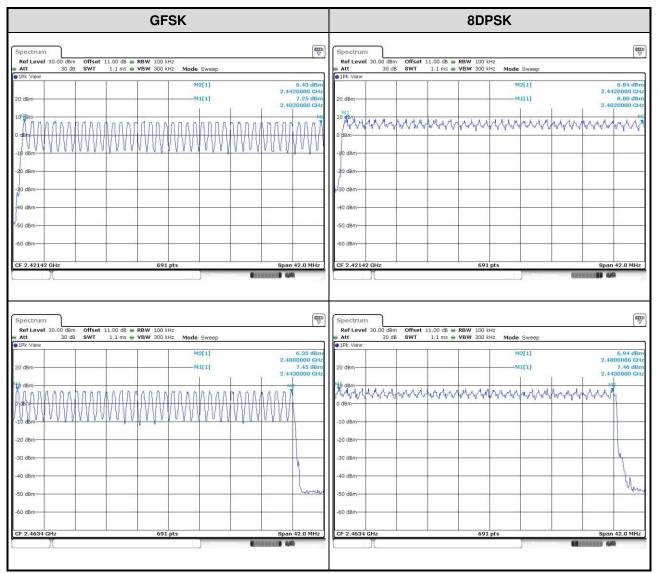

3.5.4 Test Result of Number of Hopping Frequency




3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures

- 1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
- 2 Allow trace to stabilize
- 3 Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.
- 4. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup





Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.952	0.864
GFSK	2441	0.957	0.868
GFSK	2480	0.965	0.864
8DPSK	2402	1.300	1.172
8DPSK	2441	1.296	1.172
8DPSK	2480	1.300	1.172

3.6.3 Test result of 20dB and Occupied Bandwidth

Worst Plot of 20dB Bandwic	dth	Worst Plot of Occupied Bandwidth		
Spectrum Ref Level 20.00 dBm Offset 11.00 dB RBW 30 kHz Att 20 dB SWT 1.1 ms YBW 100 kHz Mode SWE Image: SWE SWE Image: SWE Im		Spectrum W Ref Level 20.00 dBm Offset 11.00 dB RBW 30 KHz Att 20 dB SWT 1.1 ms VBW 100 KHz Mode Sweep 1.1 ms VBW 100 KHz Mode Sweep		
MI[1] 10 dBm Occ. Bw 0 dBm D1 5.181 dBm -10 dBm Occ. Bw -20 dBm S0 -30 dBm -30 dBm -50 dBm -50 dBm	-14.28 dBm 2.47905217 OHz 1.167872640 MHz -0.52 dB 1.30000 MHz	10 dBm 1.172214182 MH 0 dBm 1.172214182 MH -10 dBm -20 dBm -30 dBm -30 dBm		
-60 dBm		CF 2.48 GHz 691 pts Span 3.0 MHz		
-70 dBmF2 _		Marker Yype Ref Trc X-value Y-value Function Function Result M1 1 2.4801606 GHz 5.13 dBm 1		
CF 2.48 GHz 691 pts	Span 3.0 MHz	T2 1 2.48059611 GHz -8.93 dBm		



3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

- 1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
- 2 Allow trace to stabilize
- 3 Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup





Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.952	0.635
GFSK	2441	1.003	0.957	0.638
GFSK	2480	1.003	0.965	0.643
8DPSK	2402	1.003	1.300	0.867
8DPSK	2441	1.003	1.296	0.864
8DPSK	2480	1.003	1.300	0.867

3.7.4 Test result of Channel Separation

Worst Plots					
Spectrum	Ē				
~					
Ref Level 20.00 dBm Offset 11.00 dB RBW 100 kHz Att 20 dB SWT 1 ms VBW 300 kHz Mode Sweep					
●1Pk View●2Pk View					
D2[2]	0.00 de				
	-1.00290 MH				
10 dBm D2M1[1]	M1 8.20 dBn				
	2.48016430 GH:				
-10 dBm					
-20 dBm					
-30 dBm	m m				
-40 dBm-	The second secon				
-50 dBm					
-60 dBm					
-70 dBm					
CF 2.4795 GHz 691 pts	Span 3.0 MHz				
Meas	uring				



3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

- 1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
- 2 Enable gating and trigger function of spectrum analyzer to measure burst on time.
- 3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum 1600 / 79 /2 = 10.12 hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 10.12 x 31.6 = 320 within 31.6 seconds.
- 4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum 1600 / 79 / 4 = 5.06 hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 5.06 x 31.6 = 160 within 31.6 seconds.
- 5 The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times 3.37 x 31.6 = 106.6 within 31.6 seconds


3.8.3 Test Setup






3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.42826	320	0.137	0.4
GFSK-DH3	2402	1.69493	160	0.271	0.4
GFSK-DH5	2402	2.96739	106.6	0.316	0.4
8DPSK-DH1	2402	0.43623	320	0.140	0.4
8DPSK-DH3	2402	1.69420	160	0.271	0.4
8DPSK-DH5	2402	2.94565	106.6	0.314	0.4

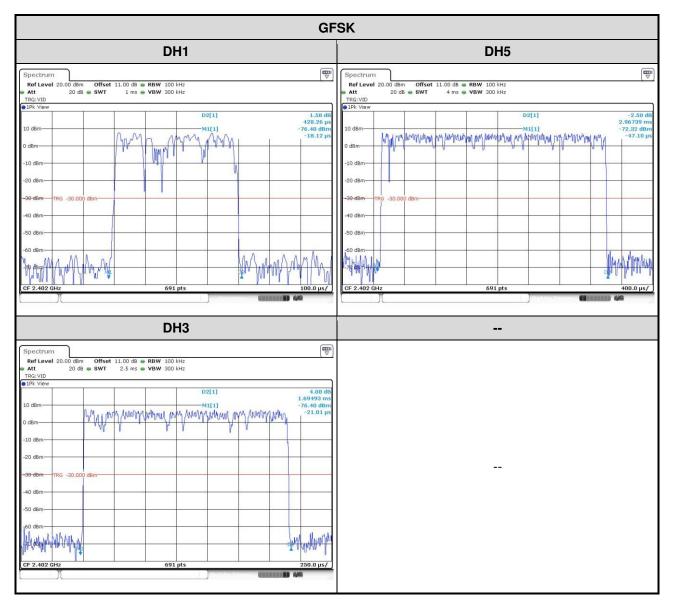



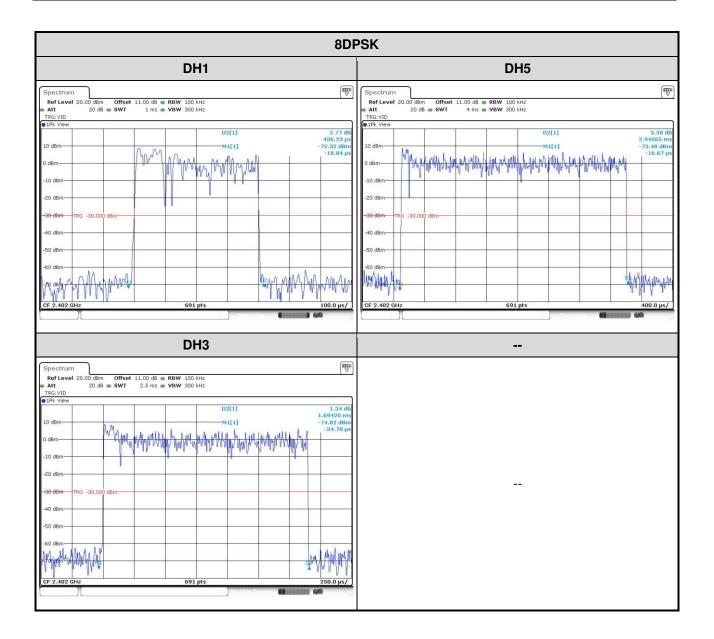



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

—END—