



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 1 of 929

TEST REPORT

Application No.: KSCR2404000566AT
FCC ID: VPYLBEE5HY2FY
IC: 772C-LBEE5HY2FY
Applicant: Murata Manufacturing Co., Ltd.
Address of Applicant: 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto, 617-8555 Japan
Manufacturer: Murata Manufacturing Co., Ltd.
Address of Manufacturer: 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto, 617-8555 Japan
Equipment Under Test (EUT):
EUT Name: WLAN+Bluetooth Module
Model No.: LBEE5HY2GY, LBEE5HY2FY ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Standard(s) : 47 CFR Part 15, Subpart E 15.407
RSS-247 Issue 3, August 2023
RSS-Gen Issue 5 Amendment 2 (February 2021)
Date of Receipt: 2024-04-03
Date of Test: 2024-04-15 to 2025-01-13
Date of Issue: 2025-03-12

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 2 of 929

Revision Record			
Version	Description	Date	Remark
00	Original	2025-03-12	/

Authorized for issue by:			
Tested By		Tommie Tang	
		Tommie_Tang/Project Engineer	
Approved By		Terry Hou	
		Terry Hou /Reviewer	



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 3 of 929

2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203	RSS-Gen Clause 6.8	N/A	Pass
Transmission in the Absence of Data	47 CFR Part 15, Subpart E 15.407 (c)	RSS-247 Section 6.4(a)	N/A	Pass

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(6)	RSS-Gen Section 8.8	ANSI C63.10 (2013) Section 6.2	Pass
99% Bandwidth	N/A	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass
26dB Emission bandwidth	47 CFR Part 15, Subpart E 15.407 (a)	RSS-247 Section 6.2.1(1)	KDB 789033 D02 II C 1	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	47 CFR Part 15, Subpart E 15.407 (e)	RSS-247 Section 6.2.4	KDB 789033 D02 II C 2	Pass
Maximum Conducted output power	47 CFR Part 15, Subpart E 15.407 (a)	RSS-247 Section 6.2.1&6.2.2&6.2.3&6.2.4	KDB 789033 D02 II E	Pass
Peak Power spectrum density	47 CFR Part 15, Subpart E 15.407 (a)	RSS-247 Section 6.2.1&6.2.2&6.2.3&6.2.4	KDB 789033 D02 II F	Pass
Radiated Emissions	47 CFR Part 15, Subpart C 15.209 & 15.407(b)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	KDB 789033 D02 II G	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	RSS-247 Section 3.3 & RSS-Gen Section 8.9	KDB 789033 D02 II G	Pass
Frequency Stability	47 CFR Part 15, Subpart E 15.407 (g)	RSS-Gen Section 8.11	ANSI C63.10 (2013) Section 6.8& RSS-Gen Section 6.11	Pass

Note: There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model LBEE5HY2GY was tested since their differences are

Moel	RF functions
LBEE5HY2GY	WLAN 2.4GHz,5GHz+BT/BLE
LBEE5HY2FY	WLAN 2.4GHz,5GHz,6GHz+BT/BLE



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 4 of 929

3 Contents

	Page
1 COVER PAGE.....	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.....	5
4.2 Description of Support Units	5
4.3 Power level setting using in test:	5
4.4 Measurement Uncertainty.....	8
4.5 Test Location	9
4.6 Test Facility.....	9
4.7 Deviation from Standards	9
4.8 Abnormalities from Standard Conditions	9
5 Equipment List.....	10
6 Radio Spectrum Technical Requirement	12
6.1 Antenna Requirement	12
6.2 Transmission in the Absence of Data	13
7 Radio Spectrum Matter Test Results.....	14
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	14
7.2 Duty Cycle.....	18
7.3 99% Bandwidth	20
7.4 26dB Emission bandwidth	22
7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)	23
7.6 Maximum Conducted output power.....	24
7.7 Peak Power spectrum density	26
7.8 Radiated Emissions (Below 1GHz).....	28
7.9 Radiated Emissions (Above 1GHz)	32
7.10 Radiated Emissions which fall in the restricted bands.....	367
7.11 Frequency Stability	650
8 Test Setup Photo	652
9 EUT Constructional Details (EUT Photos)	652
10 Appendix	653

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 3.3V				
Operation Frequency/ Number of channels (20MHz):	Band	Mode	Frequency Range (MHz)	Number of channels	
				FCC	IC
	U-NII 1	802.11a/n/ac/ax	5180-5240	4	4
	U-NII 2A	802.11a/n/ac/ax	5260-5320	4	4
	U-NII 2C	802.11a/n/ac/ax	5500-5720	12	9
	U-NII 3	802.11a/n/ac/ax	5745-5825	5	5
Modulation Type:	802.11a: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM); 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024-QAM)				
Channel Spacing:	802.11a/n/ac/ax 20: 20MHz				
DFS Function:	Slave without Radar detection				
Antenna Gain:	PCB Antenna: 3.4dBi (Provided by the manufacturer) Dipole Antenna: 4dBi (Provided by the manufacturer)				

Remark: Frequencies 5600-5650MHz will not be used in Canada.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	/
DC Power Supply	Agilent	E3632A	/
Host	/	/	/

4.3 Power level setting using in test:

For FCC

Channel	802.11a	802.11n(HT20)	802.11ac(VHT20)	802.11ax(HE20)		
	Power setting	Power setting	Power setting	RU Config	RU Position	Power setting
36	64	56	52	RU 242	/	43
				RU26	Left	21
				RU52	Left	22
				RU106	Left	24
40	63	56	52	RU 242	/	44
				RU26	Middle	28
48	62	54	50	RU 242	/	43
				RU26	Right	23
				RU52	Right	24
				RU106	Right	24
52	62	53	50	RU 242	/	43
				RU26	Left	22

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 6 of 929

				RU52	Left	23
				RU106	Left	23
60	63	53	50	RU 242	/	43
				RU26	Middle	22
				RU 242	/	42
64	62	53	49	RU26	Right	20
				RU52	Right	20
				RU106	Right	21
				RU 242	/	46
100	64	57	54	RU26	Left	20
				RU52	Left	20
				RU106	Left	21
116	65	59	56	RU 242	/	47
				RU26	Middle	24
				RU 242	/	49
140	65	60	56	RU26	Right	25
				RU52	Right	25
				RU106	Right	25
				RU 242	/	48
144	65	60	56	RU26	Left	24
				RU52	Left	24
				RU106	Left	24
				RU 242	/	48
149	66	60	56	RU26	Left	23
				RU52	Left	24
				RU106	Left	25
157	64	58	54	RU 242	/	46
				RU26	Middle	26
				RU 242	/	48
165	64	58	54	RU26	Right	23
				RU52	Right	24
				RU106	Right	25

For IC

Channel	802.11a	802.11n(HT20)	802.11ac(VHT20)	802.11ax(HE20)		
	Power setting	Power setting	Power setting	RU Config	RU Position	Power setting
				RU 242	/	43
36	57	56	52	RU26	Left	32
				RU52	Left	26
				RU106	Left	24
40	57	56	52	RU 242	/	44
				RU26	Middle	32

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 7 of 929

48	57	54	50	RU 242	/	43
				RU26	Right	32
				RU52	Right	26
				RU106	Right	24
52	62	53	50	RU 242	/	43
				RU26	Left	22
				RU52	Left	23
				RU106	Left	23
60	63	53	50	RU 242	/	43
				RU26	Middle	22
64	62	53	49	RU 242	/	42
				RU26	Right	20
				RU52	Right	20
				RU106	Right	21
100	64	57	54	RU 242	/	46
				RU26	Left	20
				RU52	Left	20
				RU106	Left	21
144	65	60	56	RU 242	/	48
				RU26	Left	24
				RU52	Left	24
				RU106	Left	24
116	65	59	56	RU 242	/	47
				RU26	Middle	24
140	65	60	56	RU 242	/	49
				RU26	Right	25
				RU52	Right	25
				RU106	Right	25
149	66	60	56	RU 242	/	48
				RU26	Left	23
				RU52	Left	24
				RU106	Left	25
157	64	58	54	RU 242	/	46
				RU26	Middle	26
165	64	58	54	RU 242	/	48
				RU26	Right	23
				RU52	Right	24
				RU106	Right	25

4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	8.4×10^{-8}
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 9 of 929

4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

• FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

• ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

• VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 10 of 929

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESCI	KS301101	01/15/2024	01/14/2025
2	LISN	R&S	ENV216	KS301197	01/15/2024	01/14/2025
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2024	01/14/2025
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/15/2024	01/14/2025
5	CE test Cable	Thermax	/	CZ301102	01/15/2024	01/14/2025
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R
RF Conducted Test						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/24/2023	08/23/2024
	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/24/2023	08/23/2024
	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/13/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/24/2023	08/23/2024
	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/24/2023	08/23/2024
	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/24/2023	08/23/2024
	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/24/2023	08/23/2024
	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/24/2023	08/23/2024
	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/12/2024	08/11/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/13/2025
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/15/2024	01/13/2025
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/27/2023	08/26/2024
	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
15	Software	BST	TST-PASS	/	NCR	NCR
RF Radiated Test						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/24/2023	08/23/2024
	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/19/2024	03/18/2025
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E006	03/19/2024	03/18/2025
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	08/22/2026
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2024	01/13/2025
11	Amplifier(18~40GHz)	PANSHAN	LNA180400G40	KSEM038	08/24/2023	08/23/2024



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 11 of 929

		TECHNOLOGY				
	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/24/2023	08/23/2024
	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/12/2024	08/11/2025
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/21/2024	03/20/2025
14	Software	Faratronic	EZ_EMV-3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna complies with this requirement and no consideration of replacement. The best case gain of the PCB antenna is 3.4dBi, Dipole antenna is 4dBi.

Antenna location: Refer to internal photo.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 13 of 929

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & Subpart E 15.407 b(9)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C


Humidity: 51.2 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII 2C)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Pre-scan	01	TX mode (U-NII 1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Pre-scan	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Pre-scan	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

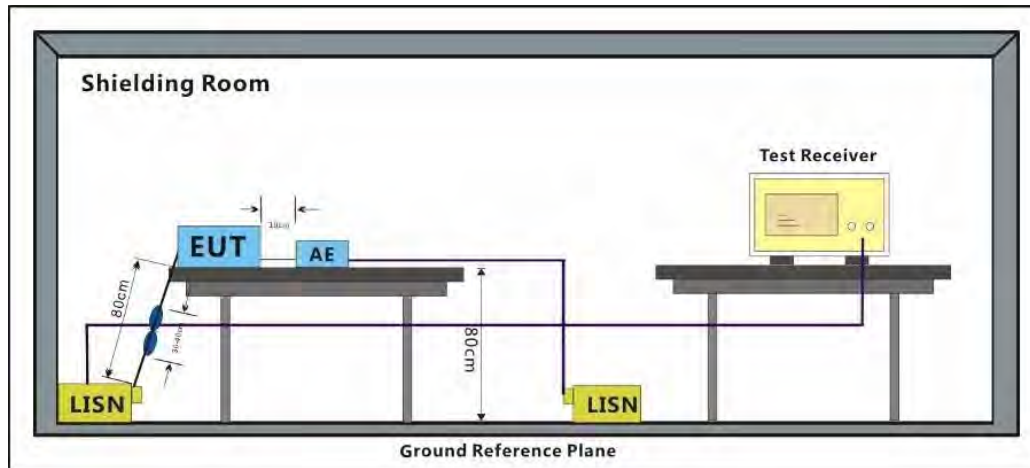

7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 16 of 929

Test Mode: 03; Line: Live line; Modulation:802.11a; Bandwidth:20MHz; Antenna:Dipole;
Channel:middle

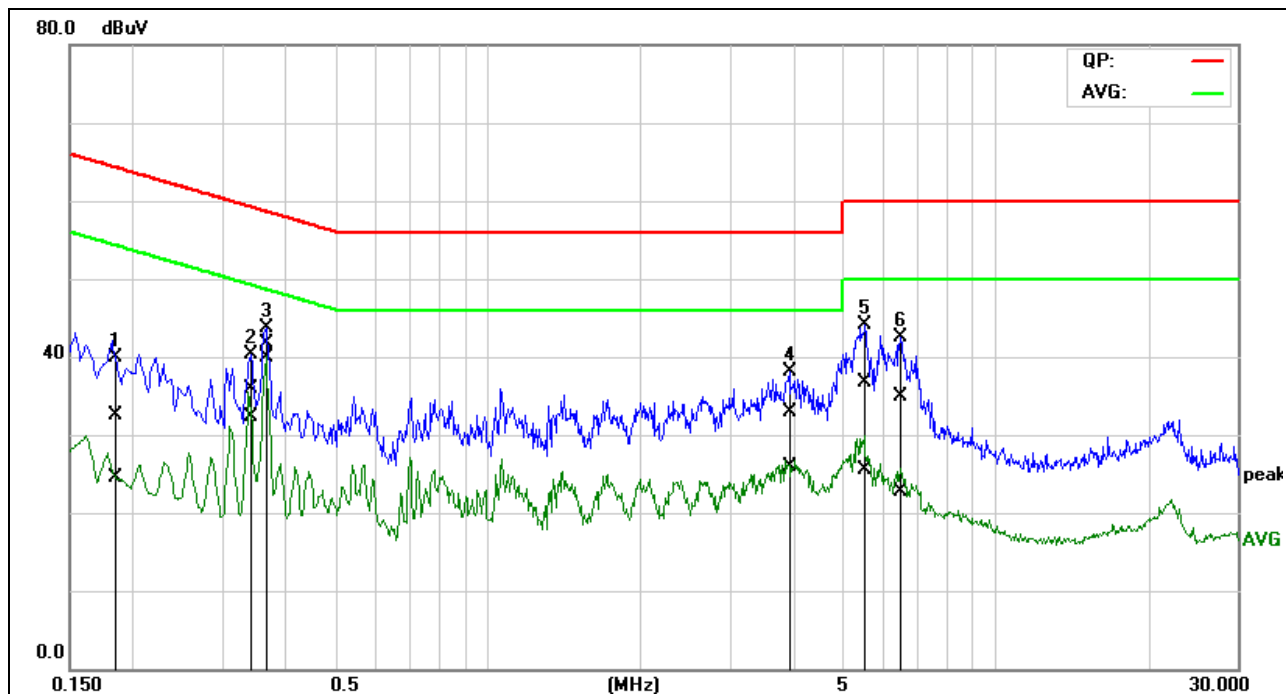

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1852	12.49	4.32	20.11	32.60	24.43	64.25	54.25	-31.65	-29.82	Pass
2	0.3416	15.91	12.25	20.07	35.98	32.32	59.16	49.16	-23.18	-16.84	Pass
3*	0.3651	21.71	19.78	20.07	41.78	39.85	58.61	48.61	-16.83	-8.76	Pass
4	3.9152	13.05	6.07	19.88	32.93	25.95	56.00	46.00	-23.07	-20.05	Pass
5	5.5244	16.86	5.55	19.92	36.78	25.47	60.00	50.00	-23.22	-24.53	Pass
6	6.4595	15.00	2.75	19.89	34.89	22.64	60.00	50.00	-25.11	-27.36	Pass


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 17 of 929

Test Mode: 03; Line: Neutral line; Modulation:802.11a; Bandwidth:20MHz; Antenna:Dipole;
Channel:middle

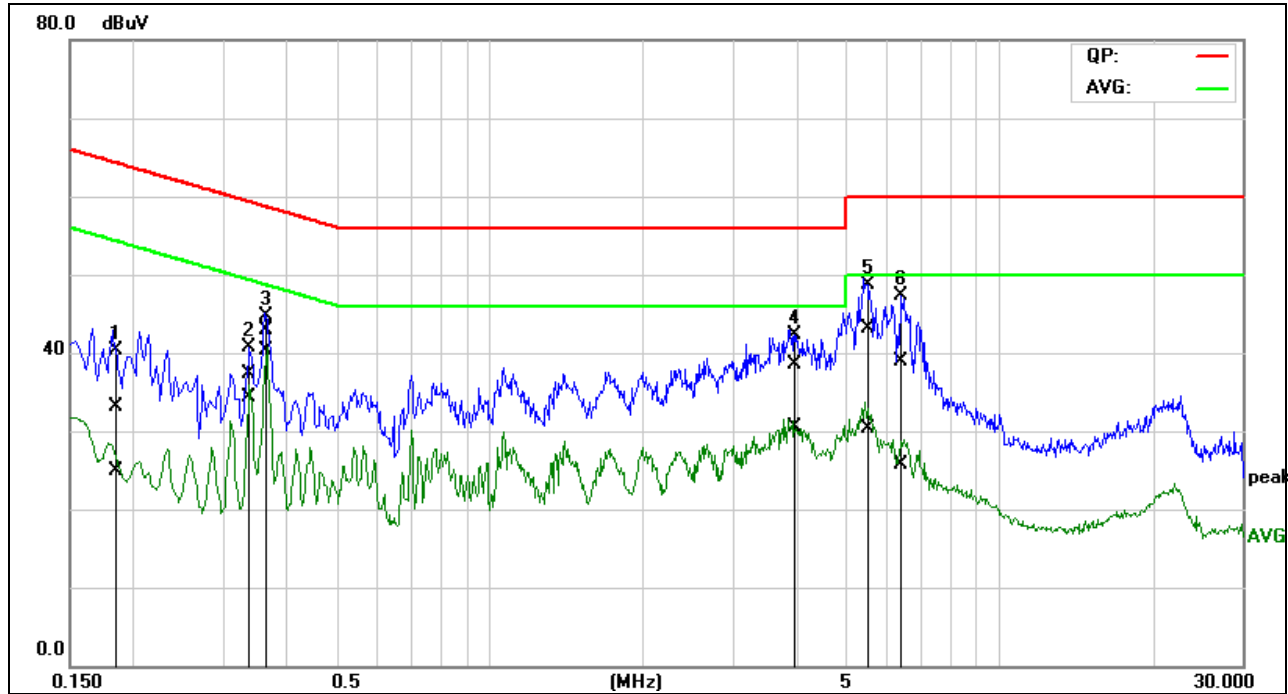

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1858	12.89	4.80	20.13	33.02	24.93	64.22	54.22	-31.20	-29.29	Pass
2	0.3403	17.22	14.14	20.09	37.31	34.23	59.20	49.20	-21.89	-14.97	Pass
3*	0.3658	22.73	20.24	20.10	42.83	40.34	58.60	48.60	-15.77	-8.26	Pass
4	3.9403	18.55	10.64	19.91	38.46	30.55	56.00	46.00	-17.54	-15.45	Pass
5	5.4782	23.21	10.44	19.88	43.09	30.32	60.00	50.00	-16.91	-19.68	Pass
6	6.4270	19.05	5.71	19.90	38.95	25.61	60.00	50.00	-21.05	-24.39	Pass

7.2 Duty Cycle

Test Requirement KDB 789033 D02 II B 1

Test Method: KDB 789033 II B 1

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

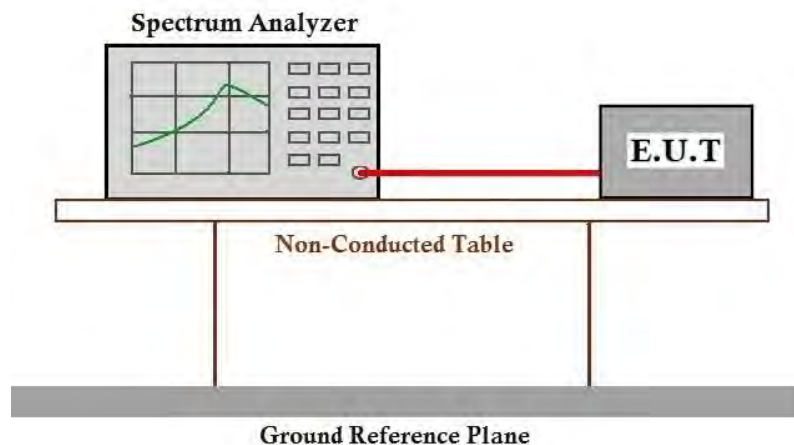



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 19 of 929

7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.3 99% Bandwidth

Test Requirement N/A
Test Method: KDB 789033 II D


7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 25.4 °C Humidity: 48.2 % RH Atmospheric Pressure: 1010 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

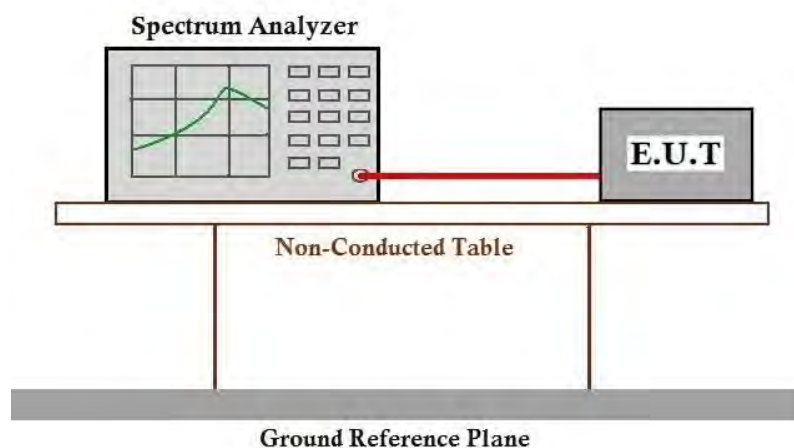



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 21 of 929

7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)
Test Method: KDB 789033 D02 II C 1


7.4.1 E.U.T. Operation

Operating Environment:
Temperature: 25.4 °C Humidity: 48.2 % RH Atmospheric Pressure: 1010 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

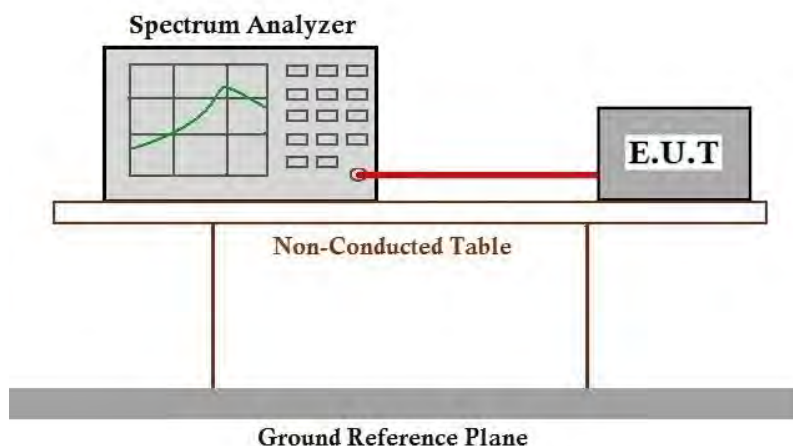

7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Measurement Distance: 3m

Limit:

Frequency band(MHz)	Limit
5725-5850	≥ 500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

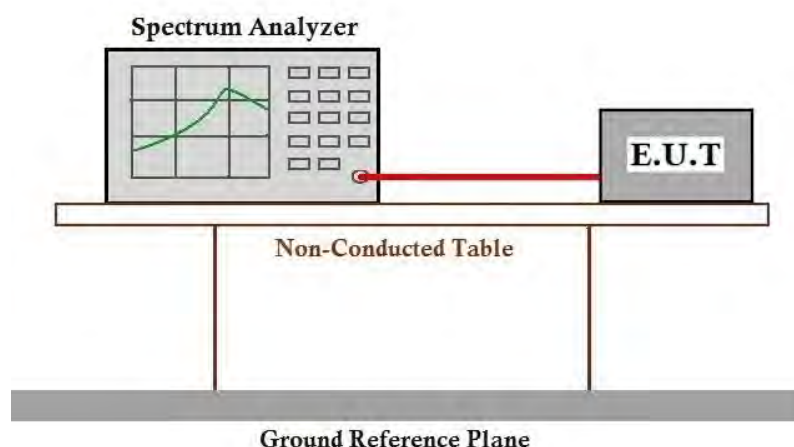

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 24 of 929

7.6 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) or 11dBm+10logB*
5470-5725	≤250mW(24dBm) or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

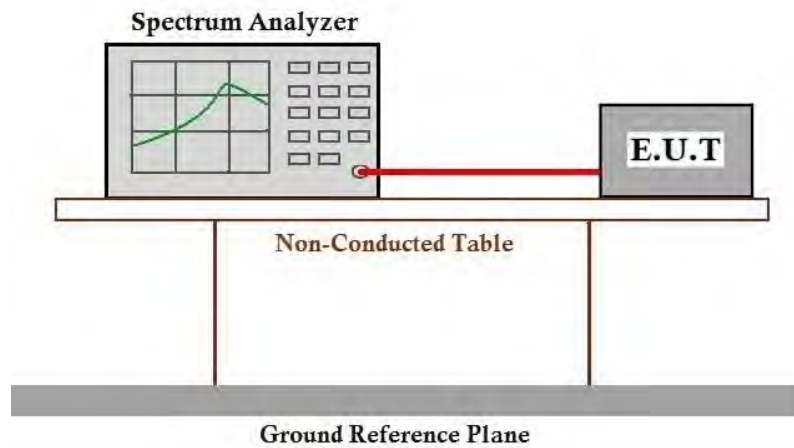

7.6.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 26 of 929

7.7 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II F

Measurement Distance: 3m

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

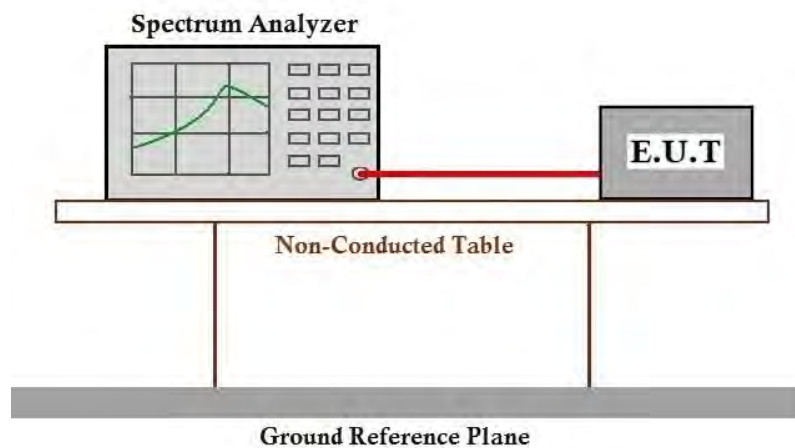

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 28 of 929

7.8 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 50.5 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Pre-scan	01	TX mode (U-NII 1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Pre-scan	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Pre-scan	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

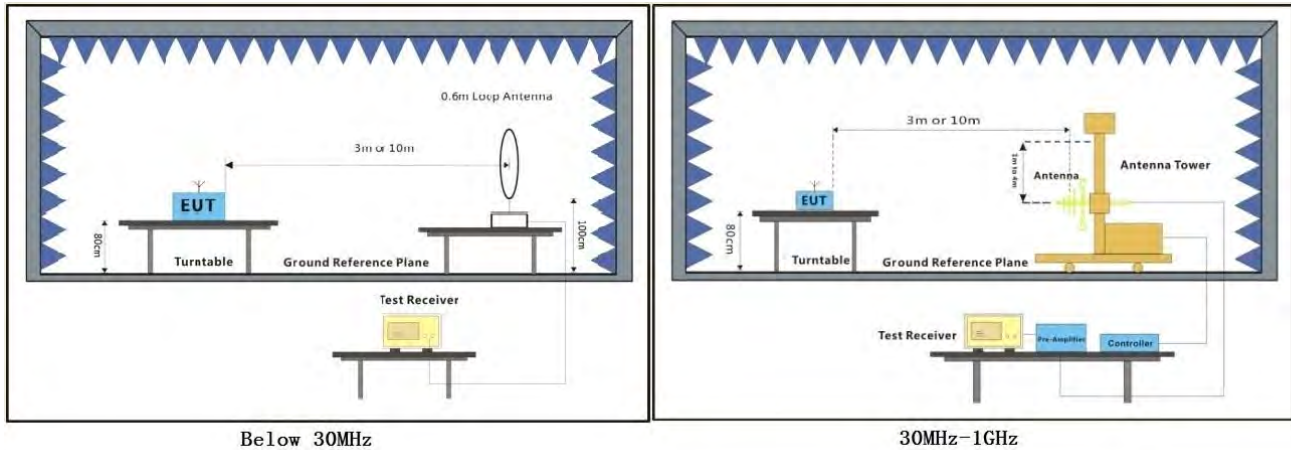

7.8.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low which was attenuated more than 20dB below the limit and was not reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 30 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Antenna:Dipole;
Channel:middle

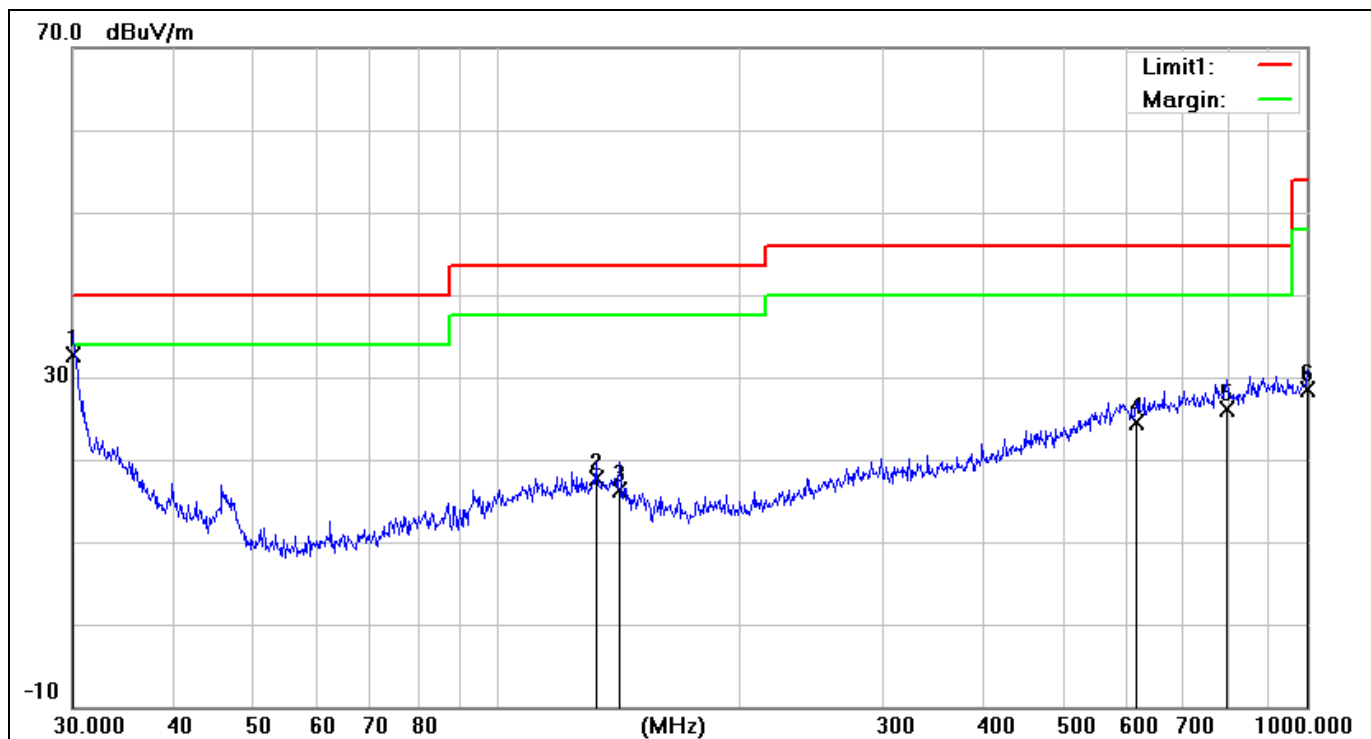

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.0000	13.27	19.42	32.69	40.00	-7.31	100	311	QP
2	132.6850	3.32	14.31	17.63	43.50	-25.87	100	5	QP
3	141.8262	2.35	13.87	16.22	43.50	-27.28	100	242	QP
4	616.3718	1.62	22.89	24.51	46.00	-21.49	100	228	QP
5	796.1830	1.48	24.63	26.11	46.00	-19.89	200	248	QP
6	1000.0000	2.52	25.97	28.49	54.00	-25.51	100	360	QP


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 31 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Antenna:Dipole;
Channel:middle

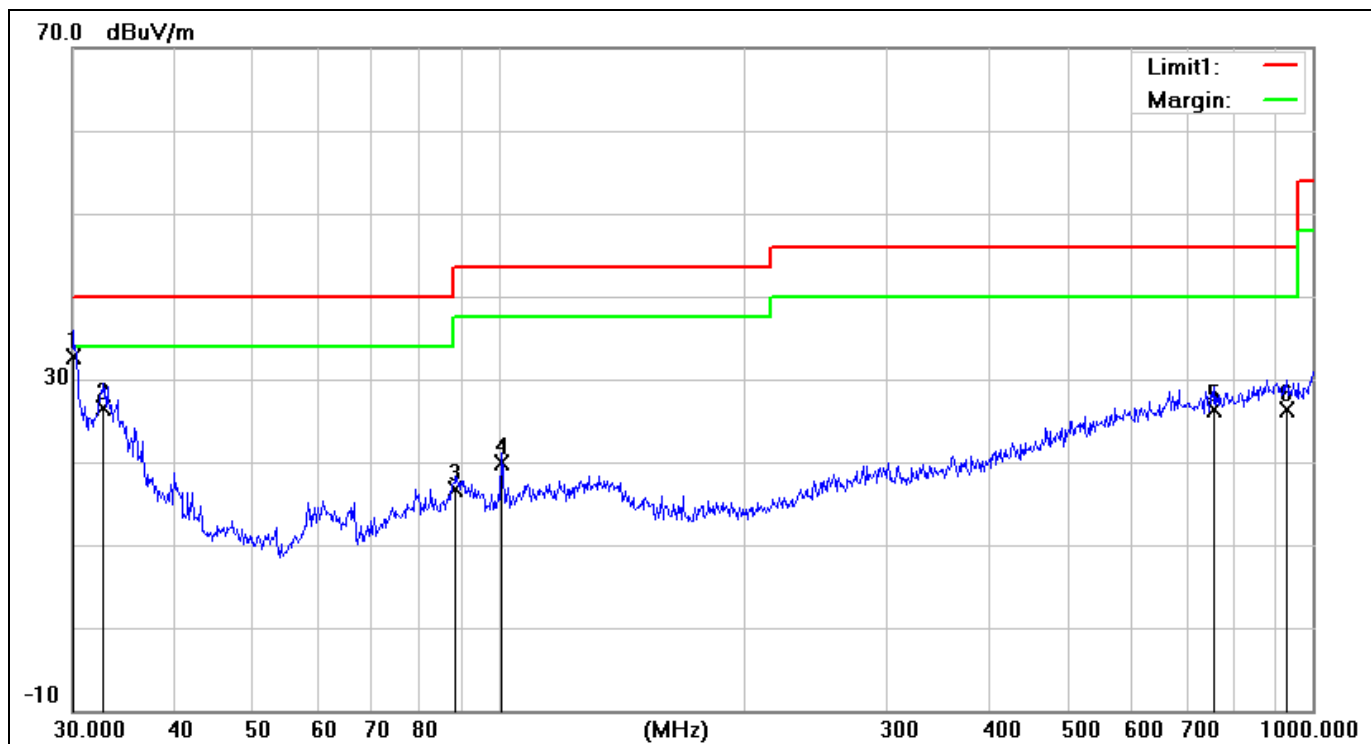

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.0000	13.21	19.42	32.63	40.00	-7.37	100	30	QP
2	32.7486	8.92	17.49	26.41	40.00	-13.59	100	336	QP
3	88.6525	5.23	11.51	16.74	43.50	-26.76	200	331	QP
4	100.9340	7.08	12.77	19.85	43.50	-23.65	100	325	QP
5	758.0408	2.52	23.78	26.30	46.00	-19.70	100	85	QP
6	929.0082	0.96	25.34	26.30	46.00	-19.70	100	287	QP

Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 32 of 929

7.9 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1GHz	500	3
*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.		

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C

Humidity: 50.5 % RH


Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII 1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII 2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII 2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and

		found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII 3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20, Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

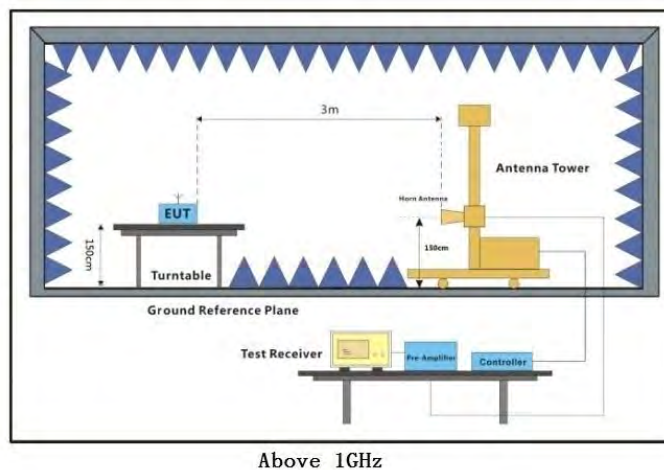

7.9.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low which was attenuated more than 20dB below the limit and was not reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. For band U-NII 1, higher power level setting for FCC in Chapter 4.3 of this report was used during the test.

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 35 of 929

Dipole Antenna

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

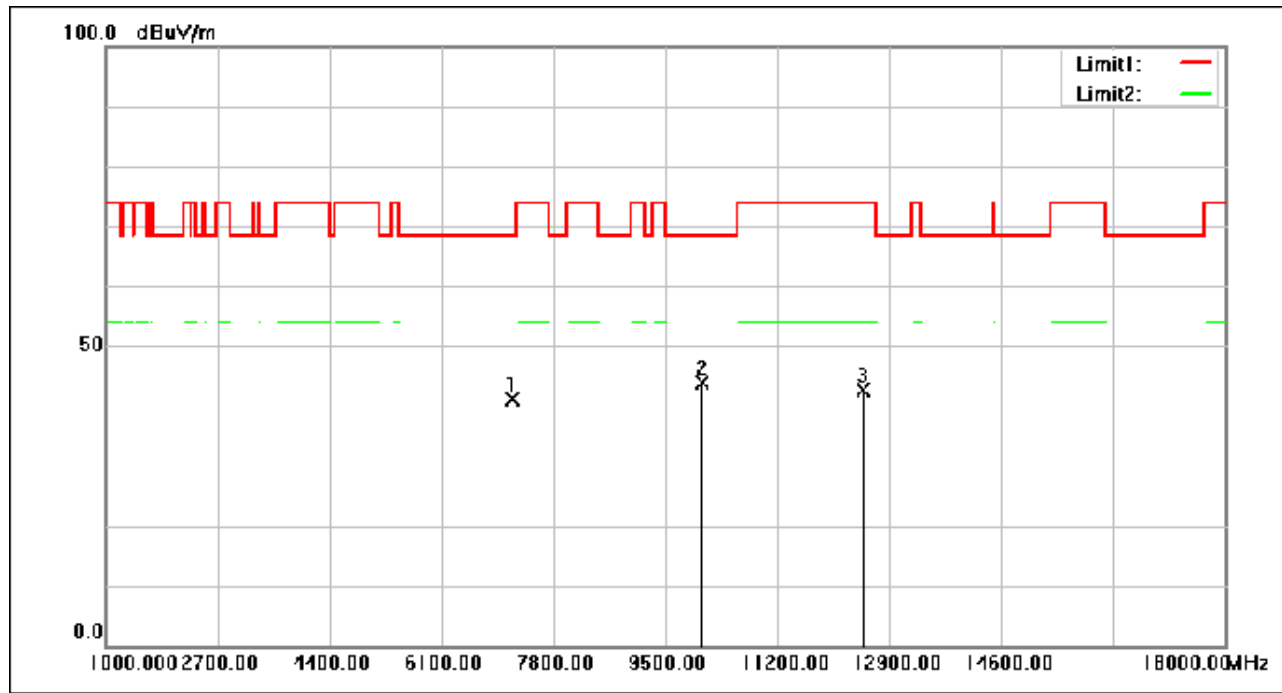

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7171.000	50.96	-9.83	41.13	68.30	-27.17	peak
2	10061.000	50.15	-6.34	43.81	68.30	-24.49	peak
3	12509.000	48.51	-5.96	42.55	74.00	-31.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 36 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

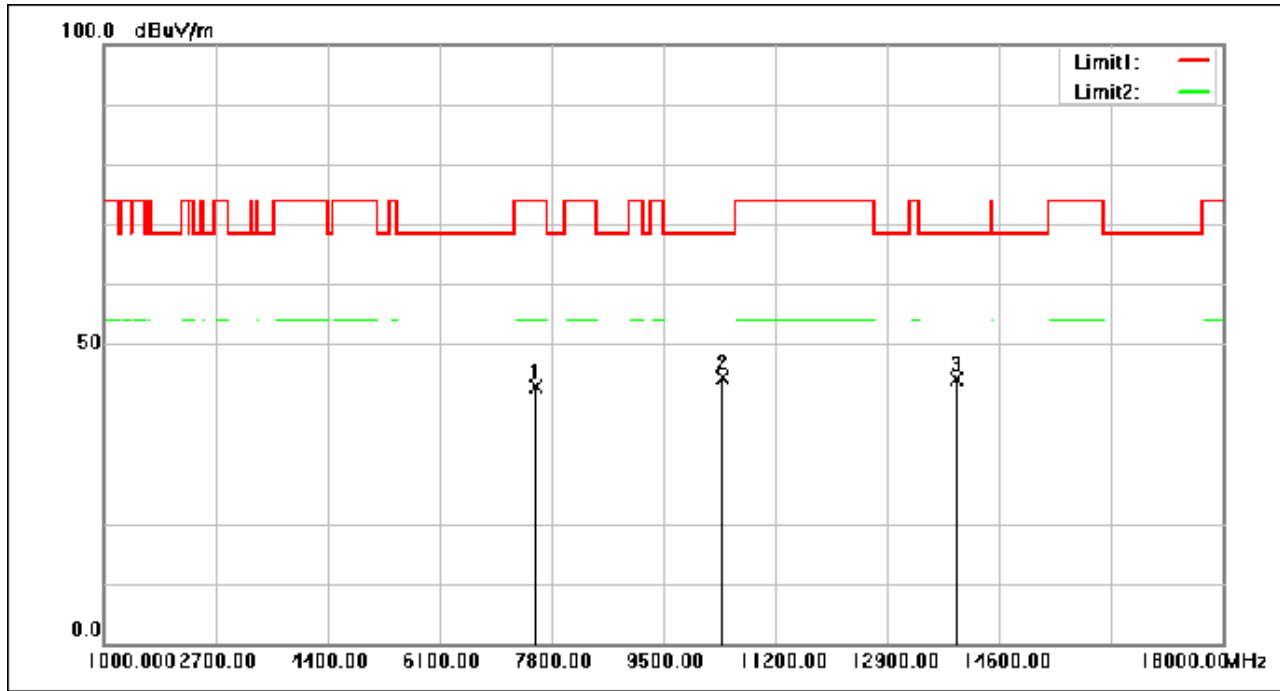

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7562.000	52.41	-9.46	42.95	74.00	-31.05	peak
2	10401.000	50.78	-6.38	44.40	68.30	-23.90	peak
3	13954.000	50.52	-6.27	44.25	68.30	-24.05	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 37 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

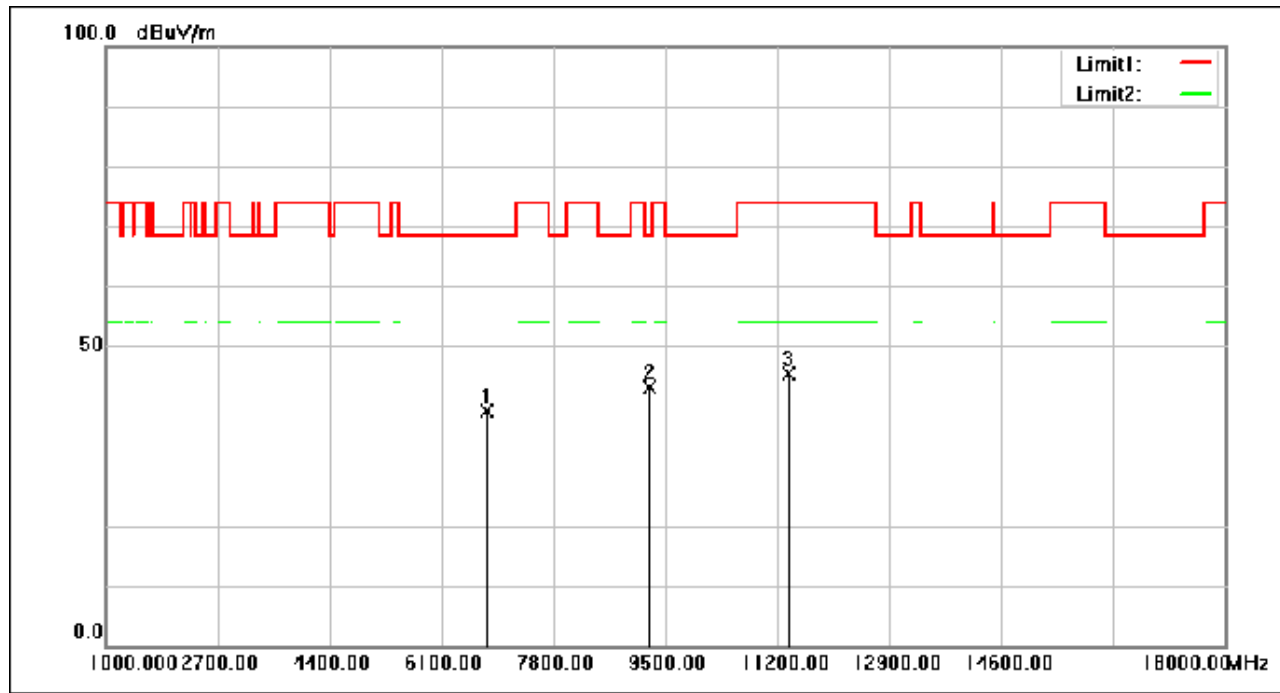

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6797.000	49.23	-10.10	39.13	68.30	-29.17	peak
2	9262.000	50.31	-7.28	43.03	68.30	-25.27	peak
3	11370.000	51.39	-6.13	45.26	74.00	-28.74	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 38 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

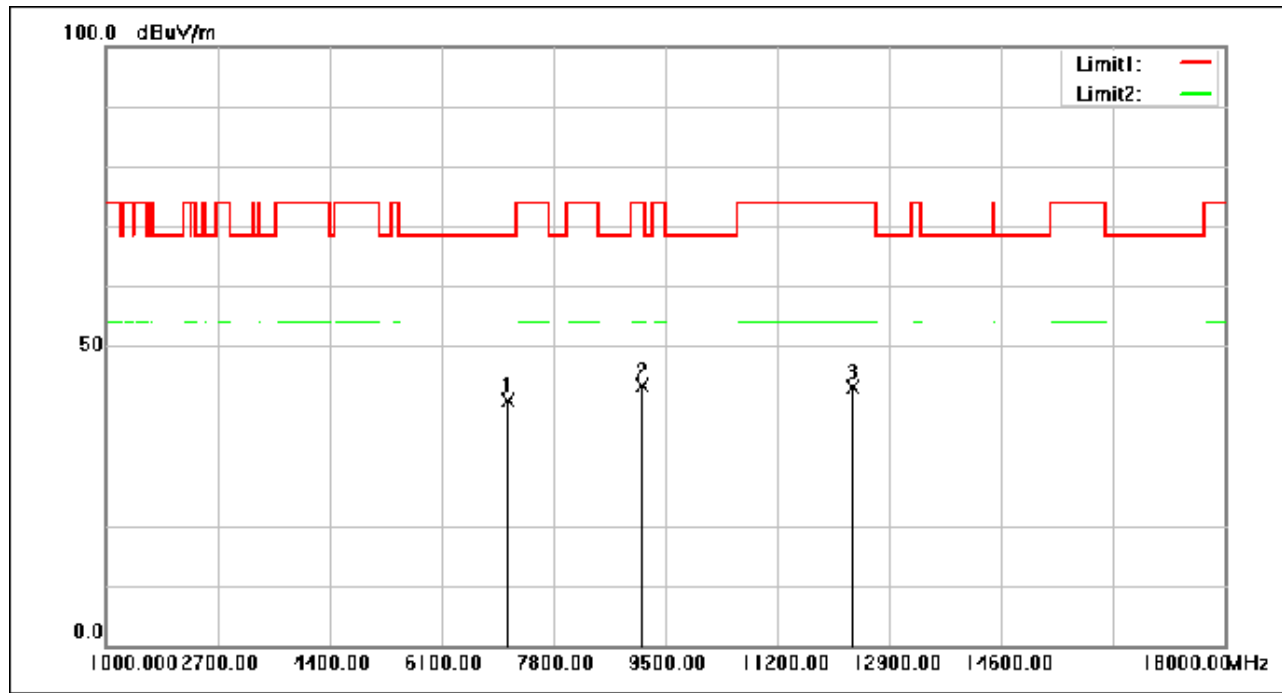

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7103.000	50.74	-9.88	40.86	68.30	-27.44	peak
2	9143.000	50.94	-7.47	43.47	74.00	-30.53	peak
3	12339.000	49.29	-6.10	43.19	74.00	-30.81	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 39 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

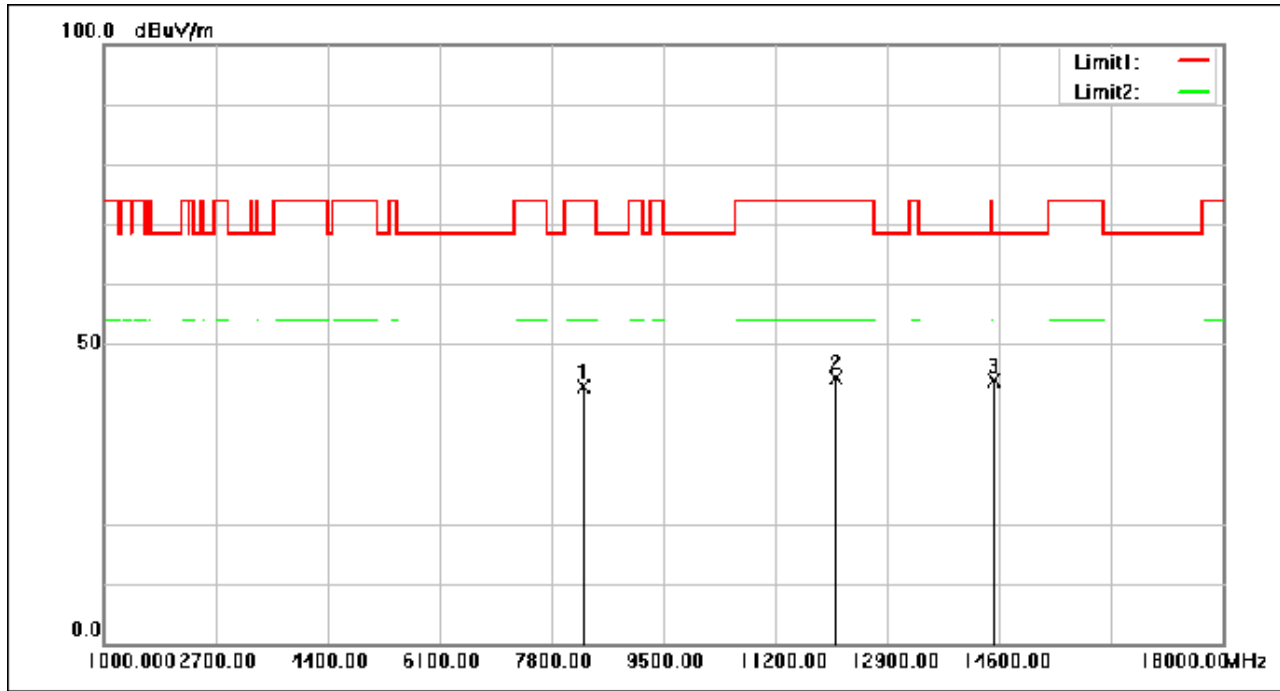

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8293.000	51.86	-9.08	42.78	74.00	-31.22	peak
2	12118.000	50.76	-6.29	44.47	74.00	-29.53	peak
3	14515.000	50.33	-6.51	43.82	68.30	-24.48	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 40 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

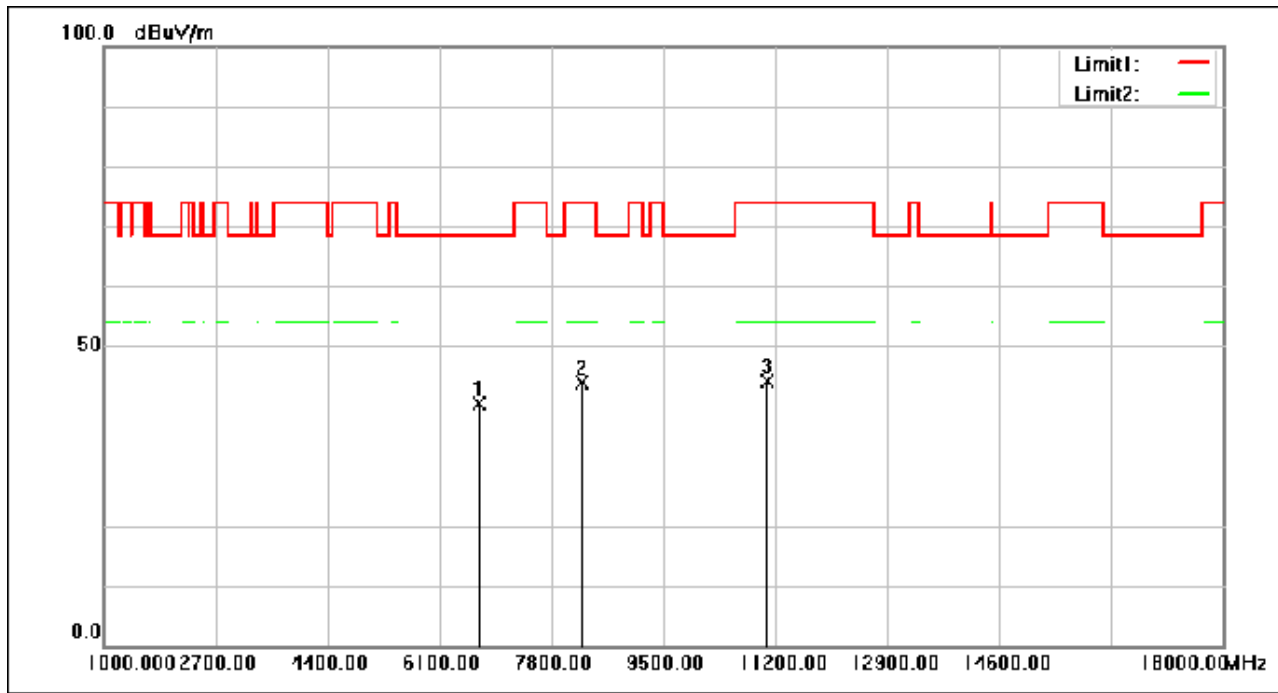

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6695.000	50.67	-10.27	40.40	68.30	-27.90	peak
2	8259.000	53.01	-9.13	43.88	74.00	-30.12	peak
3	11081.000	50.55	-6.32	44.23	74.00	-29.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 41 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

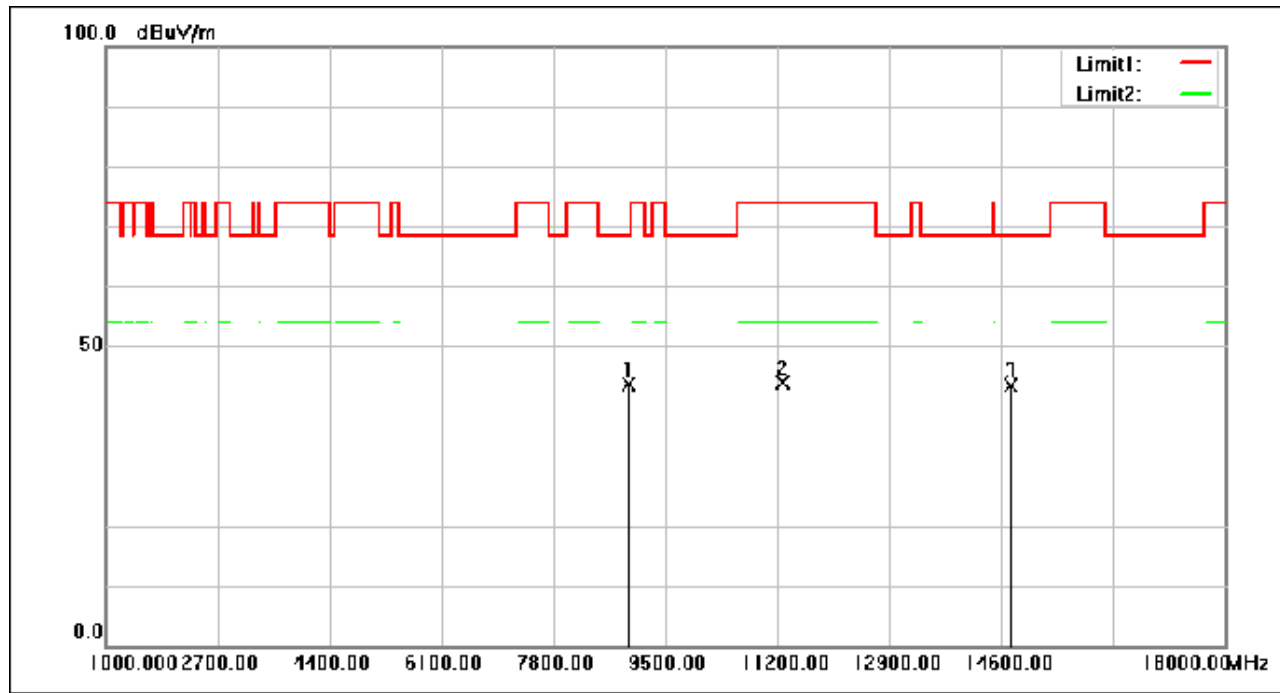

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8939.000	51.37	-7.86	43.51	68.30	-24.79	peak
2	11285.000	50.01	-6.19	43.82	74.00	-30.18	peak
3	14753.000	49.46	-6.07	43.39	68.30	-24.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 42 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

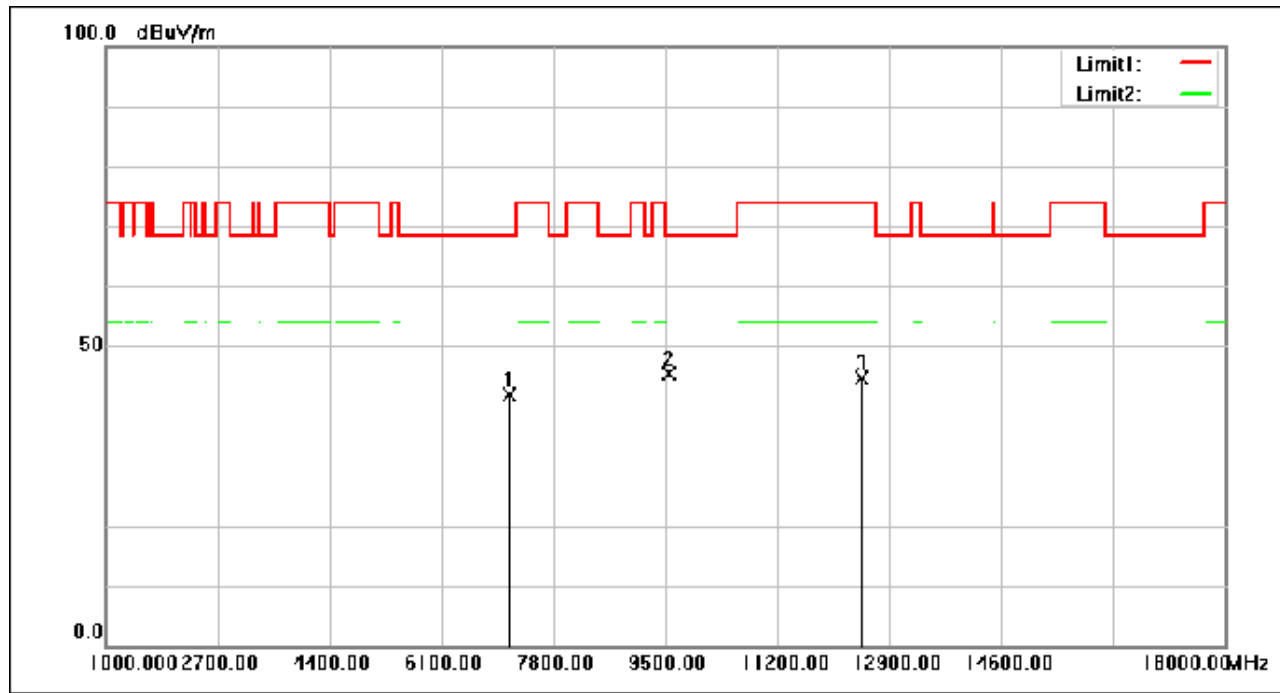

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7137.000	51.62	-9.85	41.77	68.30	-26.53	peak
2	9551.000	52.11	-6.81	45.30	68.30	-23.00	peak
3	12475.000	50.66	-5.99	44.67	74.00	-29.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 43 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

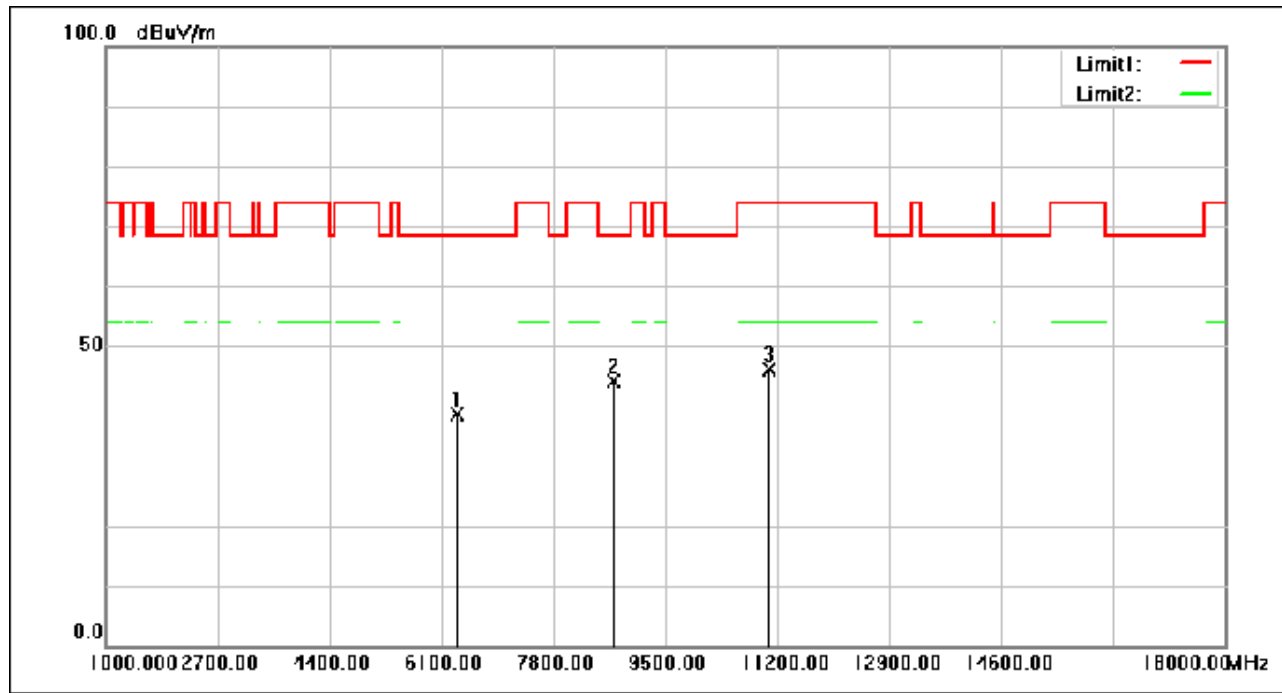

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6338.000	50.25	-11.74	38.51	68.30	-29.79	peak
2	8718.000	52.56	-8.34	44.22	68.30	-24.08	peak
3	11081.000	52.37	-6.32	46.05	74.00	-27.95	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 44 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

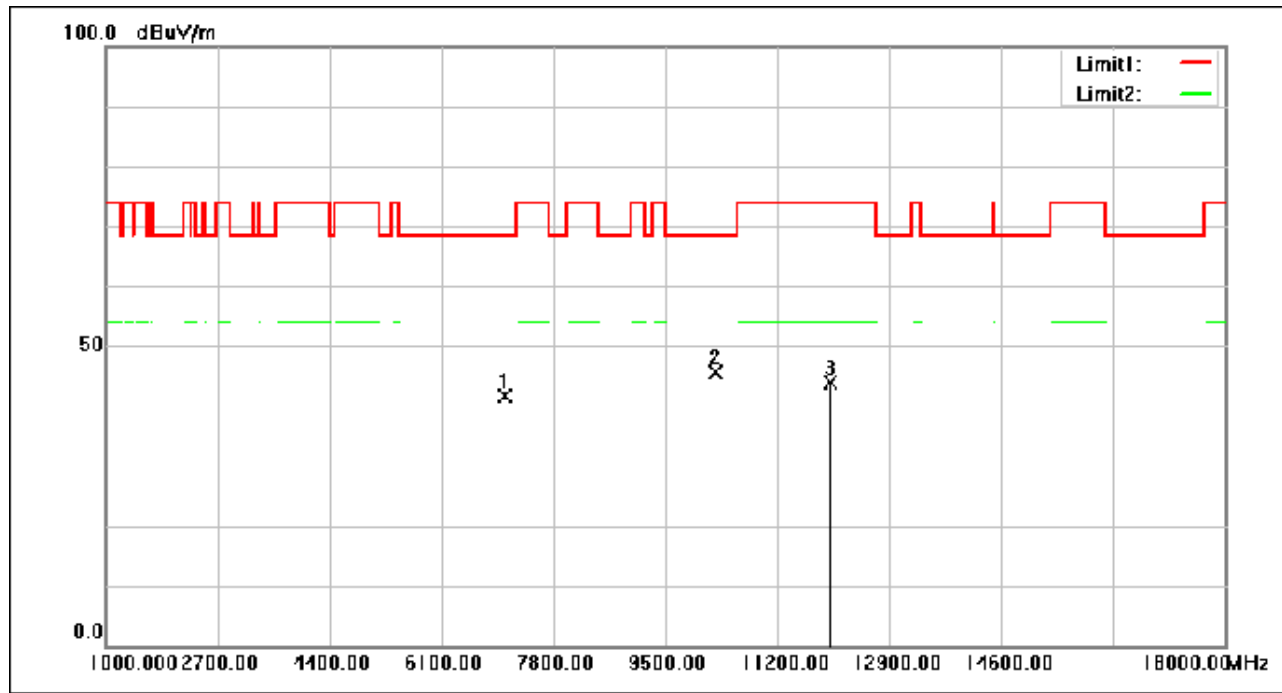

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7069.000	51.51	-9.91	41.60	68.30	-26.70	peak
2	10265.000	51.98	-6.36	45.62	68.30	-22.68	peak
3	11999.000	50.17	-6.39	43.78	74.00	-30.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 45 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

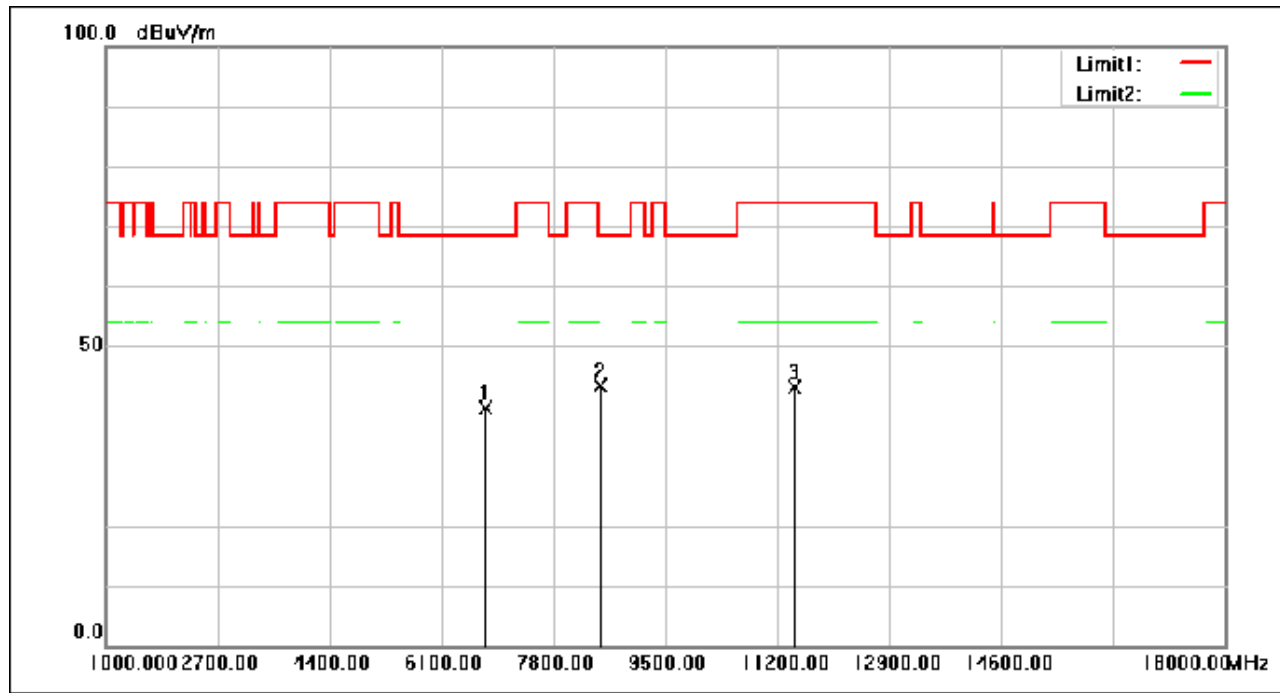

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6763.000	49.63	-10.12	39.51	68.30	-28.79	peak
2	8514.000	52.20	-8.77	43.43	68.30	-24.87	peak
3	11455.000	49.31	-6.09	43.22	74.00	-30.78	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 46 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

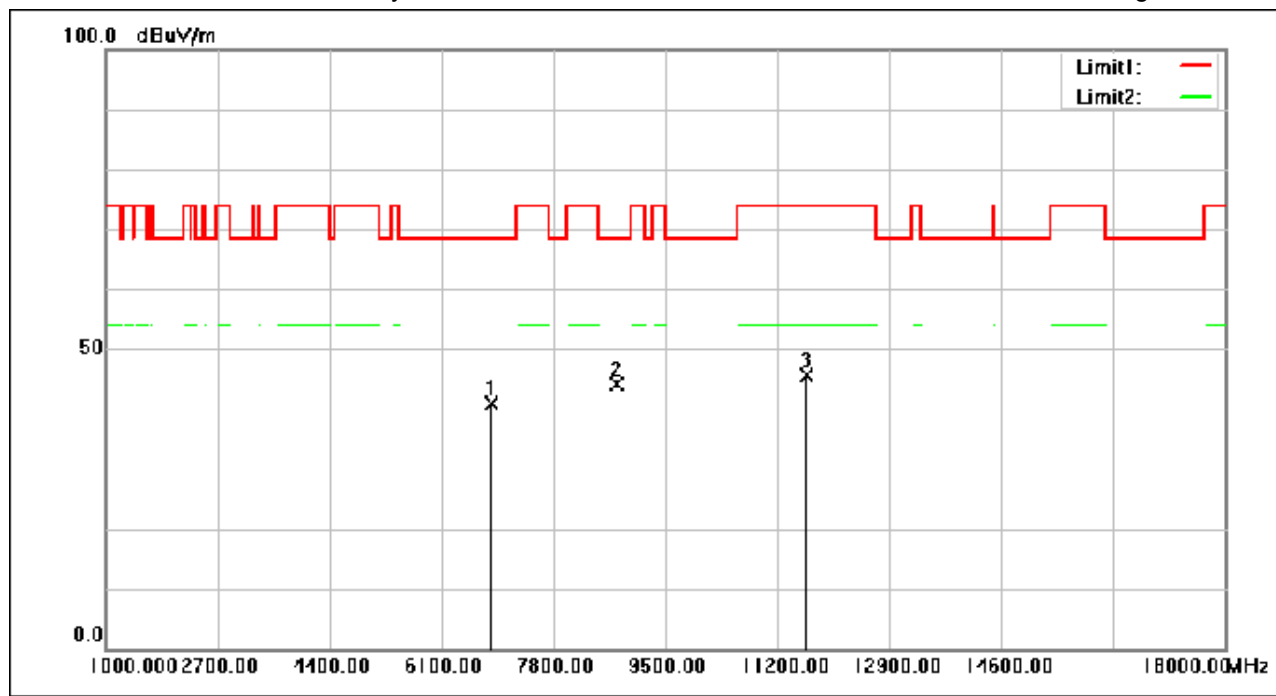

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6865.000	50.86	-10.05	40.81	68.30	-27.49	peak
2	8769.000	52.35	-8.22	44.13	68.30	-24.17	peak
3	11642.000	51.72	-6.18	45.54	74.00	-28.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 47 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

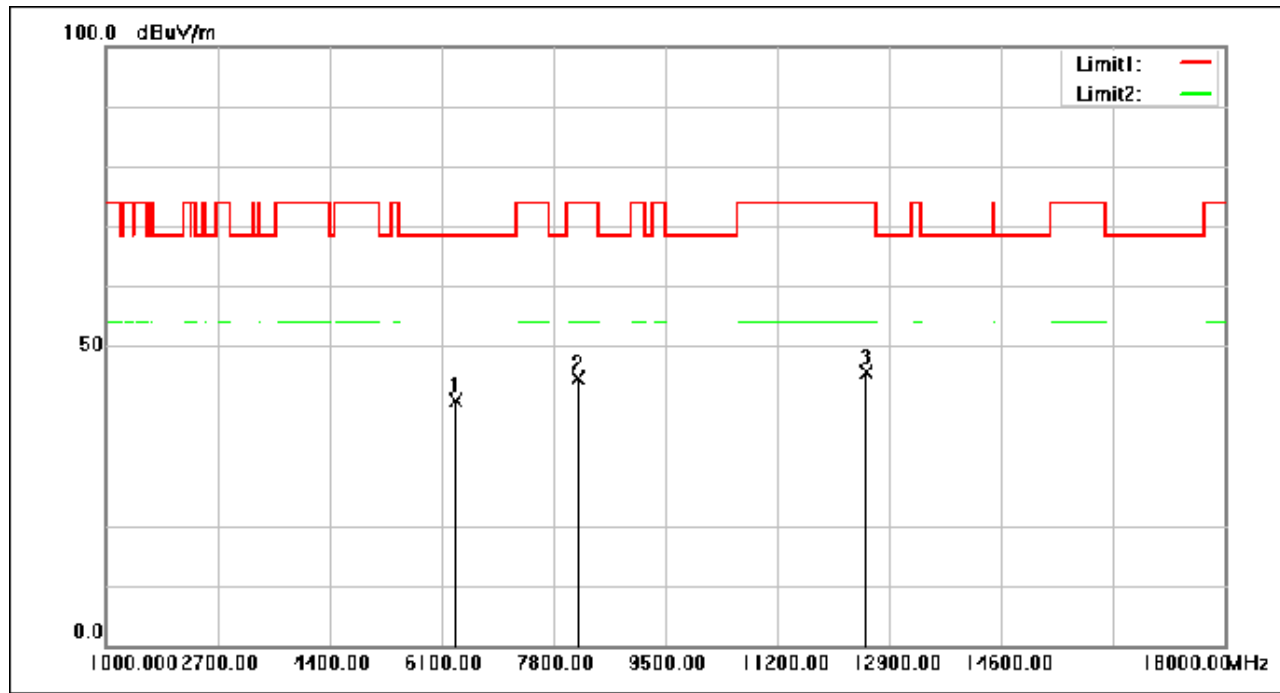

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6321.000	52.70	-11.81	40.89	68.30	-27.41	peak
2	8174.000	53.88	-9.24	44.64	74.00	-29.36	peak
3	12543.000	51.46	-5.93	45.53	74.00	-28.47	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 48 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

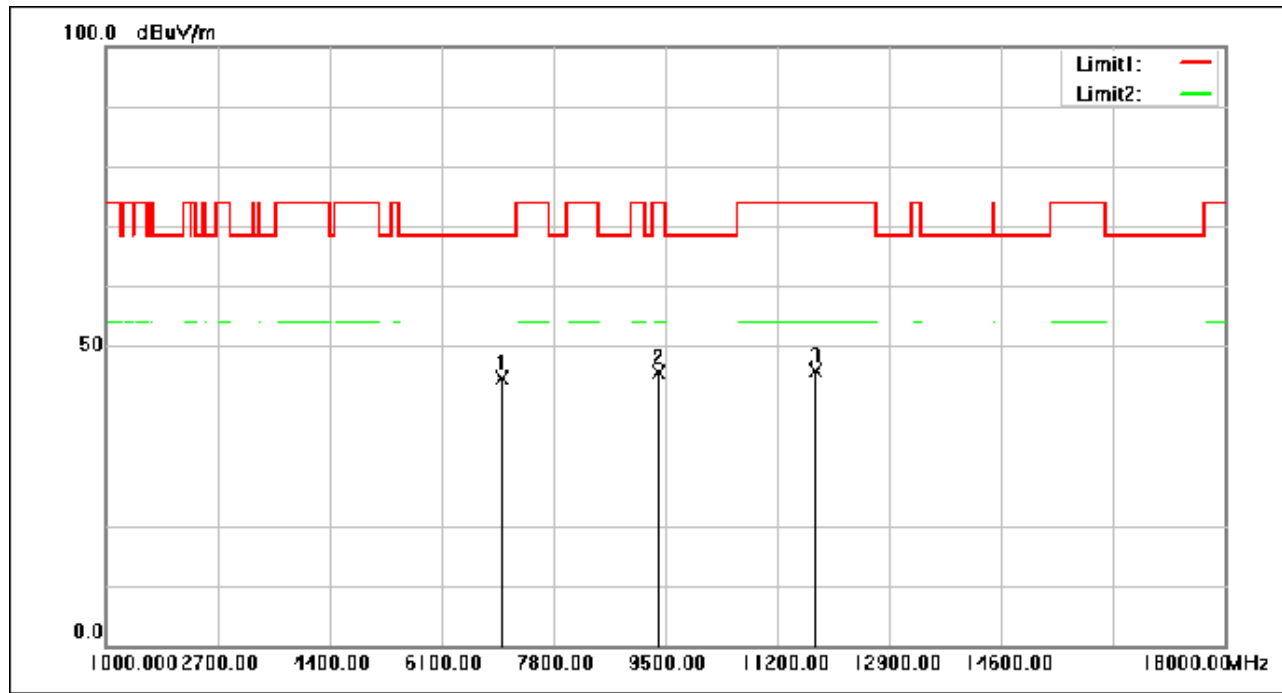

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7018.000	54.48	-9.95	44.53	68.30	-23.77	peak
2	9398.000	52.82	-7.07	45.75	74.00	-28.25	peak
3	11778.000	52.19	-6.28	45.91	74.00	-28.09	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 49 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

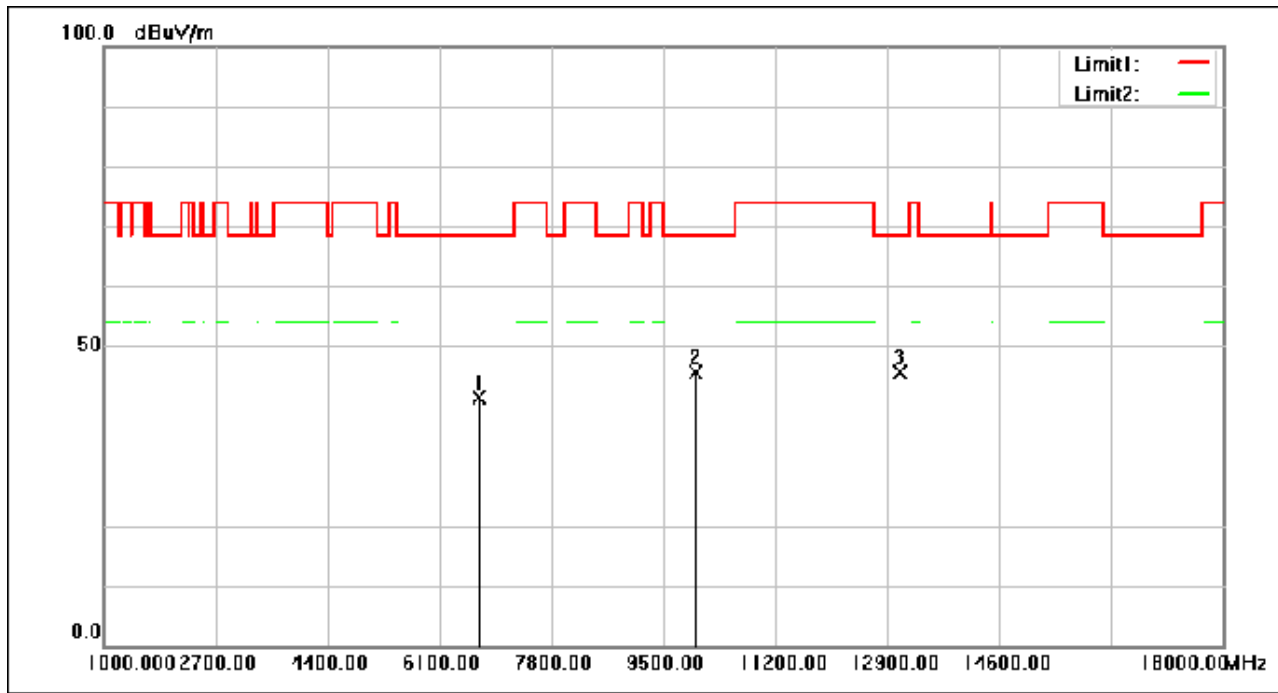

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6695.000	51.67	-10.27	41.40	68.30	-26.90	peak
2	9993.000	52.03	-6.33	45.70	68.30	-22.60	peak
3	13087.000	51.08	-5.51	45.57	68.30	-22.73	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 50 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

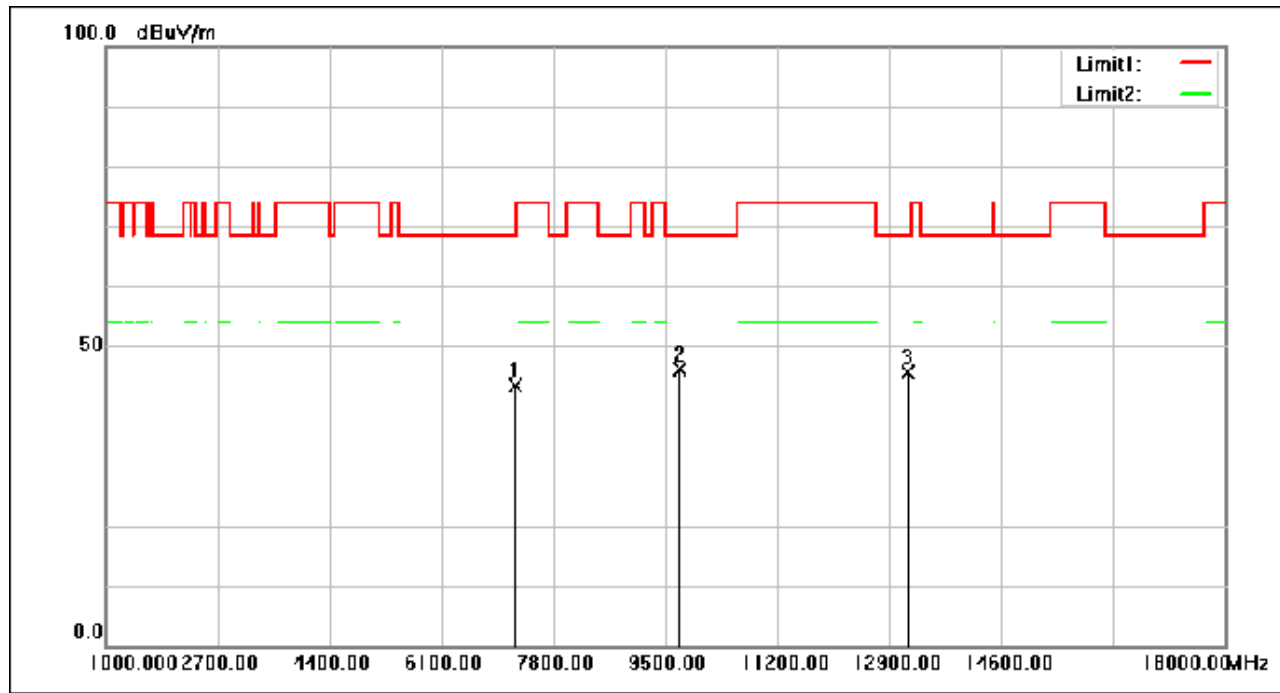

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7222.000	53.05	-9.78	43.27	68.30	-25.03	peak
2	9704.000	52.59	-6.54	46.05	68.30	-22.25	peak
3	13172.000	51.21	-5.55	45.66	68.30	-22.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 51 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

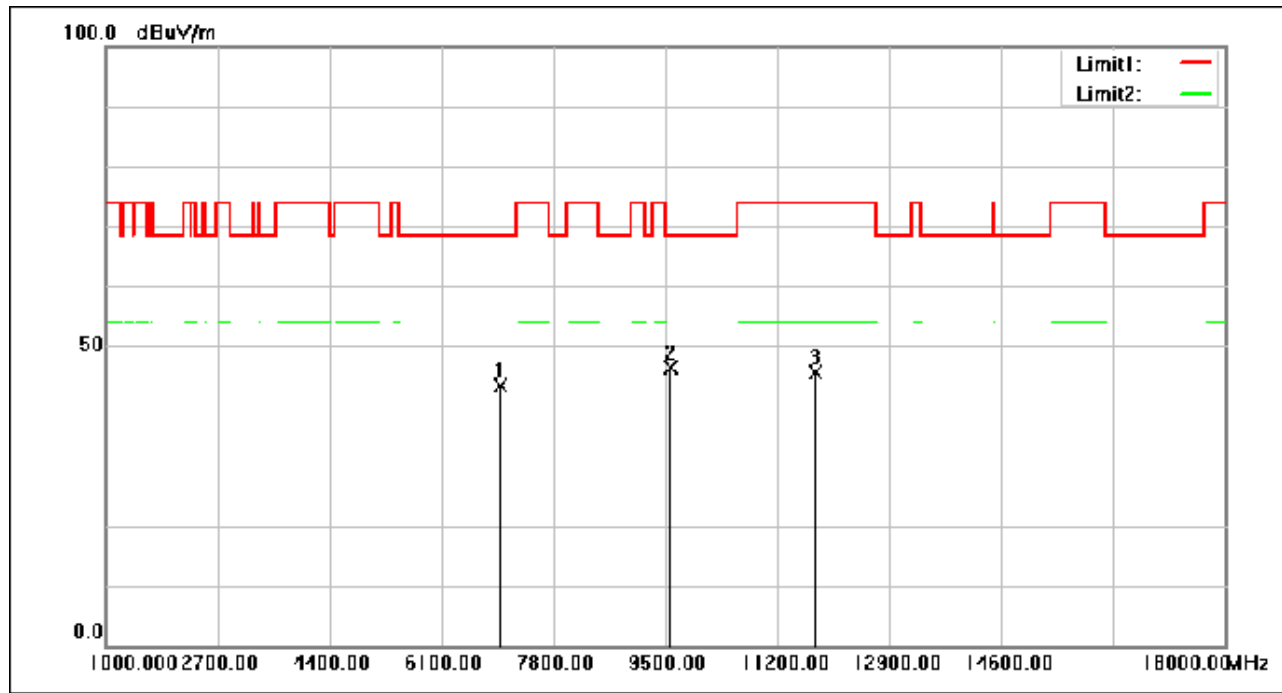

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7001.000	53.32	-9.96	43.36	68.30	-24.94	peak
2	9568.000	53.17	-6.78	46.39	68.30	-21.91	peak
3	11778.000	51.96	-6.28	45.68	74.00	-28.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 52 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

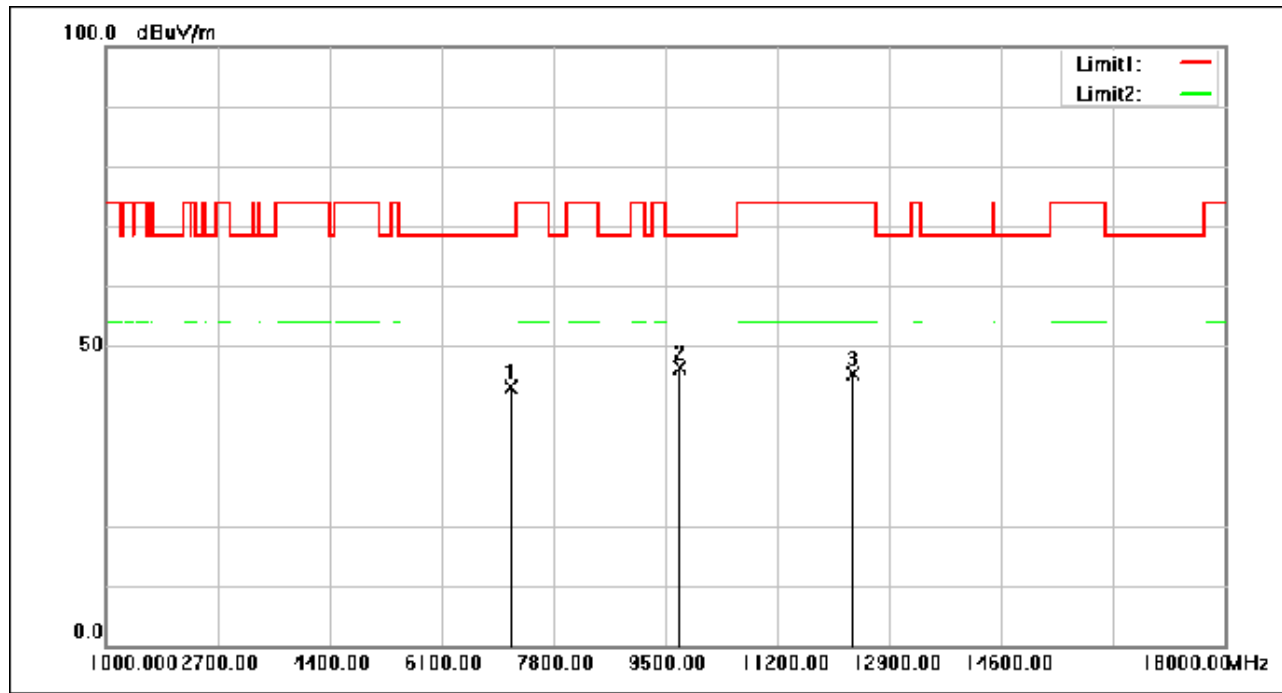

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7154.000	53.01	-9.84	43.17	68.30	-25.13	peak
2	9721.000	52.80	-6.50	46.30	68.30	-22.00	peak
3	12339.000	51.54	-6.10	45.44	74.00	-28.56	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 53 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

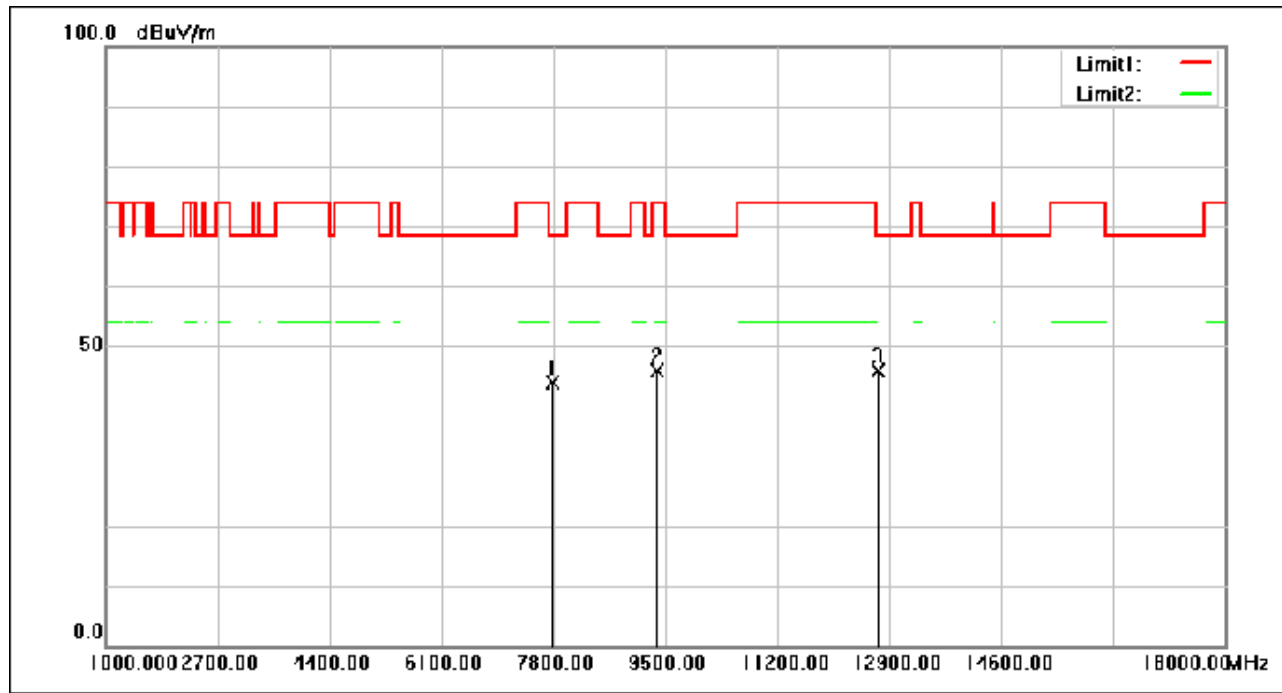

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7783.000	53.44	-9.48	43.96	68.30	-24.34	peak
2	9381.000	53.09	-7.09	46.00	74.00	-28.00	peak
3	12730.000	51.65	-5.77	45.88	68.30	-22.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 54 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

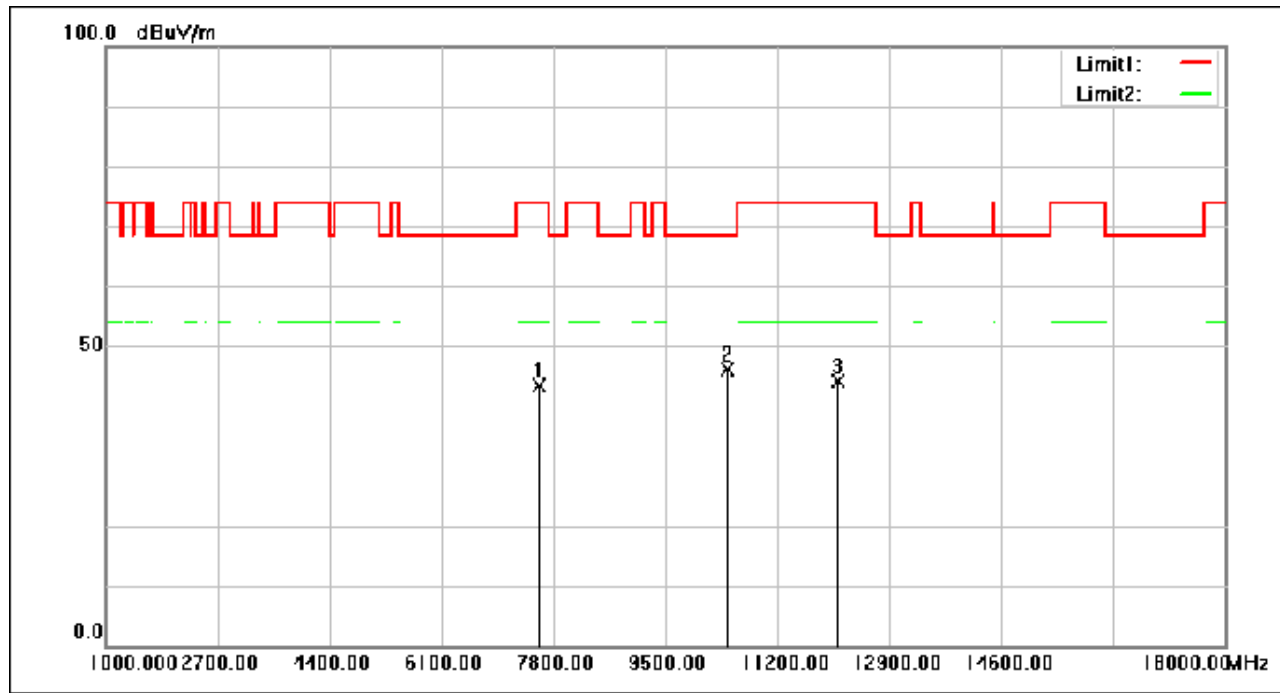

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7579.000	52.89	-9.47	43.42	74.00	-30.58	peak
2	10435.000	52.60	-6.38	46.22	68.30	-22.08	peak
3	12118.000	50.50	-6.29	44.21	74.00	-29.79	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 55 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

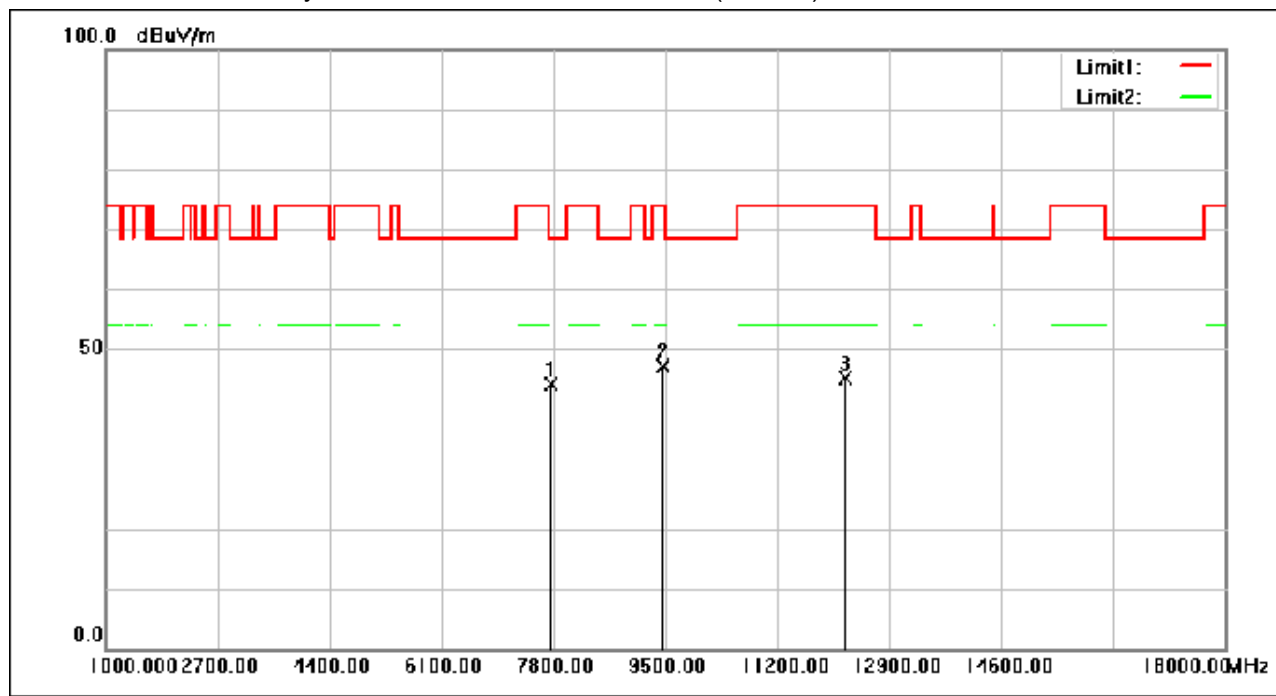

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7766.000	53.60	-9.49	44.11	68.30	-24.19	peak
2	9466.000	54.18	-6.96	47.22	74.00	-26.78	peak
3	12220.000	51.31	-6.20	45.11	74.00	-28.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 56 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

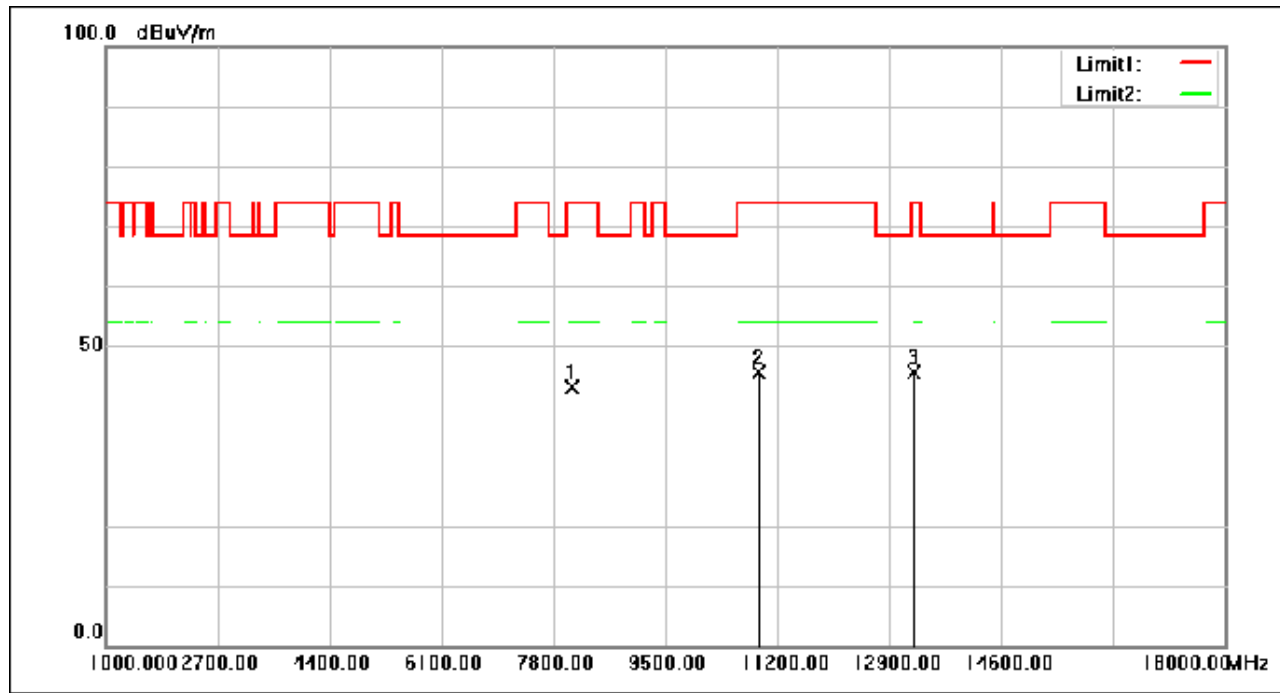

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8072.000	52.63	-9.39	43.24	74.00	-30.76	peak
2	10911.000	51.91	-6.36	45.55	74.00	-28.45	peak
3	13274.000	51.29	-5.61	45.68	74.00	-28.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 57 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

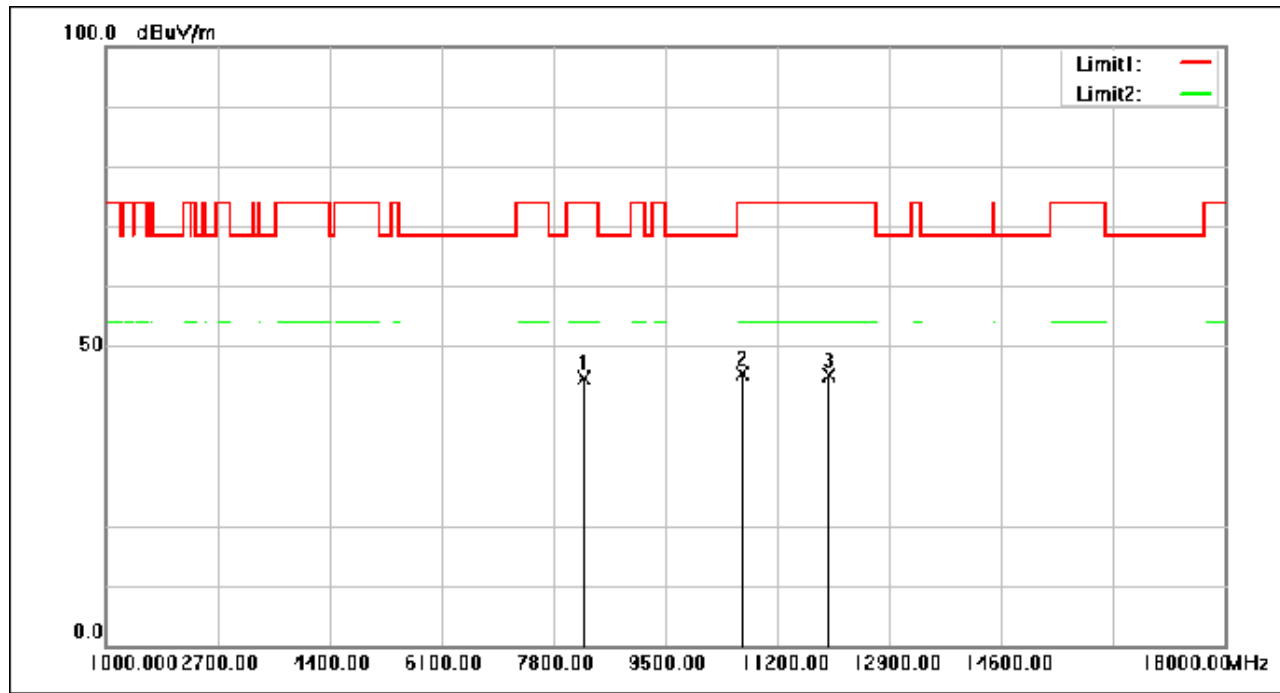

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8259.000	53.72	-9.13	44.59	74.00	-29.41	peak
2	10673.000	51.65	-6.38	45.27	74.00	-28.73	peak
3	11982.000	51.62	-6.39	45.23	74.00	-28.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 58 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

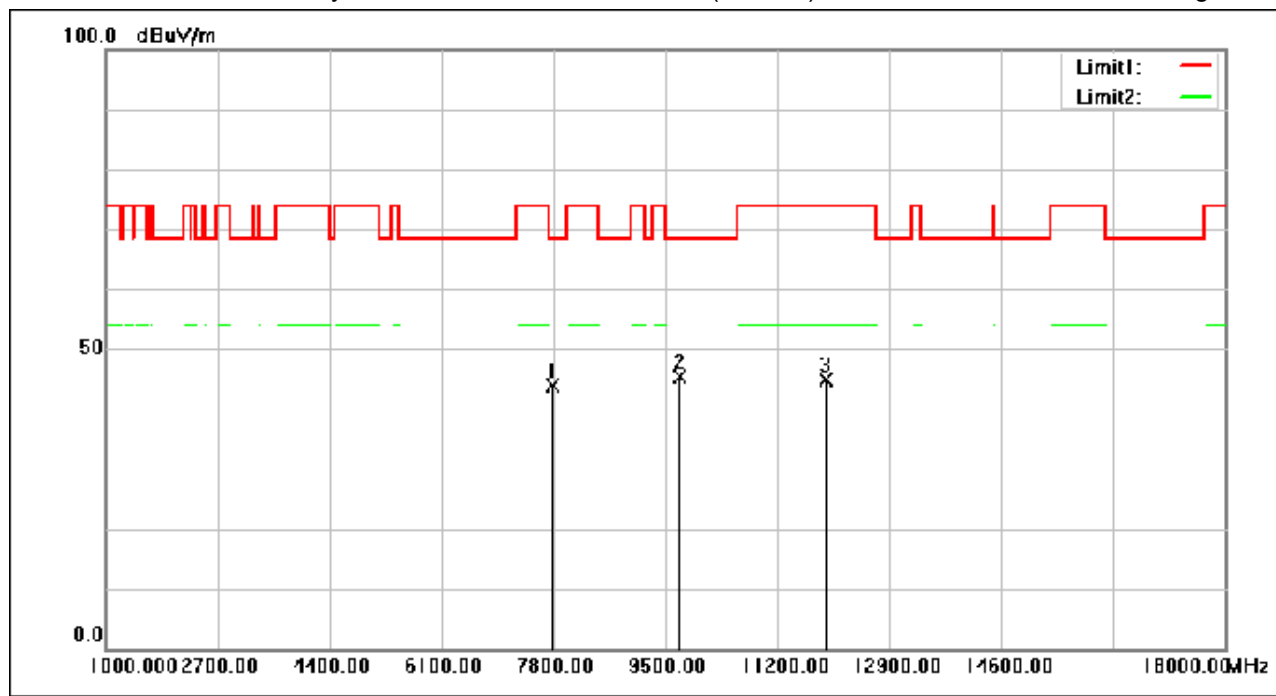

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7783.000	53.37	-9.48	43.89	68.30	-24.41	peak
2	9721.000	51.95	-6.50	45.45	68.30	-22.85	peak
3	11931.000	51.22	-6.39	44.83	74.00	-29.17	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 59 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

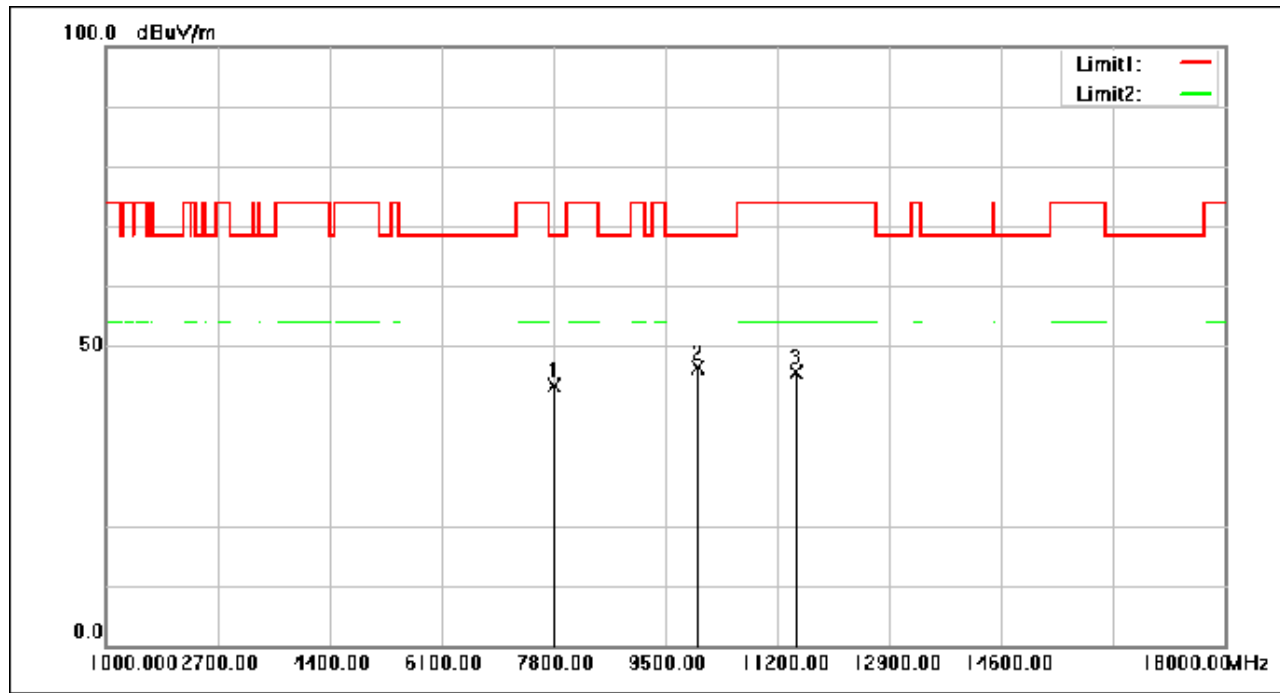

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7817.000	52.94	-9.49	43.45	68.30	-24.85	peak
2	9993.000	52.69	-6.33	46.36	68.30	-21.94	peak
3	11489.000	51.78	-6.07	45.71	74.00	-28.29	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 60 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

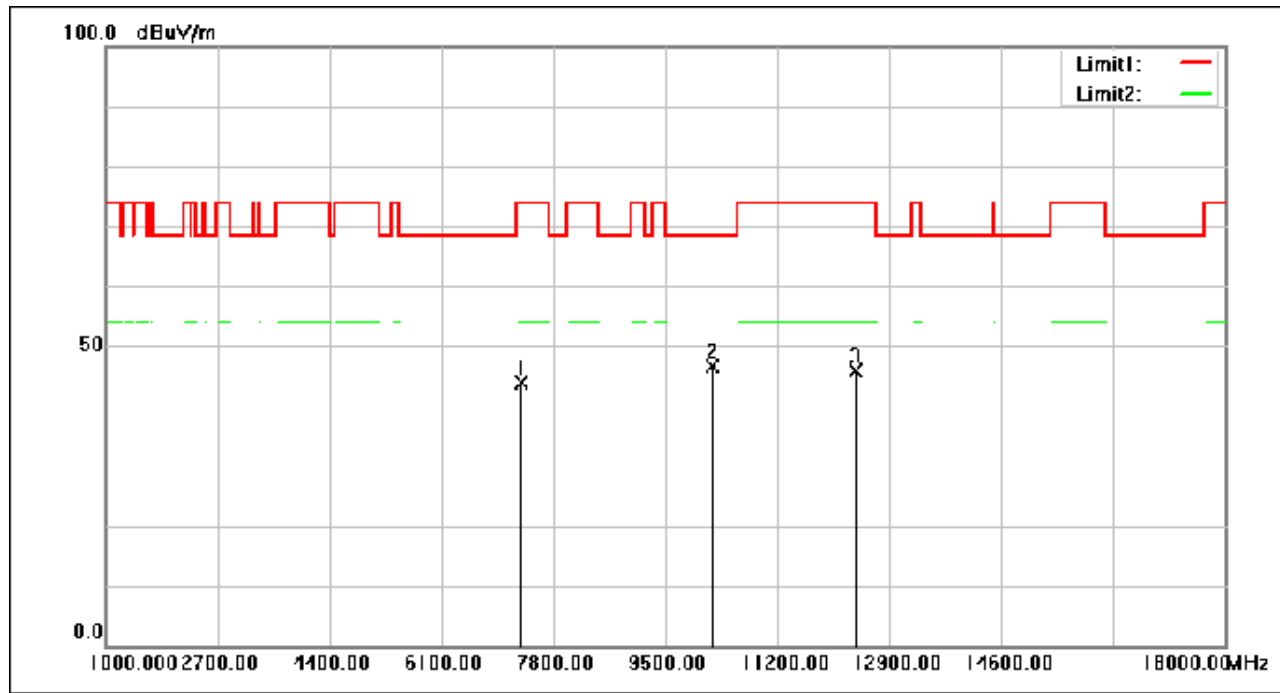

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7307.000	53.48	-9.71	43.77	74.00	-30.23	peak
2	10214.000	52.87	-6.35	46.52	68.30	-21.78	peak
3	12390.000	51.82	-6.06	45.76	74.00	-28.24	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 61 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

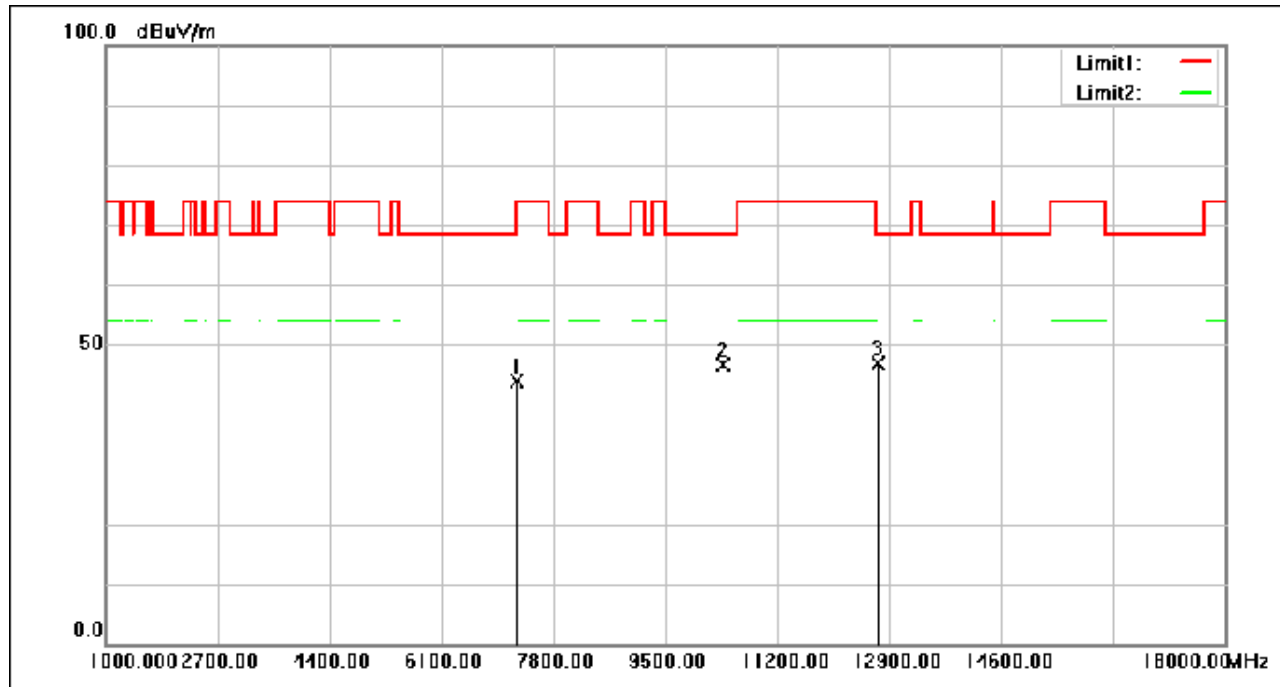

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7239.000	53.63	-9.76	43.87	68.30	-24.43	peak
2	10367.000	52.89	-6.37	46.52	68.30	-21.78	peak
3	12730.000	52.67	-5.77	46.90	68.30	-21.40	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 62 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

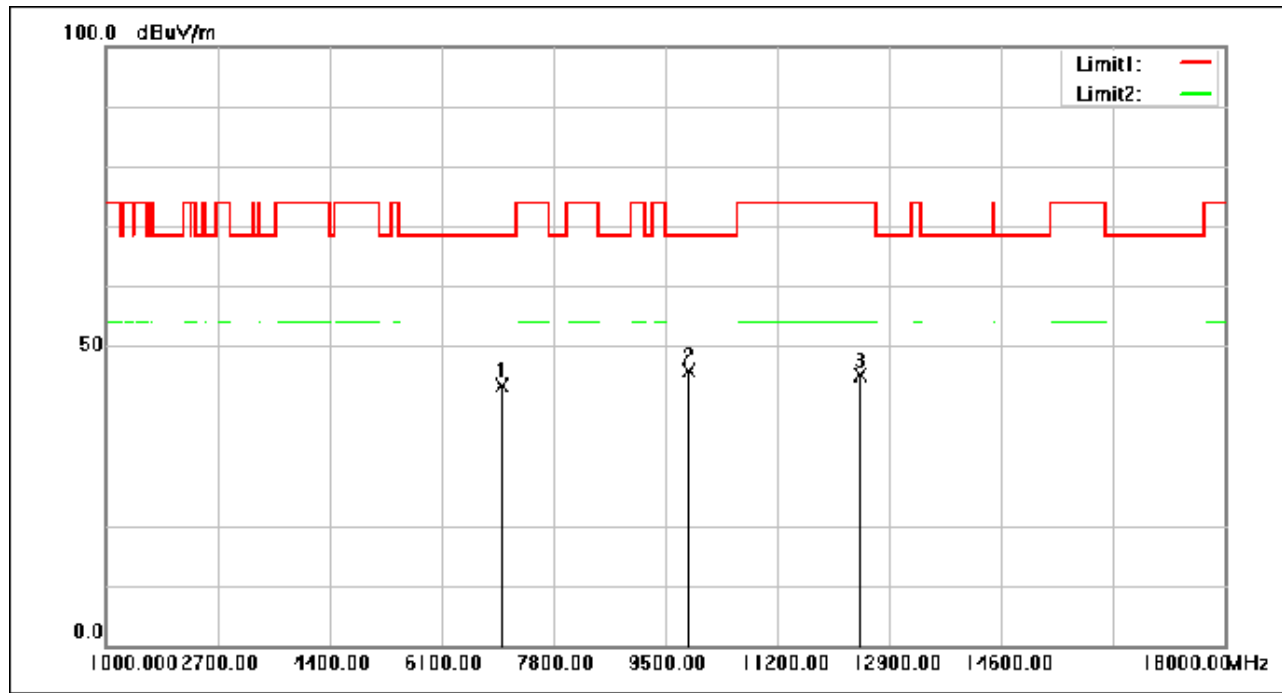

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7018.000	53.31	-9.95	43.36	68.30	-24.94	peak
2	9840.000	52.14	-6.30	45.84	68.30	-22.46	peak
3	12458.000	51.06	-6.00	45.06	74.00	-28.94	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 63 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

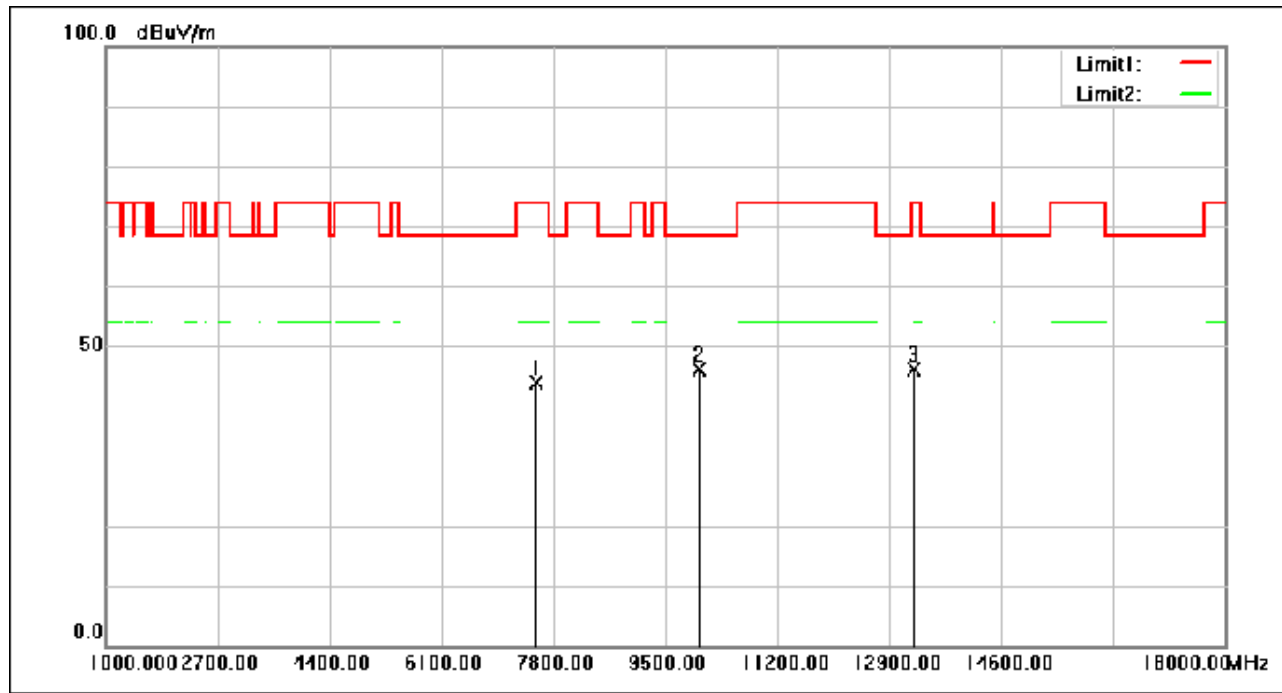

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7528.000	53.35	-9.46	43.89	74.00	-30.11	peak
2	10010.000	52.39	-6.33	46.06	68.30	-22.24	peak
3	13274.000	51.84	-5.61	46.23	74.00	-27.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 64 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

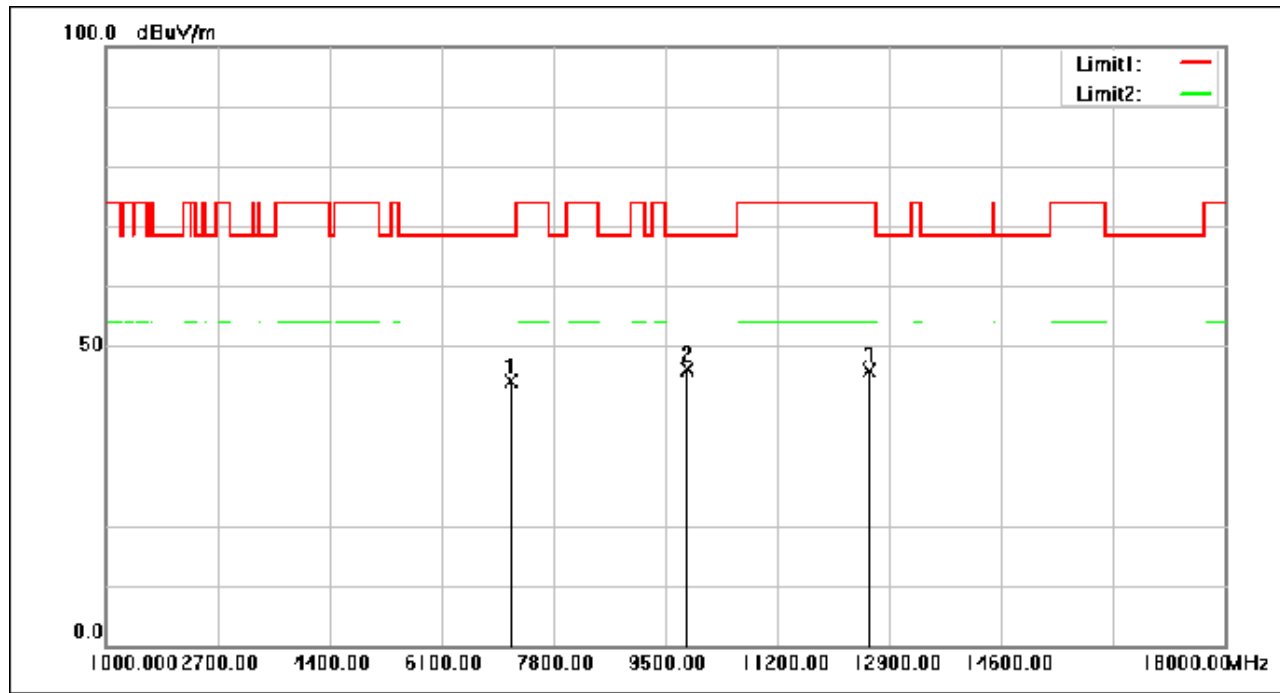

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7154.000	54.02	-9.84	44.18	68.30	-24.12	peak
2	9823.000	52.50	-6.32	46.18	68.30	-22.12	peak
3	12594.000	51.65	-5.88	45.77	74.00	-28.23	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 65 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

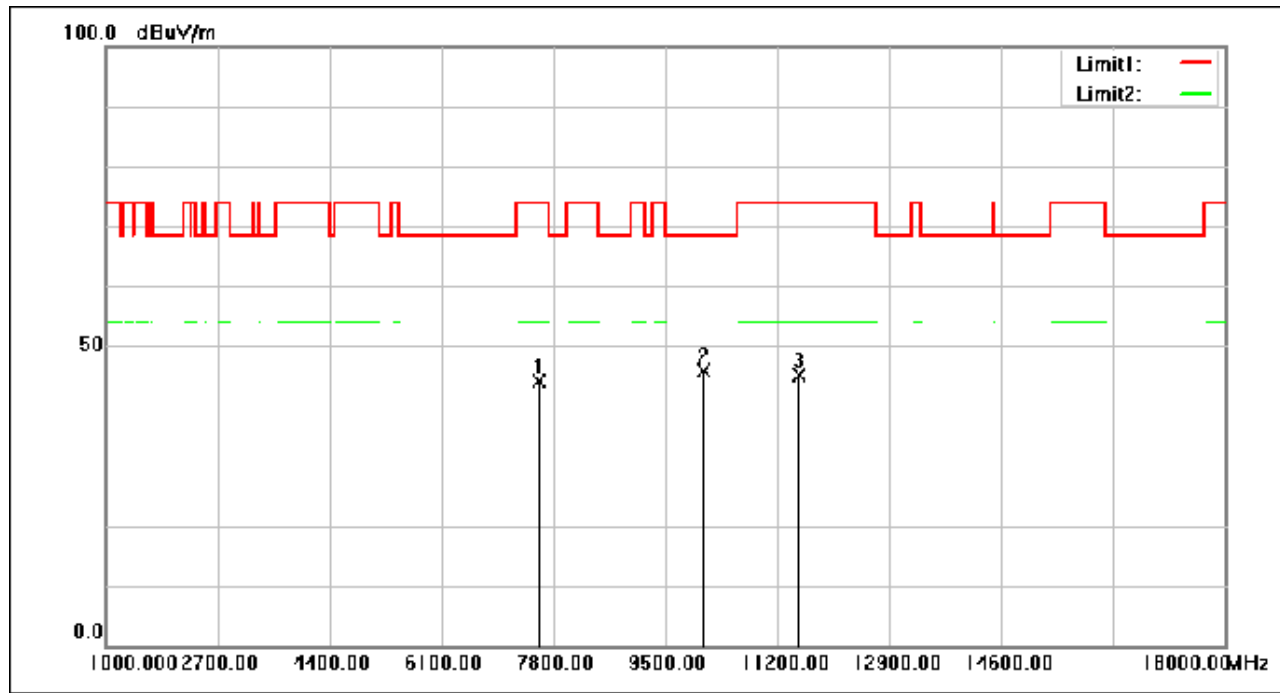

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7579.000	53.59	-9.47	44.12	74.00	-29.88	peak
2	10078.000	52.25	-6.34	45.91	68.30	-22.39	peak
3	11523.000	51.10	-6.07	45.03	74.00	-28.97	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 66 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

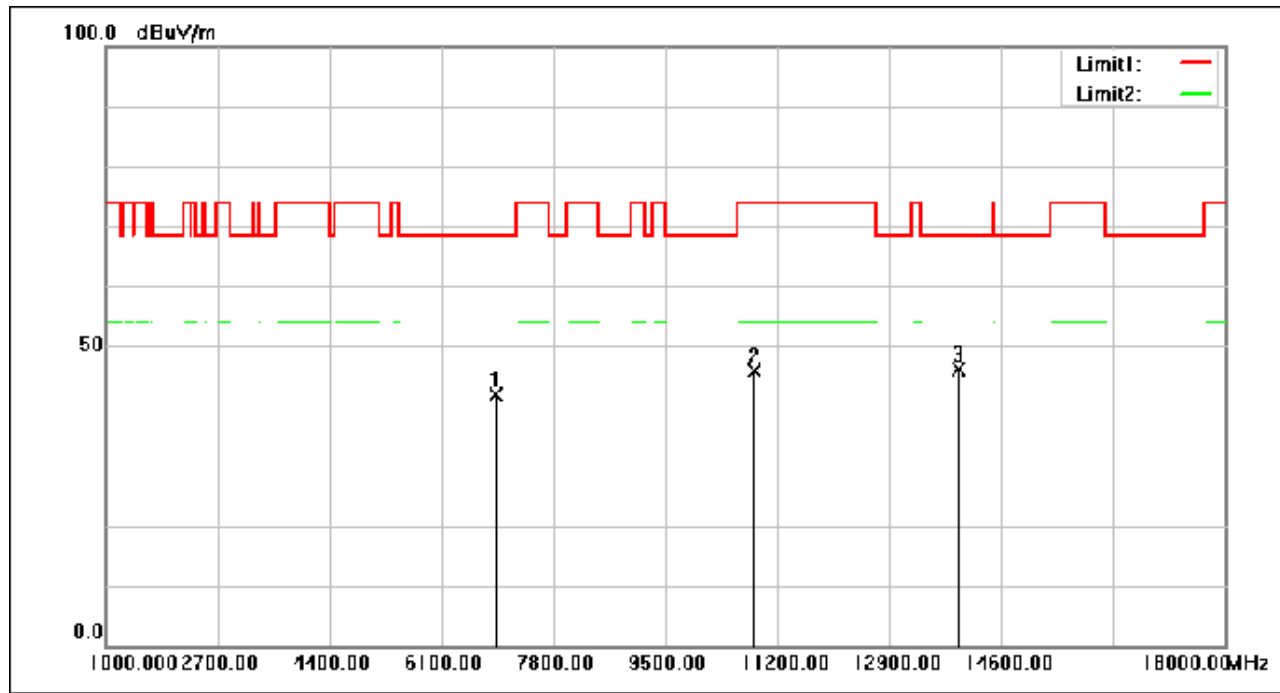

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6916.000	52.01	-10.02	41.99	68.30	-26.31	peak
2	10843.000	52.22	-6.36	45.86	74.00	-28.14	peak
3	13954.000	52.50	-6.27	46.23	68.30	-22.07	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 67 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

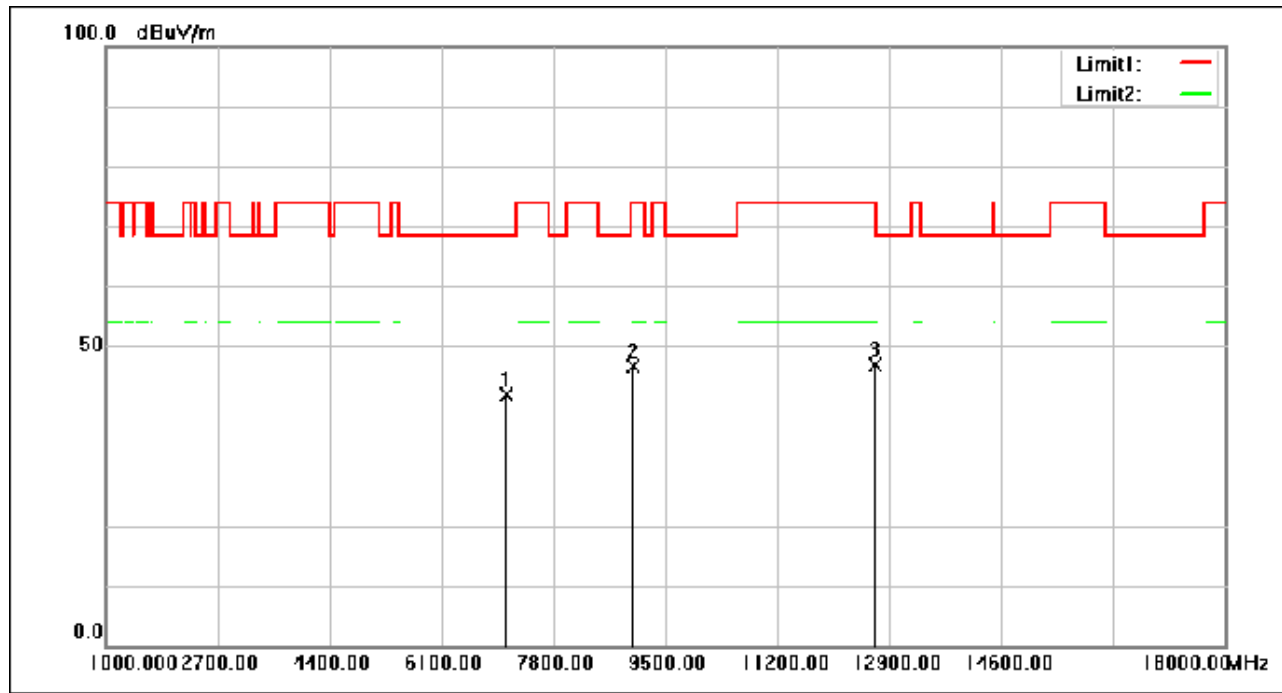

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7086.000	51.87	-9.89	41.98	68.30	-26.32	peak
2	9007.000	54.32	-7.68	46.64	74.00	-27.36	peak
3	12679.000	52.68	-5.81	46.87	74.00	-27.13	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 68 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

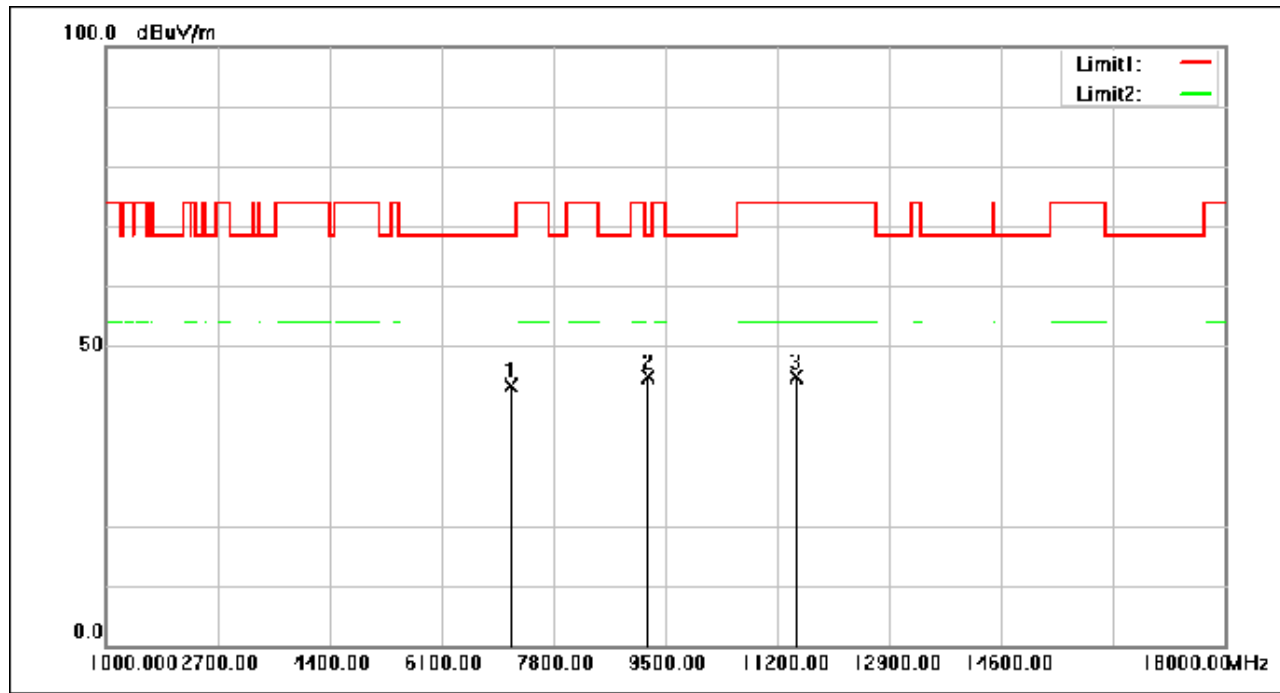

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7154.000	53.23	-9.84	43.39	68.30	-24.91	peak
2	9228.000	52.32	-7.34	44.98	68.30	-23.32	peak
3	11489.000	50.93	-6.07	44.86	74.00	-29.14	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 69 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

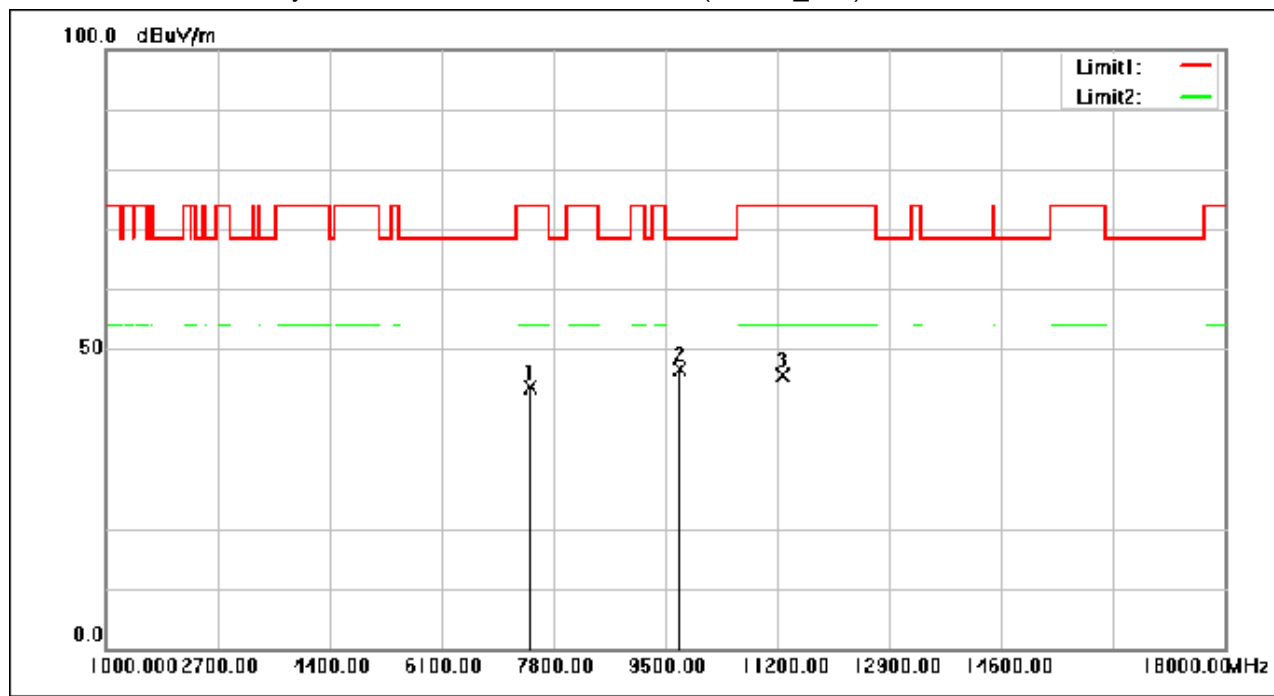

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	53.24	-9.55	43.69	74.00	-30.31	peak
2	9721.000	53.05	-6.50	46.55	68.30	-21.75	peak
3	11268.000	51.78	-6.20	45.58	74.00	-28.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 70 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

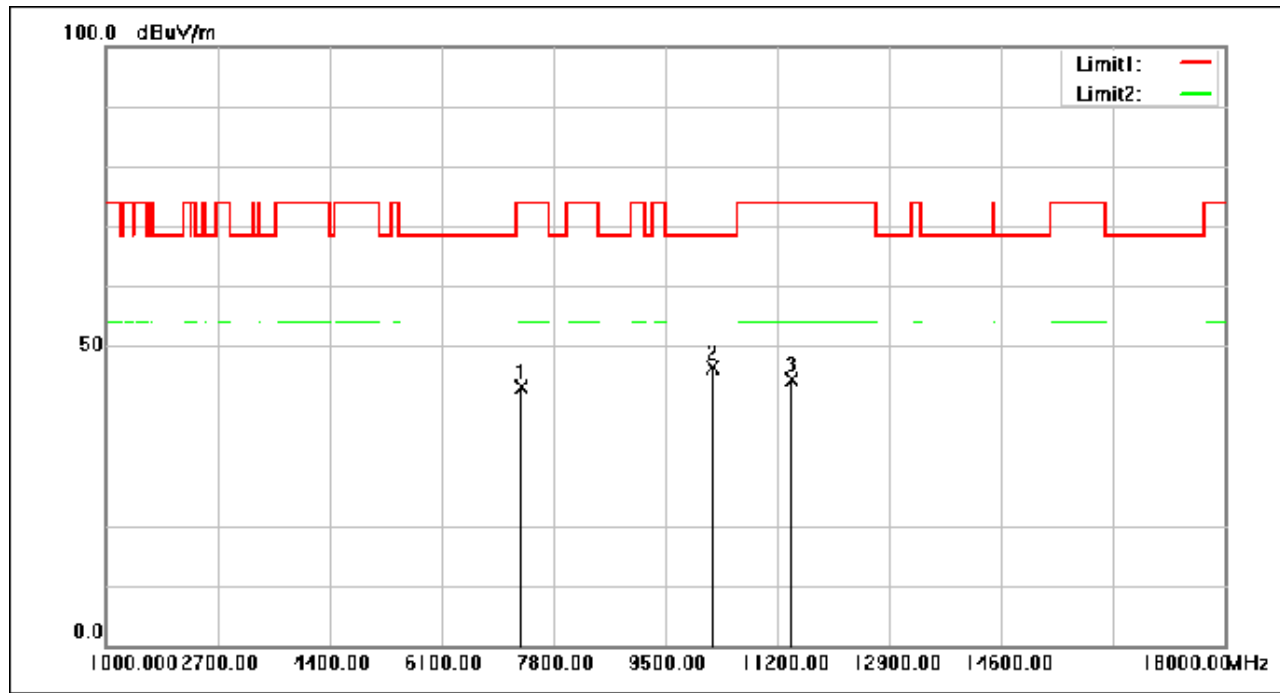

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7307.000	52.94	-9.71	43.23	74.00	-30.77	peak
2	10214.000	52.64	-6.35	46.29	68.30	-22.01	peak
3	11421.000	50.59	-6.10	44.49	74.00	-29.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 71 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

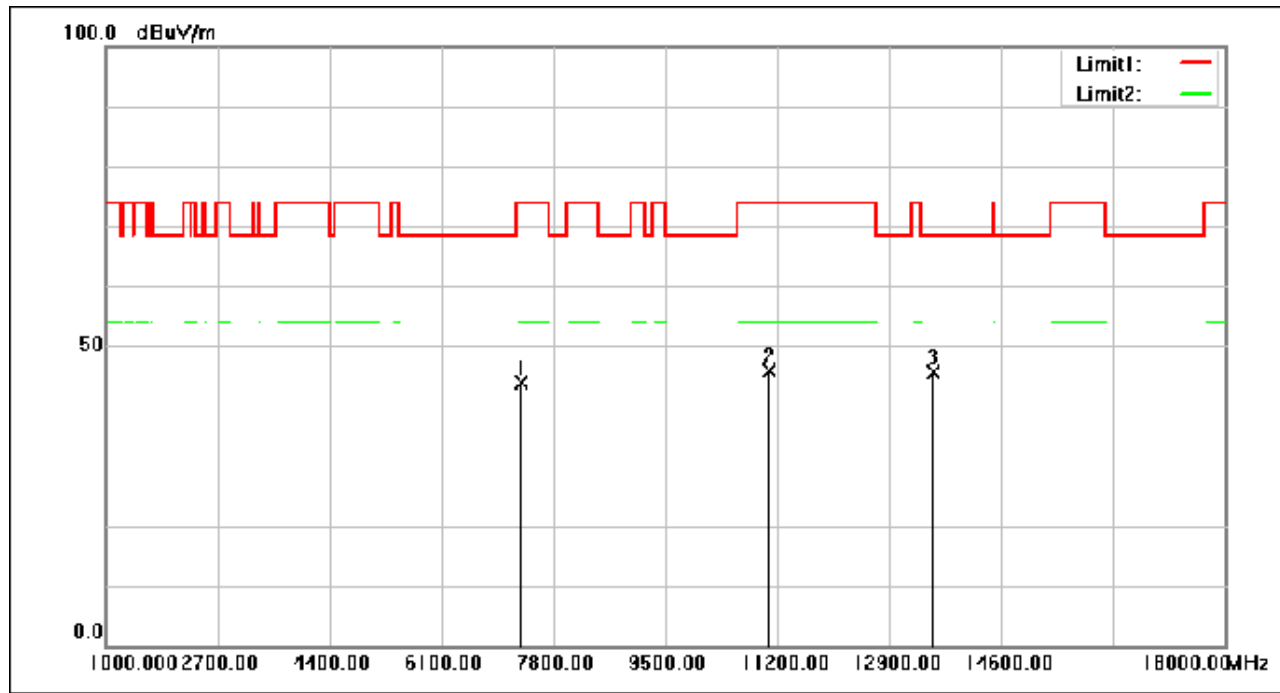

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7307.000	53.47	-9.71	43.76	74.00	-30.24	peak
2	11064.000	52.09	-6.32	45.77	74.00	-28.23	peak
3	13563.000	51.34	-5.81	45.53	68.30	-22.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 72 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

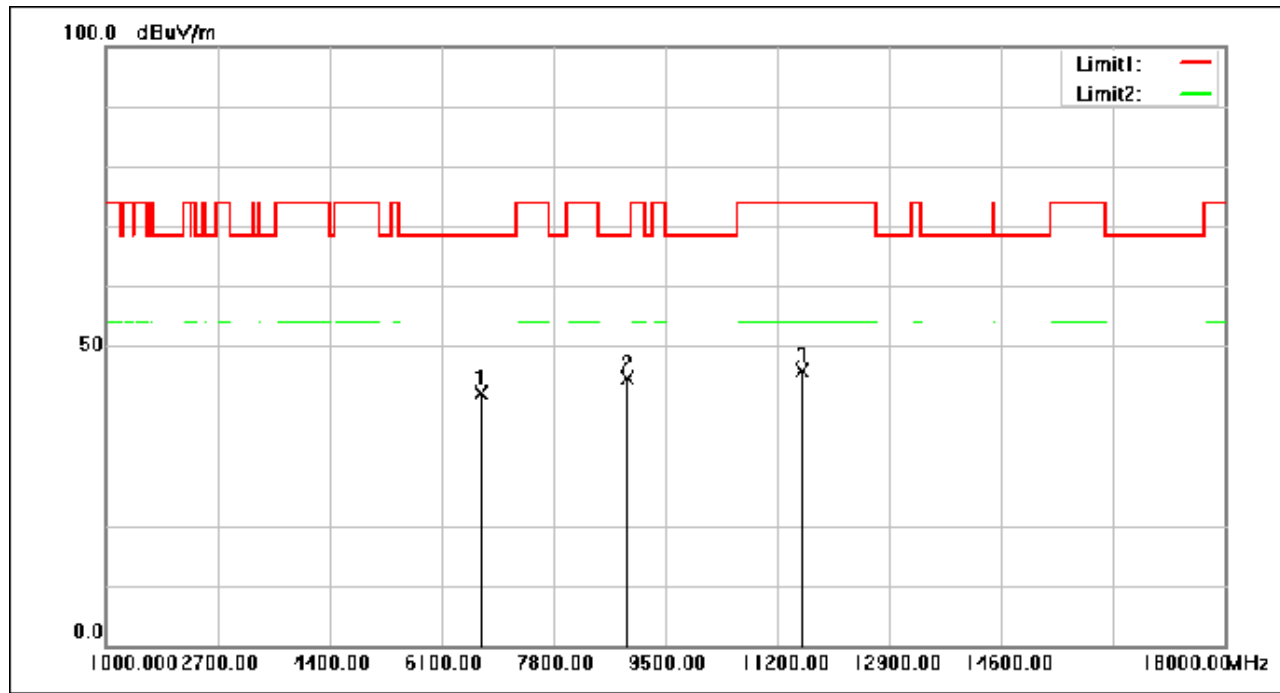

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6695.000	52.28	-10.27	42.01	68.30	-26.29	peak
2	8922.000	52.47	-7.89	44.58	68.30	-23.72	peak
3	11574.000	52.05	-6.11	45.94	74.00	-28.06	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 73 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

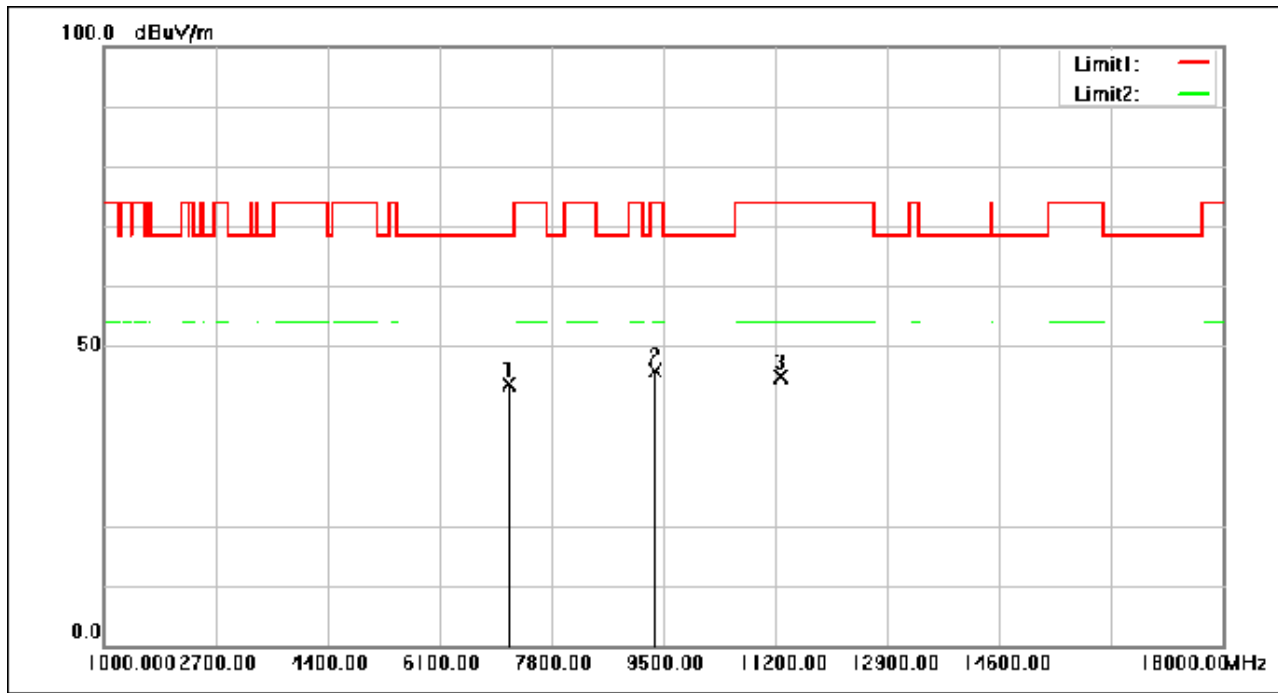

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7154.000	53.54	-9.84	43.70	68.30	-24.60	peak
2	9364.000	52.90	-7.12	45.78	74.00	-28.22	peak
3	11285.000	51.08	-6.19	44.89	74.00	-29.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 74 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

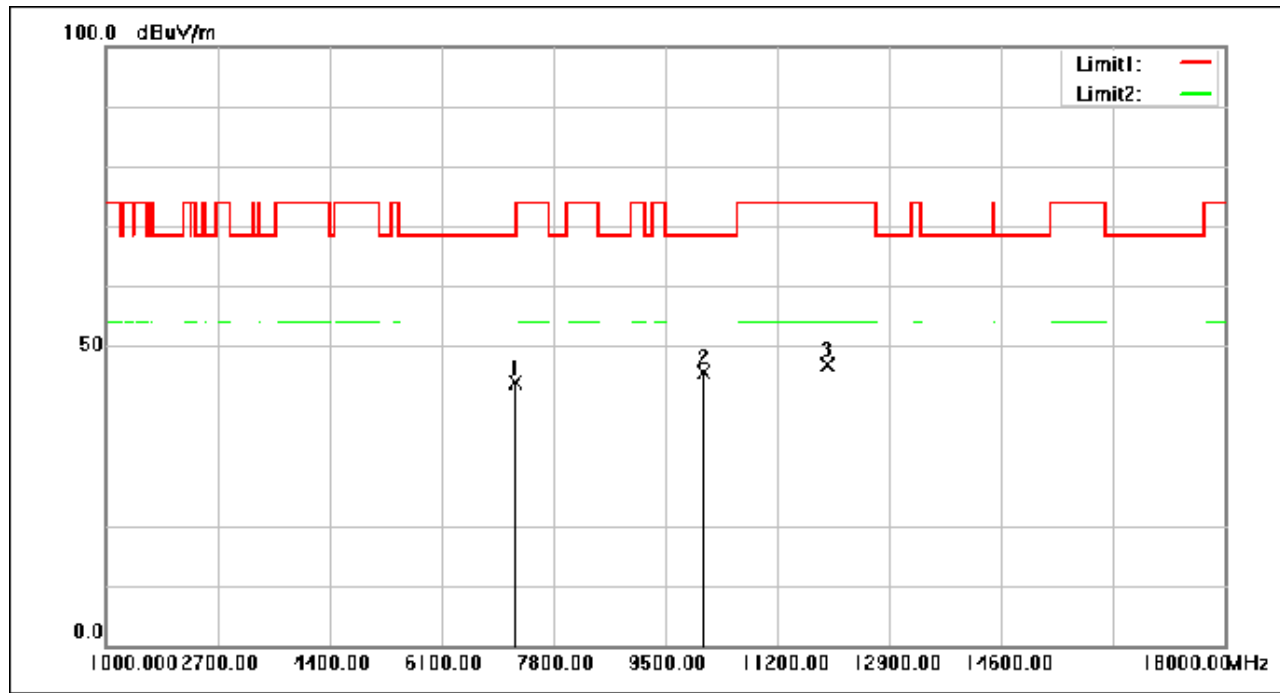

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7222.000	53.58	-9.78	43.80	68.30	-24.50	peak
2	10078.000	51.97	-6.34	45.63	68.30	-22.67	peak
3	11948.000	53.19	-6.39	46.80	74.00	-27.20	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 75 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

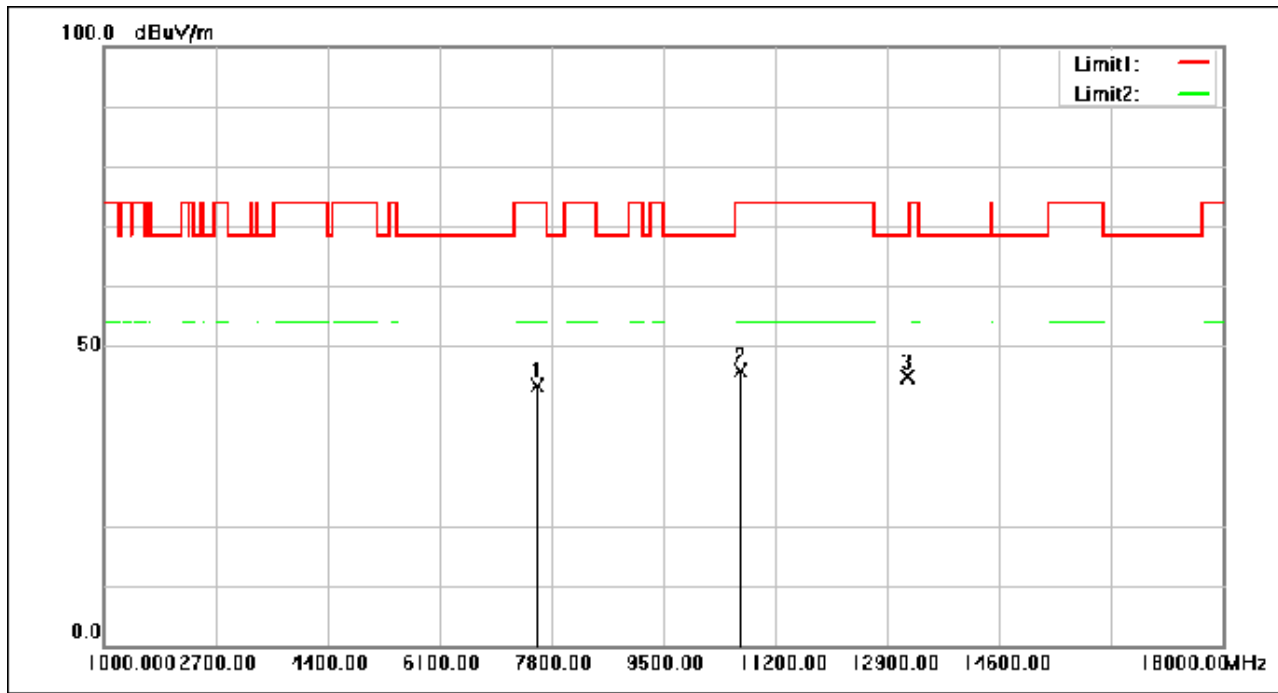

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7579.000	52.94	-9.47	43.47	74.00	-30.53	peak
2	10673.000	52.30	-6.38	45.92	74.00	-28.08	peak
3	13206.000	50.50	-5.57	44.93	68.30	-23.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 76 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

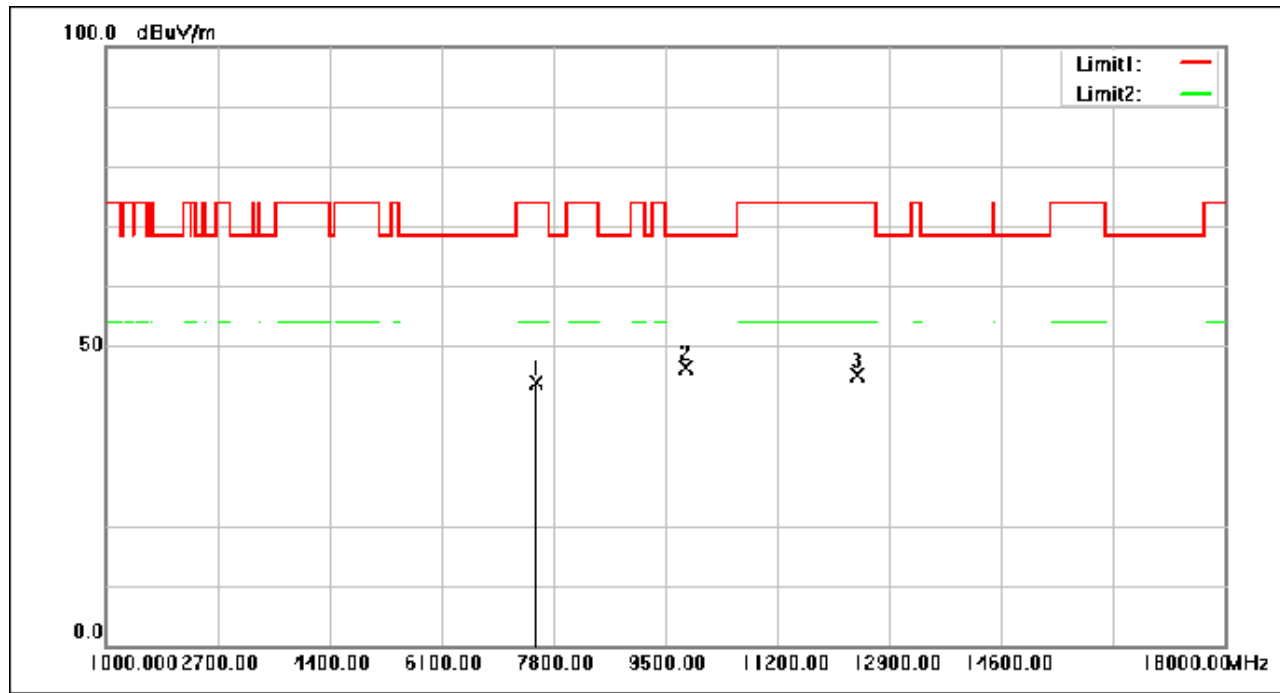

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7528.000	53.42	-9.46	43.96	74.00	-30.04	peak
2	9806.000	52.85	-6.36	46.49	68.30	-21.81	peak
3	12407.000	51.15	-6.04	45.11	74.00	-28.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 77 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

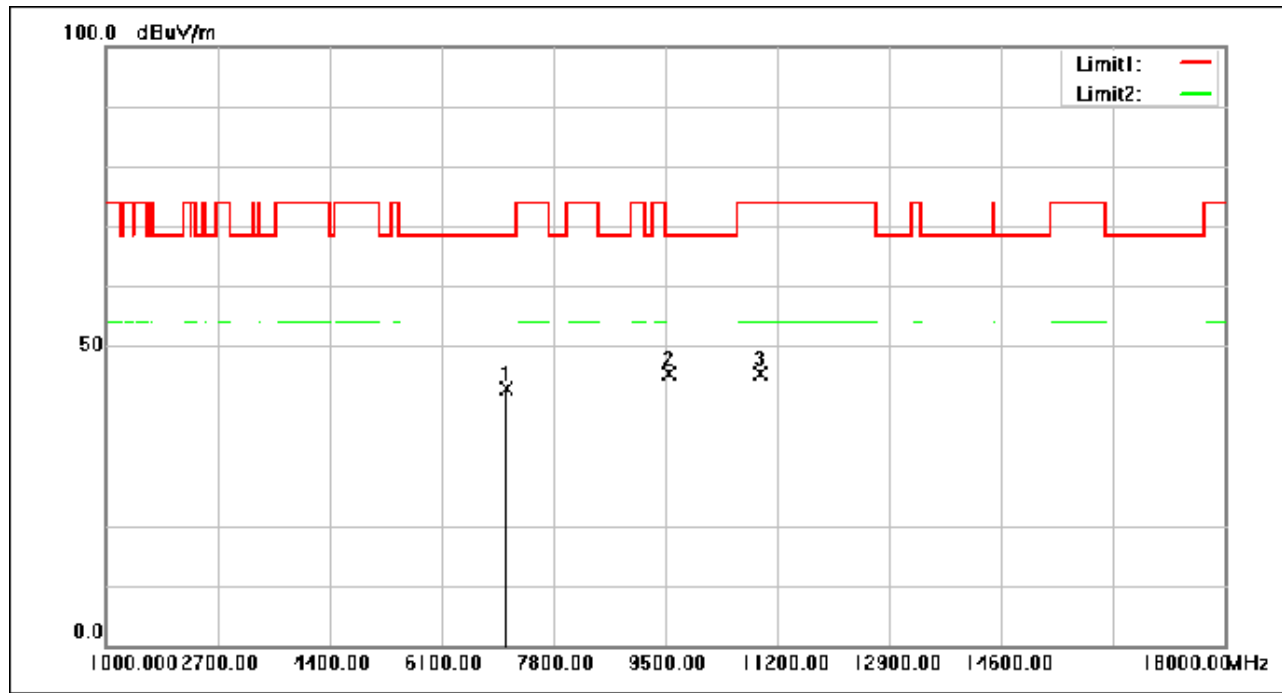

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7086.000	52.88	-9.89	42.99	68.30	-25.31	peak
2	9551.000	52.26	-6.81	45.45	68.30	-22.85	peak
3	10945.000	51.83	-6.36	45.47	74.00	-28.53	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 78 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

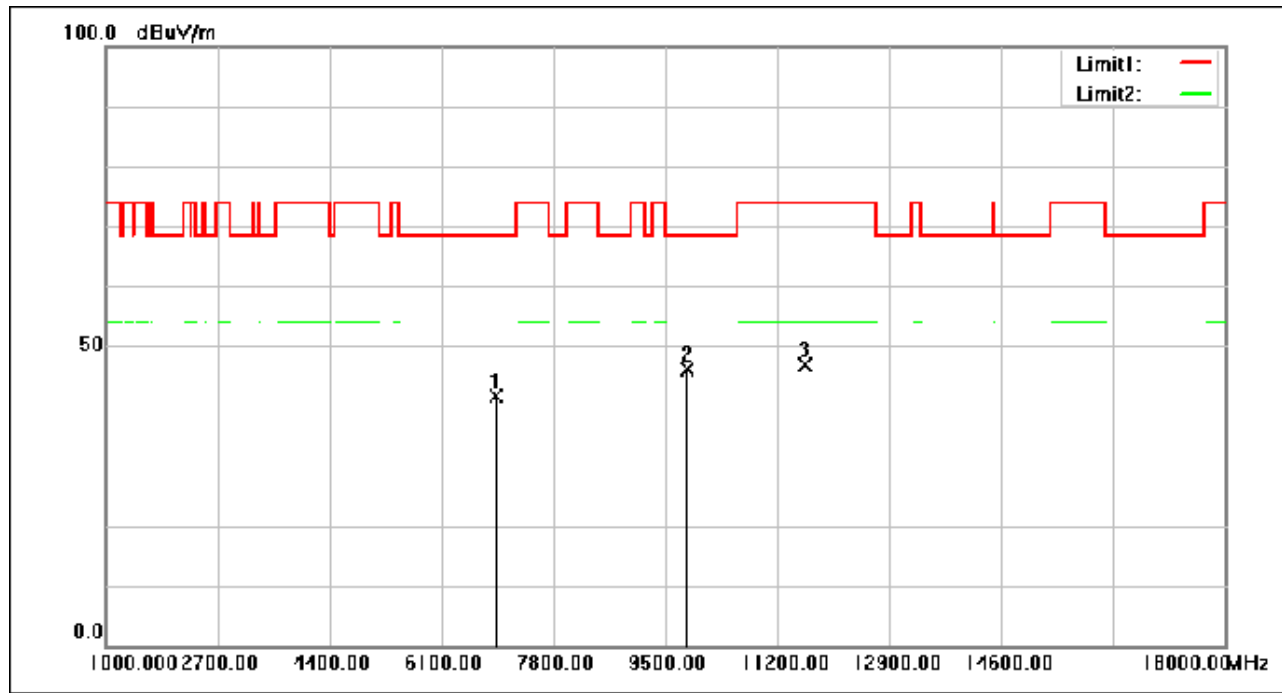

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6933.000	51.58	-10.01	41.57	68.30	-26.73	peak
2	9823.000	52.37	-6.32	46.05	68.30	-22.25	peak
3	11625.000	53.01	-6.16	46.85	74.00	-27.15	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 79 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

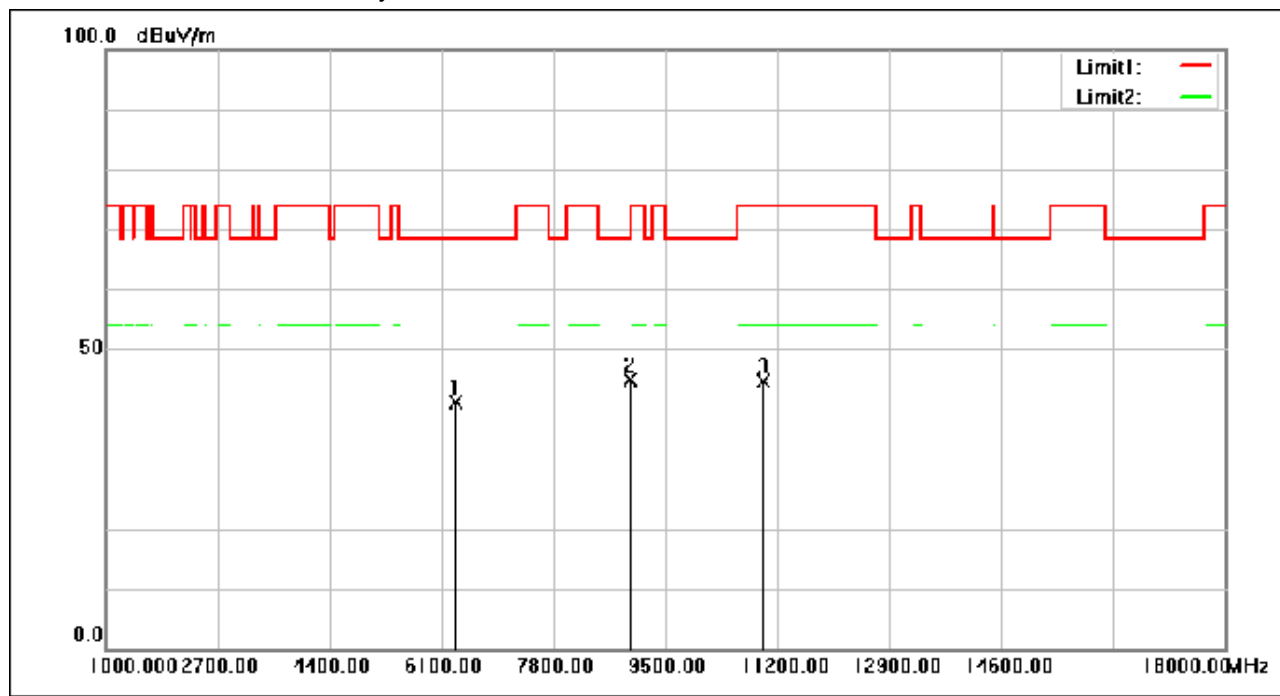

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6321.000	53.02	-11.81	41.21	68.30	-27.09	peak
2	8973.000	52.67	-7.77	44.90	68.30	-23.40	peak
3	10979.000	51.03	-6.36	44.67	74.00	-29.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 80 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

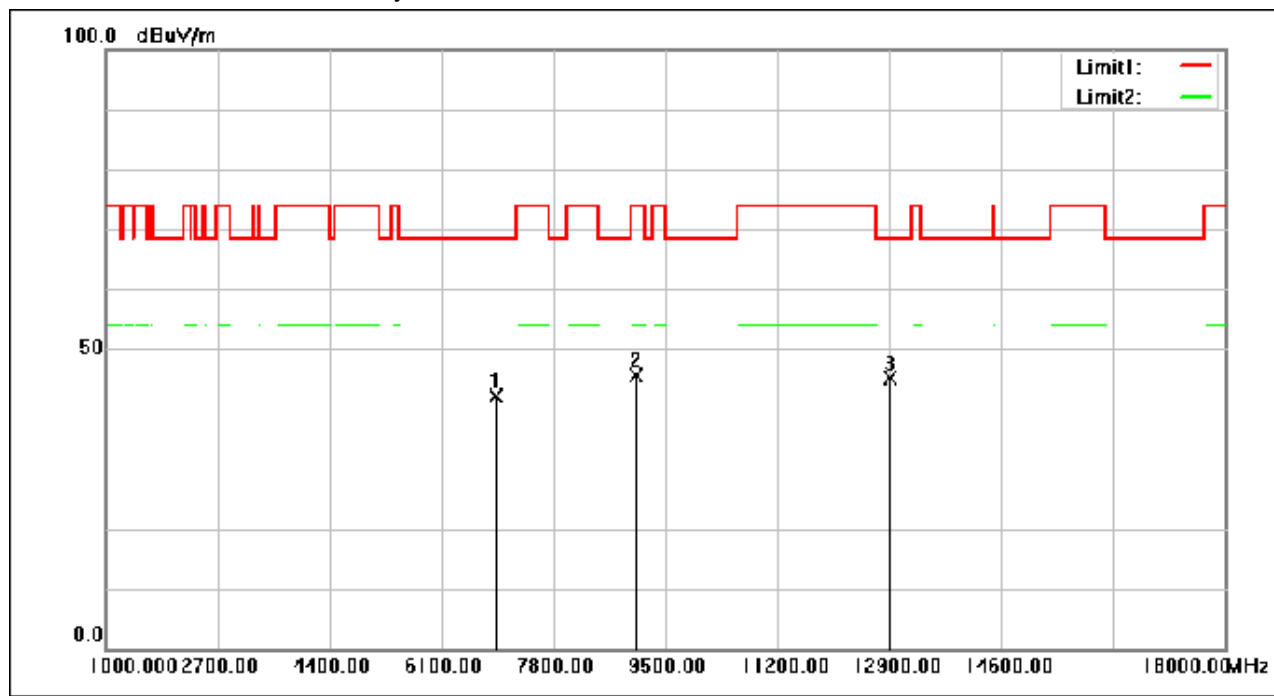

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6933.000	52.10	-10.01	42.09	68.30	-26.21	peak
2	9058.000	53.20	-7.60	45.60	74.00	-28.40	peak
3	12917.000	50.68	-5.61	45.07	68.30	-23.23	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 81 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

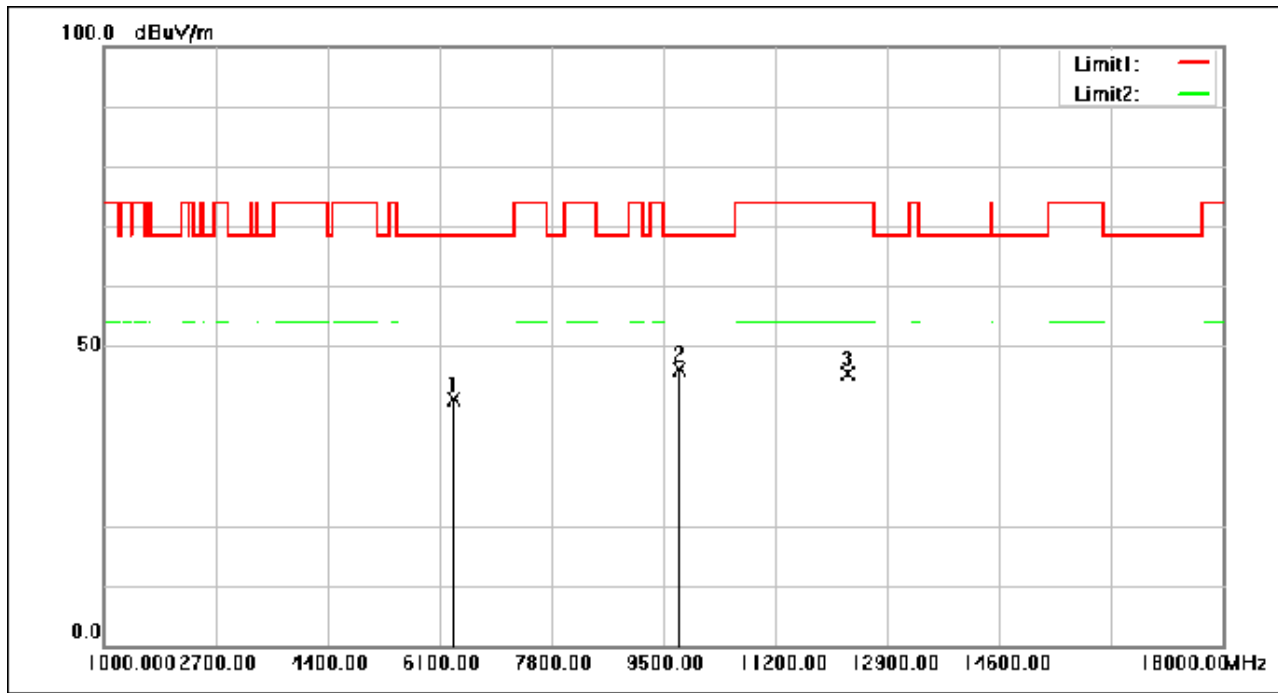

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6321.000	52.84	-11.81	41.03	68.30	-27.27	peak
2	9738.000	52.51	-6.48	46.03	68.30	-22.27	peak
3	12288.000	51.55	-6.14	45.41	74.00	-28.59	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 82 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

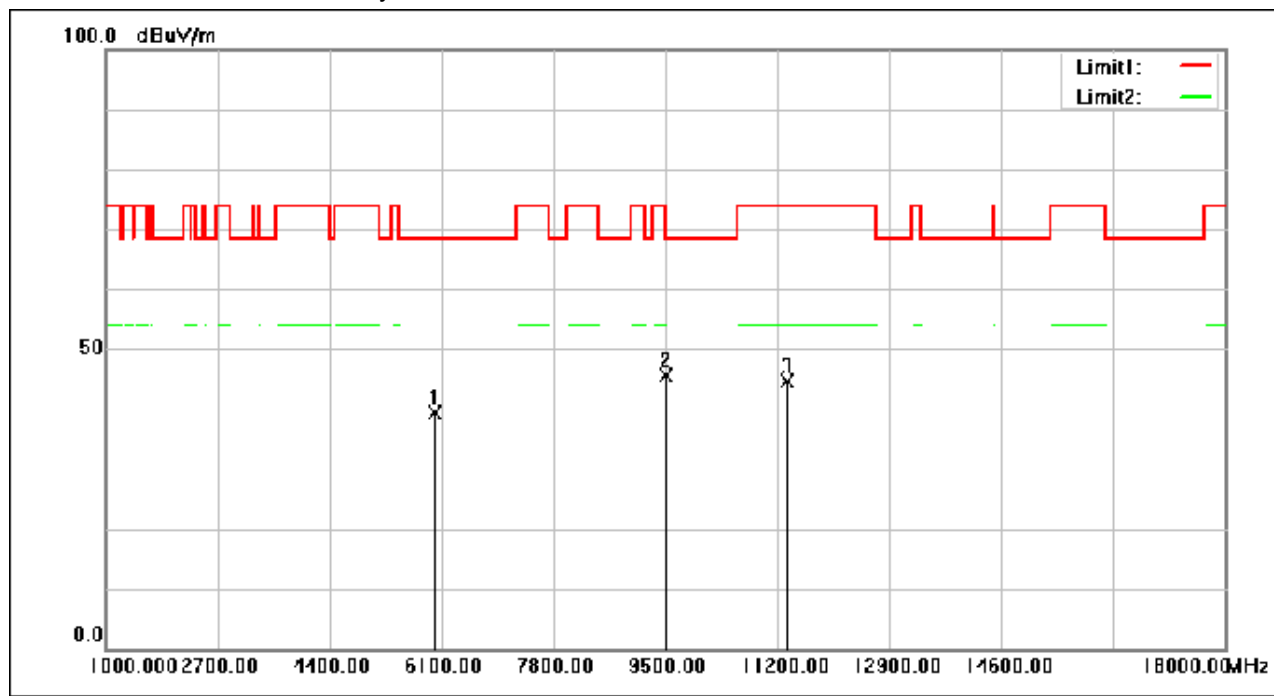

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5998.000	52.57	-13.10	39.47	68.30	-28.83	peak
2	9517.000	52.55	-6.87	45.68	68.30	-22.62	peak
3	11353.000	50.89	-6.15	44.74	74.00	-29.26	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 83 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

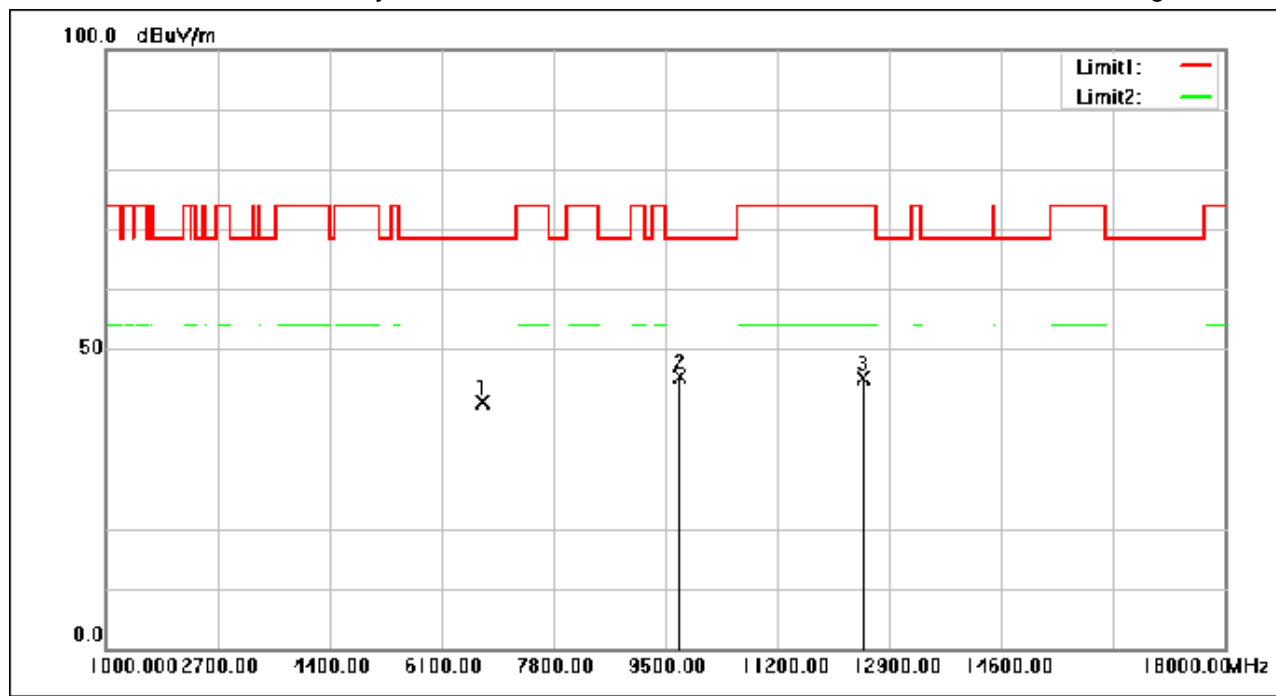

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6712.000	51.41	-10.20	41.21	68.30	-27.09	peak
2	9721.000	51.78	-6.50	45.28	68.30	-23.02	peak
3	12492.000	51.15	-5.97	45.18	74.00	-28.82	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 84 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

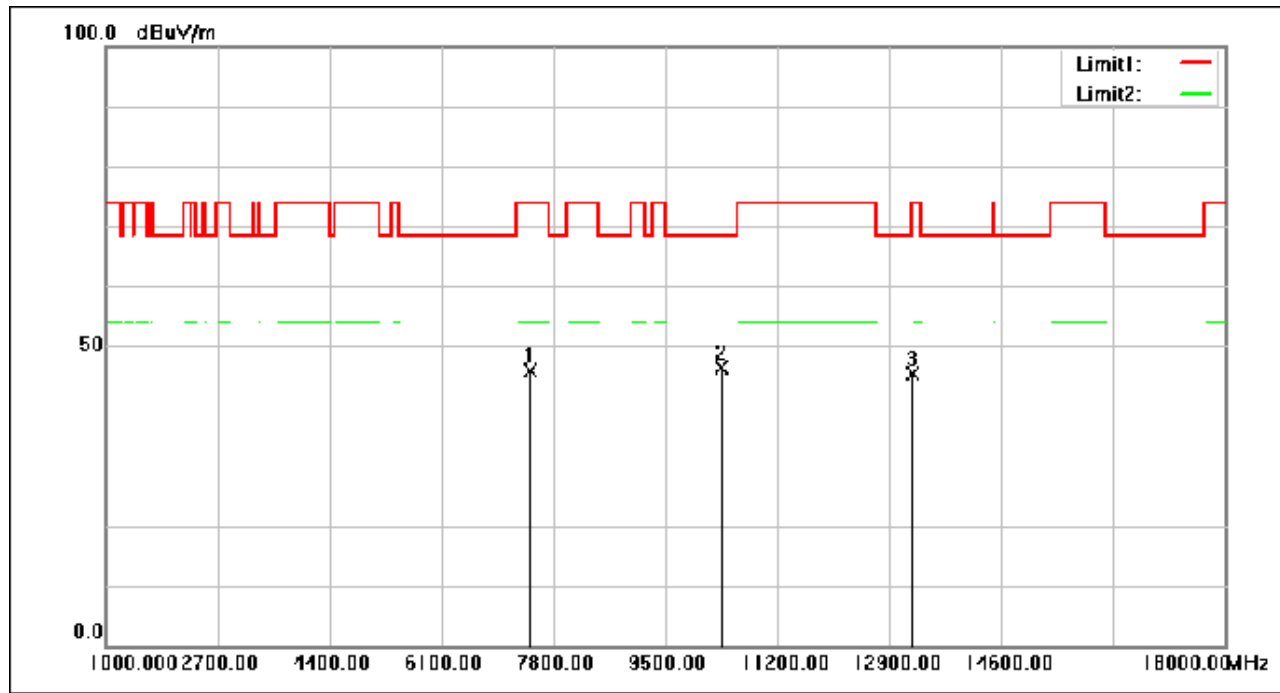

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7443.000	55.41	-9.55	45.86	74.00	-28.14	peak
2	10350.000	52.73	-6.37	46.36	68.30	-21.94	peak
3	13240.000	50.97	-5.59	45.38	68.30	-22.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 85 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

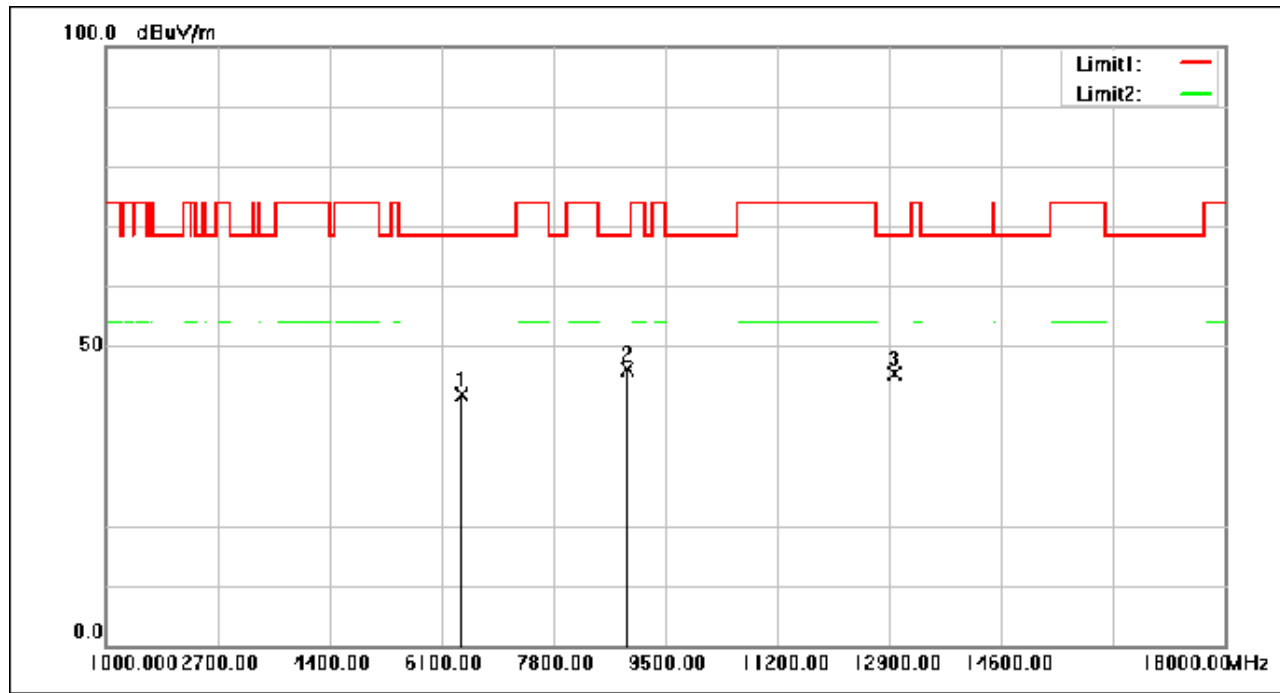

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6406.000	53.22	-11.46	41.76	68.30	-26.54	peak
2	8922.000	54.12	-7.89	46.23	68.30	-22.07	peak
3	12985.000	51.00	-5.55	45.45	68.30	-22.85	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 86 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

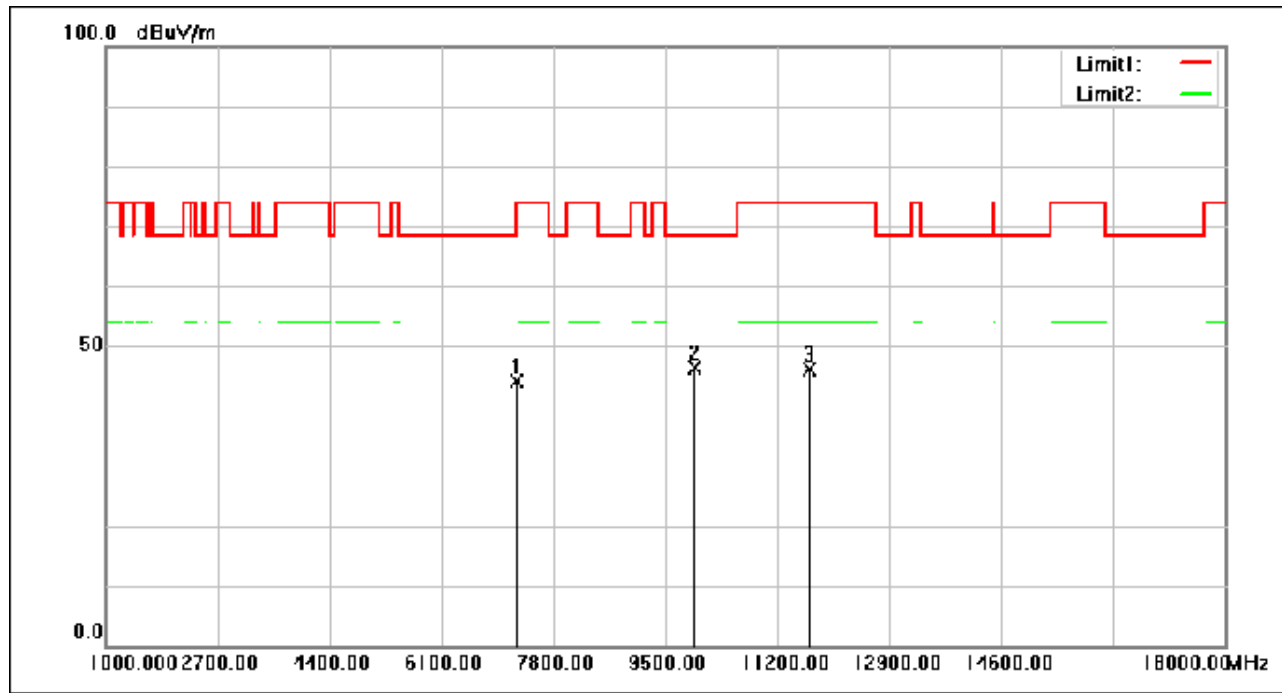

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7239.000	53.85	-9.76	44.09	68.30	-24.21	peak
2	9942.000	52.61	-6.31	46.30	68.30	-22.00	peak
3	11676.000	52.36	-6.20	46.16	74.00	-27.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 87 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

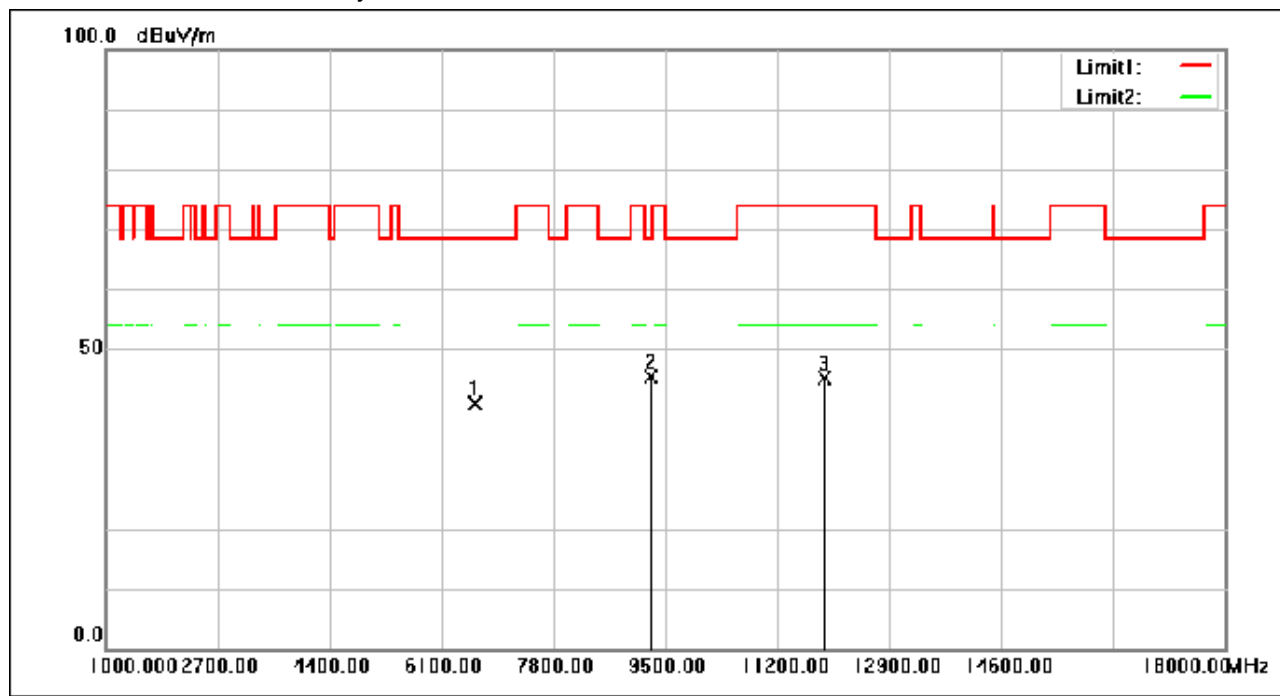

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6610.000	51.57	-10.62	40.95	68.30	-27.35	peak
2	9279.000	52.61	-7.25	45.36	68.30	-22.94	peak
3	11914.000	51.42	-6.39	45.03	74.00	-28.97	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 88 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

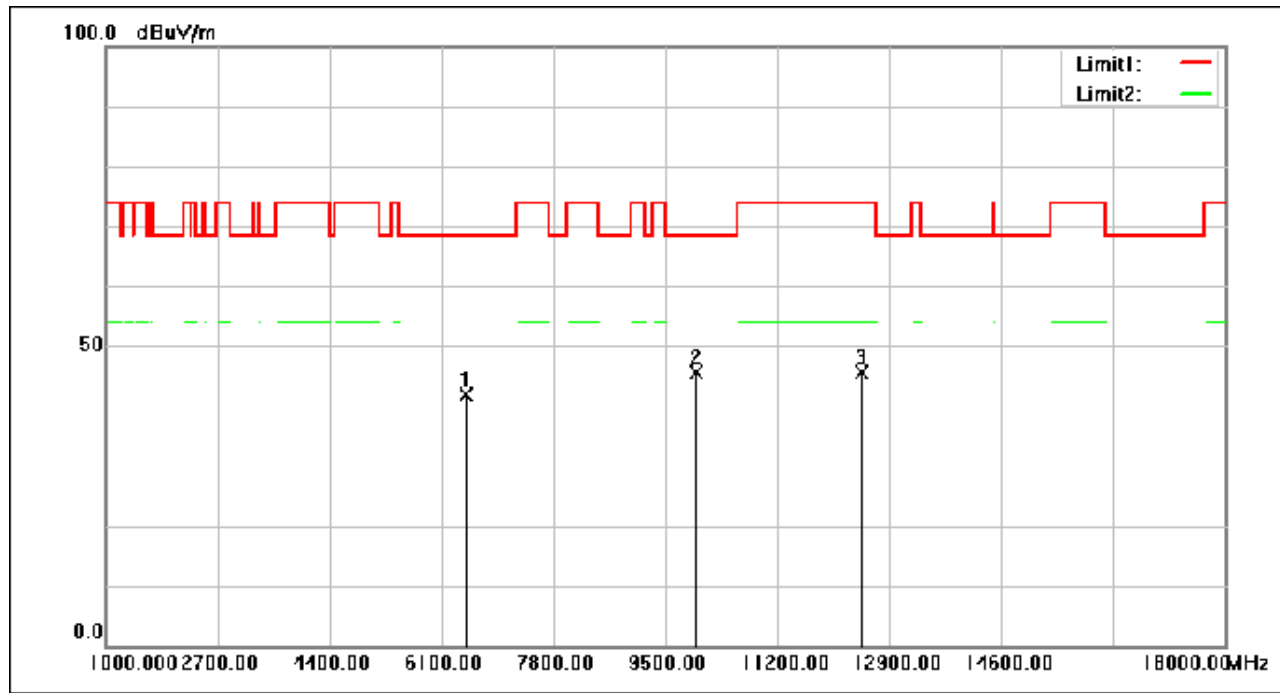

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6474.000	53.02	-11.18	41.84	68.30	-26.46	peak
2	9959.000	51.90	-6.31	45.59	68.30	-22.71	peak
3	12475.000	51.58	-5.99	45.59	74.00	-28.41	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 89 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

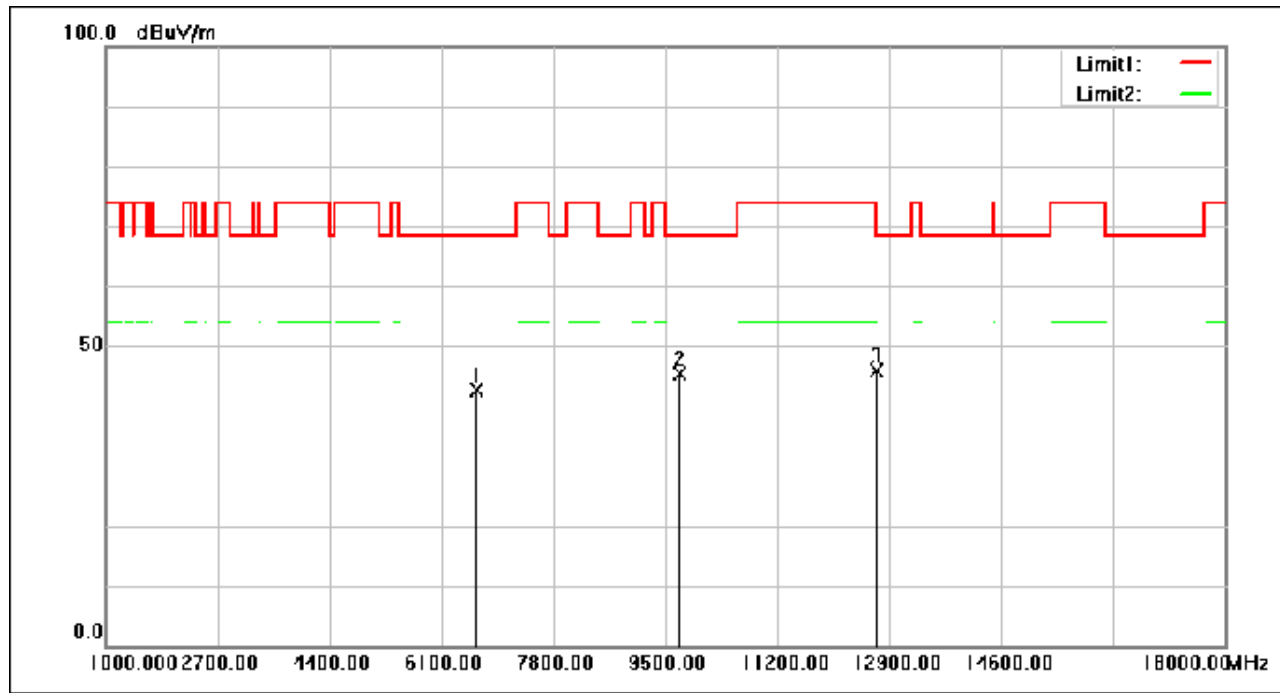

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6627.000	53.12	-10.55	42.57	68.30	-25.73	peak
2	9704.000	52.01	-6.54	45.47	68.30	-22.83	peak
3	12713.000	51.59	-5.79	45.80	68.30	-22.50	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 90 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

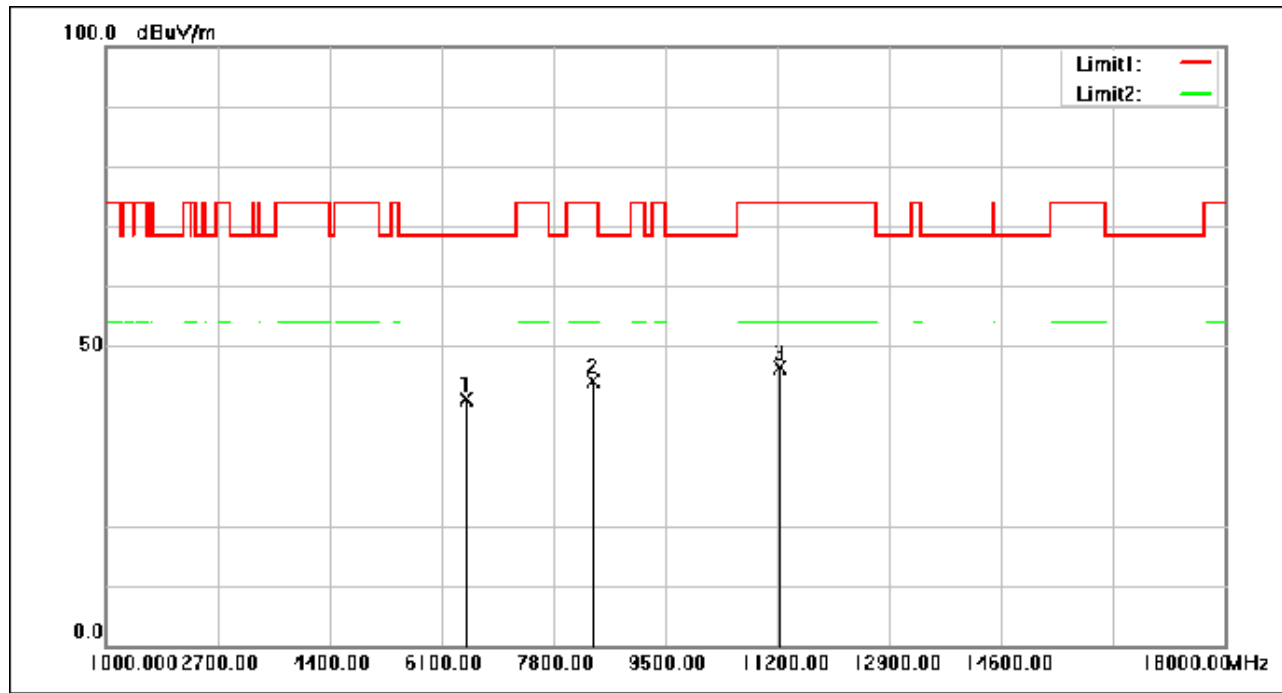

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6474.000	52.28	-11.18	41.10	68.30	-27.20	peak
2	8395.000	53.17	-8.95	44.22	74.00	-29.78	peak
3	11234.000	52.67	-6.22	46.45	74.00	-27.55	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 91 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

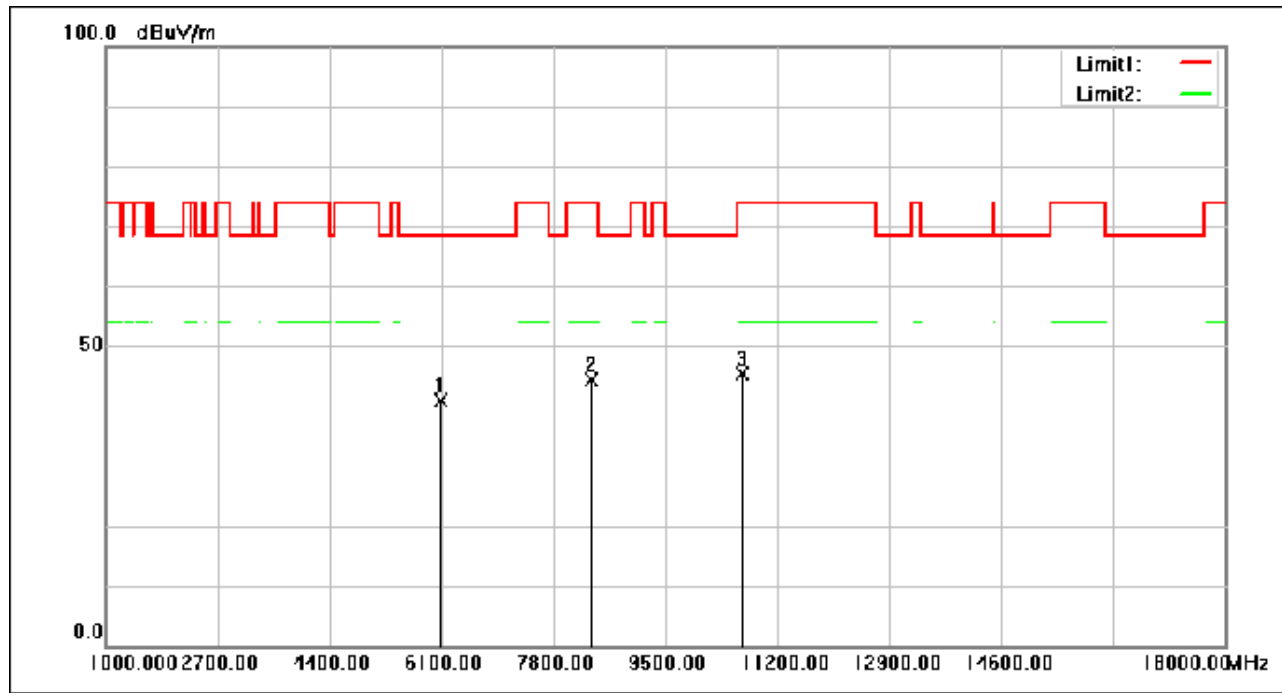

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6083.000	53.72	-12.78	40.94	68.30	-27.36	peak
2	8378.000	53.32	-8.97	44.35	74.00	-29.65	peak
3	10673.000	51.73	-6.38	45.35	74.00	-28.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 92 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

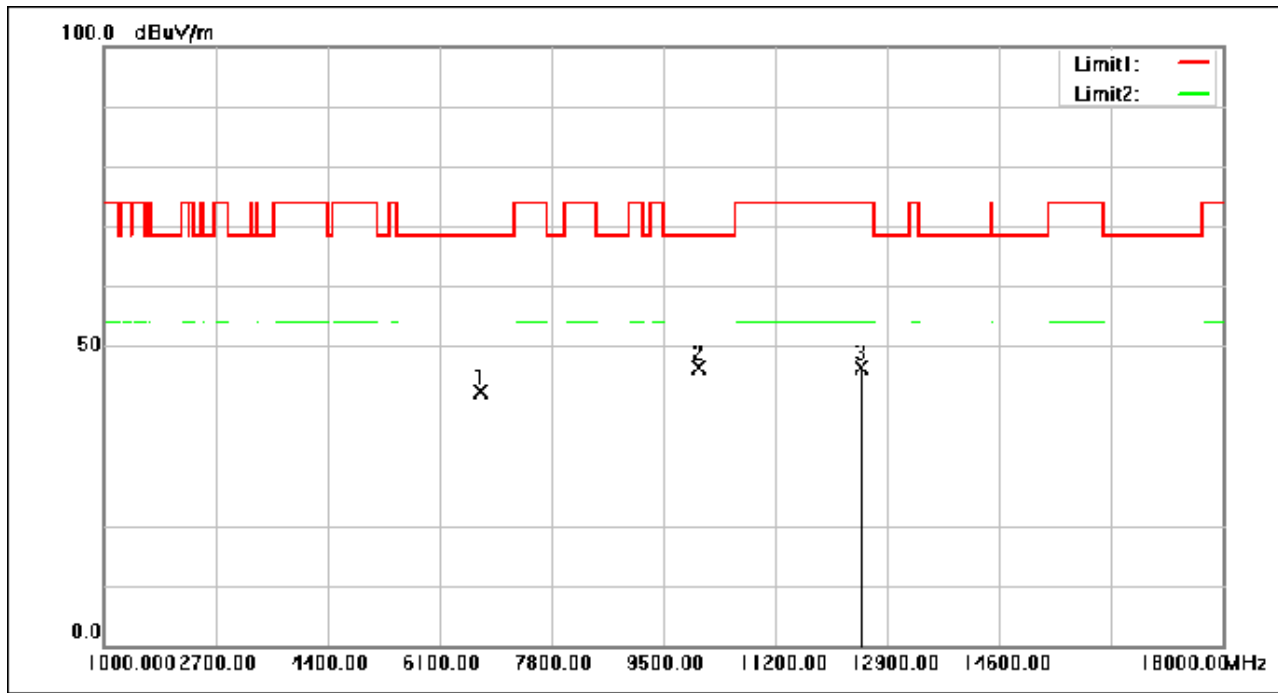

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6712.000	52.65	-10.20	42.45	68.30	-25.85	peak
2	10027.000	52.61	-6.33	46.28	68.30	-22.02	peak
3	12492.000	52.31	-5.97	46.34	74.00	-27.66	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 93 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

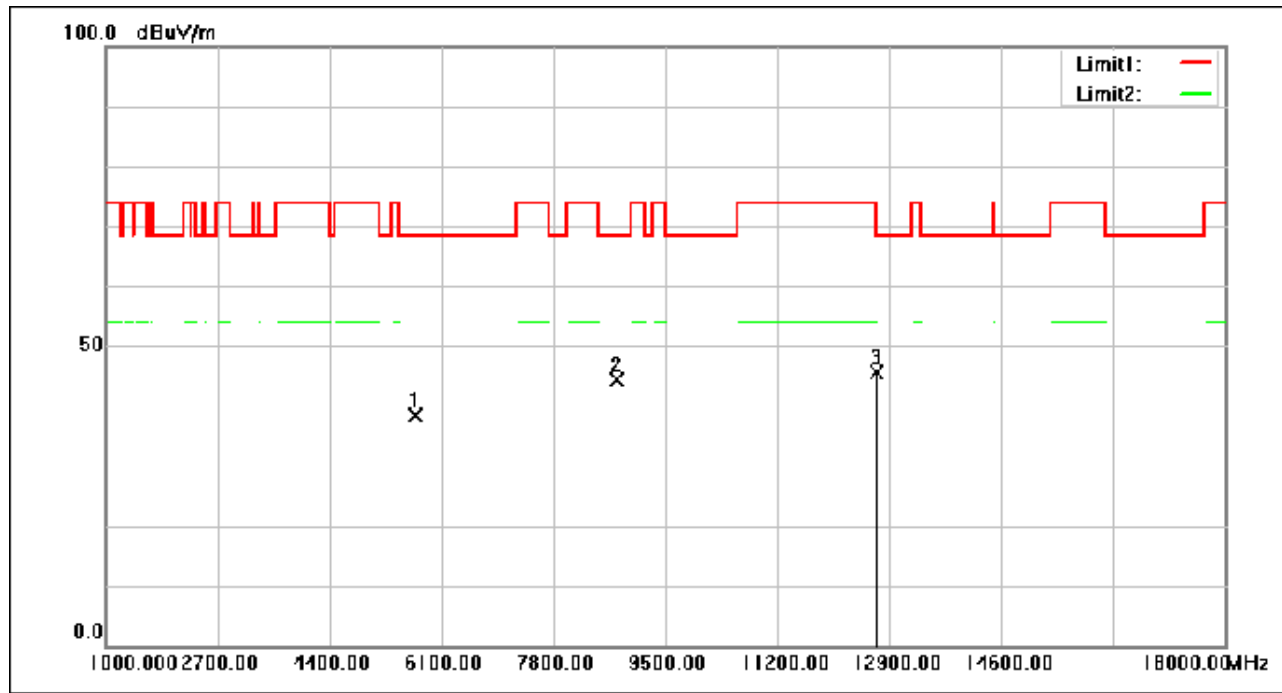

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5692.000	53.16	-14.70	38.46	68.30	-29.84	peak
2	8769.000	52.66	-8.22	44.44	68.30	-23.86	peak
3	12696.000	51.33	-5.80	45.53	74.00	-28.47	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 94 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

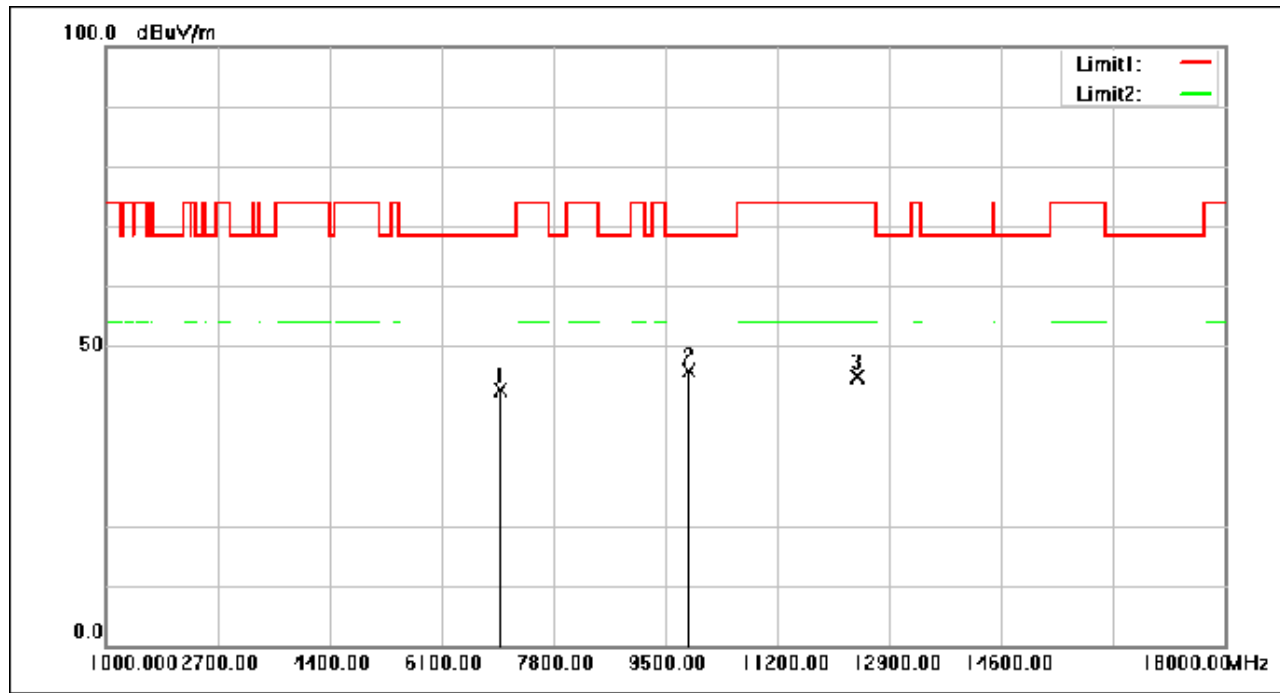

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7001.000	52.48	-9.96	42.52	68.30	-25.78	peak
2	9857.000	52.20	-6.28	45.92	68.30	-22.38	peak
3	12407.000	51.04	-6.04	45.00	74.00	-29.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 95 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

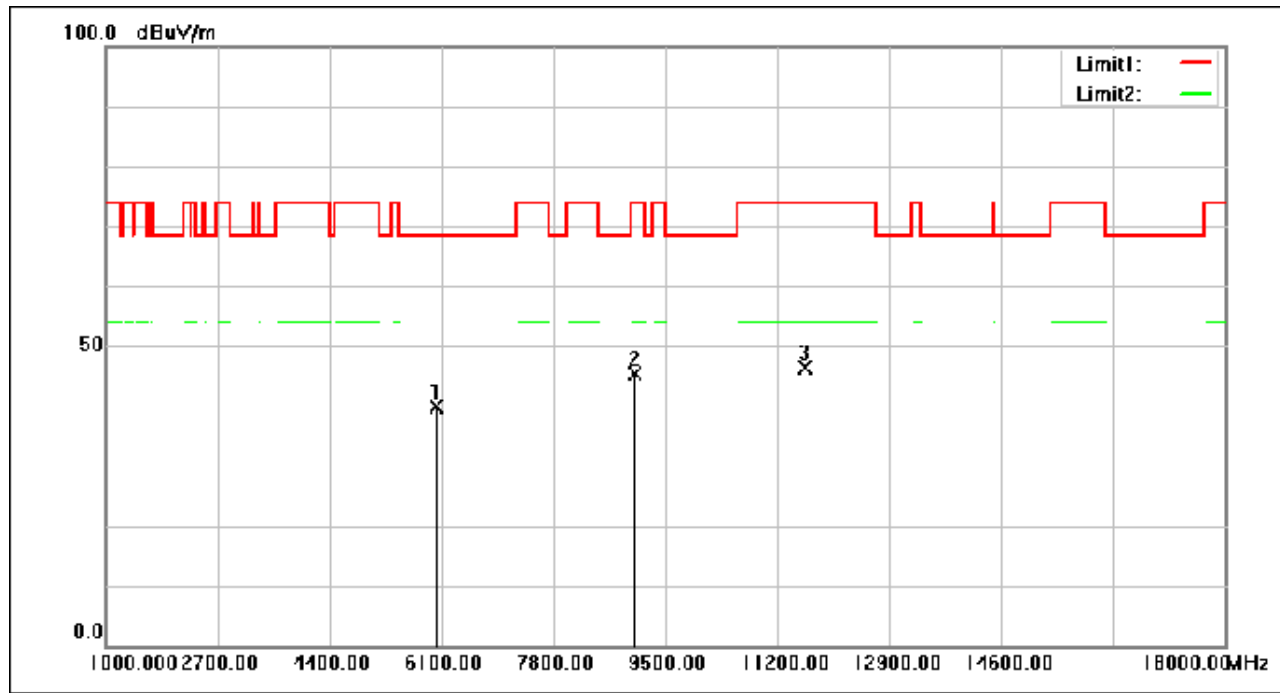

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6015.000	52.88	-13.03	39.85	68.30	-28.45	peak
2	9024.000	53.09	-7.66	45.43	74.00	-28.57	peak
3	11625.000	52.44	-6.16	46.28	74.00	-27.72	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 96 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

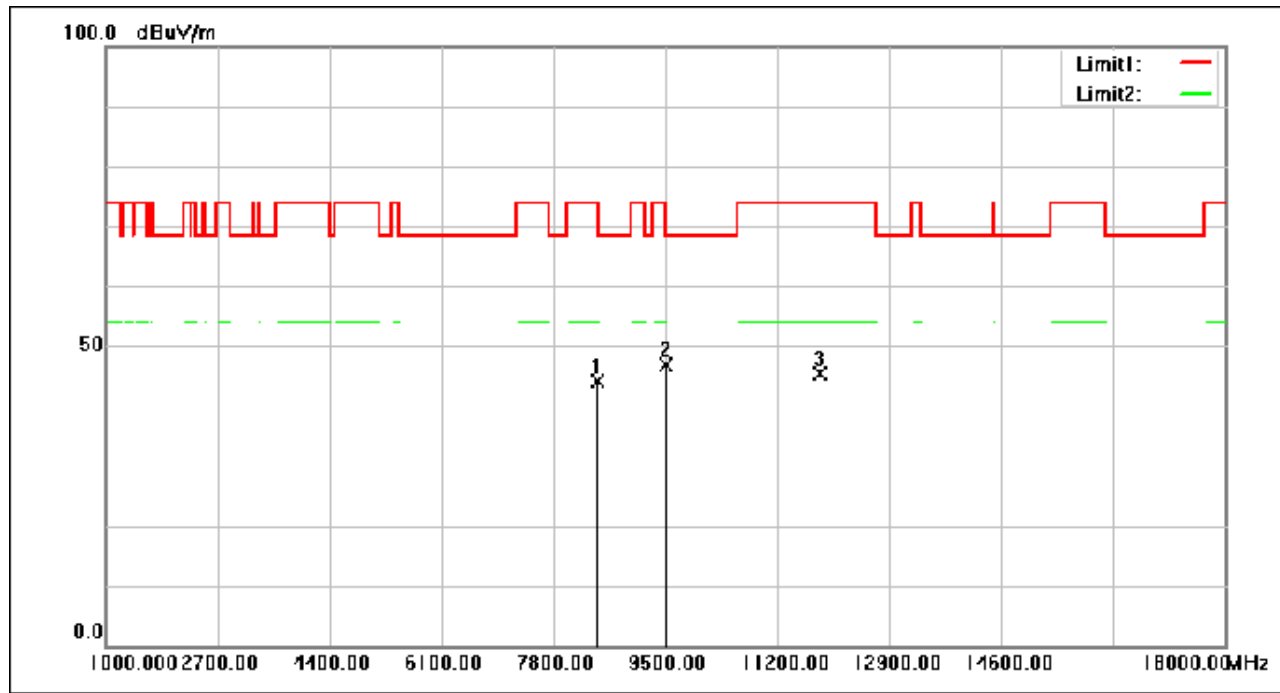

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8463.000	52.97	-8.85	44.12	74.00	-29.88	peak
2	9500.000	53.70	-6.90	46.80	68.30	-21.50	peak
3	11846.000	51.69	-6.34	45.35	74.00	-28.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 97 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

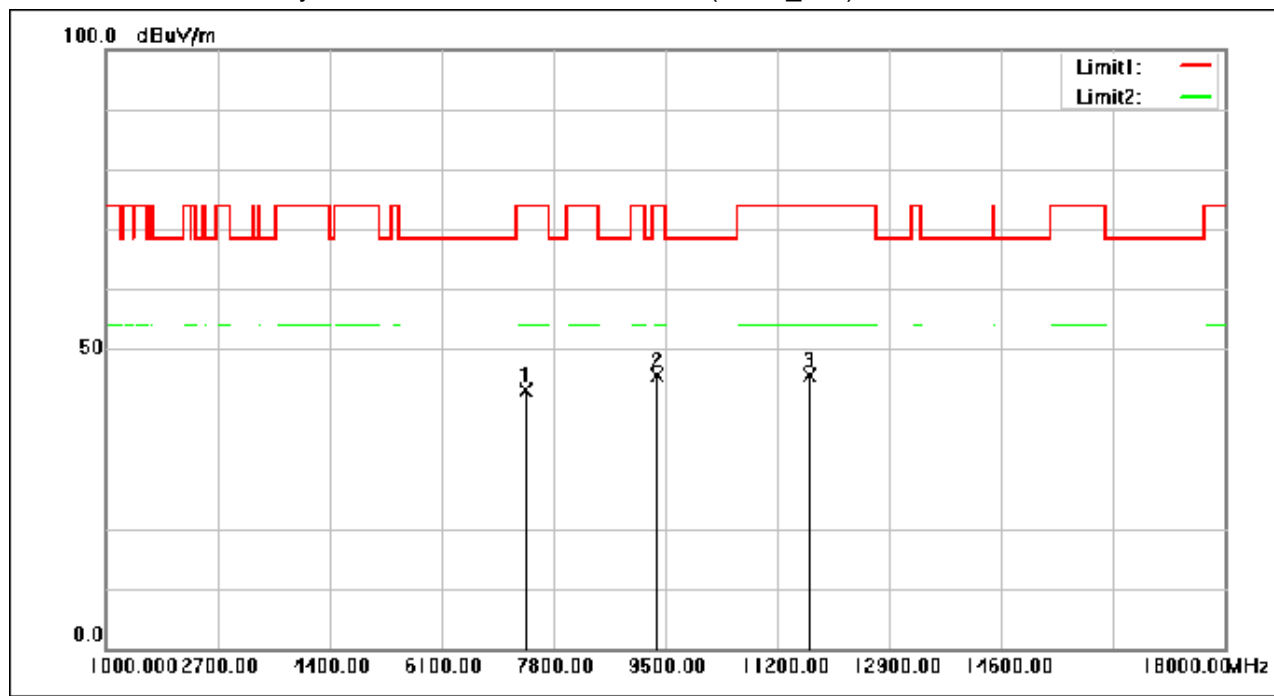

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7375.000	52.82	-9.66	43.16	74.00	-30.84	peak
2	9381.000	52.72	-7.09	45.63	74.00	-28.37	peak
3	11693.000	51.77	-6.22	45.55	74.00	-28.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 98 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

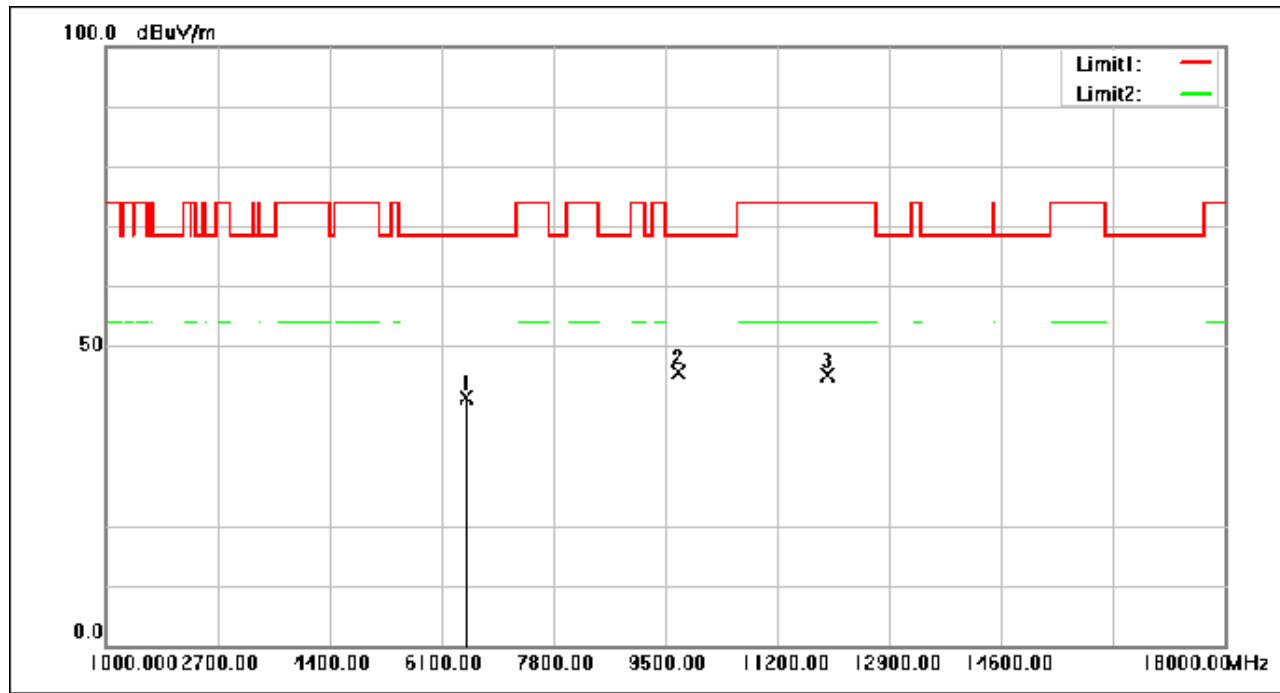

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6474.000	52.46	-11.18	41.28	68.30	-27.02	peak
2	9687.000	52.08	-6.57	45.51	68.30	-22.79	peak
3	11948.000	51.63	-6.39	45.24	74.00	-28.76	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 99 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

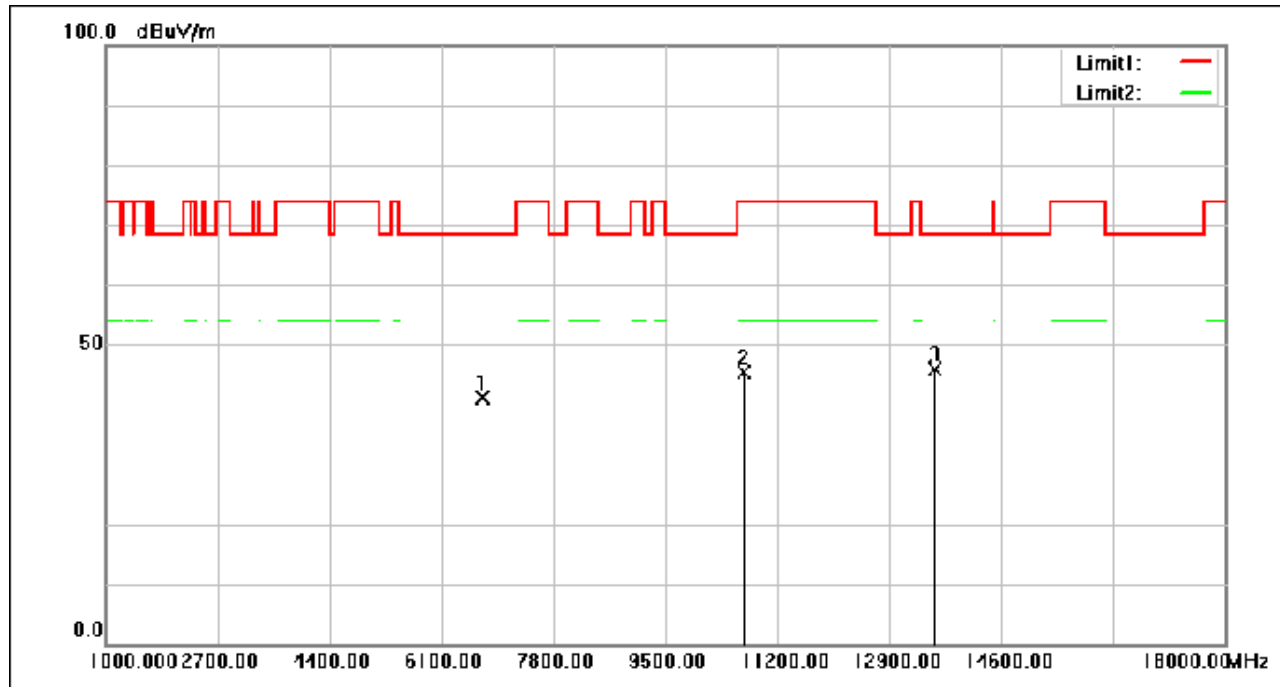

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6712.000	51.38	-10.20	41.18	68.30	-27.12	peak
2	10690.000	51.70	-6.37	45.33	74.00	-28.67	peak
3	13597.000	51.63	-5.86	45.77	68.30	-22.53	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 100 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

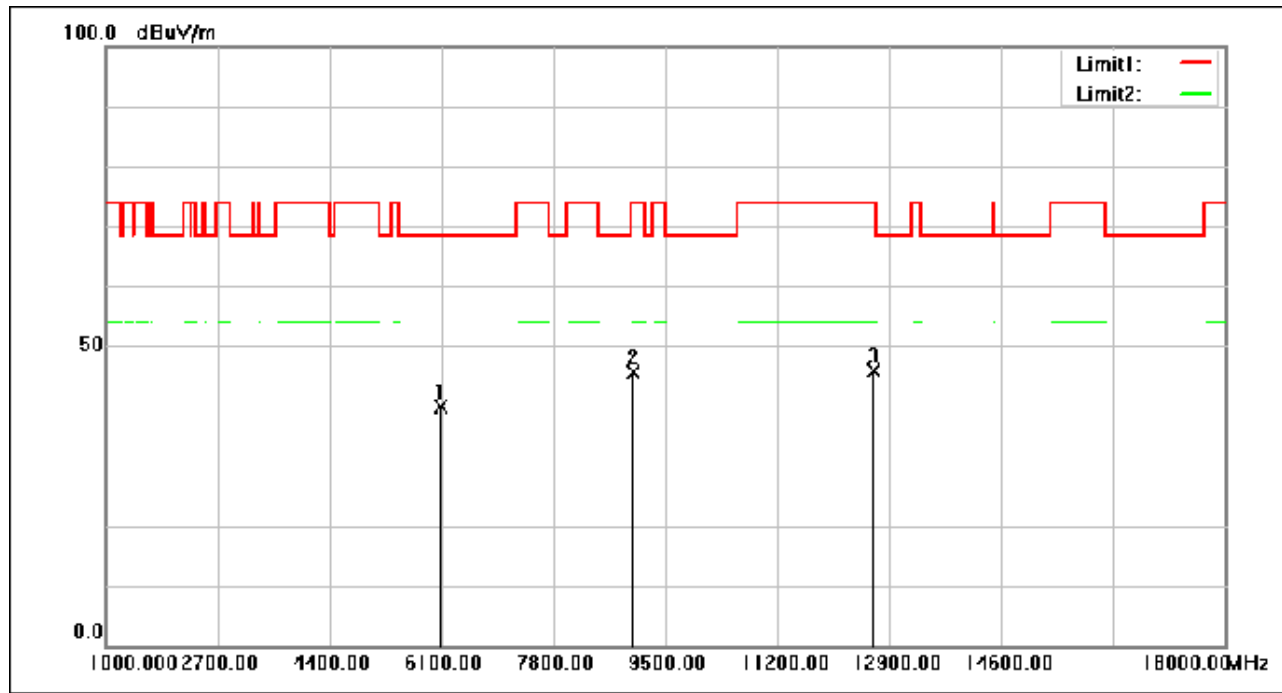

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6083.000	52.76	-12.78	39.98	68.30	-28.32	peak
2	9007.000	53.40	-7.68	45.72	74.00	-28.28	peak
3	12662.000	51.64	-5.83	45.81	74.00	-28.19	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 101 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

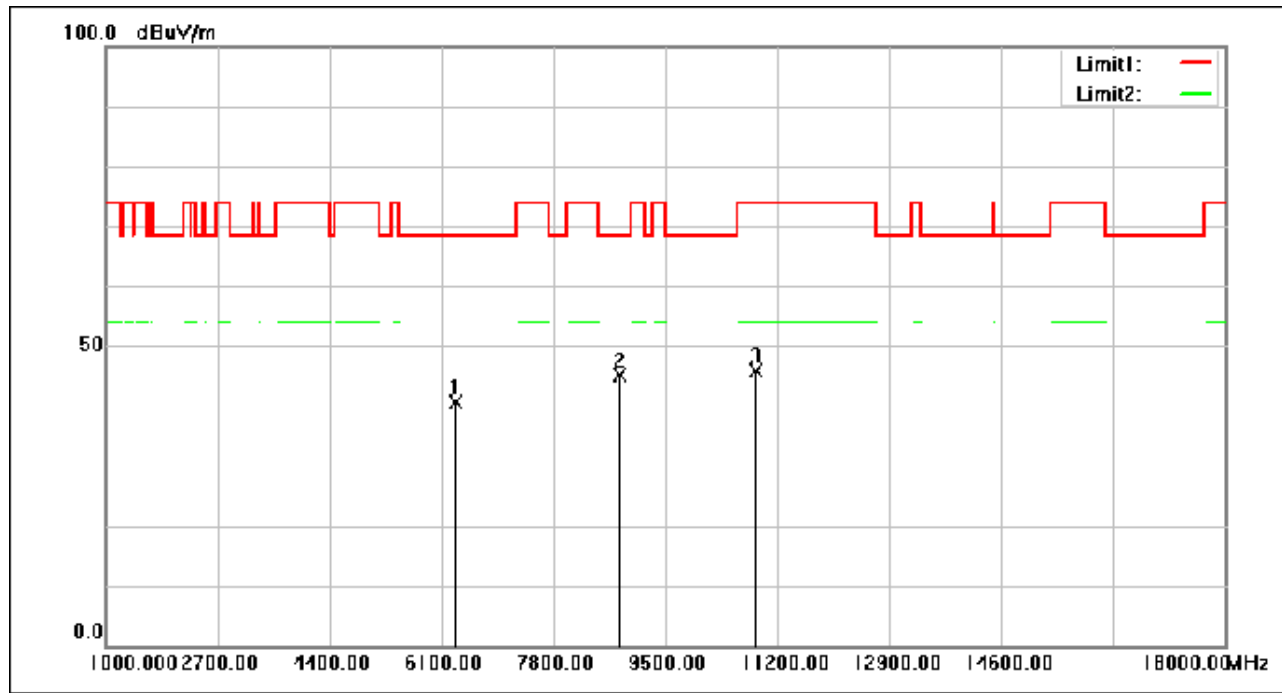

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6321.000	52.39	-11.81	40.58	68.30	-27.72	peak
2	8803.000	53.32	-8.15	45.17	68.30	-23.13	peak
3	10860.000	52.26	-6.36	45.90	74.00	-28.10	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 102 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

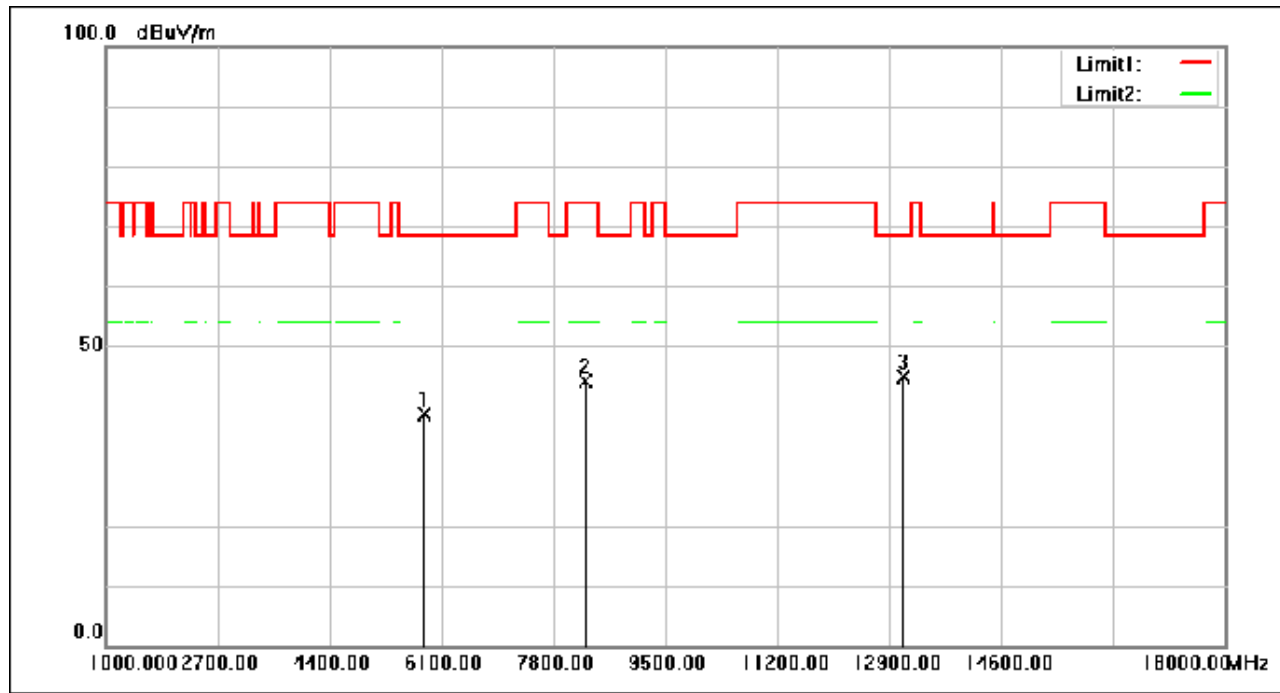

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5845.000	52.59	-14.05	38.54	68.30	-29.76	peak
2	8293.000	53.12	-9.08	44.04	74.00	-29.96	peak
3	13121.000	50.40	-5.52	44.88	68.30	-23.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 103 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

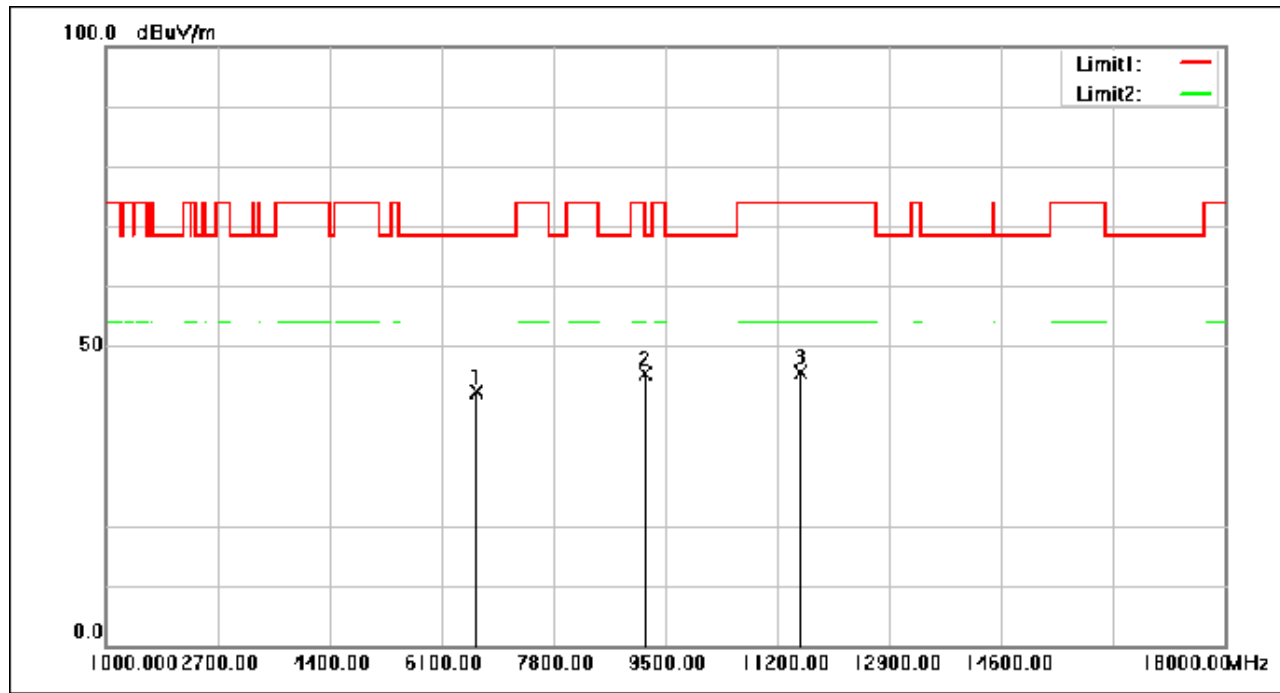

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6627.000	52.95	-10.55	42.40	68.30	-25.90	peak
2	9194.000	52.81	-7.39	45.42	74.00	-28.58	peak
3	11557.000	51.66	-6.10	45.56	74.00	-28.44	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 104 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

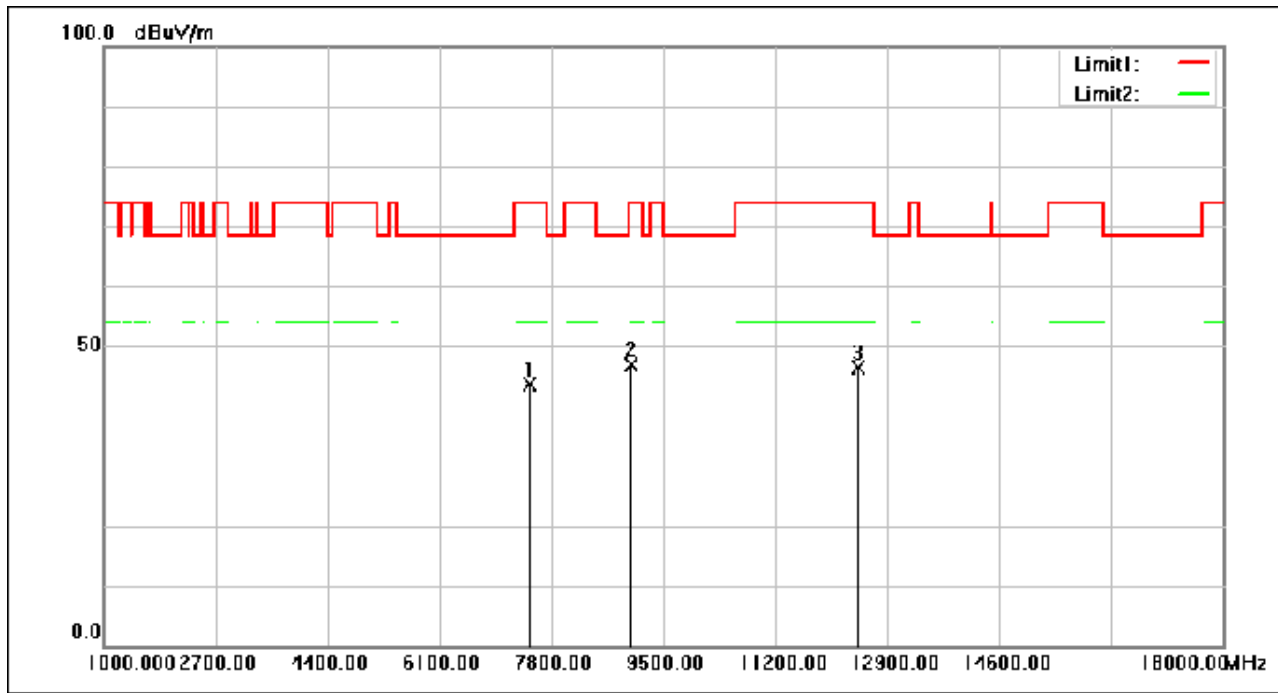

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7460.000	53.16	-9.53	43.63	74.00	-30.37	peak
2	9007.000	54.44	-7.68	46.76	74.00	-27.24	peak
3	12458.000	52.46	-6.00	46.46	74.00	-27.54	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 105 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

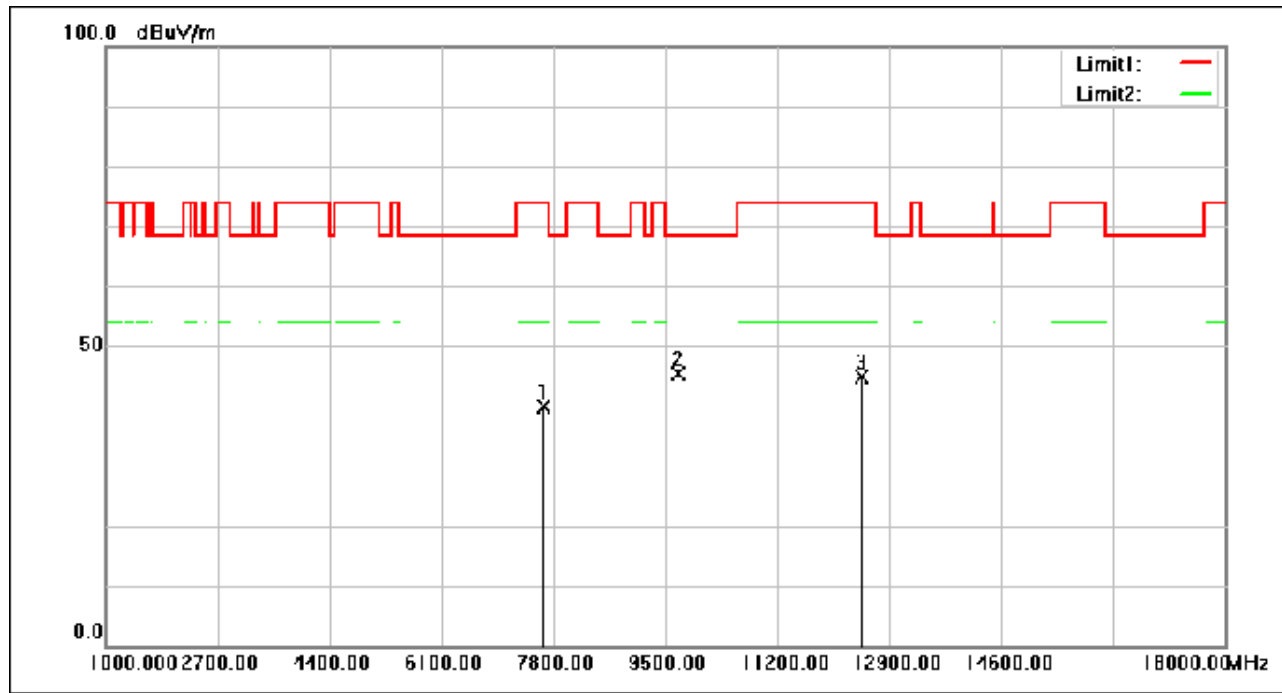

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7656.520	49.29	-9.47	39.82	74.00	-34.18	peak
2	9699.240	52.02	-6.55	45.47	68.30	-22.83	peak
3	12483.840	50.97	-5.97	45.00	74.00	-29.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 106 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

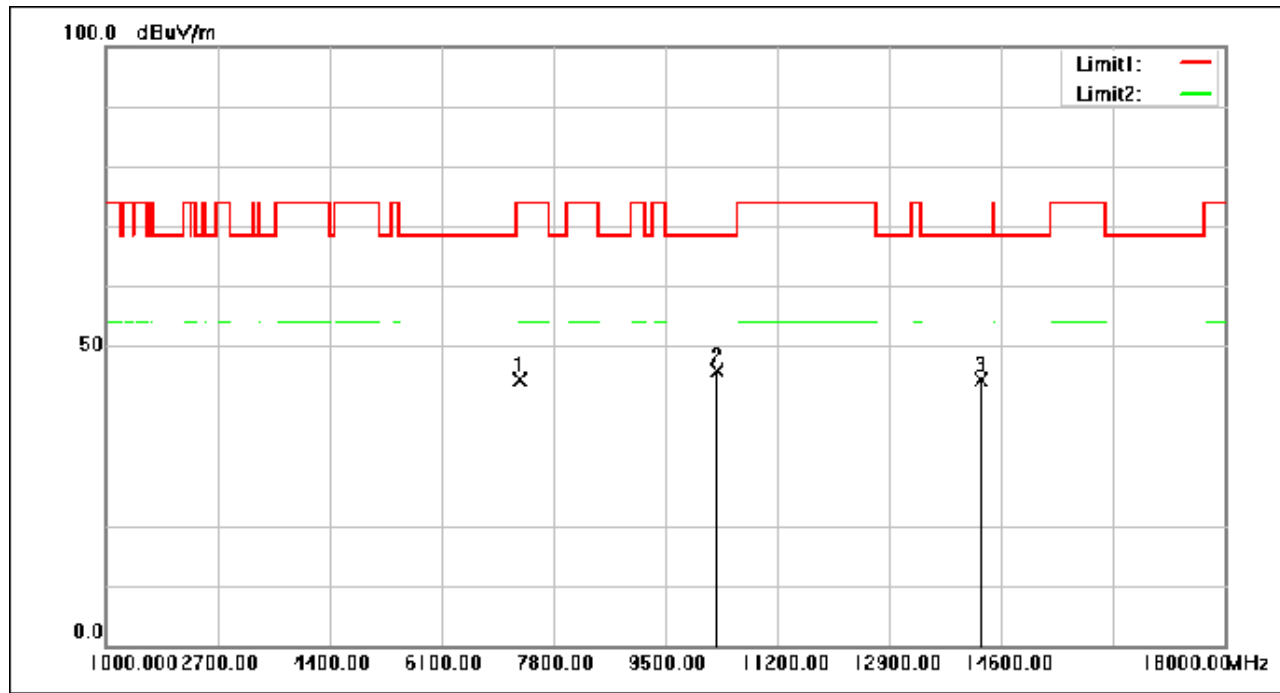

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7304.960	54.16	-9.71	44.45	74.00	-29.55	peak
2	10298.320	52.19	-6.36	45.83	68.30	-22.47	peak
3	14295.360	50.80	-6.50	44.30	68.30	-24.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 107 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

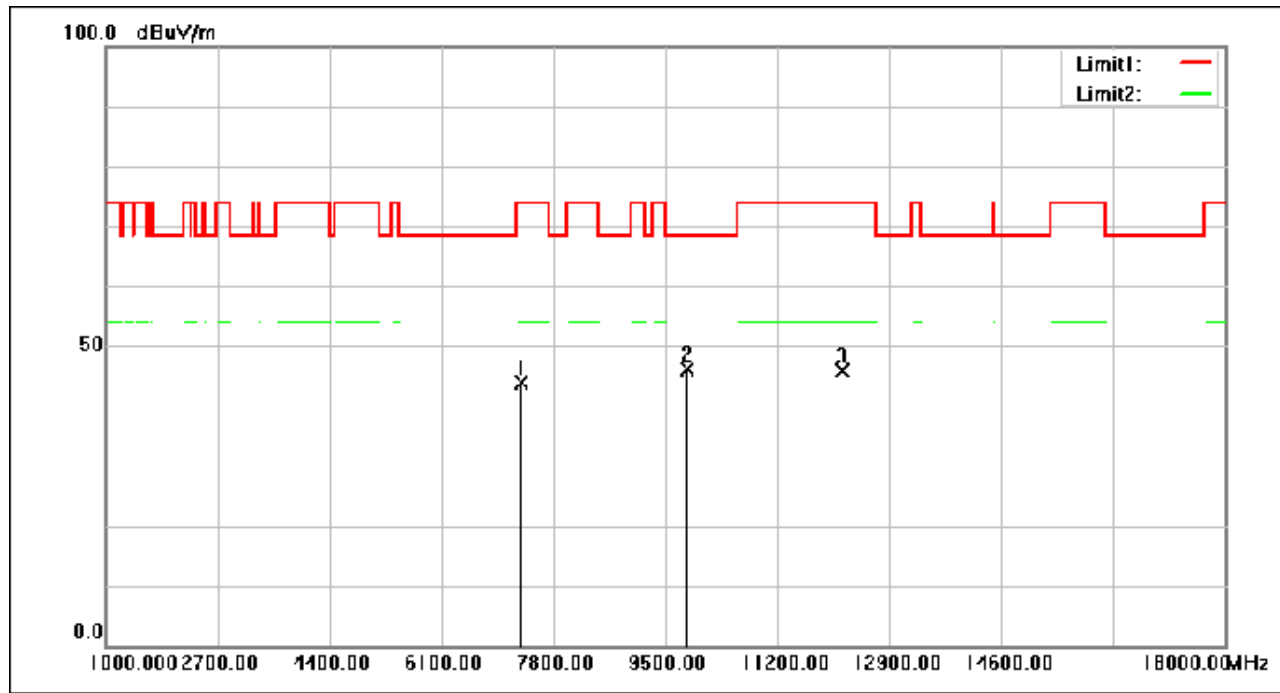

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.360	53.48	-9.71	43.77	74.00	-30.23	peak
2	9833.200	52.56	-6.31	46.25	68.30	-22.05	peak
3	12198.920	52.20	-6.22	45.98	74.00	-28.02	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 108 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

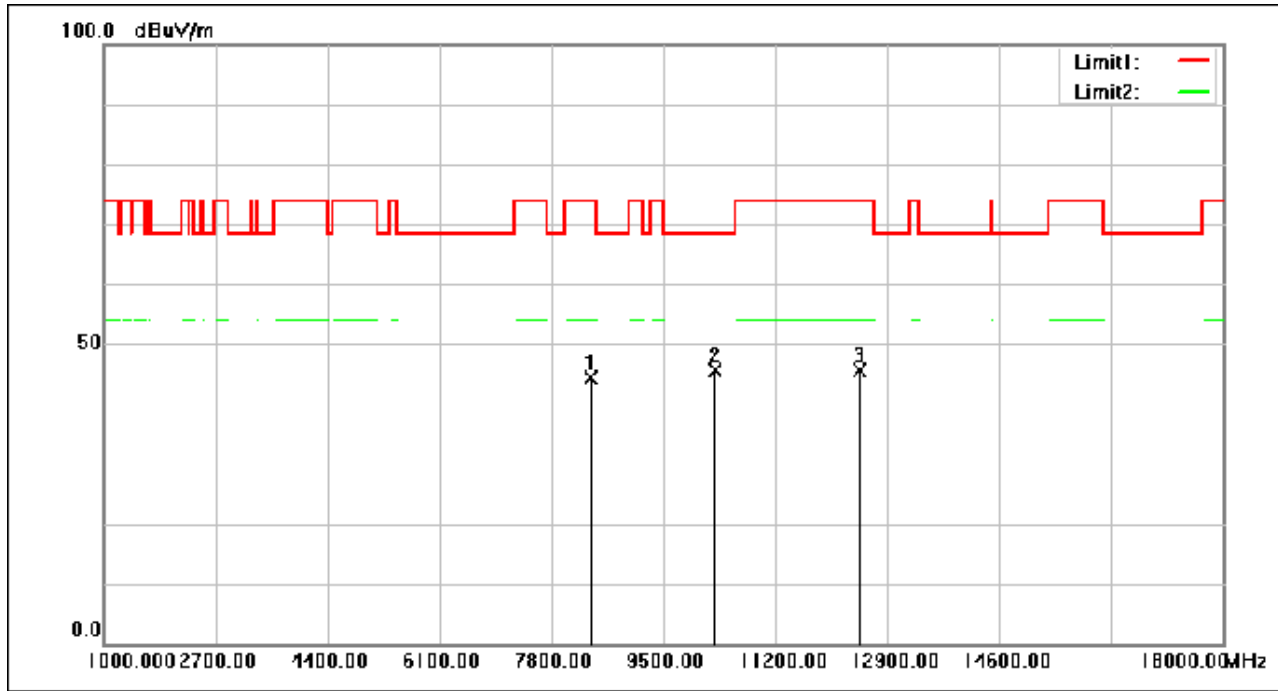

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8403.160	53.32	-8.93	44.39	74.00	-29.61	peak
2	10296.280	51.93	-6.36	45.57	68.30	-22.73	peak
3	12487.920	51.52	-5.97	45.55	74.00	-28.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 109 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

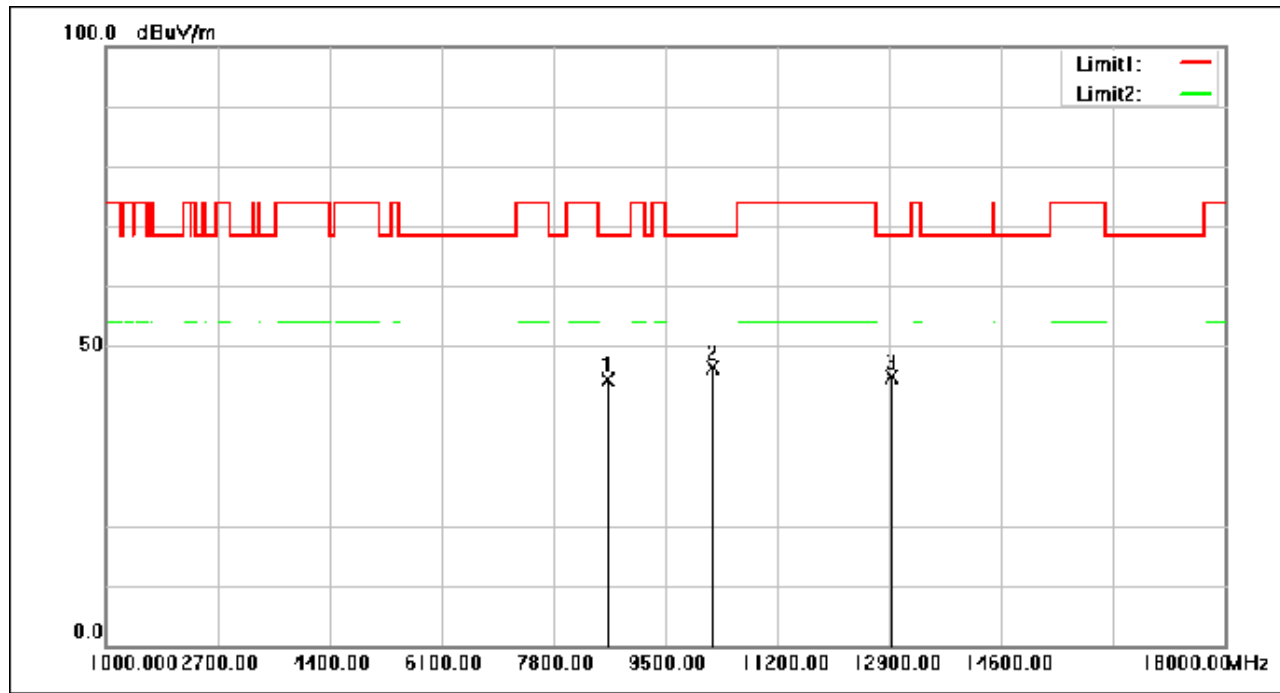

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8644.560	52.88	-8.49	44.39	68.30	-23.91	peak
2	10218.080	52.73	-6.35	46.38	68.30	-21.92	peak
3	12942.840	50.43	-5.59	44.84	68.30	-23.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 110 of 929

Test Mode: 02; Polarity: Vertical; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

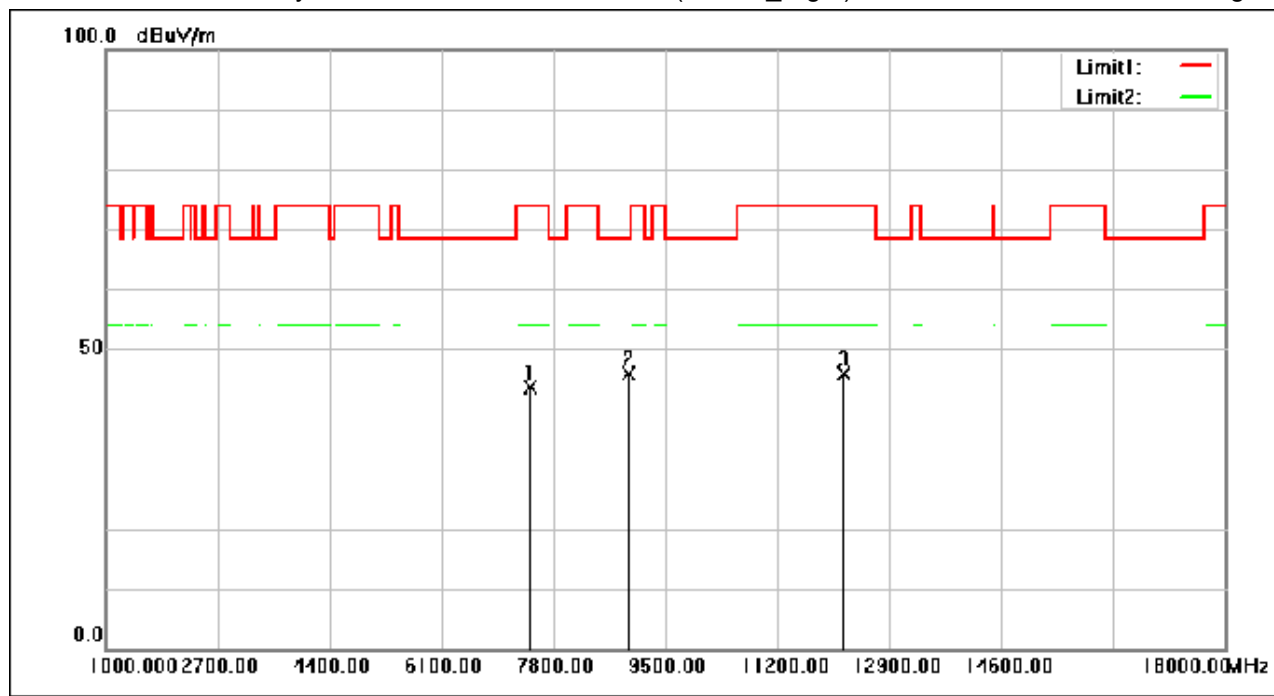

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7455.240	53.19	-9.54	43.65	74.00	-30.35	peak
2	8953.960	53.69	-7.83	45.86	68.30	-22.44	peak
3	12204.360	52.04	-6.22	45.82	74.00	-28.18	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 111 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

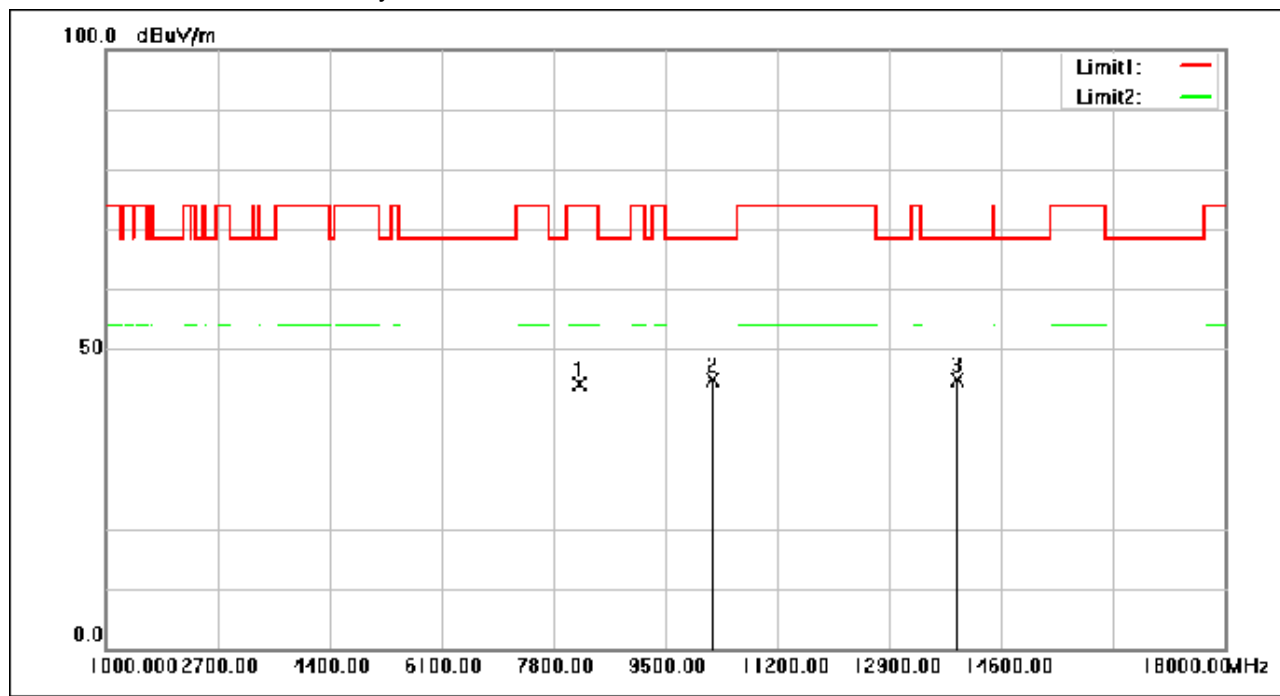

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8201.200	53.42	-9.21	44.21	74.00	-29.79	peak
2	10229.640	51.33	-6.36	44.97	68.30	-23.33	peak
3	13941.080	51.22	-6.26	44.96	68.30	-23.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 112 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

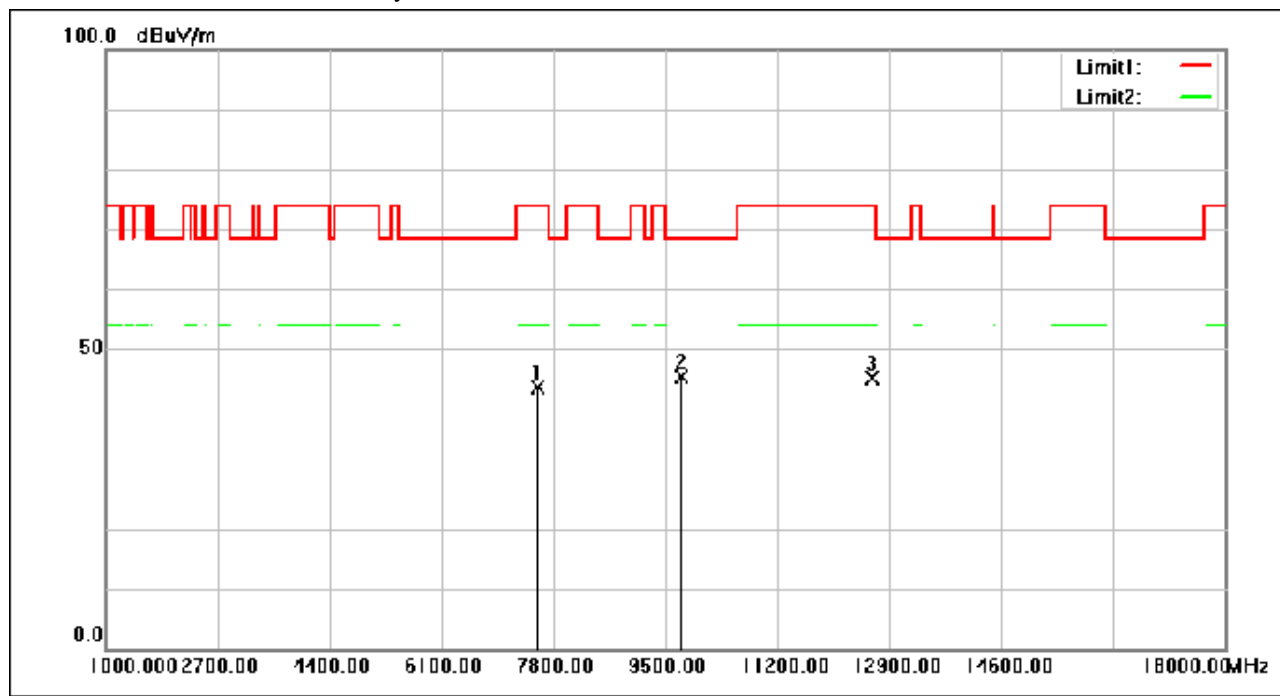

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7573.560	53.10	-9.47	43.63	74.00	-30.37	peak
2	9754.320	51.80	-6.45	45.35	68.30	-22.95	peak
3	12653.840	50.90	-5.83	45.07	74.00	-28.93	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 113 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

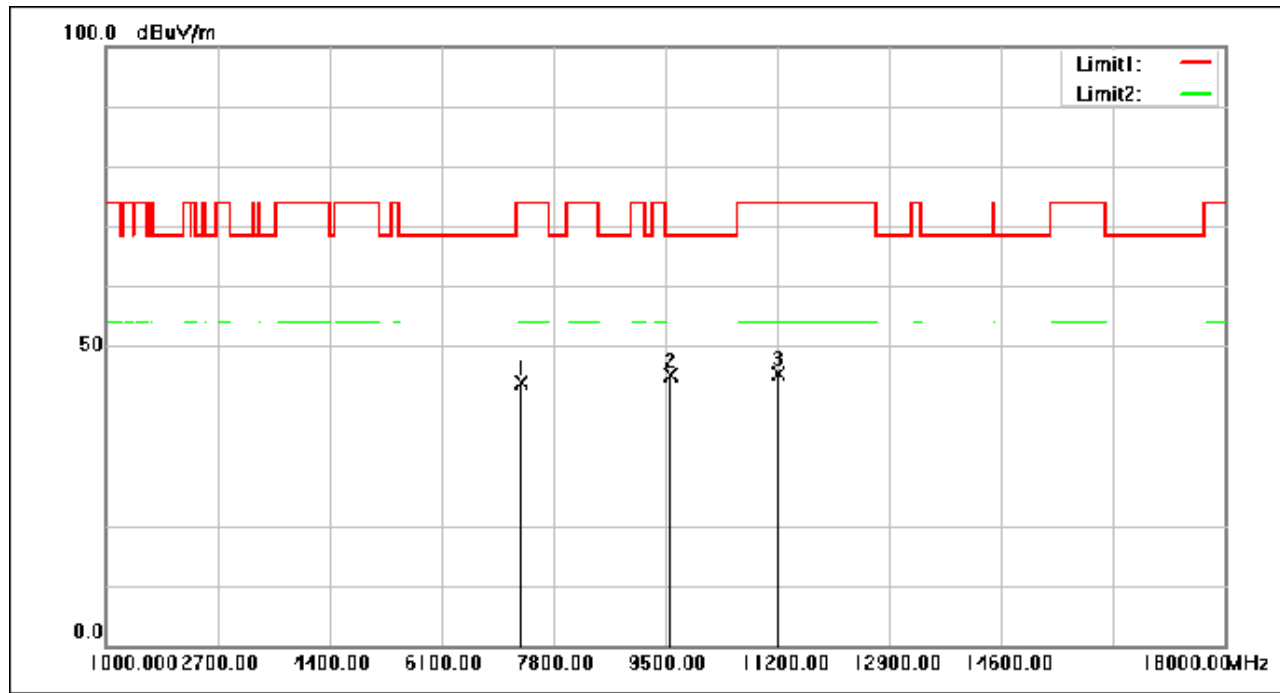

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7309.720	53.63	-9.71	43.92	74.00	-30.08	peak
2	9571.400	51.83	-6.77	45.06	68.30	-23.24	peak
3	11222.440	51.54	-6.23	45.31	74.00	-28.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 114 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

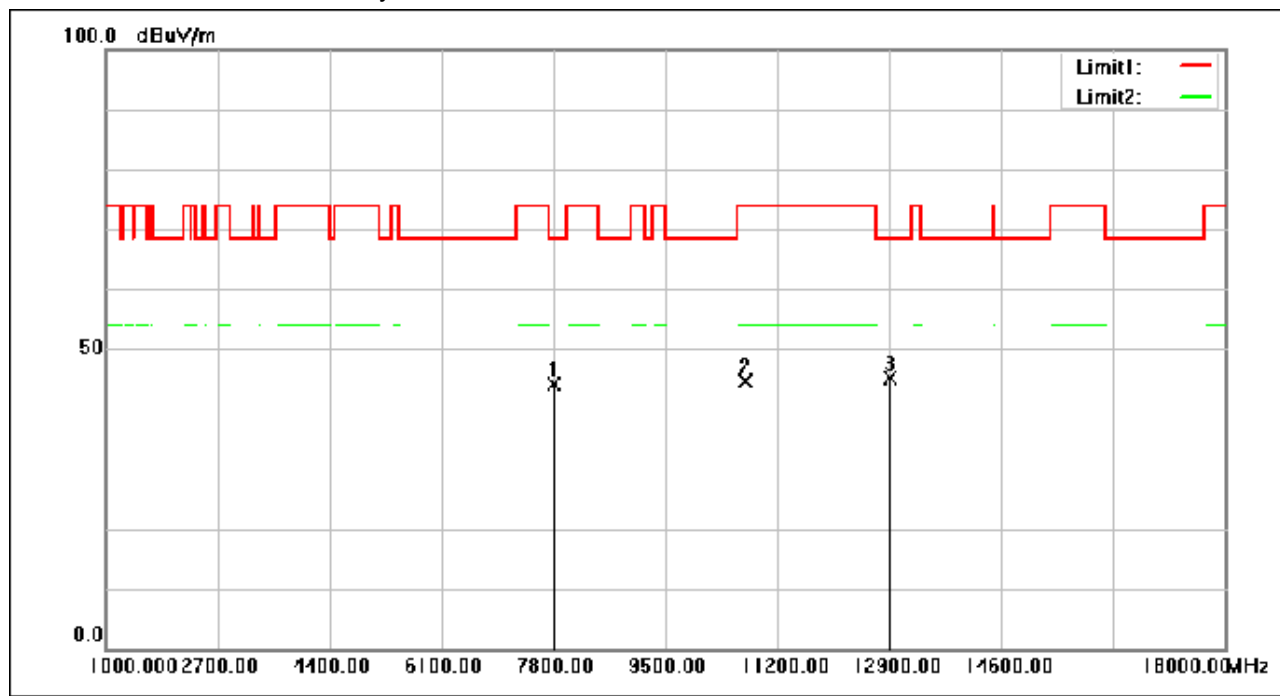

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7800.680	53.49	-9.48	44.01	68.30	-24.29	peak
2	10720.600	50.97	-6.38	44.59	74.00	-29.41	peak
3	12901.360	50.85	-5.62	45.23	68.30	-23.07	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 115 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

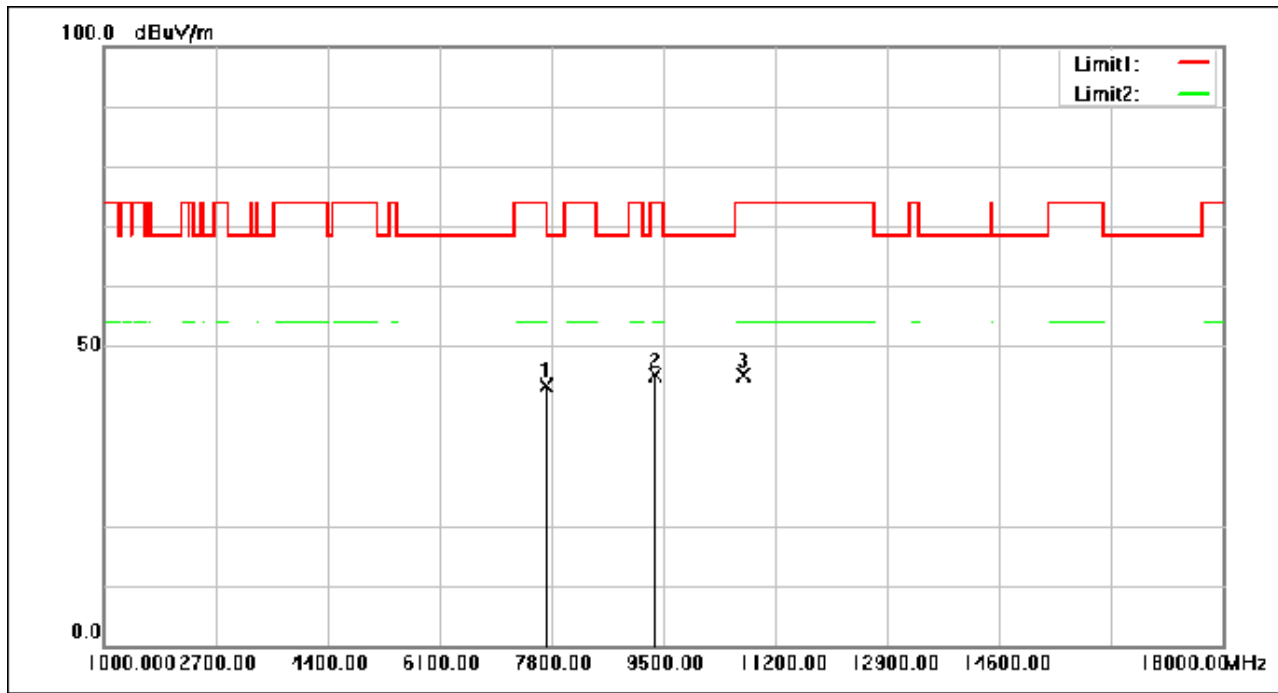

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7721.120	52.86	-9.47	43.39	74.00	-30.61	peak
2	9397.320	52.32	-7.07	45.25	74.00	-28.75	peak
3	10714.480	51.61	-6.38	45.23	74.00	-28.77	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 116 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

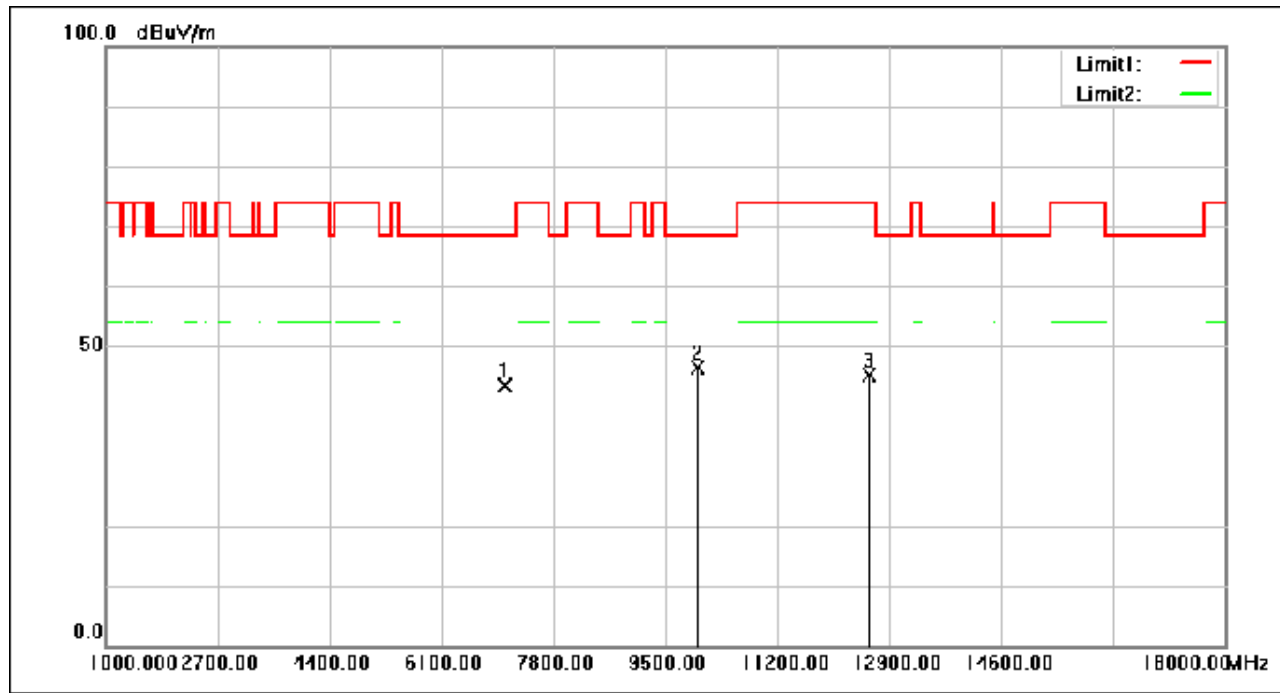

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7084.640	53.27	-9.89	43.38	68.30	-24.92	peak
2	9993.000	52.74	-6.33	46.41	68.30	-21.89	peak
3	12594.680	50.93	-5.88	45.05	74.00	-28.95	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 117 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

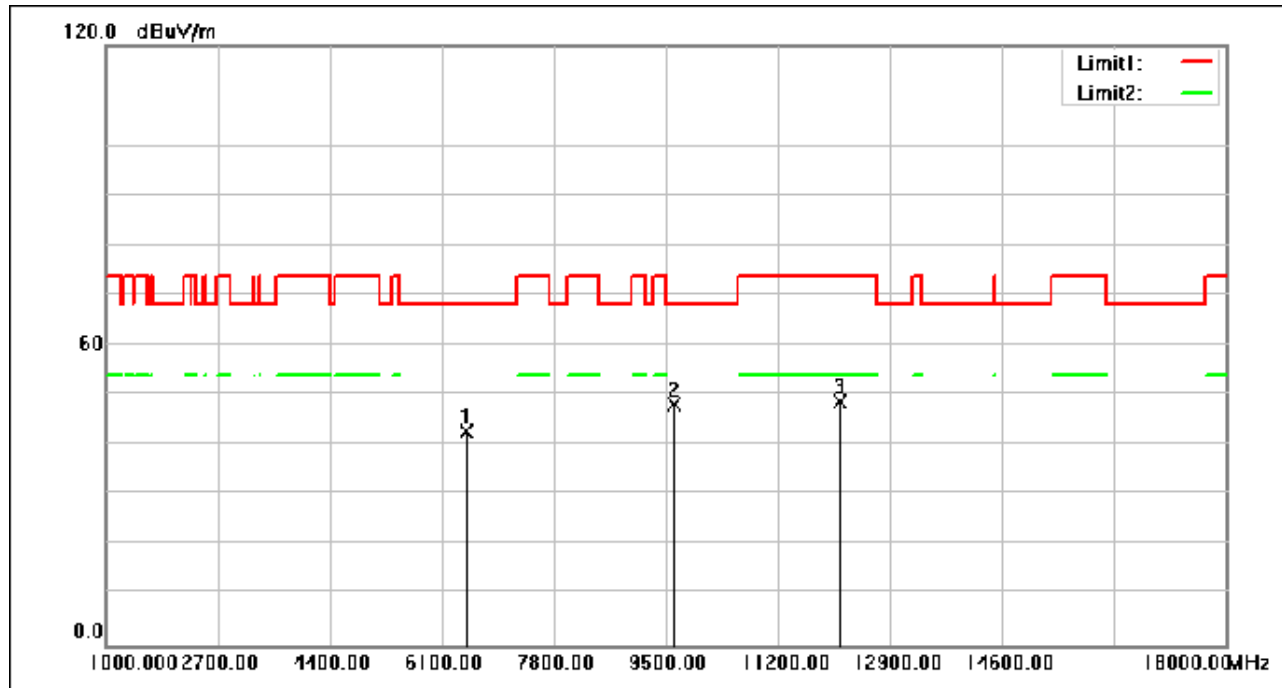

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6474.000	53.85	-11.18	42.67	68.30	-25.63	peak
2	9626.650	54.77	-6.68	48.09	68.30	-20.21	peak
3	12139.250	54.91	-6.27	48.64	74.00	-25.36	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 118 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

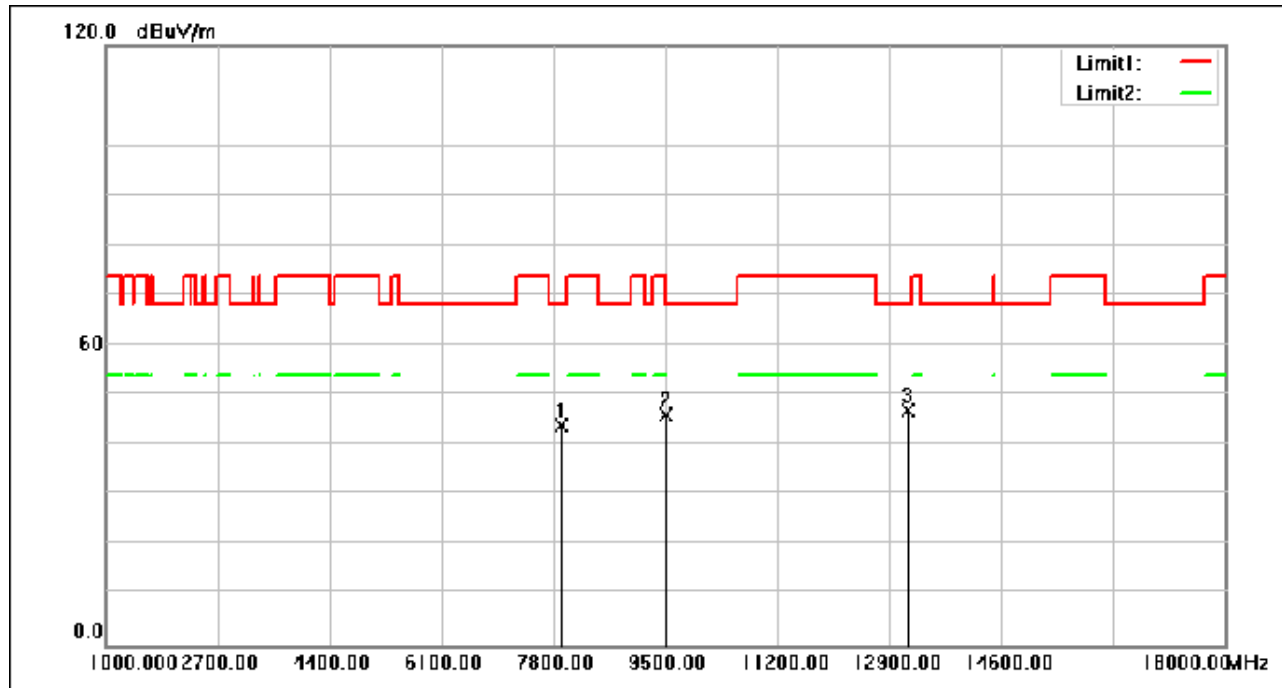

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7928.350	53.41	-9.50	43.91	68.30	-24.39	peak
2	9531.450	52.96	-6.85	46.11	68.30	-22.19	peak
3	13200.050	52.39	-5.57	46.82	68.30	-21.48	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 119 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

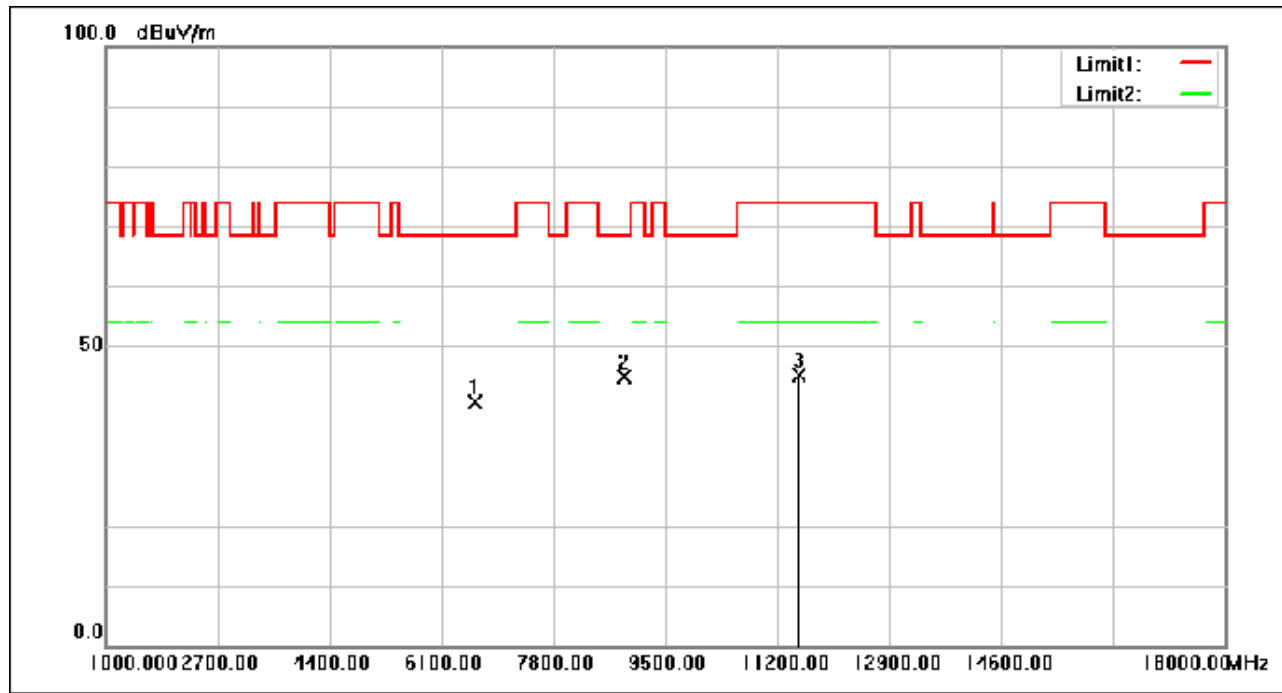

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6616.800	51.31	-10.59	40.72	68.30	-27.58	peak
2	8873.040	52.90	-8.00	44.90	68.30	-23.40	peak
3	11523.680	51.29	-6.07	45.22	74.00	-28.78	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 120 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

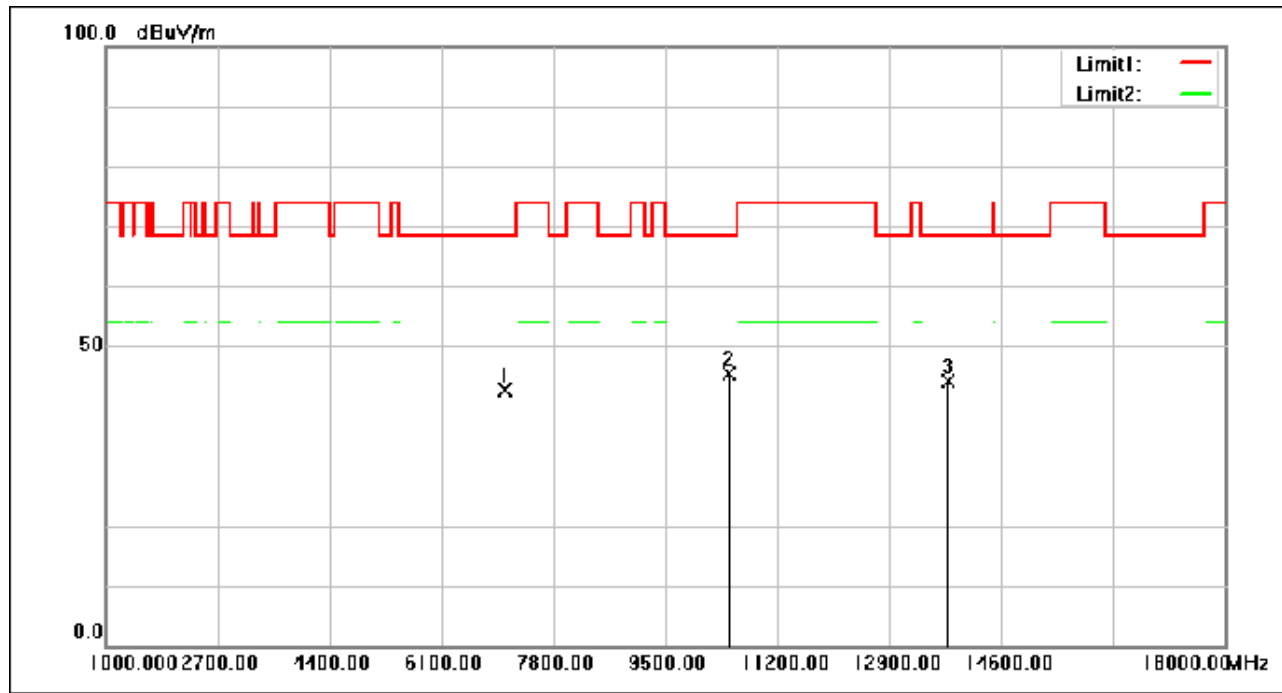

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7079.880	52.64	-9.89	42.75	68.30	-25.55	peak
2	10469.000	51.74	-6.39	45.35	68.30	-22.95	peak
3	13786.720	50.27	-6.08	44.19	68.30	-24.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 121 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

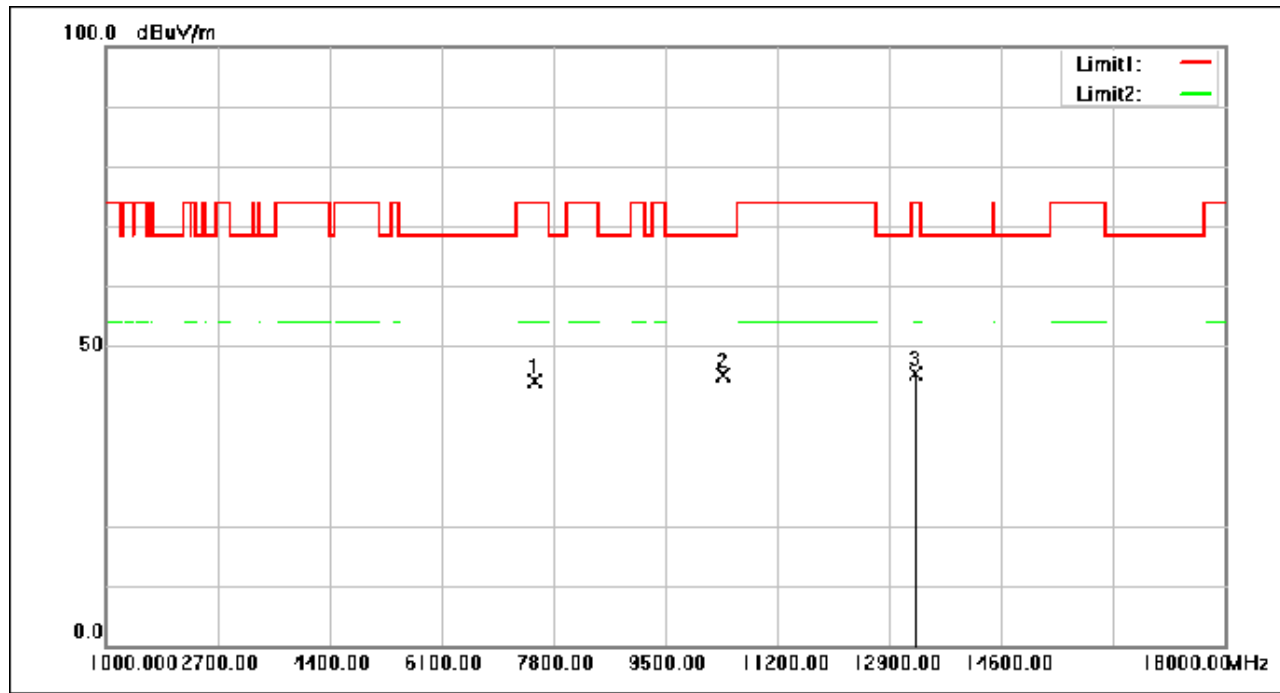

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7522.560	53.48	-9.46	44.02	74.00	-29.98	peak
2	10374.480	51.56	-6.37	45.19	68.30	-23.11	peak
3	13304.600	50.88	-5.62	45.26	74.00	-28.74	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 122 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

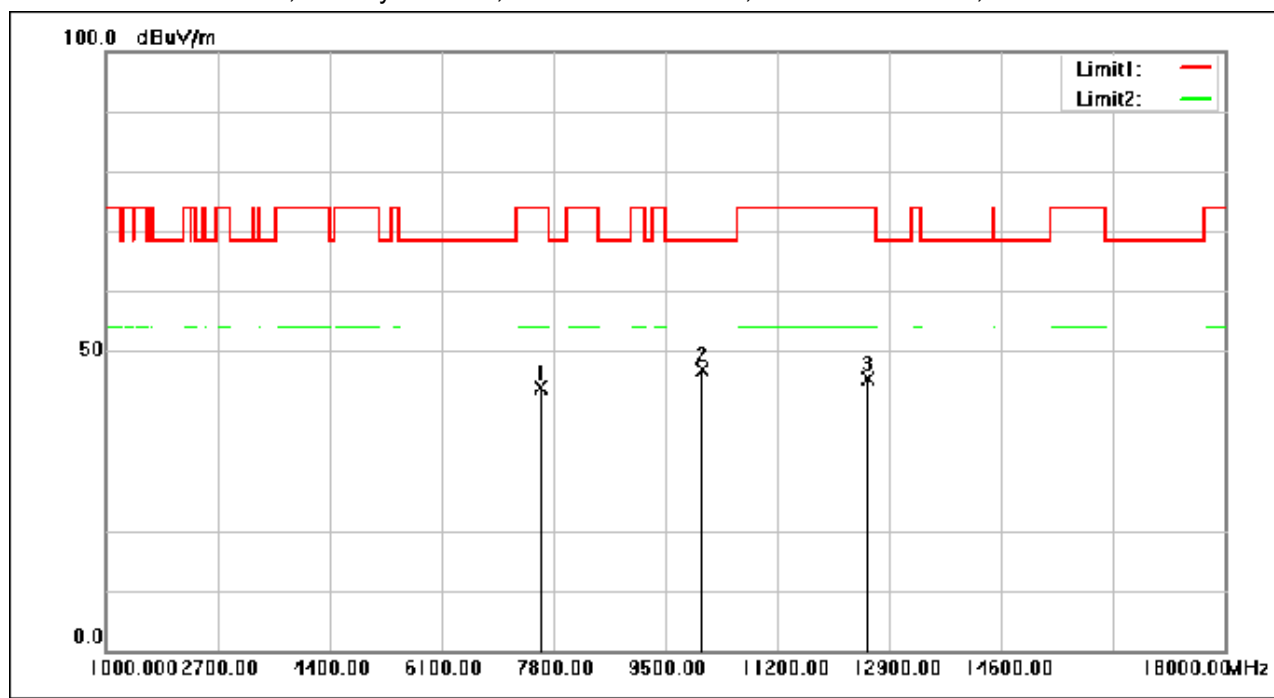

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7614.360	53.38	-9.47	43.91	74.00	-30.09	peak
2	10049.440	53.09	-6.33	46.76	68.30	-21.54	peak
3	12570.880	51.18	-5.91	45.27	74.00	-28.73	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 123 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

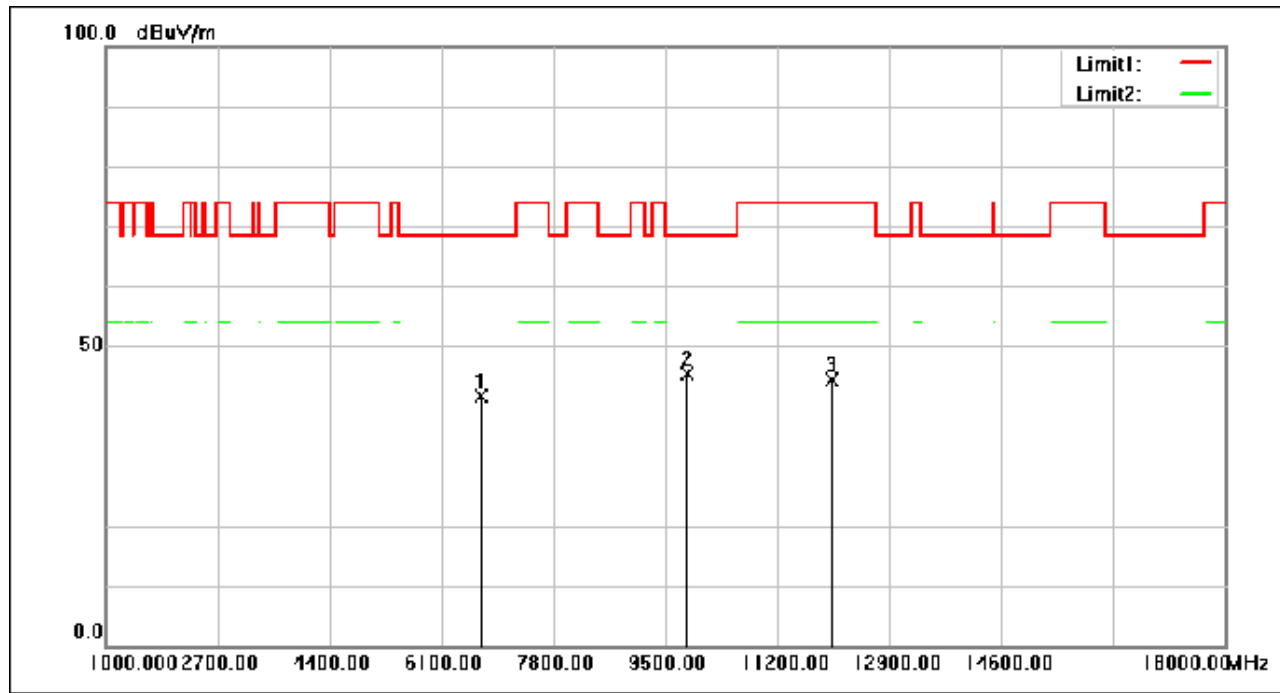

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6707.240	51.87	-10.22	41.65	68.30	-26.65	peak
2	9823.000	51.68	-6.32	45.36	68.30	-22.94	peak
3	12039.800	50.82	-6.35	44.47	74.00	-29.53	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 124 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

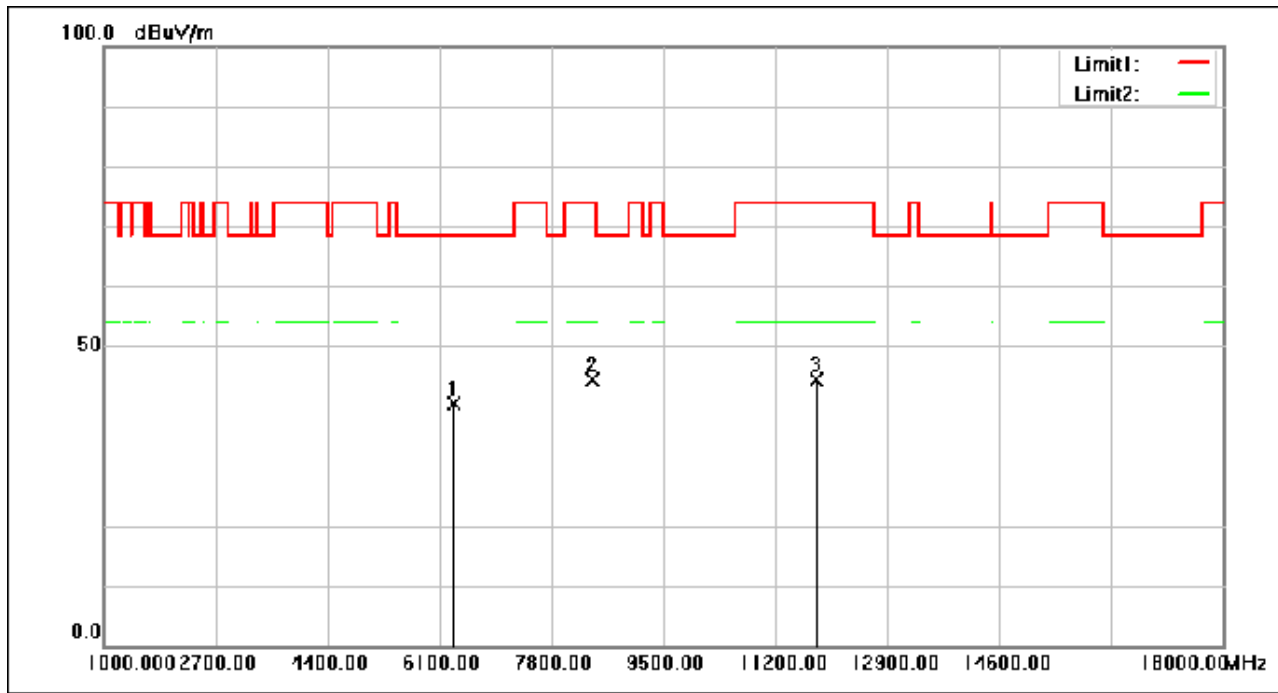

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6326.440	52.29	-11.79	40.50	68.30	-27.80	peak
2	8439.880	53.22	-8.88	44.34	74.00	-29.66	peak
3	11832.400	50.64	-6.32	44.32	74.00	-29.68	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 125 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

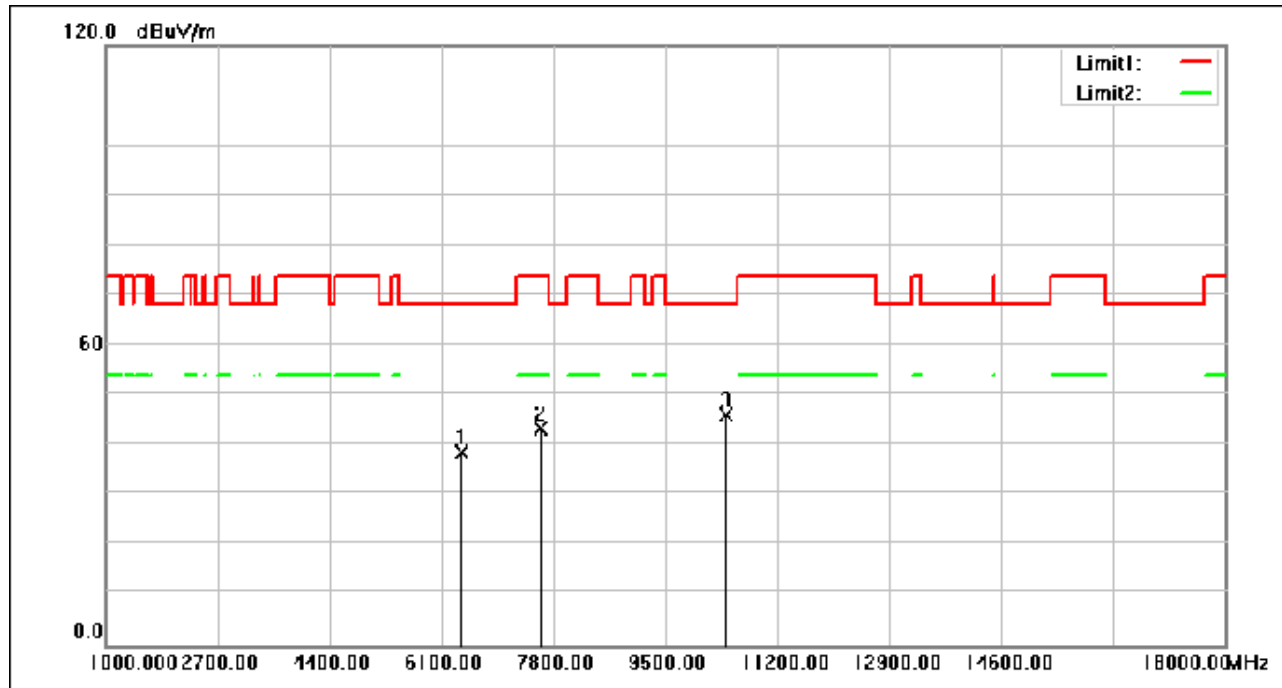

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6406.850	50.01	-11.46	38.55	68.30	-29.75	peak
2	7618.100	52.72	-9.47	43.25	74.00	-30.75	peak
3	10422.250	52.42	-6.38	46.04	68.30	-22.26	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 126 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:CH144(5720MHz)

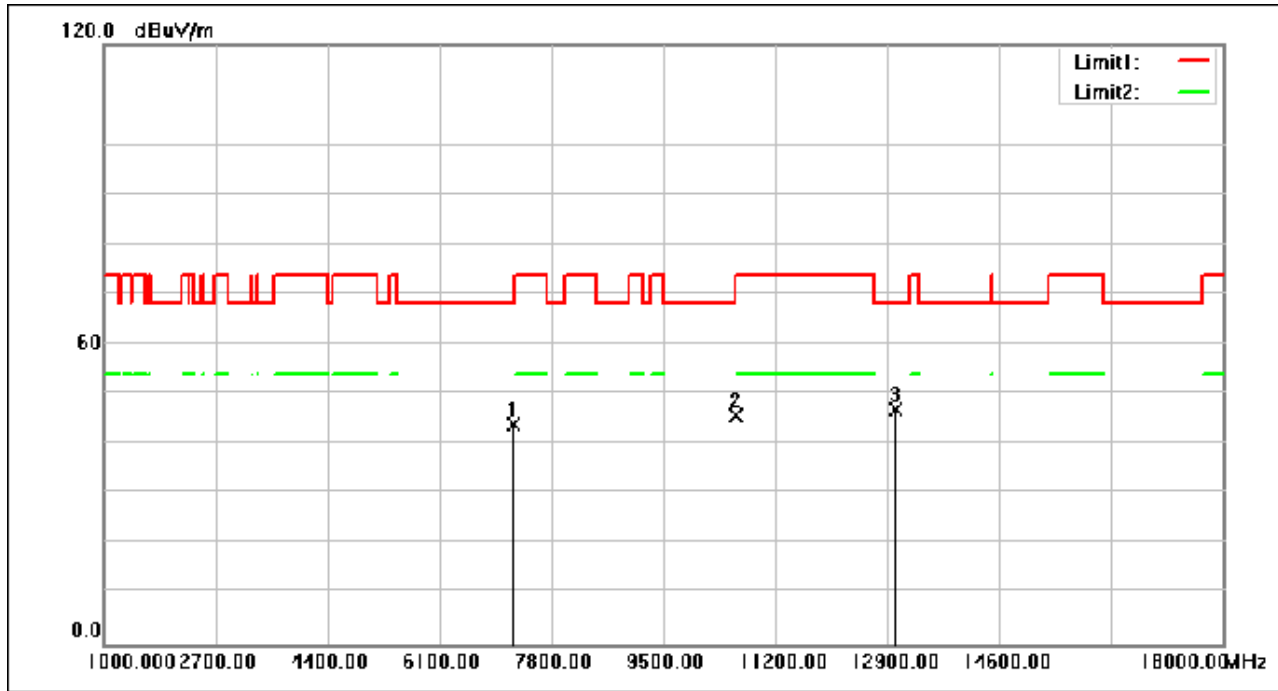

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7233.050	53.67	-9.77	43.90	68.30	-24.40	peak
2	10620.300	52.05	-6.38	45.67	74.00	-28.33	peak
3	13030.900	52.49	-5.53	46.96	68.30	-21.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 127 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

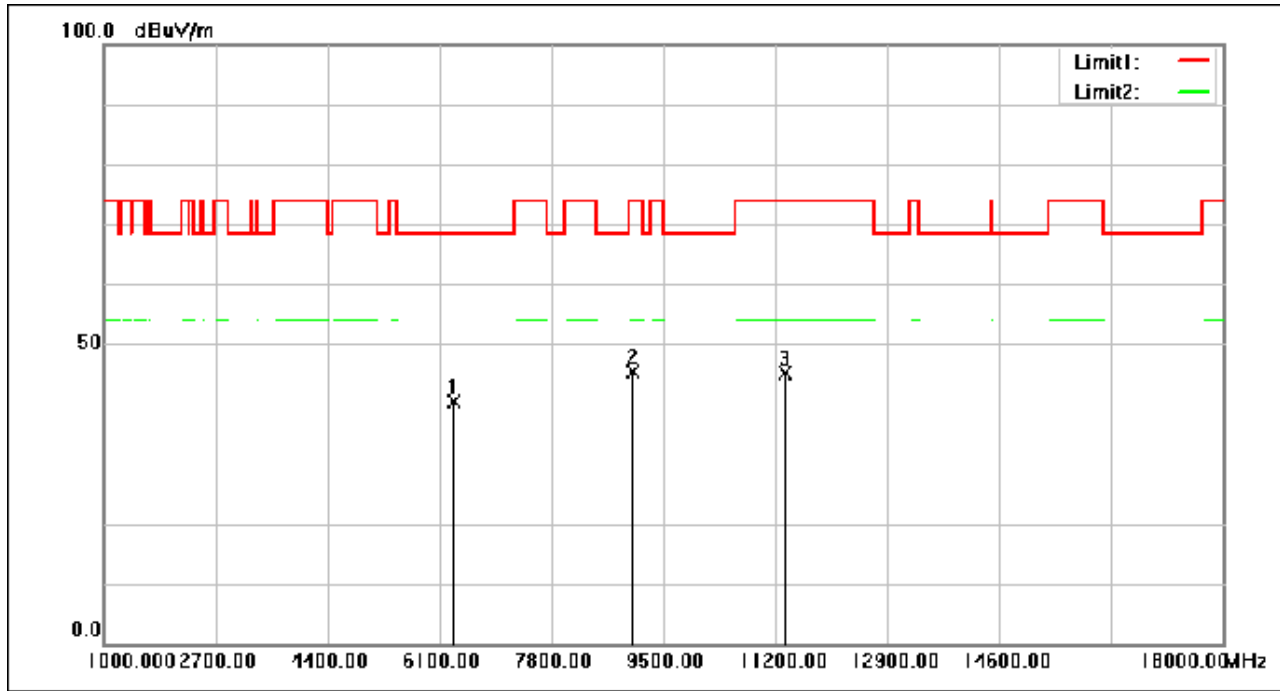

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6316.240	52.09	-11.83	40.26	68.30	-28.04	peak
2	9026.040	53.12	-7.66	45.46	74.00	-28.54	peak
3	11363.200	51.16	-6.14	45.02	74.00	-28.98	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 128 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

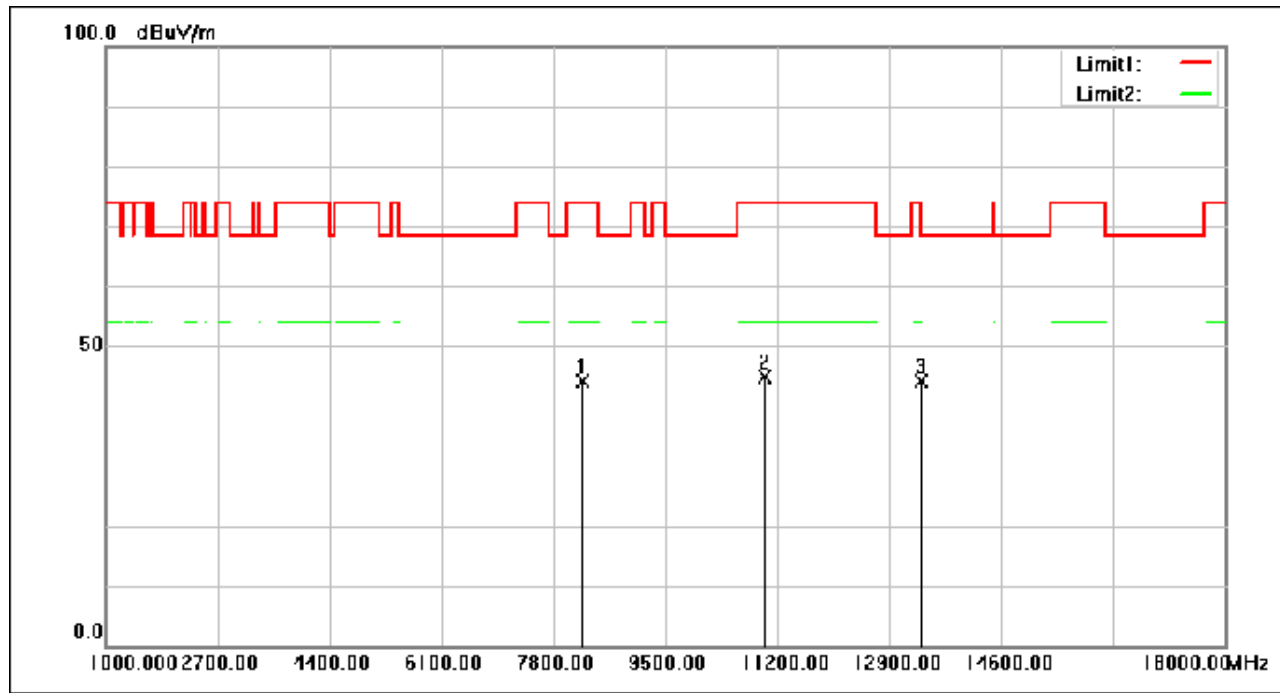

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8252.880	53.34	-9.14	44.20	74.00	-29.80	peak
2	11011.640	51.34	-6.35	44.99	74.00	-29.01	peak
3	13376.000	49.82	-5.67	44.15	74.00	-29.85	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 129 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

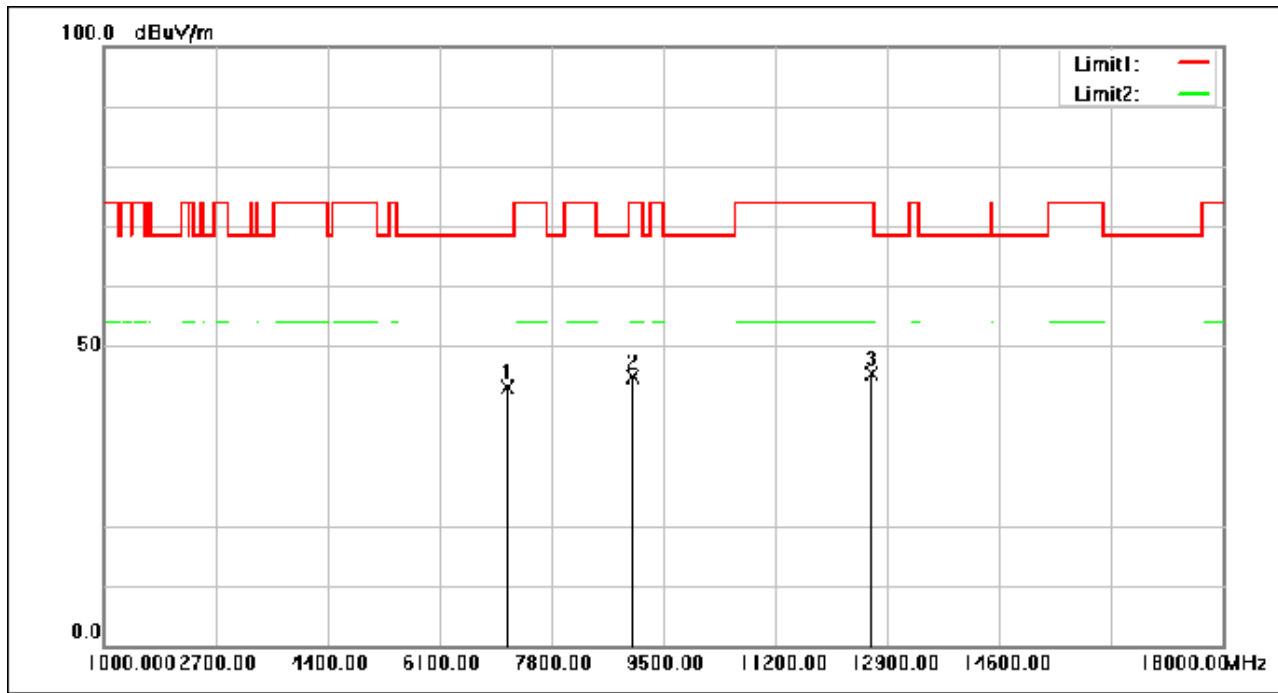

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7149.240	52.96	-9.84	43.12	68.30	-25.18	peak
2	9037.600	52.56	-7.64	44.92	74.00	-29.08	peak
3	12675.600	51.21	-5.81	45.40	74.00	-28.60	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 130 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

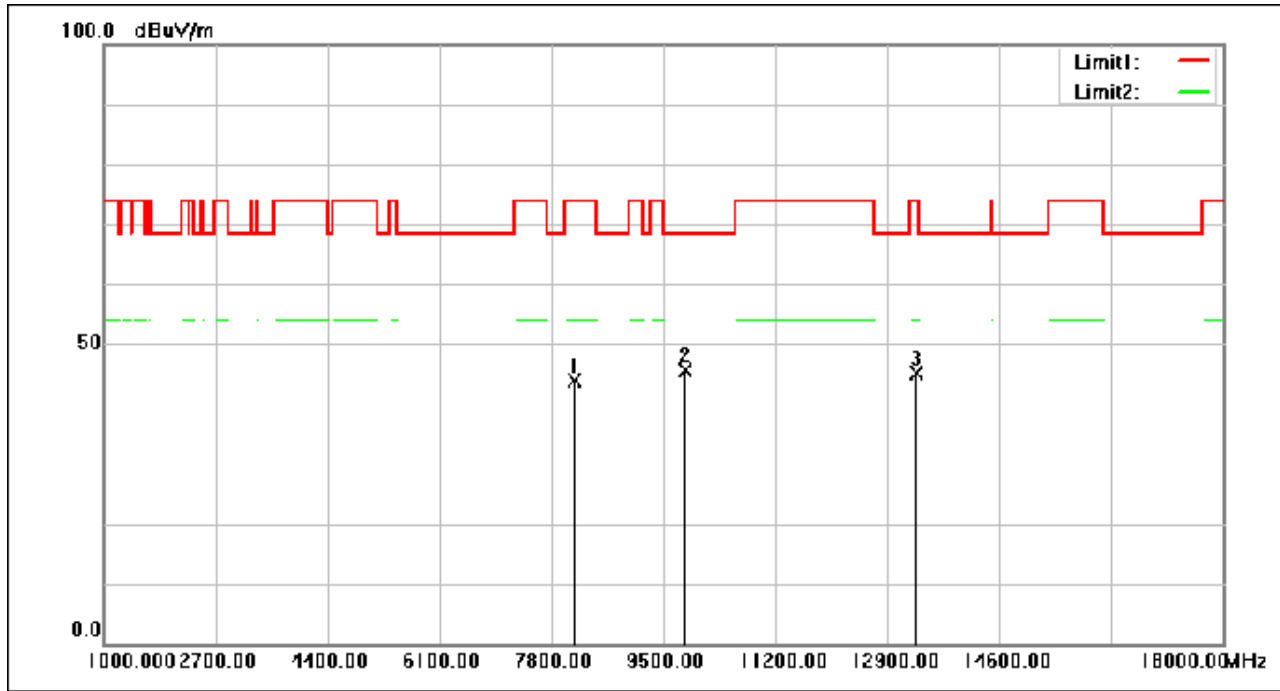

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8153.600	53.20	-9.27	43.93	74.00	-30.07	peak
2	9823.000	51.99	-6.32	45.67	68.30	-22.63	peak
3	13358.320	50.82	-5.65	45.17	74.00	-28.83	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 131 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

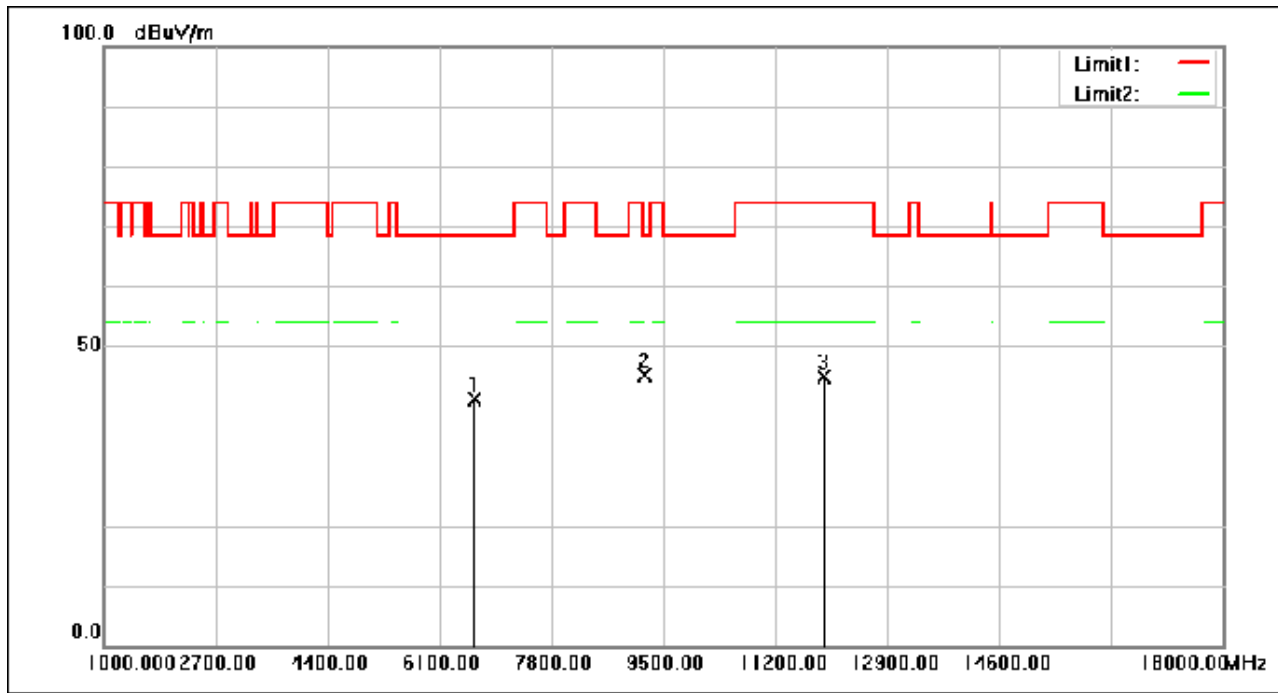

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6633.120	51.66	-10.53	41.13	68.30	-27.17	peak
2	9215.080	52.40	-7.36	45.04	68.30	-23.26	peak
3	11935.080	51.31	-6.39	44.92	74.00	-29.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 132 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

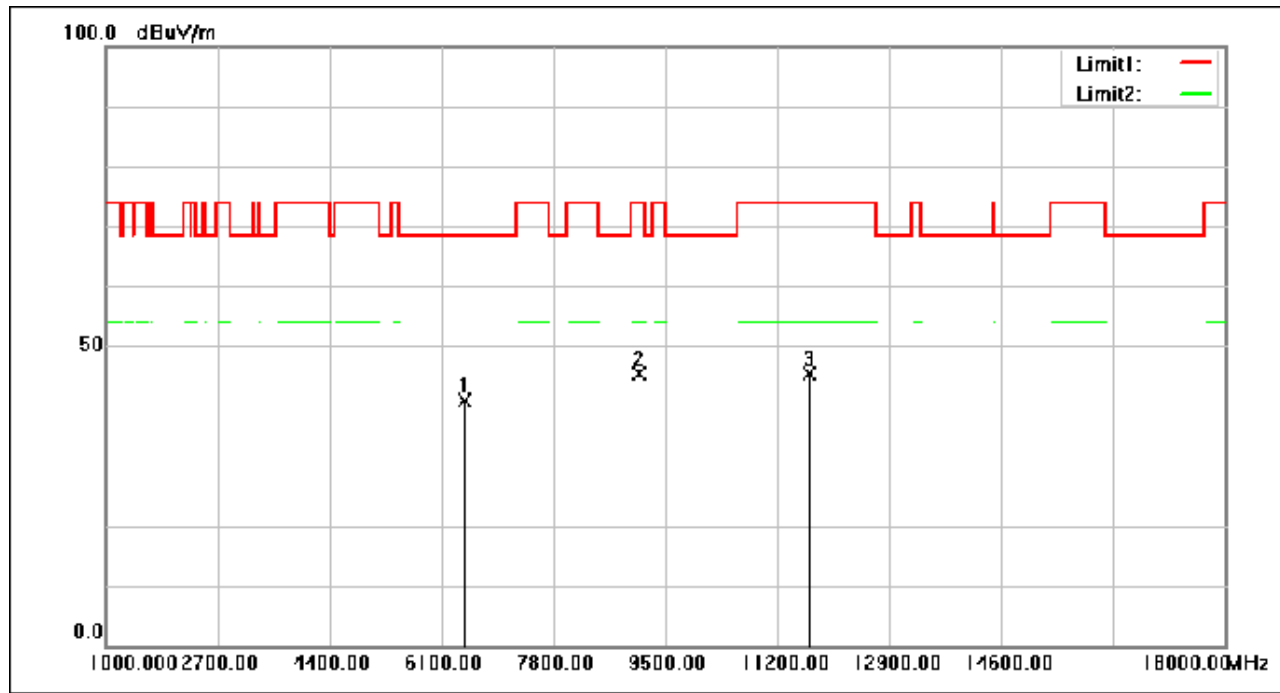

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6473.320	51.99	-11.18	40.81	68.30	-27.49	peak
2	9094.720	52.81	-7.55	45.26	74.00	-28.74	peak
3	11692.320	51.53	-6.22	45.31	74.00	-28.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 133 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

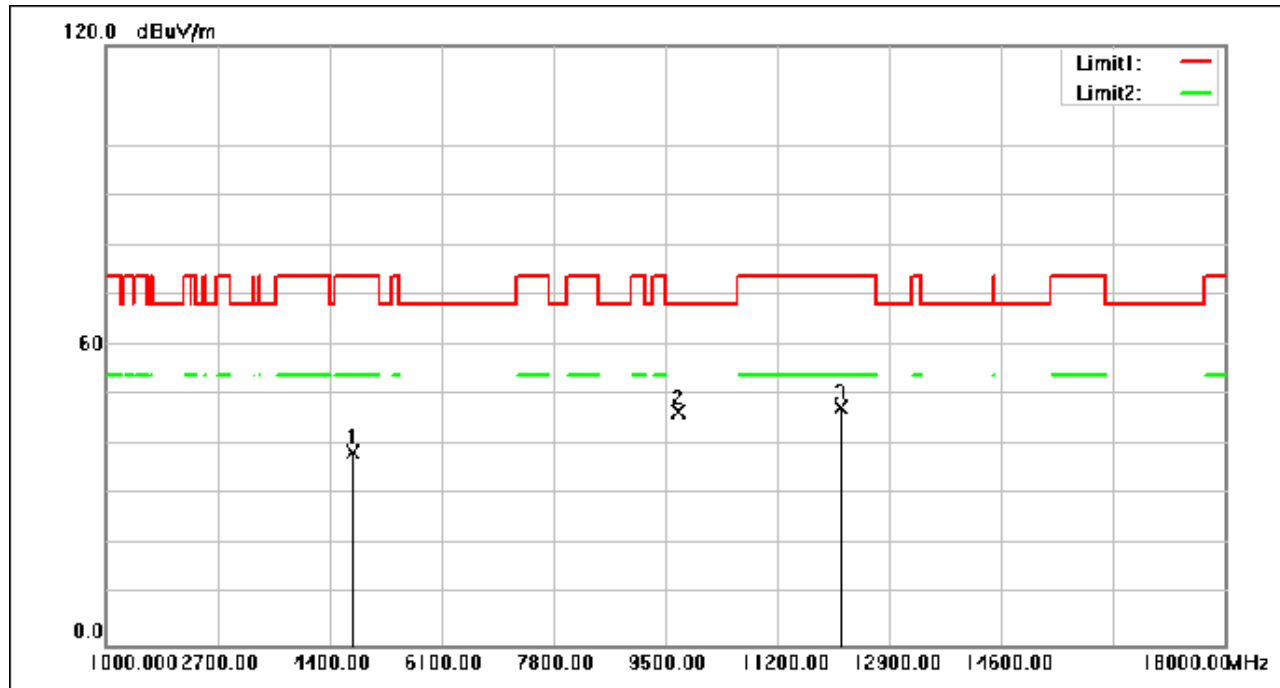

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4767.200	54.74	-16.31	38.43	74.00	-35.57	peak
2	9687.850	53.36	-6.57	46.79	68.30	-21.51	peak
3	12169.000	53.92	-6.25	47.67	74.00	-26.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 134 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:CH144(5720MHz)

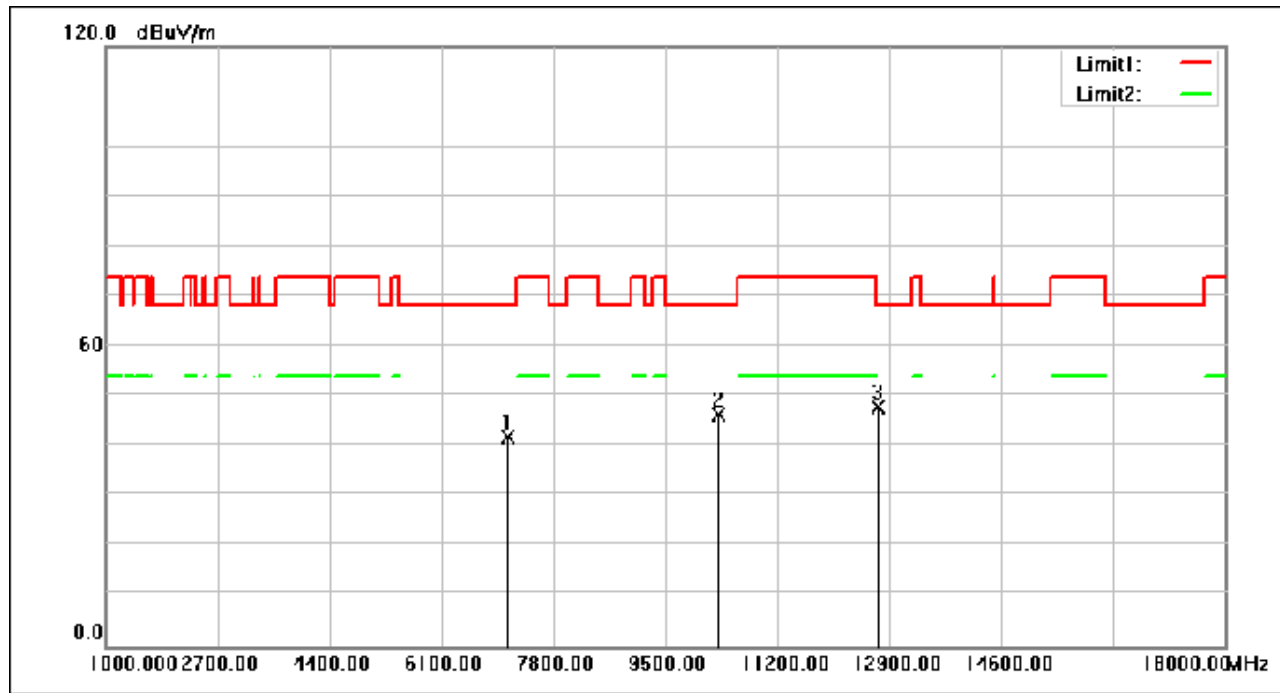

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7111.500	51.63	-9.87	41.76	68.30	-26.54	peak
2	10303.250	52.80	-6.37	46.43	68.30	-21.87	peak
3	12741.050	53.59	-5.76	47.83	68.30	-20.47	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 135 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

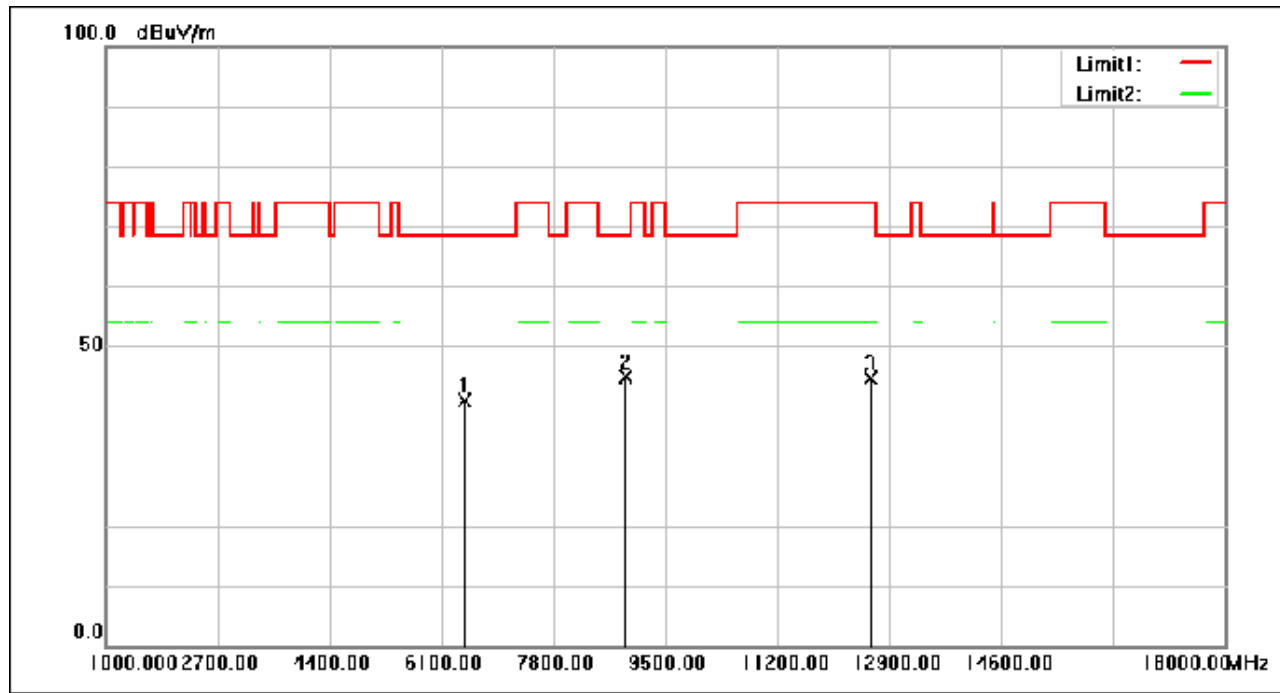

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6466.520	51.97	-11.21	40.76	68.30	-27.54	peak
2	8904.320	52.71	-7.94	44.77	68.30	-23.53	peak
3	12613.040	50.48	-5.87	44.61	74.00	-29.39	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 136 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

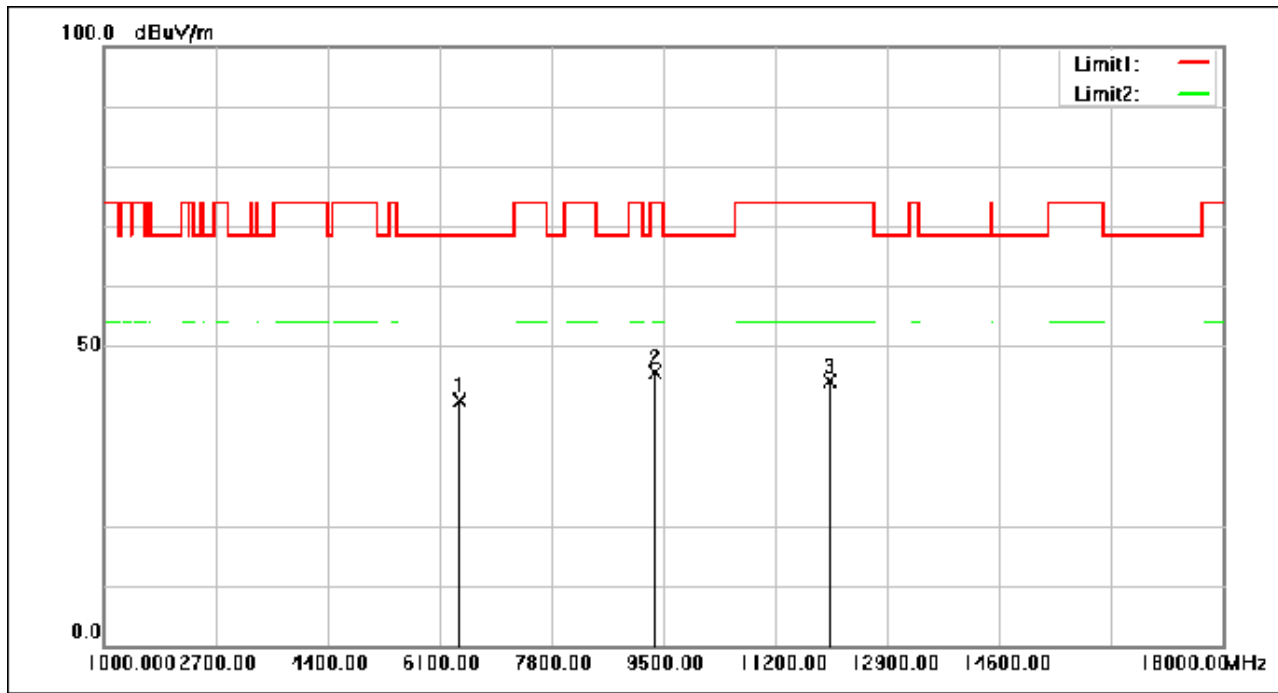

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6407.360	52.37	-11.46	40.91	68.30	-27.39	peak
2	9364.000	52.82	-7.12	45.70	74.00	-28.30	peak
3	12039.800	50.38	-6.35	44.03	74.00	-29.97	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 137 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

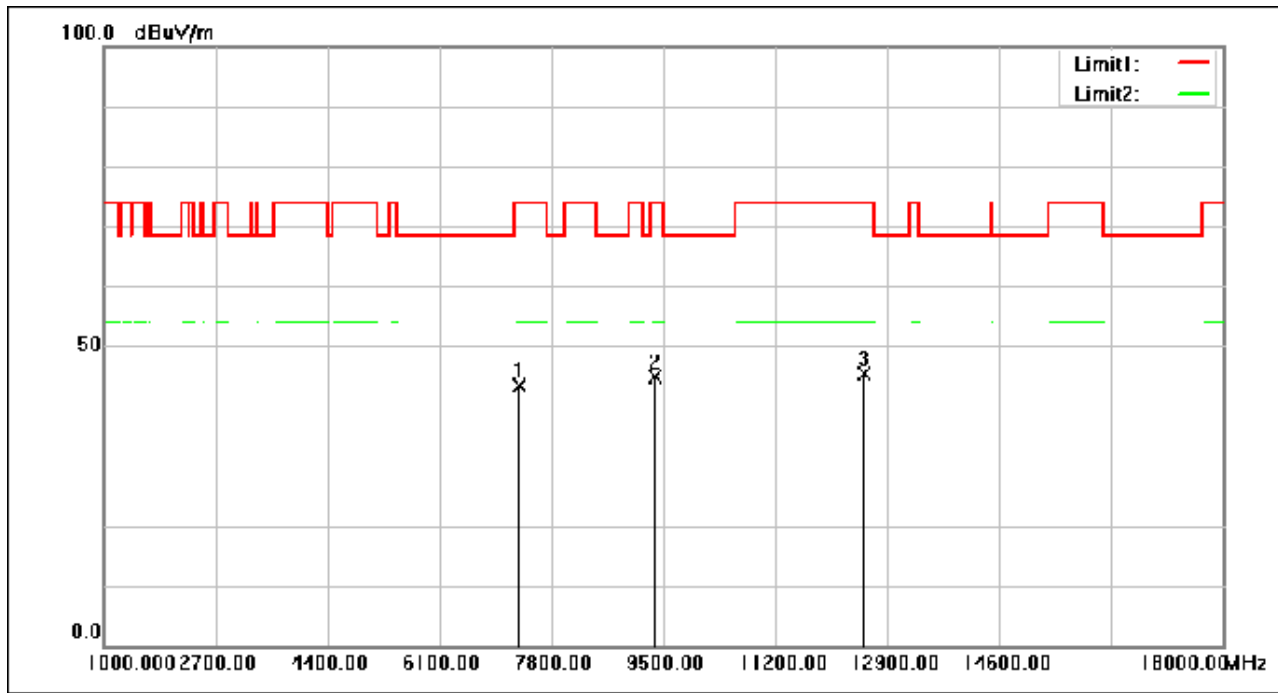

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7317.200	53.02	-9.70	43.32	74.00	-30.68	peak
2	9391.880	52.02	-7.08	44.94	74.00	-29.06	peak
3	12550.480	51.32	-5.92	45.40	74.00	-28.60	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 138 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

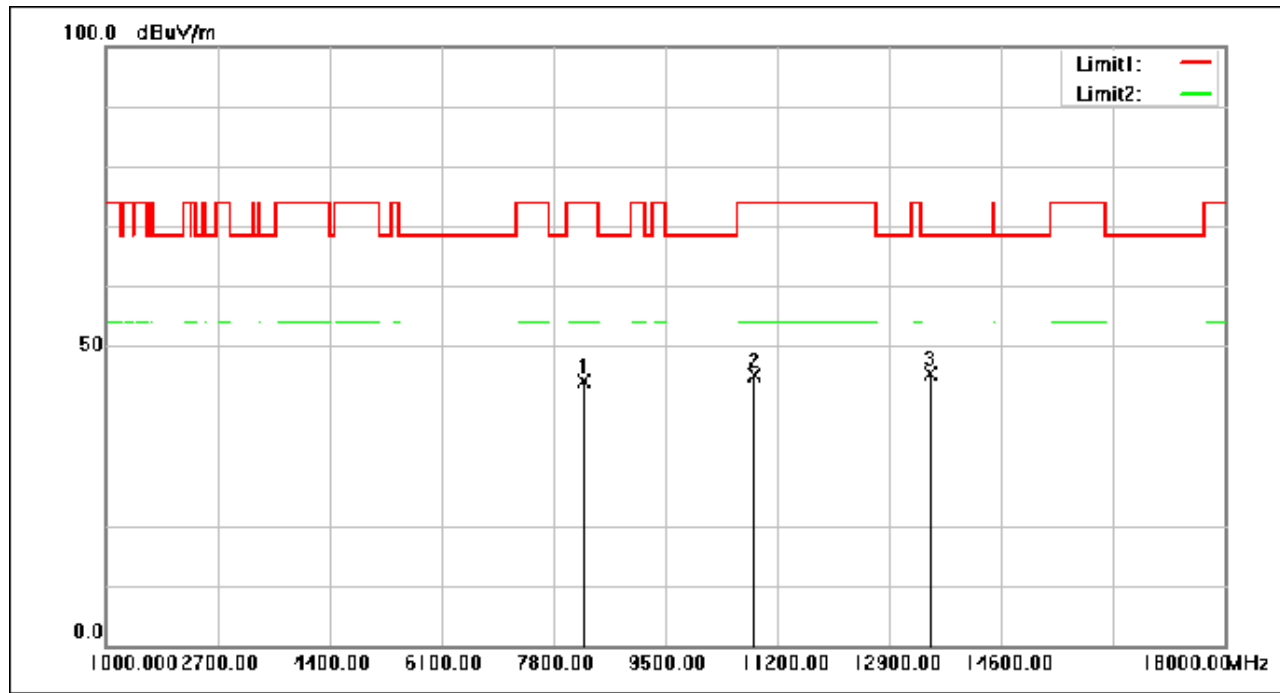

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8259.000	53.14	-9.13	44.01	74.00	-29.99	peak
2	10849.120	51.38	-6.36	45.02	74.00	-28.98	peak
3	13520.160	51.21	-5.76	45.45	68.30	-22.85	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 139 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

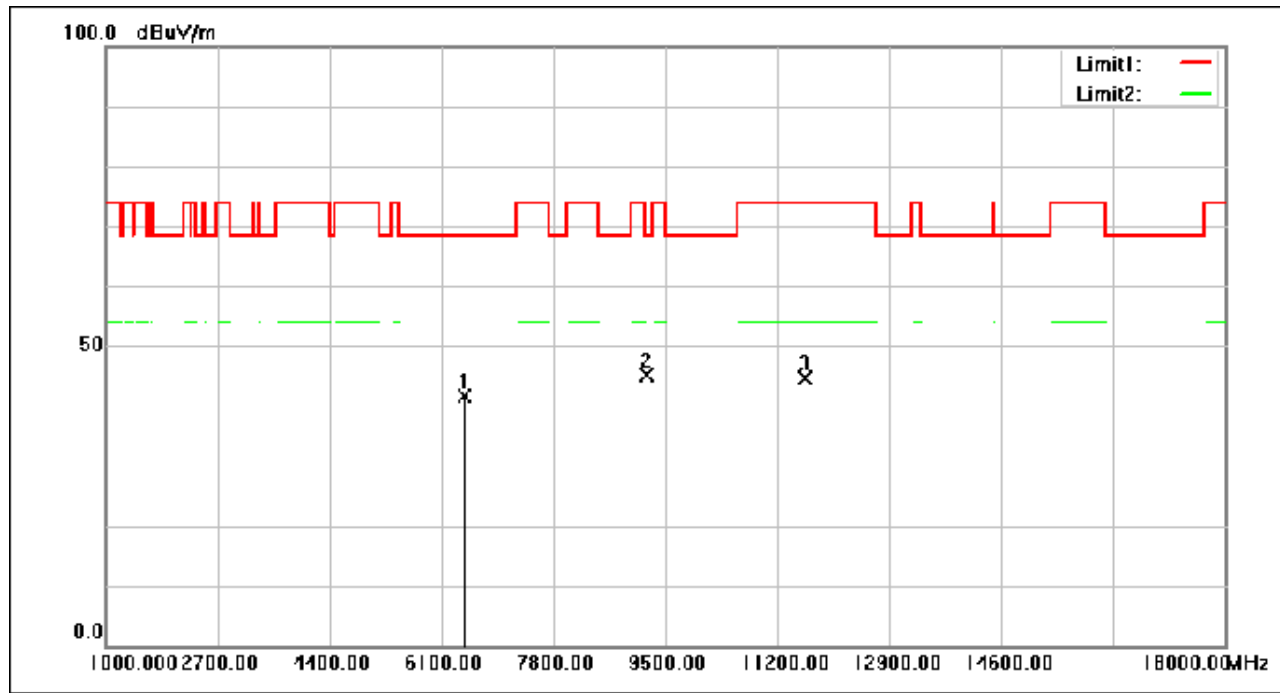

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6471.280	52.84	-11.19	41.65	68.30	-26.65	peak
2	9217.120	52.44	-7.36	45.08	68.30	-23.22	peak
3	11629.080	50.87	-6.16	44.71	74.00	-29.29	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 140 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

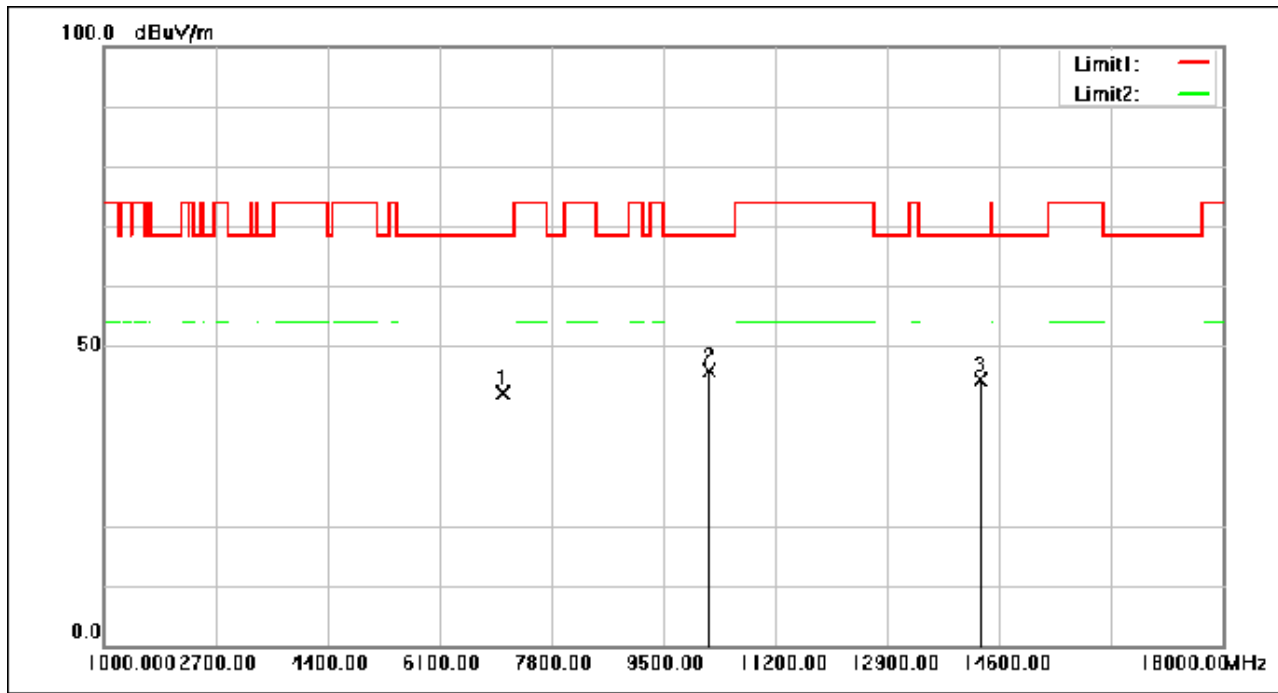

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7058.120	52.11	-9.92	42.19	68.30	-26.11	peak
2	10206.520	52.34	-6.35	45.99	68.30	-22.31	peak
3	14323.240	50.90	-6.51	44.39	68.30	-23.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 141 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

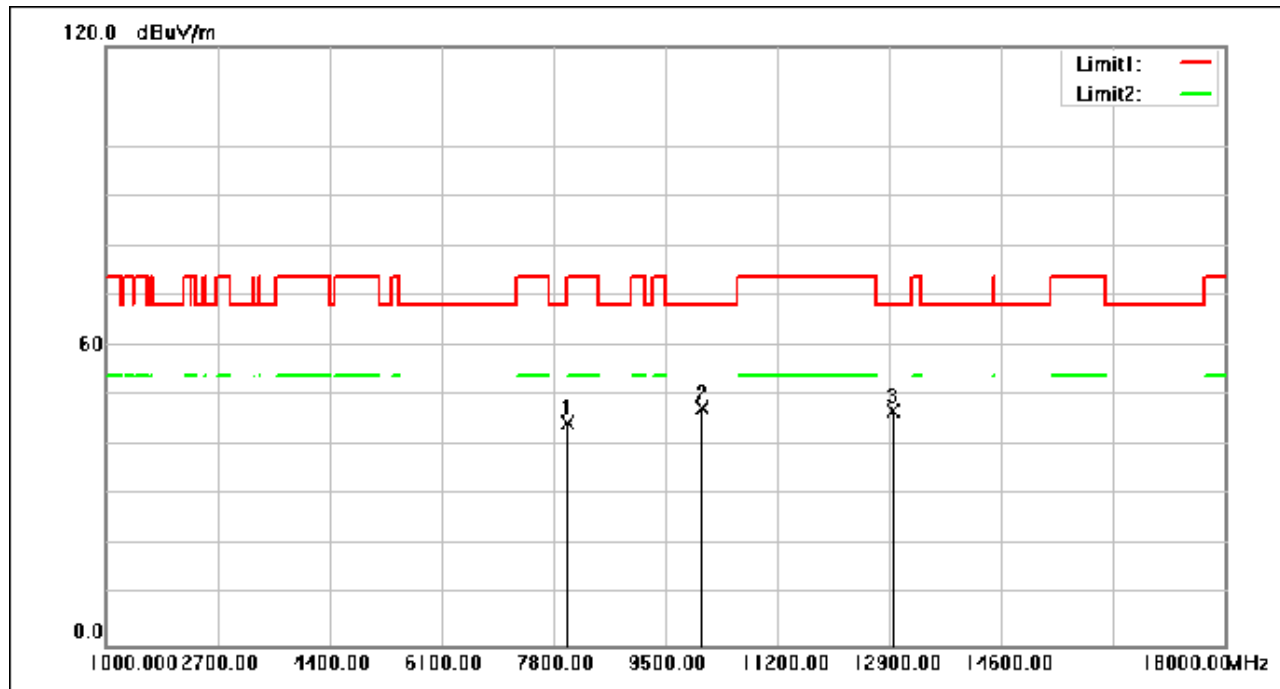

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8037.150	53.86	-9.45	44.41	74.00	-29.59	peak
2	10065.250	54.03	-6.34	47.69	68.30	-20.61	peak
3	12951.000	52.41	-5.58	46.83	68.30	-21.47	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 142 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz;
Channel:CH144(5720MHz)

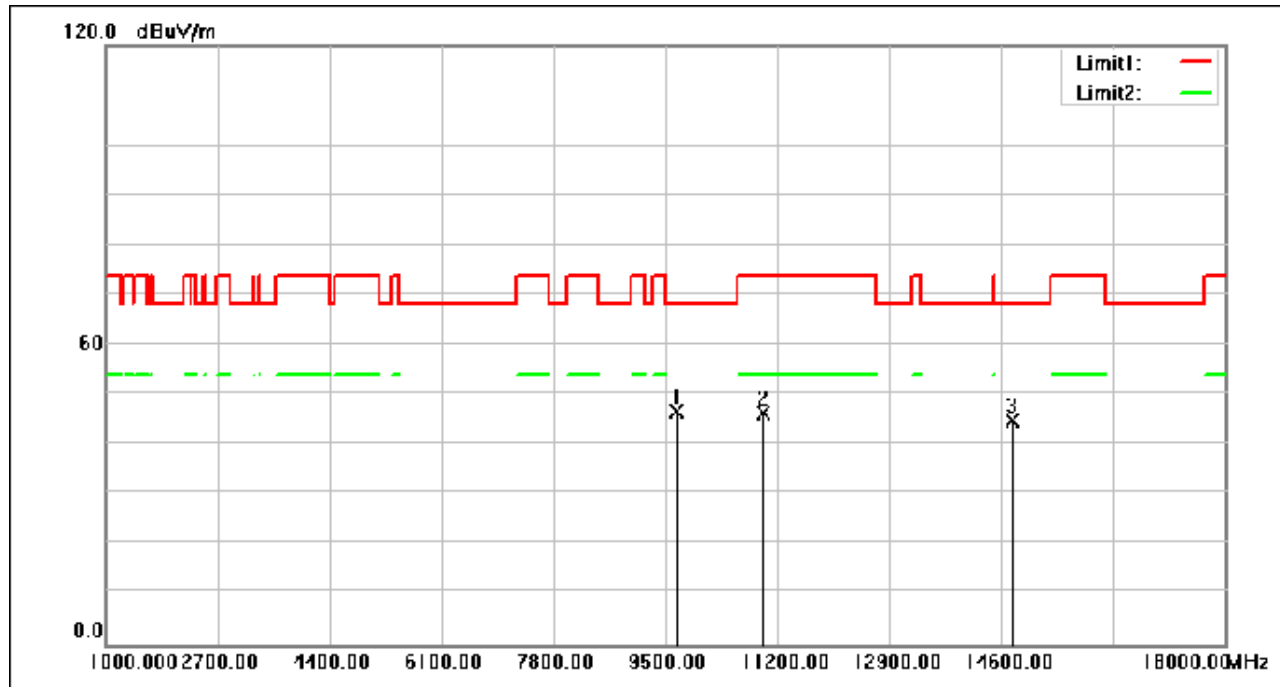

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9670.000	53.37	-6.60	46.77	68.30	-21.53	peak
2	10982.400	52.64	-6.36	46.28	74.00	-27.72	peak
3	14775.100	50.85	-6.02	44.83	68.30	-23.47	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 143 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

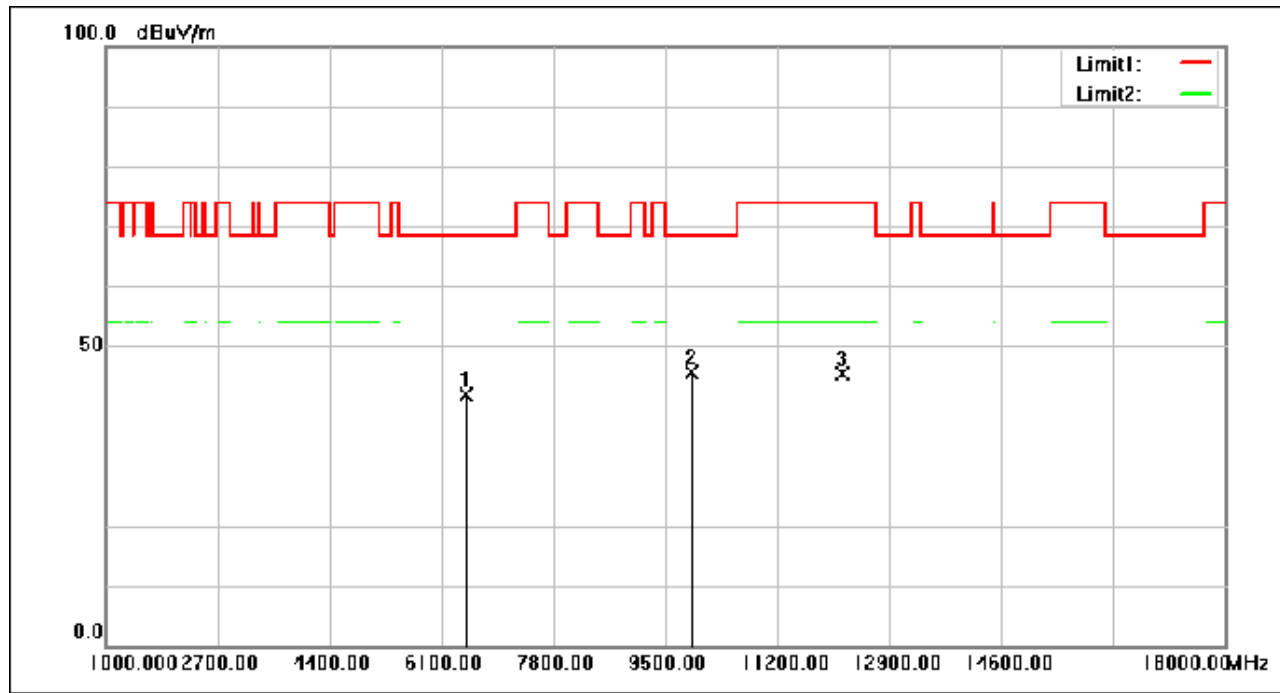

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6475.360	53.03	-11.18	41.85	68.30	-26.45	peak
2	9899.840	51.83	-6.30	45.53	68.30	-22.77	peak
3	12194.840	51.61	-6.22	45.39	74.00	-28.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 144 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

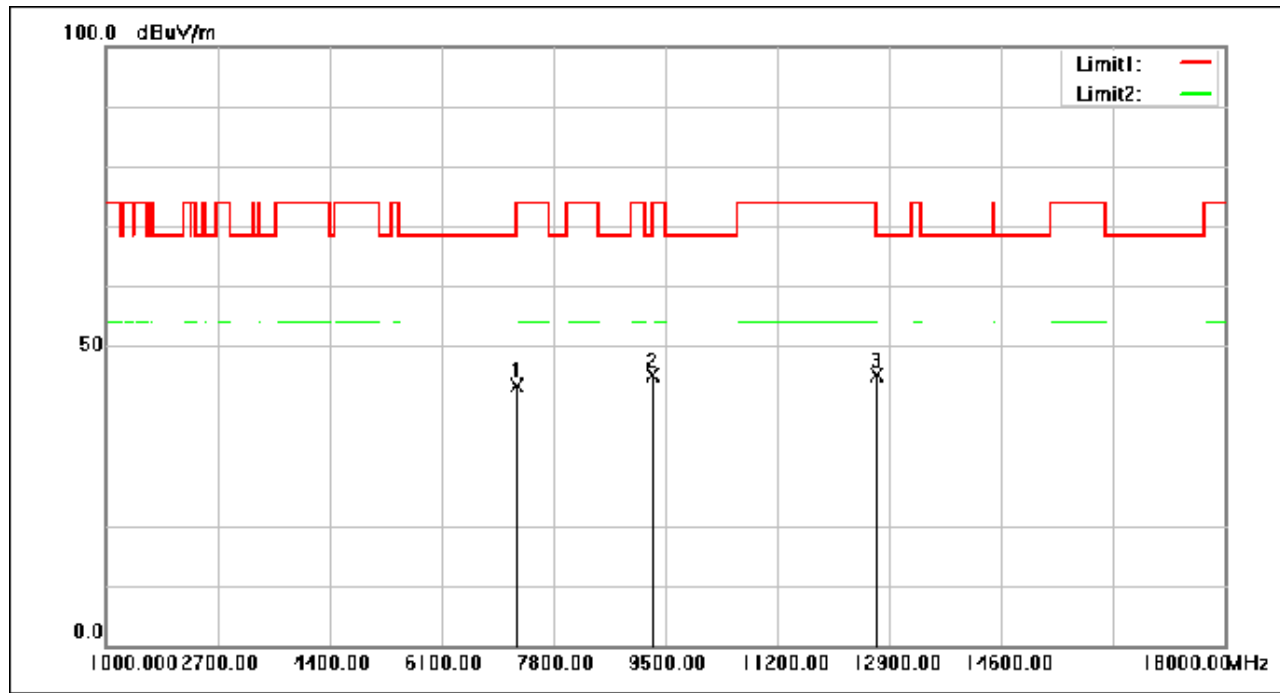

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7246.480	53.14	-9.76	43.38	68.30	-24.92	peak
2	9302.120	52.42	-7.22	45.20	74.00	-28.80	peak
3	12702.800	51.02	-5.79	45.23	68.30	-23.07	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 145 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

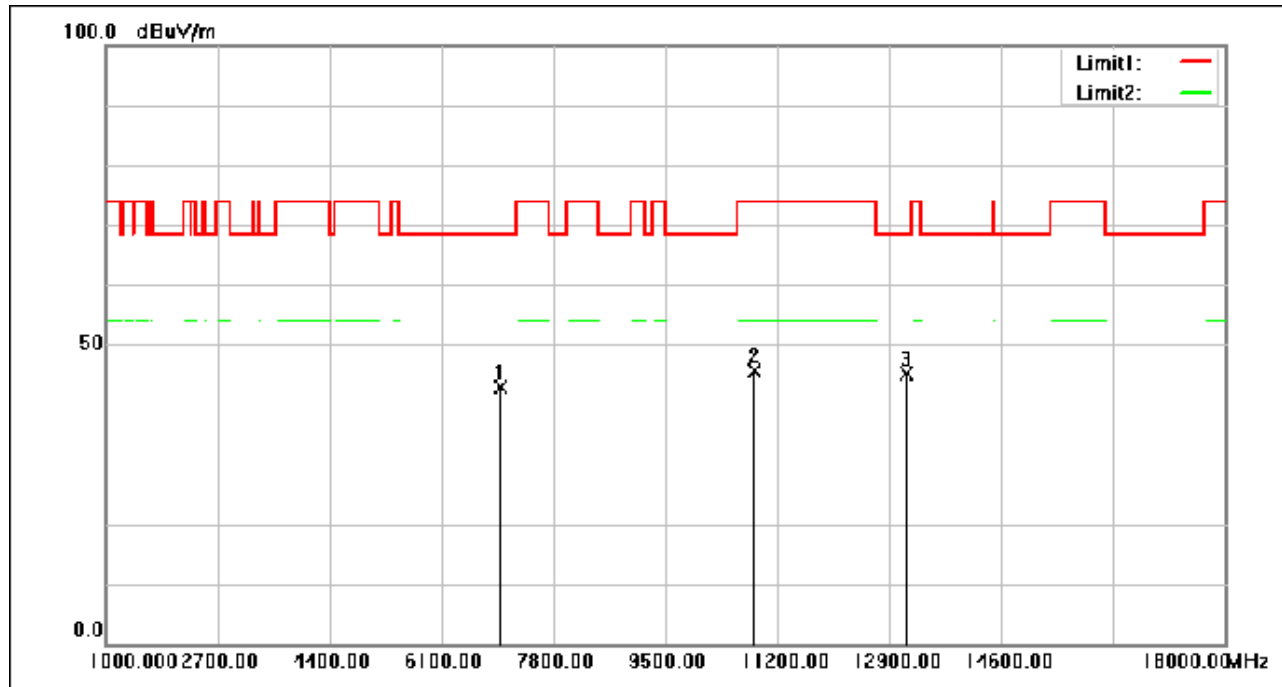

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7009.160	52.81	-9.96	42.85	68.30	-25.45	peak
2	10859.320	52.10	-6.36	45.74	74.00	-28.26	peak
3	13158.400	50.72	-5.54	45.18	68.30	-23.12	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 146 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

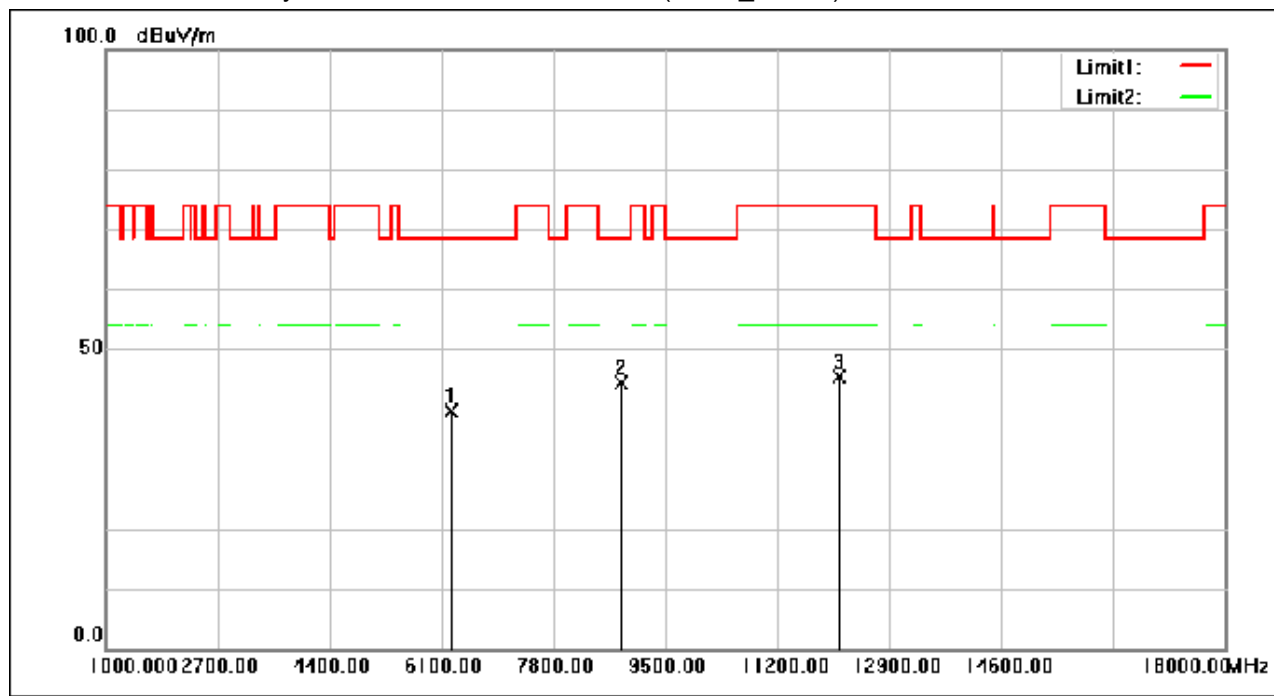

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6247.560	51.64	-12.11	39.53	68.30	-28.77	peak
2	8820.000	52.55	-8.11	44.44	68.30	-23.86	peak
3	12136.360	51.65	-6.27	45.38	74.00	-28.62	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 147 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

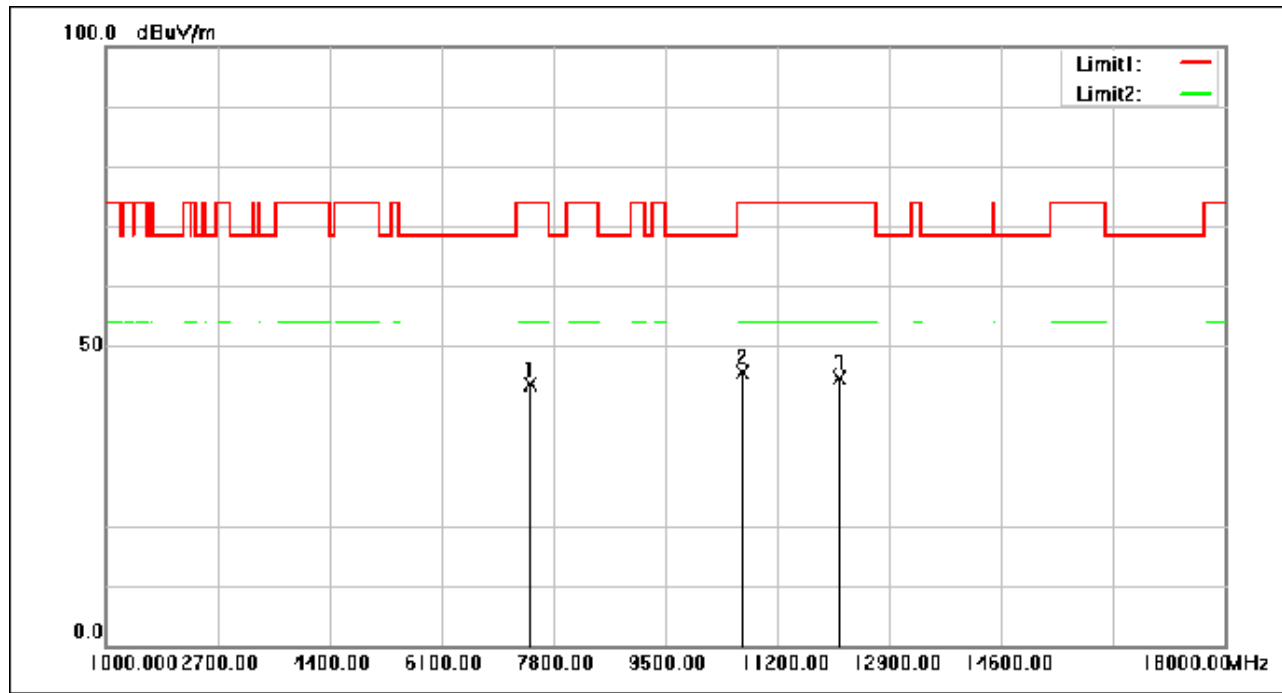

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7457.280	53.19	-9.53	43.66	74.00	-30.34	peak
2	10668.920	52.07	-6.38	45.69	74.00	-28.31	peak
3	12135.000	50.88	-6.27	44.61	74.00	-29.39	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 148 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

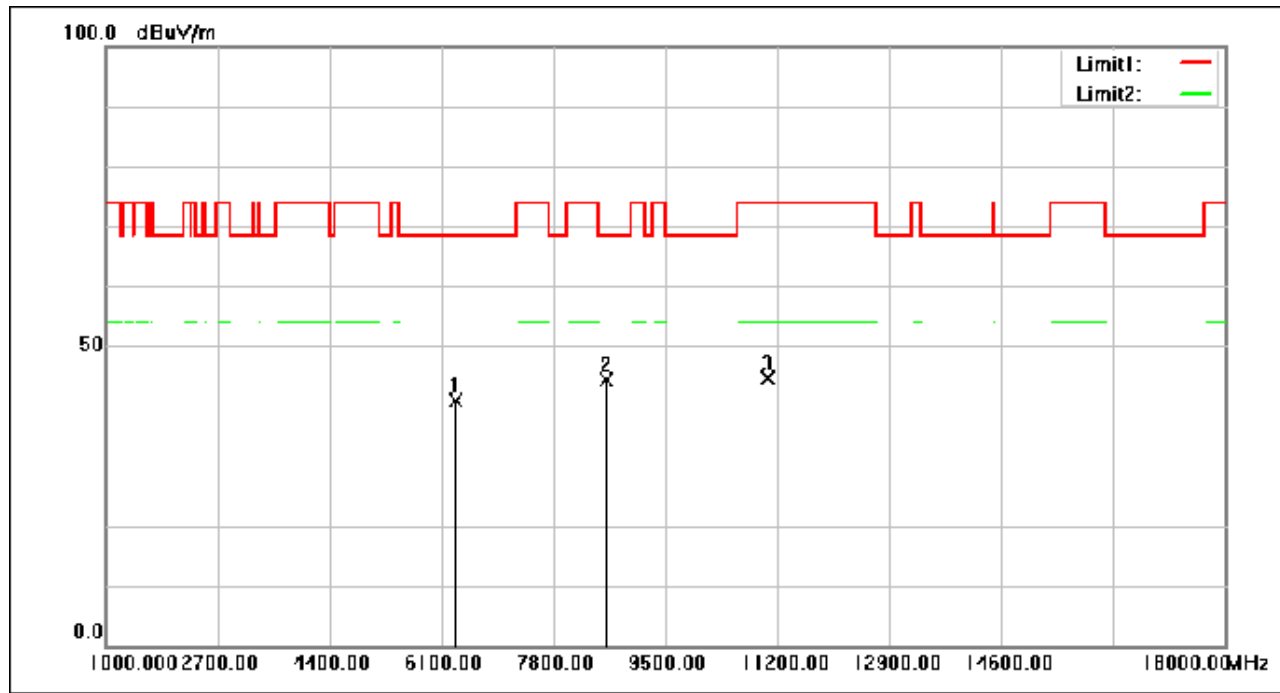

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6320.320	52.77	-11.81	40.96	68.30	-27.34	peak
2	8603.080	52.92	-8.58	44.34	68.30	-23.96	peak
3	11059.240	51.00	-6.32	44.68	74.00	-29.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 149 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU26_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

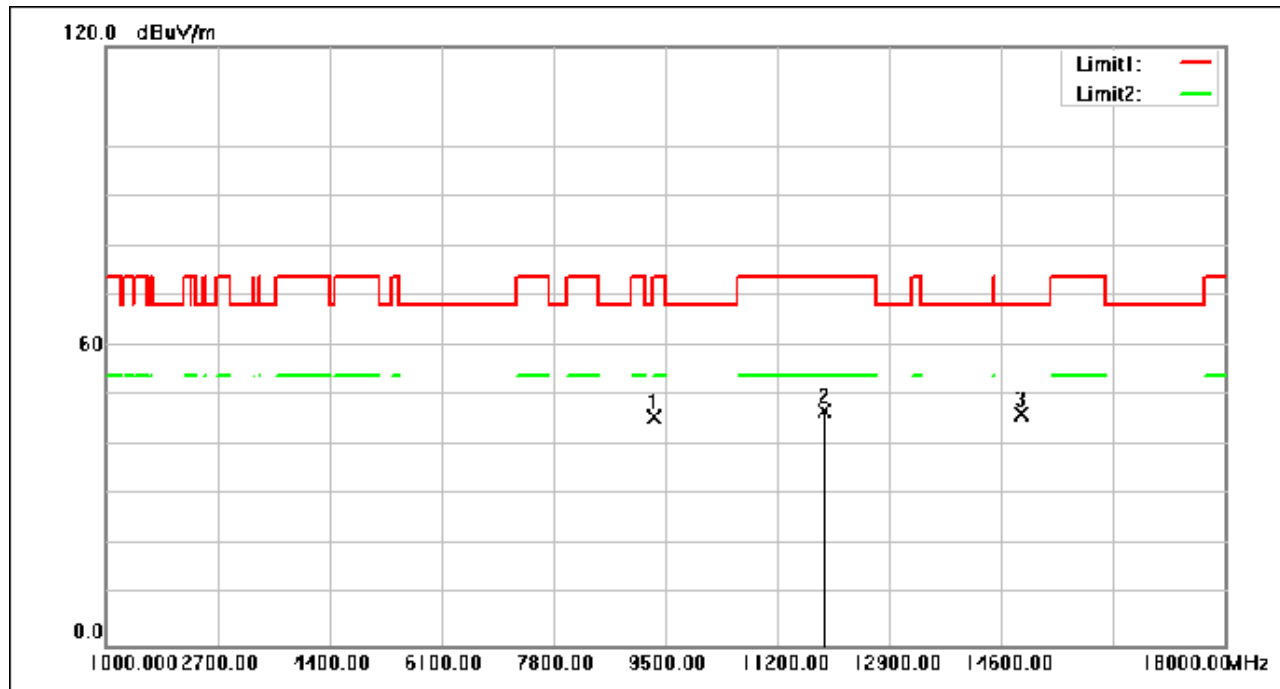

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9335.100	52.98	-7.16	45.82	74.00	-28.18	peak
2	11925.900	53.48	-6.39	47.09	74.00	-26.91	peak
3	14920.450	52.07	-5.75	46.32	68.30	-21.98	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 150 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

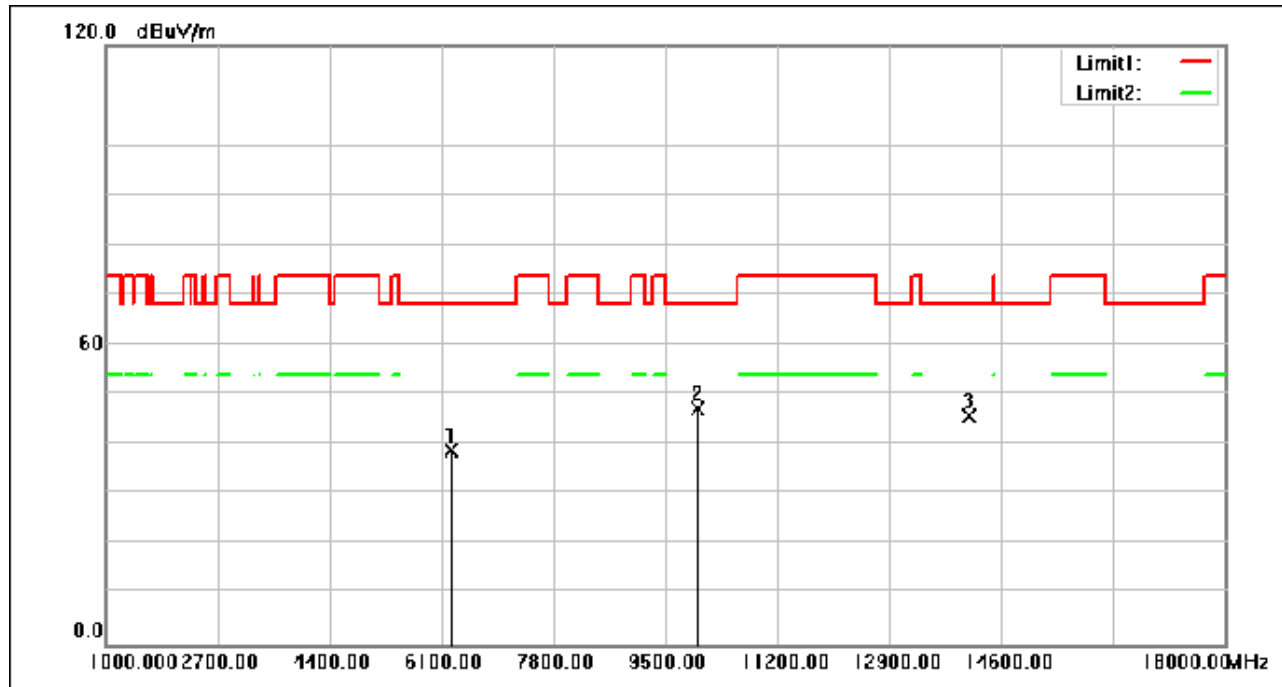

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6267.450	50.90	-12.03	38.87	68.30	-29.43	peak
2	9996.400	53.56	-6.33	47.23	68.30	-21.07	peak
3	14120.600	52.09	-6.40	45.69	68.30	-22.61	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 151 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

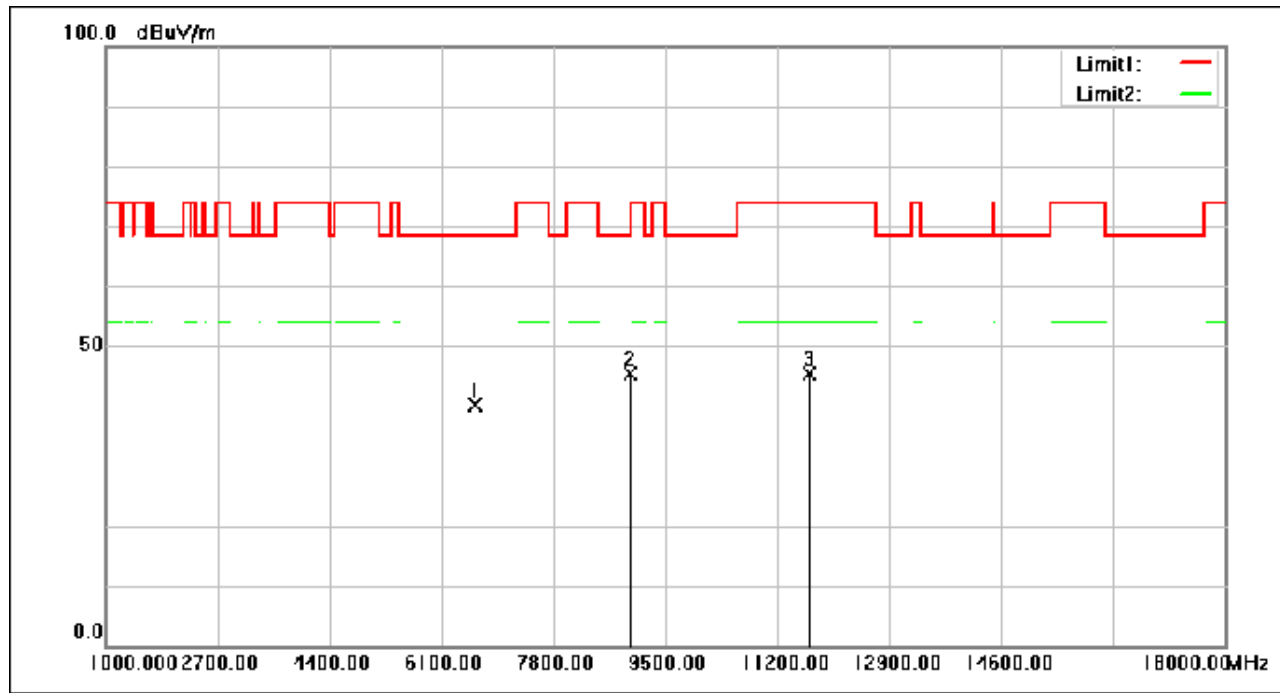

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6616.120	50.71	-10.60	40.11	68.30	-28.19	peak
2	8962.120	53.15	-7.80	45.35	68.30	-22.95	peak
3	11685.520	51.47	-6.20	45.27	74.00	-28.73	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 152 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

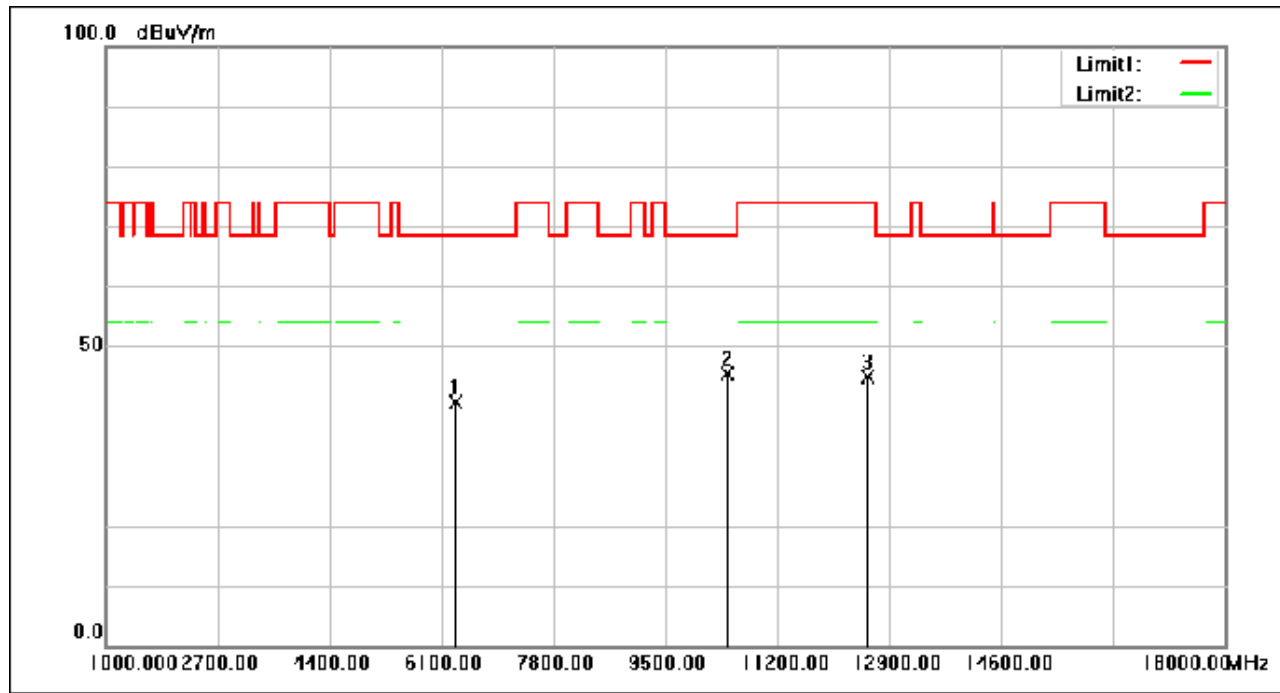

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6314.880	52.42	-11.84	40.58	68.30	-27.72	peak
2	10436.360	51.74	-6.38	45.36	68.30	-22.94	peak
3	12592.640	50.67	-5.88	44.79	74.00	-29.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 153 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

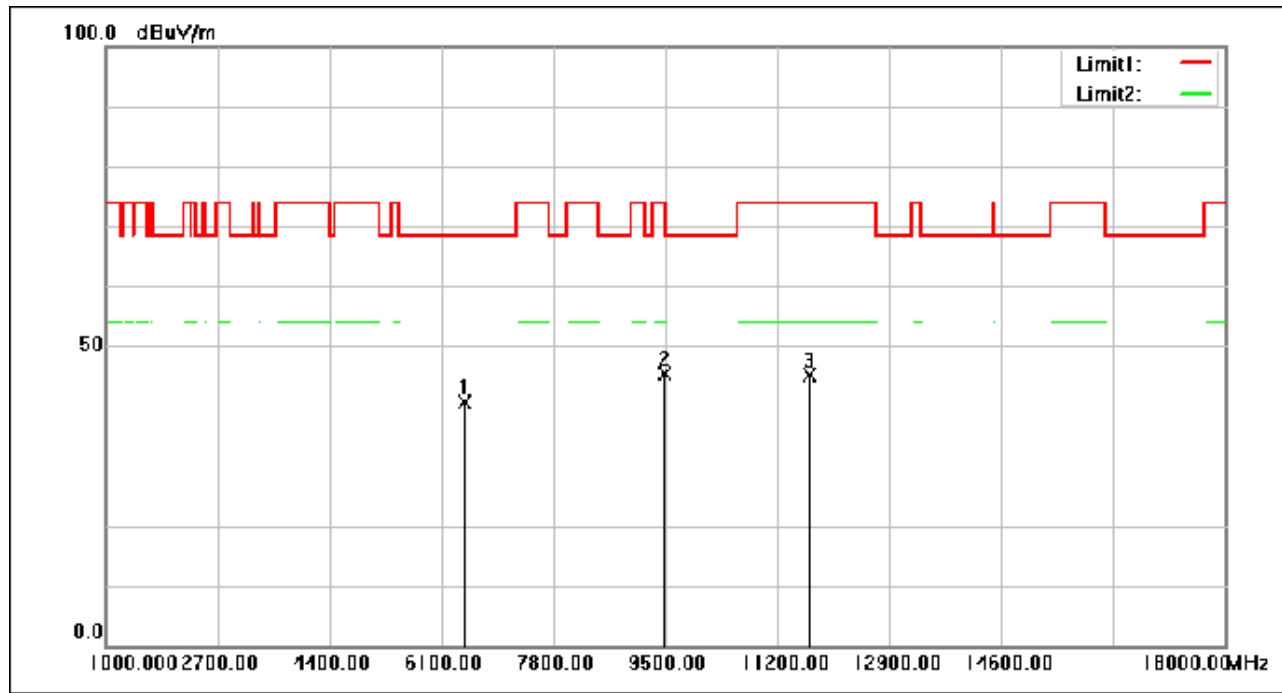

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6473.320	51.82	-11.18	40.64	68.30	-27.66	peak
2	9494.560	52.23	-6.91	45.32	74.00	-28.68	peak
3	11695.720	51.31	-6.22	45.09	74.00	-28.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 154 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

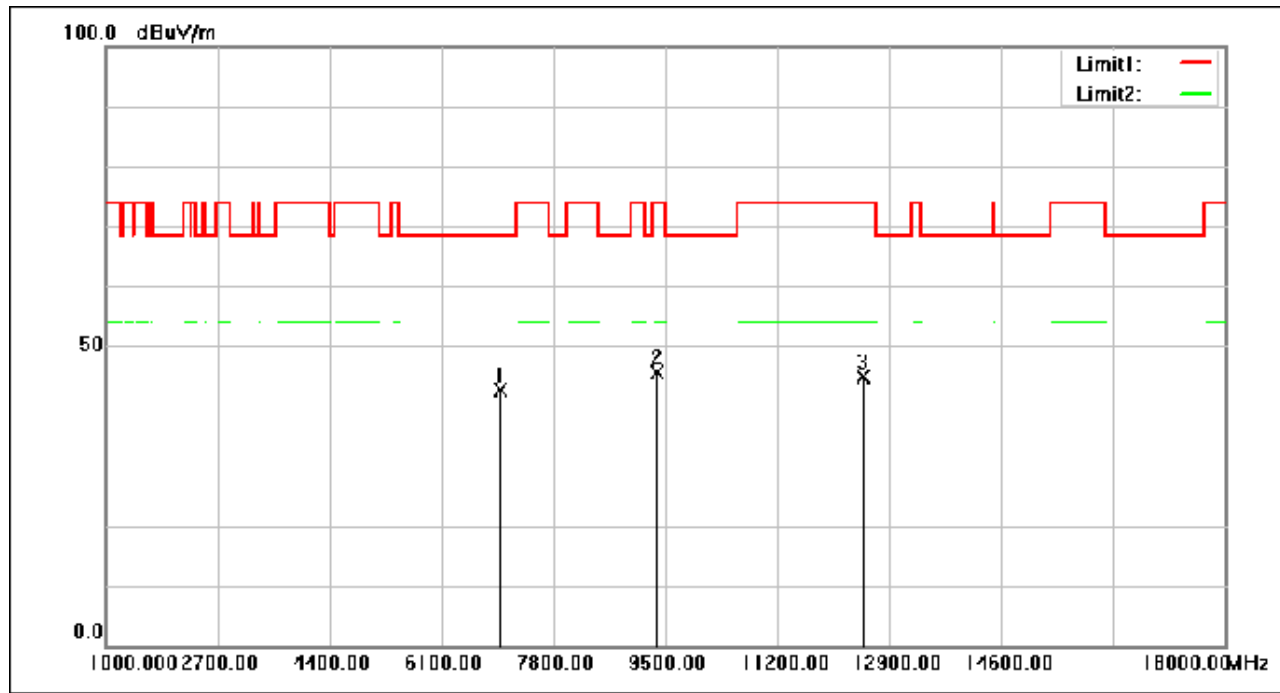

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7007.800	52.56	-9.96	42.60	68.30	-25.70	peak
2	9384.400	52.67	-7.08	45.59	74.00	-28.41	peak
3	12494.040	50.96	-5.97	44.99	74.00	-29.01	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 155 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

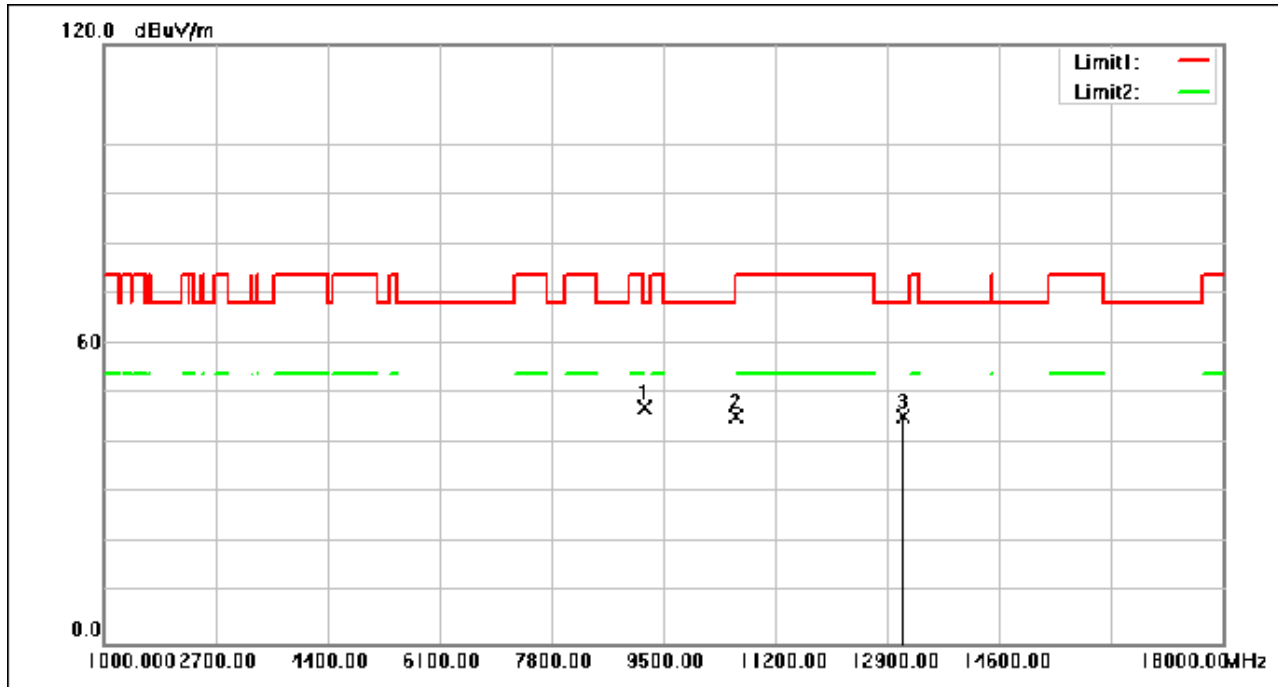

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	54.51	-7.36	47.15	68.30	-21.15	peak
2	10619.450	51.91	-6.38	45.53	74.00	-28.47	peak
3	13141.400	51.02	-5.54	45.48	68.30	-22.82	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 156 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11ax(RU52_Left); Bandwidth: 20MHz;
Channel: CH144(5720MHz)

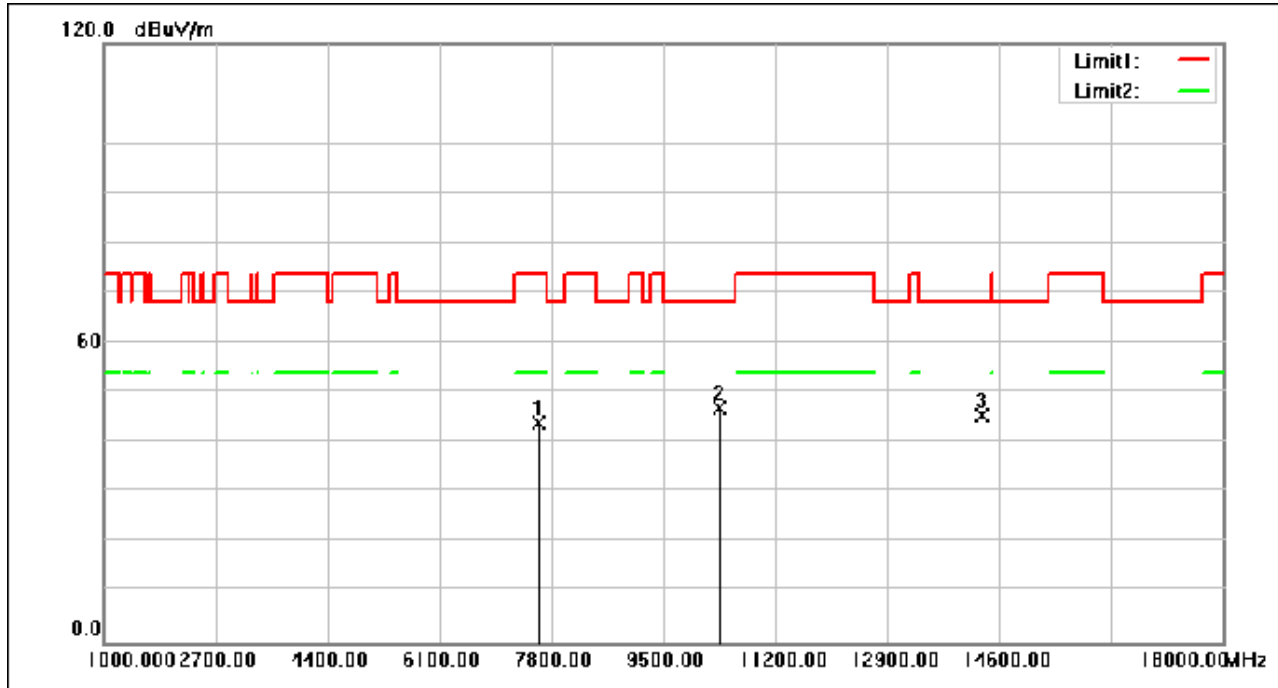

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7623.200	53.42	-9.47	43.95	74.00	-30.05	peak
2	10355.100	53.35	-6.37	46.98	68.30	-21.32	peak
3	14360.300	52.04	-6.53	45.51	68.30	-22.79	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 157 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

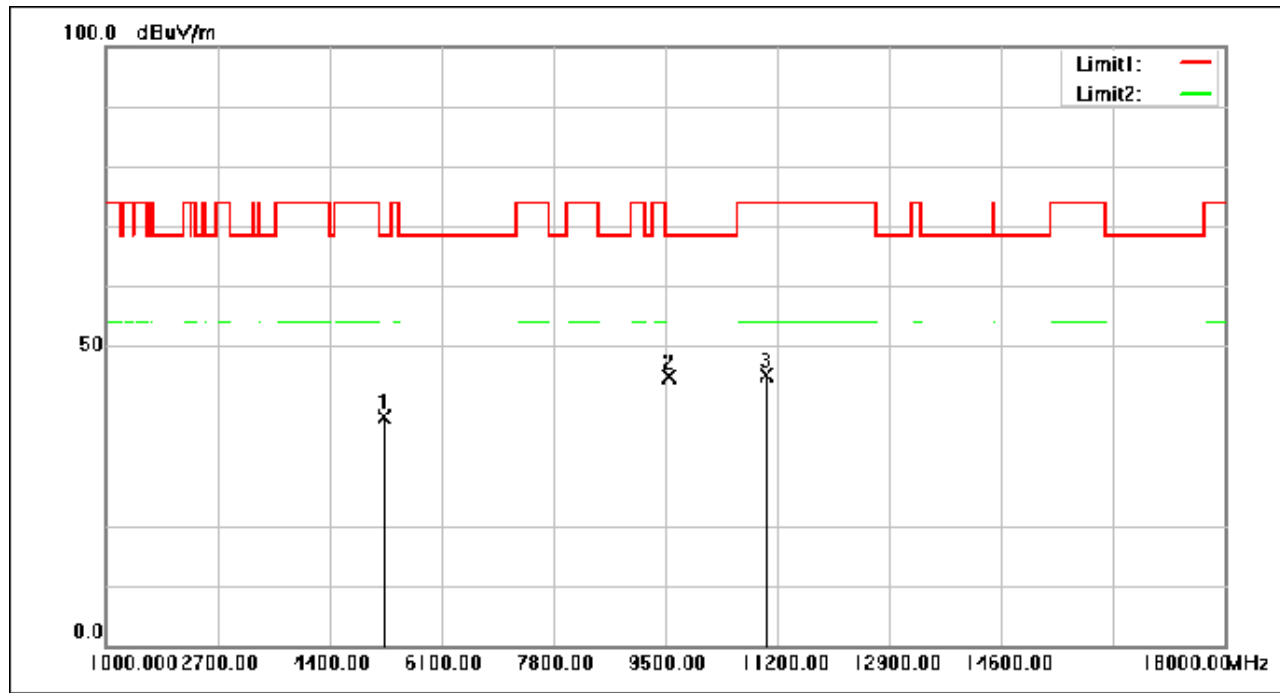

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5241.840	53.58	-15.40	38.18	68.30	-30.12	peak
2	9563.240	51.77	-6.79	44.98	68.30	-23.32	peak
3	11037.480	51.46	-6.34	45.12	74.00	-28.88	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 158 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

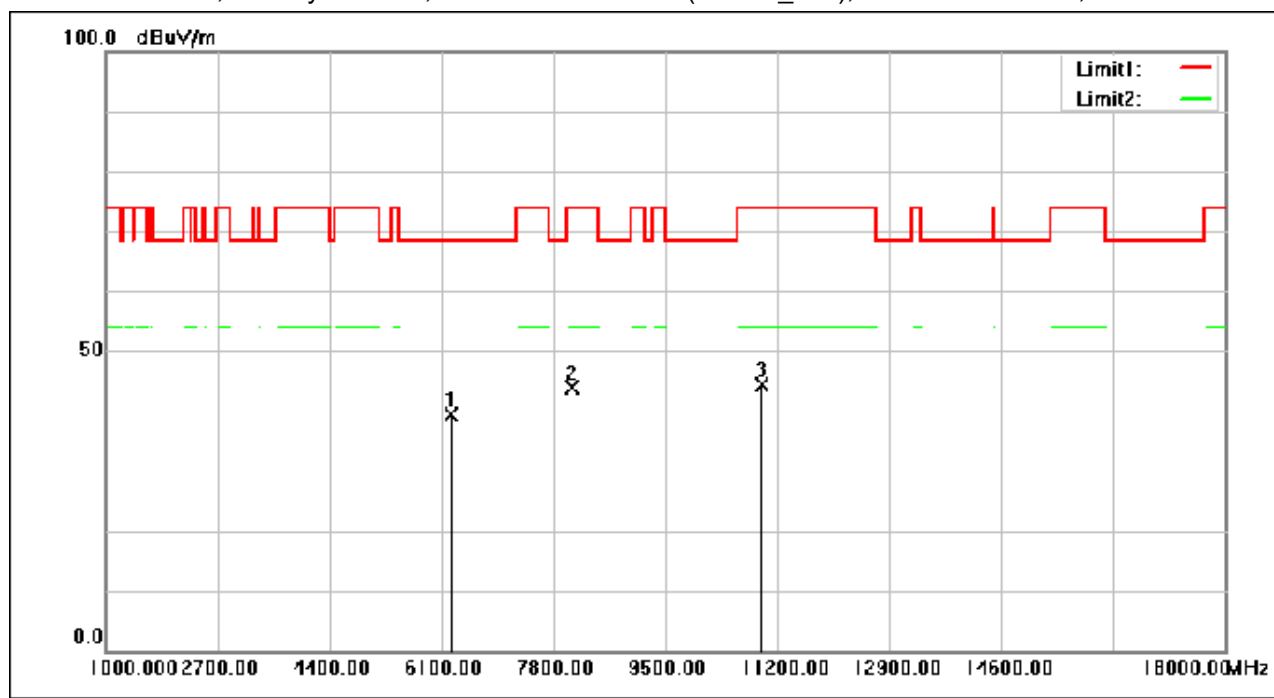

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6240.760	51.44	-12.14	39.30	68.30	-29.00	peak
2	8085.600	53.19	-9.37	43.82	74.00	-30.18	peak
3	10964.040	50.82	-6.37	44.45	74.00	-29.55	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 159 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

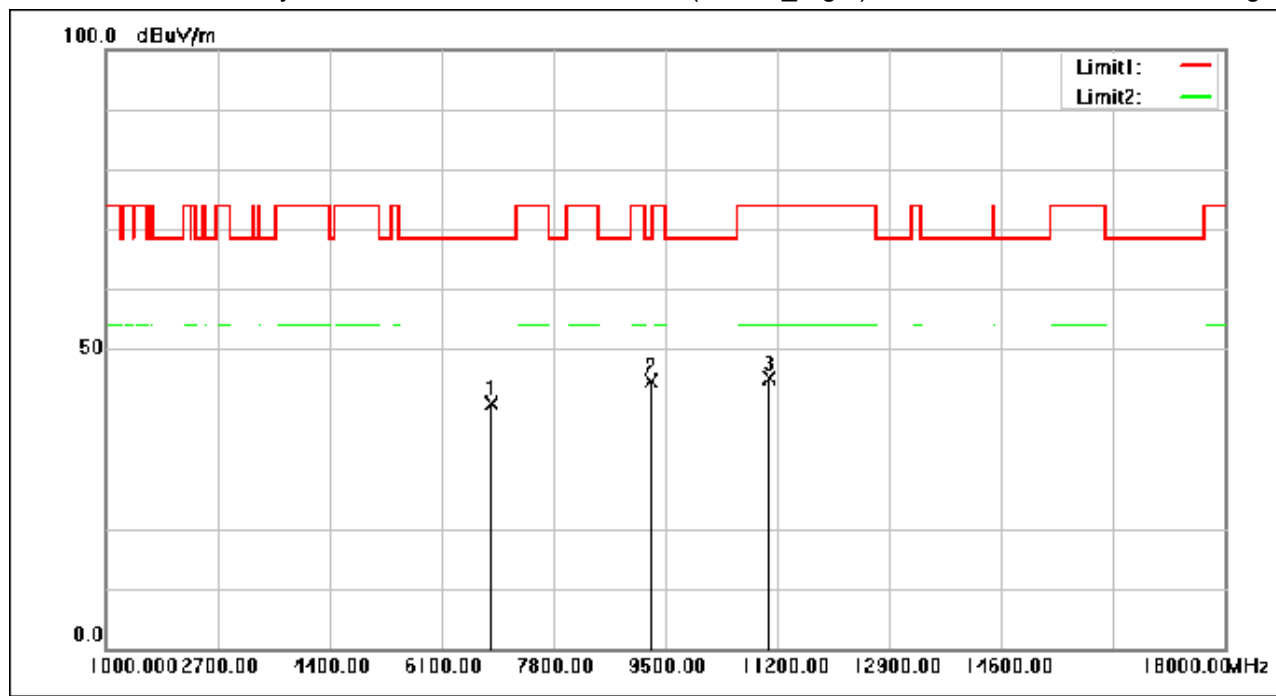

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6850.720	50.98	-10.06	40.92	68.30	-27.38	peak
2	9285.800	51.91	-7.24	44.67	68.30	-23.63	peak
3	11074.880	51.56	-6.32	45.24	74.00	-28.76	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 160 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

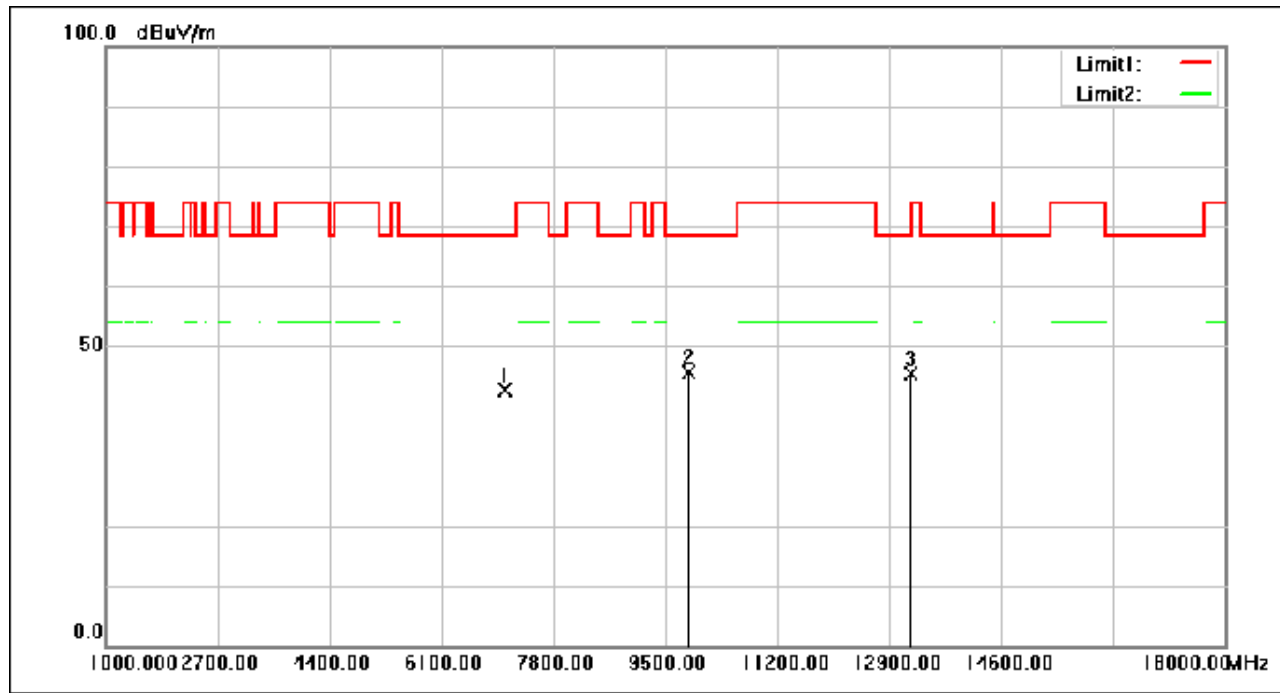

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7076.480	52.56	-9.90	42.66	68.30	-25.64	peak
2	9861.760	51.89	-6.28	45.61	68.30	-22.69	peak
3	13225.040	50.97	-5.58	45.39	68.30	-22.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 161 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

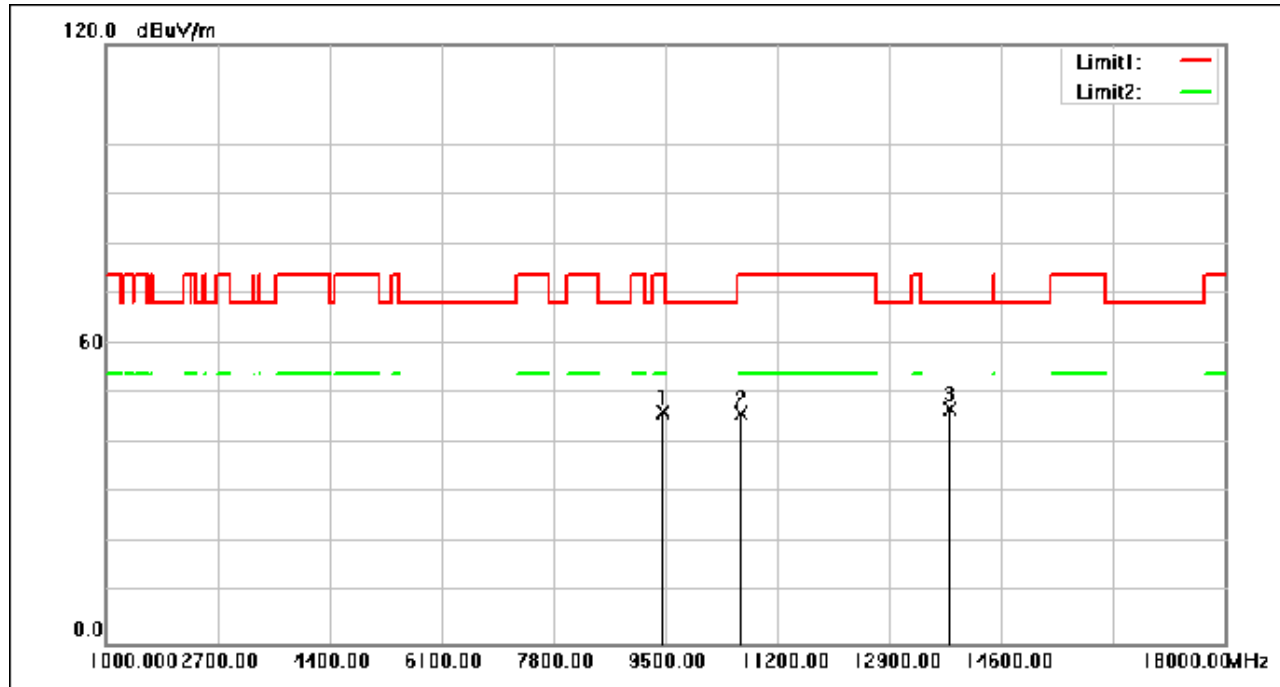

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9472.800	53.44	-6.95	46.49	74.00	-27.51	peak
2	10653.450	52.36	-6.38	45.98	74.00	-28.02	peak
3	13827.350	53.03	-6.13	46.90	68.30	-21.40	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 162 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz;
Channel:CH144(5720MHz)

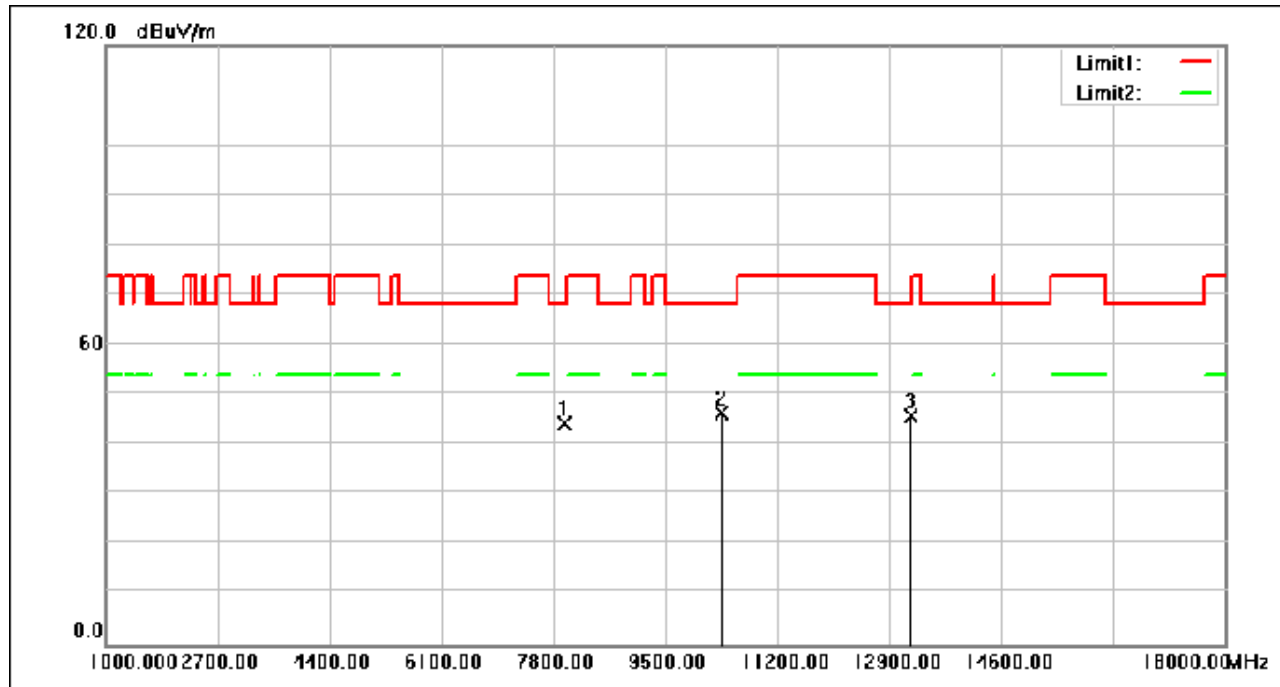

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7982.750	53.62	-9.50	44.12	68.30	-24.18	peak
2	10351.700	52.75	-6.37	46.38	68.30	-21.92	peak
3	13223.000	51.39	-5.58	45.81	68.30	-22.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 163 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

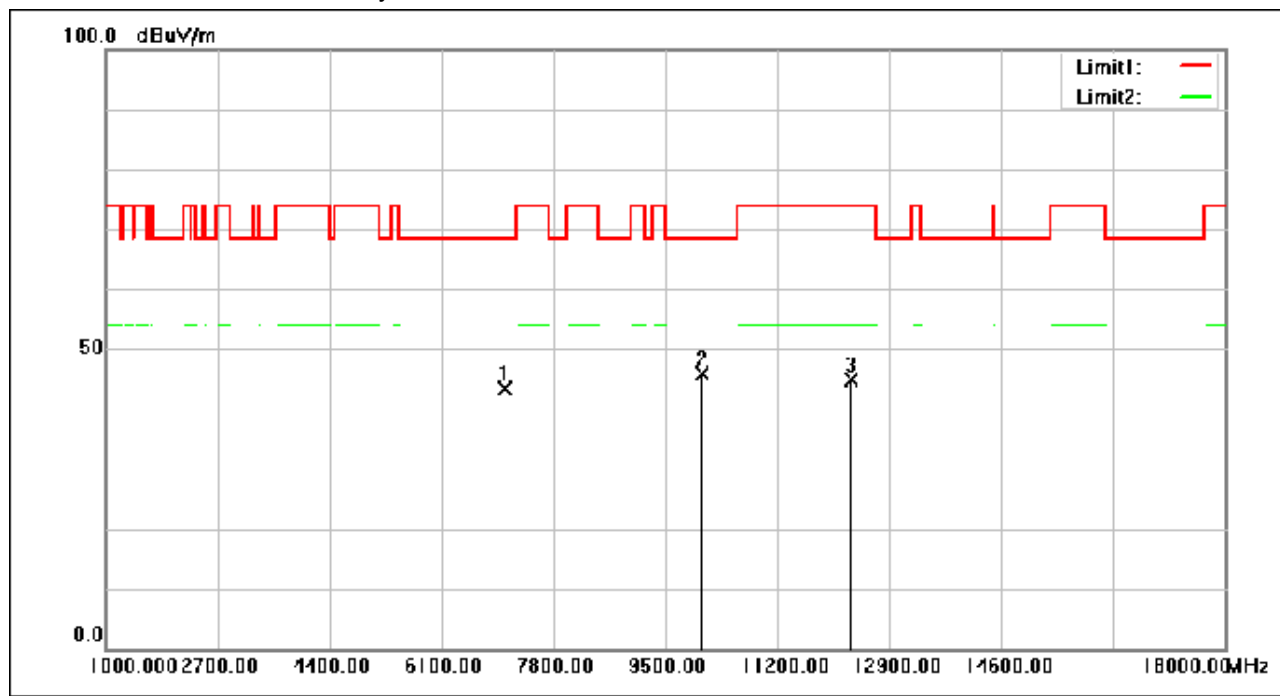

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7077.840	53.27	-9.90	43.37	68.30	-24.93	peak
2	10050.800	52.09	-6.33	45.76	68.30	-22.54	peak
3	12326.760	51.05	-6.11	44.94	74.00	-29.06	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 164 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

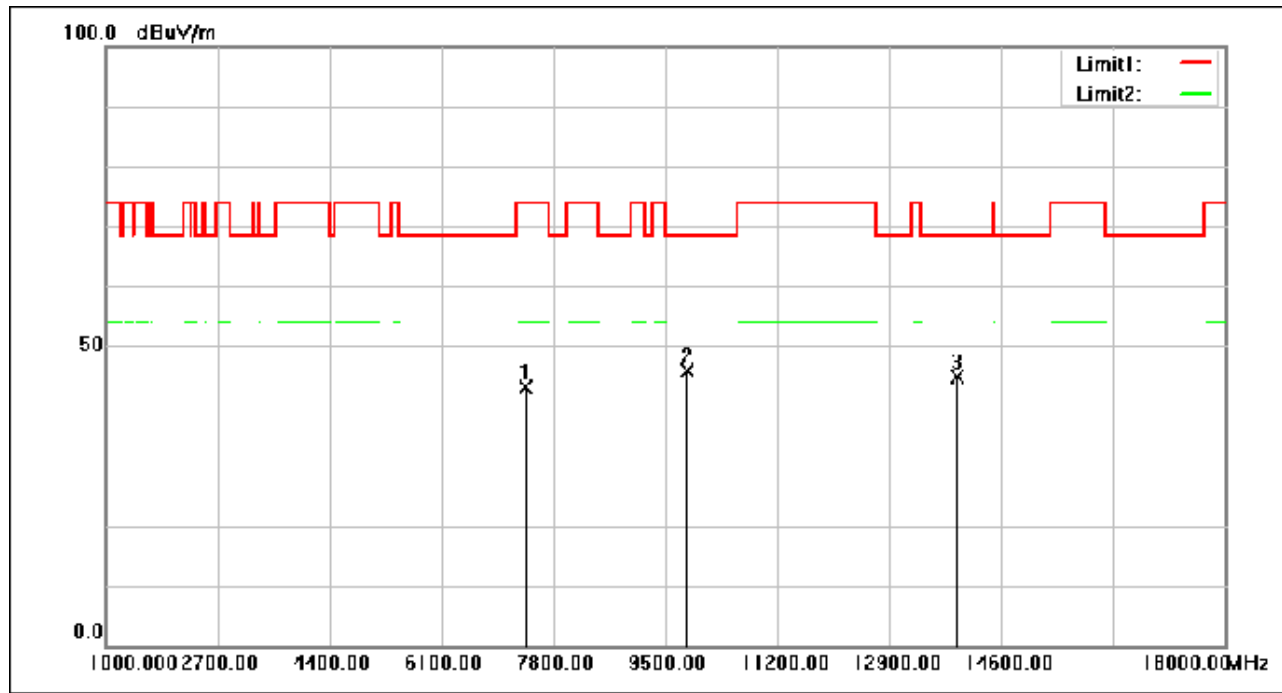

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7385.200	52.85	-9.64	43.21	74.00	-30.79	peak
2	9829.120	52.11	-6.32	45.79	68.30	-22.51	peak
3	13939.720	51.10	-6.26	44.84	68.30	-23.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 165 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

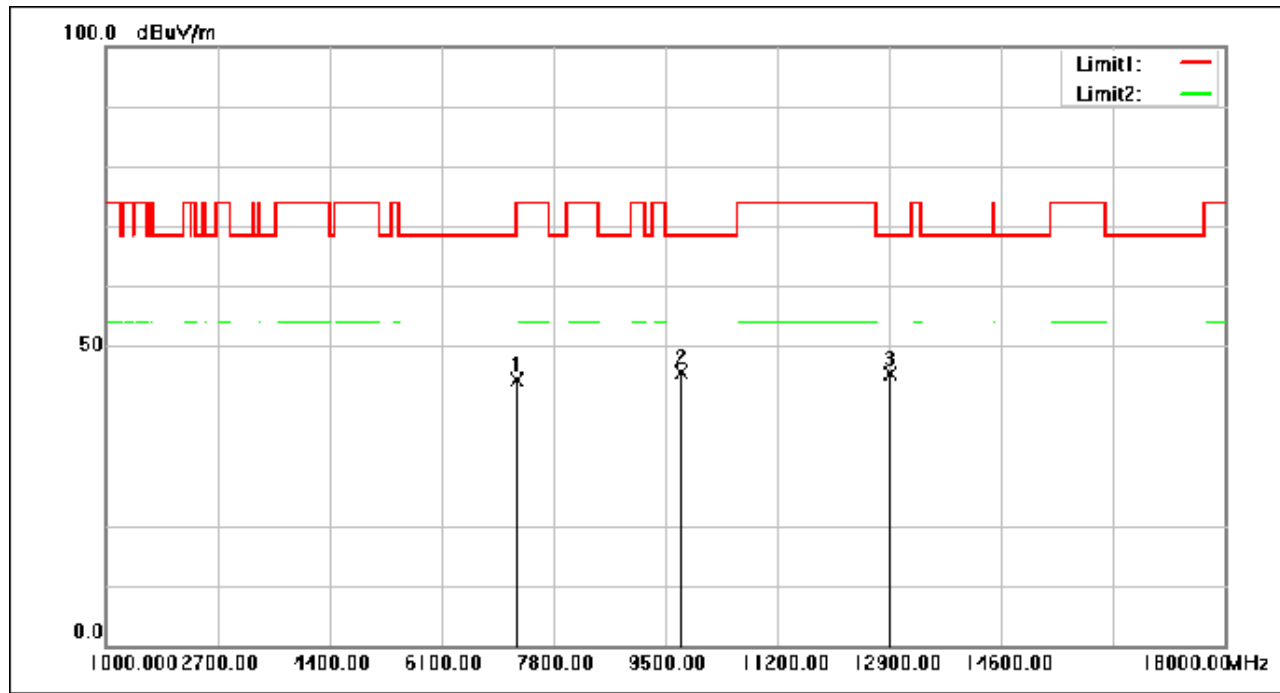

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7241.720	54.22	-9.76	44.46	68.30	-23.84	peak
2	9744.800	52.20	-6.47	45.73	68.30	-22.57	peak
3	12920.400	50.88	-5.61	45.27	68.30	-23.03	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 166 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

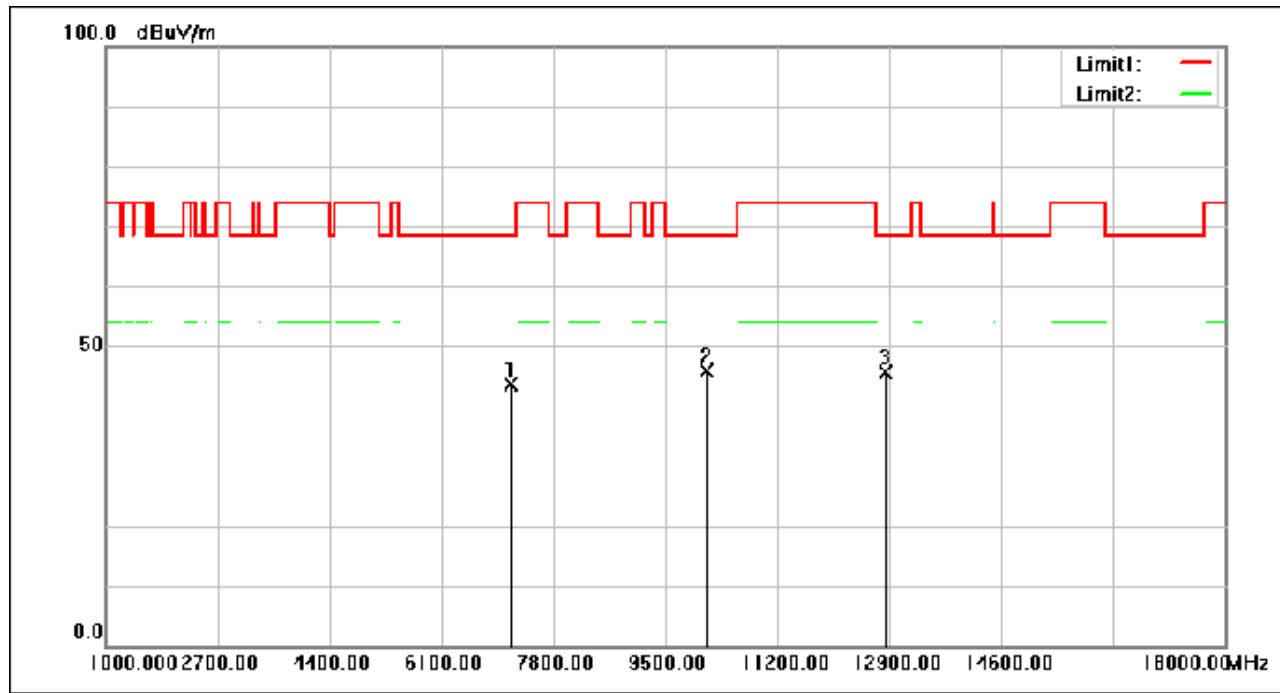

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7162.160	53.34	-9.83	43.51	68.30	-24.79	peak
2	10119.480	52.14	-6.34	45.80	68.30	-22.50	peak
3	12840.160	51.26	-5.67	45.59	68.30	-22.71	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 167 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

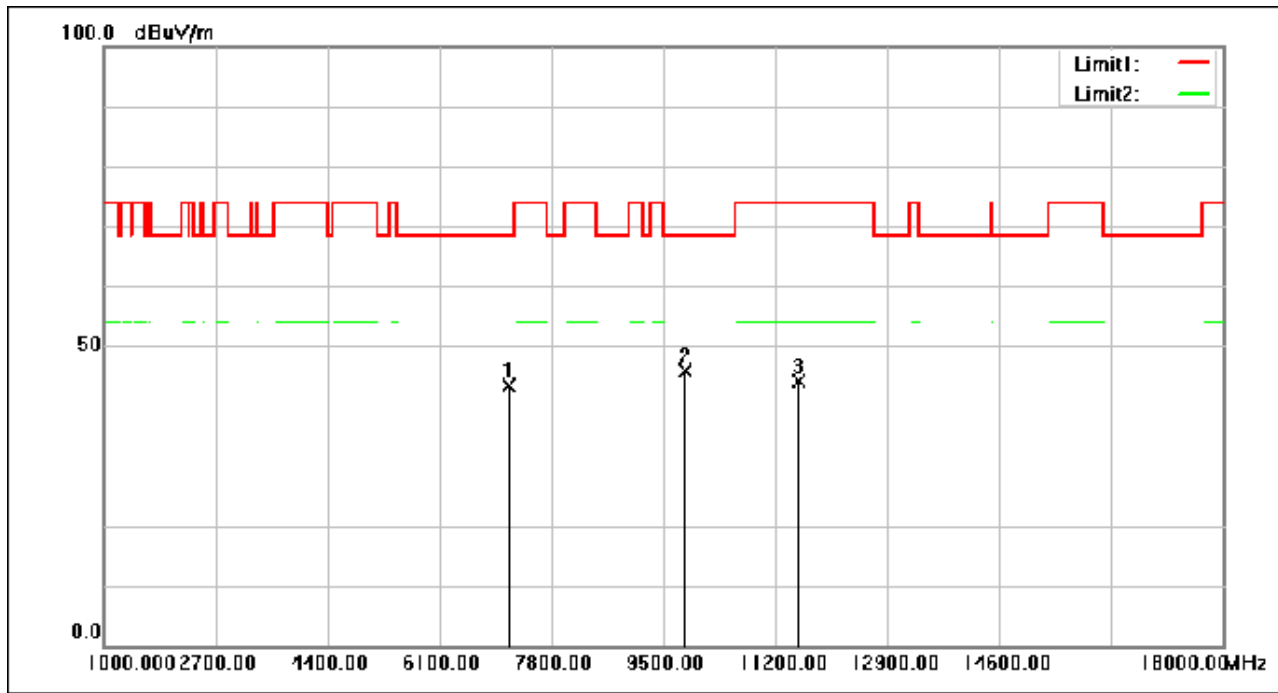

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7158.760	53.21	-9.83	43.38	68.30	-24.92	peak
2	9823.680	52.09	-6.32	45.77	68.30	-22.53	peak
3	11557.000	50.20	-6.10	44.10	74.00	-29.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 168 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

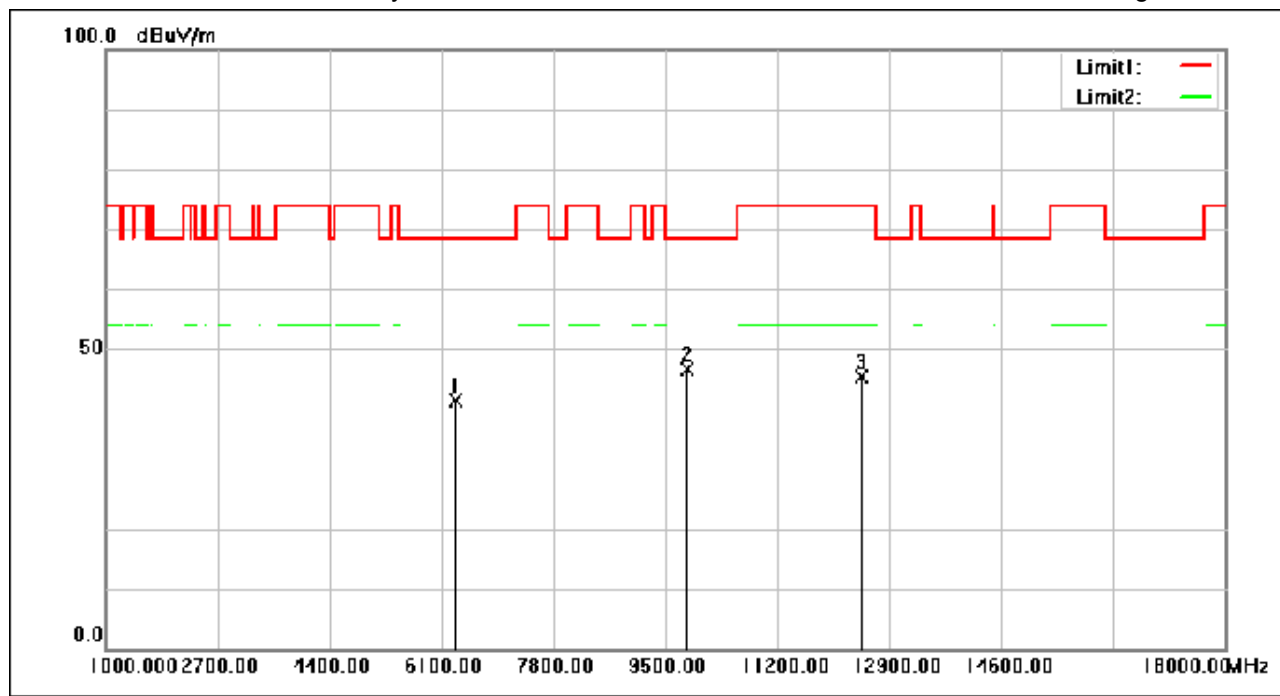

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6316.920	53.17	-11.83	41.34	68.30	-26.96	peak
2	9832.520	52.87	-6.31	46.56	68.30	-21.74	peak
3	12481.800	51.42	-5.98	45.44	74.00	-28.56	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 169 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

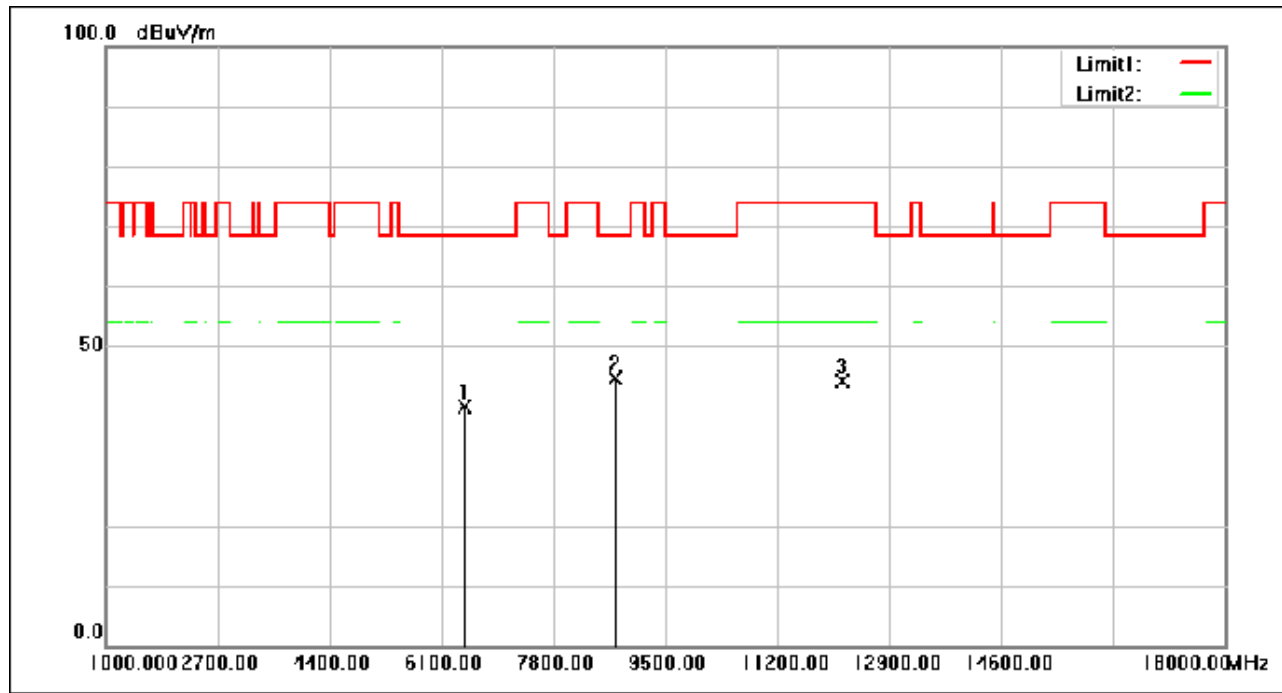

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6467.200	51.17	-11.21	39.96	68.30	-28.34	peak
2	8735.680	52.81	-8.30	44.51	68.30	-23.79	peak
3	12190.760	50.47	-6.22	44.25	74.00	-29.75	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 170 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

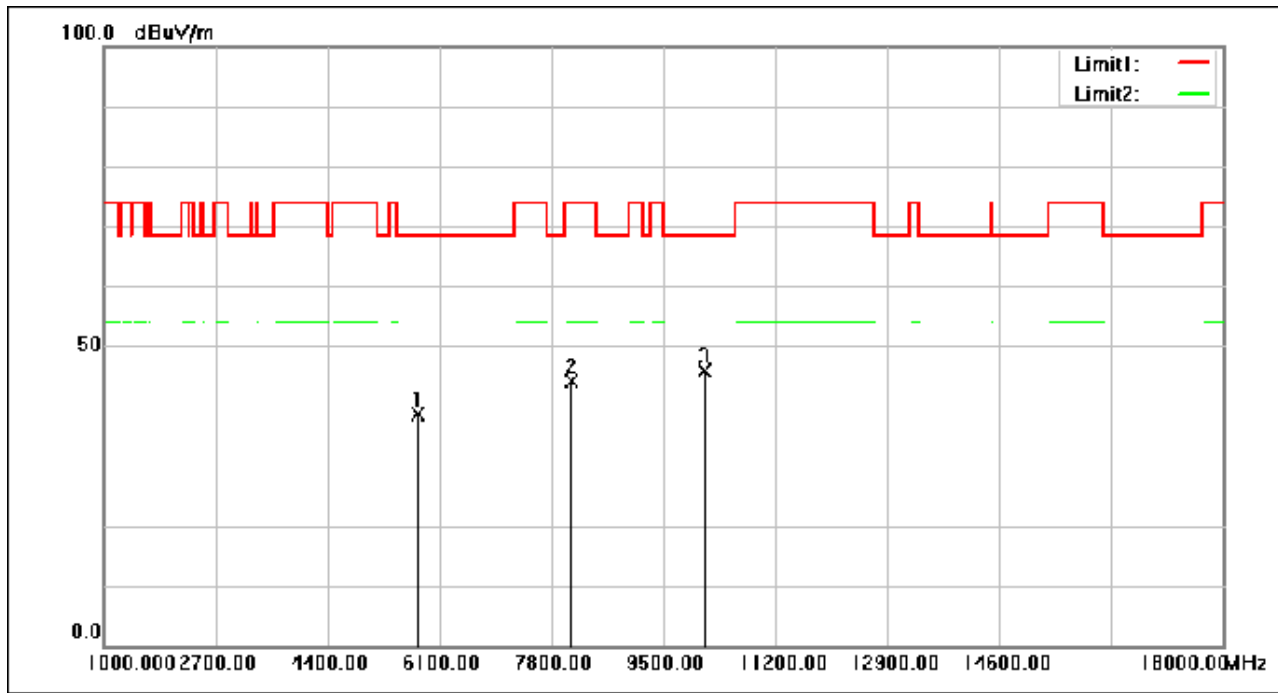

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5778.360	53.08	-14.35	38.73	68.30	-29.57	peak
2	8121.640	53.39	-9.32	44.07	74.00	-29.93	peak
3	10139.880	52.34	-6.35	45.99	68.30	-22.31	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 171 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

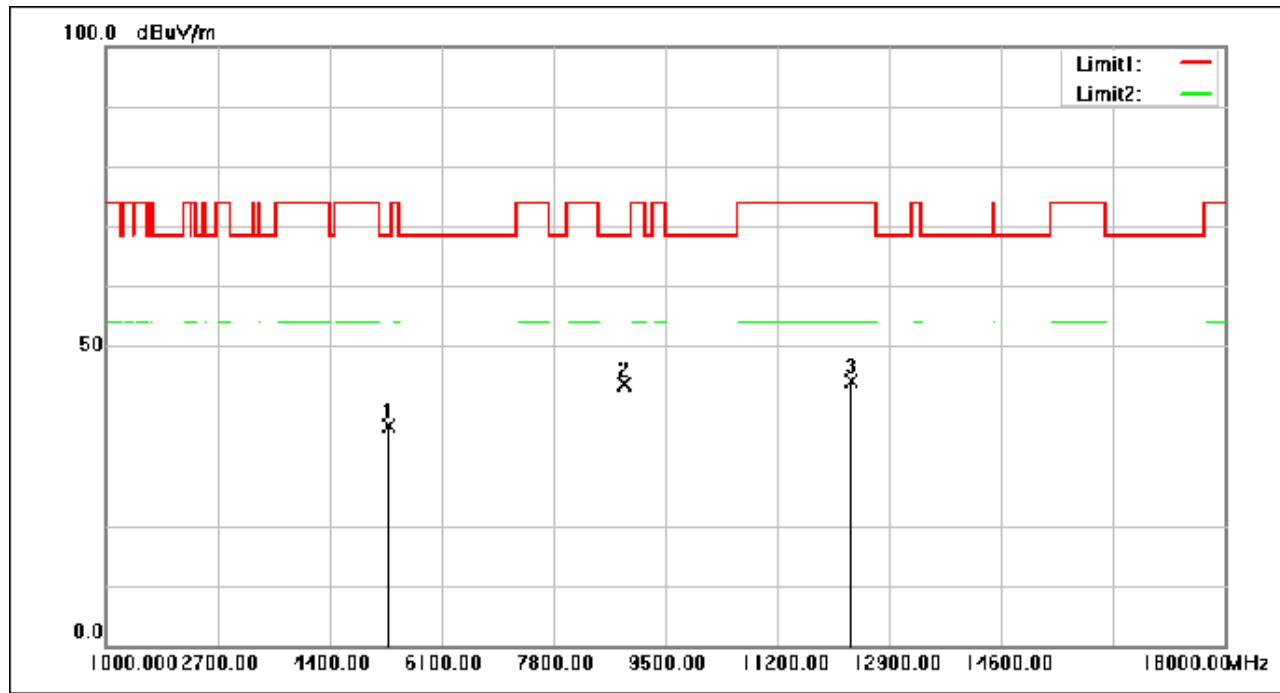

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5313.240	52.10	-15.46	36.64	68.30	-31.66	peak
2	8887.320	51.61	-7.97	43.64	68.30	-24.66	peak
3	12324.040	50.29	-6.12	44.17	74.00	-29.83	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 172 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

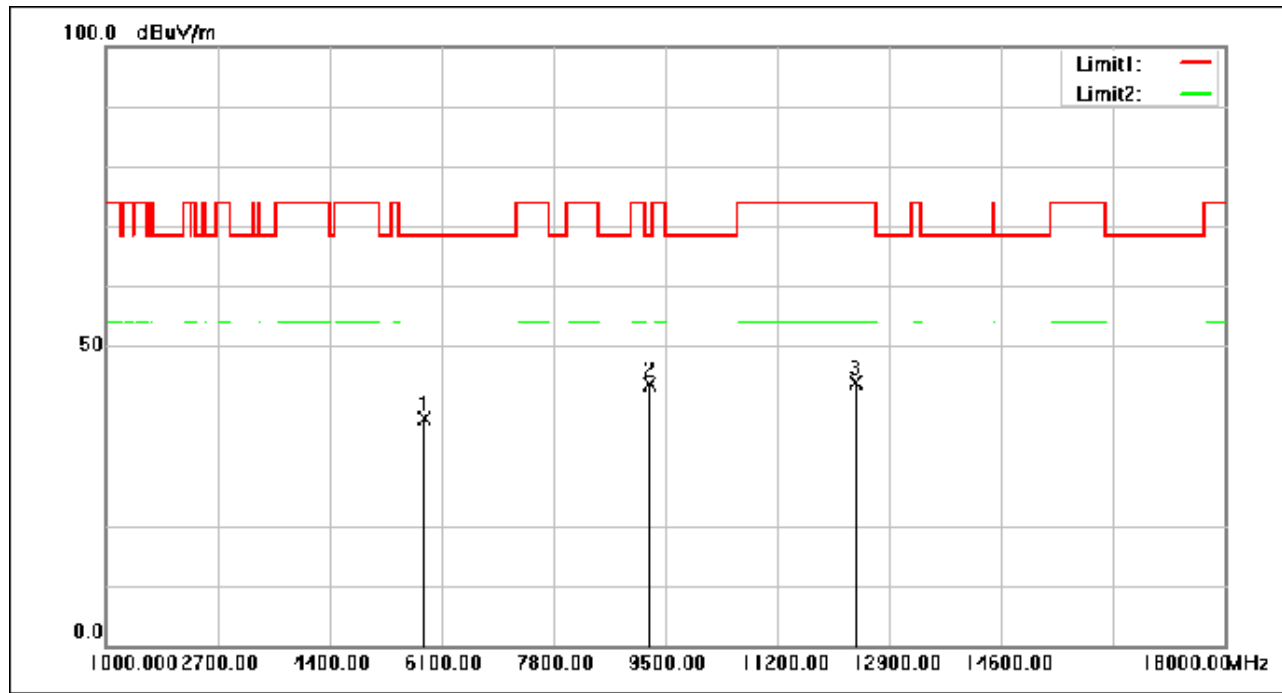

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5852.480	52.00	-14.01	37.99	68.30	-30.31	peak
2	9274.920	50.95	-7.26	43.69	68.30	-24.61	peak
3	12391.360	49.91	-6.05	43.86	74.00	-30.14	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 173 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

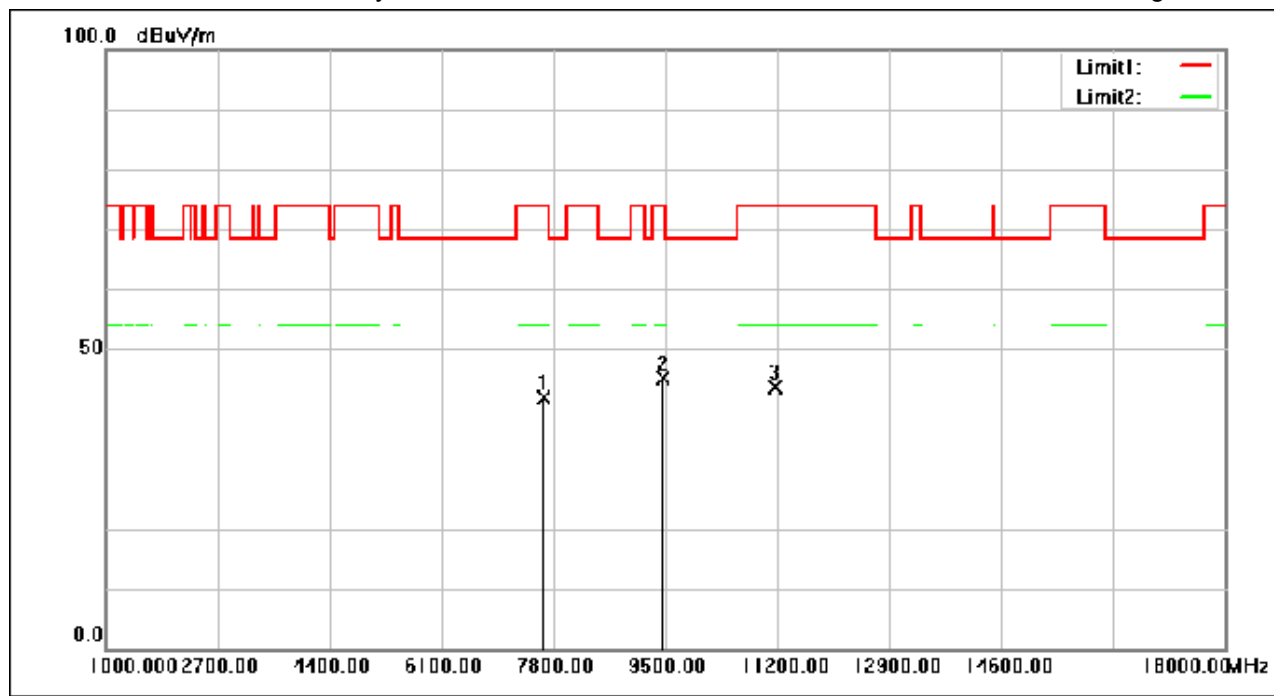

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7651.760	51.38	-9.47	41.91	74.00	-32.09	peak
2	9478.240	52.12	-6.94	45.18	74.00	-28.82	peak
3	11179.600	49.80	-6.26	43.54	74.00	-30.46	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 174 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

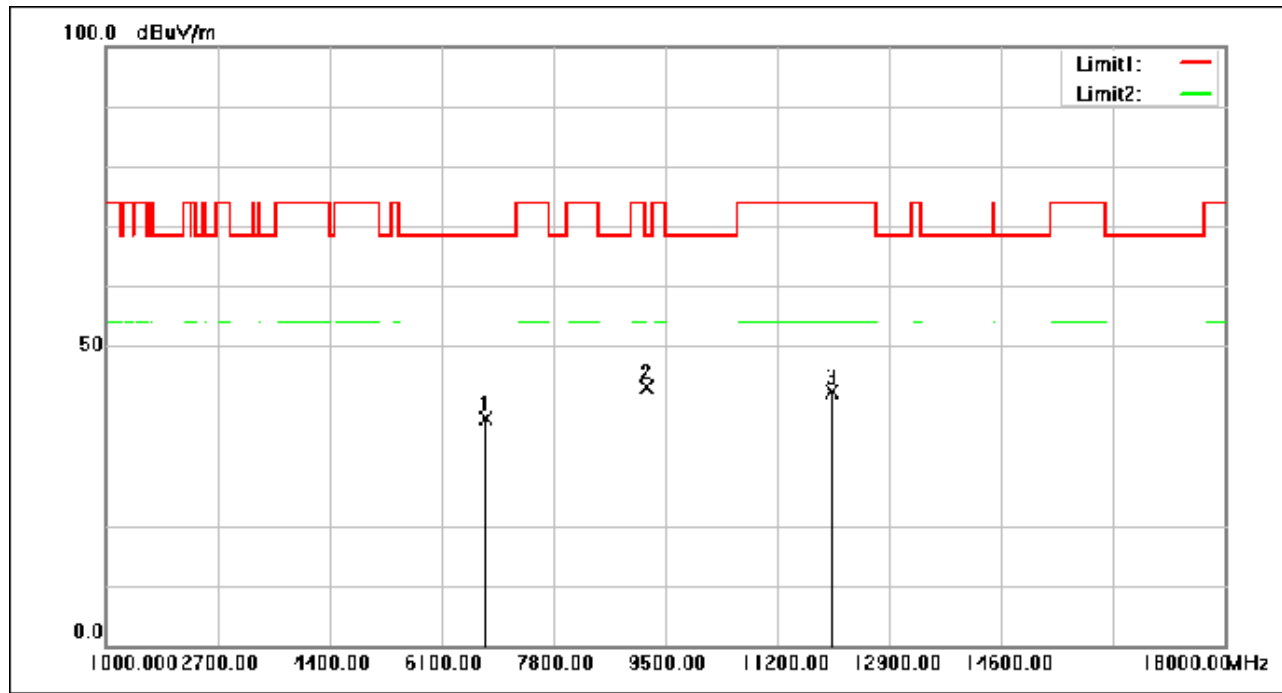

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6774.560	47.98	-10.11	37.87	68.30	-30.43	peak
2	9212.360	50.48	-7.36	43.12	68.30	-25.18	peak
3	12048.640	48.63	-6.35	42.28	74.00	-31.72	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 175 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

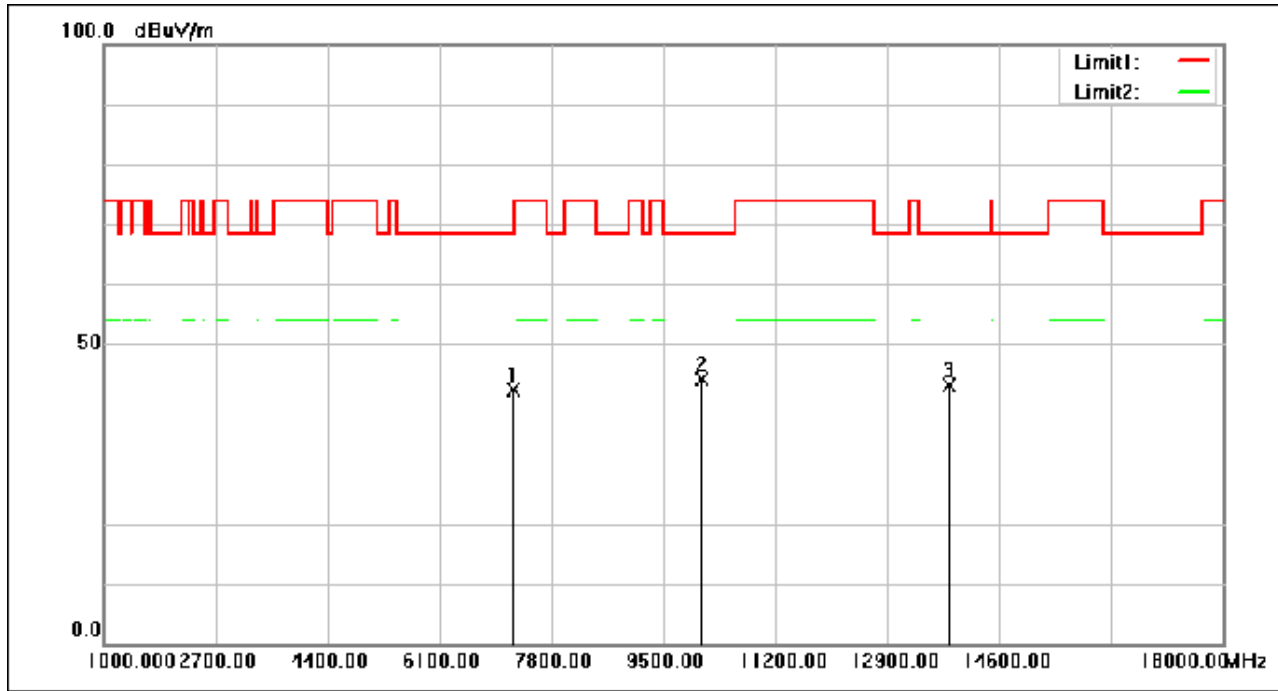

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7234.920	52.25	-9.77	42.48	68.30	-25.82	peak
2	10078.000	50.53	-6.34	44.19	68.30	-24.11	peak
3	13841.800	49.19	-6.14	43.05	68.30	-25.25	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 176 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

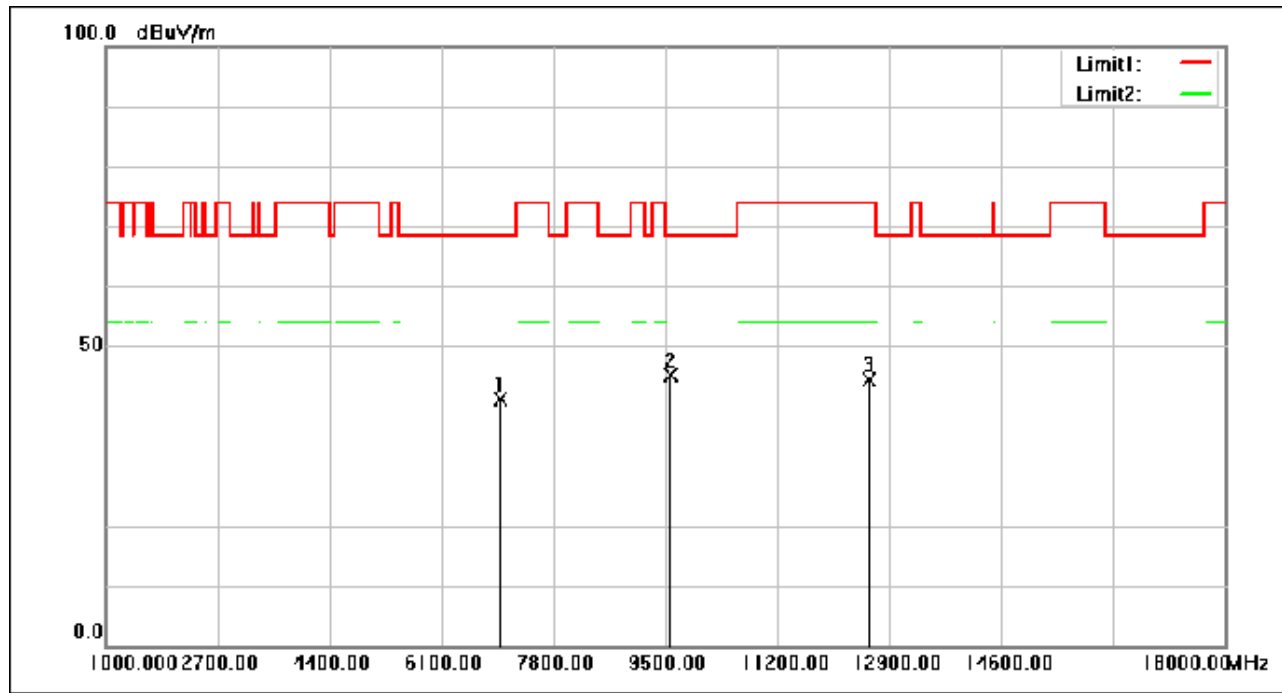

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7007.800	51.10	-9.96	41.14	68.30	-27.16	peak
2	9593.840	51.78	-6.74	45.04	68.30	-23.26	peak
3	12595.360	50.37	-5.88	44.49	74.00	-29.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 177 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

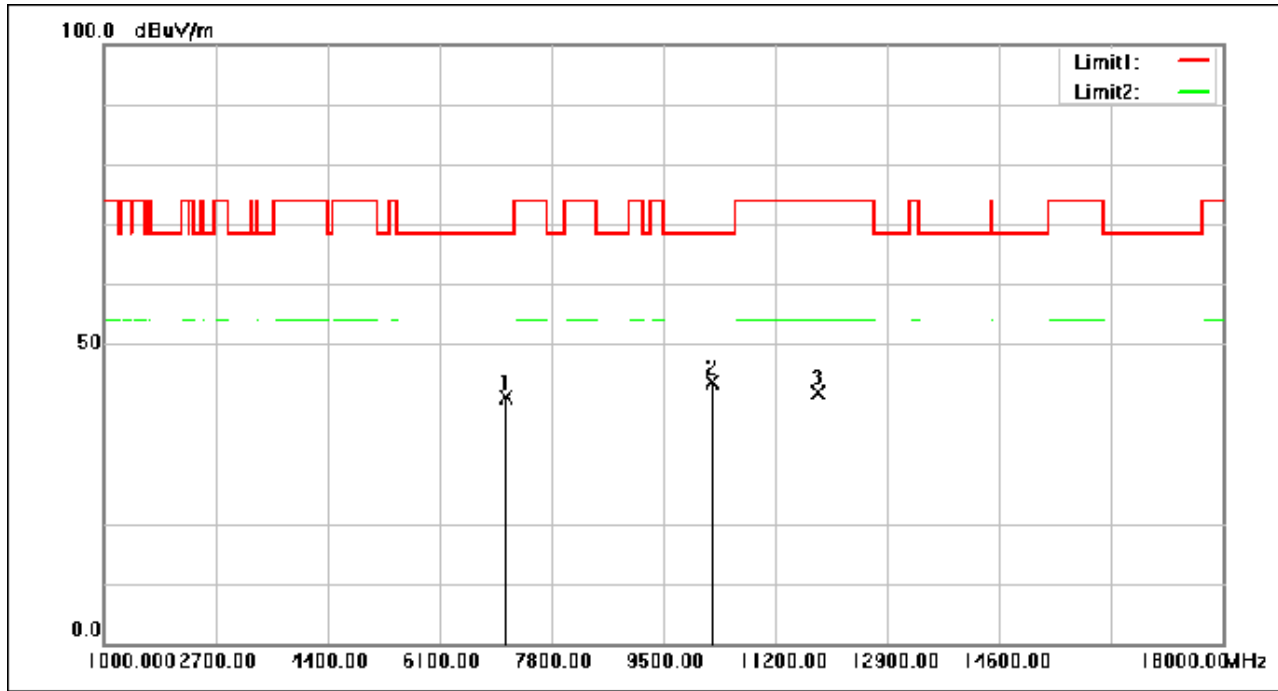

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7107.760	51.09	-9.88	41.21	68.30	-27.09	peak
2	10240.520	50.08	-6.36	43.72	68.30	-24.58	peak
3	11846.680	48.18	-6.34	41.84	74.00	-32.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 178 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

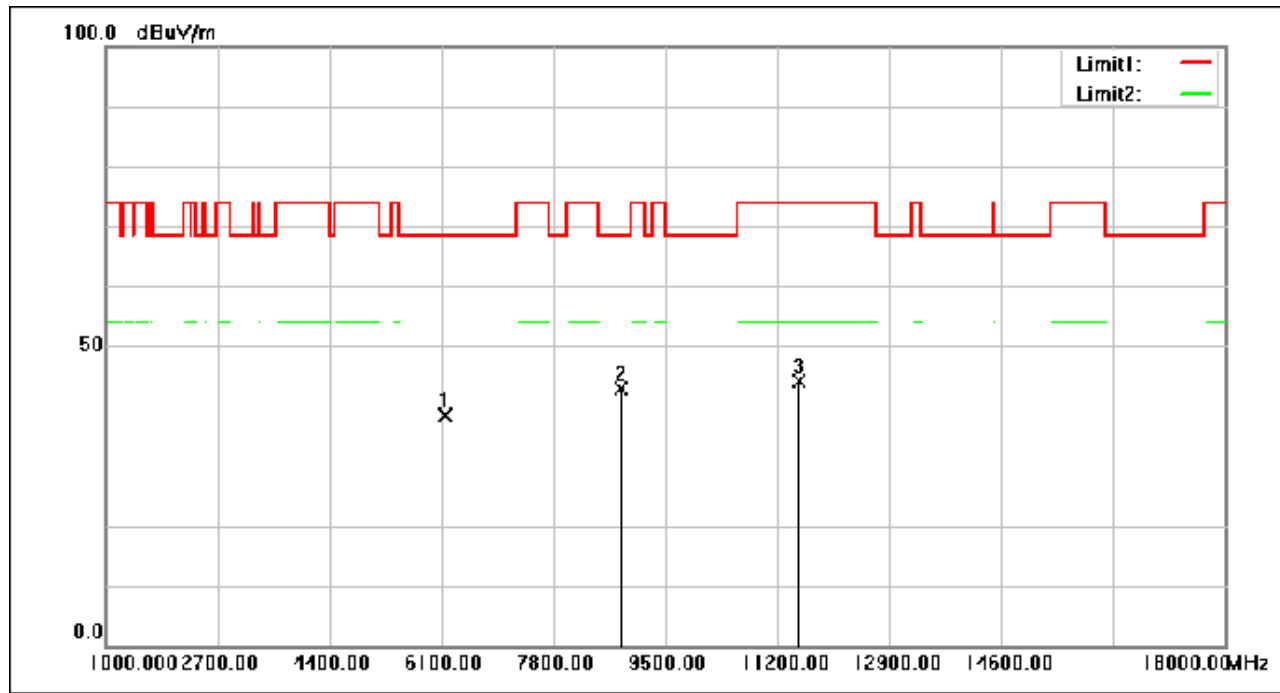

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6165.960	50.94	-12.45	38.49	68.30	-29.81	peak
2	8840.400	50.90	-8.07	42.83	68.30	-25.47	peak
3	11529.120	50.14	-6.08	44.06	74.00	-29.94	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 179 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

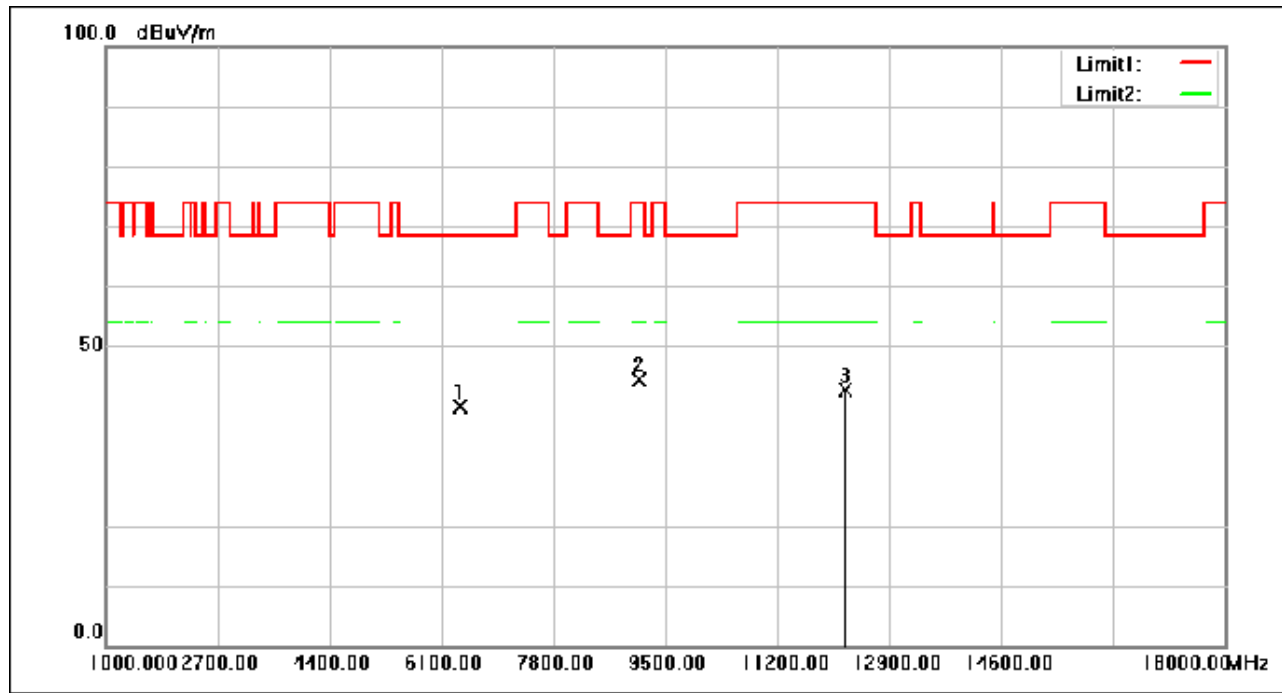

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6398.520	51.47	-11.49	39.98	68.30	-28.32	peak
2	9118.520	51.97	-7.51	44.46	74.00	-29.54	peak
3	12249.920	48.85	-6.18	42.67	74.00	-31.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 180 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

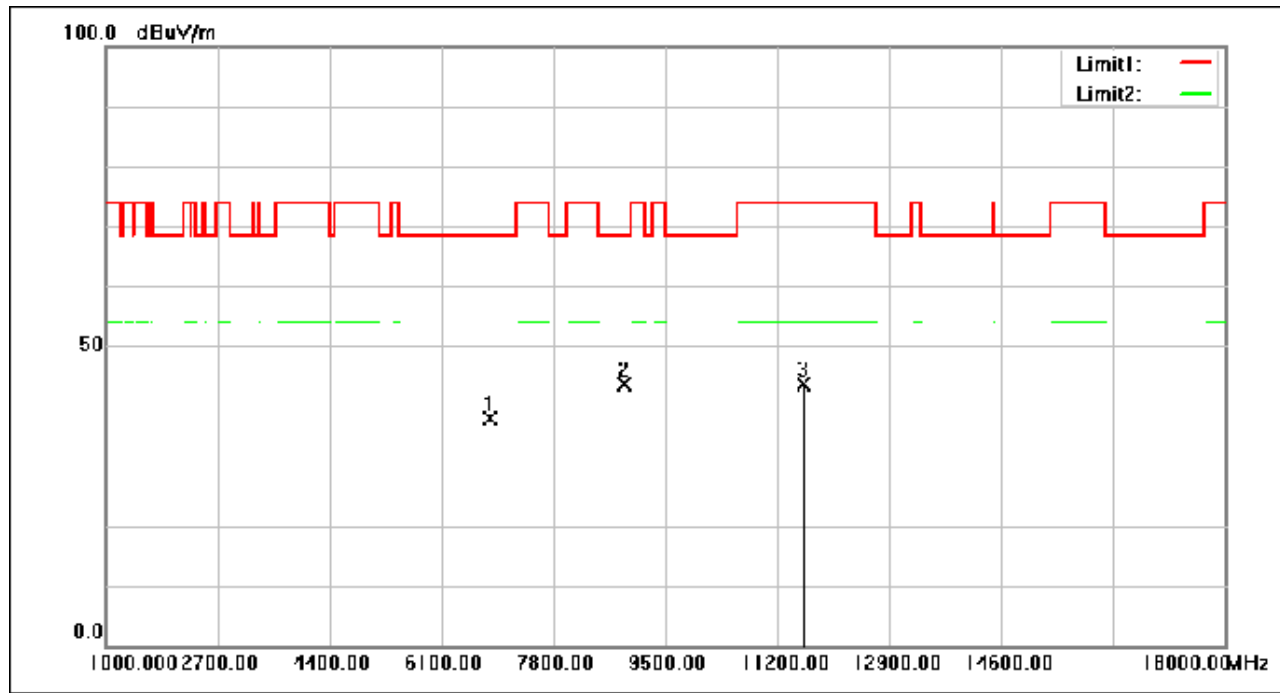

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6842.560	47.99	-10.07	37.92	68.30	-30.38	peak
2	8871.000	51.63	-8.00	43.63	68.30	-24.67	peak
3	11603.920	49.69	-6.14	43.55	74.00	-30.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 181 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

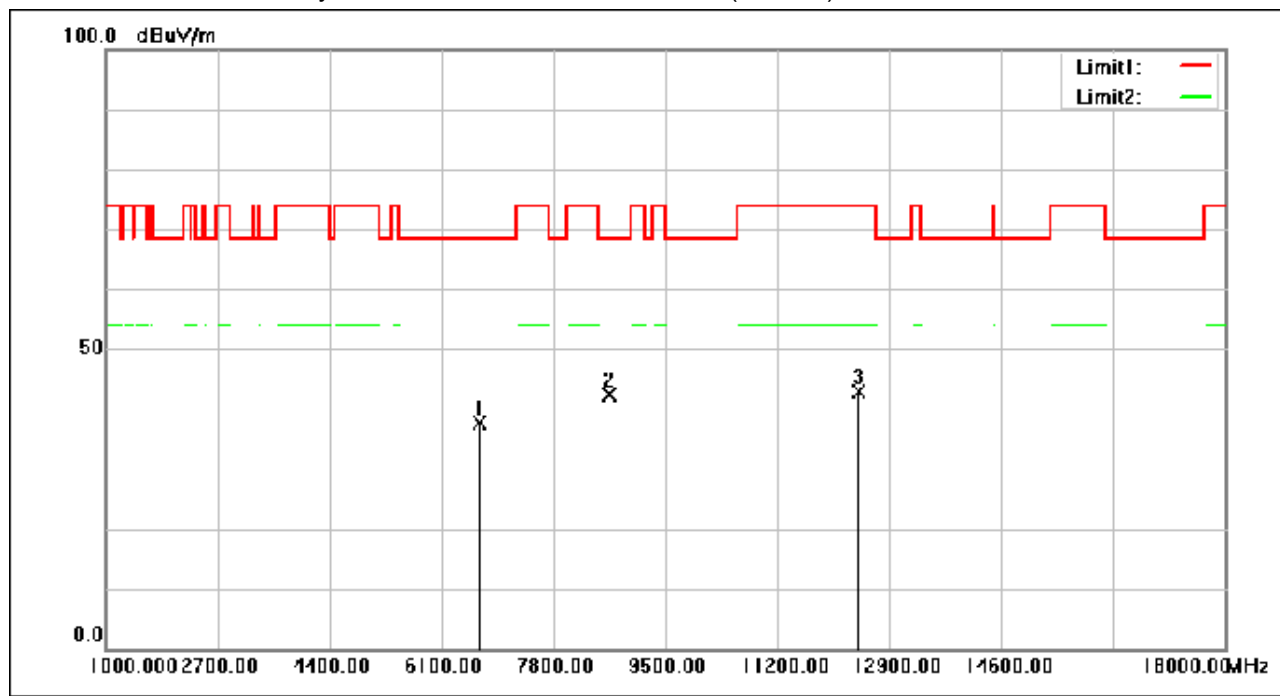

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6691.600	47.92	-10.29	37.63	68.30	-30.67	peak
2	8656.120	50.76	-8.47	42.29	68.30	-26.01	peak
3	12450.520	48.97	-6.01	42.96	74.00	-31.04	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 182 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

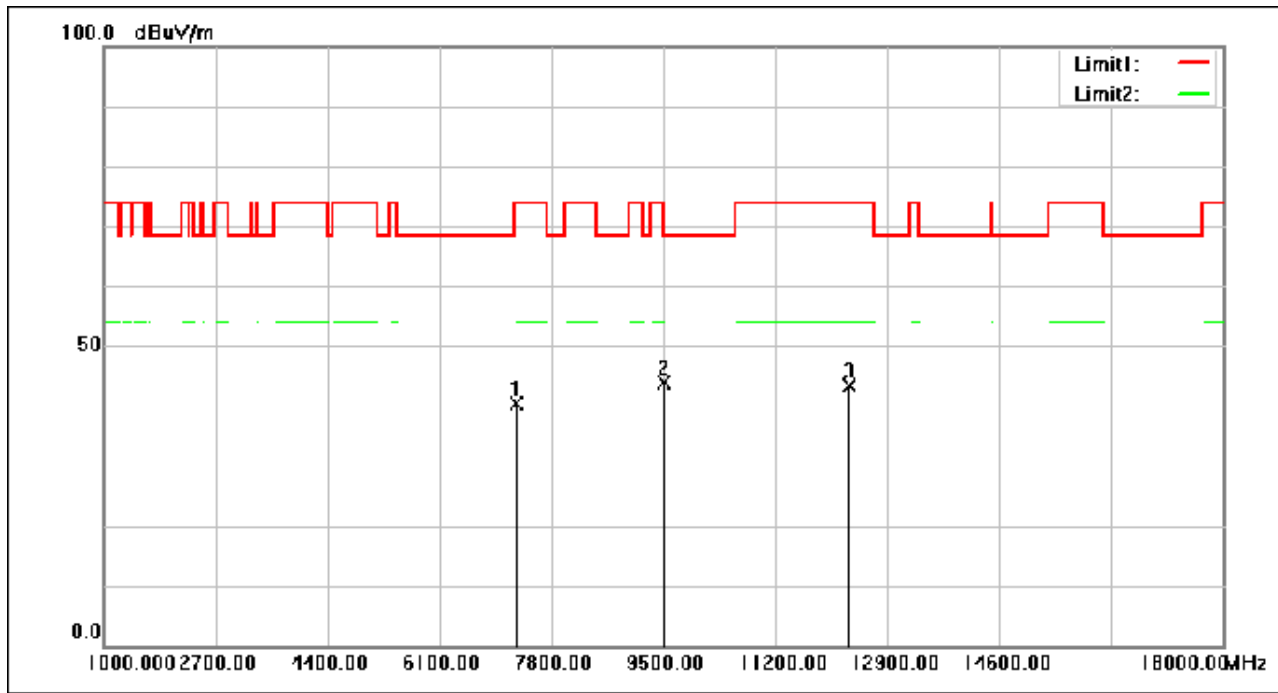

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7281.160	50.23	-9.73	40.50	74.00	-33.50	peak
2	9521.080	50.66	-6.86	43.80	68.30	-24.50	peak
3	12332.880	49.47	-6.10	43.37	74.00	-30.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 183 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

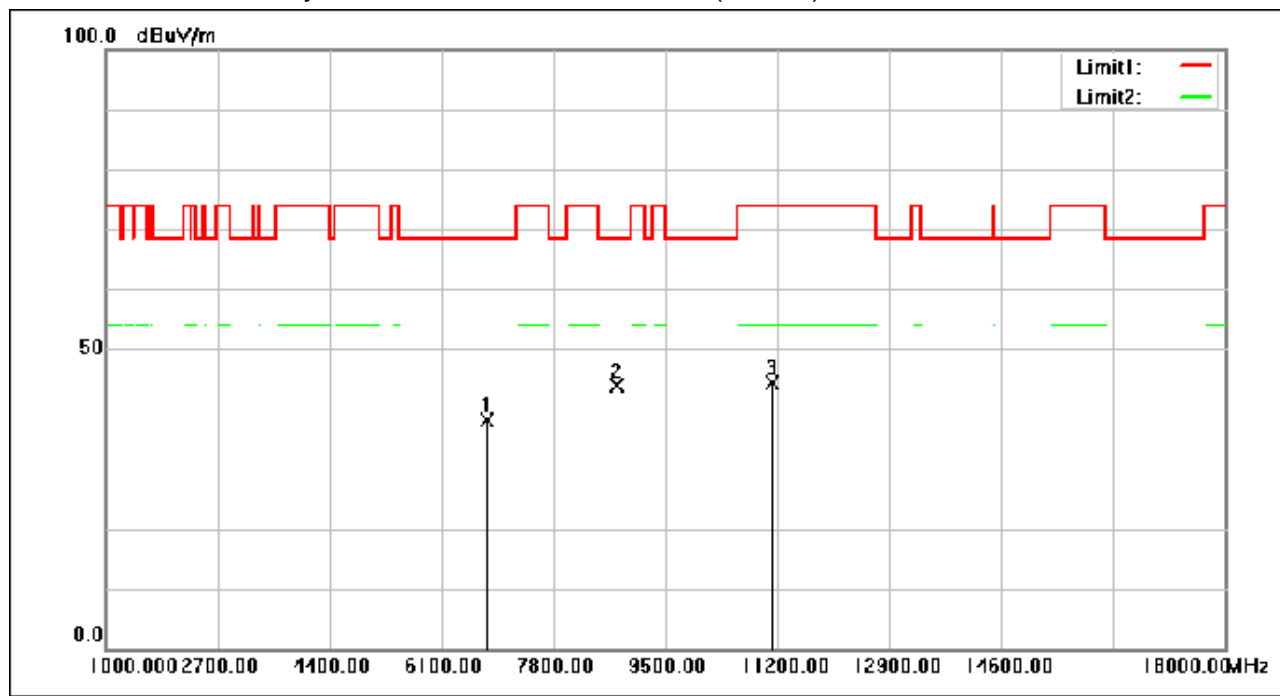

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6803.800	48.29	-10.09	38.20	68.30	-30.10	peak
2	8782.600	52.10	-8.19	43.91	68.30	-24.39	peak
3	11121.800	50.78	-6.29	44.49	74.00	-29.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 184 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

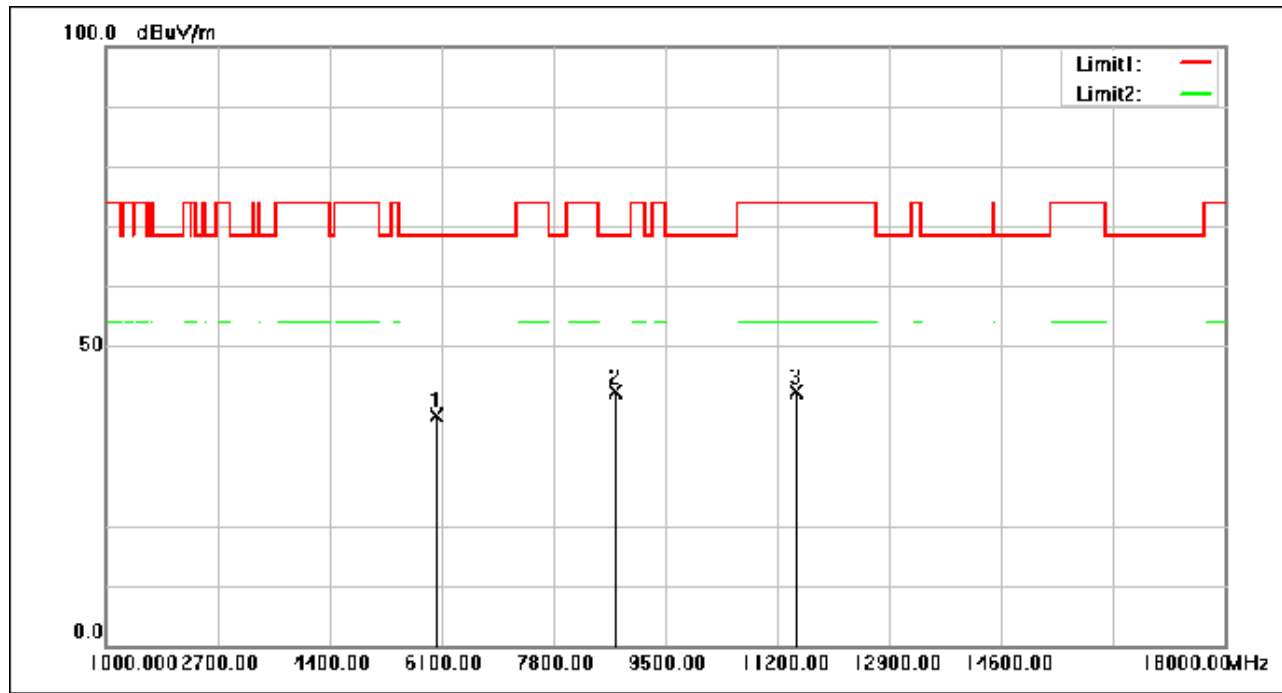

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6015.000	51.44	-13.03	38.41	68.30	-29.89	peak
2	8749.280	50.71	-8.27	42.44	68.30	-25.86	peak
3	11491.040	48.35	-6.07	42.28	74.00	-31.72	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 185 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

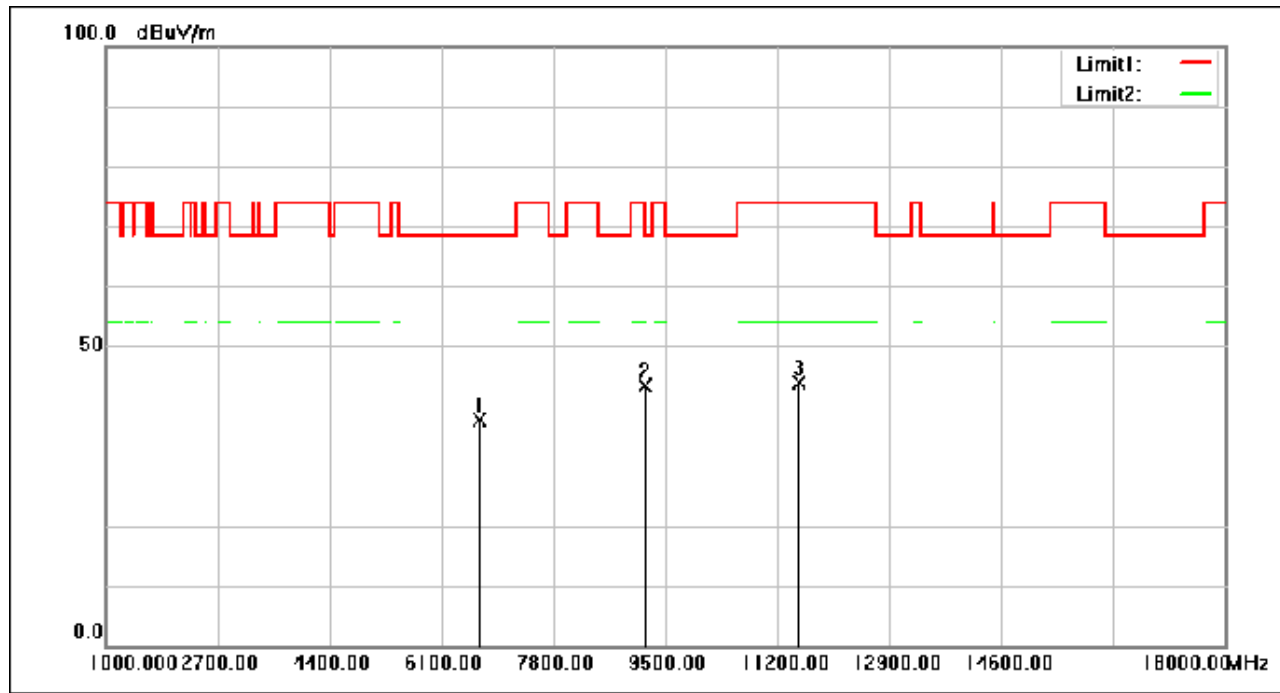

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6690.240	47.90	-10.29	37.61	68.30	-30.69	peak
2	9196.720	50.75	-7.39	43.36	74.00	-30.64	peak
3	11536.600	49.93	-6.09	43.84	74.00	-30.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 186 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

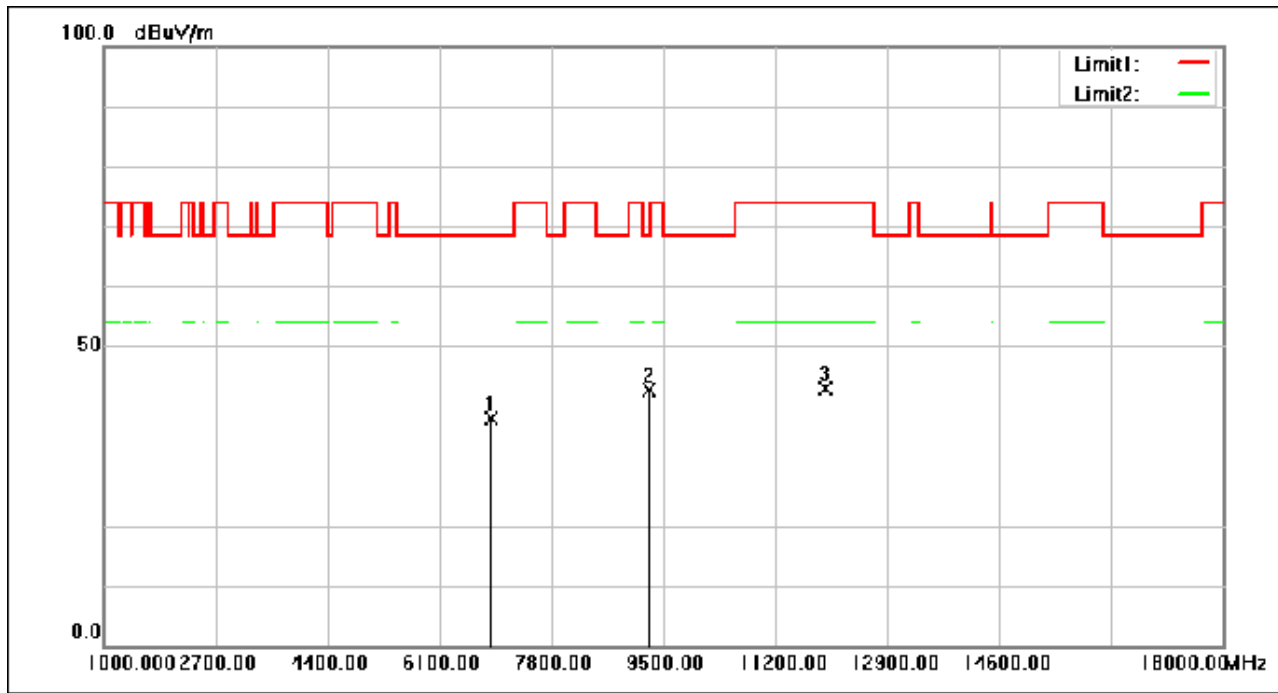

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6890.160	48.00	-10.04	37.96	68.30	-30.34	peak
2	9281.040	49.94	-7.25	42.69	68.30	-25.61	peak
3	11968.400	49.31	-6.39	42.92	74.00	-31.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 187 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

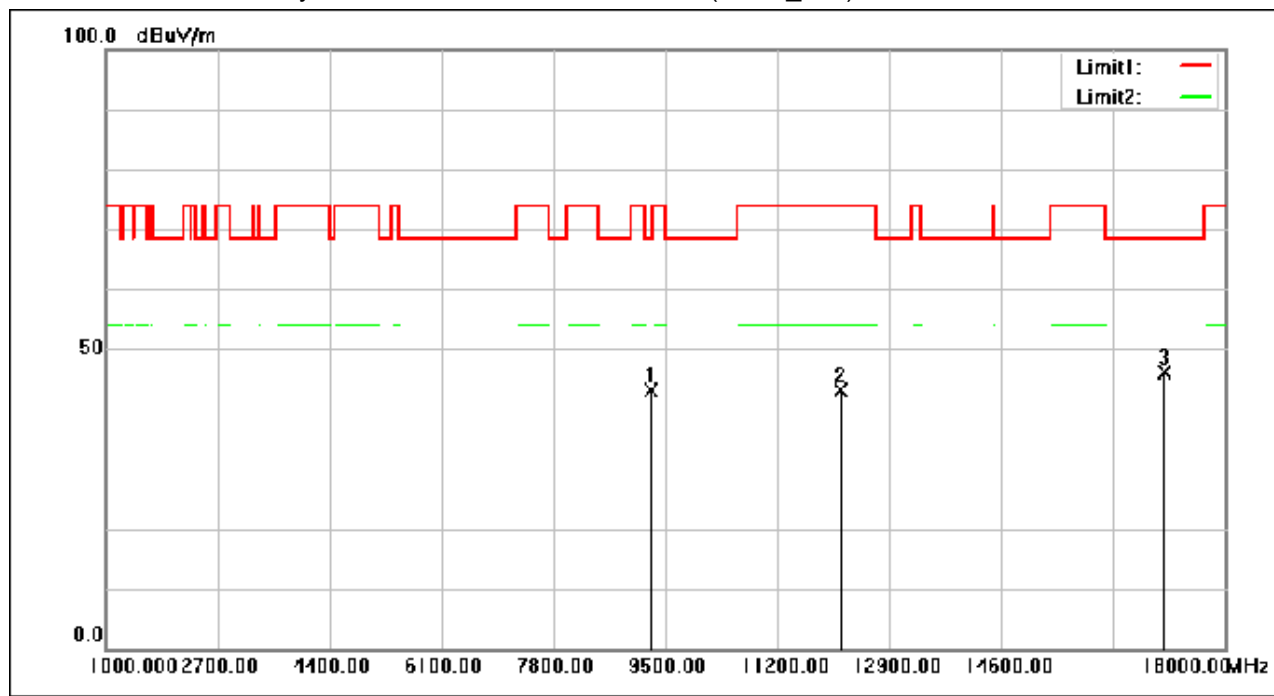

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9295.320	50.35	-7.23	43.12	68.30	-25.18	peak
2	12175.800	49.36	-6.23	43.13	74.00	-30.87	peak
3	17097.640	48.43	-2.34	46.09	68.30	-22.21	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 188 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

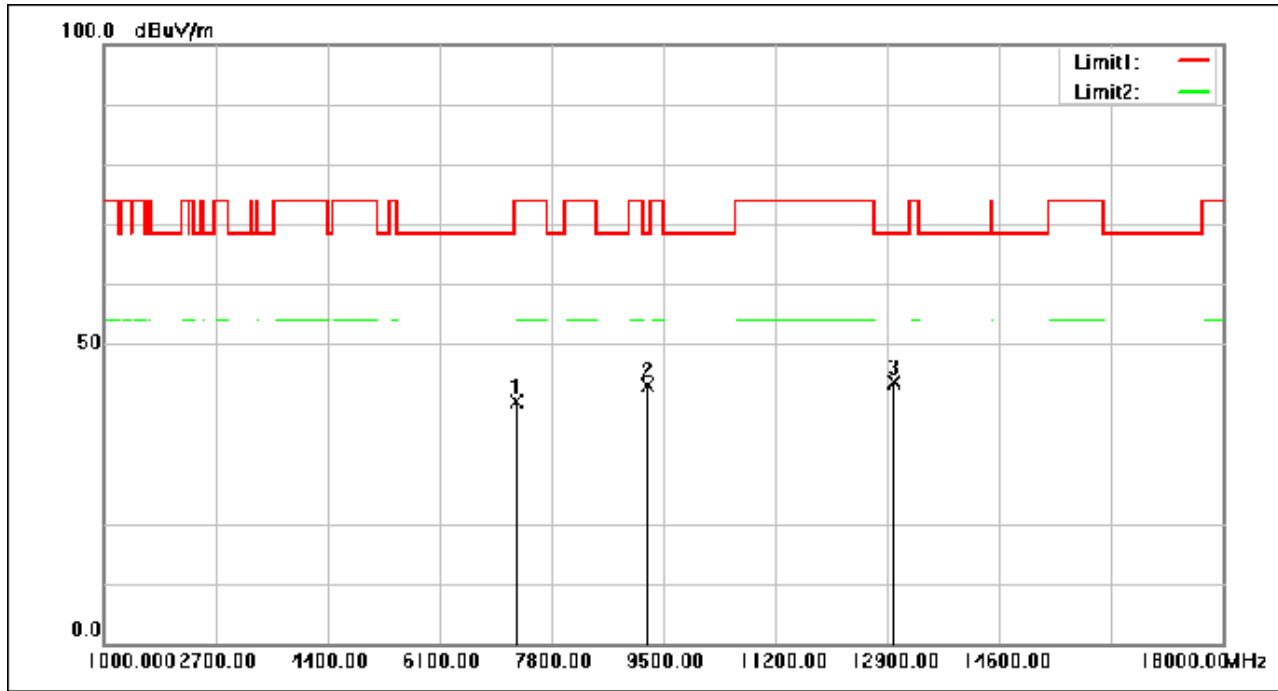

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7274.360	50.15	-9.74	40.41	74.00	-33.59	peak
2	9270.840	50.38	-7.27	43.11	68.30	-25.19	peak
3	13011.520	49.21	-5.53	43.68	68.30	-24.62	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 189 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

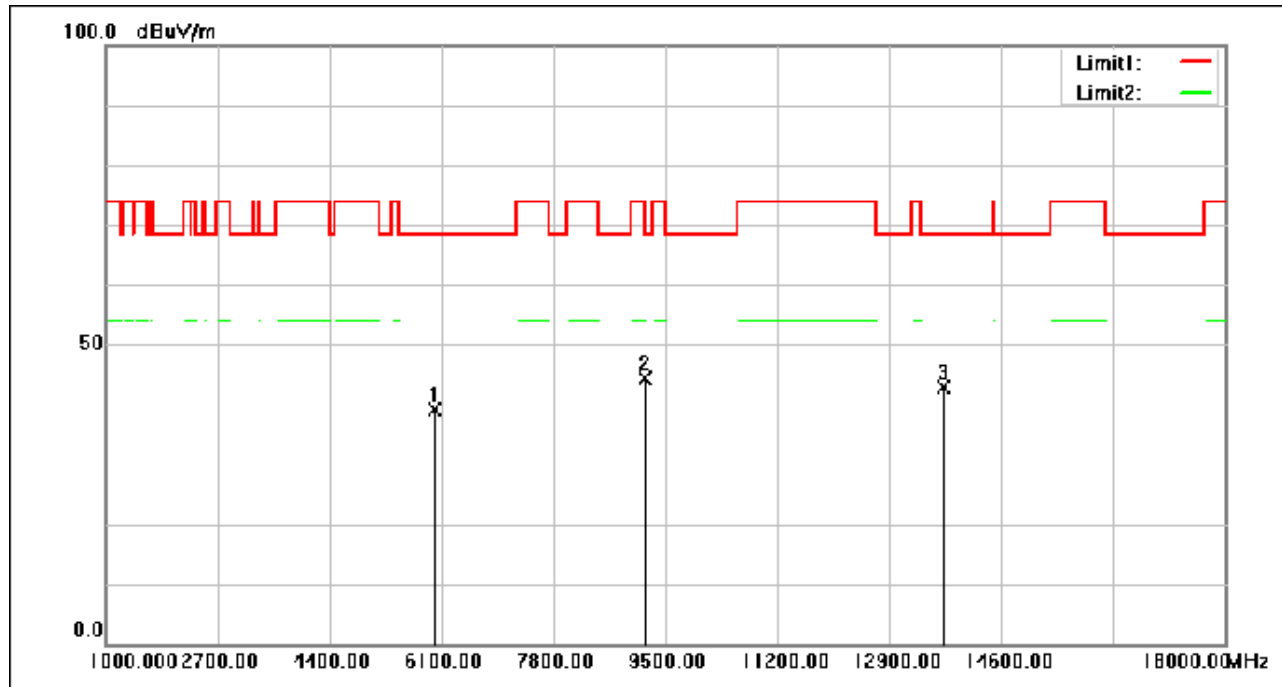

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6011.600	52.11	-13.04	39.07	68.30	-29.23	peak
2	9204.880	51.72	-7.37	44.35	68.30	-23.95	peak
3	13744.560	49.01	-6.02	42.99	68.30	-25.31	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 190 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

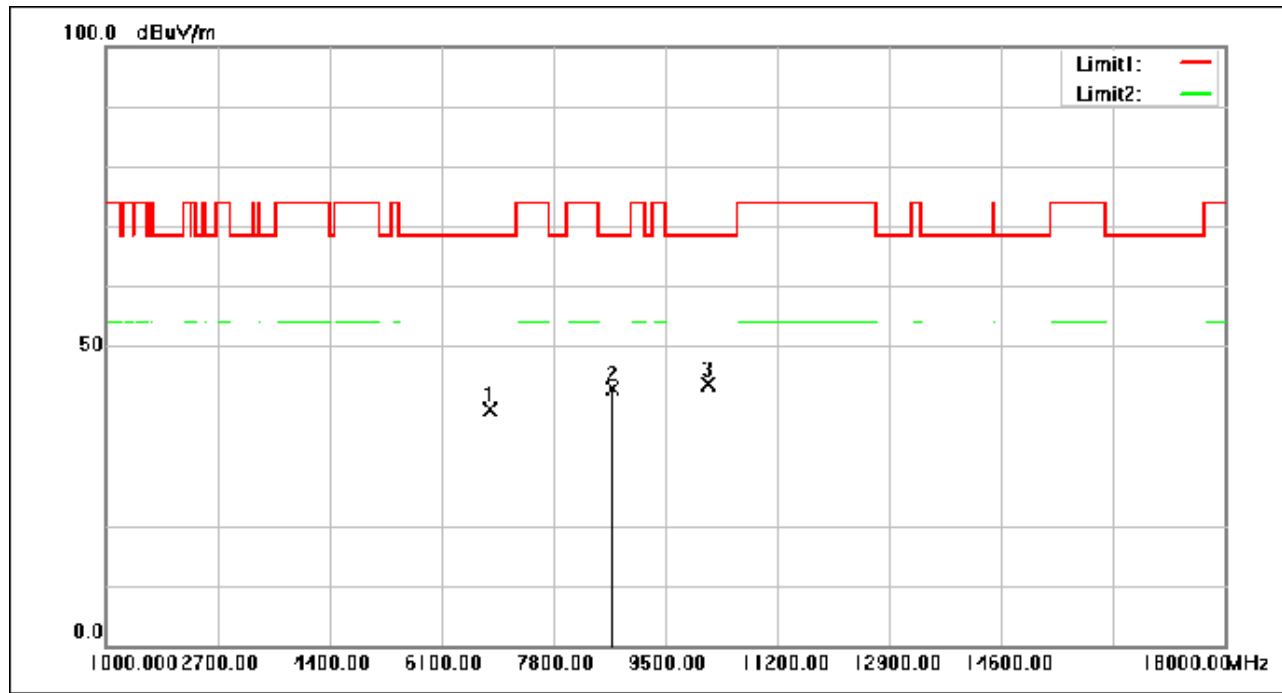

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6845.280	49.56	-10.06	39.50	68.30	-28.80	peak
2	8704.400	51.14	-8.37	42.77	68.30	-25.53	peak
3	10153.480	50.00	-6.35	43.65	68.30	-24.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 191 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

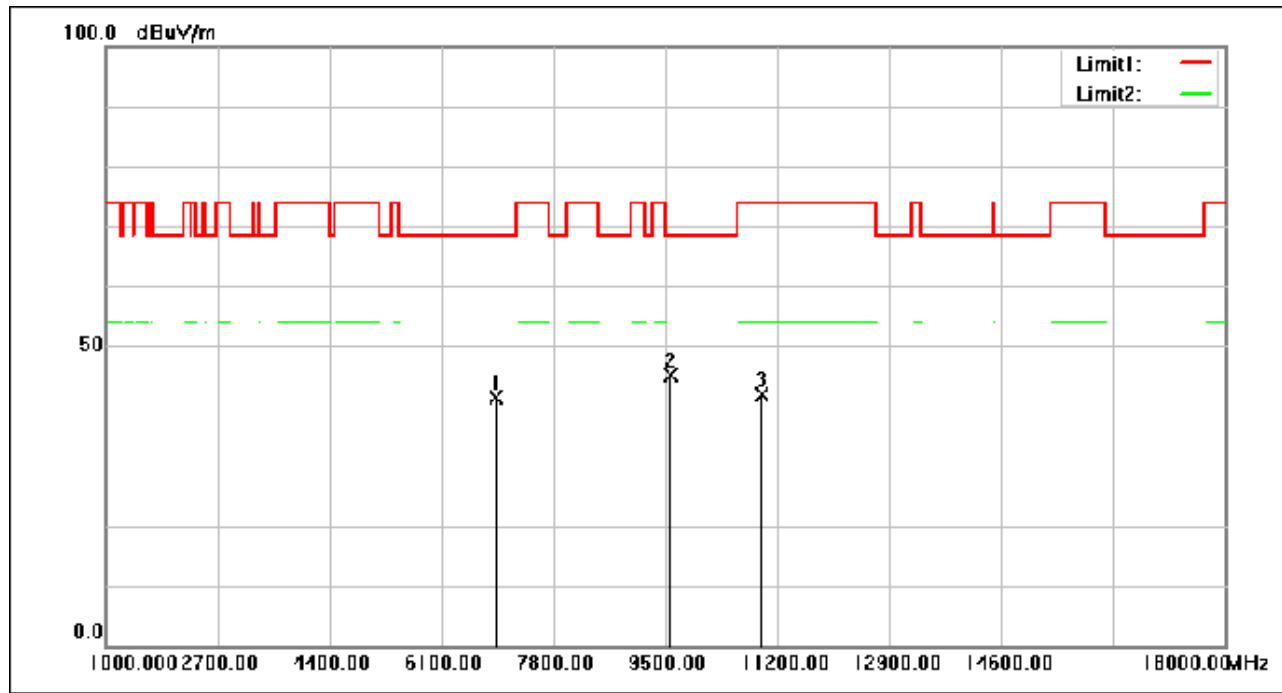

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6945.920	51.28	-10.00	41.28	68.30	-27.02	peak
2	9600.640	51.74	-6.72	45.02	68.30	-23.28	peak
3	10962.680	48.27	-6.36	41.91	74.00	-32.09	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 192 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

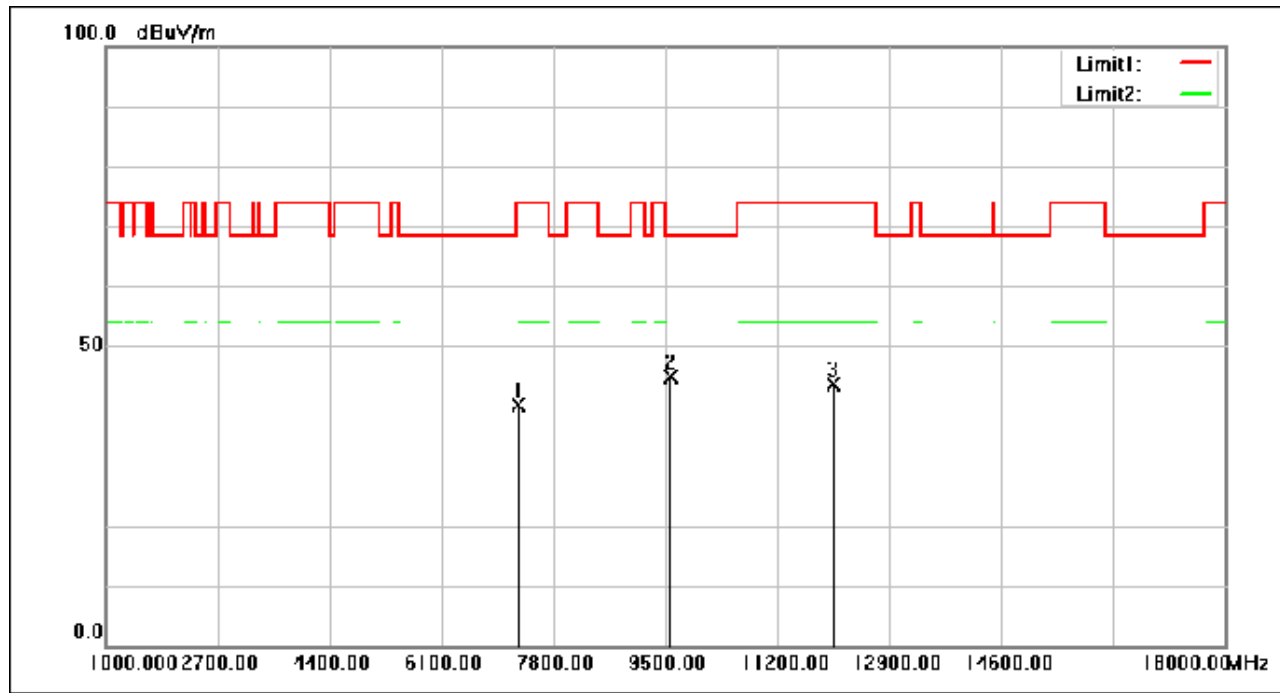

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7284.560	49.87	-9.72	40.15	74.00	-33.85	peak
2	9599.280	51.52	-6.73	44.79	68.30	-23.51	peak
3	12065.640	49.90	-6.33	43.57	74.00	-30.43	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 193 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

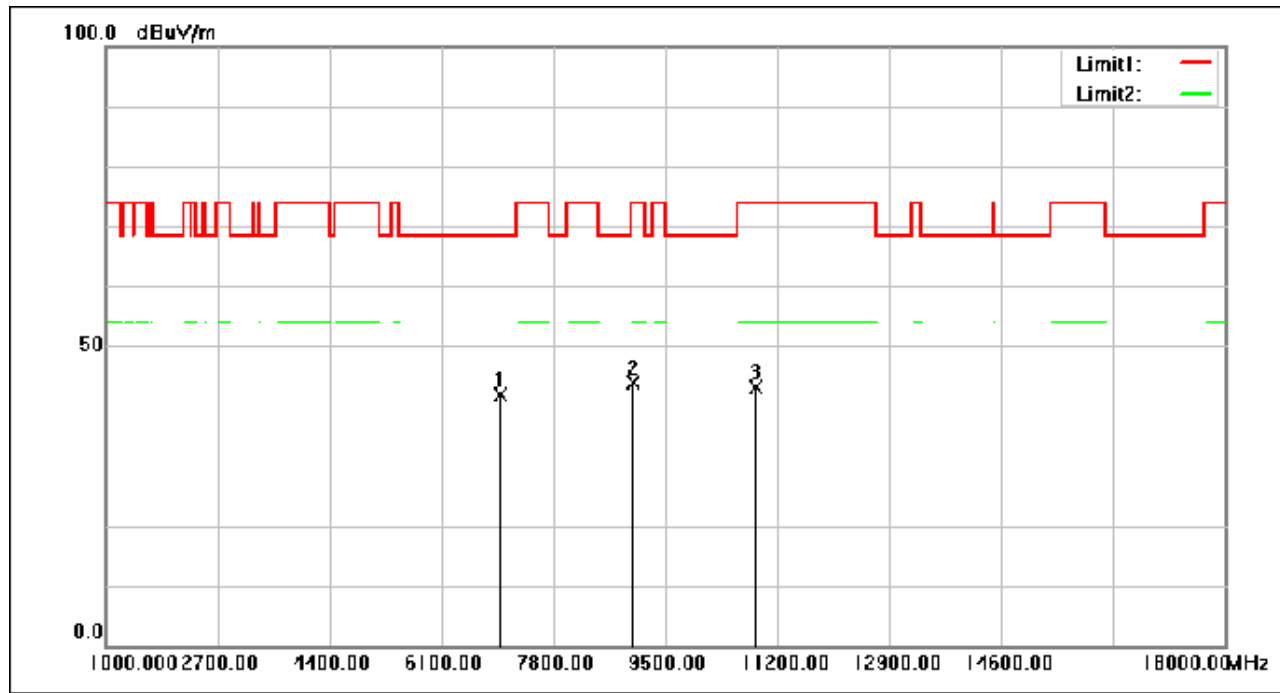

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7009.160	51.81	-9.96	41.85	68.30	-26.45	peak
2	9011.760	51.56	-7.68	43.88	74.00	-30.12	peak
3	10889.240	49.61	-6.36	43.25	74.00	-30.75	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 194 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

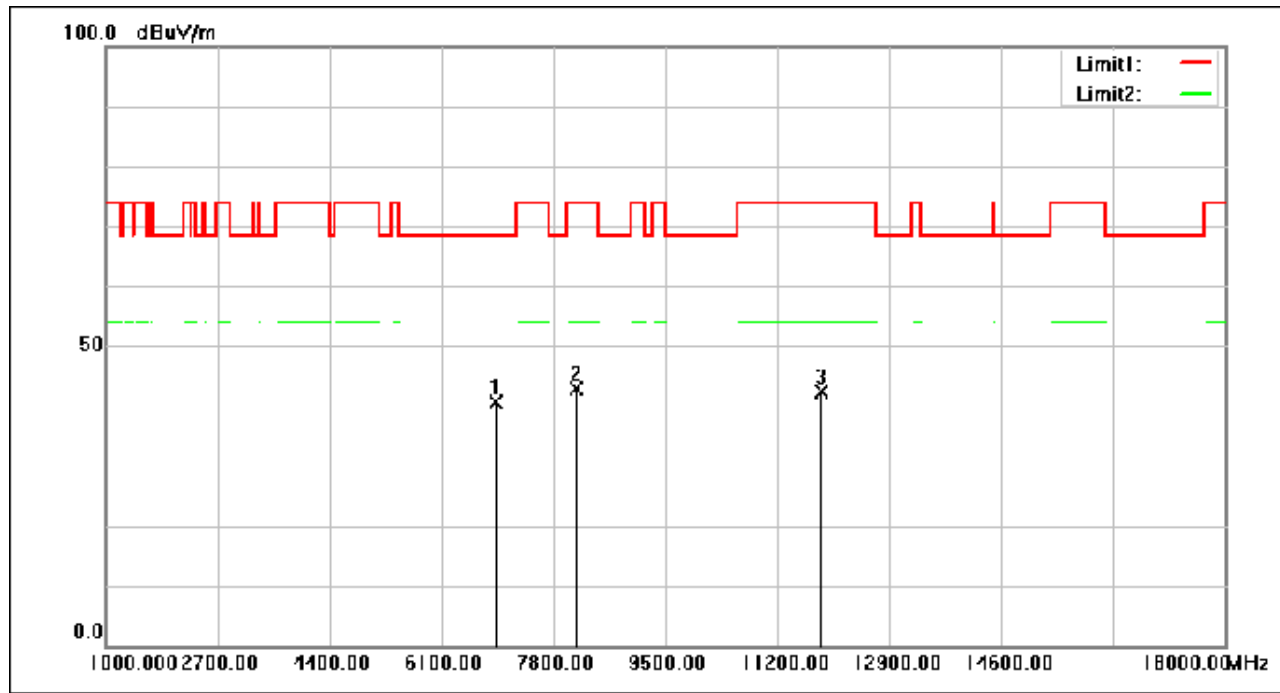

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6939.800	50.64	-10.00	40.64	68.30	-27.66	peak
2	8161.760	52.12	-9.26	42.86	74.00	-31.14	peak
3	11875.240	48.84	-6.36	42.48	74.00	-31.52	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 195 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

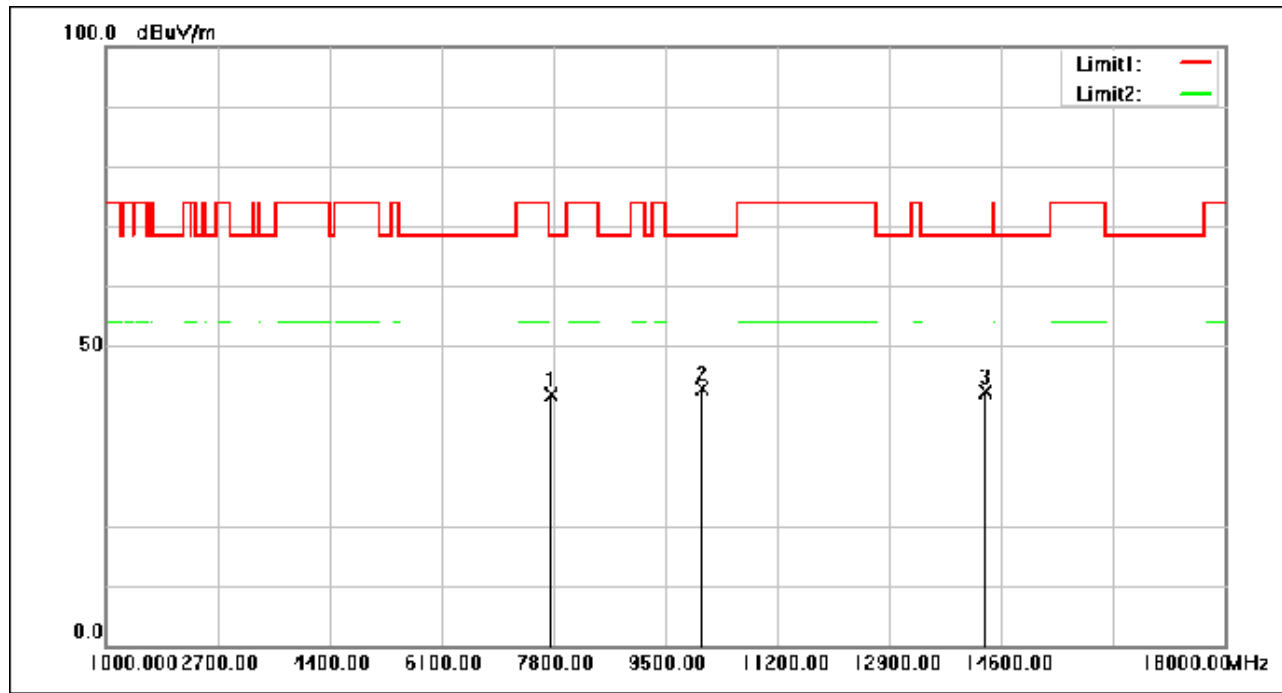

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7780.280	51.24	-9.48	41.76	68.30	-26.54	peak
2	10075.280	49.21	-6.34	42.87	68.30	-25.43	peak
3	14369.480	48.82	-6.54	42.28	68.30	-26.02	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 196 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

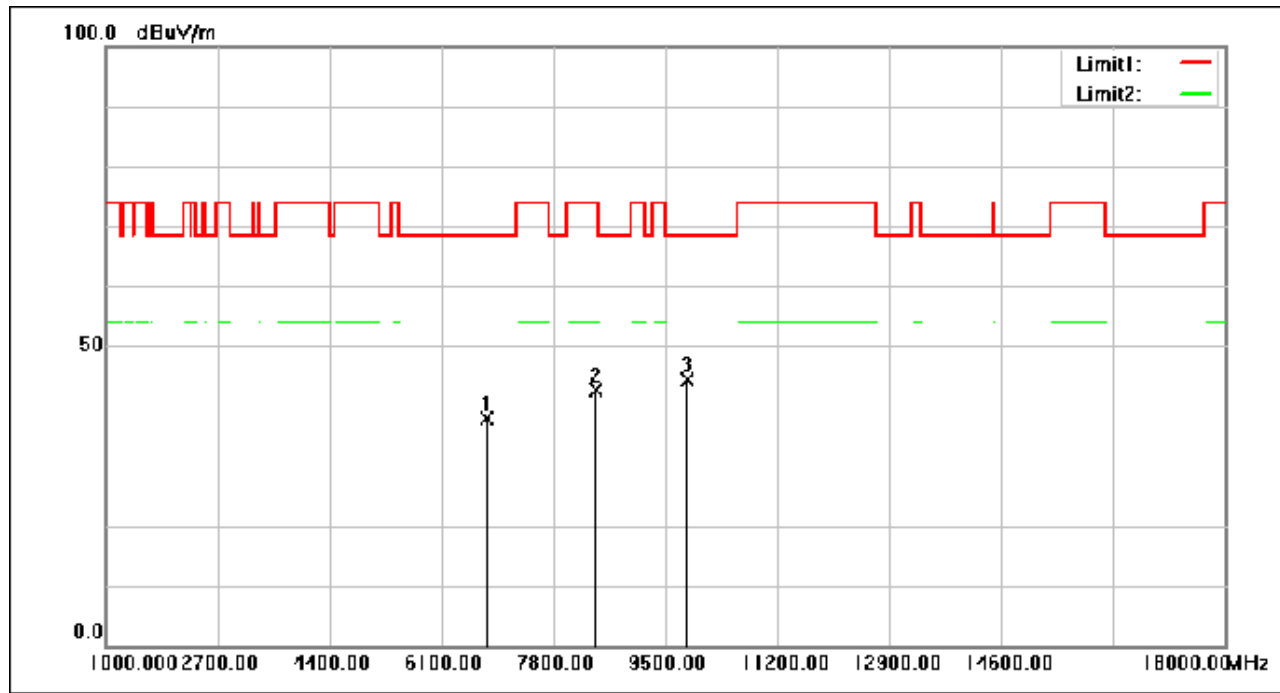

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6799.040	47.96	-10.09	37.87	68.30	-30.43	peak
2	8448.040	51.59	-8.87	42.72	74.00	-31.28	peak
3	9823.680	50.63	-6.32	44.31	68.30	-23.99	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 197 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

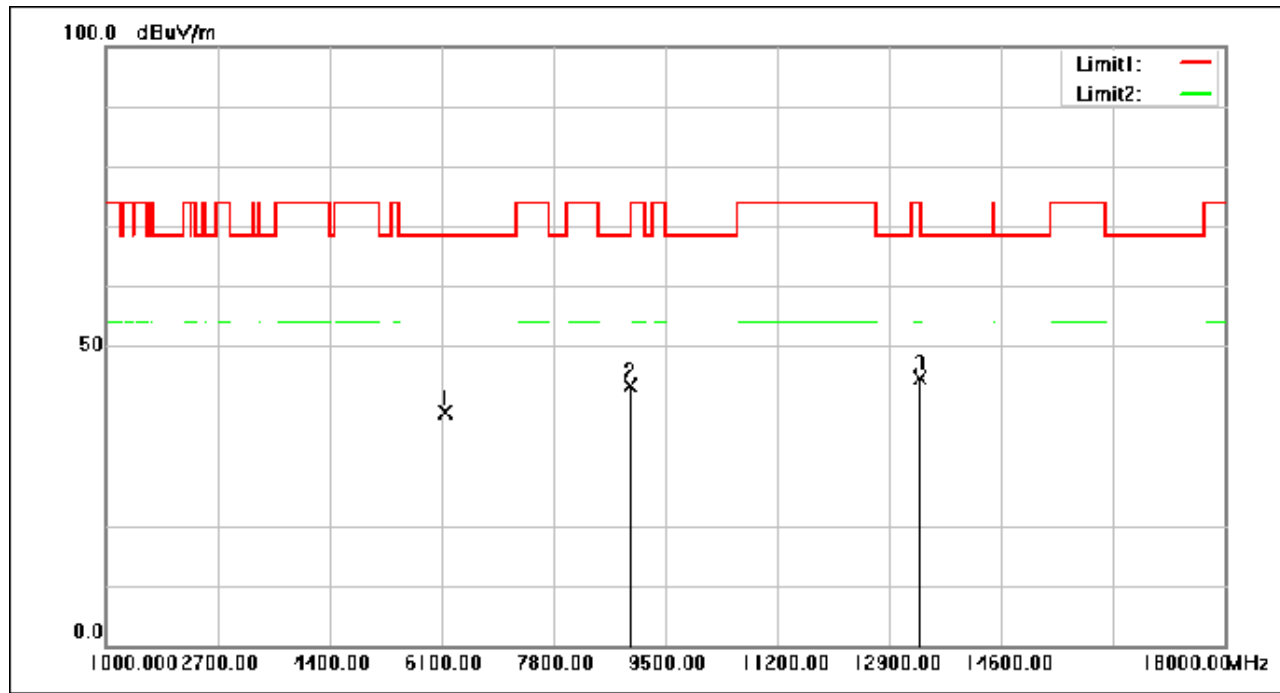

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6158.480	51.46	-12.48	38.98	68.30	-29.32	peak
2	8983.880	51.17	-7.74	43.43	68.30	-24.87	peak
3	13365.120	50.29	-5.66	44.63	74.00	-29.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 198 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

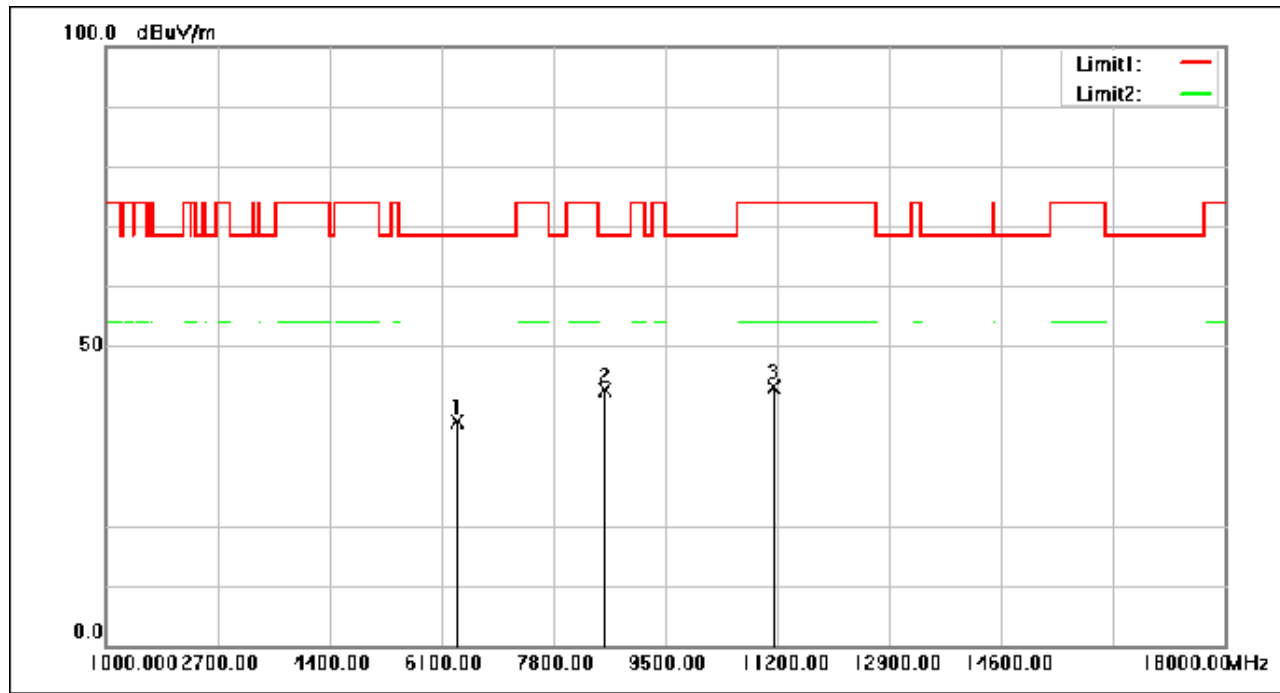

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6345.480	49.03	-11.71	37.32	68.30	-30.98	peak
2	8585.400	51.33	-8.62	42.71	68.30	-25.59	peak
3	11161.920	49.42	-6.26	43.16	74.00	-30.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 199 of 929

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

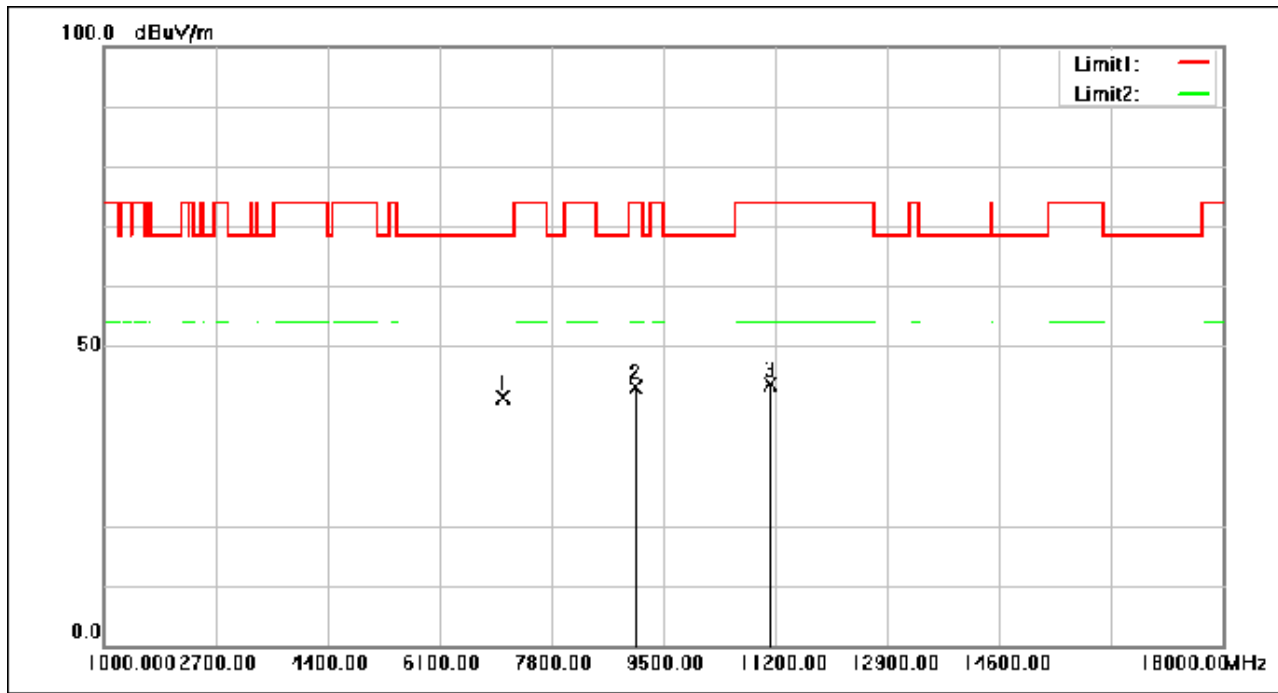

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7077.840	51.16	-9.90	41.26	68.30	-27.04	peak
2	9080.440	50.68	-7.57	43.11	74.00	-30.89	peak
3	11125.200	49.97	-6.29	43.68	74.00	-30.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 200 of 929

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

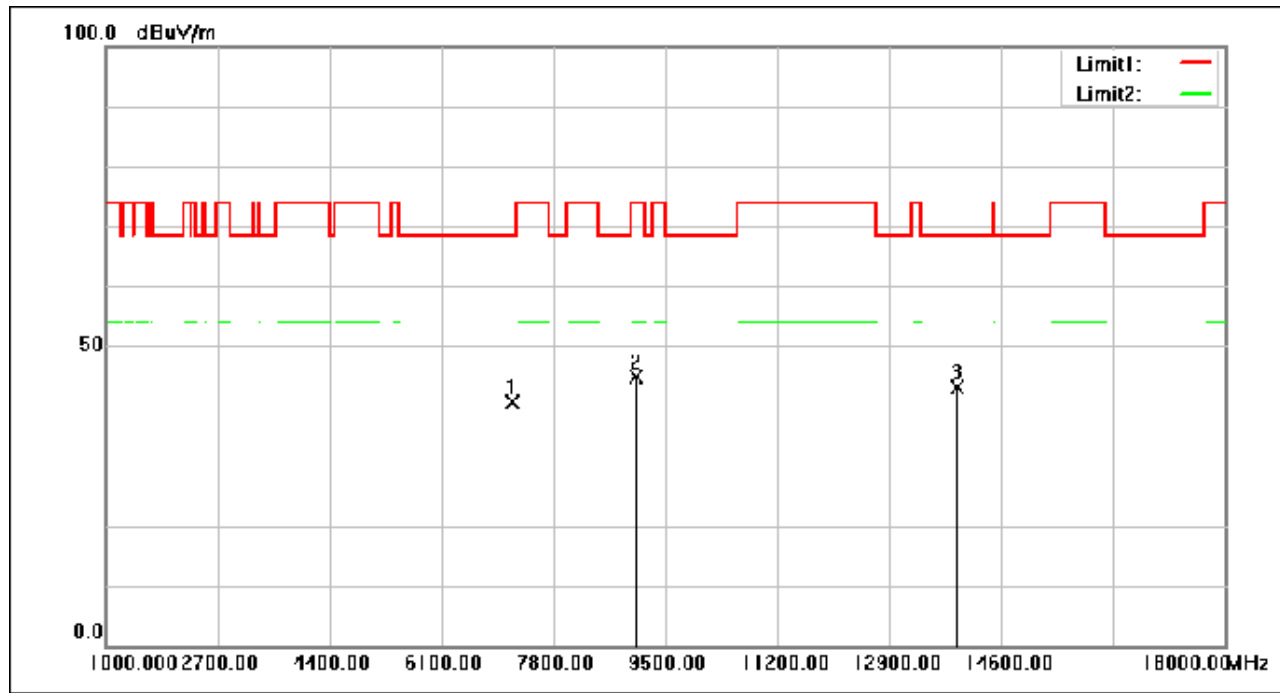

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7171.000	50.48	-9.83	40.65	68.30	-27.65	peak
2	9068.880	52.38	-7.59	44.79	74.00	-29.21	peak
3	13941.760	49.36	-6.26	43.10	68.30	-25.20	peak

Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 201 of 929

PCB Antenna

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

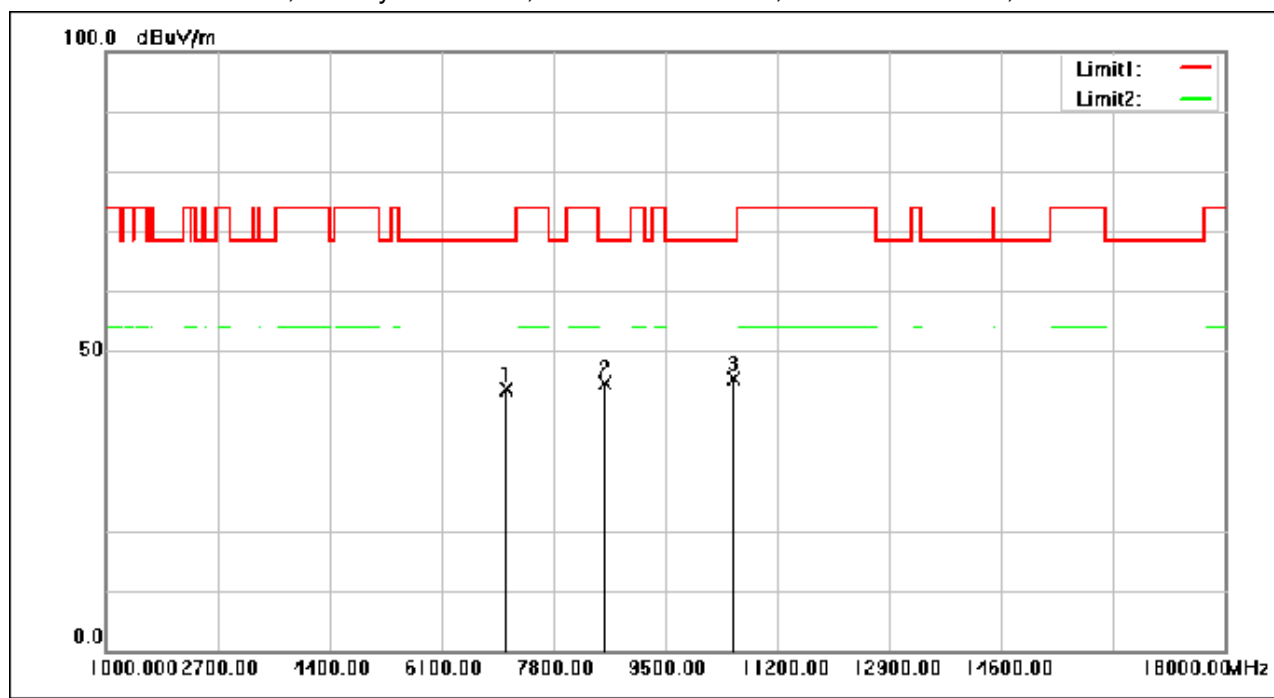

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7091.440	53.62	-9.89	43.73	68.30	-24.57	peak
2	8594.240	53.33	-8.60	44.73	68.30	-23.57	peak
3	10534.960	51.77	-6.38	45.39	68.30	-22.91	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 202 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

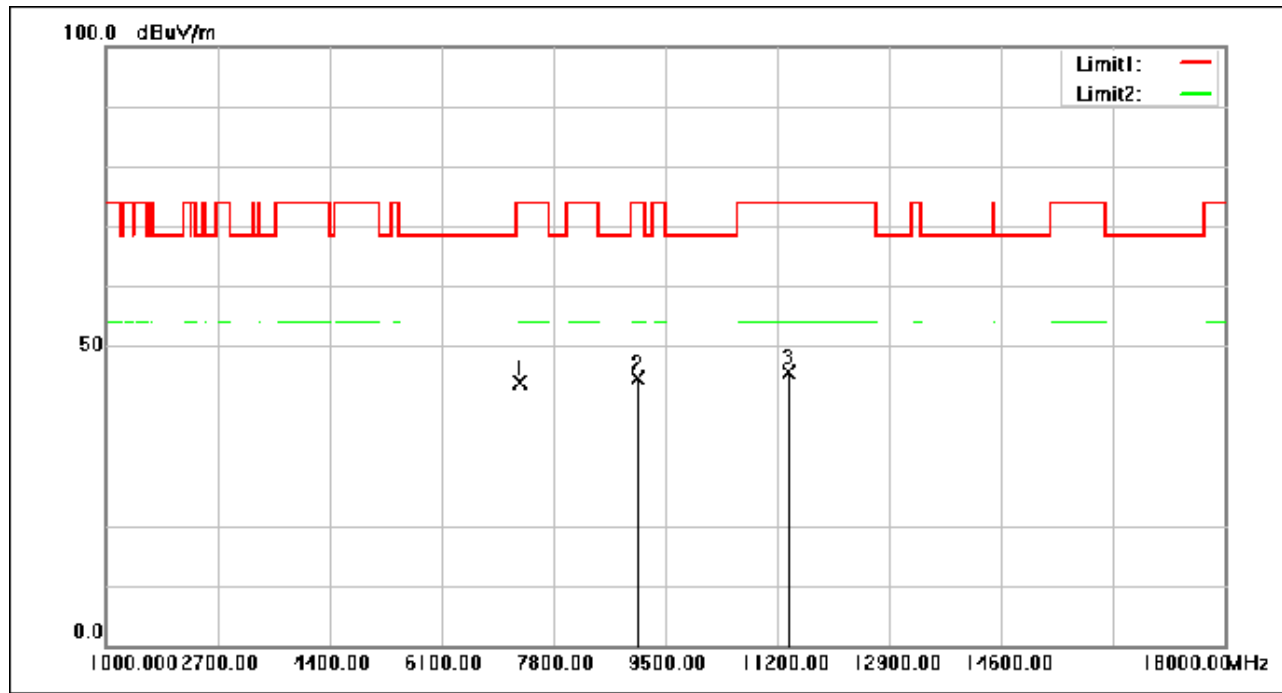

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7302.240	53.48	-9.71	43.77	74.00	-30.23	peak
2	9081.800	52.22	-7.57	44.65	74.00	-29.35	peak
3	11385.640	51.74	-6.13	45.61	74.00	-28.39	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 203 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

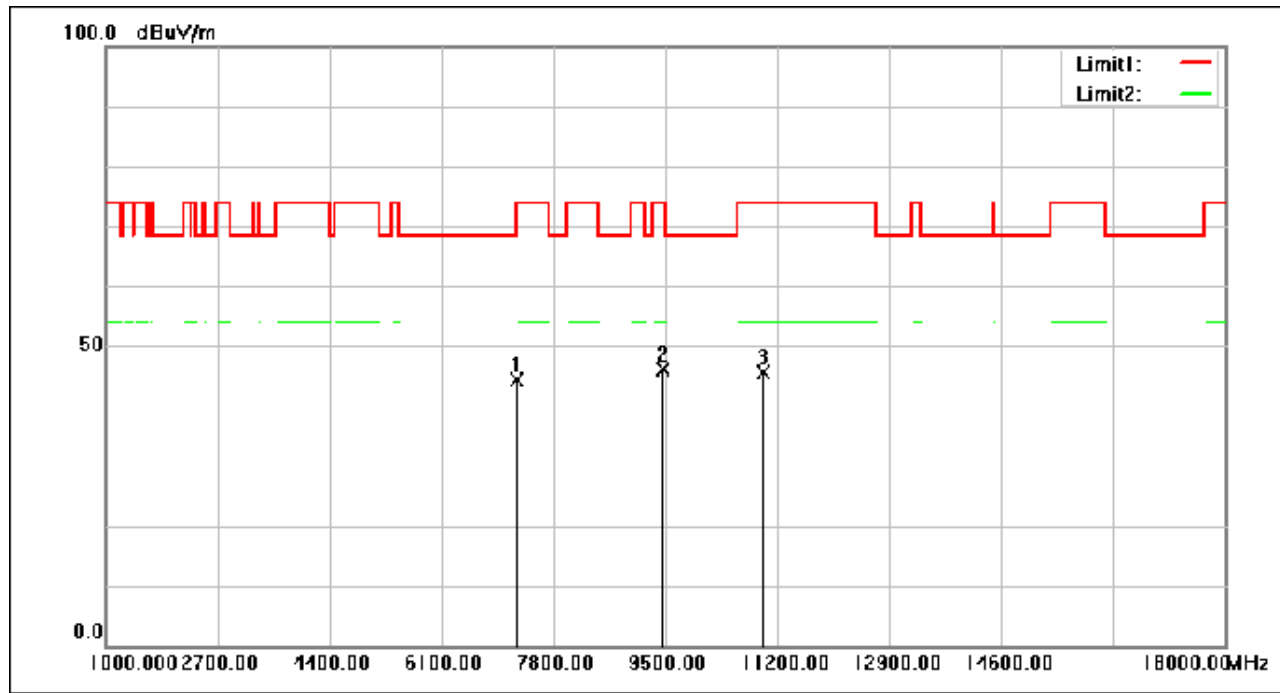

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7245.120	54.11	-9.76	44.35	68.30	-23.95	peak
2	9477.560	53.06	-6.94	46.12	74.00	-27.88	peak
3	10992.600	52.04	-6.36	45.68	74.00	-28.32	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 204 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

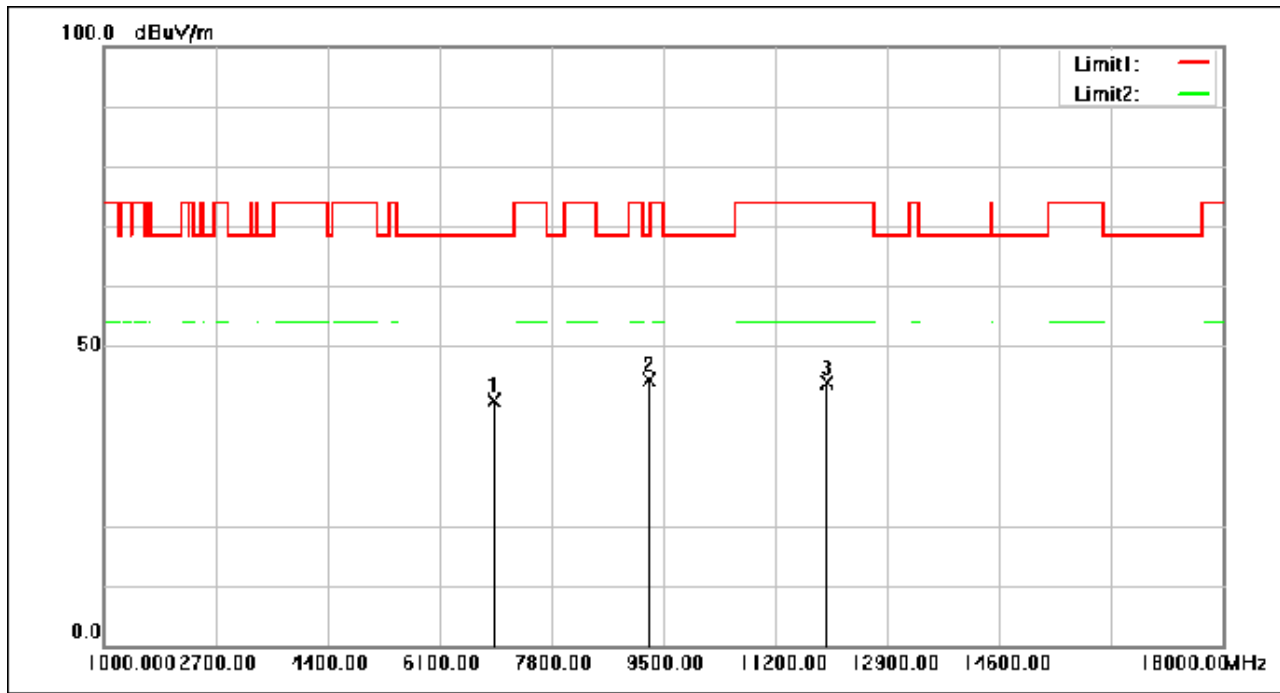

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6941.840	50.81	-10.00	40.81	68.30	-27.49	peak
2	9291.240	51.71	-7.24	44.47	68.30	-23.83	peak
3	11994.920	50.26	-6.39	43.87	74.00	-30.13	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 205 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

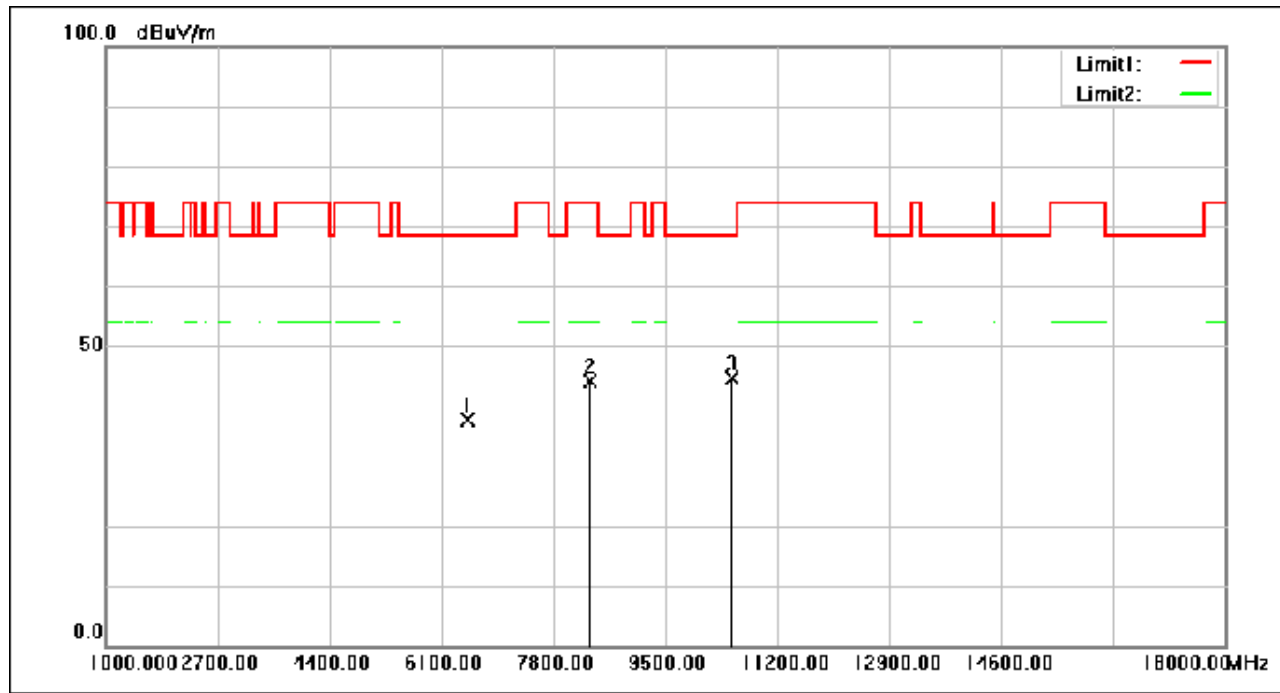

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6505.280	48.58	-11.05	37.53	68.30	-30.77	peak
2	8365.760	53.17	-8.98	44.19	74.00	-29.81	peak
3	10505.720	51.09	-6.39	44.70	68.30	-23.60	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 206 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

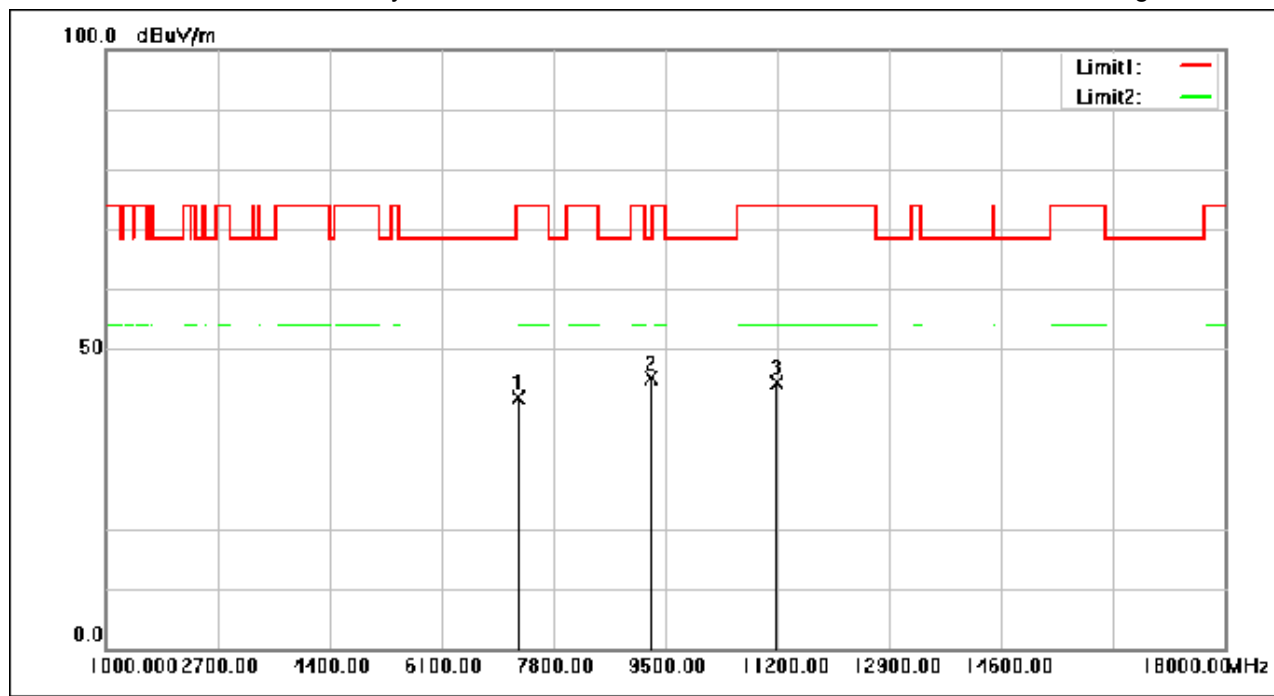

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7288.640	51.57	-9.72	41.85	74.00	-32.15	peak
2	9287.840	52.27	-7.25	45.02	68.30	-23.28	peak
3	11197.280	50.61	-6.24	44.37	74.00	-29.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 207 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

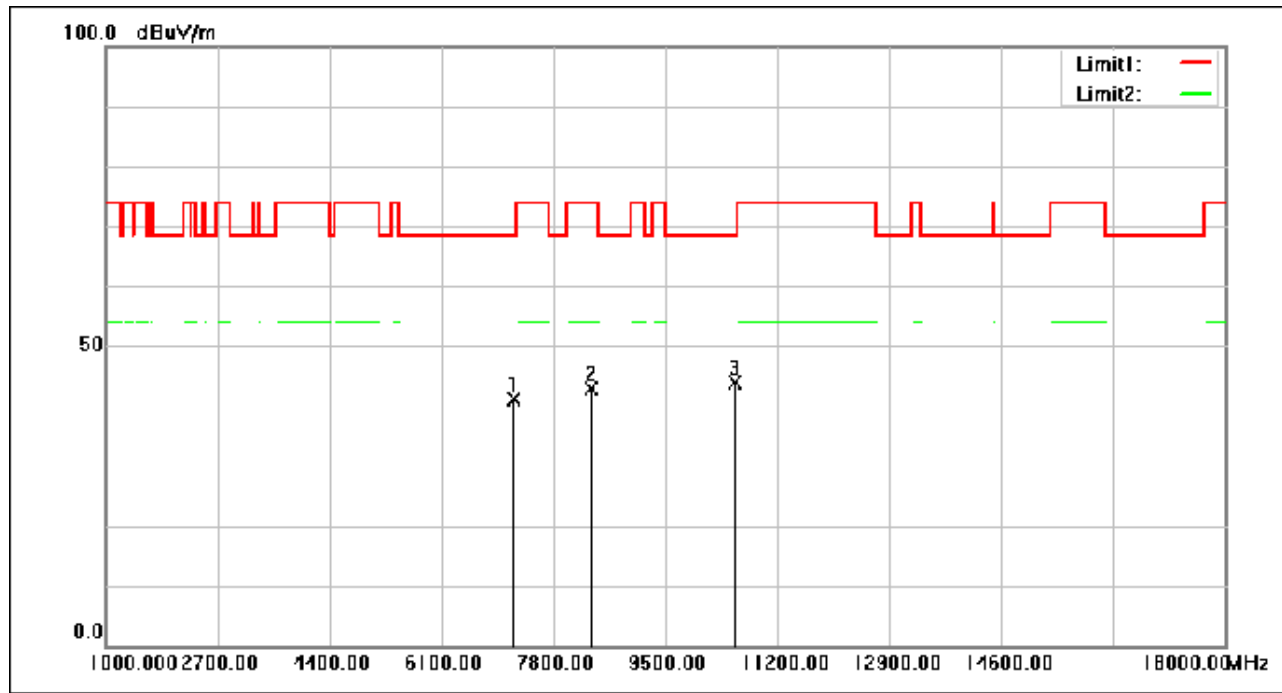

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7209.080	50.85	-9.79	41.06	68.30	-27.24	peak
2	8385.480	51.91	-8.96	42.95	74.00	-31.05	peak
3	10567.600	50.35	-6.39	43.96	68.30	-24.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 208 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

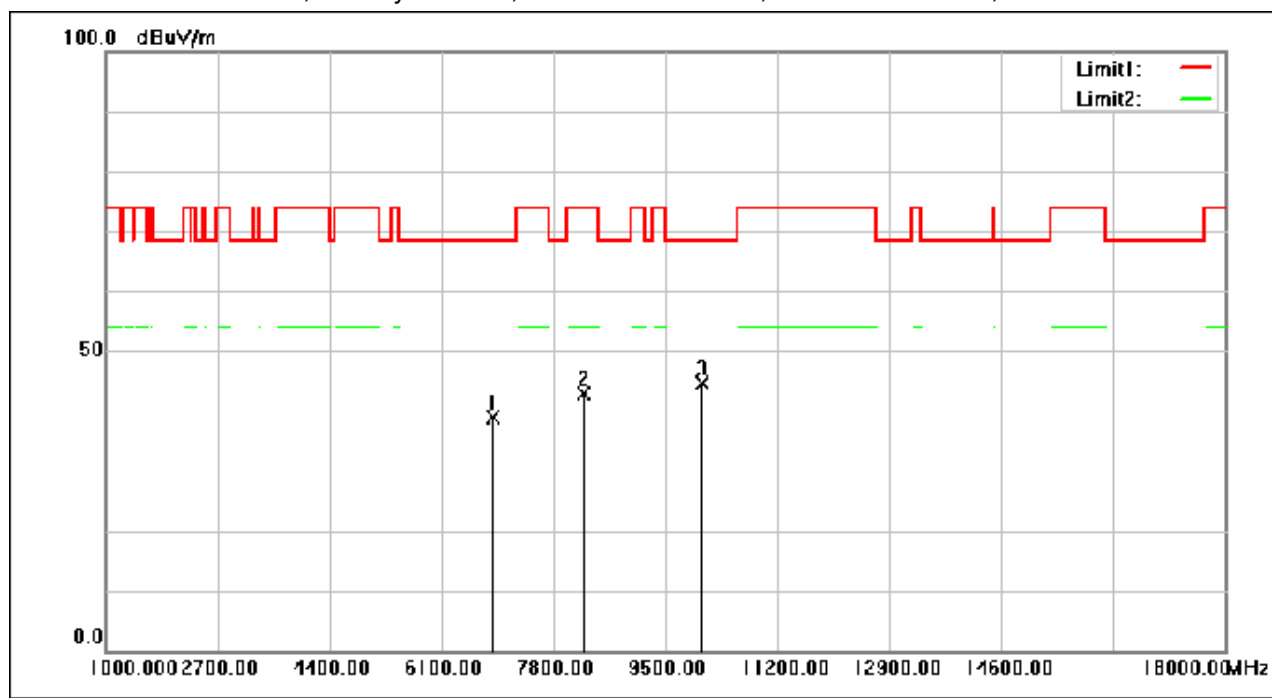

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6887.440	48.83	-10.04	38.79	68.30	-29.51	peak
2	8266.480	51.99	-9.12	42.87	74.00	-31.13	peak
3	10067.120	50.98	-6.34	44.64	68.30	-23.66	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 209 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

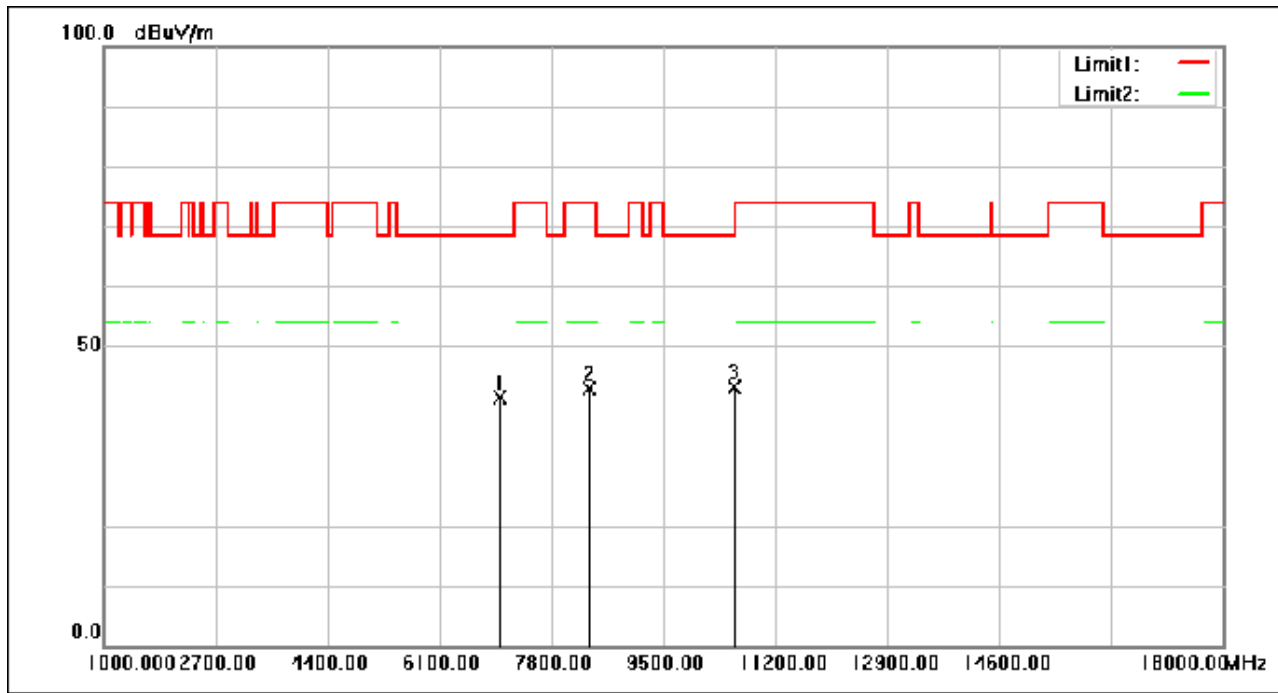

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7022.080	51.33	-9.95	41.38	68.30	-26.92	peak
2	8394.320	51.86	-8.95	42.91	74.00	-31.09	peak
3	10583.240	49.41	-6.38	43.03	68.30	-25.27	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 210 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

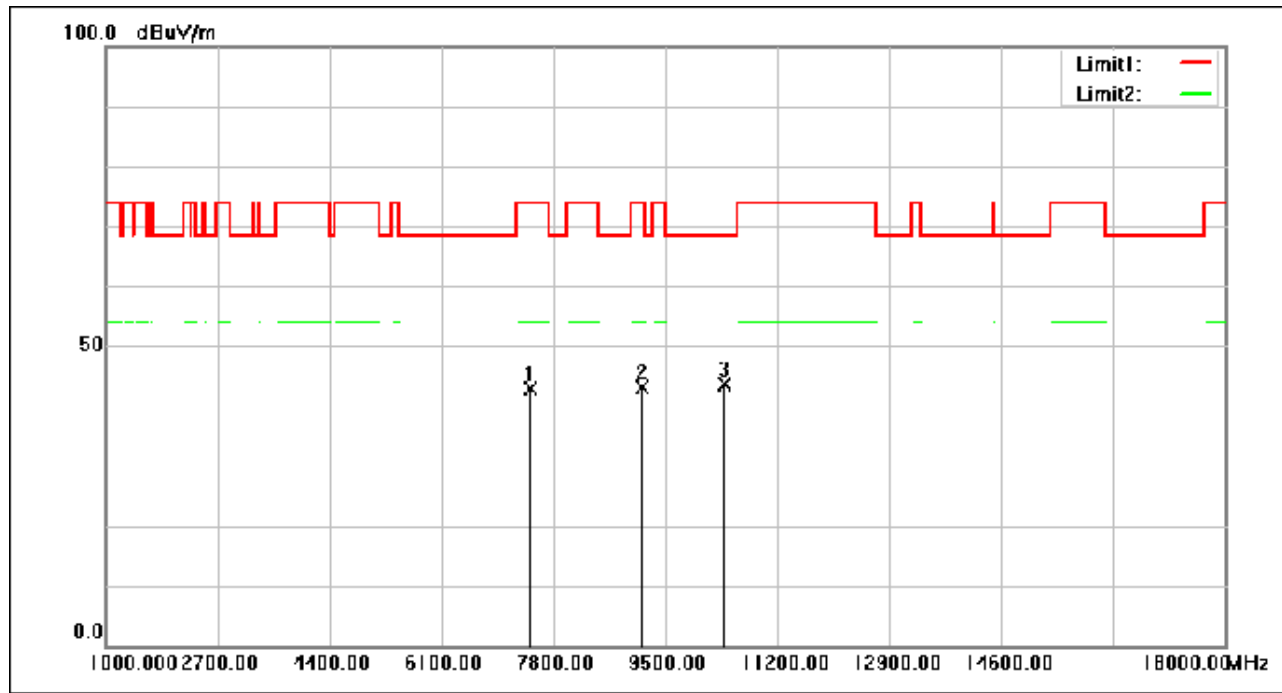

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7456.600	52.31	-9.53	42.78	74.00	-31.22	peak
2	9144.360	50.70	-7.47	43.23	74.00	-30.77	peak
3	10405.760	50.08	-6.38	43.70	68.30	-24.60	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 211 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

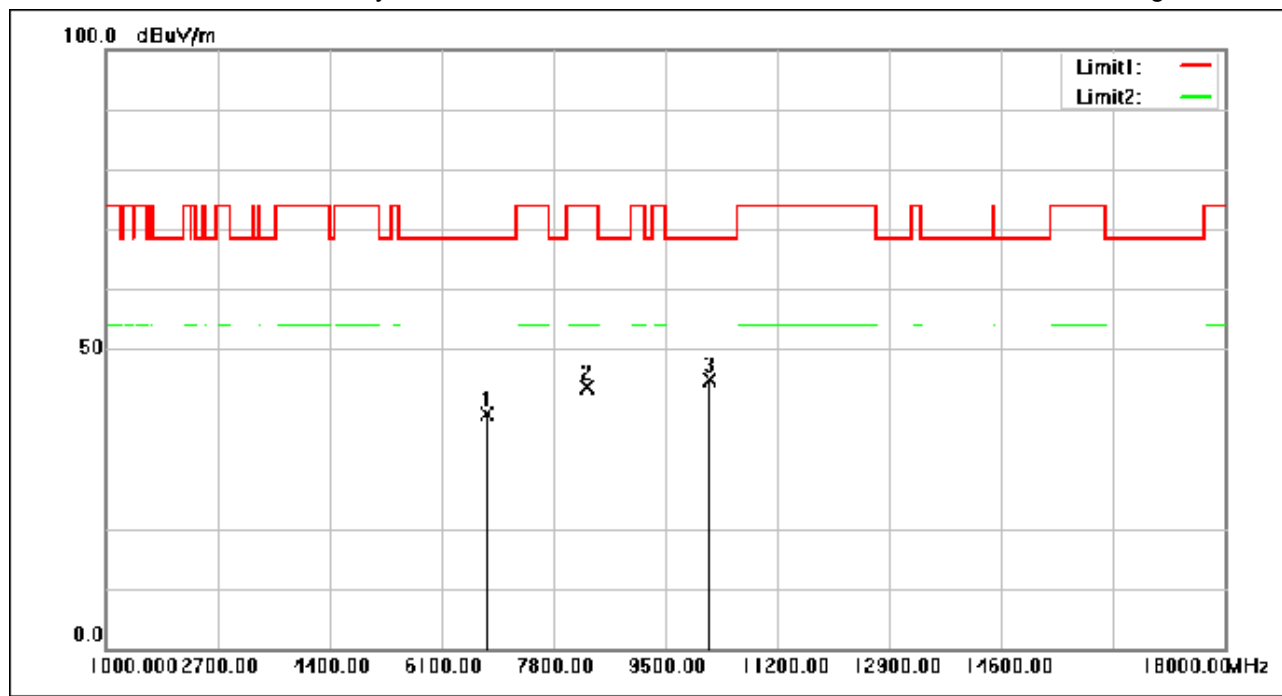

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6799.720	49.12	-10.09	39.03	68.30	-29.27	peak
2	8324.960	52.74	-9.04	43.70	74.00	-30.30	peak
3	10179.320	51.32	-6.35	44.97	68.30	-23.33	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 212 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

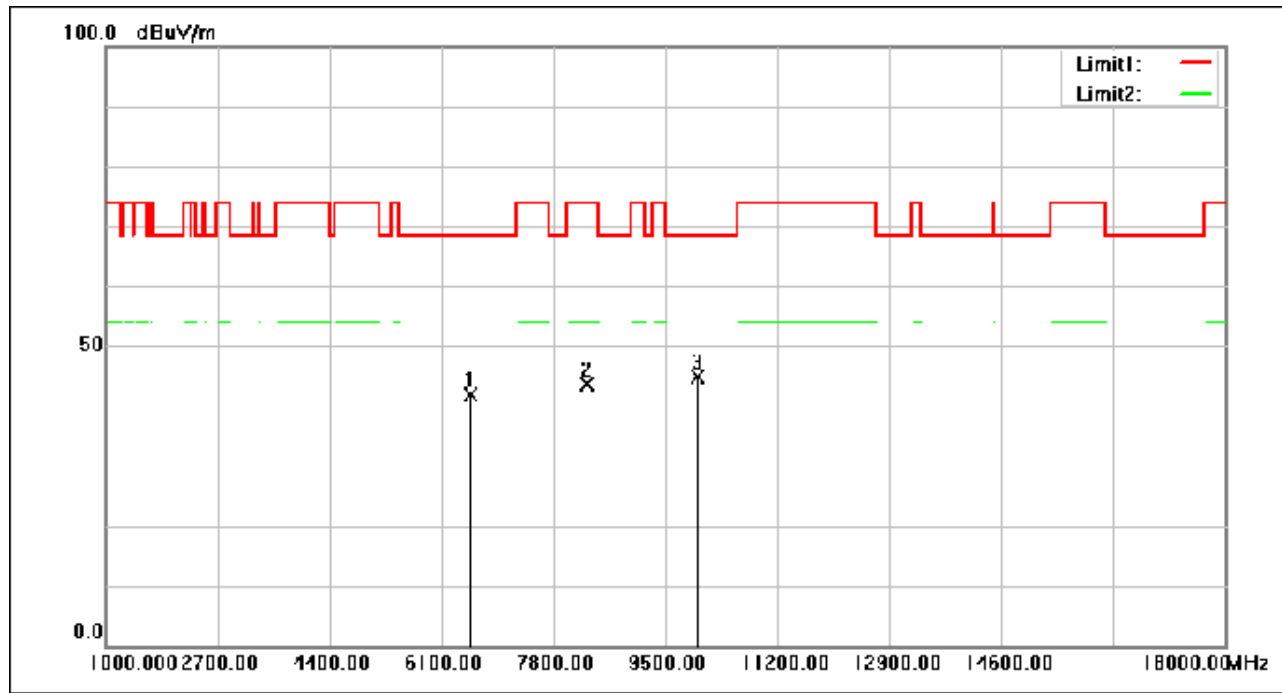

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6550.160	52.66	-10.87	41.79	68.30	-26.51	peak
2	8316.800	52.65	-9.05	43.60	74.00	-30.40	peak
3	10002.520	51.20	-6.33	44.87	68.30	-23.43	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 213 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

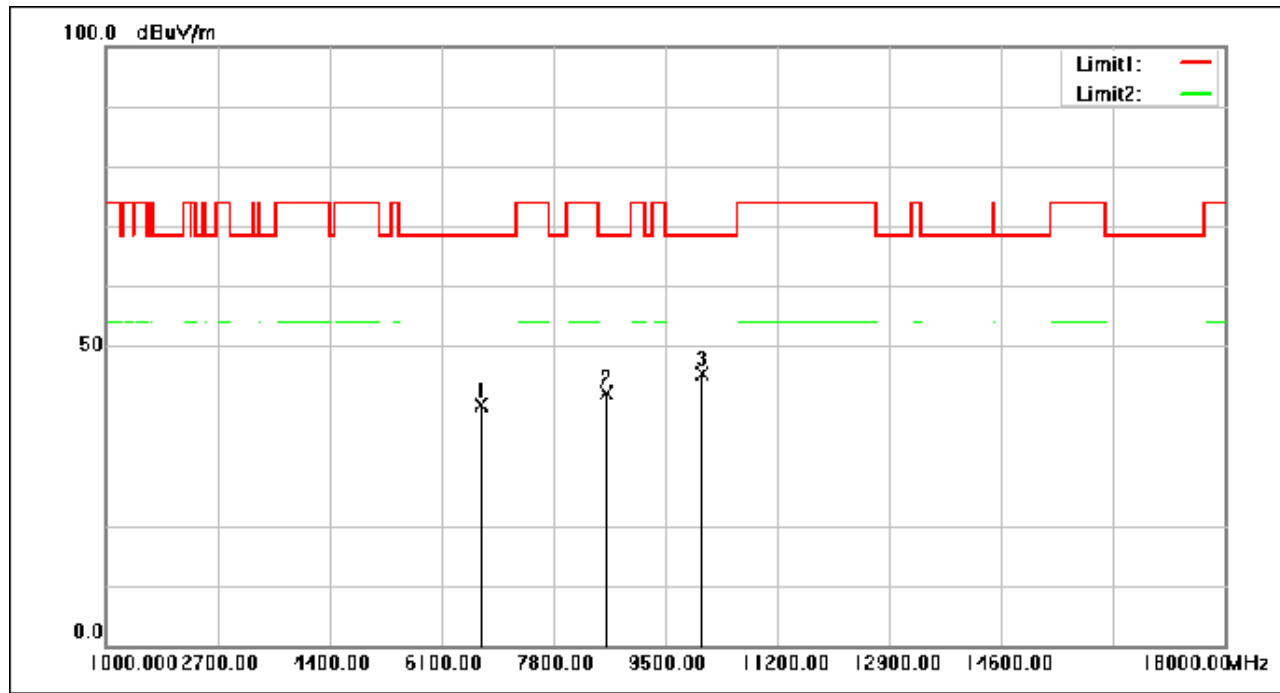

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6710.640	50.26	-10.21	40.05	68.30	-28.25	peak
2	8601.040	50.66	-8.59	42.07	68.30	-26.23	peak
3	10073.240	51.81	-6.34	45.47	68.30	-22.83	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 214 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

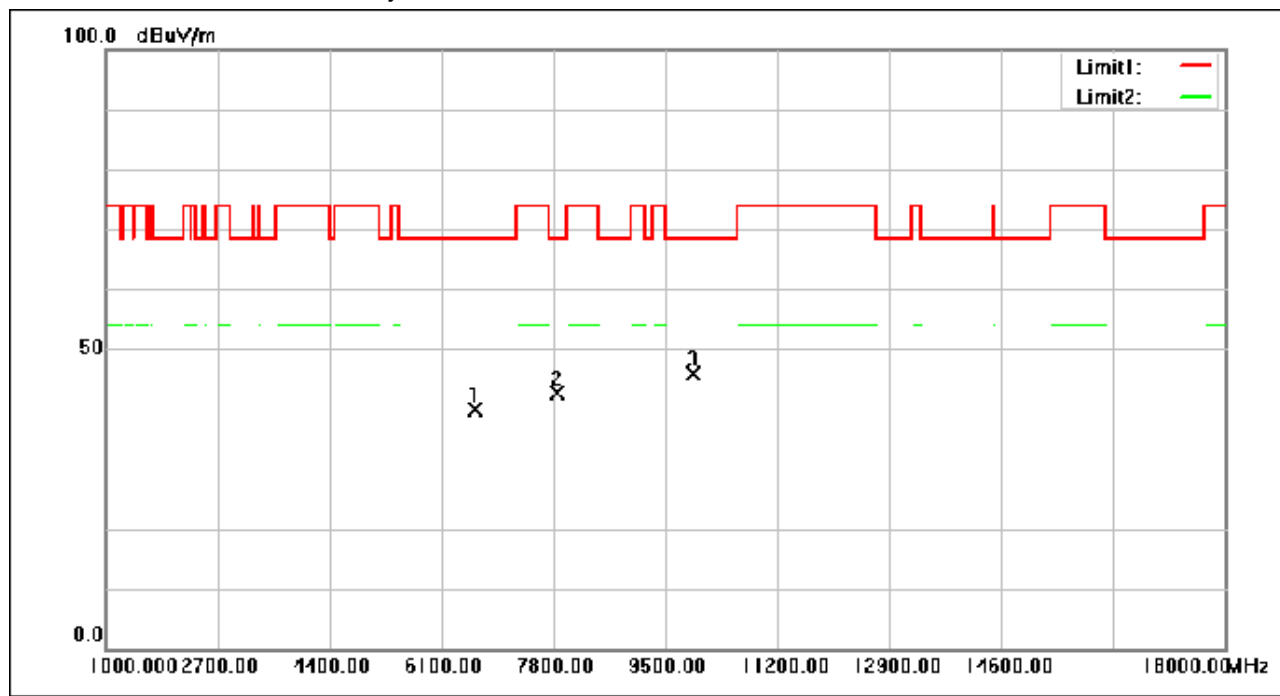

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6619.520	50.51	-10.58	39.93	68.30	-28.37	peak
2	7857.120	52.17	-9.49	42.68	68.30	-25.62	peak
3	9930.440	52.10	-6.31	45.79	68.30	-22.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 215 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

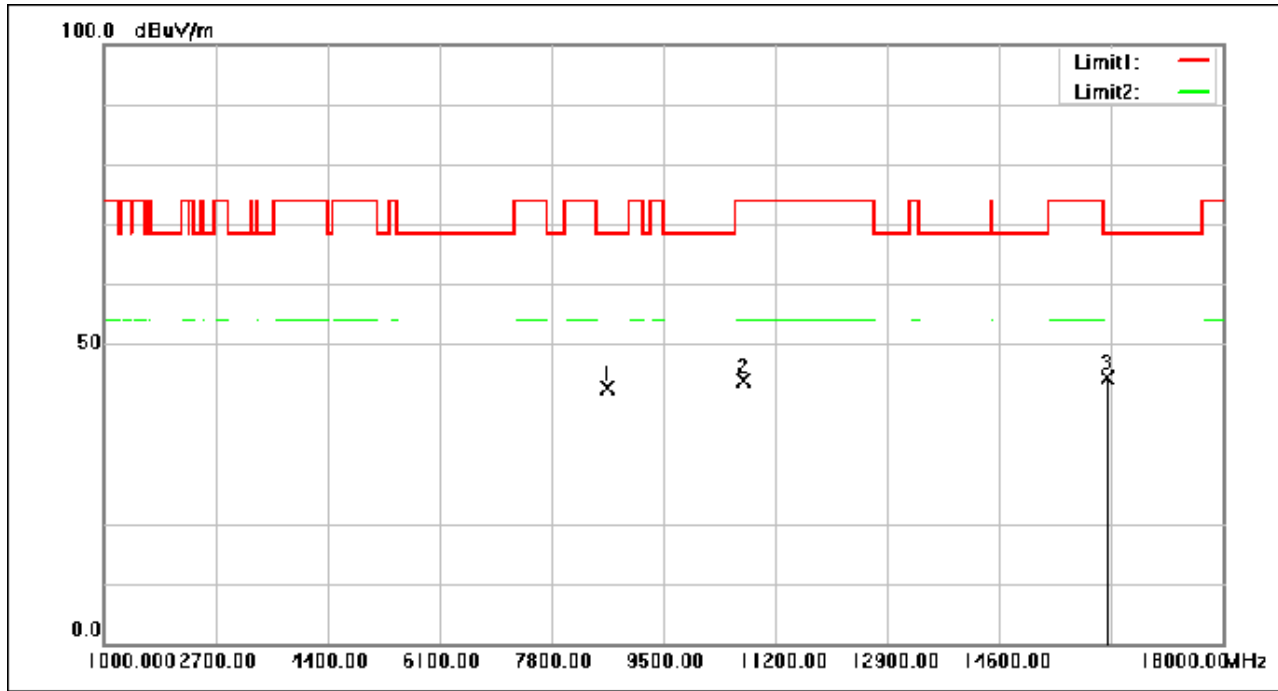

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8659.520	51.04	-8.46	42.58	68.30	-25.72	peak
2	10719.240	50.26	-6.38	43.88	74.00	-30.12	peak
3	16261.240	47.75	-3.45	44.30	68.30	-24.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 216 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

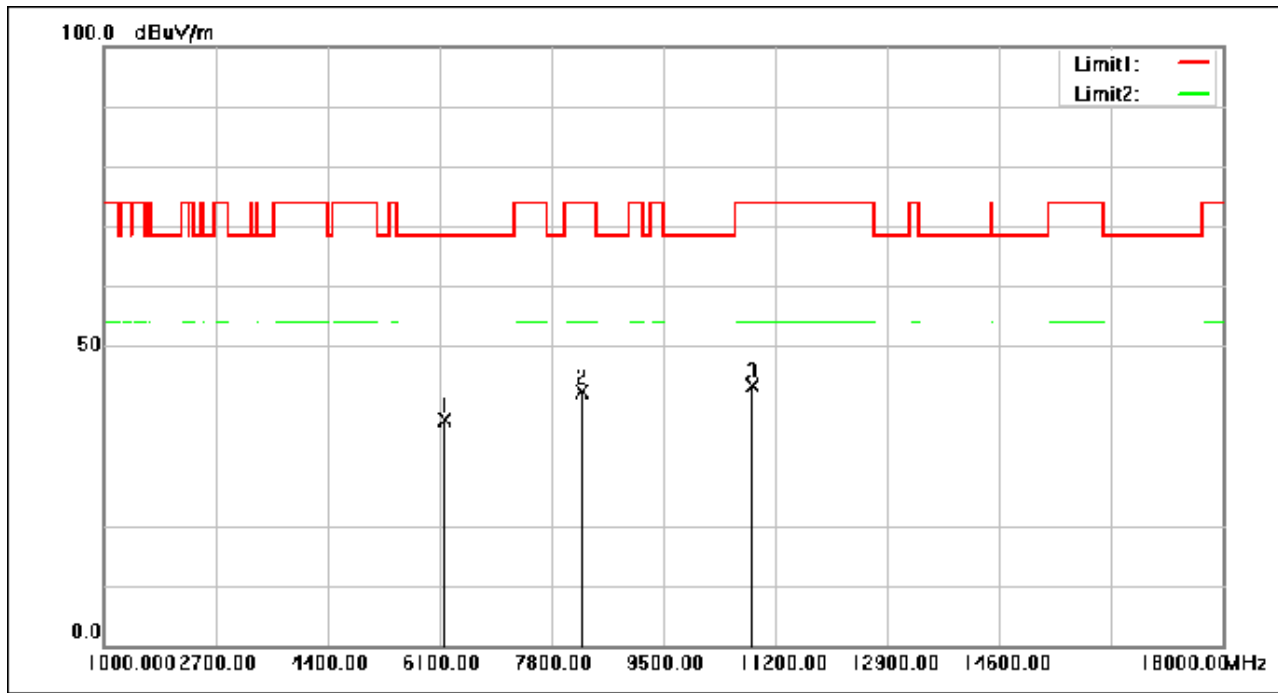

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6185.000	50.00	-12.37	37.63	68.30	-30.67	peak
2	8261.720	51.50	-9.13	42.37	74.00	-31.63	peak
3	10849.800	49.81	-6.36	43.45	74.00	-30.55	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 217 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

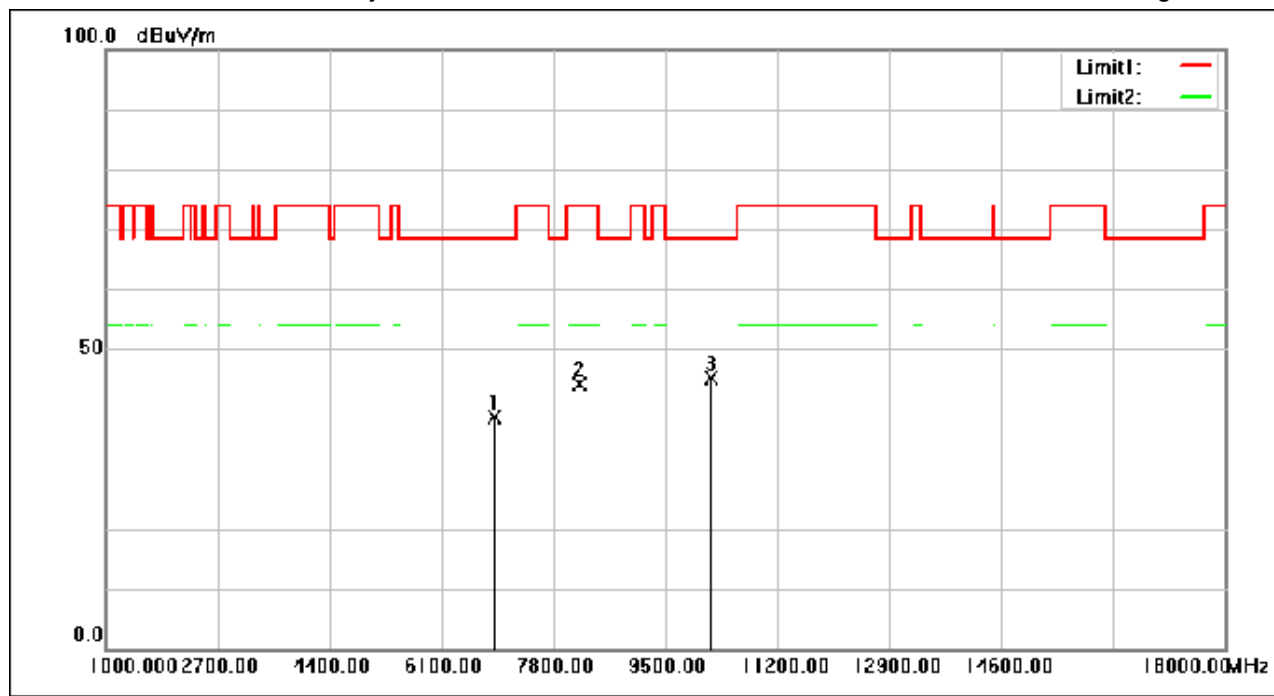

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6910.560	48.57	-10.02	38.55	68.30	-29.75	peak
2	8195.760	53.34	-9.21	44.13	74.00	-29.87	peak
3	10211.280	51.36	-6.35	45.01	68.30	-23.29	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 218 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

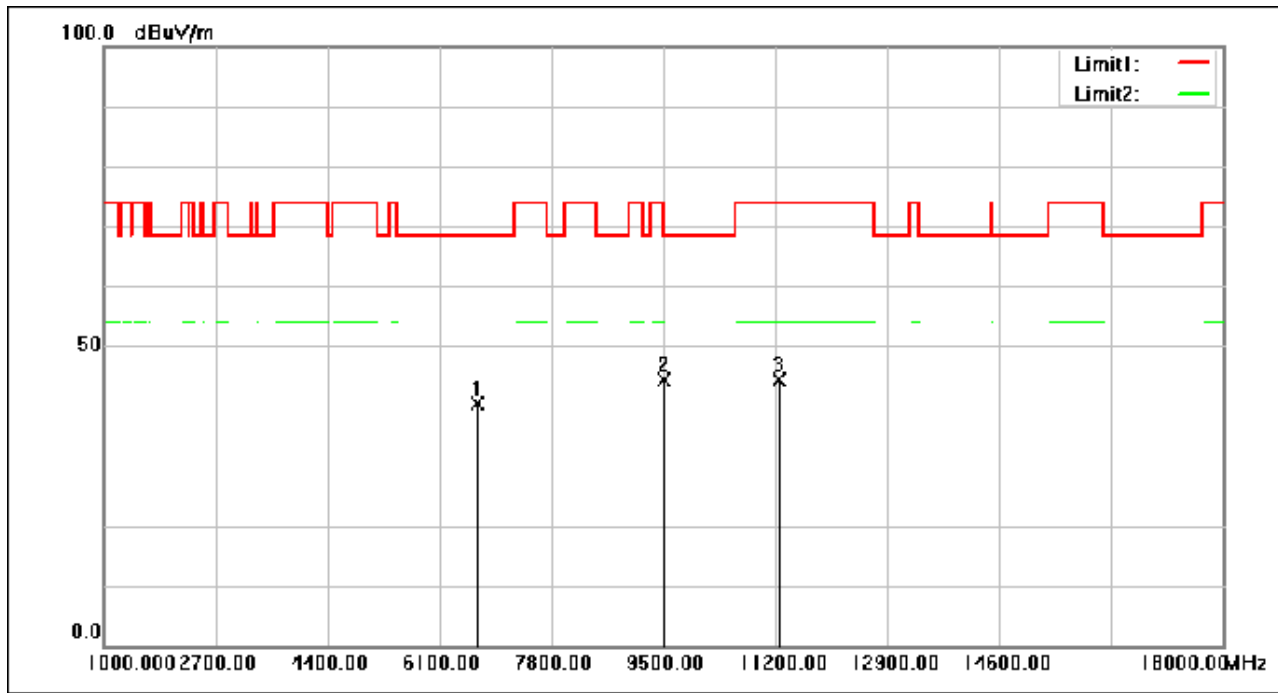

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6693.640	50.58	-10.28	40.30	68.30	-28.00	peak
2	9521.760	51.26	-6.86	44.40	68.30	-23.90	peak
3	11253.040	50.52	-6.21	44.31	74.00	-29.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 219 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

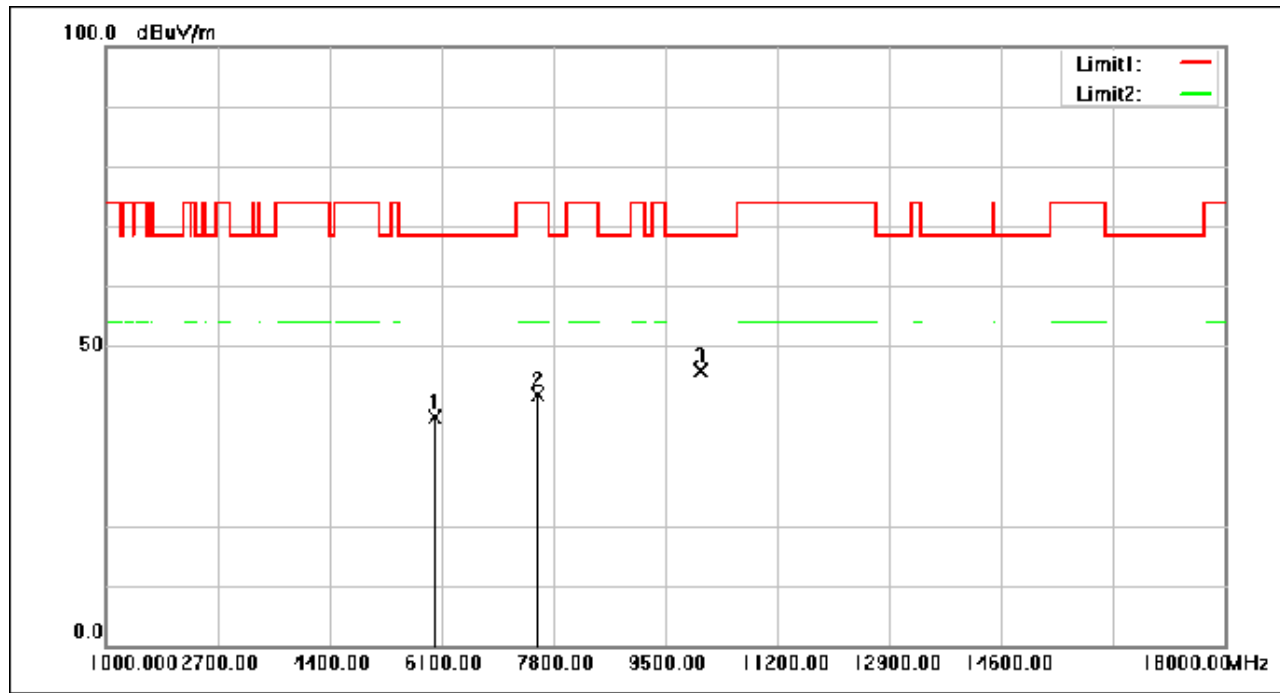

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6010.920	51.06	-13.04	38.02	68.30	-30.28	peak
2	7574.240	51.28	-9.47	41.81	74.00	-32.19	peak
3	10033.800	52.23	-6.33	45.90	68.30	-22.40	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 220 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

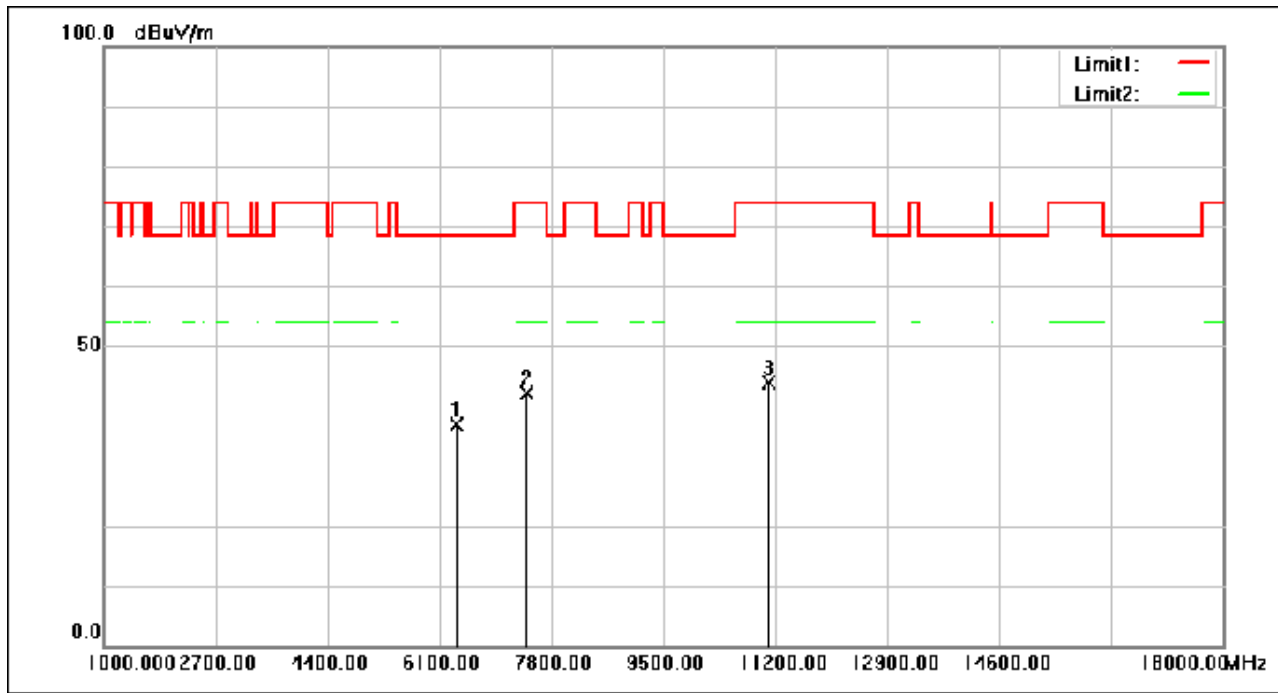

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6367.240	48.49	-11.62	36.87	68.30	-31.43	peak
2	7427.360	51.70	-9.58	42.12	74.00	-31.88	peak
3	11098.680	50.28	-6.30	43.98	74.00	-30.02	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 221 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

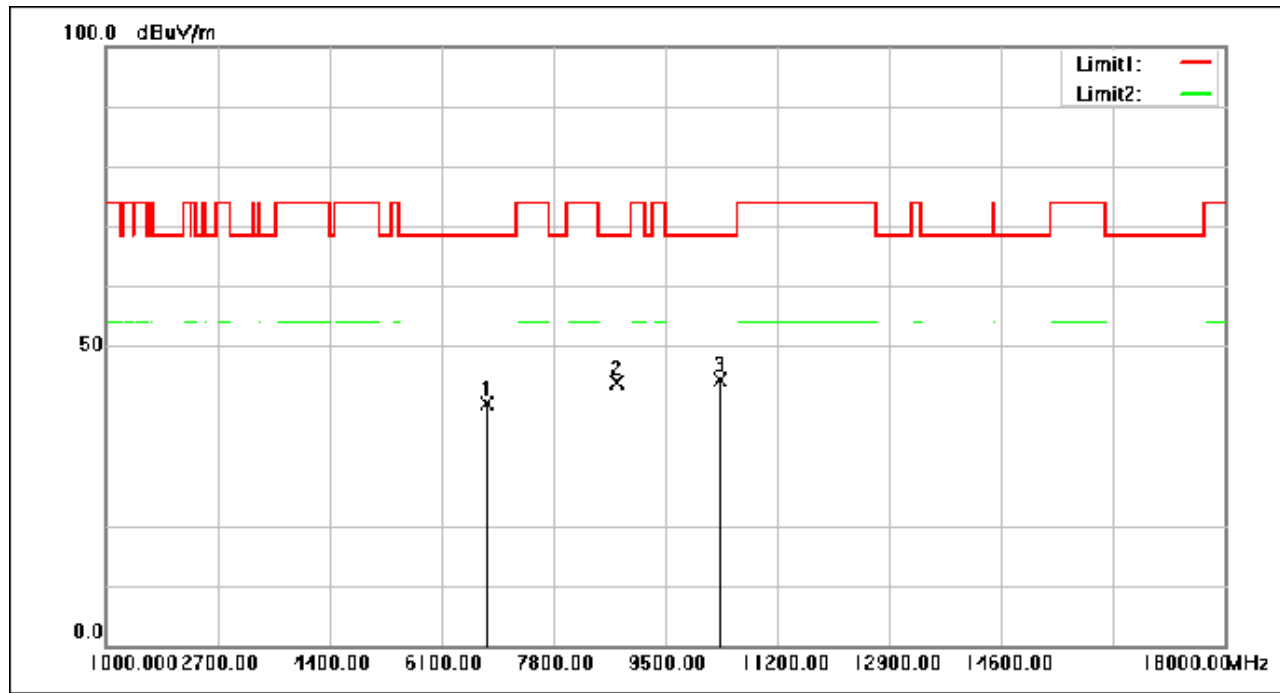

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6811.960	50.41	-10.09	40.32	68.30	-27.98	peak
2	8773.080	52.18	-8.21	43.97	68.30	-24.33	peak
3	10333.680	50.67	-6.37	44.30	68.30	-24.00	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 222 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

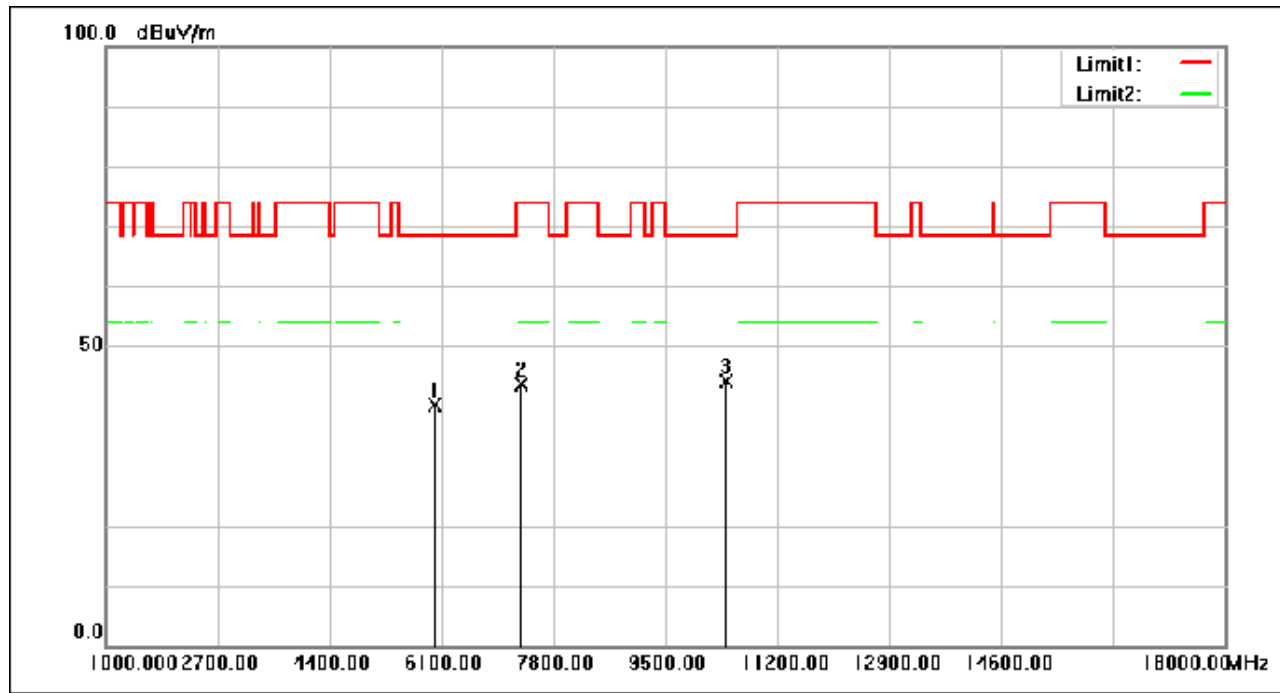

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6006.840	53.21	-13.05	40.16	68.30	-28.14	peak
2	7317.200	53.41	-9.70	43.71	74.00	-30.29	peak
3	10426.840	50.46	-6.38	44.08	68.30	-24.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 223 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

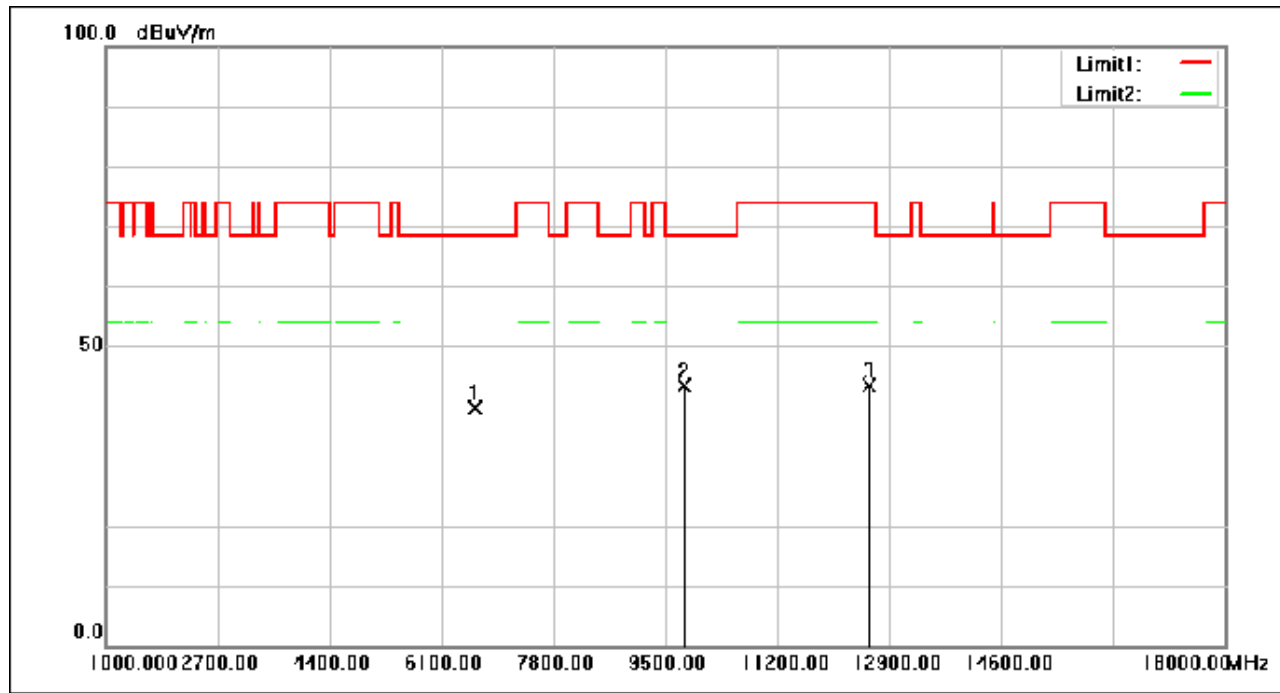

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6614.760	50.31	-10.60	39.71	68.30	-28.59	peak
2	9801.240	49.80	-6.36	43.44	68.30	-24.86	peak
3	12596.720	49.32	-5.88	43.44	74.00	-30.56	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 224 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

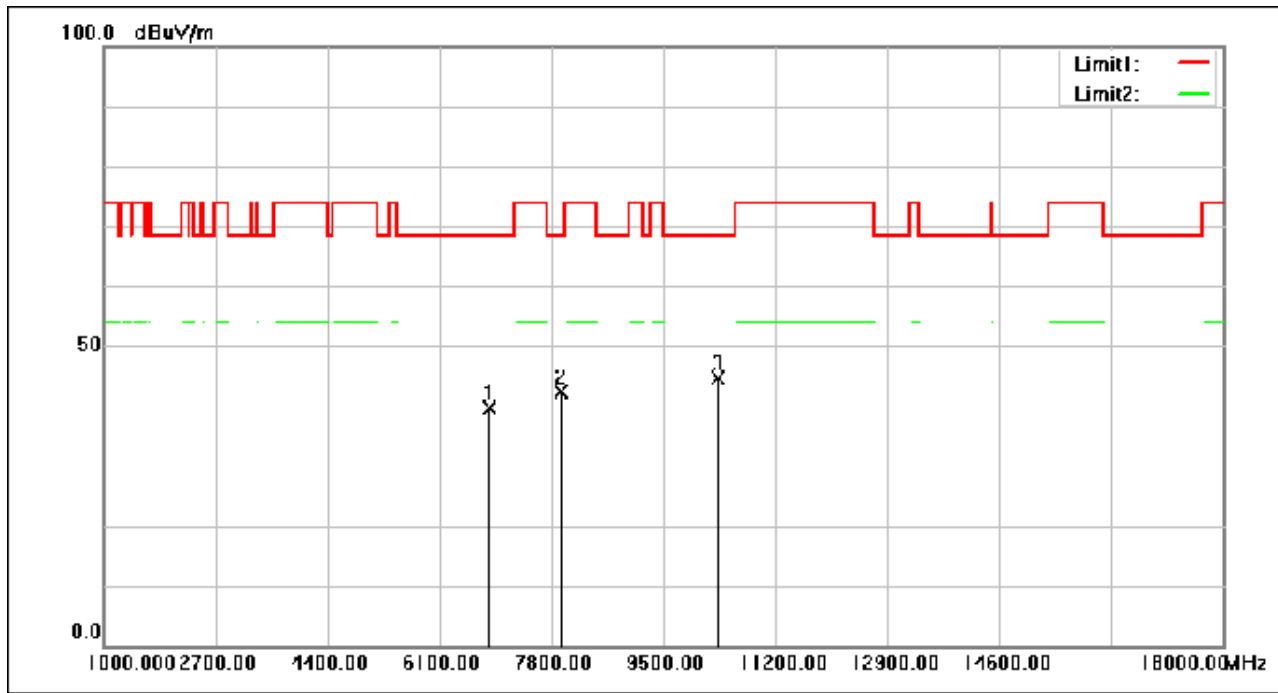

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6867.040	49.57	-10.05	39.52	68.30	-28.78	peak
2	7953.680	51.91	-9.50	42.41	68.30	-25.89	peak
3	10343.880	50.94	-6.37	44.57	68.30	-23.73	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 225 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

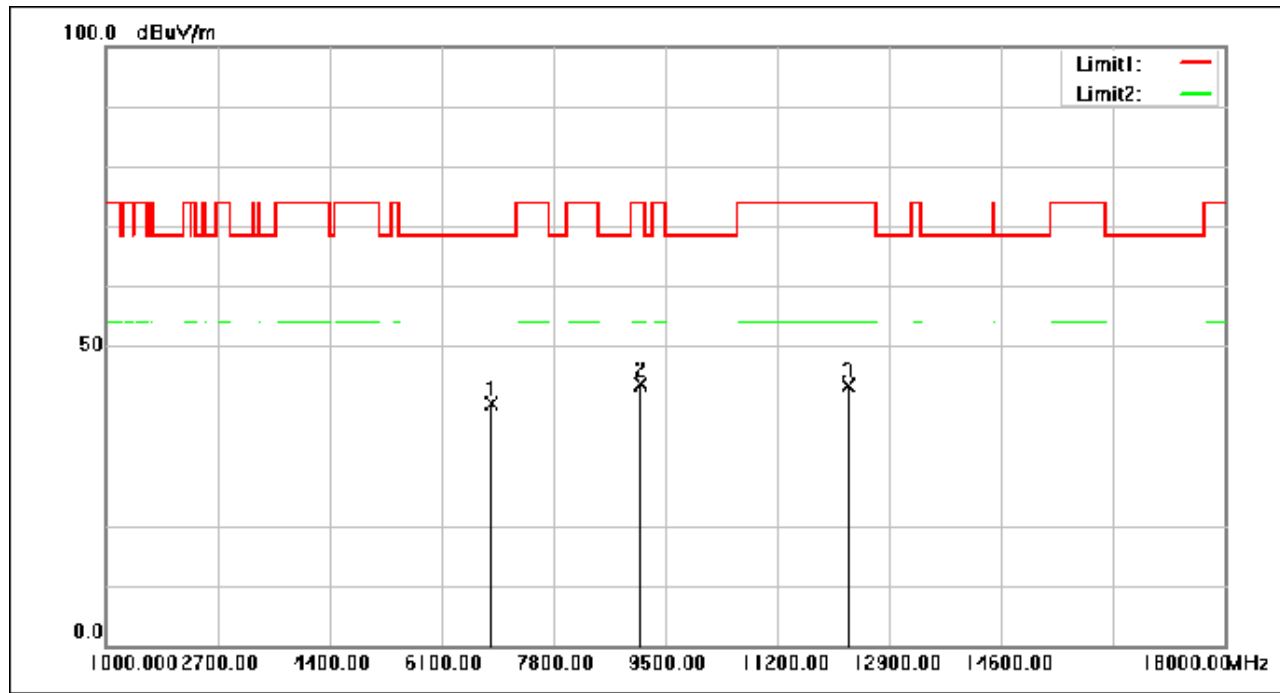

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6867.040	50.43	-10.05	40.38	68.30	-27.92	peak
2	9139.600	51.09	-7.48	43.61	74.00	-30.39	peak
3	12273.720	49.46	-6.16	43.30	74.00	-30.70	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 226 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

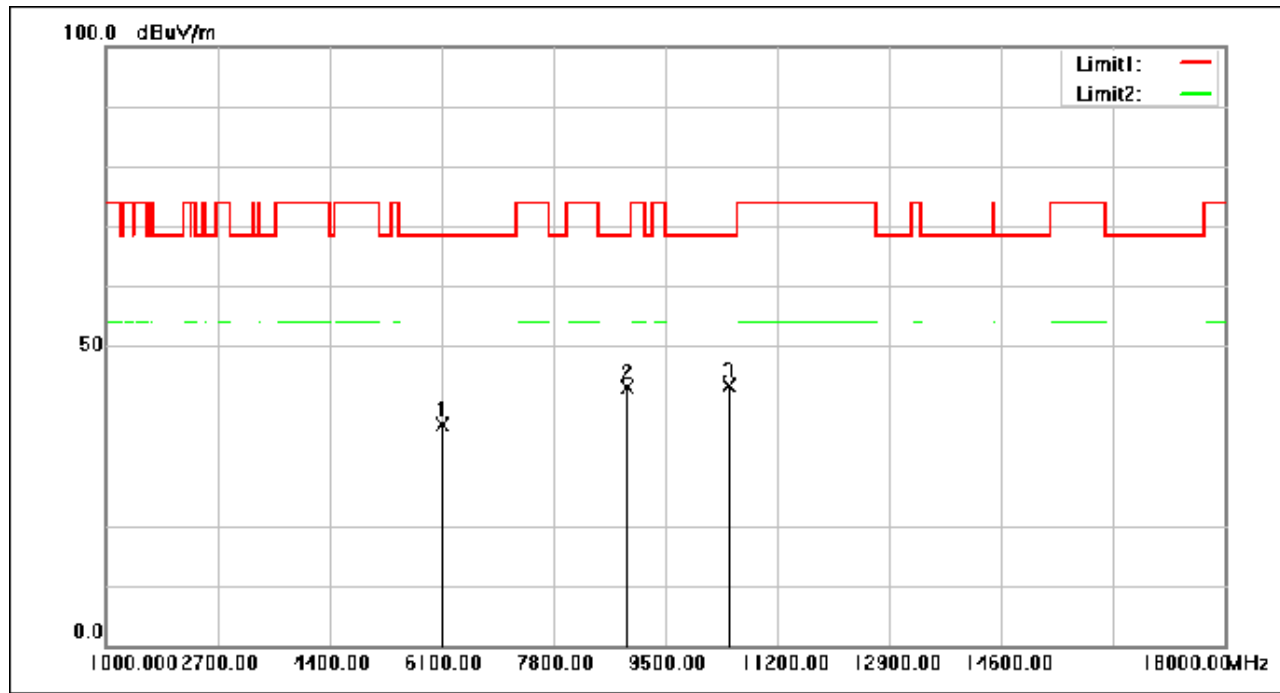

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6128.560	49.59	-12.60	36.99	68.30	-31.31	peak
2	8925.400	50.94	-7.89	43.05	68.30	-25.25	peak
3	10485.320	49.89	-6.39	43.50	68.30	-24.80	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 227 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

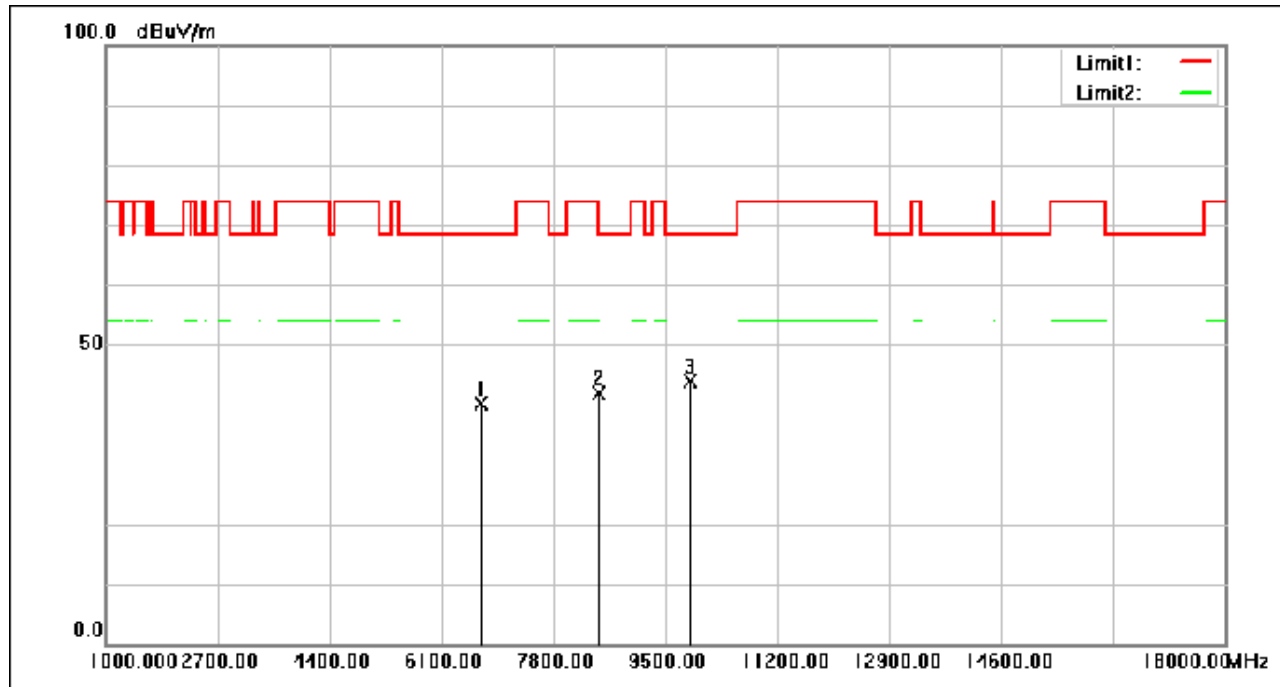

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6697.720	50.49	-10.26	40.23	68.30	-28.07	peak
2	8501.760	50.74	-8.80	41.94	68.30	-26.36	peak
3	9882.840	50.10	-6.29	43.81	68.30	-24.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 228 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

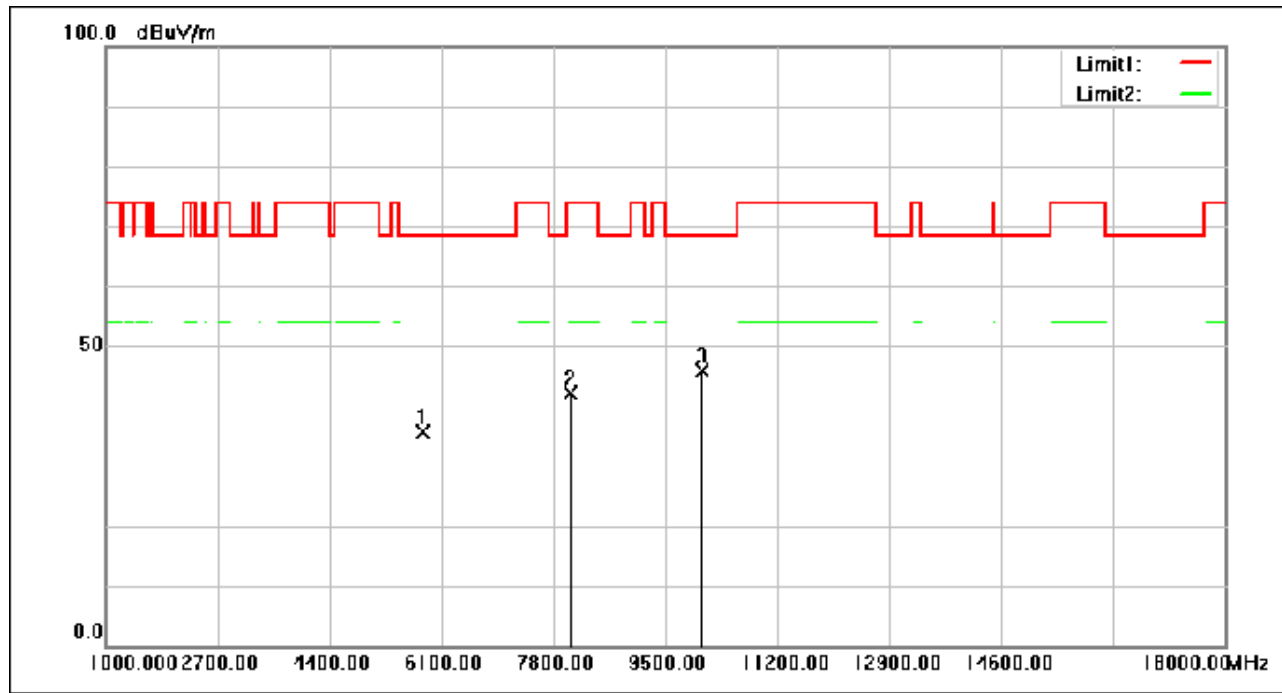

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5811.680	49.81	-14.20	35.61	68.30	-32.69	peak
2	8065.880	51.48	-9.40	42.08	74.00	-31.92	peak
3	10076.640	52.22	-6.34	45.88	68.30	-22.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 229 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

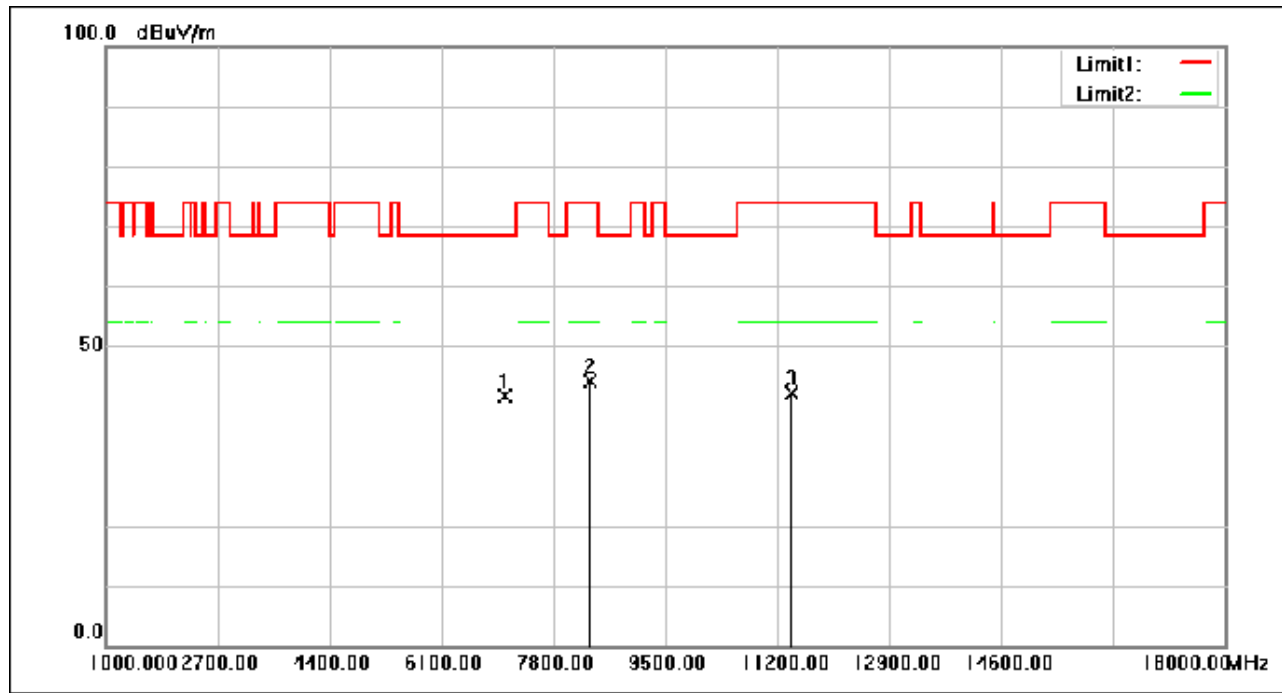

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7082.600	51.50	-9.89	41.61	68.30	-26.69	peak
2	8367.800	53.00	-8.98	44.02	74.00	-29.98	peak
3	11423.040	48.11	-6.10	42.01	74.00	-31.99	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 230 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

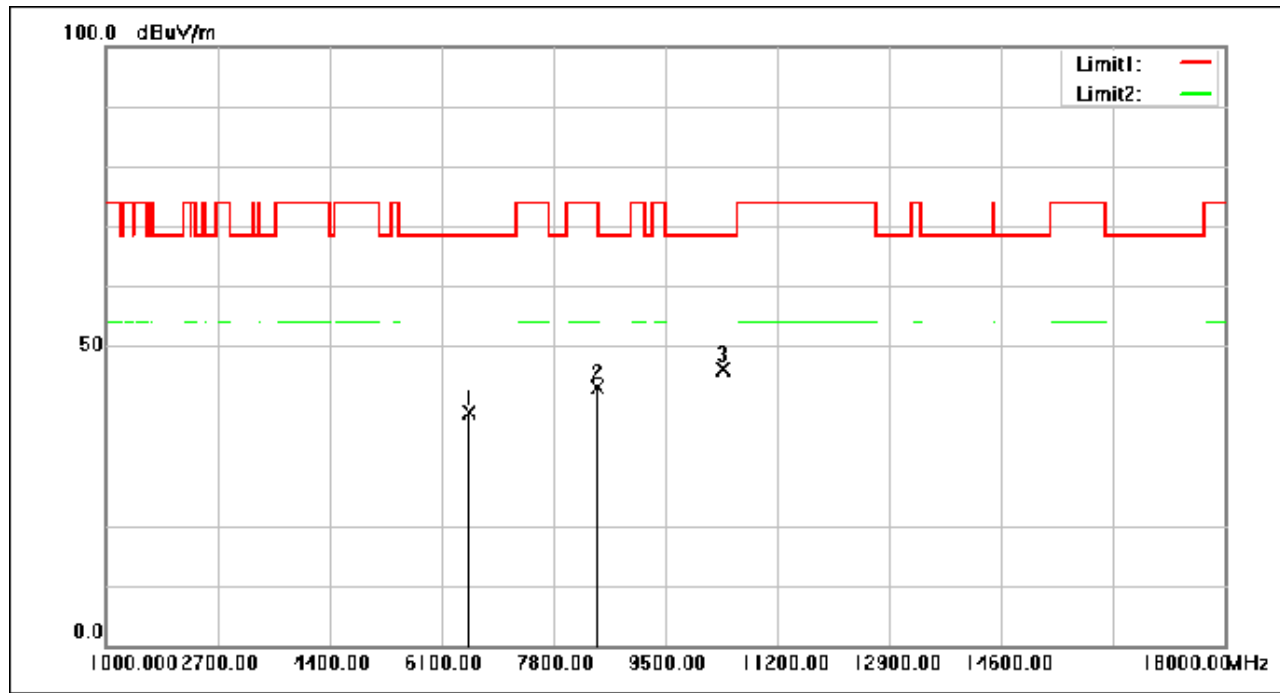

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6538.600	49.82	-10.92	38.90	68.30	-29.40	peak
2	8475.240	51.99	-8.84	43.15	74.00	-30.85	peak
3	10373.800	52.54	-6.37	46.17	68.30	-22.13	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 231 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

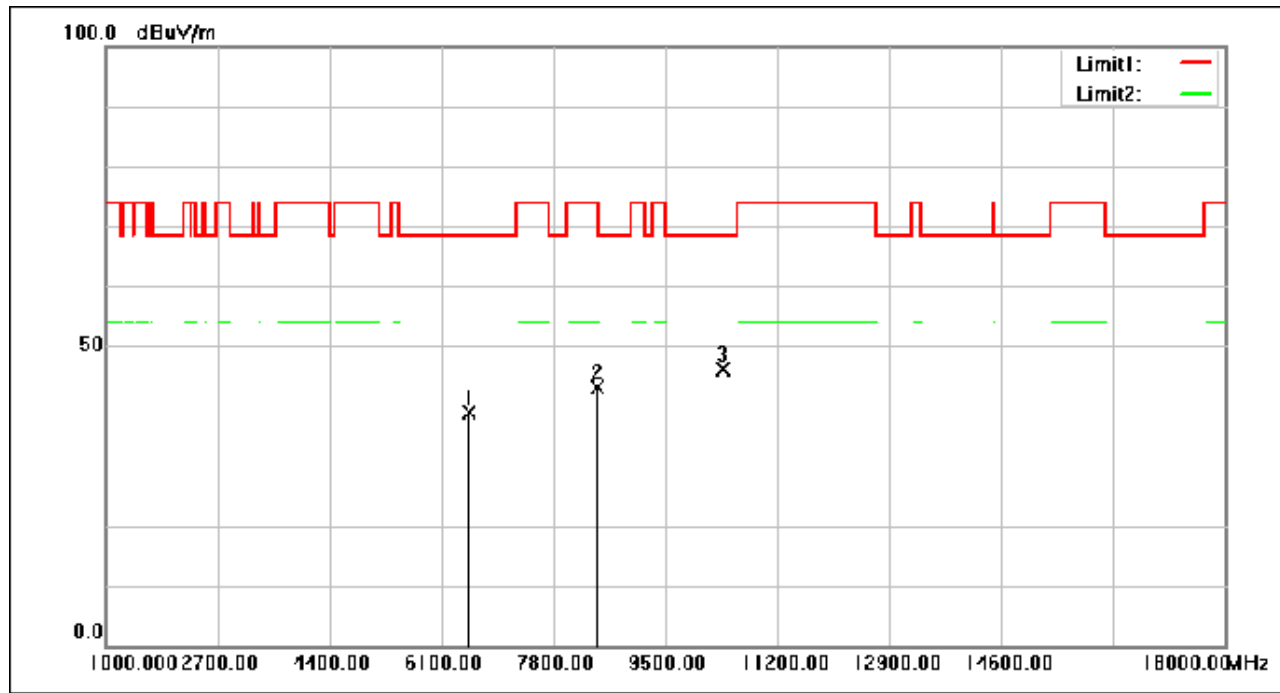

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6538.600	49.82	-10.92	38.90	68.30	-29.40	peak
2	8475.240	51.99	-8.84	43.15	74.00	-30.85	peak
3	10373.800	52.54	-6.37	46.17	68.30	-22.13	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 232 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

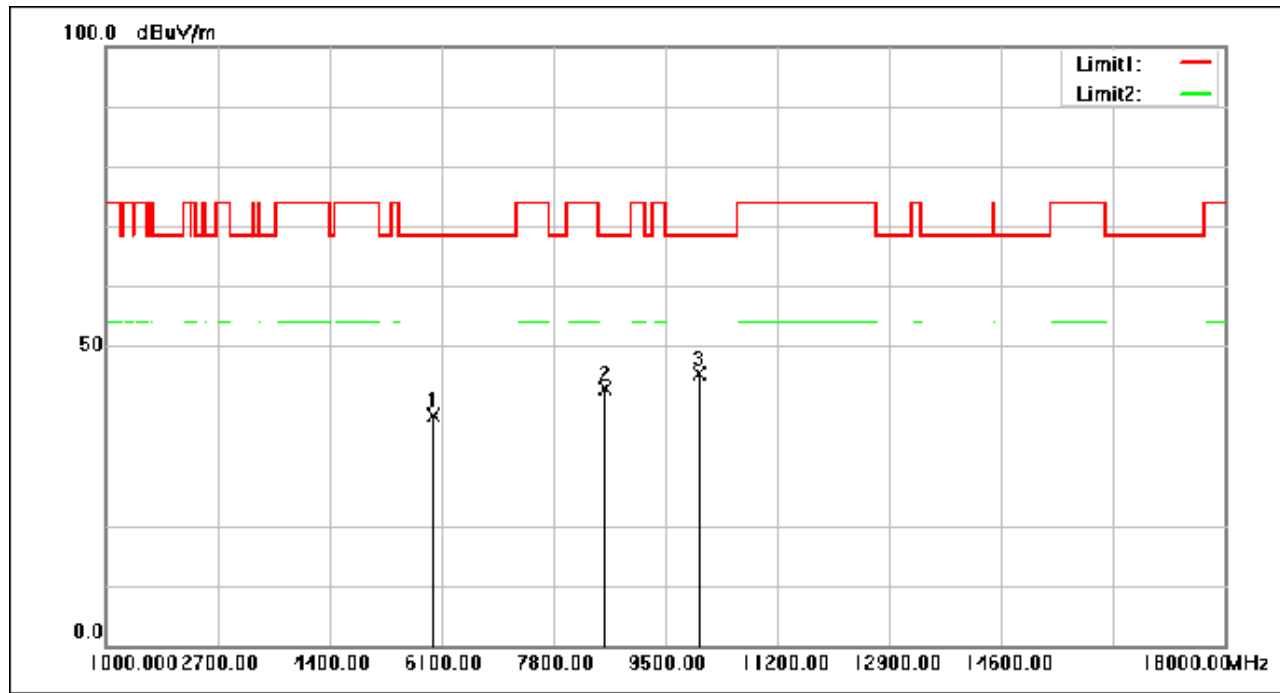

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5992.560	51.50	-13.13	38.37	68.30	-29.93	peak
2	8590.840	51.40	-8.61	42.79	68.30	-25.51	peak
3	10020.200	51.71	-6.33	45.38	68.30	-22.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 233 of 929

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

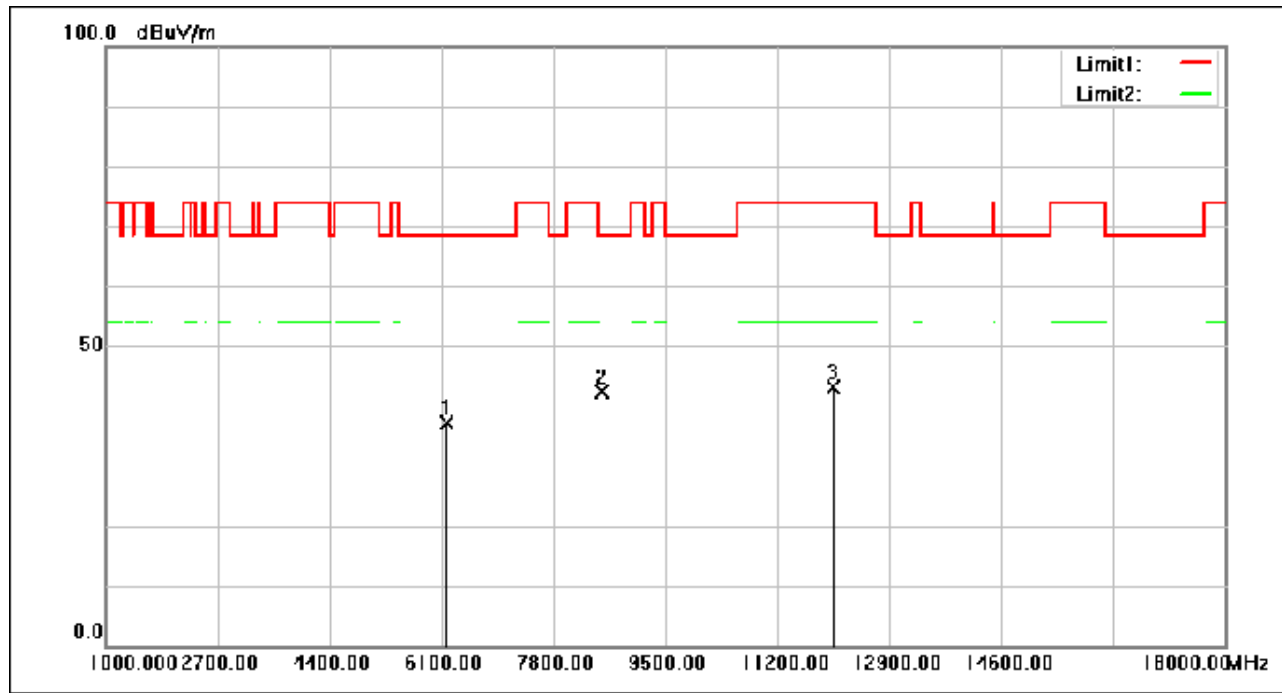

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6188.400	49.51	-12.36	37.15	68.30	-31.15	peak
2	8543.240	51.12	-8.72	42.40	68.30	-25.90	peak
3	12051.360	49.41	-6.34	43.07	74.00	-30.93	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 234 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

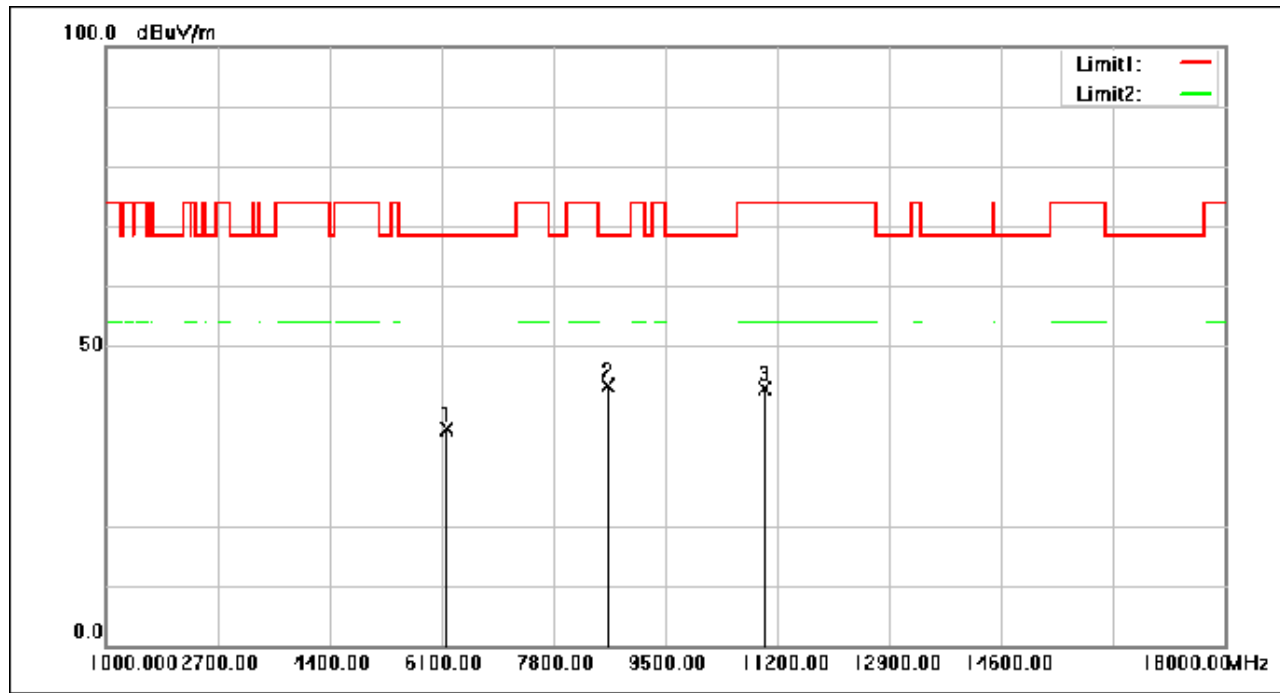

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6185.000	48.59	-12.37	36.22	68.30	-32.08	peak
2	8643.880	51.94	-8.49	43.45	68.30	-24.85	peak
3	11019.120	49.18	-6.35	42.83	74.00	-31.17	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 235 of 929

Test Mode: 01; Polarity: Horizontal; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

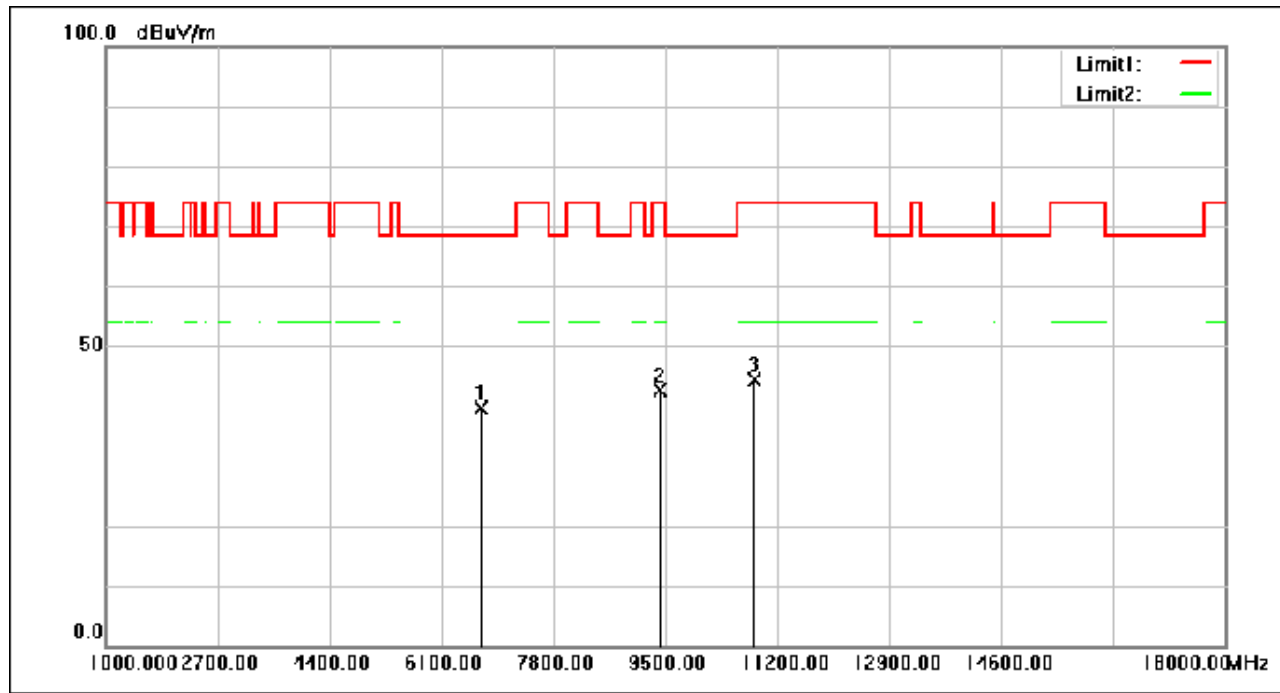

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6699.760	49.80	-10.25	39.55	68.30	-28.75	peak
2	9427.240	49.62	-7.02	42.60	74.00	-31.40	peak
3	10843.680	50.73	-6.36	44.37	74.00	-29.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 236 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

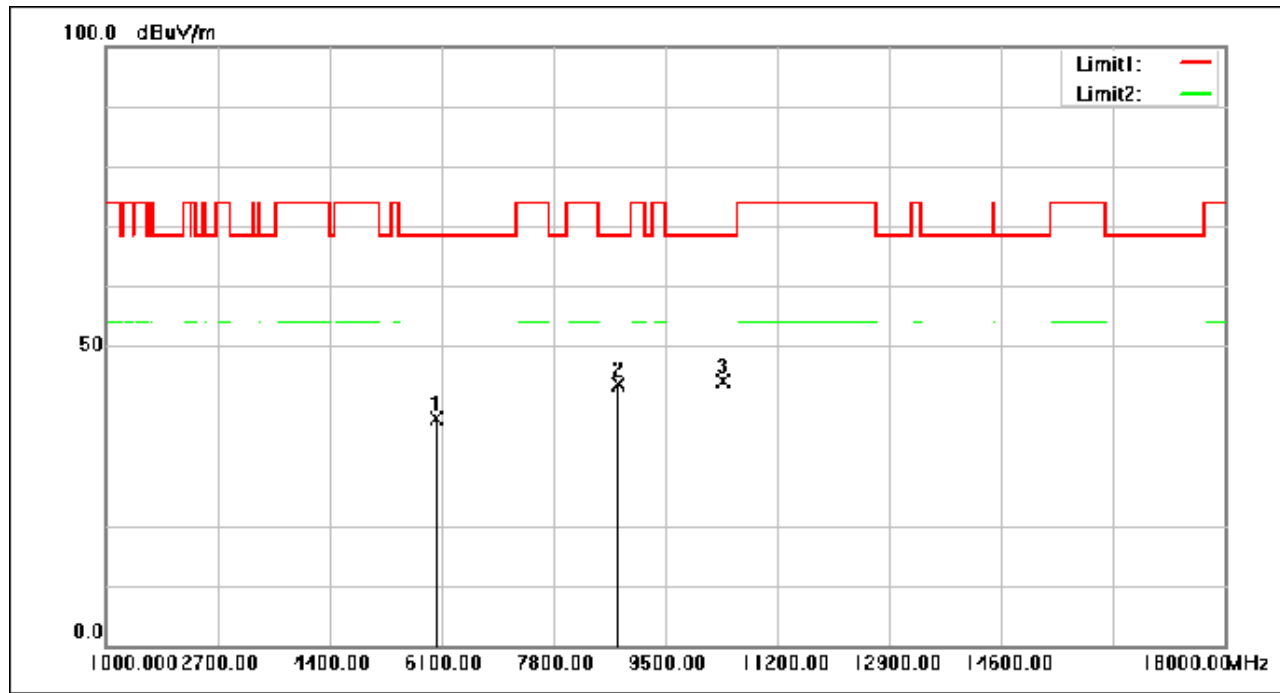

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6021.120	50.77	-13.00	37.77	68.30	-30.53	peak
2	8796.880	51.78	-8.16	43.62	68.30	-24.68	peak
3	10372.440	50.42	-6.37	44.05	68.30	-24.25	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 237 of 929

Test Mode: 01; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

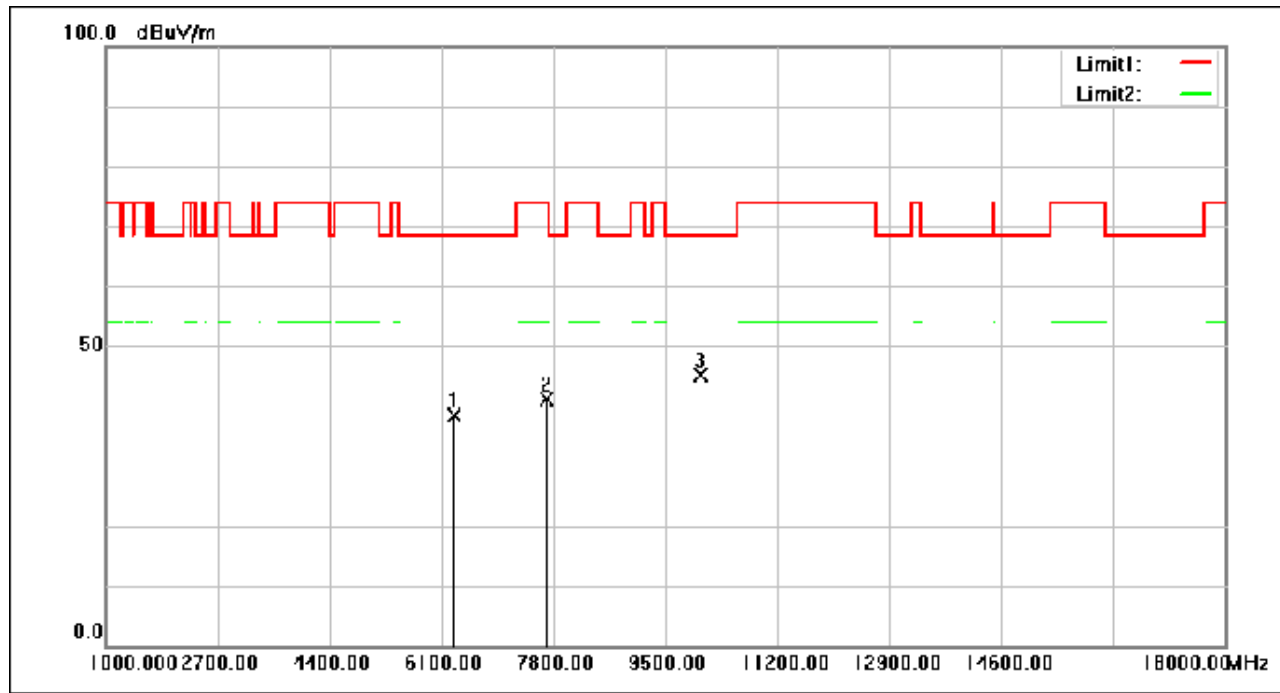

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6299.920	50.27	-11.90	38.37	68.30	-29.93	peak
2	7704.800	50.63	-9.48	41.15	74.00	-32.85	peak
3	10033.800	51.50	-6.33	45.17	68.30	-23.13	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 238 of 929

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

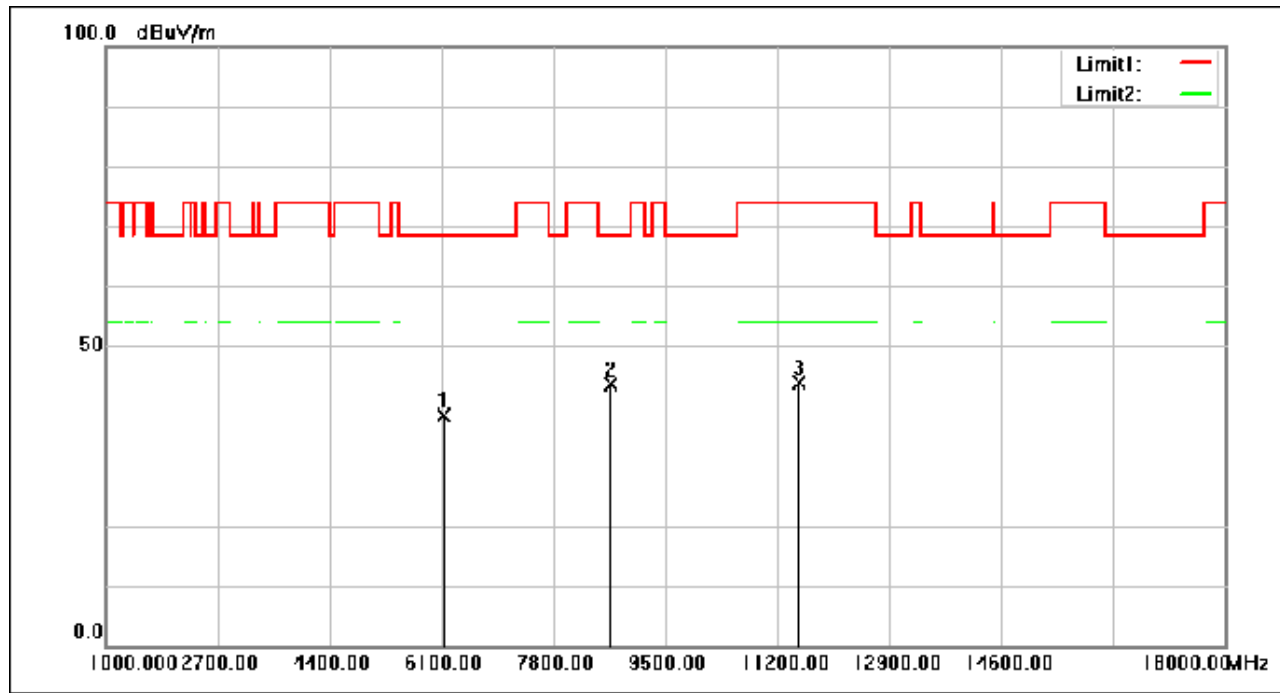

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6148.280	50.85	-12.52	38.33	68.30	-29.97	peak
2	8677.880	52.00	-8.42	43.58	68.30	-24.72	peak
3	11523.000	50.03	-6.07	43.96	74.00	-30.04	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 239 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

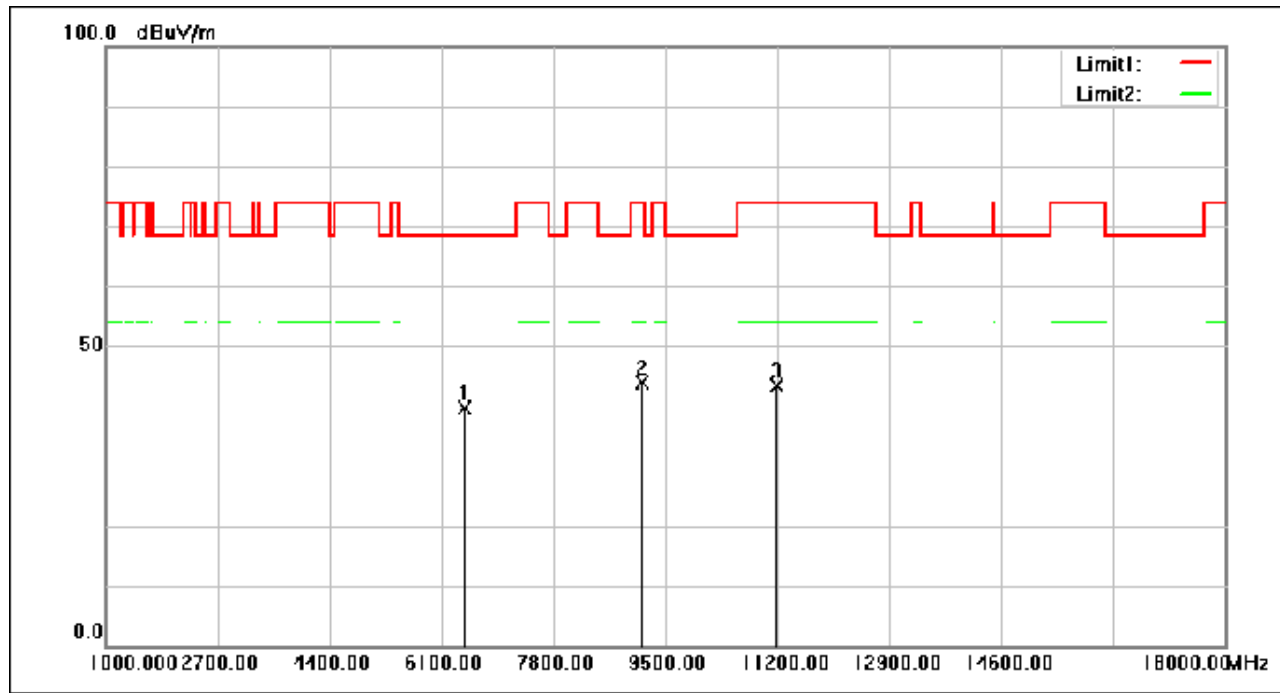

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6472.640	50.83	-11.19	39.64	68.30	-28.66	peak
2	9151.840	51.39	-7.46	43.93	74.00	-30.07	peak
3	11196.600	49.55	-6.24	43.31	74.00	-30.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 240 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

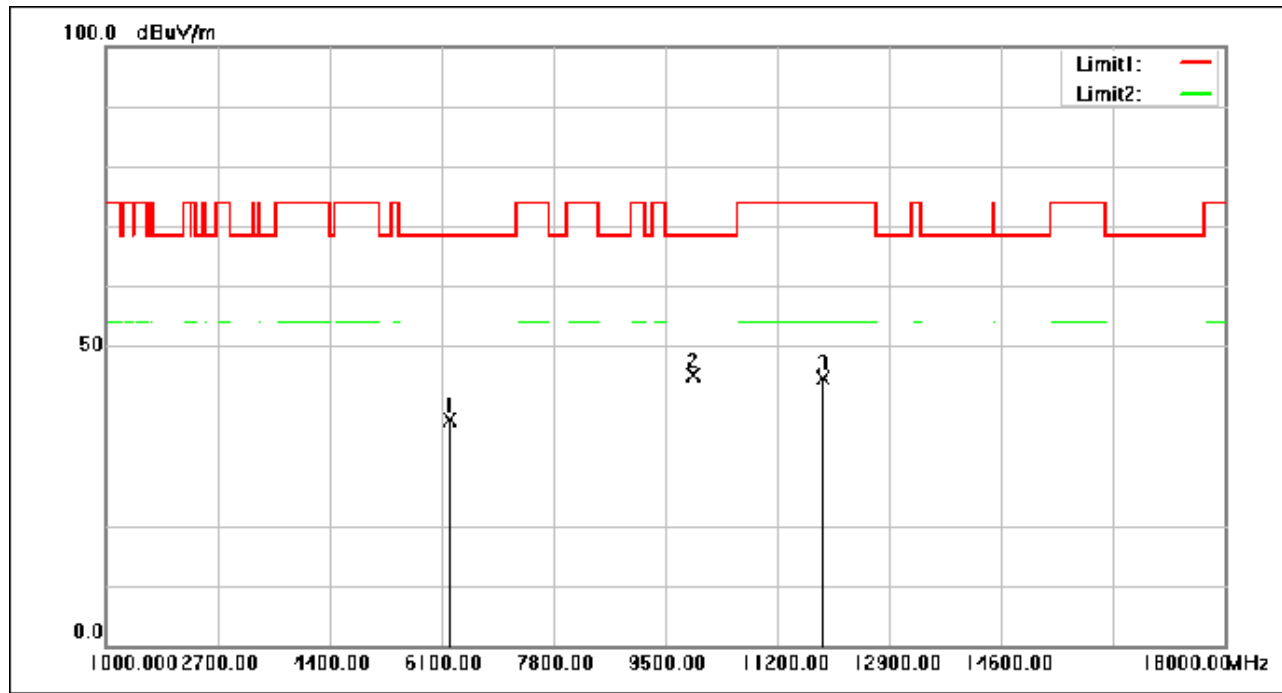

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6227.840	49.82	-12.20	37.62	68.30	-30.68	peak
2	9930.440	51.36	-6.31	45.05	68.30	-23.25	peak
3	11911.280	50.97	-6.39	44.58	74.00	-29.42	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 241 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

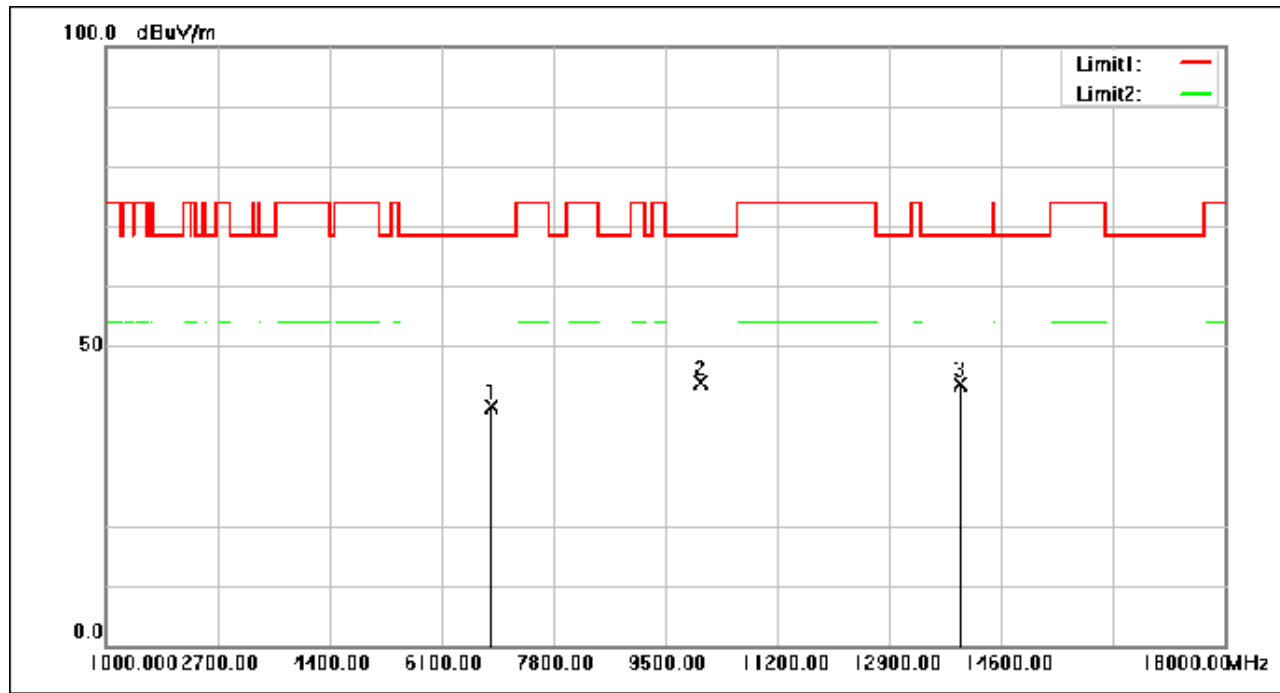

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6865.000	50.00	-10.05	39.95	68.30	-28.35	peak
2	10033.120	50.22	-6.33	43.89	68.30	-24.41	peak
3	13979.160	50.00	-6.30	43.70	68.30	-24.60	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 242 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

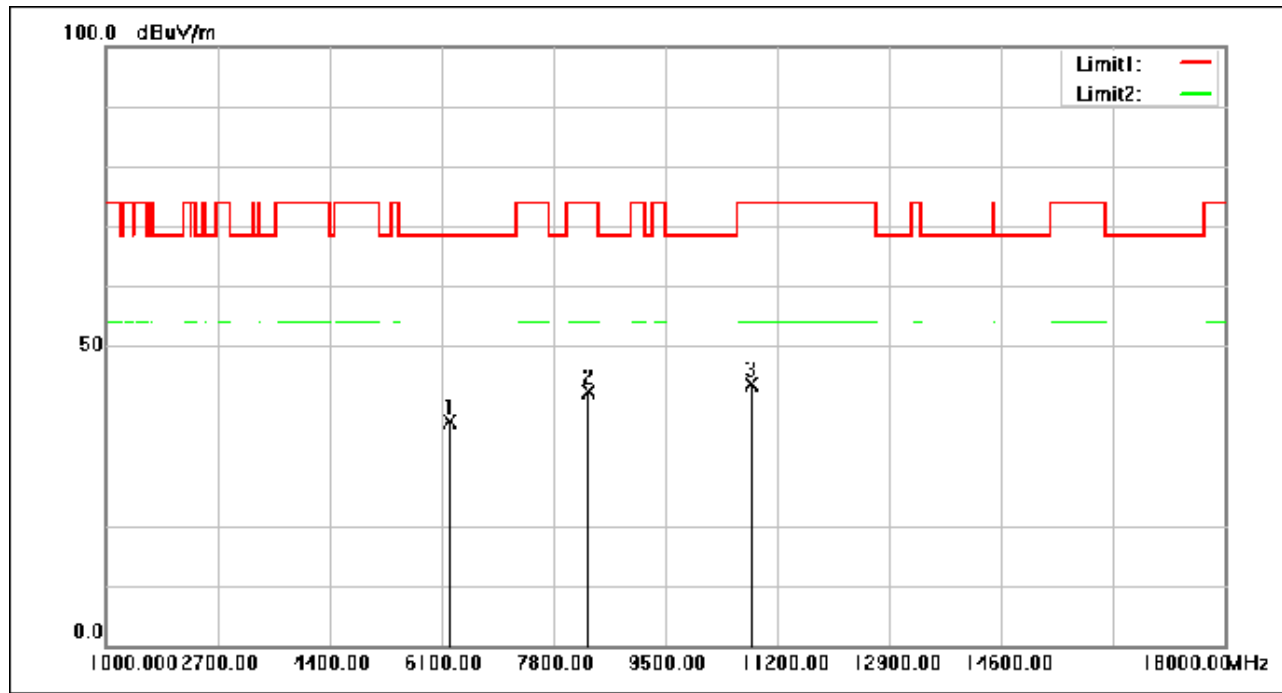

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6226.480	49.51	-12.20	37.31	68.30	-30.99	peak
2	8337.880	51.29	-9.02	42.27	74.00	-31.73	peak
3	10815.800	49.93	-6.37	43.56	74.00	-30.44	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 243 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

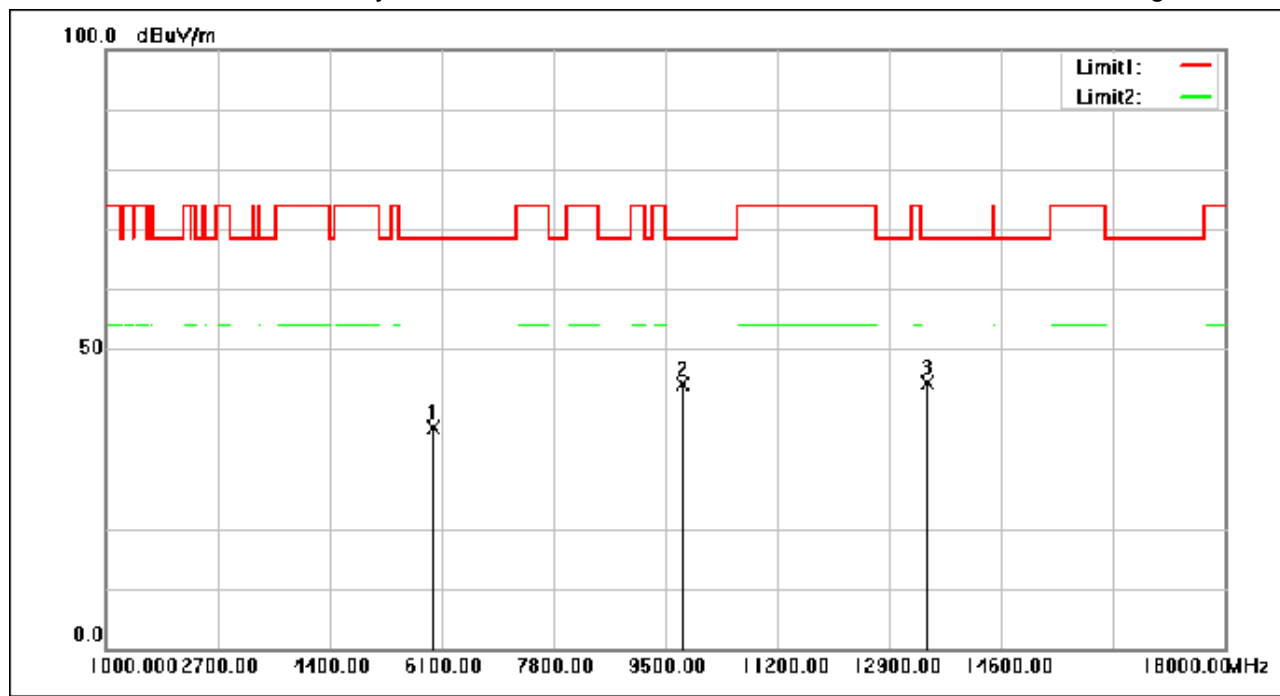

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5996.640	50.10	-13.10	37.00	68.30	-31.30	peak
2	9760.440	50.48	-6.44	44.04	68.30	-24.26	peak
3	13486.160	50.06	-5.73	44.33	68.30	-23.97	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 244 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

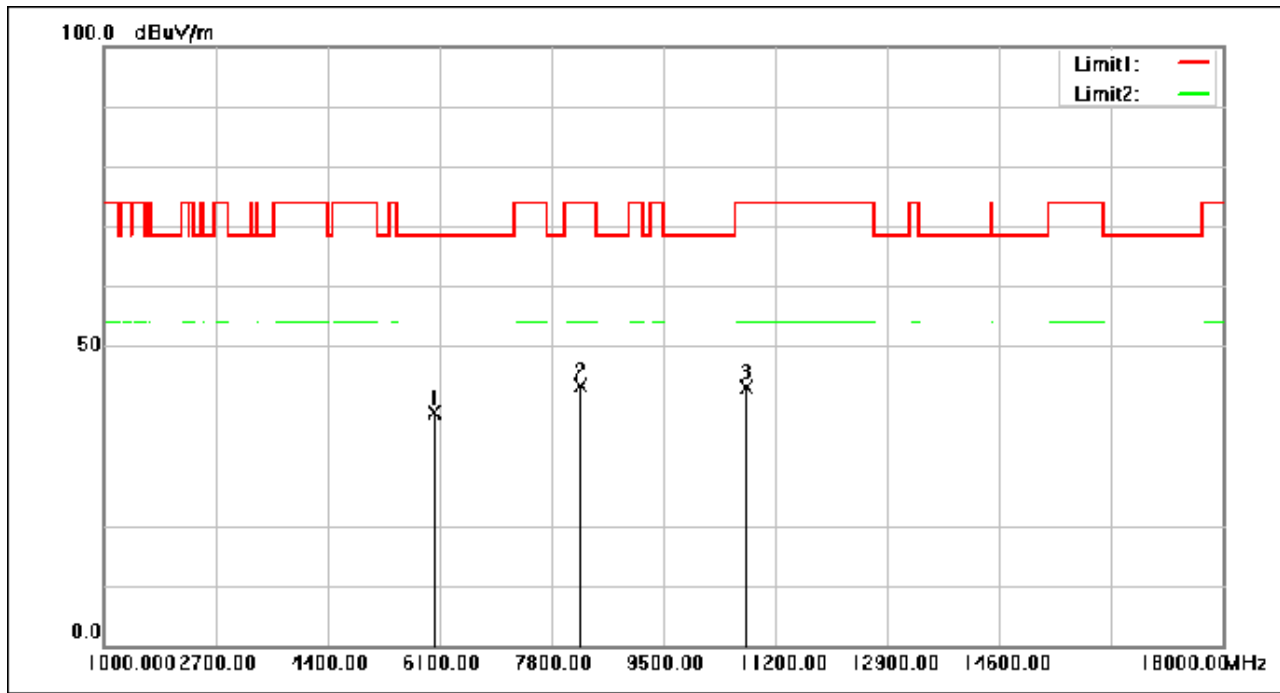

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6022.480	51.86	-13.00	38.86	68.30	-29.44	peak
2	8253.560	52.47	-9.14	43.33	74.00	-30.67	peak
3	10764.120	49.47	-6.37	43.10	74.00	-30.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 245 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

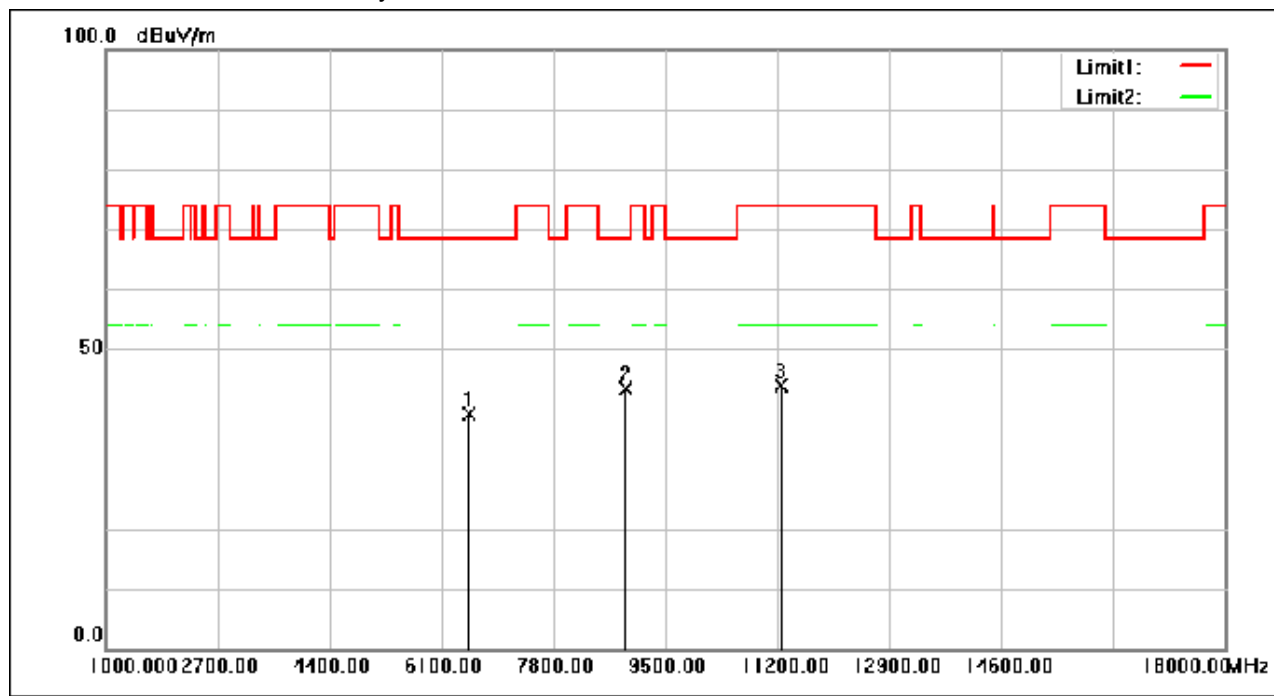

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6535.880	50.12	-10.93	39.19	68.30	-29.11	peak
2	8905.680	51.31	-7.94	43.37	68.30	-24.93	peak
3	11255.080	50.10	-6.21	43.89	74.00	-30.11	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 246 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

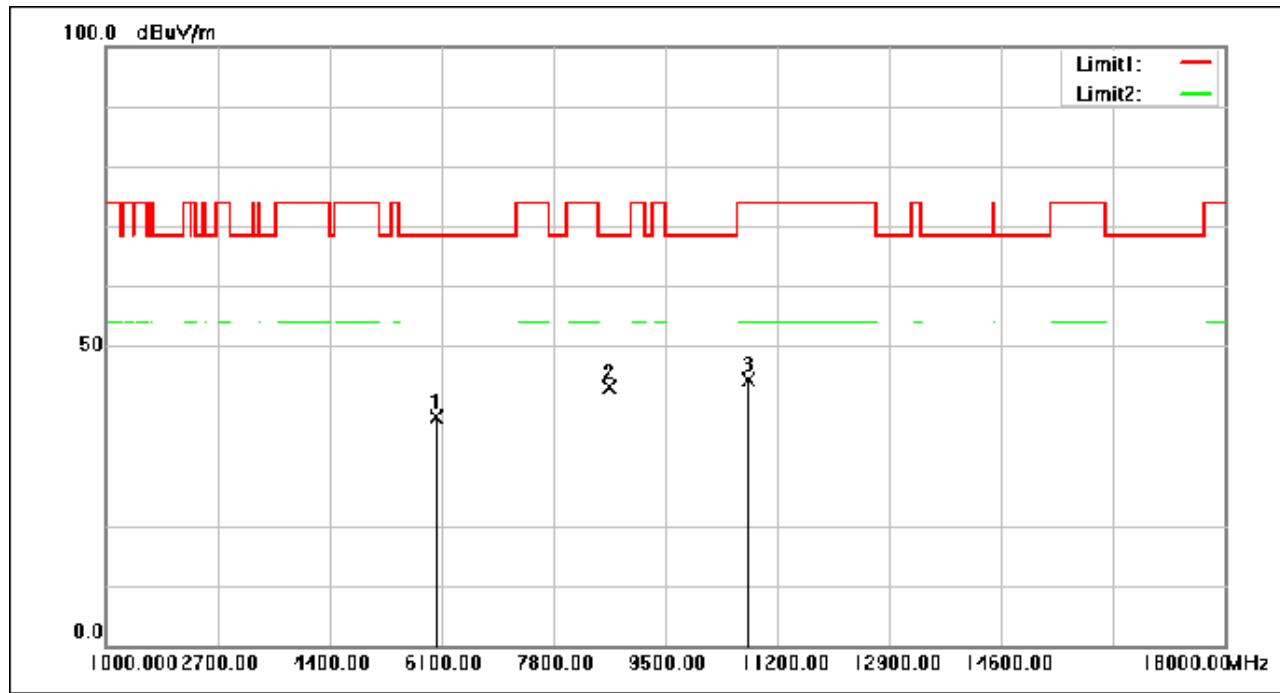

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6017.720	51.16	-13.02	38.14	68.30	-30.16	peak
2	8661.560	51.49	-8.46	43.03	68.30	-25.27	peak
3	10766.160	50.70	-6.37	44.33	74.00	-29.67	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 247 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

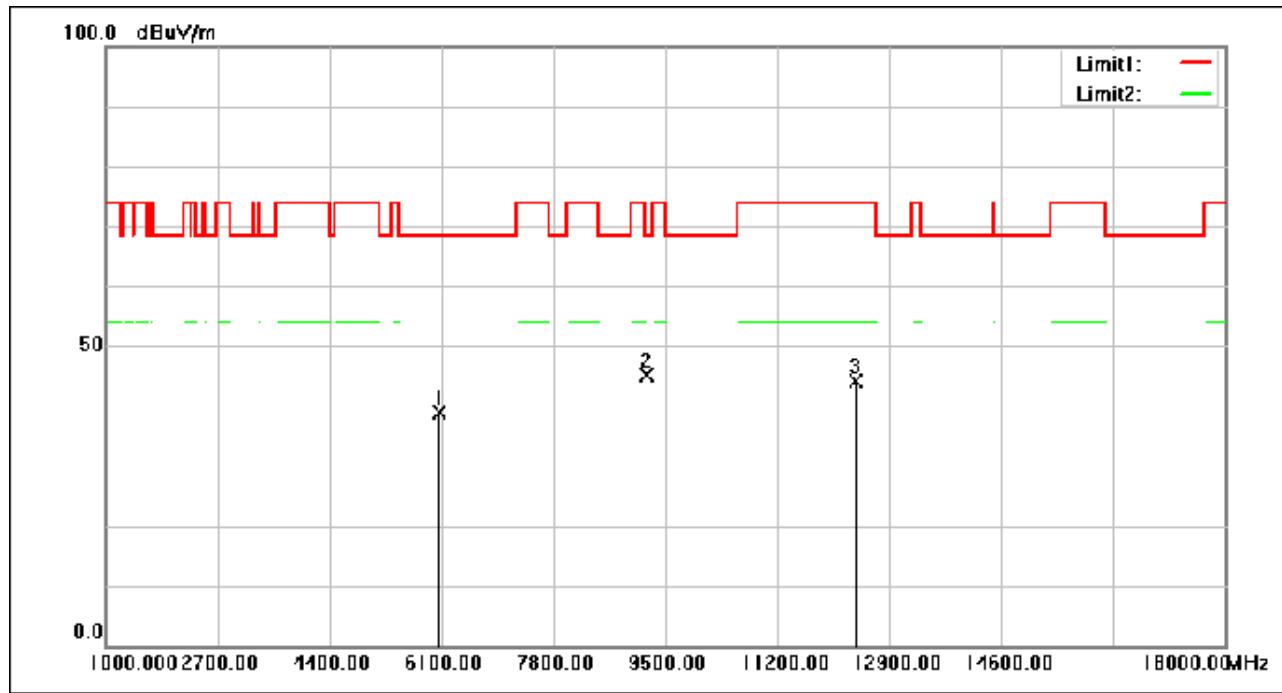

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6081.640	51.58	-12.78	38.80	68.30	-29.50	peak
2	9211.680	52.37	-7.36	45.01	68.30	-23.29	peak
3	12404.280	50.21	-6.05	44.16	74.00	-29.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 248 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

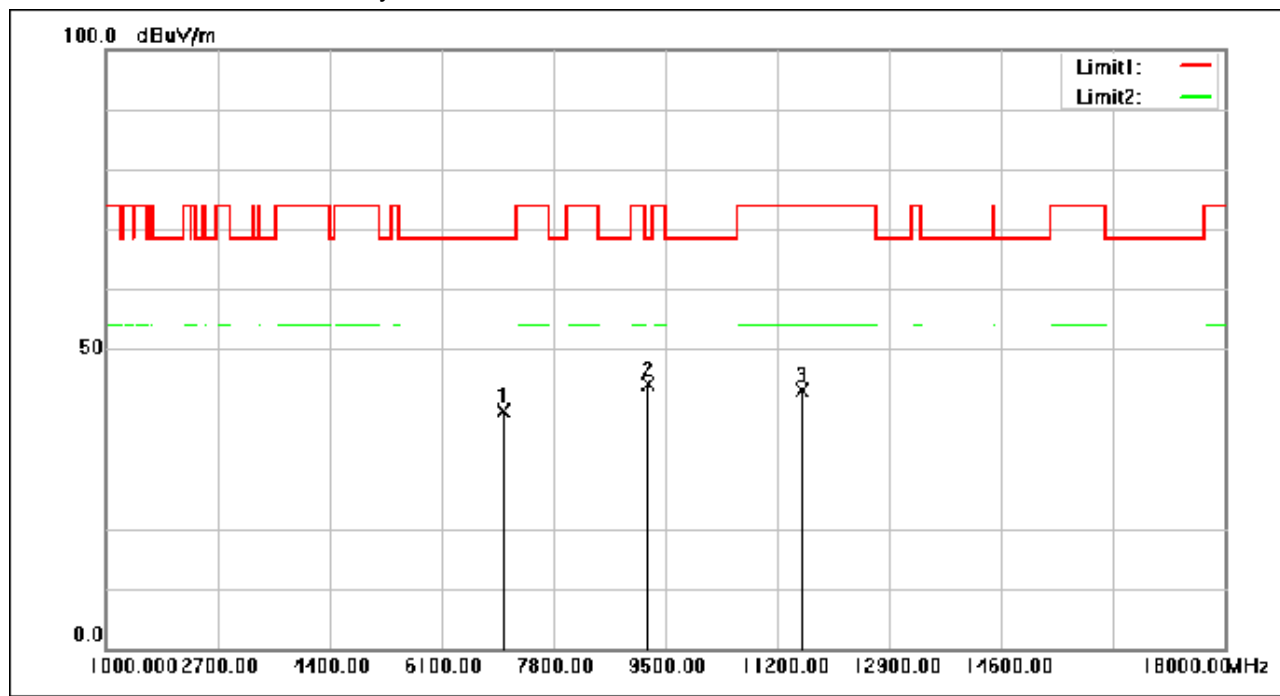

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7041.800	49.48	-9.93	39.55	68.30	-28.75	peak
2	9250.440	51.46	-7.30	44.16	68.30	-24.14	peak
3	11578.760	49.27	-6.12	43.15	74.00	-30.85	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 249 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

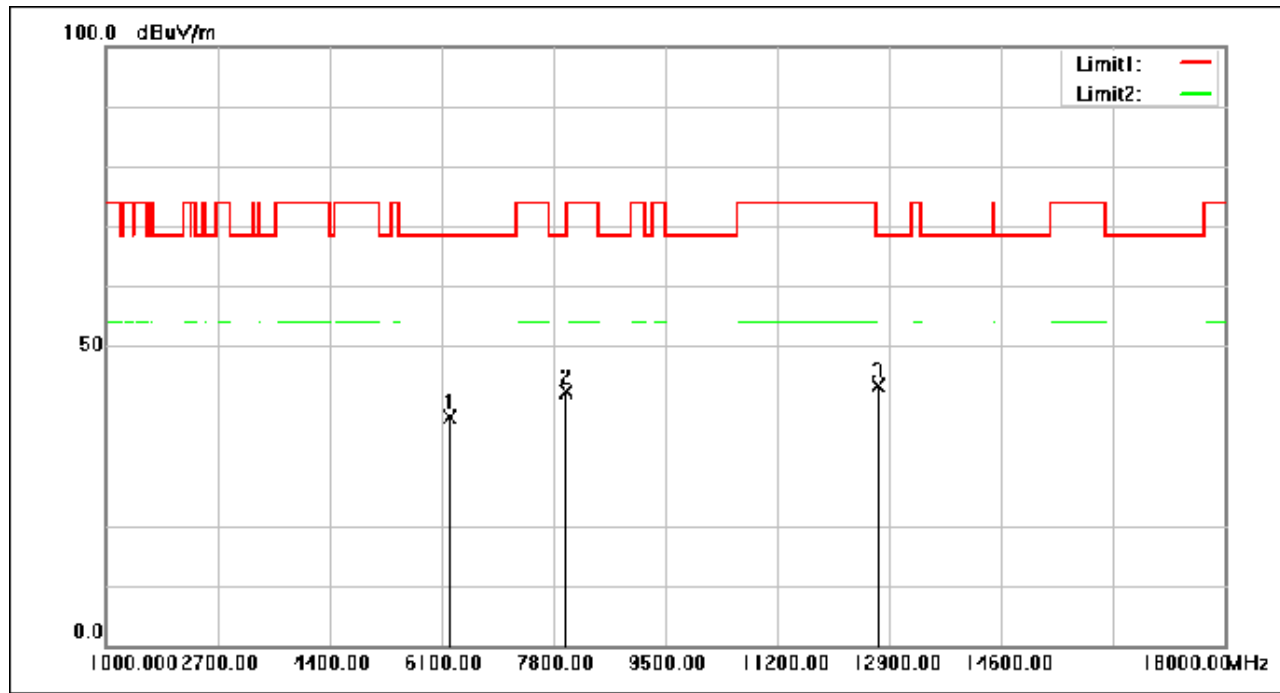

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6227.160	50.31	-12.20	38.11	68.30	-30.19	peak
2	7998.560	51.93	-9.50	42.43	68.30	-25.87	peak
3	12744.280	49.20	-5.76	43.44	68.30	-24.86	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 250 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

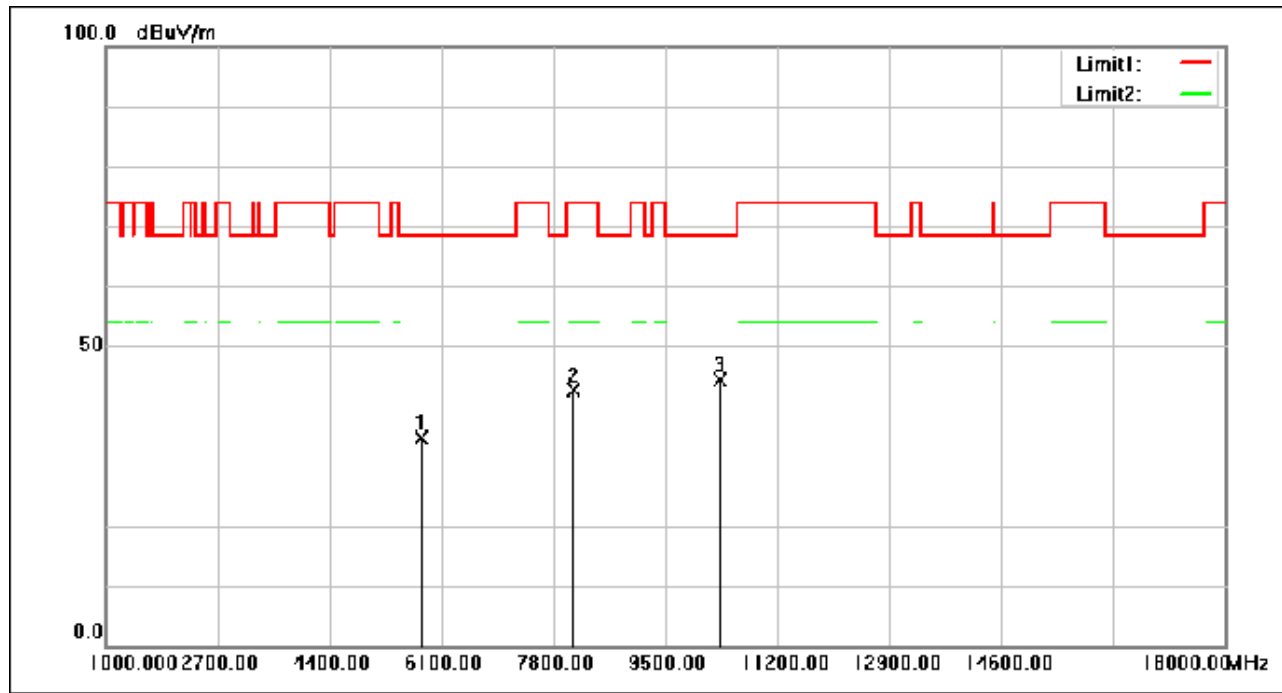

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5795.360	48.80	-14.27	34.53	68.30	-33.77	peak
2	8114.840	52.00	-9.33	42.67	74.00	-31.33	peak
3	10335.720	50.80	-6.37	44.43	68.30	-23.87	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 251 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

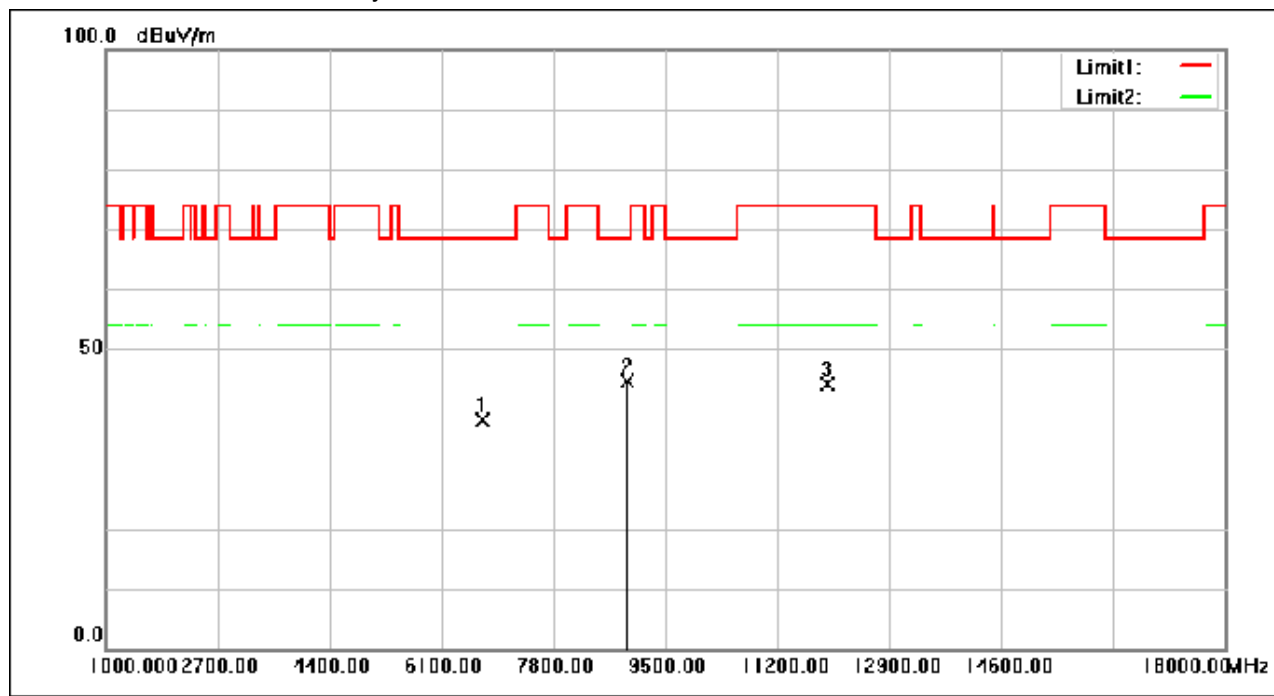

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6732.400	48.16	-10.14	38.02	68.30	-30.28	peak
2	8938.320	52.37	-7.86	44.51	68.30	-23.79	peak
3	11977.920	50.49	-6.39	44.10	74.00	-29.90	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 252 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

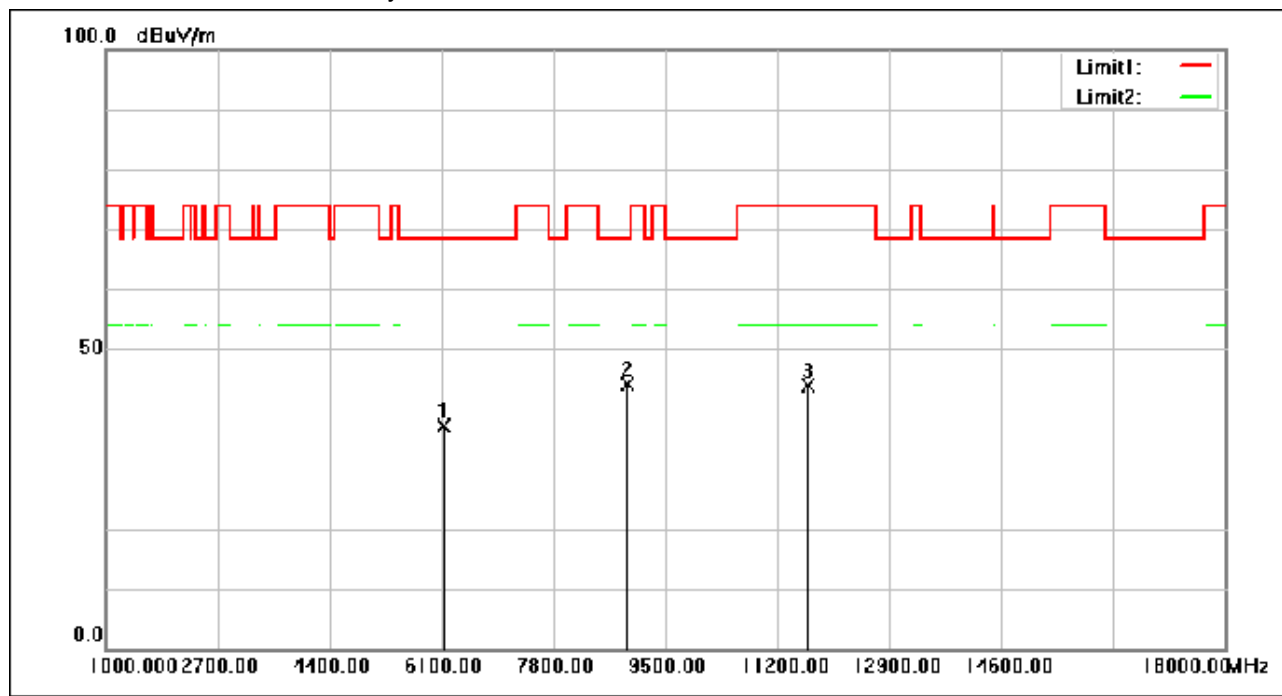

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6148.960	49.60	-12.52	37.08	68.30	-31.22	peak
2	8930.160	51.90	-7.88	44.02	68.30	-24.28	peak
3	11673.960	50.01	-6.19	43.82	74.00	-30.18	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 253 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

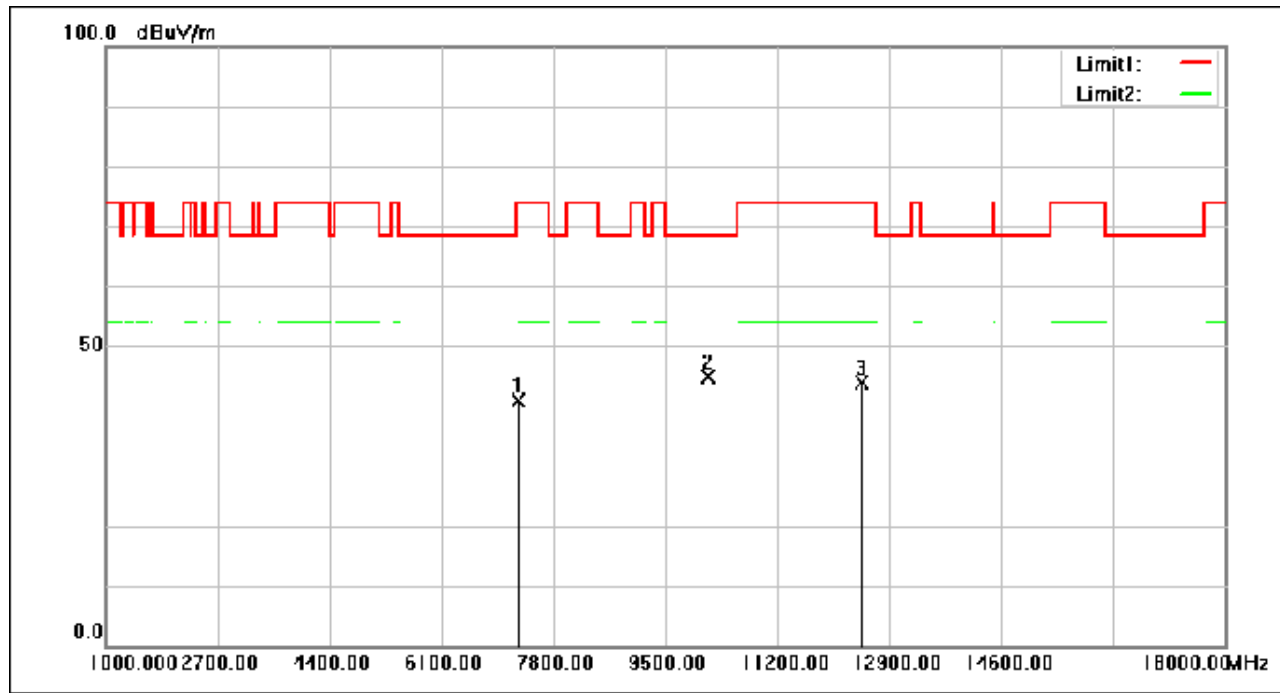

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.040	50.57	-9.73	40.84	74.00	-33.16	peak
2	10148.720	51.15	-6.35	44.80	68.30	-23.50	peak
3	12491.320	49.73	-5.97	43.76	74.00	-30.24	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 254 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

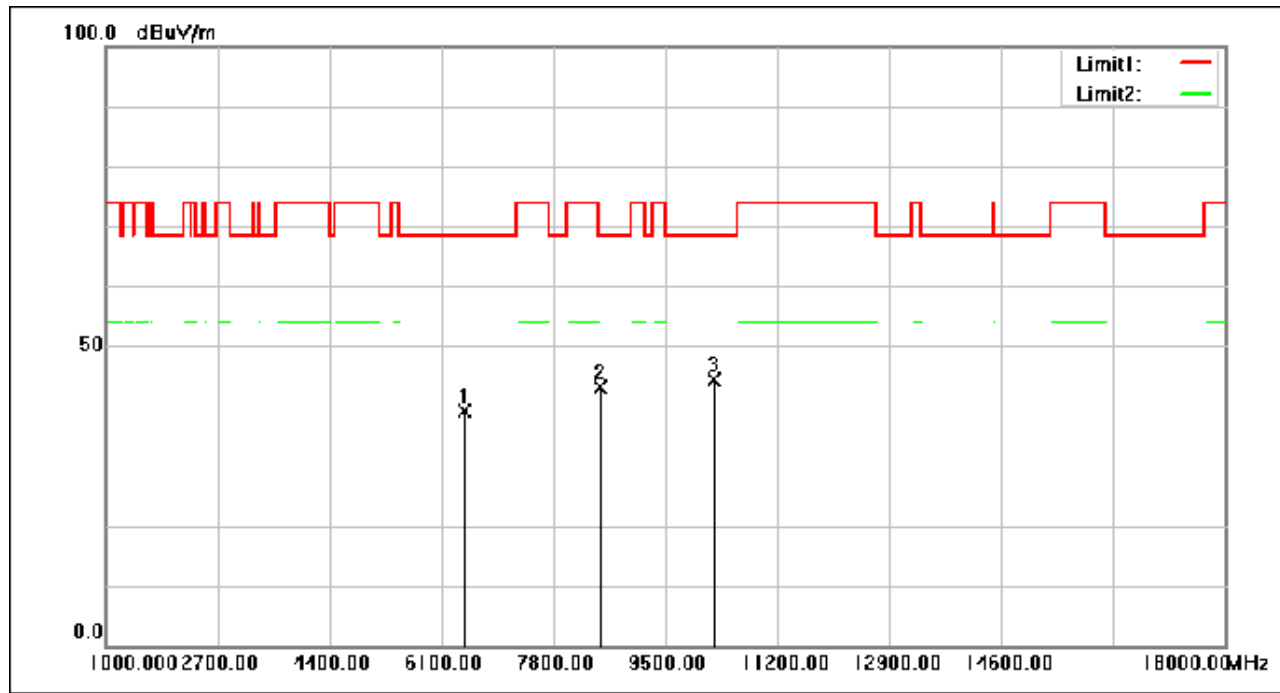

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6465.840	50.32	-11.22	39.10	68.30	-29.20	peak
2	8525.560	51.97	-8.75	43.22	68.30	-25.08	peak
3	10239.160	50.74	-6.36	44.38	68.30	-23.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 255 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

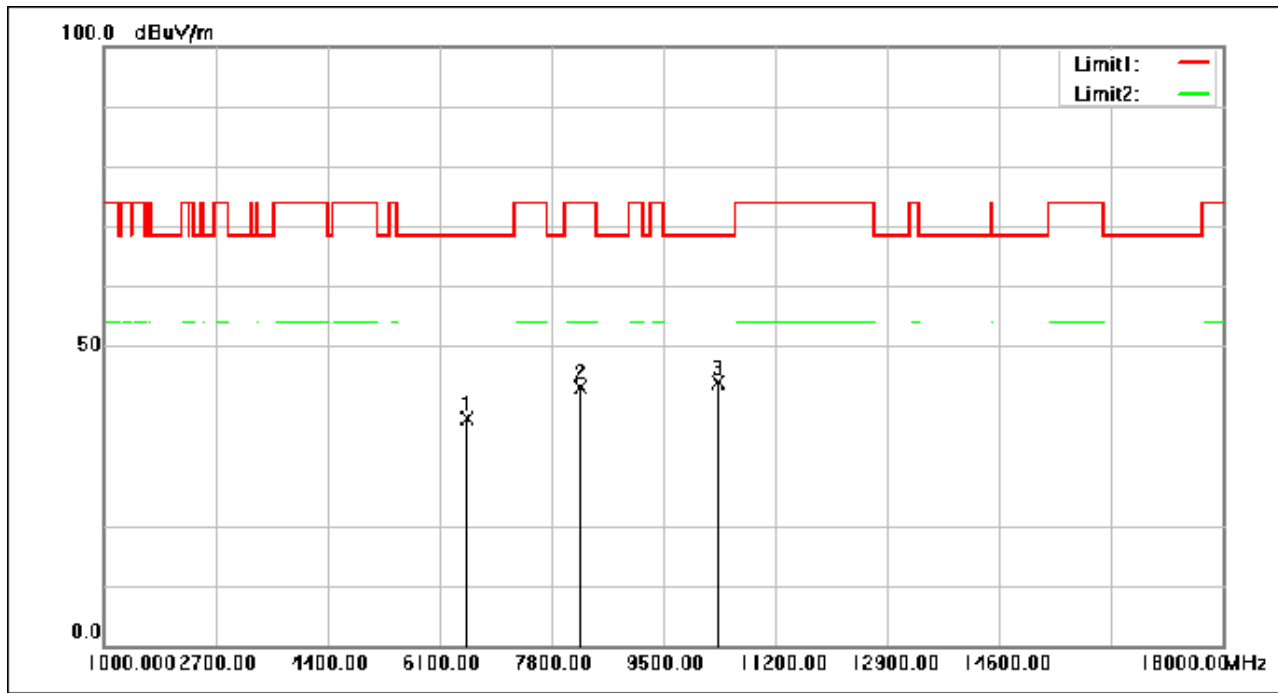

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6538.600	48.90	-10.92	37.98	68.30	-30.32	peak
2	8243.360	52.31	-9.15	43.16	74.00	-30.84	peak
3	10338.440	50.15	-6.37	43.78	68.30	-24.52	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 256 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

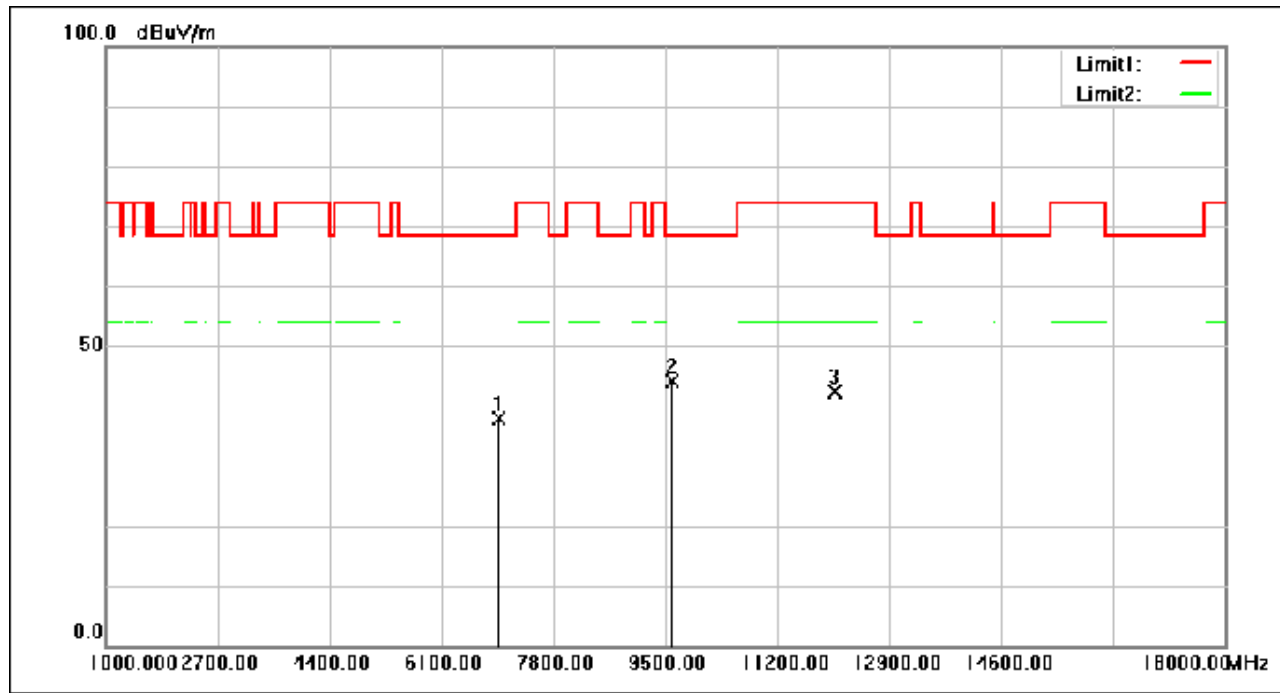

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6971.080	47.74	-9.98	37.76	68.30	-30.54	peak
2	9617.640	50.77	-6.69	44.08	68.30	-24.22	peak
3	12073.120	48.82	-6.33	42.49	74.00	-31.51	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 257 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

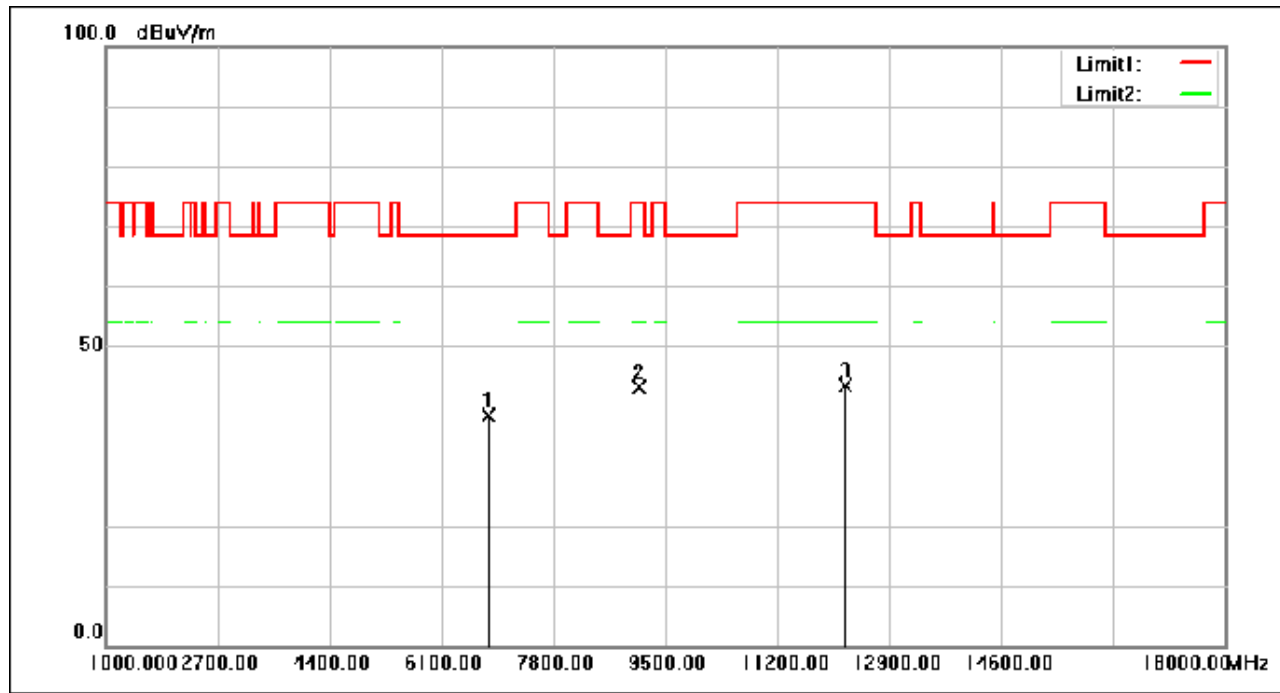

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6828.280	48.37	-10.08	38.29	68.30	-30.01	peak
2	9119.200	50.58	-7.51	43.07	74.00	-30.93	peak
3	12247.200	49.49	-6.18	43.31	74.00	-30.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 258 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

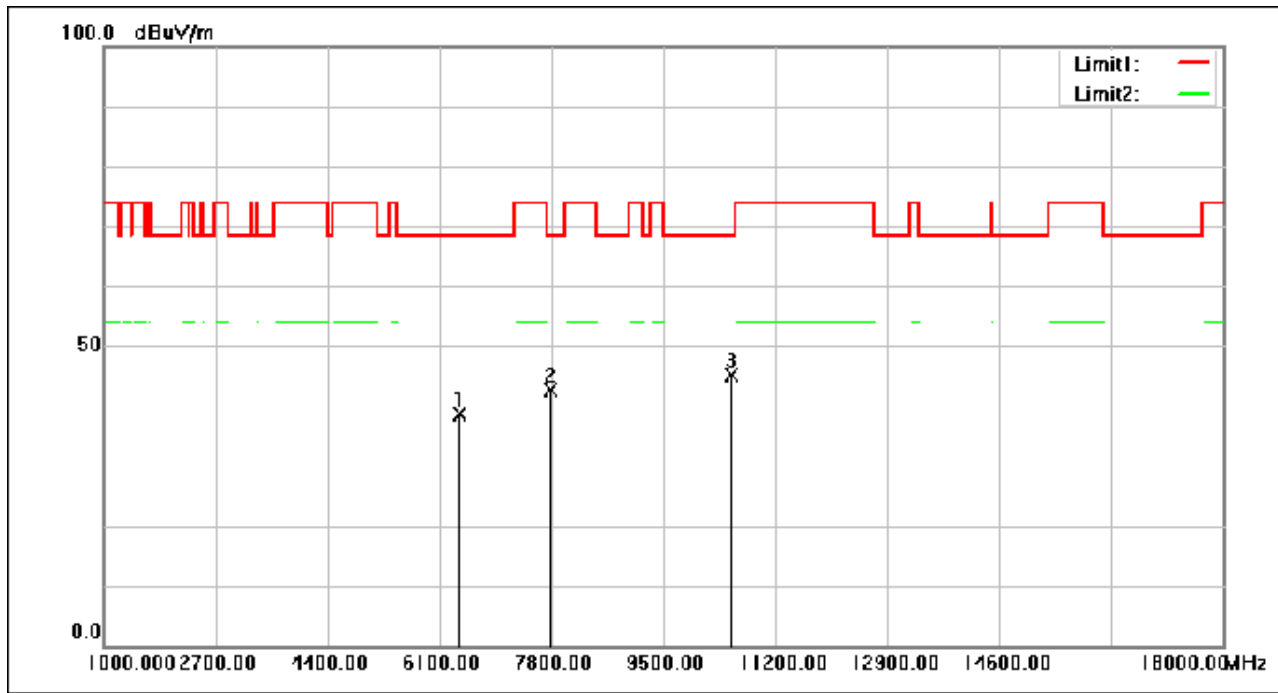

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6407.360	49.98	-11.46	38.52	68.30	-29.78	peak
2	7793.880	52.06	-9.48	42.58	68.30	-25.72	peak
3	10549.240	51.61	-6.39	45.22	68.30	-23.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 259 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

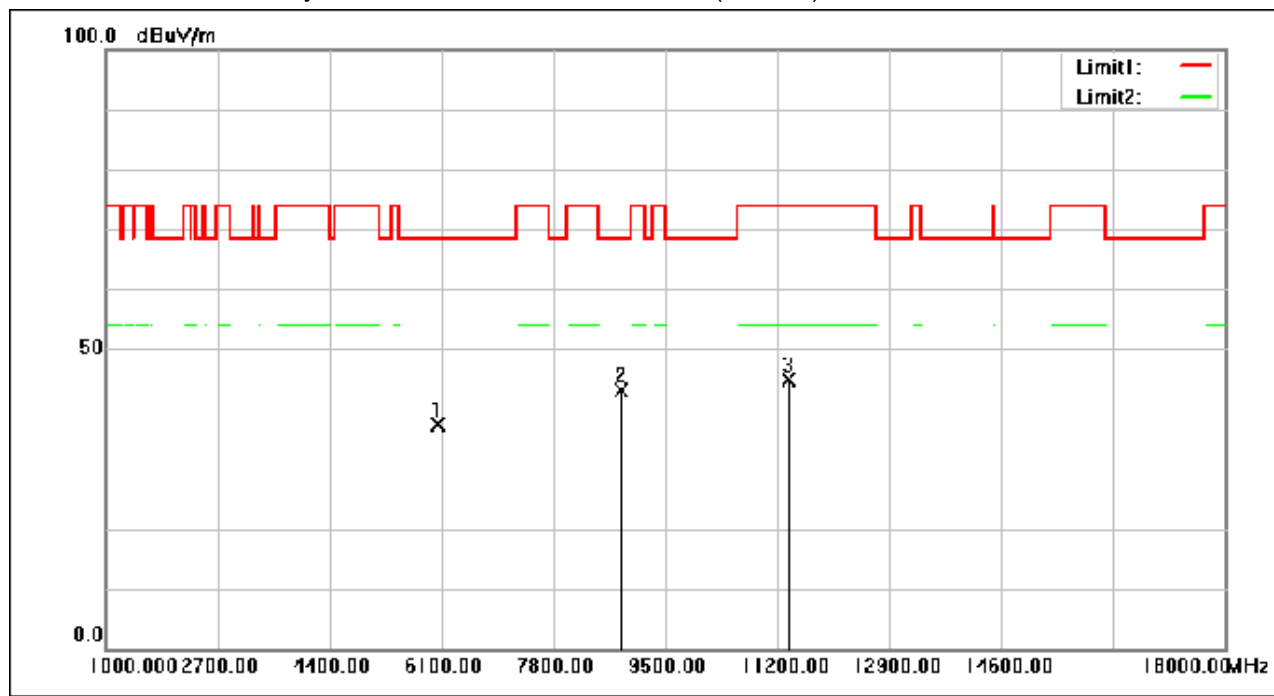

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6060.560	50.31	-12.86	37.45	68.30	-30.85	peak
2	8842.440	51.10	-8.07	43.03	68.30	-25.27	peak
3	11380.200	51.10	-6.14	44.96	74.00	-29.04	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 260 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

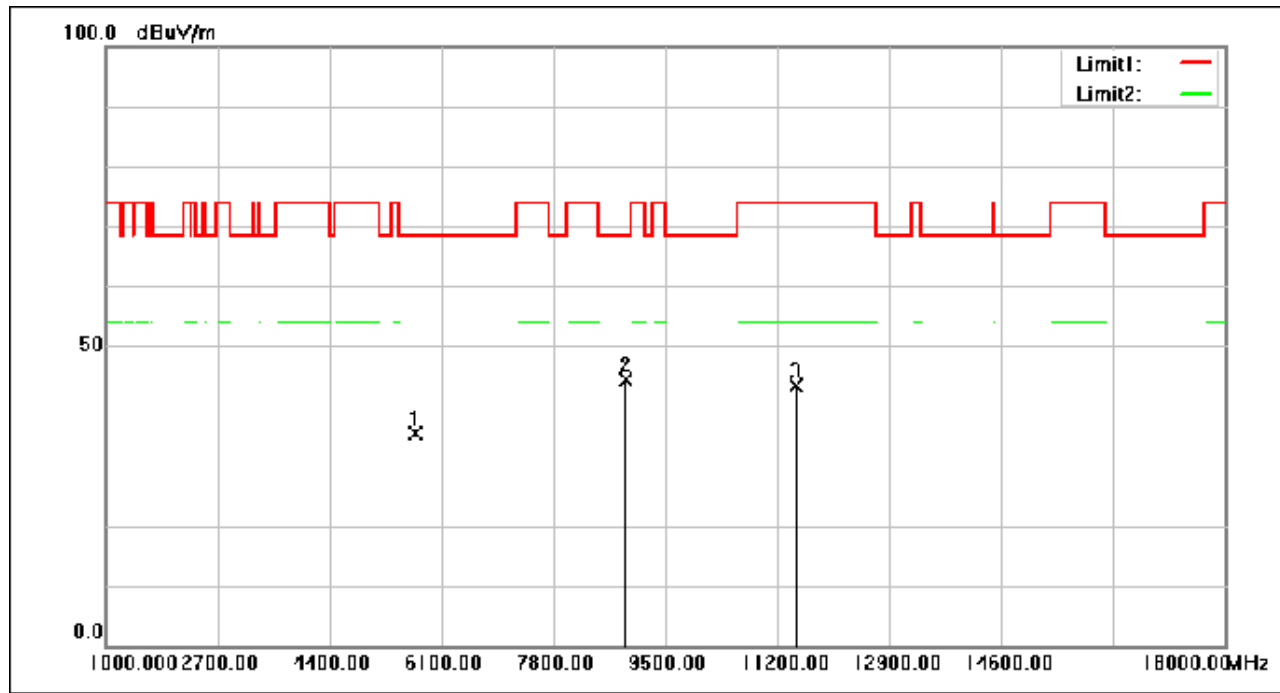

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5714.440	49.90	-14.62	35.28	68.30	-33.02	peak
2	8921.320	52.18	-7.89	44.29	68.30	-24.01	peak
3	11491.040	49.36	-6.07	43.29	74.00	-30.71	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 261 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

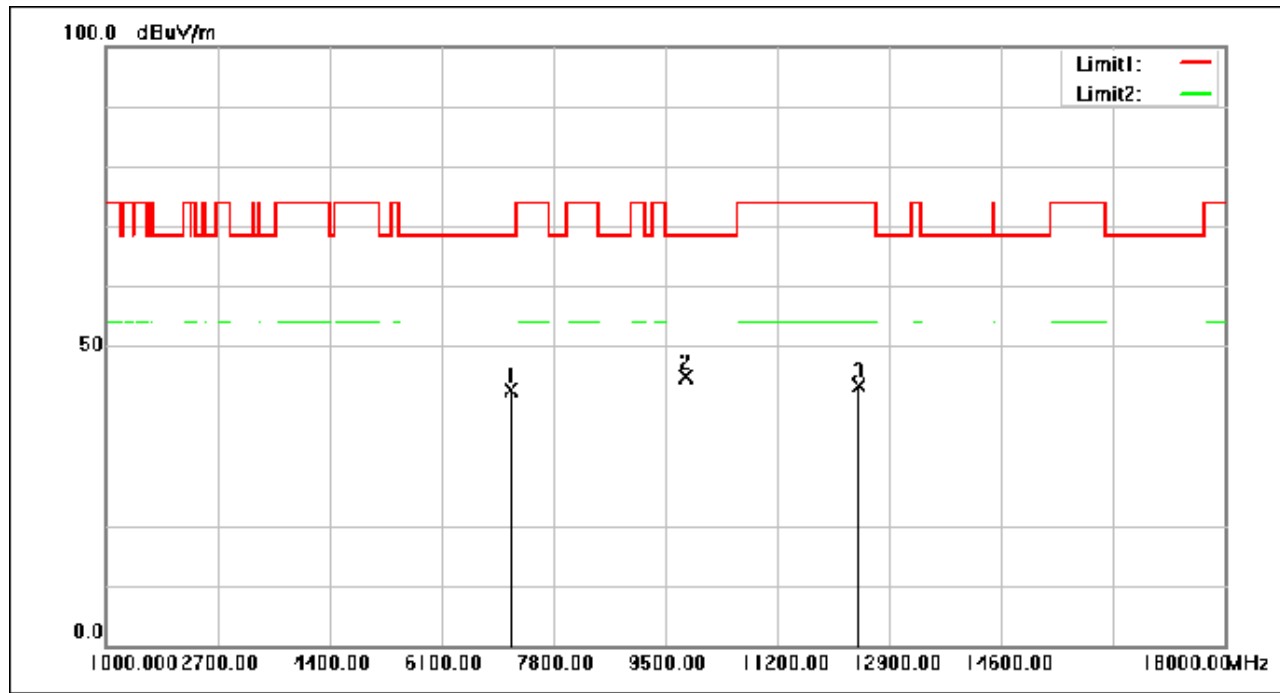

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7162.160	52.52	-9.83	42.69	68.30	-25.61	peak
2	9815.520	51.20	-6.34	44.86	68.30	-23.44	peak
3	12445.760	49.37	-6.01	43.36	74.00	-30.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 262 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

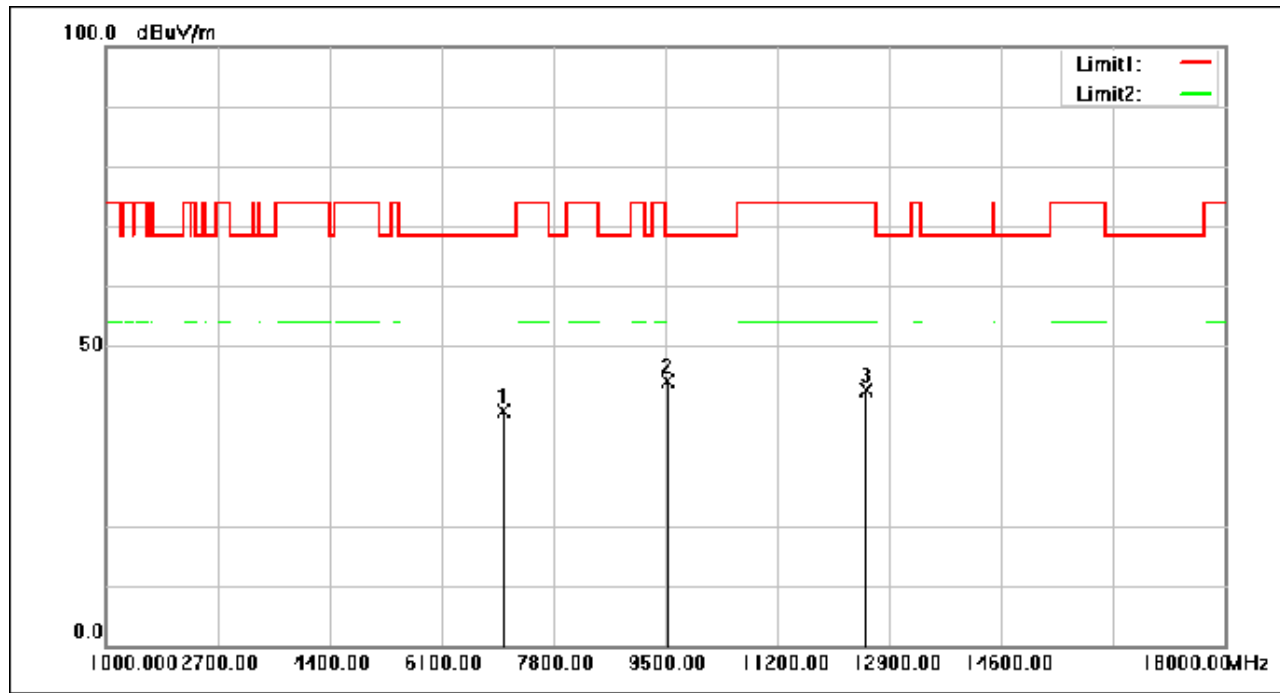

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7043.160	48.95	-9.93	39.02	68.30	-29.28	peak
2	9538.080	51.04	-6.84	44.20	68.30	-24.10	peak
3	12549.800	48.56	-5.92	42.64	74.00	-31.36	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 263 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

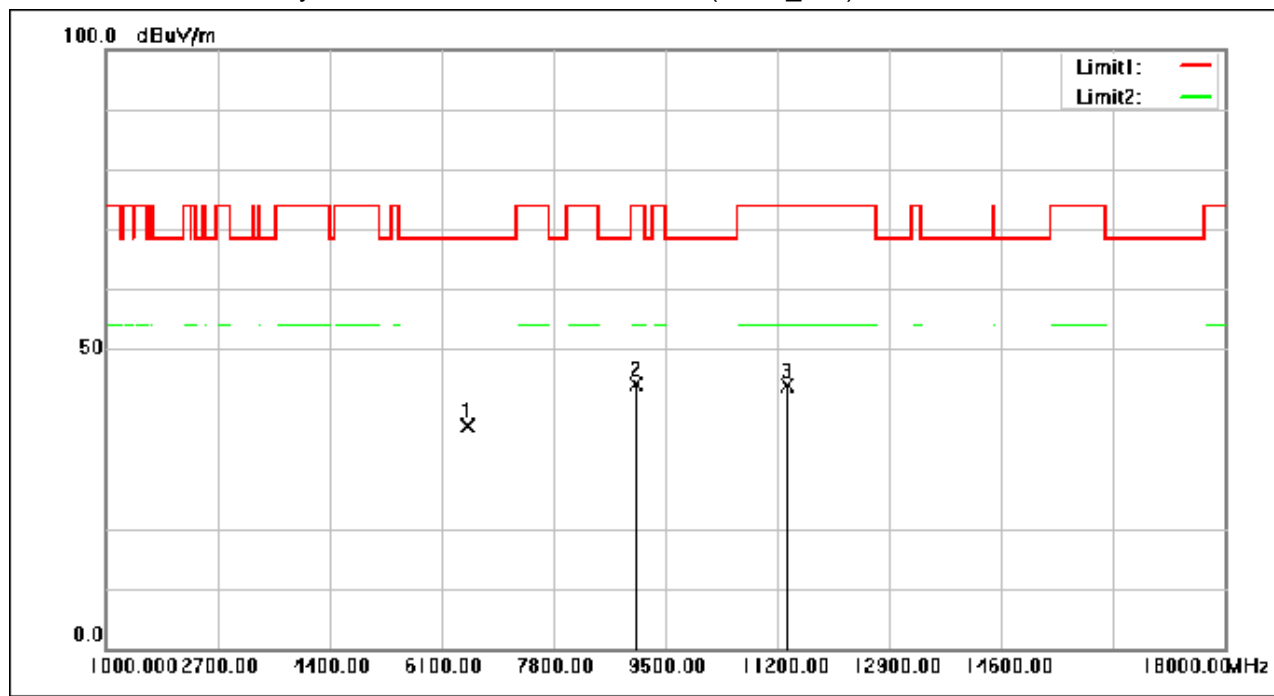

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6504.600	48.25	-11.06	37.19	68.30	-31.11	peak
2	9064.800	51.69	-7.60	44.09	74.00	-29.91	peak
3	11355.040	50.03	-6.15	43.88	74.00	-30.12	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 264 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Left); Bandwidth:20MHz; Channel:Low

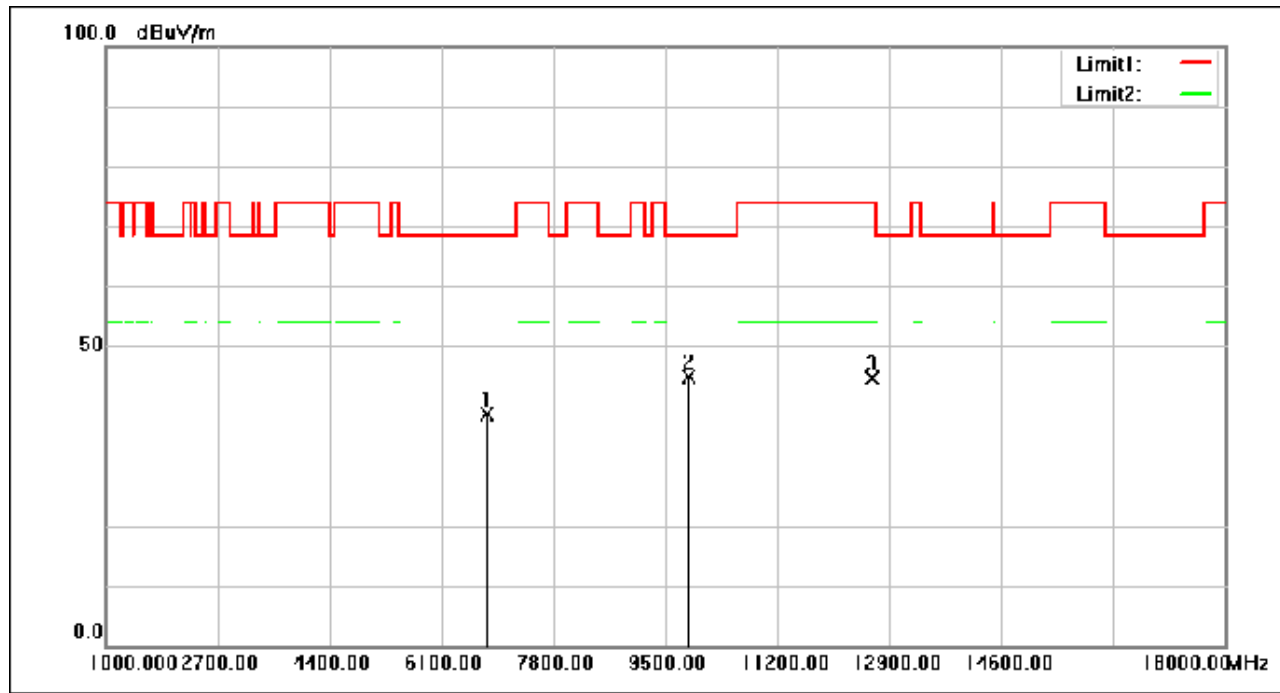

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6797.680	48.63	-10.09	38.54	68.30	-29.76	peak
2	9872.640	51.18	-6.28	44.90	68.30	-23.40	peak
3	12653.160	50.35	-5.84	44.51	74.00	-29.49	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 265 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz;
Channel:Middle

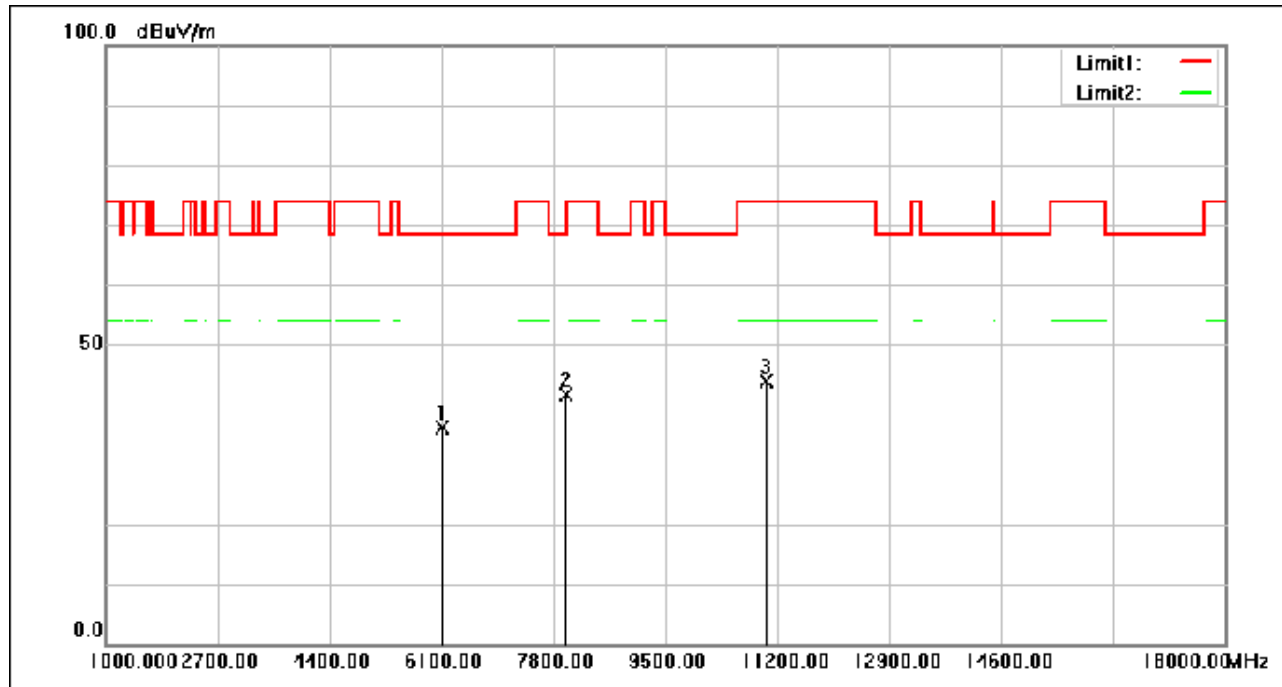

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6123.120	48.73	-12.63	36.10	68.30	-32.20	peak
2	7987.680	51.19	-9.50	41.69	68.30	-26.61	peak
3	11044.280	50.24	-6.33	43.91	74.00	-30.09	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 266 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Middle); Bandwidth:20MHz; Channel:Middle

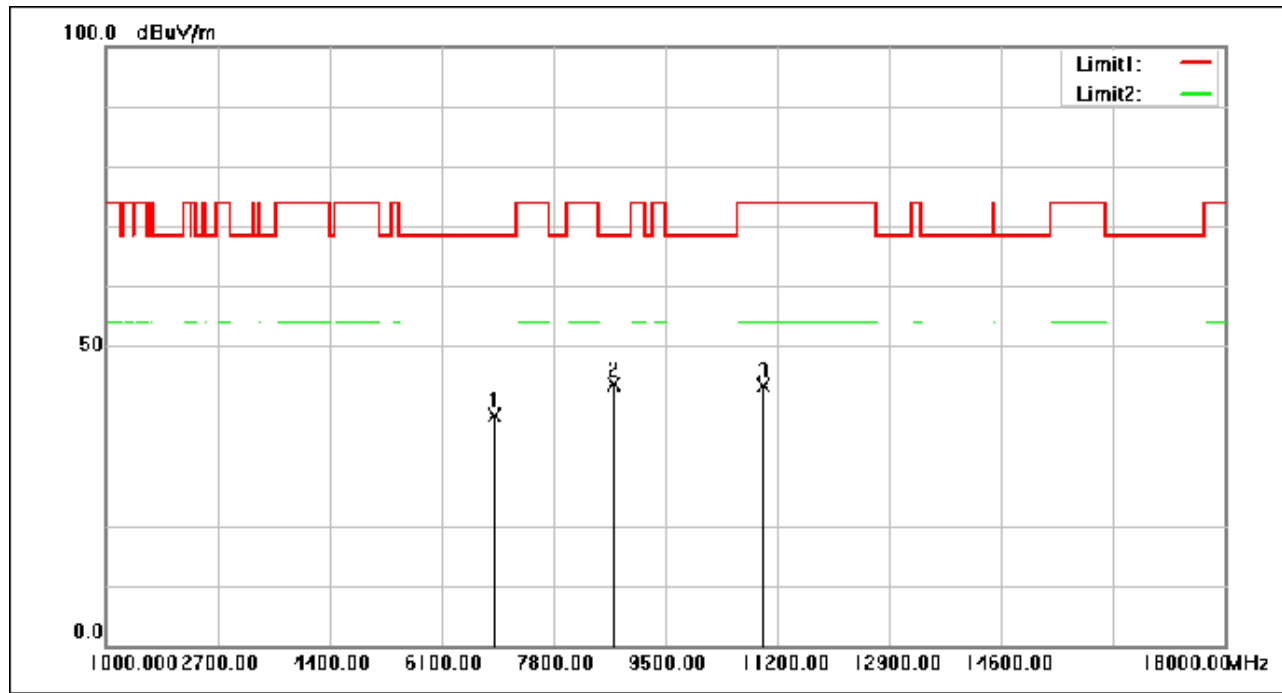

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6915.320	48.45	-10.02	38.43	68.30	-29.87	peak
2	8722.760	52.03	-8.32	43.71	68.30	-24.59	peak
3	10989.880	49.73	-6.36	43.37	74.00	-30.63	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 267 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

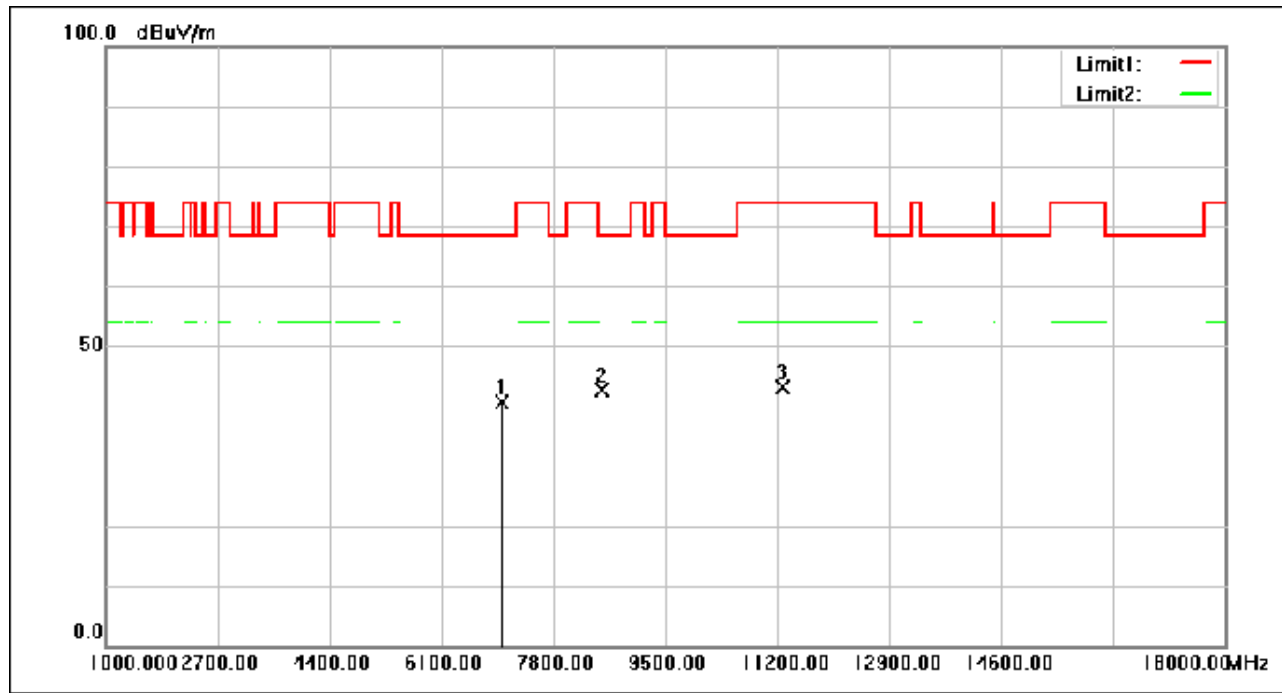

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7024.120	50.48	-9.95	40.53	68.30	-27.77	peak
2	8543.920	51.32	-8.70	42.62	68.30	-25.68	peak
3	11298.600	49.24	-6.18	43.06	74.00	-30.94	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 268 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU26_Right); Bandwidth:20MHz; Channel:High

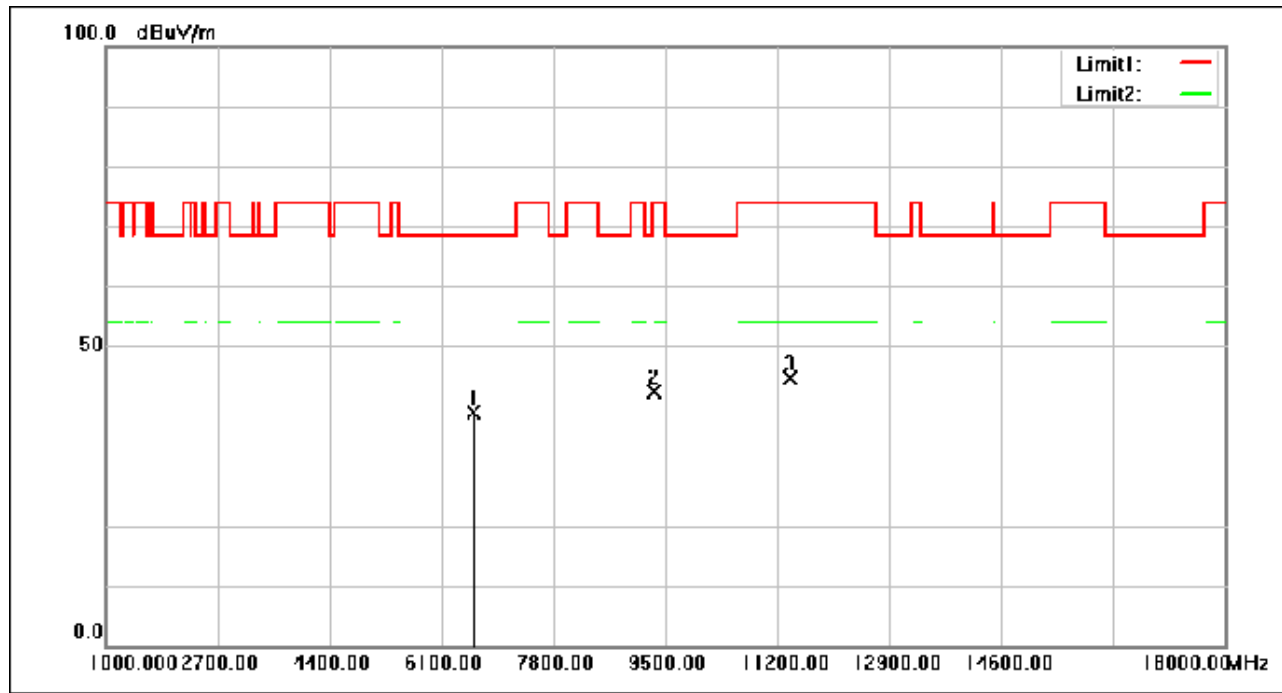

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6606.600	49.63	-10.64	38.99	68.30	-29.31	peak
2	9345.640	49.62	-7.15	42.47	74.00	-31.53	peak
3	11390.400	50.76	-6.13	44.63	74.00	-29.37	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 269 of 929

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

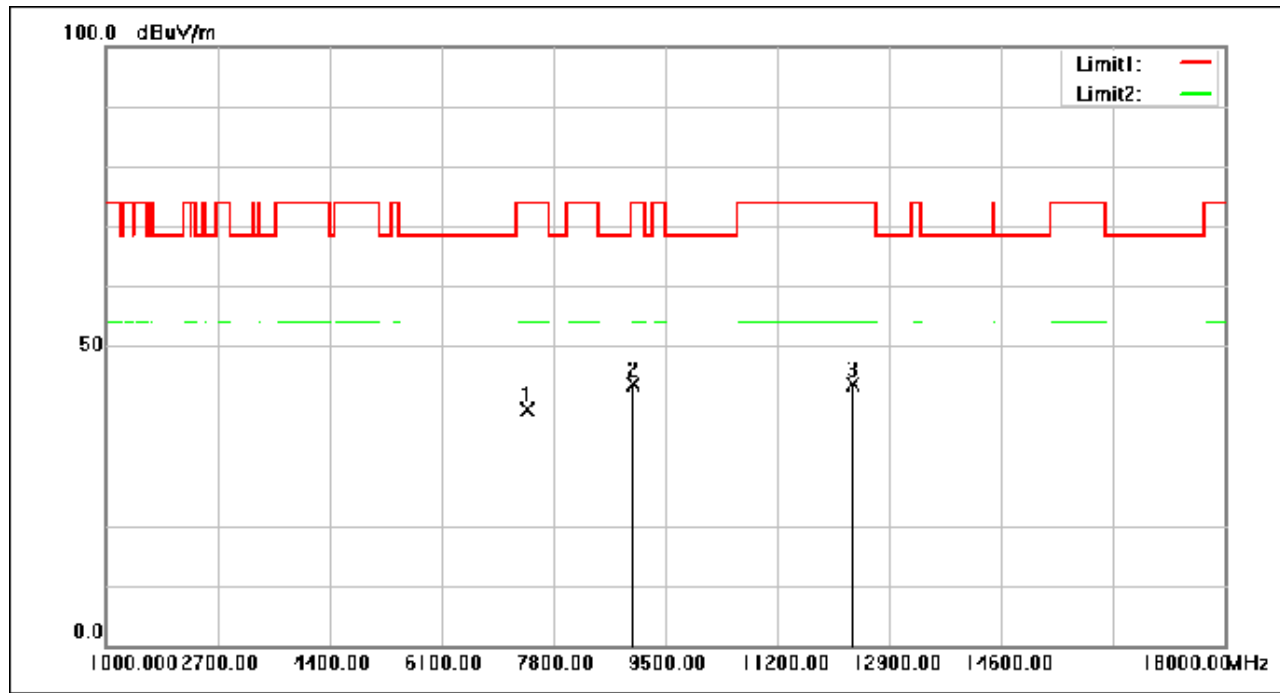

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7409.000	48.98	-9.62	39.36	74.00	-34.64	peak
2	9022.640	51.32	-7.66	43.66	74.00	-30.34	peak
3	12340.360	49.82	-6.10	43.72	74.00	-30.28	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 270 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Left); Bandwidth:20MHz; Channel:Low

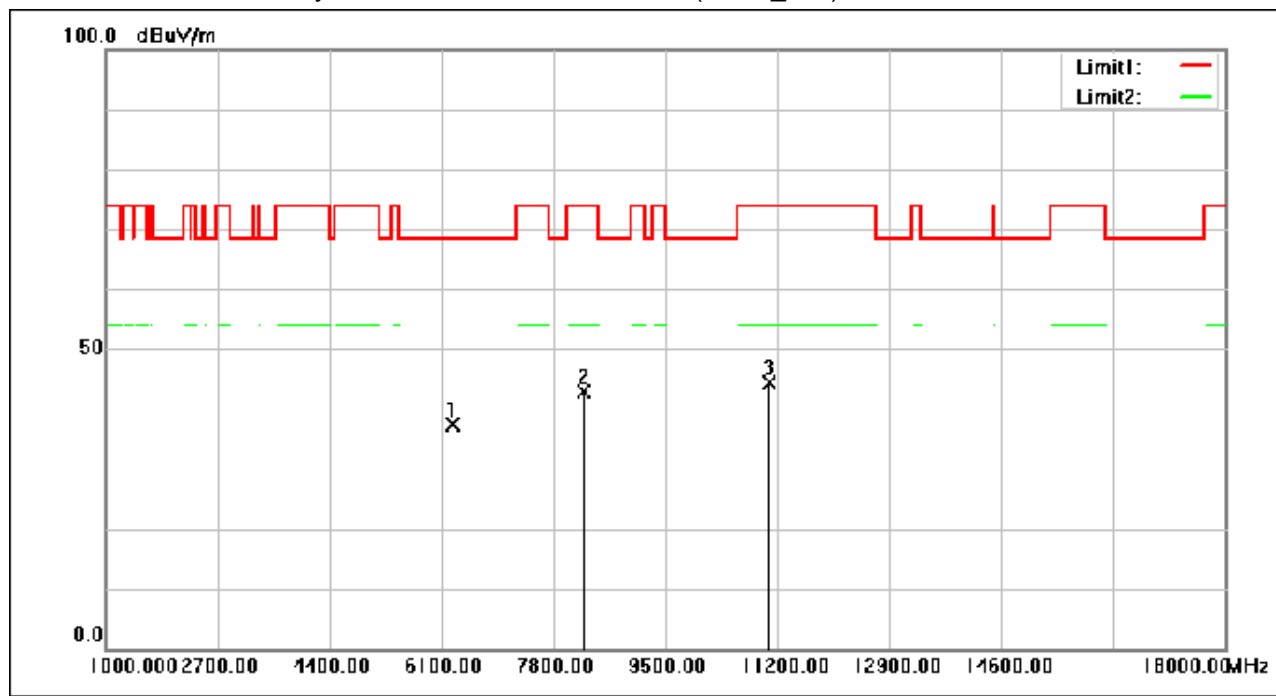

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6273.400	49.29	-12.01	37.28	68.30	-31.02	peak
2	8263.760	51.98	-9.12	42.86	74.00	-31.14	peak
3	11094.600	50.56	-6.30	44.26	74.00	-29.74	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 271 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU52_Right); Bandwidth: 20MHz; Channel: High

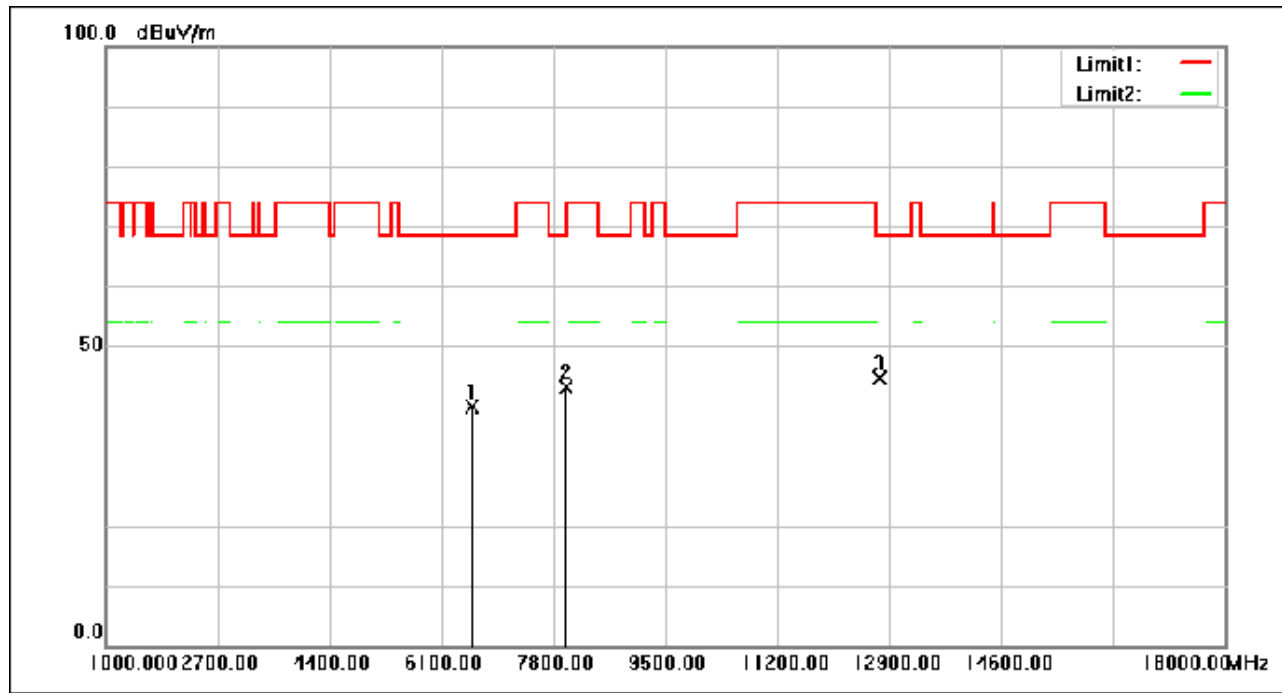

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6565.800	50.61	-10.80	39.81	68.30	-28.49	peak
2	7999.920	52.60	-9.50	43.10	68.30	-25.20	peak
3	12750.400	50.40	-5.75	44.65	68.30	-23.65	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 272 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU52_Right); Bandwidth:20MHz; Channel:High

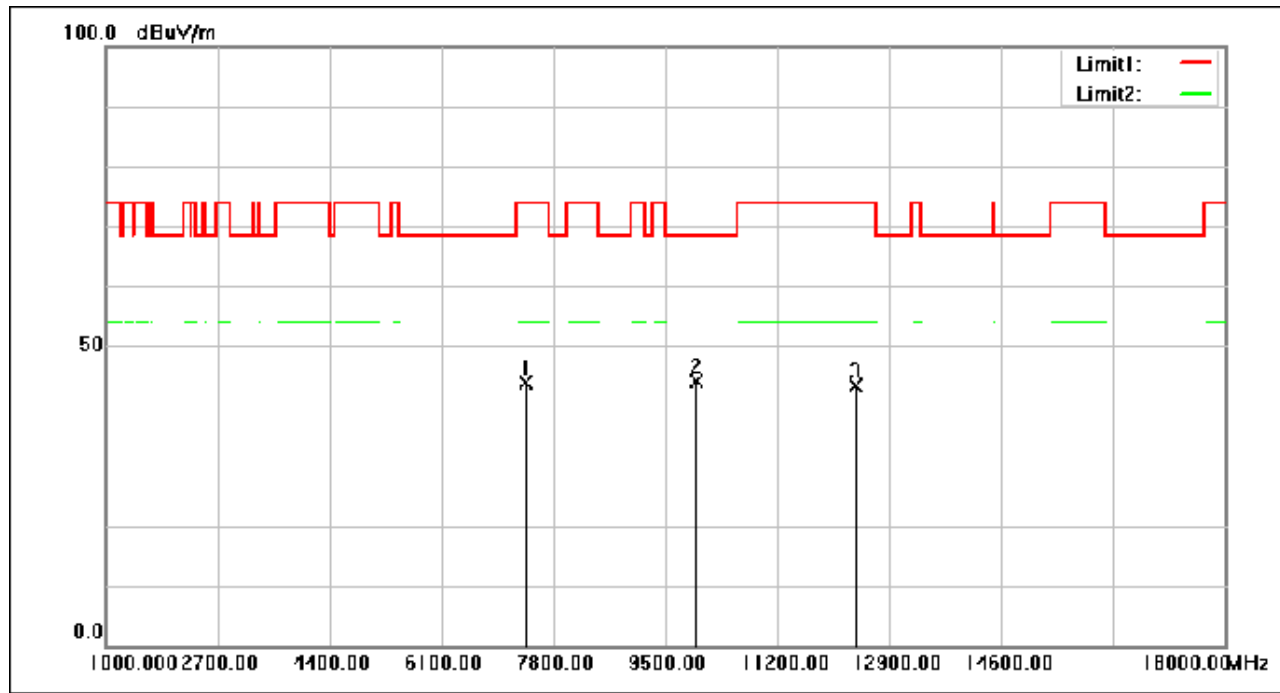

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7379.080	53.64	-9.64	44.00	74.00	-30.00	peak
2	9973.280	50.49	-6.32	44.17	68.30	-24.13	peak
3	12401.560	49.41	-6.05	43.36	74.00	-30.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 273 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU106_Left); Bandwidth: 20MHz; Channel: Low

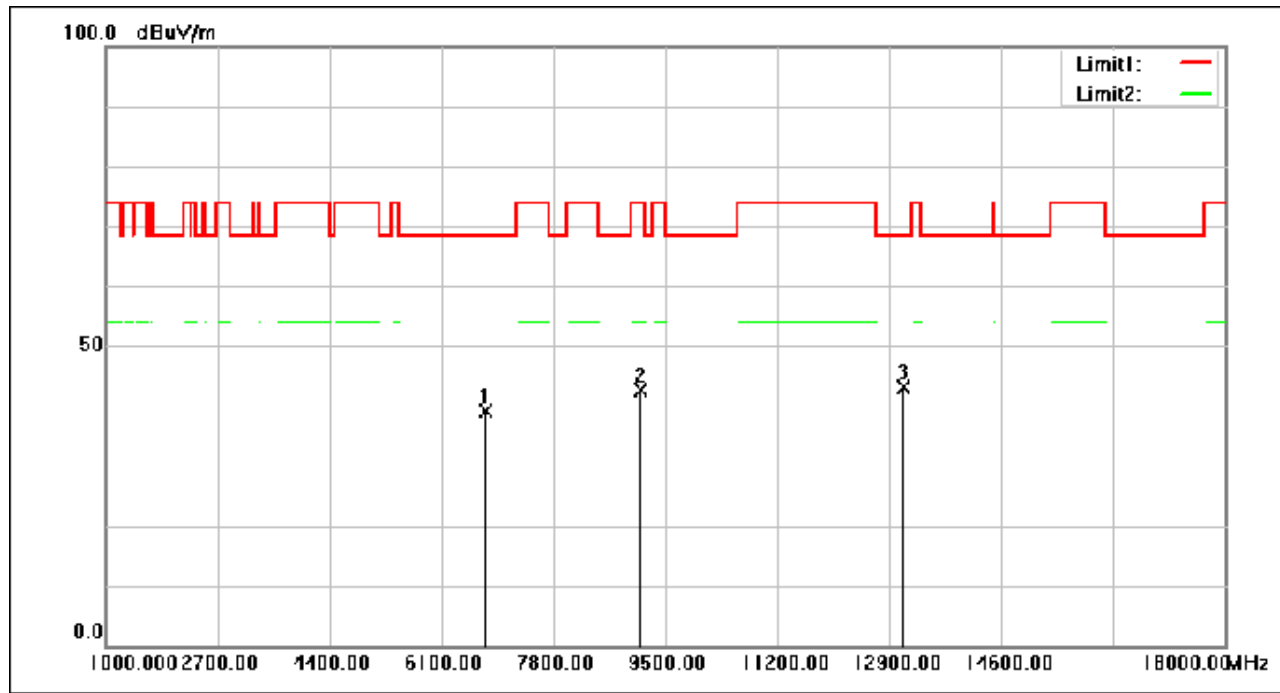

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6779.320	49.28	-10.11	39.17	68.30	-29.13	peak
2	9132.120	50.01	-7.49	42.52	74.00	-31.48	peak
3	13121.680	48.59	-5.52	43.07	68.30	-25.23	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 274 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Left); Bandwidth:20MHz; Channel:Low

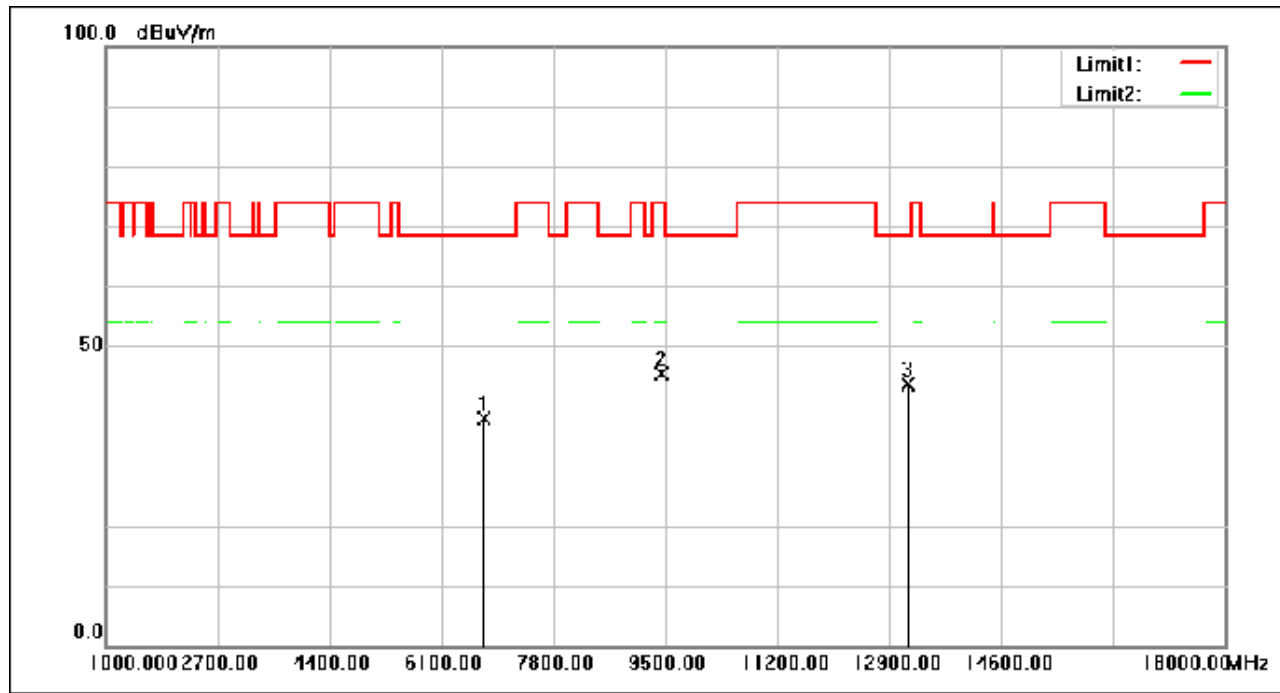

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6762.320	48.07	-10.12	37.95	68.30	-30.35	peak
2	9455.800	52.28	-6.97	45.31	74.00	-28.69	peak
3	13195.800	49.23	-5.57	43.66	68.30	-24.64	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 275 of 929

Test Mode: 02; Polarity: Horizontal; Modulation: 802.11ax(RU106_Right); Bandwidth: 20MHz; Channel: High

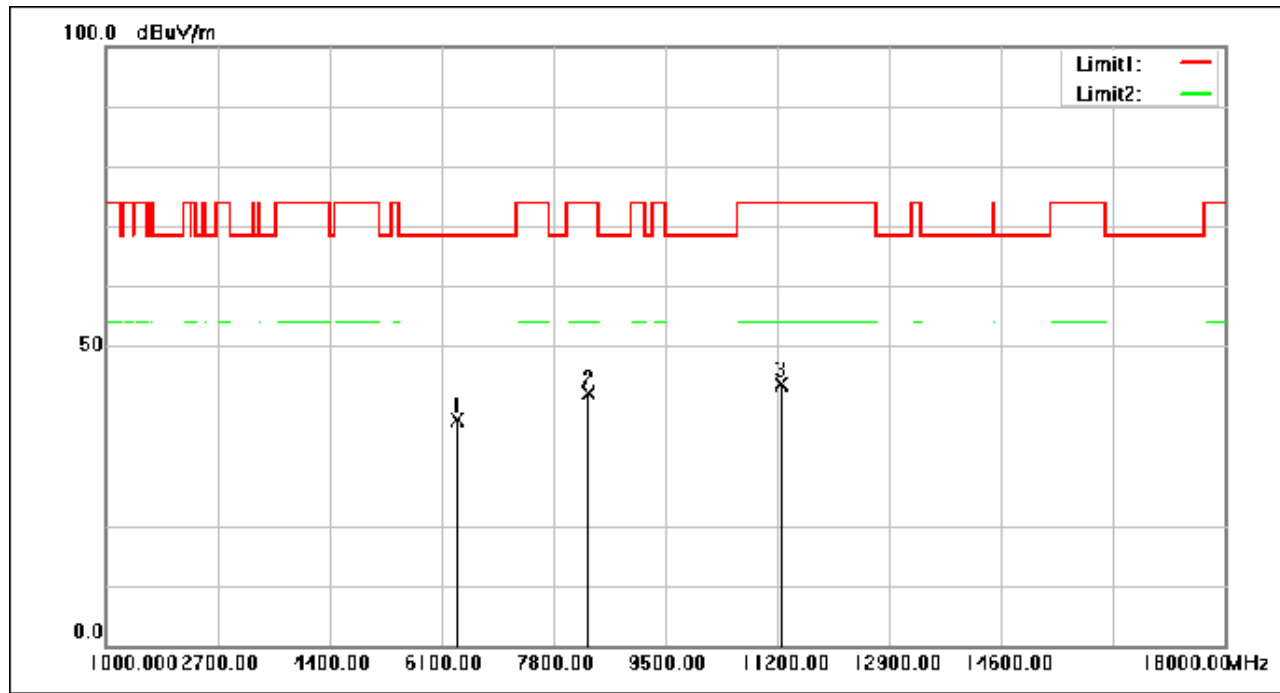

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6342.080	49.36	-11.72	37.64	68.30	-30.66	peak
2	8330.400	51.20	-9.03	42.17	74.00	-31.83	peak
3	11267.320	49.91	-6.20	43.71	74.00	-30.29	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 276 of 929

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(RU106_Right); Bandwidth:20MHz; Channel:High

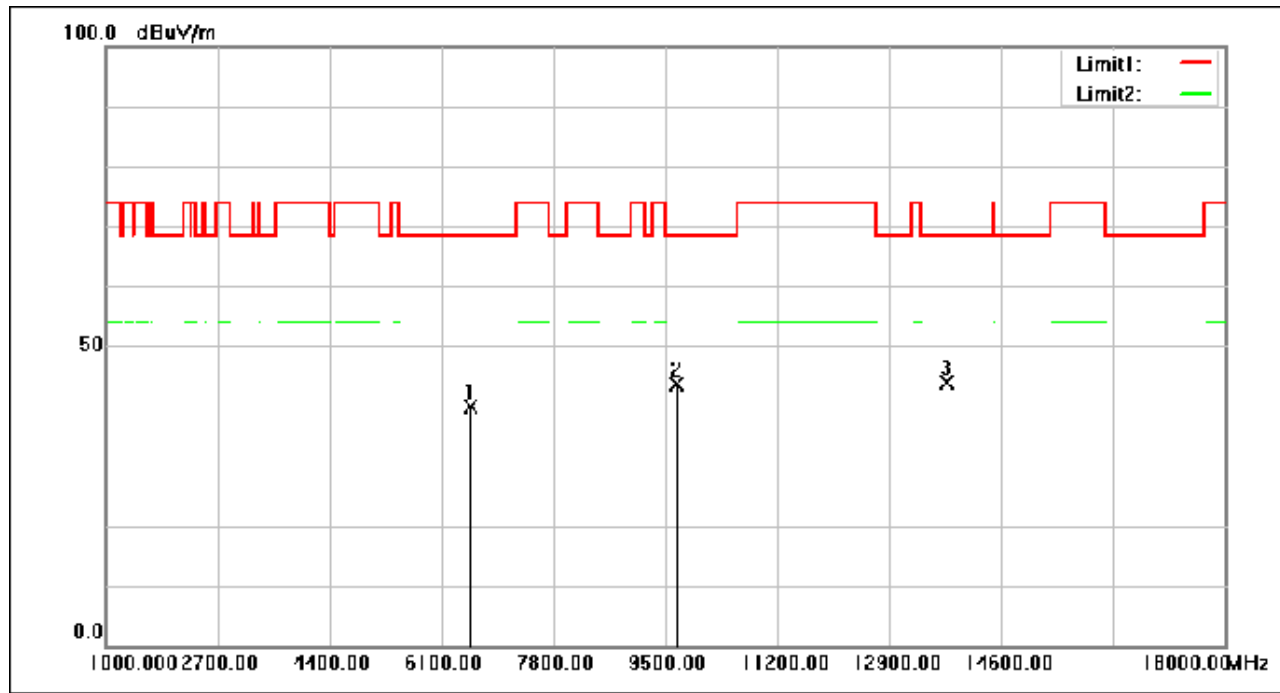

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6557.640	50.65	-10.84	39.81	68.30	-28.49	peak
2	9674.760	50.31	-6.59	43.72	68.30	-24.58	peak
3	13774.480	50.02	-6.06	43.96	68.30	-24.34	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 277 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

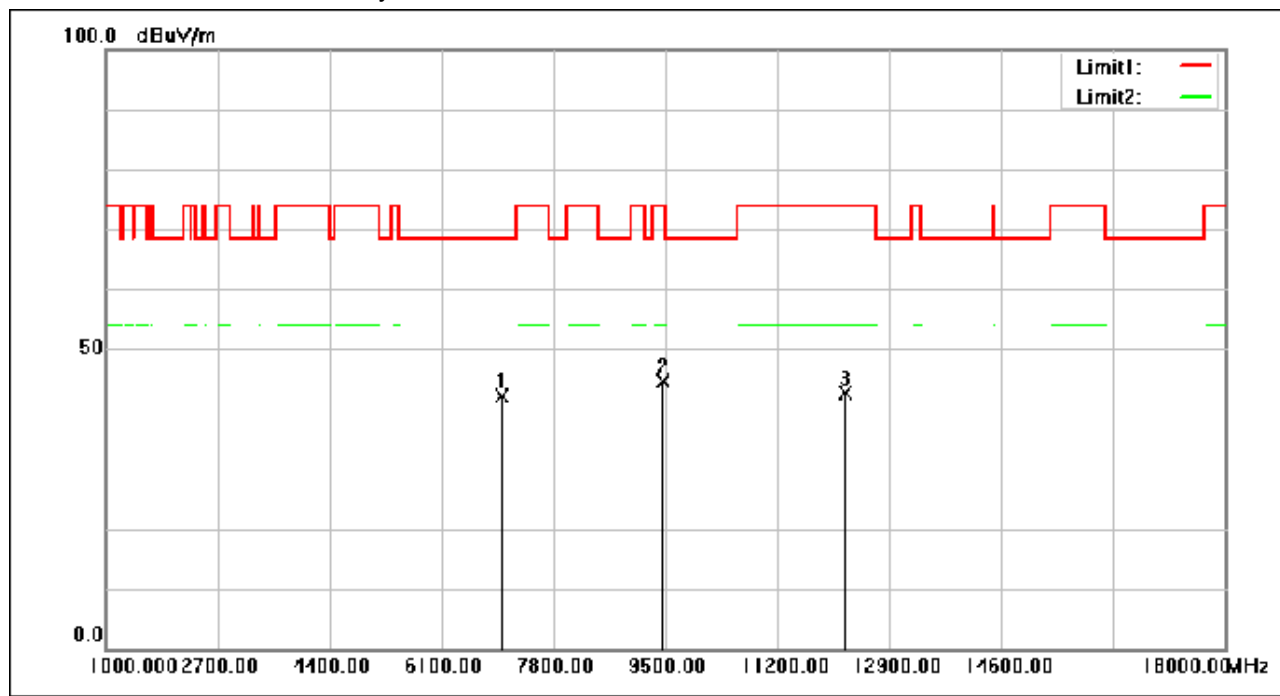

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7018.680	52.00	-9.95	42.05	68.30	-26.25	peak
2	9482.320	51.58	-6.93	44.65	74.00	-29.35	peak
3	12252.640	48.72	-6.17	42.55	74.00	-31.45	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 278 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

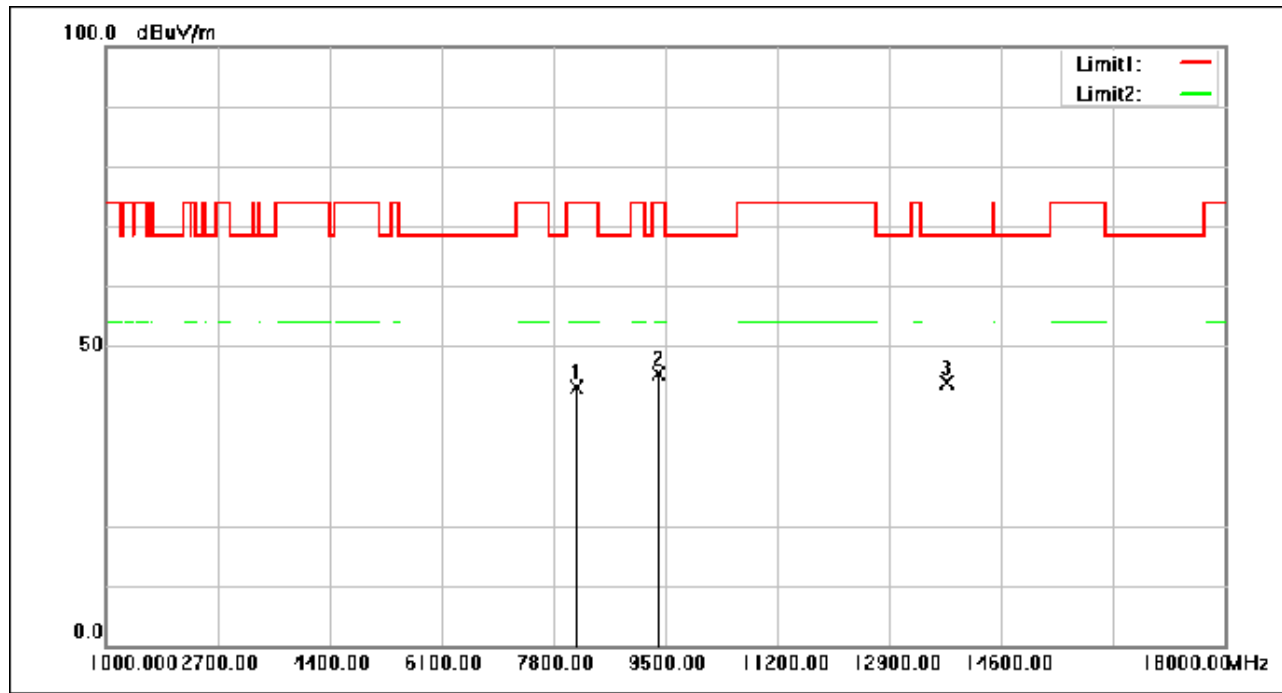

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8157.000	52.34	-9.27	43.07	74.00	-30.93	peak
2	9402.760	52.35	-7.06	45.29	74.00	-28.71	peak
3	13778.560	49.83	-6.07	43.76	68.30	-24.54	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 279 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

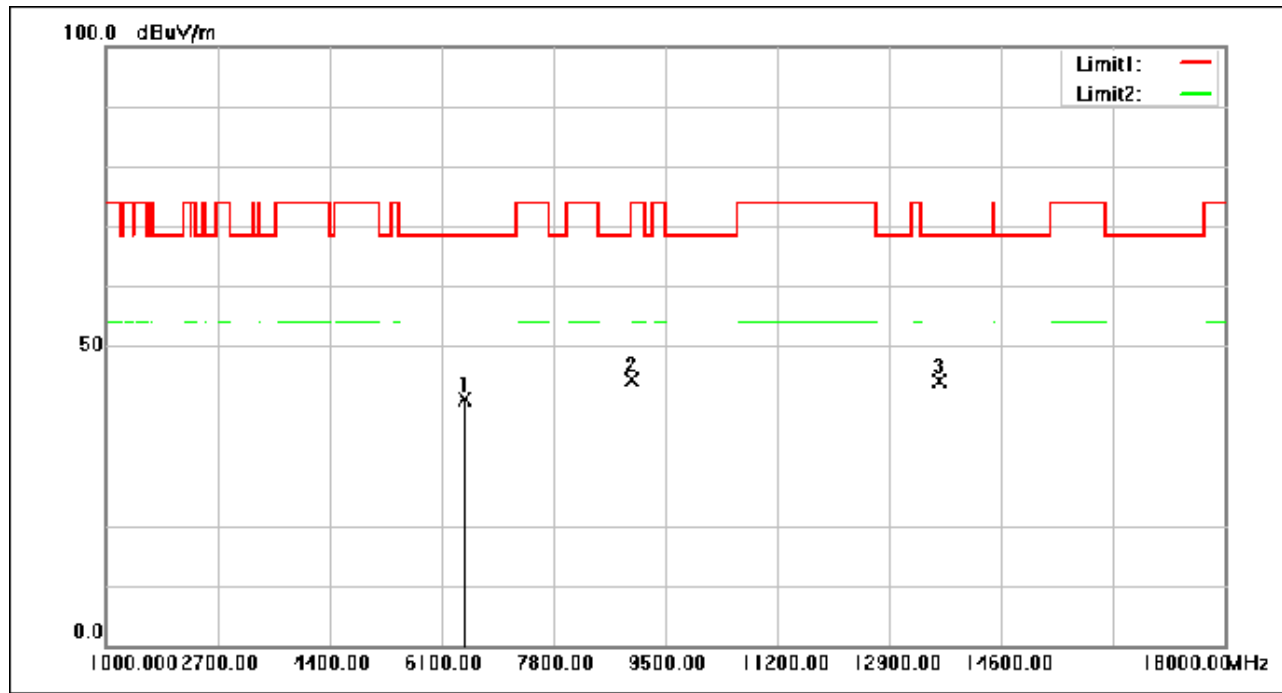

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6464.480	52.27	-11.22	41.05	68.30	-27.25	peak
2	8998.840	52.19	-7.70	44.49	68.30	-23.81	peak
3	13680.640	50.03	-5.95	44.08	68.30	-24.22	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 280 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

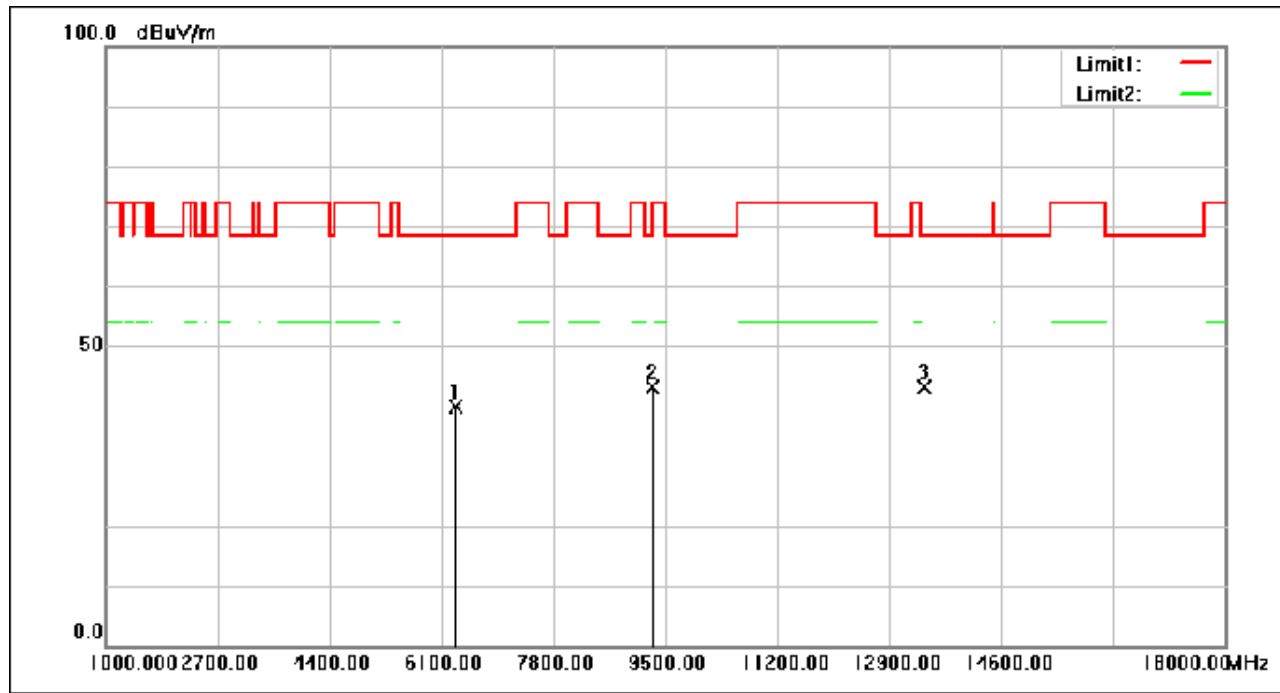

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6328.480	51.73	-11.78	39.95	68.30	-28.35	peak
2	9318.440	50.28	-7.20	43.08	74.00	-30.92	peak
3	13431.760	48.92	-5.70	43.22	68.30	-25.08	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 281 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

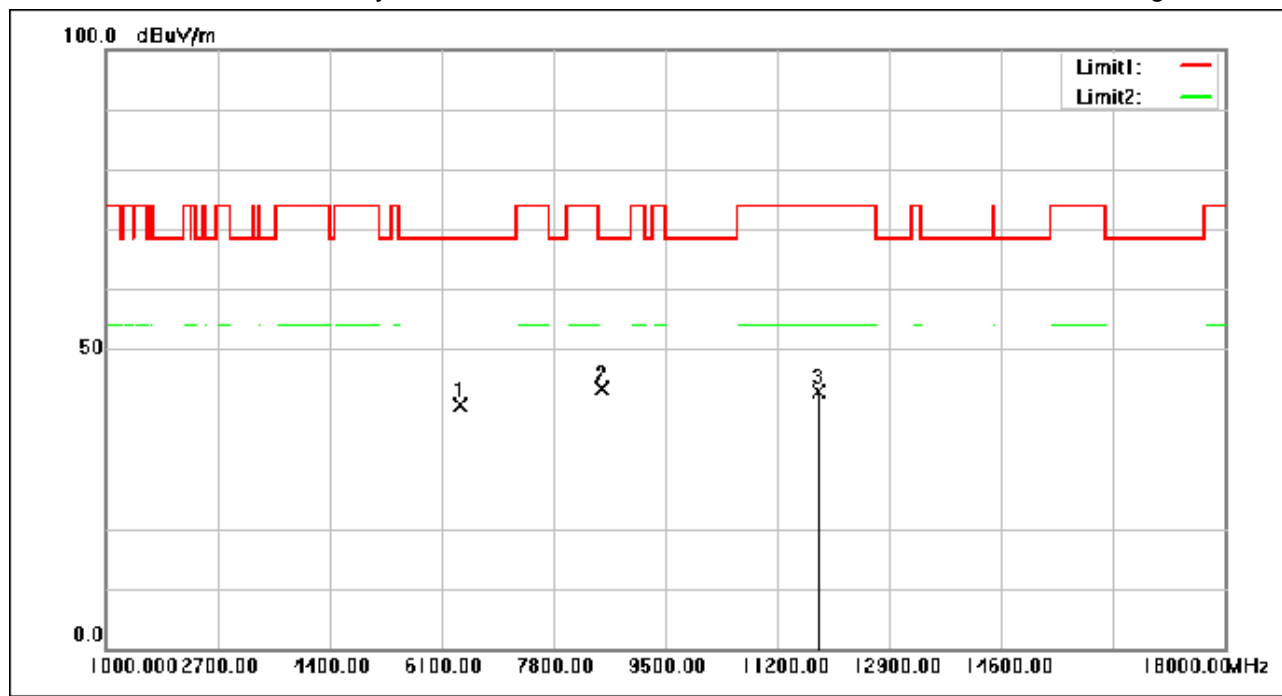

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6401.920	52.06	-11.48	40.58	68.30	-27.72	peak
2	8545.960	52.00	-8.70	43.30	68.30	-25.00	peak
3	11842.600	49.19	-6.34	42.85	74.00	-31.15	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 282 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

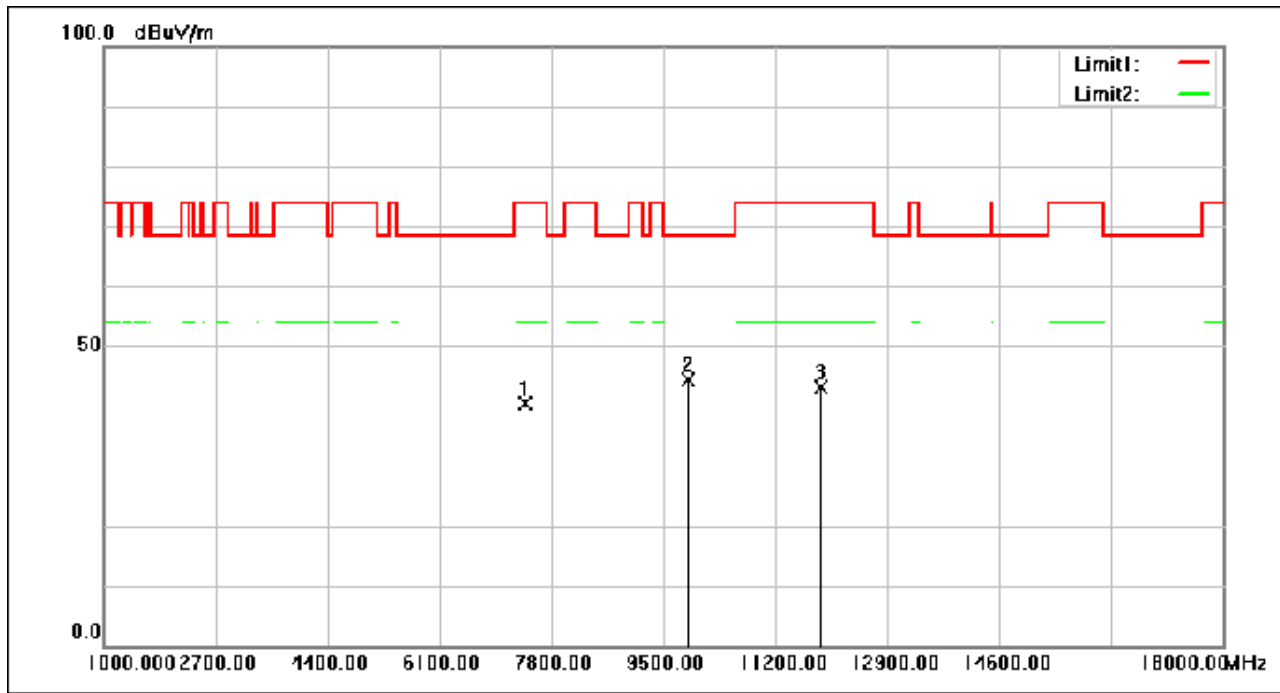

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7421.920	49.99	-9.60	40.39	74.00	-33.61	peak
2	9884.200	50.57	-6.29	44.28	68.30	-24.02	peak
3	11905.840	49.49	-6.38	43.11	74.00	-30.89	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 283 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11a; Bandwidth: 20MHz; Channel: CH144(5720MHz)

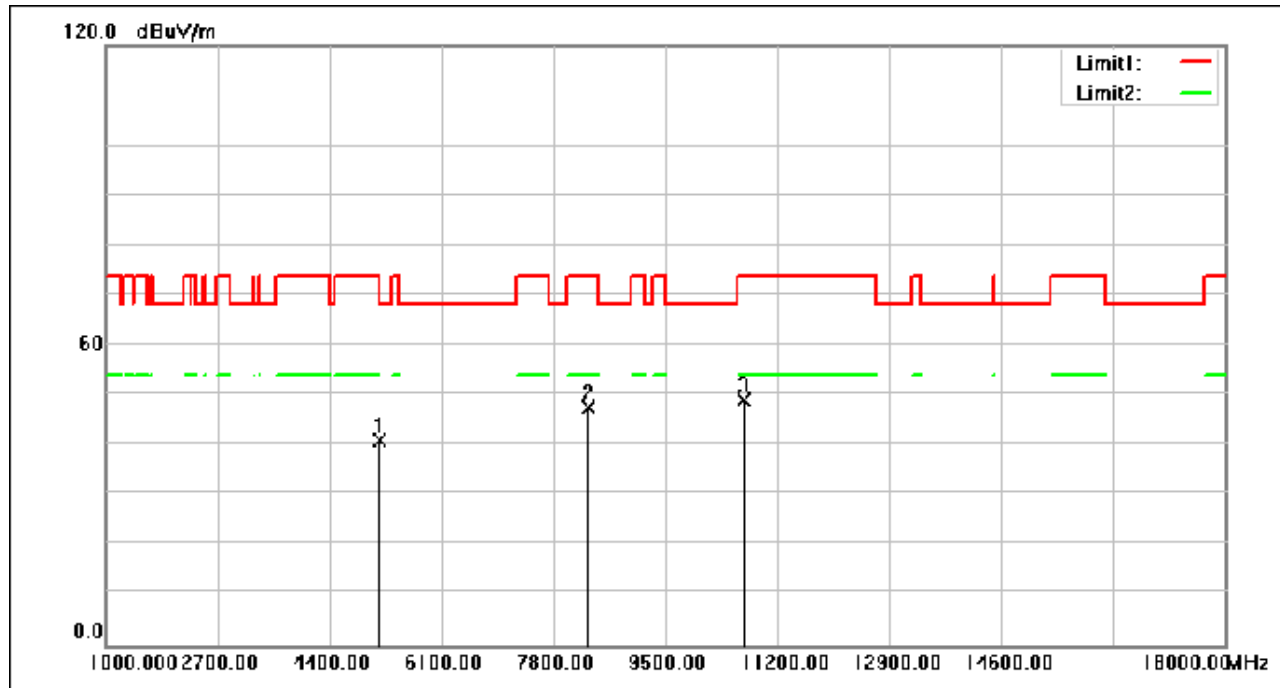

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5159.050	56.37	-15.48	40.89	68.30	-27.41	peak
2	8331.250	56.48	-9.03	47.45	74.00	-26.55	peak
3	10699.350	55.52	-6.37	49.15	74.00	-24.85	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 284 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:CH144(5720MHz)

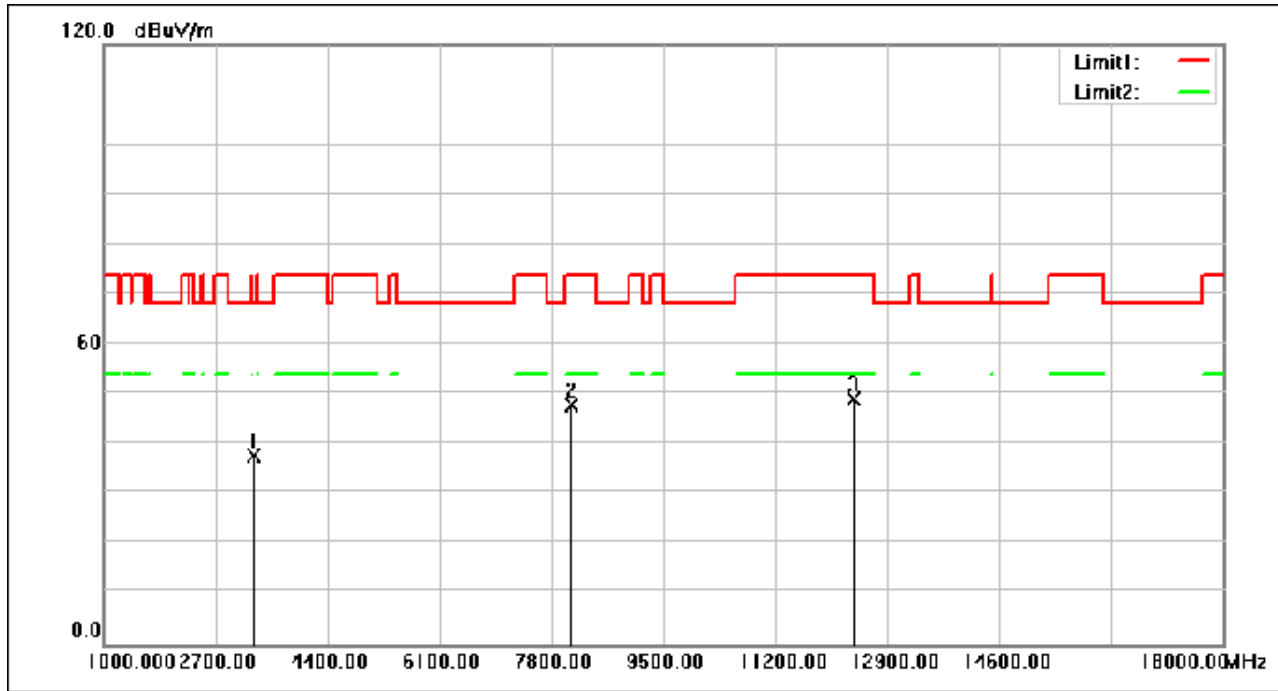

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3293.300	58.04	-20.51	37.53	68.30	-30.77	peak
2	8106.000	57.23	-9.34	47.89	74.00	-26.11	peak
3	12395.950	54.98	-6.05	48.93	74.00	-25.07	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 285 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

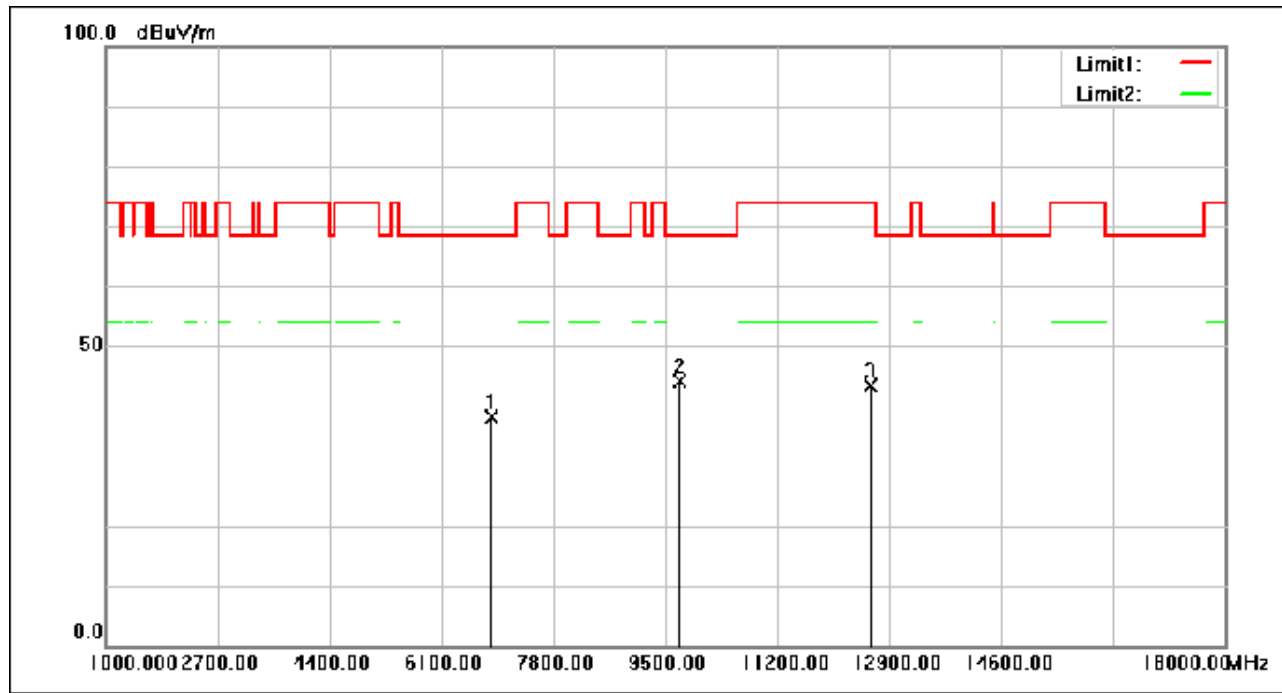

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6873.840	48.11	-10.05	38.06	68.30	-30.24	peak
2	9728.480	50.70	-6.50	44.20	68.30	-24.10	peak
3	12624.600	49.32	-5.86	43.46	74.00	-30.54	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 286 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

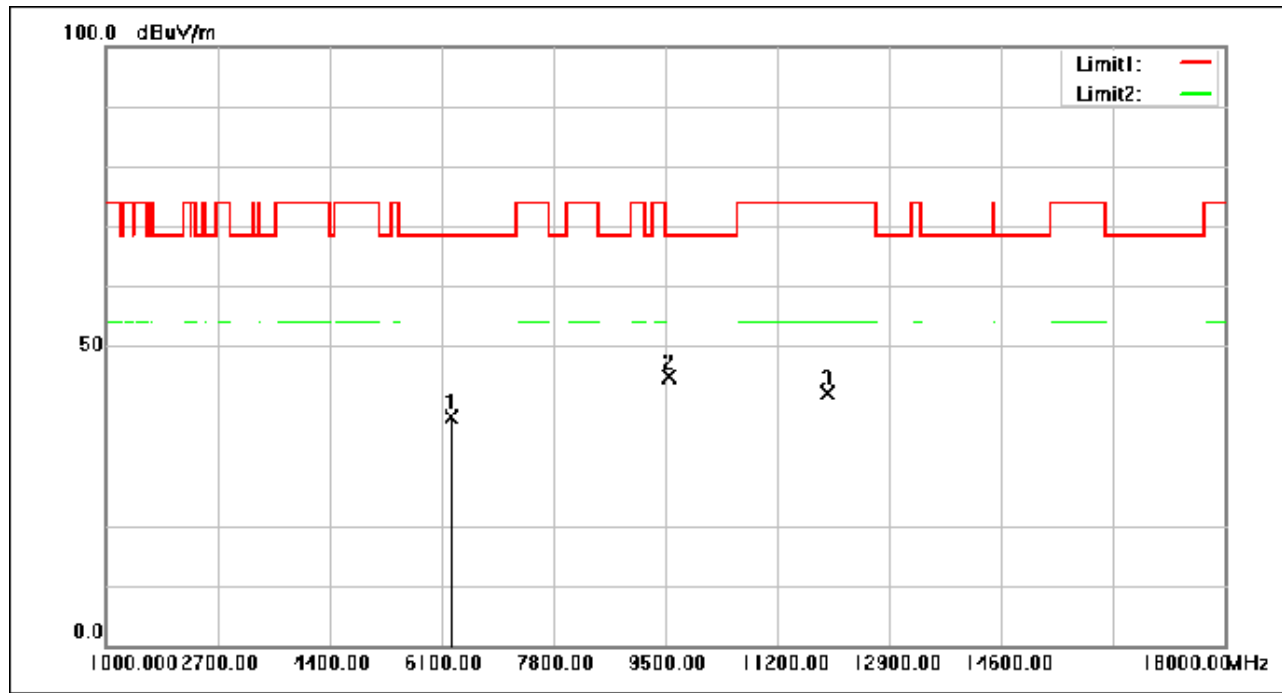

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6253.000	50.15	-12.09	38.06	68.30	-30.24	peak
2	9551.000	51.57	-6.81	44.76	68.30	-23.54	peak
3	11978.600	48.59	-6.39	42.20	74.00	-31.80	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 287 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

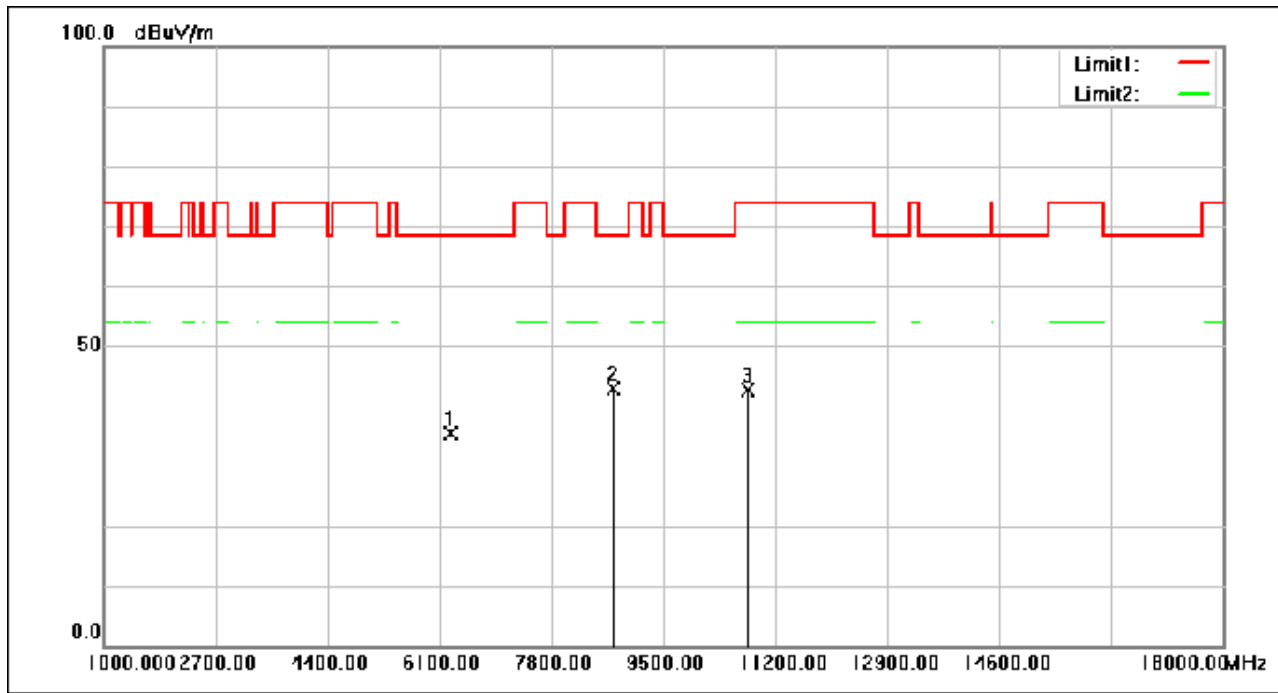

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6271.360	47.36	-12.02	35.34	68.30	-32.96	peak
2	8748.600	51.07	-8.27	42.80	68.30	-25.50	peak
3	10783.160	49.00	-6.36	42.64	74.00	-31.36	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 288 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

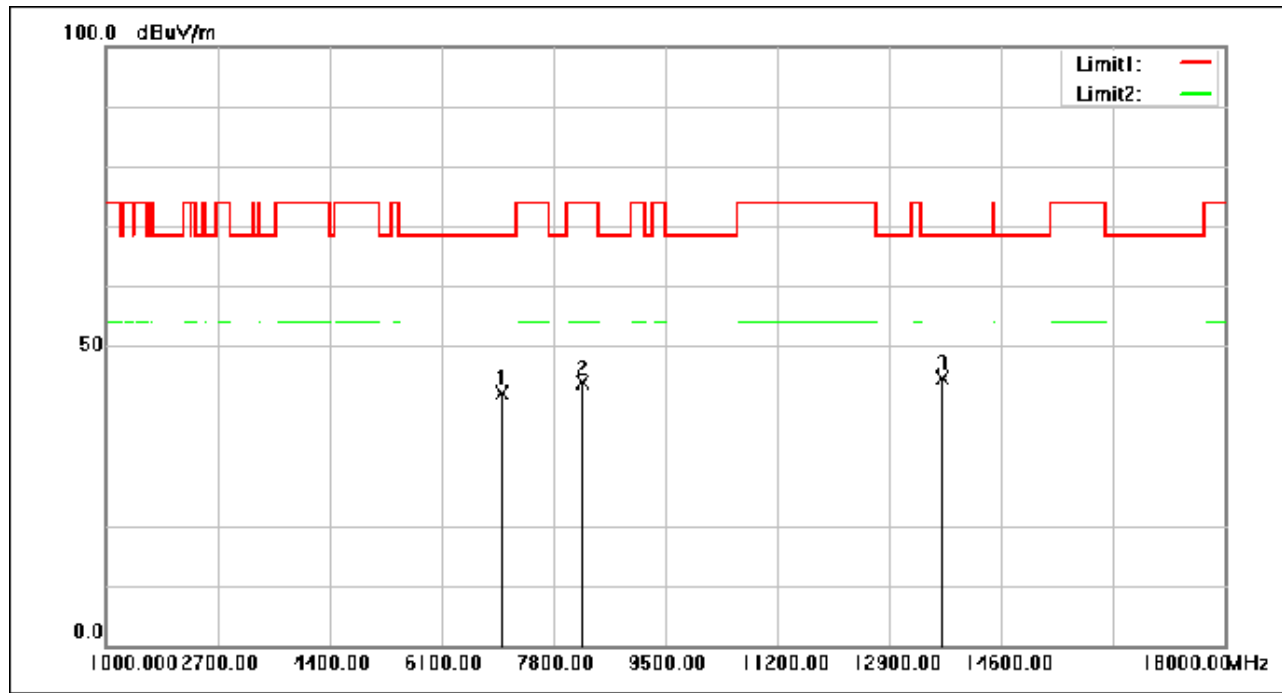

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7023.440	52.14	-9.95	42.19	68.30	-26.11	peak
2	8246.760	53.12	-9.15	43.97	74.00	-30.03	peak
3	13712.600	50.60	-5.99	44.61	68.30	-23.69	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 289 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

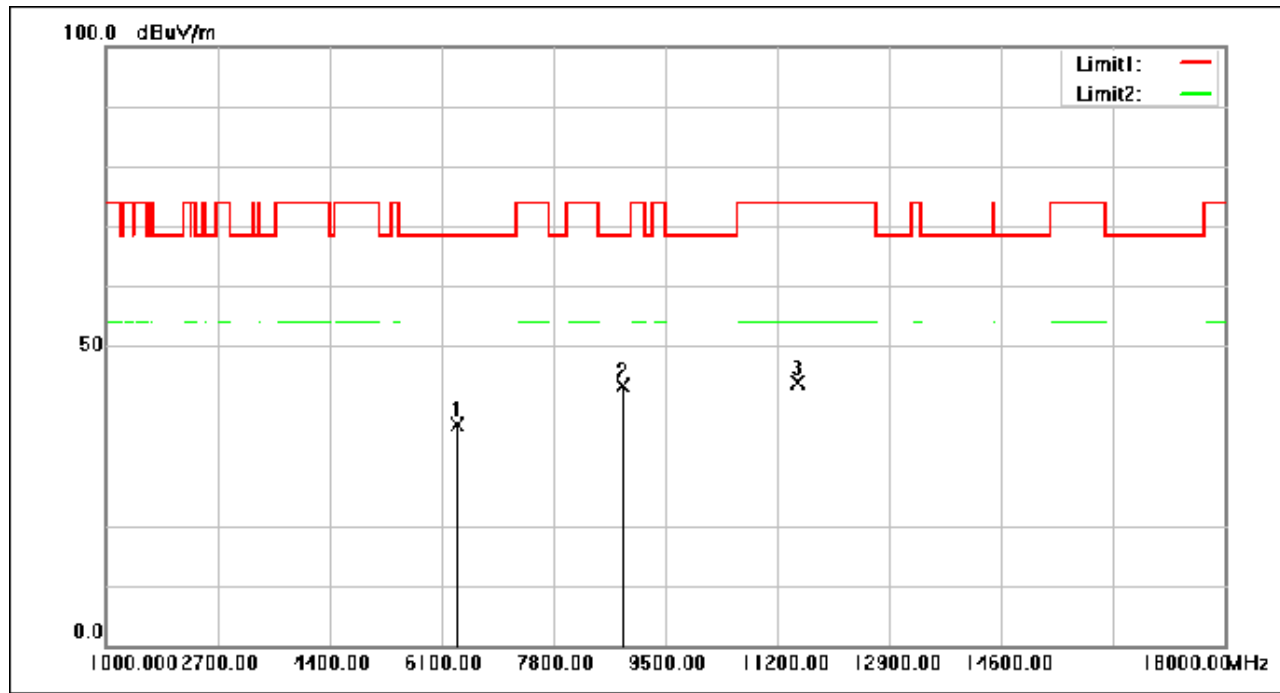

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6344.120	48.63	-11.72	36.91	68.30	-31.39	peak
2	8856.040	51.45	-8.04	43.41	68.30	-24.89	peak
3	11512.120	49.91	-6.07	43.84	74.00	-30.16	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 290 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

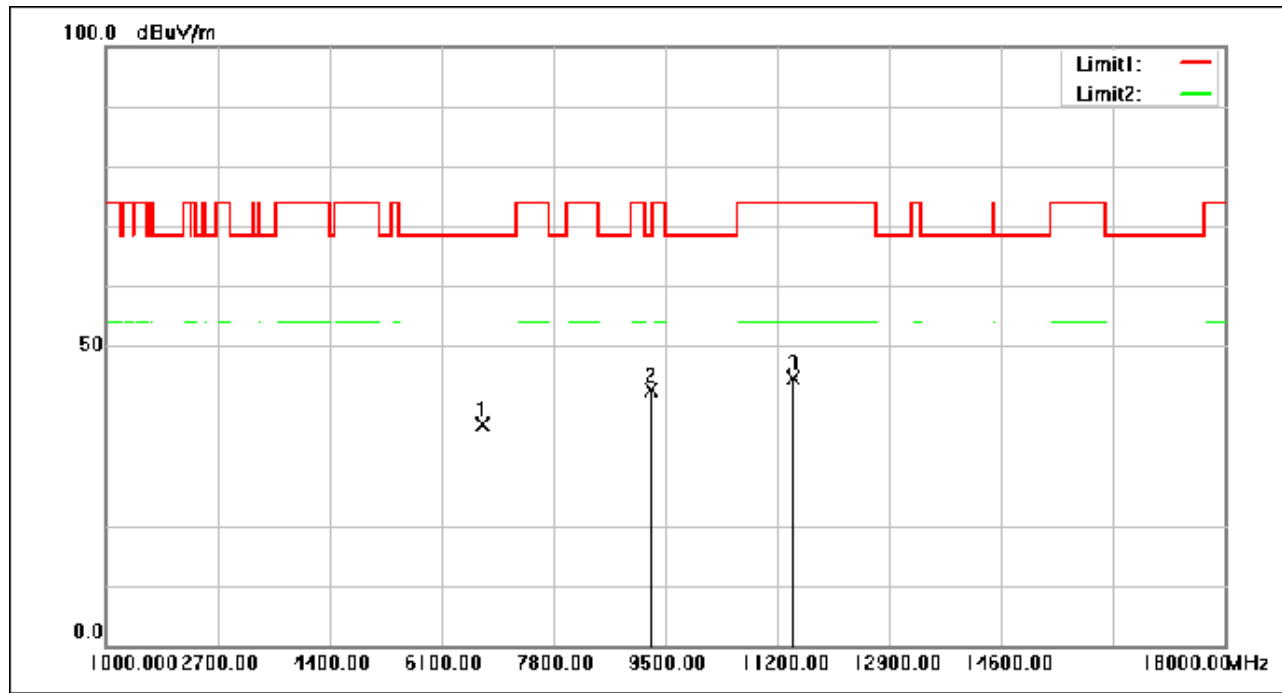

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6735.120	47.12	-10.13	36.99	68.30	-31.31	peak
2	9283.760	49.80	-7.24	42.56	68.30	-25.74	peak
3	11445.480	50.81	-6.09	44.72	74.00	-29.28	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 291 of 929

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

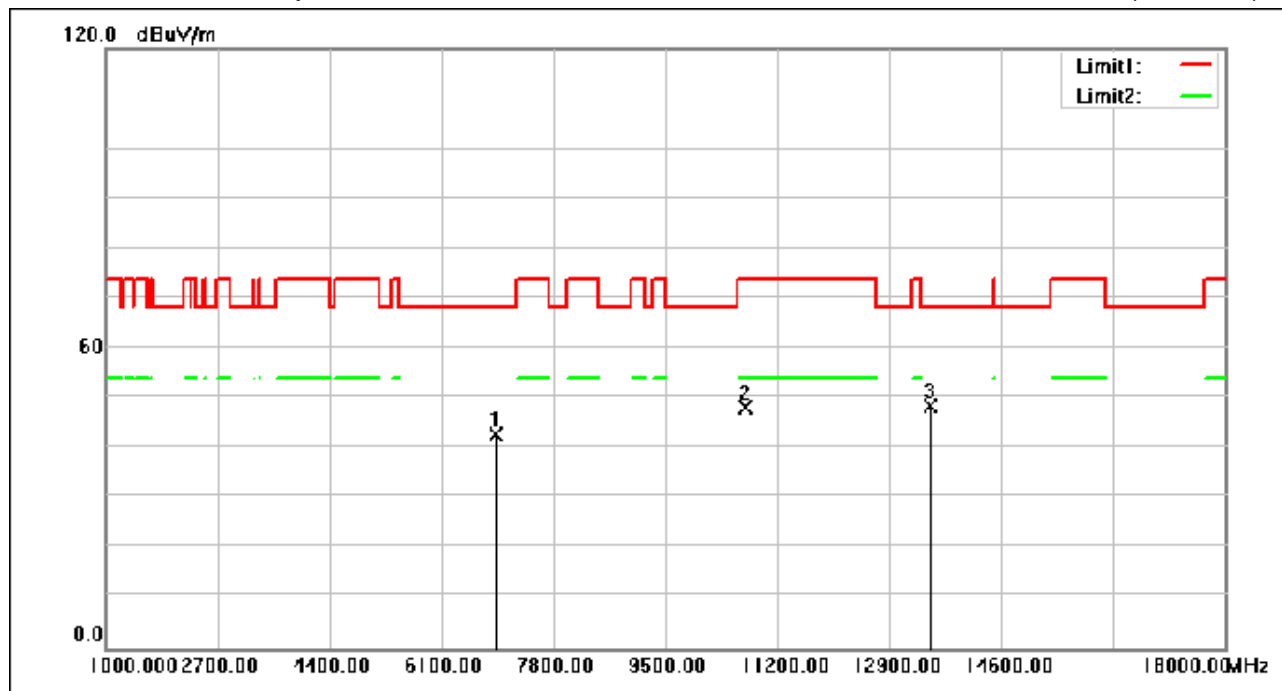

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6932.150	52.76	-10.01	42.75	68.30	-25.55	peak
2	10718.900	54.64	-6.38	48.26	74.00	-25.74	peak
3	13533.250	54.23	-5.77	48.46	68.30	-19.84	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 292 of 929

Test Mode: 03; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 20MHz; Channel: CH144(5720MHz)

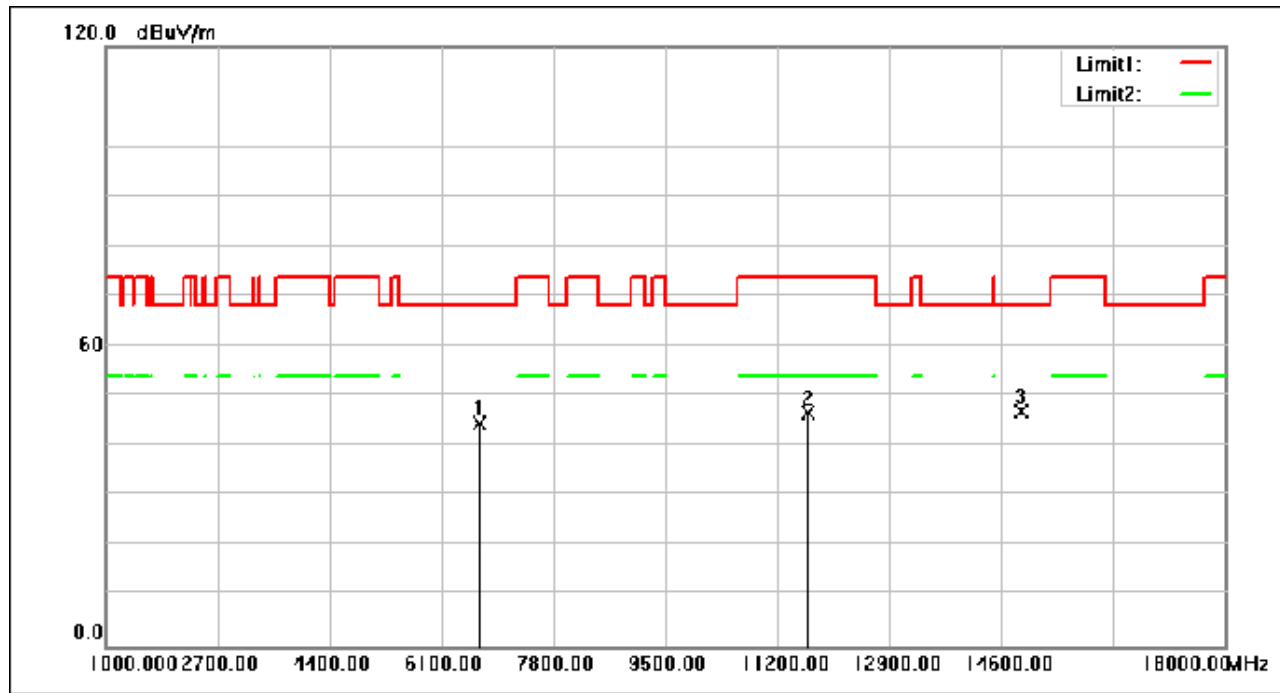

No.	Frequency (MHz)	Reading (dBuV/m)	Correction factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6692.450	54.74	-10.28	44.46	68.30	-23.84	peak
2	11671.750	52.81	-6.19	46.62	74.00	-27.38	peak
3	14908.550	52.60	-5.77	46.83	68.30	-21.47	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 293 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

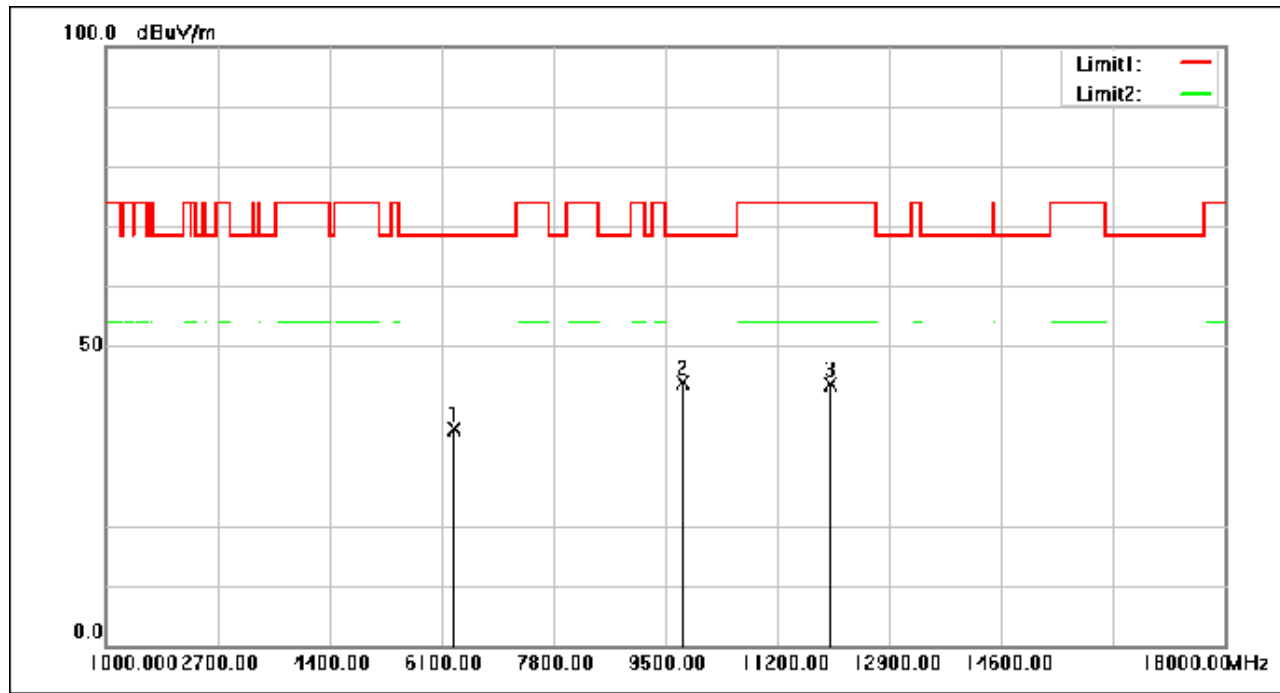

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6300.600	48.12	-11.90	36.22	68.30	-32.08	peak
2	9757.720	50.29	-6.44	43.85	68.30	-24.45	peak
3	11999.680	50.12	-6.39	43.73	74.00	-30.27	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 294 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

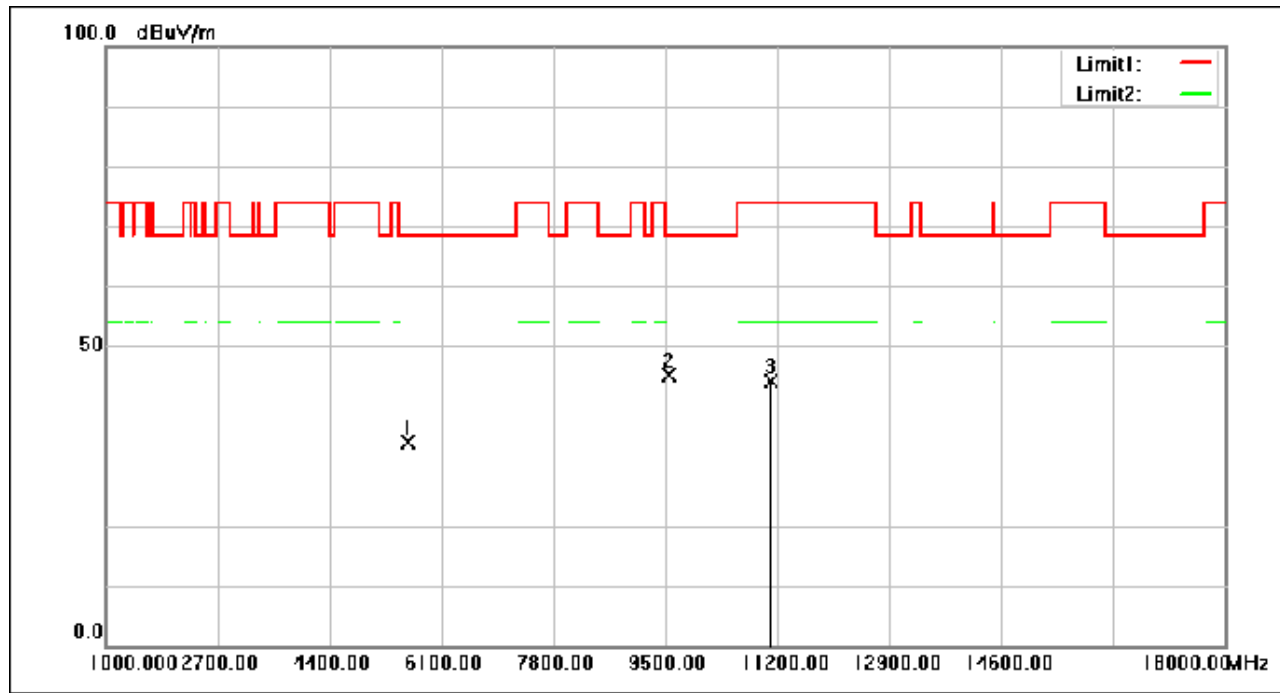

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5604.960	48.96	-15.02	33.94	68.30	-34.36	peak
2	9561.880	51.82	-6.79	45.03	68.30	-23.27	peak
3	11098.680	50.38	-6.30	44.08	74.00	-29.92	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 295 of 929

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

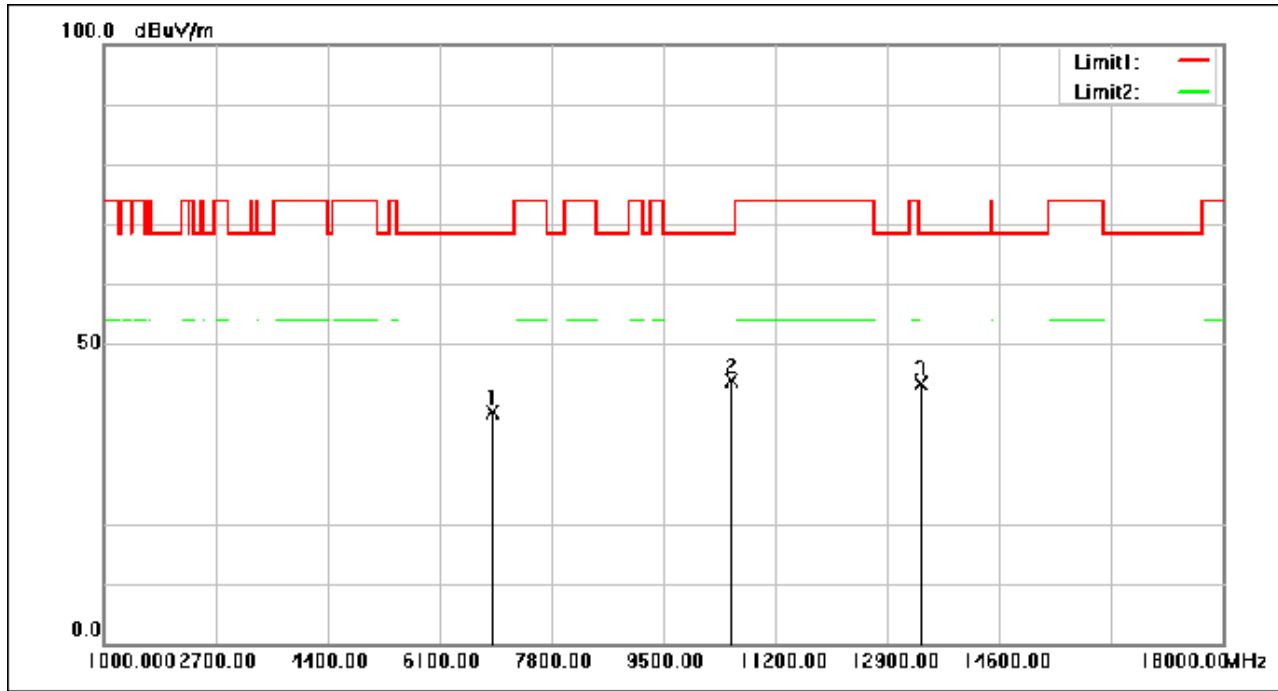

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6905.120	48.54	-10.03	38.51	68.30	-29.79	peak
2	10545.840	50.30	-6.38	43.92	68.30	-24.38	peak
3	13416.120	49.11	-5.69	43.42	68.30	-24.88	peak


Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056604

Page: 296 of 929

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:middle

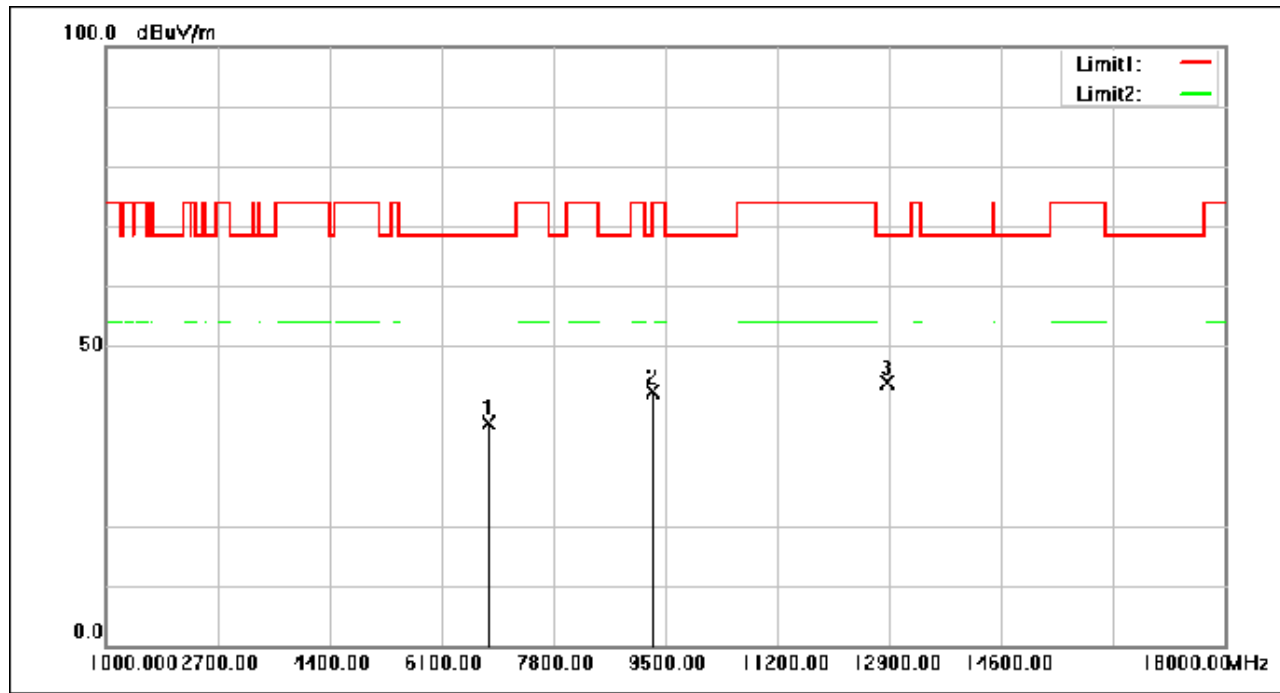

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6818.080	47.30	-10.08	37.22	68.30	-31.08	peak
2	9313.680	49.60	-7.20	42.40	74.00	-31.60	peak
3	12876.880	49.60	-5.64	43.96	68.30	-24.34	peak